

PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



HEARING AID COMPATIBILITY

Applicant Name:

LG Electronics U.S.A, Inc. 1000 Sylvan Avenue Englewood Cliffs, NJ 07632 United States Date of Testing: 12/02/2019 - 12/27/2019 Test Site/Location: PCTEST Lab, Columbia, MD, USA Test Report Serial No.: 1M1911290210-02-R1.ZNF Date of Issue: 12/31/2019

FCC ID:

ZNFL125DL

APPLICANT:

LG ELECTRONICS U.S.A, INC.

Scope of Test: Application Type: FCC Rule Part(s): HAC Standard:	Audio Band Magnetic Testing (T-Coil) Certification CFR §20.19(b) ANSI C63.19-2011 285076 D01 HAC Guidance v05
	285076 D02 T-Coil testing for CMRS IP v03
DUT Type:	Portable Handset
Model:	LG L125DL
Additional Model(s):	LGL125DL, L125DL, LM-Y120UM, LMY120UM, Y120UM, LM- Y120QM, LMY120QM, LM-Y120QM6, LMY120QM6, Y120QM6, Y120QM
Test Device Serial No.:	Pre-Production Sample [S/N: 42820]

C63.19-2011 HAC Category: T3 (SIGNAL TO NOISE CATEGORY)

Note: This revised Test Report (S/N: 1M1911290210-02-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

andy Ortanez President



FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dega 1 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 1 of 73	
© 2020 PCTEST Engineering	2020 PCTEST Engineering Laboratory, Inc.				

1.		
2.	DUT DESCRIPTION	4
3.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	5
4.	METHOD OF MEASUREMENT	7
5.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	17
6.	VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION	21
7.	FCC 3G MEASUREMENTS	
8.	T-COIL TEST SUMMARY	
9.	MEASUREMENT UNCERTAINTY	
10.	EQUIPMENT LIST	35
11.	TEST DATA	
12.	CALIBRATION CERTIFICATES	61
13.	CONCLUSION	
14.	REFERENCES	69
15.	TEST SETUP PHOTOGRAPHS	

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 2 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 2 of 73
© 2020 PCTEST Engineering	Laboratory, Inc.			REV 3.4.M

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658¹ to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dage 2 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 3 of 73	
© 2020 PCTEST Engineering I	22020 PCTEST Engineering Laboratory, Inc.				

2. DUT DESCRIPTION



FCC ID:	ZNFL125DL
Applicant:	LG Electronics U.S.A, Inc.
	1000 Sylvan Avenue
	Englewood Cliffs, NJ 07632
	United States
Model:	LG L125DL
Additional Model(s):	LGL125DL, L125DL, LM-Y120UM, LMY120UM, Y120UM, LM-Y120QM, LMY120QM, LM-Y120QM6, LMY120QM6, Y120QM6, Y120QM6, Y120QM
Serial Number:	42820
HW Version:	Rev.1.0
SW Version:	L125DL09i
Antenna:	Internal Antenna
DUT Type:	Portable Handset

I. LTE Band Selection

This device supports the following pairs of LTE bands with similar frequencies: LTE B5 & B26, LTE B4 & B66, LTE B2 & B25. These pairs of LTE bands have the same target powers and shares the same transmission paths. Since the supported frequency spans for the smaller LTE bands are completely covered by the larger LTE bands, only the larger LTE bands (LTE B26, B66, & B25) were evaluated for hearing-aid compliance.

Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service	Audio Codec Evaluated				
	835	vo	Yes	Yes: WIFI or BT	CMRS Voice ¹	EVRC				
CDMA	1900	V0	res	Yes: WIFI or B1	CIVINS VOICE	EVKC				
	EvDO	DT	No	Yes: WIFI or BT	N/A	N/A				
	850	vo	Yes	Yes: WIFI or BT	CMRS Voice ¹	EFR				
GSM	1900	VU	res	fes: WIFI OF BI	CIVIRS VOICe	EFK				
	GPRS/EDGE	DT	No	Yes: WIFI or BT	N/A	N/A				
	850									
UMTS	1700 VD	VD	Yes	Yes: WIFI or BT	CMRS Voice ¹	NB AMR				
010113	1900									
	HSPA	DT	No	Yes: WIFI or BT	N/A	N/A				
	700 (B12)									
	780 (B13)									
	850 (B5)			Yes: WIFI or BT VolTE1 VolTE1						
LTE (FDD)	850 (B26)	VD	Yes		V-1751	VoLTE: NB AMR, WB AMR				
	1700 (B4)	VD	Tes							
	1700 (B66)									
	1900 (B2)									
	1900 (B25)									
LTE (TDD)	2600 (B41)	VD	Yes	Yes: WIFI or BT	VoLTE ¹	VOLTE: NB AMR, WB AMR				
WIFI	2450	VD	Yes	Yes: CDMA, GSM, UMTS, or LTE	VoWIFI ²	VoWIFI: NB AMR, WB AMR				
BT	2450	DT	No	Yes: CDMA, GSM, UMTS, or LTE	N/A	N/A				
				evel in accordance with 7.4.2.1 of ANSI C63.19-20 evel is -20dBm0 in accordance with FCC KDB 2850		ation.				

Table 2-1 ZNFL125DL HAC Air Interfaces

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dego 4 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 4 of 73	
© 2020 PCTEST Engineering	a 2020 PCTEST Engineering Laboratory Inc.				

© 2020 PCTEST Engineering Laboratory, Inc.

REV 3.4.M 11/21/2019

3. ANSI C63.19-2011 PERFORMANCE CATEGORIES


I. MAGNETIC COUPLING

Axial and Radial Field Intensity


All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be \geq -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz - 3000 Hz per §8.3.2.

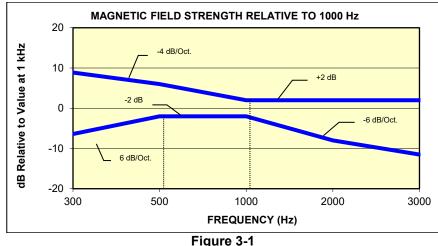

Magnetic field frequency response for Wireless Devices with an axial field ≤-15 dB(A/m) at 1 kHz

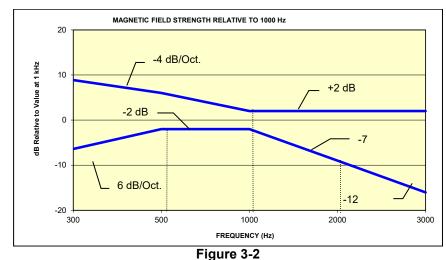

Magnetic Field frequency response for wireless devices with an axial field that exceeds -15 dB(A/m) at 1 kHz

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege E of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 5 of 73
© 2020 PCTEST Engineering	Laboratory, Inc.			REV 3.4.M 11/21/2019

Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Category	Telephone RF Parameters			
Galegory	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]			
T1	0 to 10 dB			
T2	10 to 20 dB			
Т3	20 to 30 dB			
T4	> 30 dB			
Table 3-1 Magnetic Coupling Parameters				

Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dere 6 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 6 of 73	
© 2020 PCTEST Engineering I	2020 PCTEST Engineering Laboratory, Inc.				

REV 3.4.M 11/21/2019

METHOD OF MEASUREMENT 4.

Test Setup I.

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:


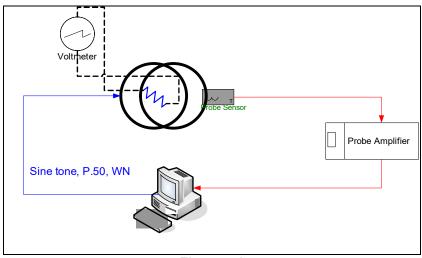


Figure 4-1 Validation Setup with Helmholtz Coil

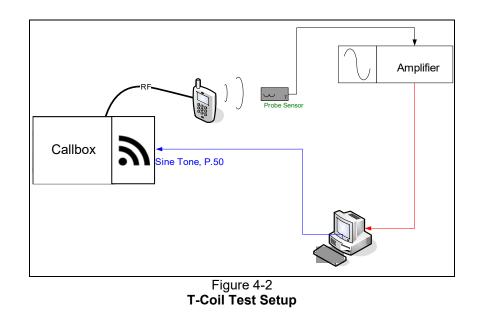

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	💽 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 7 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 7 of 73
© 2020 PCTEST Engineering I	2020 PCTEST Engineering Laboratory, Inc.			

^{11/21/2019}

II. Scanning Mechanism

Manufacturer:	TEM
Accuracy:	± 0.83 cm/meter
Minimum Step Size:	0.1 mm
Maximum speed	6.1 cm/sec
Line Voltage:	115 VAC
Line Frequency:	60 Hz
Material Composite:	Delrin (Acetal)
Data Control:	Parallel Port
Dynamic Range (X-Y-Z):	45 x 31.75 x 47 cm
Dimensions:	36" x 25" x 38"
Operating Area:	36" x 49" x 55"
Reflections:	< -20 dB (in anechoic chamber)




Figure 4-3 RF Near-Field Scanner

III. ITU-T P.50 Artificial Voice

Manufacturer:	ITU-T
Active Frequency Range:	100 Hz – 8 kHz
Stimulus Type:	Male and Female, no spaces
Single Sample Duration:	20.96 seconds
Activity Level:	100%






Figure 4-4 Spectral Characteristic of full P.50



Temporal Characteristic of full P.50

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	💽 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 9 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 8 of 73
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M

ABM1 Measurement Block Diagram:

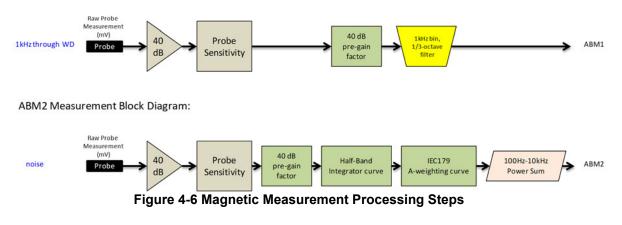

IV. Test Procedure

- 1. Ambient Noise Check per C63.19 §7.3.1
 - Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
 - b. "A-weighting" and Half-Band Integration was applied to the measurements.
 - c. Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

- 2. Measurement System Validation (See Figure 4-1)
 - a. The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
 - b. ABM1 Validation

The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_{c} = \frac{NI}{r\sqrt{1.25^{3}}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^{3}}}$$

Where H_c = magnetic field strength in amperes per meter N = number of turns per coil

For the Helmholtz Coil, N=20; r=0.08m; R=10.2Ω and using V=18mV:

$$H_c = \frac{20 \cdot (\frac{0.018}{10.2})}{0.08 \cdot \sqrt{1.25^3}} = 0.316A/m \approx -10dB(A/m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 18mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe measurement at -10dB(A/m). This was verified to be within \pm 0.5 dB of the -10dB(A/m) value (see Page 32).

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 0 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 9 of 73
© 2020 PCTEST Engineering Laboratory. Inc.				REV 3.4.M

^{© 2020} PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.




Figure 4-7 Frequency Response Validation

d. ABM2 Measurement Validation


WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

Table 4-1 ABM2 Frequency Response Validation				
f (Hz)	HBI, A - H		dB Var.	
100	-16.180	-16.170	-0.010	
125	-13.257	-13.250	-0.007	
160	-10.347	-10.340	-0.007	
200	-8.017	-8.010	-0.007	
250	-5.925	-5.920	-0.005	
315	-4.045	-4.040	-0.005	
400	-2.405	-2.400	-0.005	
500	-1.212	-1.210	-0.002	
630	-0.349	-0.350	0.001	
800	0.071	0.070	0.001	
1000	0.000	0.000	0.000	
1250	-0.503	-0.500	-0.003	
1600	-1.513	-1.510	-0.003	
2000	-2.778	-2.780	0.002	
2500	-4.316	-4.320	0.004	
3150	-6.166	-6.170	0.004	
4000	-8.322	-8.330	0.008	
5000	-10.573	-10.590	0.017	
6300	-13.178	-13.200	0.022	
8000	-16.241	-16.270	0.029	
10000	-19.495	-19.520	0.025	

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 10 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 10 of 73
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M


REV 3.4.M 11/21/2019

ABM2 Frequency Response Validation (LISTEN)

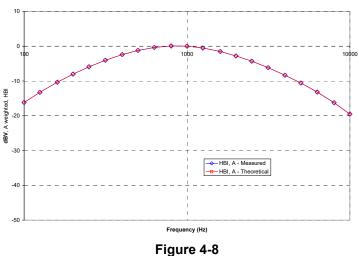

ABM2 Frequency Response Validation

The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and Aweighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-9). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:




The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.


Table 4-2 ABM2 Power Sum Validation					
WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)		
-60	-60.36	-60.2	0.16		
-50	-50.19	-50.13	0.06		
-40	-40.14	-40.03	0.11		
-30	-30.13	-30.01	0.12		
-20	-20.12	-20	0.12		
-10	-10.14	-10	0.14		

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 11 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 11 of 73
2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M

© 2020 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any question enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM. produced or utilized in any part, form or by any mea nal copyright or have a



- 3. Measurement Test Setup
 - a. Fine scan above the WD (TEM)
 - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-12, the grid is not to scale but merely a graphical representation of the coordinate system in use):

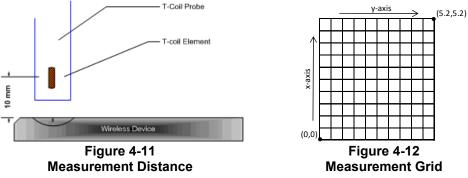

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-14 after a T-coil orientation was fully measured with the SoundCheck system.
 b. Speech Signal Setup to Base Station Simulator
- - i. C63.19 Table 7-1 states audio reference input levels for various technologies:


FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Deg 10 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 12 of 73
2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M 11/21/2019

Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
iDEN TM	TDMA (22 and 11 Hz)	-18

- ii. See Section 5 and 6 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE), and Voice Over WIFI (VoWIFI) testing.
- c. Real-Time Analyzer (RTA)
 - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
 - i. The device was chosen to be tested in the worst-case ABM2 condition (See Section 7 for more information regarding worst-case configurations for CDMA and UMTS. LTE configuration information can be found in Section 5. WIFI configuration information can be found in Section 6.)
 - ii. Supported GSM vocoders were investigated for the worst-case ABM2 condition. GSM-EFR was deemed the worst-case condition for the GSM air interface.
- 4. Signal Quality Data Analysis
 - a. Narrow-band Magnetic Intensity
 - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.
 - b. Frequency Response
 - i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 – 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
 - ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-7. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
 - iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.
 - c. Signal Quality Index
 - i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
 - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
 - iii. This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 12 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 13 of 73
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M

V. Test Setup



Audio Magnetic Field Test Setup

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

VI. Deviation from C63.19 Test Procedure

Non-conducted RF connection due to inaccessible RF ports.

VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS were tested for T-coil unless otherwise noted. See Table 2-1 for more details regarding which modes were tested.

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 14 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 14 of 73
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M

VIII. Wireless Device Channels and Frequencies

1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band.

Test frequencies & associated channels						
Frequency (MHz)						
836.52						
836.60						
836.60						
1730.40						
1880						
1880						
1880						

Table 4-3 Center Channels and Frequencies

2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. Low-mid and mid-high channels are additionally tested for LTE TDD. See Tables 8-5 to 8-11 for LTE bandwidths and channels.

3. WIFI

The middle channel for each IEEE 802.11 standard was tested for each probe orientation. The 2.4GHz IEEE 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels. See Table 8-12 for WIFI standards and channels.

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 15 of 73
© 2020 PCTEST Engineering I	_aboratory, Inc.			REV 3.4.M

IX. Test Flow

The flow diagram below was followed (From C63.19):

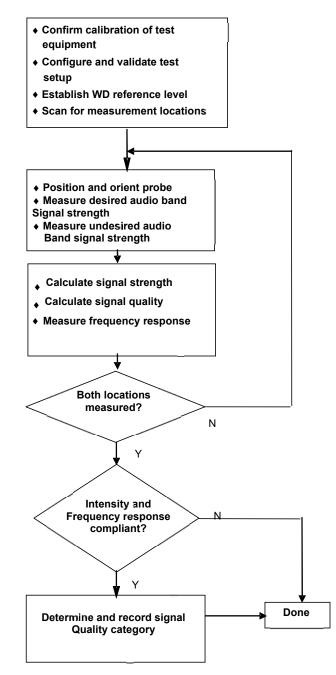


Figure 4-14 C63.19 T-Coil Signal Test Process

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 16 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 16 of 73
© 2020 PCTEST Engineering Laboratory, Inc.				

5. **VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION**

I. Test System Setup for VoLTE over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

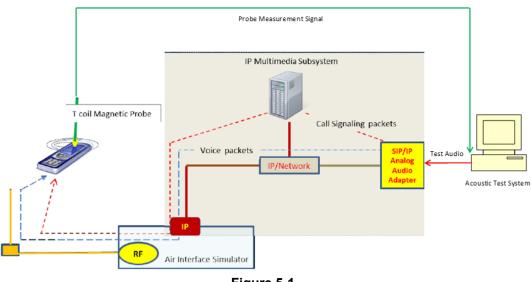


Figure 5-1 Test Setup for VoLTE over IMS T-Coil Measurements

2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level*. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

* http://c63.org/documents/misc/posting/new_interpretations.htm

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	💽 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 17 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 17 of 73
© 2020 PCTEST Engineering I	Laboratory, Inc.	·		REV 3.4.M

П. DUT Configuration for VoLTE over IMS T-coil Testing

1. Radio Configuration

An investigation was performed to determine the modulation and RB configuration to be used for testing. The effects of modulation and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. 16QAM, 1RB, 0RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

		-				<u> </u>			
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
66	1745.0	132322	20	QPSK	1	0	-2.77	-62.86	60.09
66	1745.0	132322	20	QPSK	1	50	-3.07	-62.64	59.57
66	1745.0	132322	20	QPSK	1	99	-3.09	-62.52	59.43
66	1745.0	132322	20	QPSK	50	0	-2.81	-62.67	59.86
66	1745.0	132322	20	QPSK	50	25	-3.11	-62.92	59.81
66	1745.0	132322	20	QPSK	50	50	-3.07	-62.70	59.63
66	1745.0	132322	20	QPSK	100	0	-3.22	-62.55	59.33
66	1745.0	132322	20	16QAM	1	0	-3.00	-62.04	59.04
66	1745.0	132322	20	16QAM	1	50	-3.09	-62.29	59.20
66	1745.0	132322	20	16QAM	1	99	-2.83	-62.26	59.43
66	1745.0	132322	20	16QAM	50	0	-2.83	-62.76	59.93
66	1745.0	132322	20	16QAM	50	25	-3.10	-62.56	59.46
66	1745.0	132322	20	16QAM	50	50	-3.10	-62.88	59.78
66	1745.0	132322	20	16QAM	100	0	-3.16	-62.78	59.62

Table 5-1 VoLTE over IMS SNNR by Radio Configuration


2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

	AMR	Codec Inv	estigatior	η – VoLTE	over IMS		
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	-2.99	-2.74	-1.41	-1.56			
ABM2 (dBA/m)	-62.44	-62.06	-62.32	-62.30	Axial	Band 66	132322
Frequency Response	Pass	Pass	Pass	Pass	20MHz	Axiai 20MHz	132322
S+N/N (dB)	59.45	59.32	60.91	60.74			

Table 5-2

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 19 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 18 of 73
© 2020 PCTEST Engineering	aboratory Inc	•		REV 34 M

3. LTE TDD Uplink-Downlink Configuration Investigation for VoLTE over IMS

An investigation was performed to determine the worst-case Uplink-Downlink configuration for VoLTE over IMS T-Coil testing.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length $T_f = 307200 \cdot T_s = 10 \text{ ms}$, where T_s is a number of time units equal to 1/(15000 x 2048) seconds. Additionally, each radio frame consists of 10 subframes, each of length $30720 \cdot T_s = 1 \text{ ms}$, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is 2192 \cdot Ts which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity				Su	bfram	e numt					Calculated Transmission
0	,	0	1	2	3	4	5	6	7	8	9	Duty Cycle (%)
0	5 ms	D	S	U	U	U	D	S	U	U	U	61.4%
1	5 ms	D	S	U	U	D	D	S	U	U	D	41.4%
2	5 ms	D	S	U	D	D	D	S	U	D	D	21.4%
3	10 ms	D	S	U	U	U	D	D	D	D	D	30.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	20.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	10.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	51.4%

Table 5-3 Uplink-Downlink Configurations for Type 2 Frame Structures

a. Power Class 3 Uplink-Downlink Configuration Investigation

Power class 3 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 0RB Offset. For Power Class 3, all configurations (0-6) are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 1 was used as the worst-case configuration for Power Class 3 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

	100		JVOLIL	Over II			ooningu	ation	
Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	0	0	-2.70	-52.86	50.16
2593.0	40620	20	16QAM	1	0	1	-2.72	-51.53	48.81
2593.0	40620	20	16QAM	1	0	2	-2.64	-51.64	49.00
2593.0	40620	20	16QAM	1	0	3	-2.77	-54.90	52.13
2593.0	40620	20	16QAM	1	0	4	-2.84	-54.75	51.91
2593.0	40620	20	16QAM	1	0	5	-2.83	-54.33	51.50
2593.0	40620	20	16QAM	1	0	6	-3.00	-52.49	49.49

Table 5-4 Power Class 3 VoLTE over IMS SNNR by UL-DL Configuration

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 10 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 19 of 73
© 2020 PCTEST Engineering I	Laboratory, Inc.	·		REV 3.4.M

b. Power Class 2 Uplink-Downlink Configuration Investigation

Power Class 2 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 0RB Offset. For Power Class 2, configurations 1-5 are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 1 was used as the worst-case configuration for Power Class 2 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

							onngaradi	511	
Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	0	1	-2.97	-47.66	44.69
2593.0	40620	20	16QAM	1	0	2	-3.01	-48.39	45.38
2593.0	40620	20	16QAM	1	0	3	-2.91	-51.46	48.55
2593.0	40620	20	16QAM	1	0	4	-2.89	-51.39	48.50
2593.0	40620	20	16QAM	1	0	5	-3.00	-51.17	48.17
			0	· · · · · · · · · · · · · · · · · · ·			F 10	0	

Table 5-5
Power Class 2 VoLTE over IMS SNNR by UL-DL Configuration

Note: LTE TDD B41 Power Class 2 only supports UL-DL configurations 1-5, not 0 or 6.

c. Conclusion

Per the investigations above, UL-DL Configuration 1 was used to evaluate both Power Class 3 and Power Class 2 VoLTE over IMS.

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dega 20 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 20 of 73	
© 2020 PCTEST Engineering Laboratory, Inc.					

6. **VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION**

I. Test System Setup for VoWIFI over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoWIFI over IMS, or CMRS WIFI Calling, is shown below. The callbox used when performing VoWIFI over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

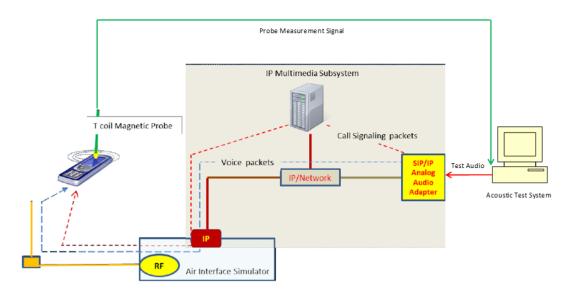


Figure 6-1 Test Setup for VoWIFI over IMS T-Coil Measurements

2. Audio Level Settings

According to KDB 285076 D02 released by the FCC OET regarding the appropriate audio levels to be used for VoWIFI over IMS T-Coil testing, -20dBm0 shall be used for the normal speech input level². The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the VoWIFI over IMS connection.

² FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Demo 01 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 21 of 73	
© 2020 PCTEST Engineering Laboratory Inc.					

20 PCTEST Engineering Laboratory. Inc.

II. DUT Configuration for VoWIFI over IMS T-coil Testing

1. Radio Configuration

An investigation was performed on all applicable data rates and modulations to determine the radio configuration to be used for testing. See tables below for SNNR comparison between radio configurations in each IEEE 802.11 standard:

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11b	6	DSSS	1	-7.34	-60.85	53.51
IEEE 802.11b	6	DSSS	2	-6.89	-60.96	54.07
IEEE 802.11b	6	CCK	5.5	-7.09	-61.26	54.17
IEEE 802.11b	6	CCK	11	-6.95	-61.28	54.33

Table 6-1 IEEE 802.11b SNNR by Radio Configuration

 Table 6-2

 IEEE 802.11g SNNR by Radio Configuration

 nnel
 Modulation
 Data Rate
 ABM1
 ABM2

 IMbps1
 IdB(A/m)1
 IdB(A/m)1
 IdB(A/m)1

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11g	6	BPSK	6	-6.56	-62.95	56.39
IEEE 802.11g	6	BPSK	9	-6.51	-63.13	56.62
IEEE 802.11g	6	QPSK	12	-6.78	-63.32	56.54
IEEE 802.11g	6	QPSK	18	-6.40	-63.49	57.09
IEEE 802.11g	6	16-QAM	24	-6.86	-63.42	56.56
IEEE 802.11g	6	16-QAM	36	-6.97	-63.63	56.66
IEEE 802.11g	6	64-QAM	48	-6.89	-63.54	56.65
IEEE 802.11g	6	64-QAM	54	-6.61	-63.61	57.00

 Table 6-3

 IEEE 802.11n BW SNNR by Radio Configuration

Mode	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]		
IEEE 802.11n	6	BPSK	0	-7.00	-60.18	53.18		
IEEE 802.11n	6	QPSK	1	-7.02	-60.33	53.31		
IEEE 802.11n	6	QPSK	2	-6.90	-60.37	53.47		
IEEE 802.11n	6	16-QAM	3	-6.24	-59.73	53.49		
IEEE 802.11n	6	16-QAM	4	-6.46	-60.34	53.88		
IEEE 802.11n	6	64-QAM	5	-6.34	-59.96	53.62		
IEEE 802.11n	6	64-QAM	6	-6.77	-60.09	53.32		
IEEE 802.11n	6	64-QAM	7	-6.85	-60.36	53.51		

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dega 22 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 22 of 73	
© 2020 PCTEST Engineering Laboratory, Inc.					

2. Codec Configuration


.

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoWIFI over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

AMR Codec Investigation – VoWIFI over IMS									
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band	Standard	Channel	
ABM1 (dBA/m)	-5.76	-6.64	-3.57	-4.34					
ABM2 (dBA/m)	-61.26	-61.27	-61.16	-61.27	Avial				
Frequency Response	Pass	Pass	Pass	Pass	Axial	2.4GHz	IEEE 802.11b	6	
S+N/N (dB)	55.50	54.63	57.59	56.93					

Table 6-4
AMR Codec Investigation – VoWIFI over IMS

Mute on; Backlight off; Max Volume; Max Contrast



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 22 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 23 of 73
© 2020 PCTEST Engineering I	REV 3.4.M			

7. FCC 3G MEASUREMENTS

I. CDMA Test Configurations

Radio Configuration 1, Service Option 3 (thick, green data curve) was used for the testing as the worstcase configuration for the handset due to vocoder gating from the EVRC logic. See below plot for ABM noise comparison between operational field service options and radio configurations for a CDMA2000 handset:

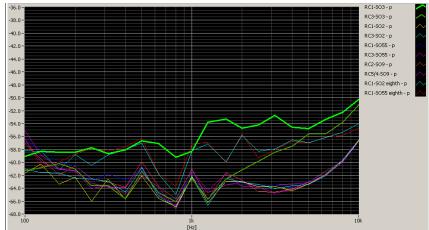



Figure 7-1 CDMA Audio Band Magnetic Noise

Table 7-1
FCC 3G ABM Measurements for ZNFL125DL (CDMA)

Configuration:	RC1/SO3	RC3/SO3	RC4/SO3	Orientation	Channel			
ABM1 (dBA/m)	-3.80	-3.61	-3.90		600			
ABM2 (dBA/m)	-59.74	-63.34	-63.00	Axial				
Frequency Response	Pass	Pass	Pass	Axiai				
S+N/N (dB)	55.94	59.73	59.10					

• Mute on; Backlight off; Max Volume; Max Contrast

Power Control Bits = "All Up"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dage 24 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 24 of 73	
© 2020 PCTEST Engineering Laboratory, Inc.					

II. UMTS Test Configurations

AMR at 12.2kbps, 13.6kbps SRB (thick, purple data curve) was used for the testing as the worst-case configuration for the handset. See below plot for ABM noise comparison between vocoder rates:


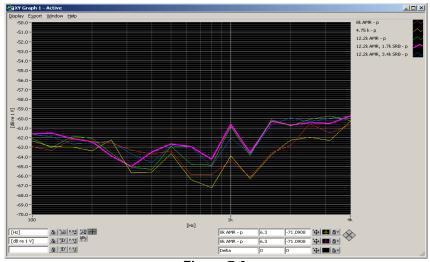


Figure 7-3 UMTS Audio Band Magnetic Noise

Table 7-2 Codec Investigation - UMTS

		ce investigatio					
Codec Setting:	AMR 12.2kbps	AMR 7.95kbps	AMR 4.75kbps	Orientation	Channel		
ABM1 (dBA/m)	-1.37	-1.39	-1.56				
ABM2 (dBA/m)	-60.72	-61.18	-61.37	Axial	9400		
Frequency Response	Pass	Pass	Pass	Axiai			
S+N/N (dB)	59.35	59.79	59.81				

Mute on; Backlight off; Max Volume; Max Contrast
TPC="All 1s"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager				
Filename:	Test Dates:	DUT Type:		Demo 25 of 72				
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 25 of 73				
© 2020 PCTEST Engineering Laboratory, Inc.								

T-COIL TEST SUMMARY 8.

Consolidated Tabled Results											
			esponse rgin	_	netic / Verdict		SNNR dict	Margin from FCC Limit	C63.19-2011		
062.4	2 Castier	8.3	3.2	8.	3.1	8.	3.4	(dB)	Rating		
C03. IS	9 Section	Axial	Radial	Axial	Radial	Axial	Radial				
CDMA	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-27.96	T4		
CDMA	PCS	PASS	NA	PASS	PASS	PASS	PASS	-27.90	14		
GSM	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-8.57	Т3		
GSW	PCS	PASS	NA	PASS	PASS	PASS	PASS	-0.57	15		
	Cellular	PASS	NA	PASS	PASS	PASS	PASS				
UMTS	AWS	PASS	NA	PASS	PASS	PASS	PASS	-38.51	Τ4		
	PCS	PASS	NA	PASS	PASS	PASS	PASS				
	B12	PASS	NA	PASS	PASS	PASS	PASS				
	B13	PASS	NA	PASS	PASS	PASS	PASS				
LTE FDD	B26	PASS	NA	PASS	PASS	PASS	PASS	-23.38	Τ4		
	B66	PASS	NA	PASS	PASS	PASS	PASS				
	B25	PASS	NA	PASS	PASS	PASS	PASS				
LTE TDD	B41 (PC3)	PASS	NA	PASS	PASS	PASS	PASS	-24.09	T4		
	B41 (PC2)	PASS	NA	PASS	PASS	PASS	PASS	-24.03	14		
	IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS				
WLAN	IEEE 802.11g	PASS	NA	PASS	PASS	PASS	PASS	-29.61	Τ4		
	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS				

Table 8-1 Consolidated Tabled Results

Ι. **Raw Handset Data**

	Raw Data Results for CDMA												
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates		
		1013	-3.85	-55.93		2.00	52.08	20.00	-32.08	T4			
	Axial	384	-3.74	-58.53	-64.81	2.00	54.79	20.00	-34.79	T4	2.6, 2.6		
Cellular		777	-3.81	-56.93		2.00	53.12	20.00	-33.12	T4			
Cellular		1013	-7.01	-47.40		N/A	40.39	20.00	-20.39	T4			
	Radial	384	-6.65	-45.60	-63.42		38.95	20.00	-18.95	T4	2.6, 2.0		
		777	-7.13	-61.25			54.12	20.00	-34.12	T4			
		25	-3.68	-59.63		2.00	55.95	20.00	-35.95	T4			
	Axial	600	-3.58	-59.69	-64.81	2.00	56.11	20.00	-36.11	T4	2.6, 2.6		
PCS		1175	-3.47	-60.90		2.00	57.43	20.00	-37.43	T4			
PC3		25	-6.52	-63.00			56.48	20.00	-36.48	T4			
	Radial	600	-7.06	-63.17	-63.42	-63.42	-63.42 N/A	N/A	56.11	20.00	-36.11	T4	2.6, 2.0
		1175	-6.52	-63.09			56.57	20.00	-36.57	T4			

Table 8-2
Raw Data Results for CDMA

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager				
Filename:	Test Dates:	DUT Type:		Page 26 of 73				
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 20 01 73				
© 2020 PCTEST Engineering Laboratory, Inc.								

11/21/2019

Table 8-3 Raw Data Results for GSM

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		128	-0.79	-42.50		2.00	41.71	20.00	-21.71	T4		
	Axial	190	-0.82	-42.41	-64.81	2.00	41.59	20.00	-21.59	T4	2.6, 2.6	
GSM850		251	-0.92	-42.25		2.00	41.33	20.00	-21.33	T4		
GSIVI650		128	-4.46	-34.53			30.07	20.00	-10.07	T4		
Radial	Radial	190	-4.49	-33.06	-63.42	N/A	28.57	20.00	-8.57	Т3	2.6, 2.0	
		251	-4.45	-57.95				20.00	-33.50	T4		
		512	-0.82	-47.33		2.00	46.51	20.00	-26.51	T4		
	Axial	661	-0.88	-45.48	-64.81	2.00	44.60	20.00	-24.60	T4	2.6, 2.6	
GSM1900		810	-0.97	-45.51		2.00	44.54	20.00	-24.54	T4		
GSW1900		512	-4.40	-62.02			57.62	20.00	-37.62	T4		
	Radial	661	-4.41	-61.63		-63.42 N/A	57.22	20.00	-37.22	T4	2.6, 2.0	
	, totalar	810	-4.41	-61.29			56.88	20.00	-36.88	T4		

Table 8-4 Raw Data Results for UMTS

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		4132	-1.39	-62.54		2.00	61.15	20.00	-41.15	T4	
	Axial	4183	-1.28	-62.78	-64.81	2.00	61.50	20.00	-41.50	T4	2.6, 2.6
UMTS V		4233	-1.40	-62.37		2.00	60.97	20.00	-40.97	T4	
UNISV		4132	-4.40	-63.03			58.63	20.00	-38.63	T4	
	Radial	4183	-4.42	-62.95	-63.42	N/A	58.53	20.00	-38.53	T4	2.6, 2.0
		4233	-4.40	-62.91			58.51	20.00	-38.51	T4	
		1312	-1.39	-60.55	-64.81	2.00	59.16	20.00	-39.16	T4	
	Axial	1412	-1.39	-61.05		2.00	59.66	20.00	-39.66	T4	2.6, 2.6
UMTS IV		1513	-1.38	-62.58		2.00	61.20	20.00	-41.20	T4	
01411314		1312	-4.43	-62.98			58.55	20.00	-38.55	T4	
	Radial	1412	-4.44	-63.19	-63.42	N/A	58.75	20.00	-38.75	T4	2.6, 2.0
		1513	-4.44	-63.28	1		58.84	20.00	-38.84	T4	
		9262	-1.39	-60.66		2.00	59.27	20.00	-39.27	T4	
	Axial	9400	-1.40	-60.89	-64.81	2.00	59.49	20.00	-39.49	T4	2.6, 2.6
UMTS II		9538	-1.41	-60.96		2.00	59.55	20.00	-39.55	T4	
011151		9262	-4.43	-63.00			58.57	20.00	-38.57	T4	
	Radial	9400	-4.47	-63.02		N/A	58.55	20.00	-38.55	T4	2.6, 2.0
		9538	-4.41	-63.05			58.64	20.00	-38.64	T4	

Table 8-5 Raw Data Results for LTE B12

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates			
		10MHz	23095	-2.94	-61.60		0.05	58.66	20.00	-38.66	T4				
Axial	5MHz	23095	-2.71	-62.08	-64.81	0.13	59.37	20.00	-39.37	T4	2.6, 2.6				
	3MHz	23095	-2.75	-62.47		0.11	59.72	20.00	-39.72	T4	2.0, 2.0				
LTE Band 12		1.4MHz	23095	-3.05	-62.67		0.06	59.62	20.00	-39.62	T4				
		10MHz	23095	-9.51	-62.73			53.22	20.00	-33.22	T4				
Radial	5MHz	23095	-9.66	-63.01	-63.42	62.42	62.42	62.42	62.42	N/A	53.35	20.00	-33.35	T4	2.6, 2.0
	3MHz	23095	-9.78	-62.95		N/A	53.17	20.00	-33.17	T4	2.0, 2.0				
	1.4MHz	23095	-9.66	-62.40			52.74	20.00	-32.74	T4					

Table 8-6 Raw Data Results for LTE B13

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
Axial	10MHz	23230	-2.12	-61.83	-64.81	0.14	59.71	20.00	-39.71	T4	2.6. 2.6	
LTE Band 13	Axial	5MHz	23230	-2.94	-61.01	-04.01	0.20	58.07	20.00	-38.07	T4	2.0, 2.0
LIE Banu 13		10MHz	23230	-9.92	-57.60	62.42	-63.42 N/A	47.68	20.00	-27.68	T4	2.6. 2.0
Radial	Radiai	5MHz	23230	-9.55	-56.38	-63.42		46.83	20.00	-26.83	T4	2.0, 2.0

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 07 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 27 of 73
© DOOD DOTEOT E ' '				

© 2020 PCTEST Engineering Laboratory, Inc.

REV 3.4.M 11/21/2019

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		15MHz	26965	-2.90	-58.29		0.07	55.39	20.00	-35.39	T4		
		15MHz	26865	-2.80	-57.13		0.04	54.33	20.00	-34.33	T4		
		15MHz	26765	-2.96	-55.57		0.10	52.61	20.00	-32.61	T4		
Axial	10MHz	26865	-2.90	-59.36	-64.81	0.11	56.46	20.00	-36.46	T4	2.6, 2.6		
	5MHz	26865	-2.81	-61.96		0.03	59.15	20.00	-39.15	T4			
		3MHz	26865	-3.15	-58.76	-	0.04	55.61	20.00	-35.61	T4		
		1.4MHz	26865	-2.70	-58.27		0.14	55.57	20.00	-35.57	T4		
LTE Band 26		15MHz	26865	-9.44	-55.40			45.96	20.00	-25.96	T4		
		10MHz	26865	-9.23	-57.55			48.32	20.00	-28.32	T4		
		5MHz	27015	-9.46	-56.43			46.97	20.00	-26.97	T4		
	Radial	5MHz	26865	-9.36	-52.74	-63.42	N/A	43.38	20.00	-23.38	T4	2.6, 2.0	
		5MHz	26715	-9.64	-56.77			47.13	20.00	-27.13	T4		
		3MHz	26865	-9.74	-53.70		1		43.96	20.00	-23.96	T4	
		1.4MHz	26865	-9.27	-55.69			46.42	20.00	-26.42	T4		

Table 8-7 Raw Data Results for LTE B26

Table 8-8 **Raw Data Results for LTE B66**

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	20MHz	132322	-2.93	-62.56		0.05	59.63	20.00	-39.63	T4		
		15MHz	132322	-2.84	-62.65		0.06	59.81	20.00	-39.81	T4	
	Axial	10MHz	132322	-2.92	-62.41	-64.81	0.03	59.49	20.00	-39.49	T4	
	Axiai	5MHz	132322	-2.95	-62.19		0.03	59.24	20.00	-39.24	T4	2.6, 2.6
		3MHz	132322	-2.82	-62.45		0.06	59.63	20.00	-39.63	T4	
LTE Band 66		1.4MHz	132322	-2.82	-62.92		0.07	60.10	20.00	-40.10	T4	
LIE Band 66		20MHz	132322	-9.57	-63.41			53.84	20.00	-33.84	T4	
		15MHz	132322	-9.31	-63.22			53.91	20.00	-33.91	T4	
	Radial	10MHz	132322	-9.39	-62.97	-63.42	N/A	53.58	20.00	-33.58	T4	26.20
	Radiai	5MHz	132322	-9.73	-62.62	-03.42	INVA	52.89	20.00	-32.89	T4	2.6, 2.0
		3MHz	132322	-9.79	-62.80			53.01	20.00	-33.01	T4	
		1.4MHz	132322	-9.61	-63.22			53.61	20.00	-33.61	T4	

Table 8-9 Raw Data Results for LTE B25

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	26365	-2.75	-62.35		0.02	59.60	20.00	-39.60	T4	
		15MHz	26365	-2.90	-62.53		0.04	59.63	20.00	-39.63	T4	
	Axial	10MHz	26365	-2.85	-62.42	-64.81	0.06	59.57	20.00	-39.57	T4	
	Axiai	5MHz	26365	-2.83	-62.69	-64.81	0.13	59.86	20.00	-39.86	T4	2.6, 2.6
		3MHz	26365	-2.86	-62.83		0.08	59.97	20.00	-39.97	T4	
LTE Band 25		1.4MHz	26365	-2.72	-63.23		0.02	60.51	20.00	-40.51	T4	
LIE Danu 25		20MHz	26365	-9.61	-63.17			53.56	20.00	-33.56	T4	
		15MHz	26365	-9.07	-63.21			54.14	20.00	-34.14	T4	
	Radial	10MHz	26365	-9.42	-62.98	-63.42	N/A	53.56	20.00	-33.56	T4	2.6, 2.0
	Radiai	5MHz	26365	-9.48	-62.99	-03.42	IV/A	53.51	20.00	-33.51	T4	2.0, 2.0
		3MHz	26365	-9.41	-62.96]		53.55	20.00	-33.55	T4	
		1.4MHz	26365	-9.52	-62.85			53.33	20.00	-33.33	T4	

Table 8-10 Raw Data Results for LTE B41 Power Class 3

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	40620	-2.93	-51.54		0.06	48.61	20.00	-28.61	T4	
Axial	15MHz	40620	-2.85	-50.78	-64.81	0.03	47.93	20.00	-27.93	T4	2.6, 2.6	
	Axiai	10MHz	40620	-3.00	-50.69	-04.01	0.06	47.69	20.00	-27.69	T4	2.0, 2.0
LTE Band 41		5MHz	40620	-2.70	-51.50		0.16	48.80	20.00	-28.80	T4	
		20MHz	40620	-9.58	-61.91			52.33	20.00	-32.33	T4	
	Radial	15MHz	40620	-9.77	-61.52	60.40	N/A	51.75	20.00	-31.75	T4	2.6, 2.0
Raulai	10MHz	40620	-9.43	-61.45	-63.42	IVA	52.02	20.00	-32.02	T4	2.0, 2.0	
	5MHz	40620	-9.79	-61.67			51.88	20.00	-31.88	T4		

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 29 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 28 of 73
© 2020 PCTEST Engineering I	Laboratory, Inc.			REV 3.4.M

11/21/2019

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	40620	-2.92	-47.36		0.01	44.44	20.00	-24.44	T4	
		15MHz	40620	-2.95	-47.34		0.05	44.39	20.00	-24.39	T4	
		10MHz	41490	-2.51	-48.97	-64.41	0.03	46.46	20.00	-26.46	T4	
	Axial	10MHz	41055	-2.60	-47.40		0.12	44.80	20.00	-24.80	T4	2.6, 2.6
Axiai	Axidi	10MHz	40620	-2.97	-47.06		0.24	44.09	20.00	-24.09	T4	2.0, 2.0
	10MHz	40185	-2.55	-48.82]	0.14	46.27	20.00	-26.27	T4		
		10MHz	39750	-2.54	-47.94		0.02	45.40	20.00	-25.40	T4	
LTE Band 41		5MHz	40620	-2.60	-47.91		0.12	45.31	20.00	-25.31	T4	
		20MHz	40620	-9.44	-61.06		-	51.62	20.00	-31.62	T4	
		15MHz	40620	-9.47	-61.38			51.91	20.00	-31.91	T4	
		10MHz	40620	-9.65	-61.15			51.50	20.00	-31.50	T4	
	Radial	5MHz	41490	-9.36	-61.21	-63.79	N/A	51.85	20.00	-31.85	T4	2.6, 2.0
	Radiai	5MHz	41055	-9.41	-60.96	-03.79	INVA	51.55	20.00	-31.55	T4	2.0, 2.0
		5MHz	40620	-9.57	-58.16	1		48.59	20.00	-28.59	T4	
		5MHz	40185	-9.33	-59.18			49.85	20.00	-29.85	T4	
		5MHz	39750	-9.46	-60.61			51.15	20.00	-31.15	T4	

Table 8-11Raw Data Results for LTE B41 Power Class 2

Table 8-12 Raw Data Results for 2.4GHz WIFI

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	6	-6.88	-60.85	-64.81	0.04	53.97	20.00	-33.97	T4	2.6, 2.6
IEEE		1	-13.49	-63.10			49.61	20.00	-29.61	T4	
802.11b	Radial	6	-13.44	-63.15	-63.42	N/A	49.71	20.00	-29.71	T4	2.6, 2.0
		11	-13.22	-63.23			50.01	20.00	-30.01	T4	
IEEE	Axial	6	-6.40	-62.74	-64.81	0.03	56.34	20.00	-36.34	T4	2.6, 2.6
802.11g	Radial	6	-13.05	-63.55	-63.42	N/A	50.50	20.00	-30.50	T4	2.6, 2.0
		1	-6.83	-59.01		0.03	52.18	20.00	-32.18	T4	
IEEE	Axial	6	-6.73	-59.87	-64.81	0.01	53.14	20.00	-33.14	T4	2.6, 2.6
802.11n		11	-6.82	-59.77		0.02	52.95	20.00	-32.95	T4	
	Radial	6	-13.44	-63.35	-63.42	N/A	49.91	20.00	-29.91	T4	2.6, 2.0

II. Test Notes

A. General

- 1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- 3. Hearing Aid Mode (**Menu→Settings→Accessibility→Hearing Aid**) was set to ON for Frequency Response compliance
- 4. Speech Signal: ITU-T P.50 Artificial Voice
- 5. Bluetooth and WIFI were disabled while testing 2G/3G/4G modes.
- 6. Licensed data modes and Bluetooth were disabled while testing WIFI modes.
- 7. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T3).

B. CDMA

- 1. Power Configuration: Power Control Bits = "All Up"
- 2. Vocoder Configuration: RC1/SO3 (CDMA EVRC)

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager		
Filename:	Test Dates:	DUT Type:		Demo 20 of 72		
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 29 of 73		
0 2020 PCTEST Engineering Laboratory, Inc.						

C. GSM

- 1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
- 2. Vocoder Configuration: EFR (GSM);

D. UMTS

- 1. Power Configuration: TPC= "All 1s";
- 2. Vocoder Configuration: AMR 12.2 kbps (UMTS);

E. LTE FDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Vocoder Configuration: WB AMR 6.60kbps
- 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 26 at 15MHz is the worst-case for the Axial probe orientation. LTE Band 26 at 5MHz bandwidth is the worst-case for the Radial probe orientation.

F. LTE TDD


- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 0RB offset
- 3. Power Class 3 Uplink-Downlink configuration: 1
- 4. Power Class 2 Uplink-Downlink configuration: 1
- 5. Vocoder Configuration: WB AMR 6.60kbps
- 6. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 2) at 10MHz is the worst-case for the Axial probe orientation. LTE Band 41 (Power Class 2) at 5MHz is the worst-case for the Radial probe orientation.

G. WIFI


- 1. Radio Configuration
 - a. IEEE 802.11b: DSSS, 1Mbps
 - b. IEEE 802.11g: BPSK, 6Mbps
 - c. IEEE 802.11n : BPSK, MCS 0
- 2. Vocoder Configuration: WB AMR 6.60kbps
- 3. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11n is the worst-case for the Axial probe orientation. IEEE 802.11b is the worst-case for the Radial probe orientation.

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager		
Filename:	Test Dates:	DUT Type:		Dage 20 of 72		
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 30 of 73		
© 2020 PCTEST Engineering Laboratory, Inc.						


III. 1 kHz Vocoder Application Check



This model was verified to be within the linear region for ABM1 measurements at -18 dBm0 for CDMA. This measurement was taken in the axial configuration above the maximum location.

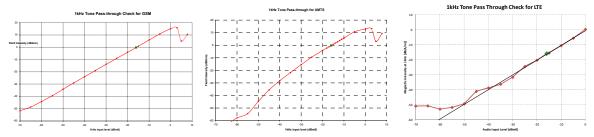

This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM, UMTS, and VoLTE over IMS. This measurement was taken in the axial configuration above the maximum location.



This model was verified to be within the linear region for ABM1 measurements at -20 dBm0 for VoWIFI over IMS. This measurement was taken in the axial configuration above the maximum location.

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dego 21 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 31 of 73
© 2020 PCTEST Engineering	Laboratory, Inc.			REV 3.4.M

11/21/2019

IV. T-Coil Validation Test Results

ltem	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.377	PASS
Environmental Noise	< -58 dBA/m	-64.81	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.441	PASS
Environmental Noise	< -58 dBA/m	-63.42	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS


Table 8-13 Helmholtz Coil Validation Table of Results - 12/02/2019

Table 8-14 Helmholtz Coil Validation Table of Results - 12/23/2019

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.301	PASS
Environmental Noise	< -58 dBA/m	-64.41	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.386	PASS
Environmental Noise	< -58 dBA/m	-63.79	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 22 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 32 of 73
© 2020 PCTEST Engineering I	Laboratory, Inc.			REV 3.4.M

ABM1 Magnetic Field Distribution Scan Overlays V.

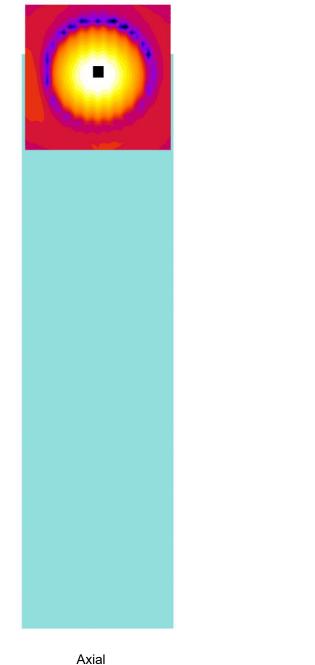

Radial (Transverse)

Figure 8-1 **T-Coil Scan Overlay Magnetic Field Distributions**

Notes:

- 1. Final measurement locations are indicated by a cursor on the contour plots.
- 2. See Test Setup Photographs for actual WD overlay.

	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Test Dates:	DUT Type:		Dega 22 of 72
12/02/2019 - 12/27/2019	Portable Handset		Page 33 of 73
2020 PCTEST Engineering Laboratory, Inc.			
	Test Dates: 12/02/2019 - 12/27/2019	Test Dates: DUT Type: 12/02/2019 - 12/27/2019 Portable Handset	Test Dates: DUT Type: 12/02/2019 - 12/27/2019 Portable Handset

9. MEASUREMENT UNCERTAINTY

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
Combined standard uncertainty, uc (k=1)					17.7%	0.71	
Expanded uncertainty (k=2), 95% confidence level					35.3%	1.31	

Table 9-1 Uncertainty Estimation Table

Notes:

1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.

2. All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in

NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dama 04 of 70	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 34 of 73	
© 2020 PCTEST Engineering Laboratory, Inc.					

REV 3.4.M 11/21/2019

10. EQUIPMENT LIST

Table 10-1 Equipment List

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911
Dell	Latitude E6540	SoundCheck Acoustic Analyzer Laptop	4/24/2019	Biennial	4/24/2021	7BFNM32
Listen	SoundConnect	Microphone Power Supply	4/22/2019	Biennial	4/22/2021	PS2612
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	4/24/2019	Biennial	4/24/2021	23528889
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	1/30/2019	Annual	1/30/2020	162125
Rohde & Schwarz	CMW500	Radio Communication tester	5/17/2019	Annual	5/17/2020	128635
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	6/6/2019	Annual	6/6/2020	161662
Rohde & Schwarz	CMW500	Radio Communication tester	8/14/2019	Annual	8/14/2020	140144
Seekonk	NC-100	Torque Wrench (8" lb)	5/10/2018	Biennial	5/10/2020	21053
TEM	Axial T-Coil Probe	Axial T-Coil Probe	5/17/2019	Biennial	5/17/2021	TEM-1124
TEM	Radial T-Coil Probe	Radial T-Coil Probe	5/17/2019	Biennial	5/17/2021	TEM-1130
TEM	C63.19	Helmholtz Coil	5/20/2019	Biennial	5/20/2021	925
TEM		HAC System Controller with Software	N/A		N/A	N/A
TEM		HAC Positioner	N/A		N/A	N/A

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 25 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 35 of 73
© 2020 PCTEST Engineering Laboratory, Inc.				

11/21/2019

11. TEST DATA

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dama 00 af 70	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 36 of 73	
2020 PCTEST Engineering Laboratory, Inc.					

12/2/2019



DUT: HH Coil – SN: 925


Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011

Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1124; Calibrated: 05/17/2019
- Helmholtz Coil SN: 925; Calibrated: 05/20/2019

Noise Spectrum

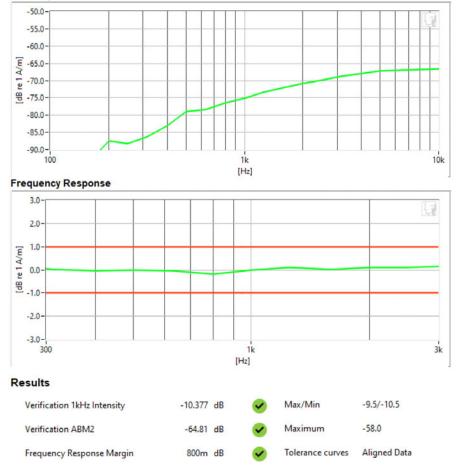

PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 27 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 37 of 73
D 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M

12/23/2019



DUT: HH Coil – SN: 925


Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011

Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1124; Calibrated: 05/17/2019
- Helmholtz Coil SN: 925; Calibrated: 05/20/2019

Noise Spectrum

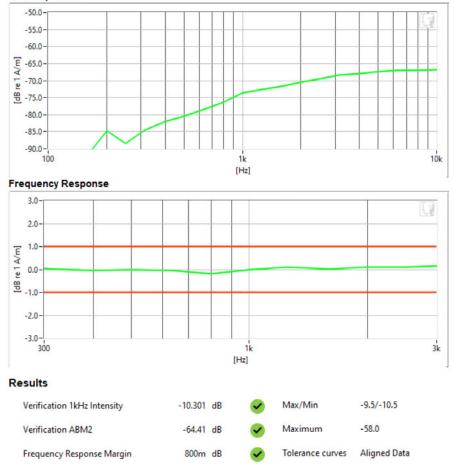

PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 20 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 38 of 73
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M

12/2/2019



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil - SN: 925


Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011

Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1130; Calibrated: 05/17/2019
- Helmholtz Coil SN: 925; Calibrated: 05/20/2019

Noise Spectrum

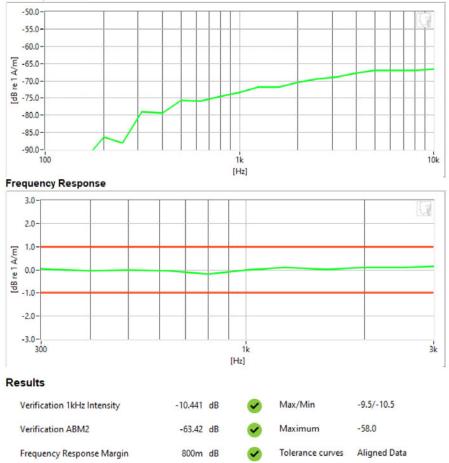

PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 20 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 39 of 73
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M

12/23/2019



DUT: HH Coil – SN: 925


Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011

Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1130; Calibrated: 05/17/2019
- Helmholtz Coil SN: 925; Calibrated: 05/20/2019

Noise Spectrum

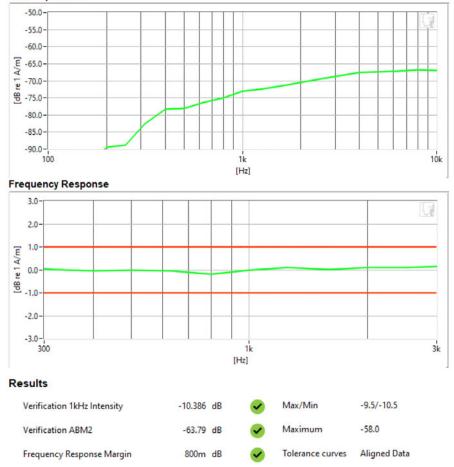

PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 40 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 40 of 73
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: Cellular CDMA
- Channel: 1013
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

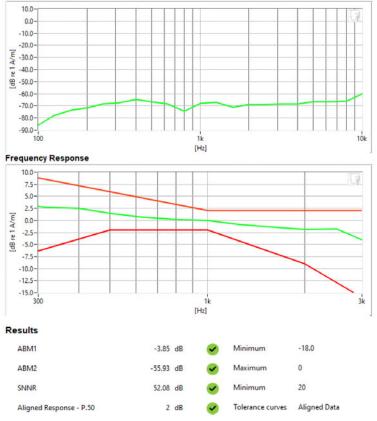

PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dega 41 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 41 of 73	
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M	



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: PCS CDMA
- Channel: 25
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

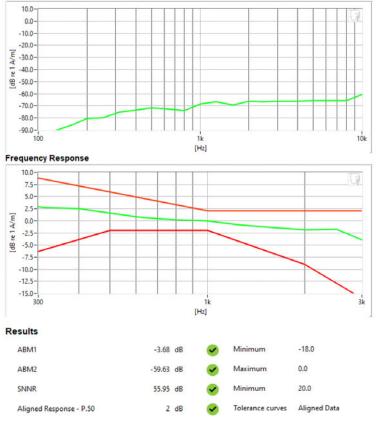

PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dega 42 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 42 of 73	
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M	



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: GSM 850
- Channel: 251
- Speech Signal: ITU-T P.50 Artificial Voice



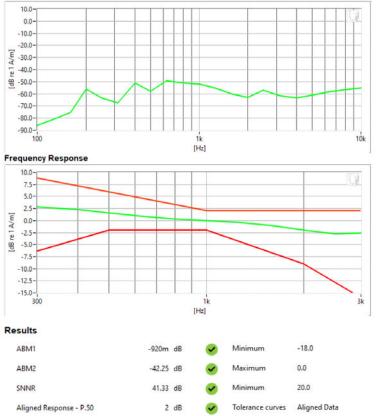

PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 42 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 43 of 73
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: GSM 1900
- Channel: 810
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

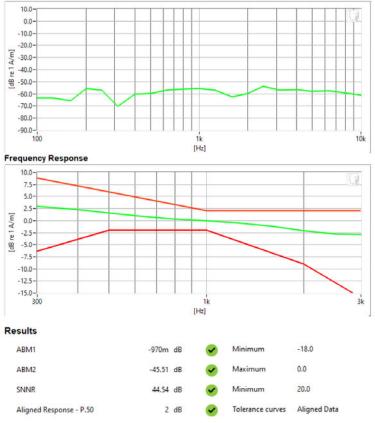

PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dega 11 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 44 of 73	
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M	



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: UMTS Band V
- Channel: 4233
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

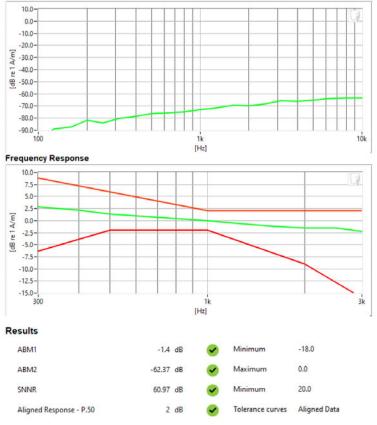

PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dage 45 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 45 of 73	
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M	



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: UMTS Band IV
- Channel: 1312
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

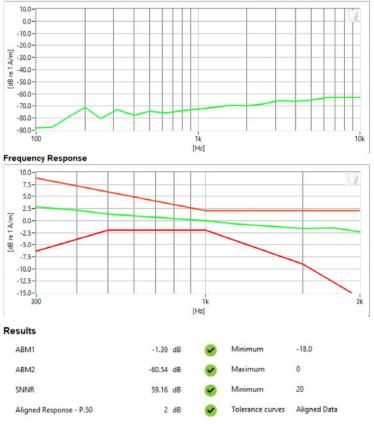

PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dage 46 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 46 of 73	
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M	



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: UMTS Band II
- Channel: 9262
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

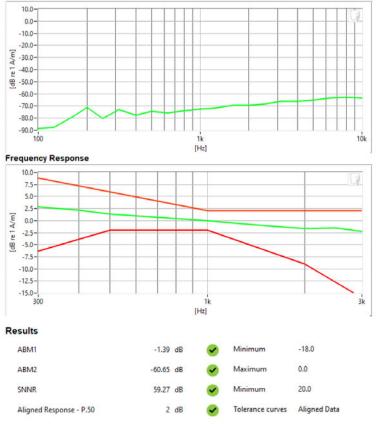

PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 47 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 47 of 73
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M

12/4/2019



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: LTE FDD Band 26
- Bandwidth: 15MHz
- Channel: 26765
- Speech Signal: ITU-T P.50 Artificial Voice



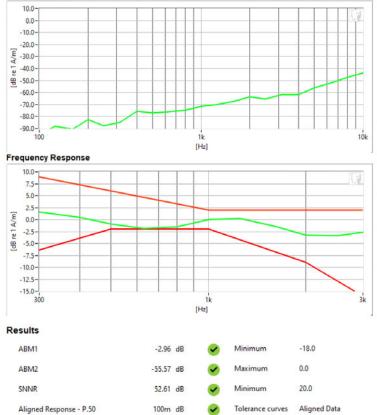

PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 49 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 48 of 73
◎ 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M

12/27/2019



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011


Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: LTE TDD Band 41 (PC2)
- Bandwidth: 10MHz
- Channel: 40620
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

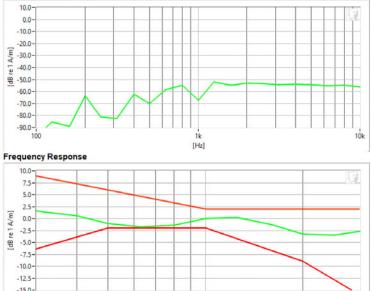



PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 40 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 49 of 73
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M

34

12/4/2019



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 05/17/2019

Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11n
- Channel: 1
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

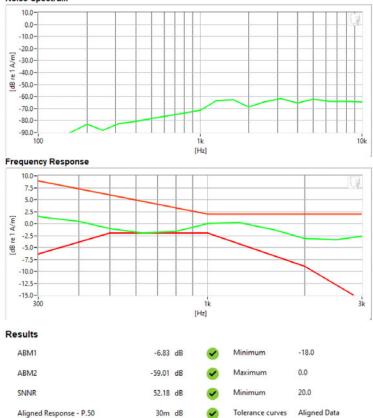

PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 50 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 50 of 73
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: Cellular CDMA
- Channel: 384

Noise Spectrum



PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 51 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 51 of 73
2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011

Equipment:

• Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: PCS CDMA
- Channel: 600

Noise Spectrum



PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 52 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 52 of 73
© 2020 PCTEST Engineering I	2020 PCTEST Engineering Laboratory, Inc.			



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011

Equipment:

• Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: GSM 850
- Channel: 190 •

Noise Spectrum



PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dama (2) of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 53 of 73	
2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M	

^{11/21/2019}



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: GSM 1900
- Channel: 810 •

Noise Spectrum



PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dama 54 af 70	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 54 of 73	
2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M	



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011

Equipment:

• Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: UMTS Band V
- Channel: 4233 •

Noise Spectrum



PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dama (C. of 72)	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 55 of 73	
2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M	



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011

Equipment:

• Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: UMTS Band IV
- Channel: 1312 •

Noise Spectrum



PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo E6 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 56 of 73
© 2020 PCTEST Engineering I	2020 PCTEST Engineering Laboratory, Inc.			



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011

Equipment:

• Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: UMTS Band II
- Channel: 9400 •

Noise Spectrum



PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dana (77 of 70	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 57 of 73	
2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M	

^{11/21/2019}



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011

Equipment:

• Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: LTE FDD Band 26
- Bandwidth: 5MHz .
- Channel: 26865 ٠

Noise Spectrum



PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dere 59 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 58 of 73
© 2020 PCTEST Engineering	2020 PCTEST Engineering Laboratory, Inc.			

^{11/21/2019}

12/27/2019



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011

Equipment:

• Probe: Radial T-Coil Probe - SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: LTE TDD Band 41 (PC2)
- Bandwidth: 5MHz .
- Channel: 40620 ٠

Noise Spectrum



PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dama 50 of 70	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 59 of 73	
2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M	

^{11/21/2019}



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL125DL

Type: Portable Handset Serial: 42820

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b .
- Channel: 1 ٠

Noise Spectrum



PCTEST 2019

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 60 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 60 of 73
© 2020 PCTEST Engineering I	2020 PCTEST Engineering Laboratory, Inc.			

12. CALIBRATION CERTIFICATES

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 61 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 61 of 73
© 2020 PCTEST Engineering I	Laboratory, Inc.			REV 3.4.M

© 2020 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

REV 3.4.M 11/21/2019

West	Caldwell Calibrat	ion Laboratories Inc.	
vv est		ion Laboratories the.	
			11.198
Cart		Calibration	
Cert	incate of	Calibration	
	for		Ĩ
	AXIAL T COI	LPROBE	100
	Manufactured by: Model No:	TEM CONSULTING AXIAL T COIL PROBE	
	Serial No: Calibration Recall No:	TEM-1124 29973	
	Cambration Recall No.		
		REW HARWELL	
		EST ENGINEERING LAB	
		B DOBBIN ROAD UMBIA MD 21045	
The subject instrume	ent was calibrated to the indicat	ed specification using standards traceable to the	1000 1000 1000 1000 1000 1000 1000 100
National Institute of	Standards and Technology or to	o accepted values of natural physical constants. Following specification upon its return to the	
West Caldwell Calib	ration Laboratories Procedure 1	NO. AXIALTCTEMC / DA	
Upon receipt for Cal	ibration, the instrument was fou	No. AXIALTCTEMC $\sqrt{\mathcal{R}}$ ind to be: $6/4/2019$	1000 1000 1000 1000 1000 1000 1000 100
With	in (X)		Ś
tolerance of the indi	cated specification. See attached	Report of Calibration.	1000 1000 1000 1000 1000 1000 1000 100
	plied relates to the calibrated ite ration Laboratories' calibration	em listed above. control system meets the requirements, ISO	
		C Guide 25, ISO 9001:2015 and ISO 17025.	1000 - 1000 - 1000 - 1000 - 1000 - 10
			Ř
Note: With this Certificat	e, Report of Calibration is included.	Approved by:	
Calibration Date:	17-May-19	James Zhu	
	29973 -1	Quality Manager ISO/IEC 17025:2005	
Certificate No: QA Doc. #1051 Rev. 2.0 10/1/01			R
	West Caldwell		1000
Å	Calibration		

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager			
Filename:	Test Dates:	DUT Type:		Dege 62 of 72			
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 62 of 73			
© 2020 PCTEST Engineering	© 2020 PCTEST Engineering Laboratory, Inc.						

HCATEMC_TEM-1124_May-17-2019



1575 State Route 96, Victor NY 14564



ISO/IEC 17025: 2005

REPORT OF CALIBRATION

alibration	Company: PCTest Engineering Labs									I. D. No.: XXXX			
				4-11-111	- 0 all								
	Probe Sen	sitivity mea: Helmhol		th Heimhol	tz Coll		Refore 8	& after data	same.	x			
	the number of		-	10	No.		Defore	a unter dutu	ounie.				
	the radius of e			0.204	m		Lab	oratory Enviro	nment:				
th	he current in the	coils, in amp	peres.;	0.09	Α		A	mbient Tempe	erature:	20		°C	
		nholtz Coil Co		7.09	A/m/	۷		Ambient Hu		42		% RH	
	Helmholtz	: Coil magneti	ic field;	5.96	A/m			Ambient Pr Calibratio		98.2 17-May		kPa	
	F	Probe Sensit	ivity at	1000	Hz.			Calibratio	on Due:	17-May	/-2020		
			was	-60.41	dBV	/A/m		Report N	umber:	•	29973	-1	
				0.954	mV/A			Control N	lumber:		29973		
		Probe resi		903	Ohm								
	e listed instrum ation is traceable th						er's specificatior 45-18	15.					
	led uncertainty of cal	-											
· · · ·	esents Probes Fred											~~~~~	
					Axial P	robe F	Response						
20 т					·····		1		Measure	d Probe F	Resp.		
											-		11
15													
10									-				+
ĝi 5													
e (q													
itud						\rightarrow				-			+
Magnitude (dB)			1										
-10 -		-											
-15 -													
				Fre			1						
-20	00 .				eq. (Hz)	10	000						10000

Page 1 of 2

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Demo 62 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 63 of 73	
© 2020 PCTEST Engineering I	Laboratory, Inc.	·		REV 3.4.M	

HCATEMC_TEM-1124_May-17-2019

West Caldwell Calibration Laboratories Inc. 1575 State Route 96, Victor NY 14564

Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Axial T Coil Probe Company: PCTest Engineering Labs Model No.: Axial T Coil Probe

Serial No.: TEM-1124

Test	Function	Tolera	nce	Measured values				
				Before	Out	Remarks		
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.41				
			dB					
2.0	Probe Level Linearity		6	6.10				
		Ref. (0 dB)	0	0.00				
			-6	-6.00				
			-12	-12.00				
			Hz					
3.0	Probe Frequency Response		100	-19.9				
			126	-17.9				
			158	-16.0				
			200	-14.0				
			251	-12.0				
			316	-10.0				
			398	-8.0				
			/ 501	-6.0				
			631	-3.9				
			794	-2.0				
		Ref. (0 dB)	1000	0.0				
			1259	2.0				
			1585	4.0				
			1995	5.9				
			2512	7.9				
			3162	9.9				
			3981	11.9				
			5012	13.9				
			6310	15.9				
			7943	18.0				
			10000	20.2				

Instruments used for o	alibration:		Date of Cal.	Traceablity No.	Due Date
HP	34401A	S/N US360641	25-Jul-2018	,1010733	26-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,1010733	26-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,1010733	26-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/290345-18	26-Jul-2019

Cal. Date: 17-May-2019

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 2 of 2

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager			
Filename:	Test Dates:	DUT Type:		Page 64 of 73			
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 64 01 75			
© 2020 PCTEST Engineering	© 2020 PCTEST Engineering Laboratory, Inc.						

West C	aldwell Calib	oration La	boratories I	nc.	
Certi	ficate (of Ca	librati	on	B
	Manufactured by Model No: Serial No:	RADIA TEM-1	ONSULTING L T COIL PROBE 130		
	Calibration Recal	ll No: 29973			
)	Customer:	ANDREW HARV	VELL		
	Company: Address:	PCTEST ENGIN 6660-B DOBBIN COLUMBIA	EERING LAB	145	
National Institute of St	t was calibrated to the in andards and Technolog s that the instrument me	y or to accepted va	lues of natural physi cification upon its re	cal constants. turn to the	
West Caldwell Calibra	tion Laboratories Proce	edure No. RAD	IALT TEM C	6/4/2019	
Upon receipt for Calib	ration, the instrument w	vas found to be:		6/4/2019	
Within	(x)				
The information suppli	ted specification. See at ed relates to the calibra tion Laboratories' calib 62A, ANSI/NCSL Z540	ited item listed abo ration control syst	ve. em meets the require		
Note: With this Certificate,	Report of Calibration is Inclu	ıded.	Approved by:	$\frac{1}{2}$	
Calibration Date:	17-May-19		James Zhu	I	
Certificate No:	29973 -2		Quality Mana ISO/IEC 17025:	ger 2005	
QA Doc. #1051 Rev. 2.0 10/1/01		te Page 1 of 1			K
	est Caldwell alibration		₹¥		1000 1000 100 100 100 100 100 100 100 1
uncompromised calibration	Laboratories, lı	nc.	ACCREDITE	alar	
1575 State Route 96, Victor, N	Y 14564, U.S.A.		Calibration Lab. Cert	. # 1533.01	
AND STREET PALL SHARE STREET	e in . The second			S (8) (888) (8	

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager				
Filename:	Test Dates:	DUT Type:		Dege 65 of 72				
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 65 of 73				
© 2020 PCTEST Engineering	© 2020 PCTEST Engineering Laboratory, Inc.							

HCRTEMC_TEM-1130_May-17-2019



1575 State Route 96, Victor NY 14564



ISO/IEC 17025: 2005

Calibration Lab. Cert. # 1533.01

REPORT OF CALIBRATION for

alibr	ation	results:	Labs									D. No.:		
		Probe Sensitivity mea	sured wit	th Helmhol	tz C	Coil								
		Helmhol	tz Coll;					Before & after	er data s	ame:	X			
		the number of turns on each		10		No.								
		the radius of each coil, in r	-	0.204		n			ory Enviror			~ -		
	t	he current in the coils, in am		0.08		4 • / •			nt Tempe			0.7	°C	
		Helmholtz Coil Co		7.09		A/m/\	v		nbient Hu	•		2.7	% RH	
		Helmholtz Coil magnet	ic field;	5.94	1	A/m			nbient Pre Calibration			.256 w-2019	kPa	
		Probe Sensit	ivity at	1000	1	Hz.			Calibratio			-		
		Prope Sensit	was	-60.37		dBV/	۸Im		Report Nu		17.4410	29973	-2	
			was	0.958		mV/A			Control Nu			29973		
		Probe resi	stance	895		Ohm						20070		
e ex	cpand	ration is traceable through NIST te ded uncertainty of calibration: 0.30d resents Probes Frequency Respo	Bat 95% o			683/2 ith a c					. <u></u>			
					Rac	lial P	rohe	lesponse						
					nau		lone	esponse		Measur	ed Probe	Resp.		
	20 -													
	15 ·											*	\square	
												T I		
	10 -								_					
ê)	5 -						_							
de	~													
lite	0 -						1							
Magnitude (dB)	-5				*									
_	-10		-										1	
	-10		T I											
	-15 ·													
	-20													
		00		Fre	eq. (Hz)	10	0						1000
								· · · · ·						
		ve listed instrument was ch on Laboratories Inc. proced		sing calibra	atio	n pro	oced		Vest Ca 7.0 Jan.		14 Doc	# 1038	HCR	темс
		was performed by West Caldwel		n Laboratorie	əs In	ic. un	der (•				
ntend	led to	o implement the requirements of I	SO10012-	1, IEC Guide	25,	ANSI	/NCS	. Z540-1, (MIL-STD-456	62A) and	ISO 170	025	\cap		
											(1		
		Cal. Date: 17-Ma	y-2019					Measuremen	nts perform	ned by:			•••••	
		d on WCCL system type 9700			fac	Man (1	7 -1-1	Cal Laba Inc	D	. 70 1	1	S Zhu Doc. # 103	0 UCDT	MC.
	cume	ent shall not be reproduced, except in full,	without the v	written approval	trom	west (aldw	Gal. Labs. Inc.	Re	v. 7.0 Jan	. 29, 2074	DOC. # 103	o HUKII	1910

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 66 of 73	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 66 01 7 5	
© 2020 PCTEST Engineering	Laboratory, Inc.			REV 3.4.M	

HCRTEMC_TEM-1130_May-17-2019

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564

Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Labs Model No.: Radial T Coil Probe

Serial No.: TEM-1130

Test	Function	Tolerance		Measured values		
				Before	Out	Remarks
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.37		
			dB			
2.0	Probe Level Linearity		6	6.00		
		Ref. (0 dB)	0	0.00		
			-6	-6.10		
			-12	-12.10		
	· · · · · · · · · · · · · · · · · · ·		Hz			
3.0	Probe Frequency Response		100	-20.0		
			126	-17.9		
			158	-16.0		
			200	-14.0		
			251	-12.0		
			316	-10.0		
			398	-8.0		
			501	-6.0		
			631	-4.0		
			794	-2.0		
		Ref. (0 dB)	1000	0.0		
			1259	1.9		
			1585	3.9		
			1995	5.9		
			2512	7.9		
			3162	9.9		
			3981	11.9		
			5012	13.9		
			6310	15.9		
			7943	18.0		
			10000	20.1		

Instruments used for o	alibration:		Date of Cal.	Traceability No.	Due Date
HP	34401A	S/N US360641	25-Jul-2018	,1010733	26-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,1010733	26-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,1010733	26-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/290345-18	26-Jul-2019

Cal. Date: 17-May-2019

Tested by: James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 2 of 2

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dere 67 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 67 of 73	
© 2020 PCTEST Engineering Laboratory, Inc.					

REV 3.4.M 11/21/2019

13. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 69 of 72
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 68 of 73
2020 PCTEST Engineering Laboratory, Inc.				

14. **REFERENCES**

- 1. ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- 2. FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- 3. FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- 4. FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- 5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- 6. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- 7. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- 8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, " IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells," U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- 13. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 14. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- 15. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- 16. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- 17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 69 of 73	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset			
© 2020 PCTEST Engineering Laboratory, Inc.					

- Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- 24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: ZNFL125DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dega 70 of 72	
1M1911290210-02-R1.ZNF	12/02/2019 - 12/27/2019	Portable Handset		Page 70 of 73	
© 2020 PCTEST Engineering Laboratory, Inc.				REV 3.4.M	