



# FCC TEST REPORT

## FCC ID:2BMPV-X2PRO

Applicant: Shenzhen Baike Intelligent Creation Technology Co., Ltd.

Address: 2nd Floor, 145-3 Furui Road, Xintian Community, Fuhai Street, Bao'an District, Shenzhen

Manufacturer: Shenzhen Baike Intelligent Creation Technology Co., Ltd.

Address: 2nd Floor, 145-3 Furui Road, Xintian Community, Fuhai Street, Bao'an District, Shenzhen

EUT: Projector X2pro

Trade Mark: N/A

Model Number: X2pro  
X3pro, X4pro, X5pro, X6pro, X7pro, X8pro, X9pro, X10pro, X20pro, X30pro

Date of Receipt: Feb. 25, 2025

Test Date: Feb. 25, 2025 - Mar. 12, 2025

Date of Report: Mar. 12, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China

Applicable Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247  
ANSI C63.10:2013

Test Result: Pass

Report Number: DLE-250403006R

Prepared (Test Engineer): Pxing Huang

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang

This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



## Table of Contents

|                                                                   | Page      |
|-------------------------------------------------------------------|-----------|
| <b>1. VERSION .....</b>                                           | <b>4</b>  |
| <b>2. SUMMARY OF TEST RESULTS .....</b>                           | <b>5</b>  |
| 2.1 TEST FACILITY .....                                           | 6         |
| 2.2 MEASUREMENT UNCERTAINTY .....                                 | 6         |
| <b>3. GENERAL INFORMATION .....</b>                               | <b>7</b>  |
| 3.1 GENERAL DESCRIPTION OF EUT .....                              | 7         |
| 3.2 DESCRIPTION OF TEST MODES .....                               | 8         |
| 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED ..... | 9         |
| 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) .....            | 9         |
| 3.5EQUIPMENTS LIST FOR ALL TEST ITEMS .....                       | 10        |
| <b>4. EMC EMISSION TEST .....</b>                                 | <b>12</b> |
| 4.1 CONDUCTED EMISSION MEASUREMENT .....                          | 12        |
| 4.1.1 POWER LINE CONDUCTED EMISSION Limits .....                  | 12        |
| 4.1.2 TEST PROCEDURE .....                                        | 12        |
| 4.1.3 DEVIATION FROM TEST STANDARD .....                          | 12        |
| 4.1.4 TEST SETUP .....                                            | 13        |
| 4.1.5 EUT OPERATING CONDITIONS .....                              | 13        |
| 4.1.6 TEST RESULT .....                                           | 14        |
| 4.2.1 RADIATED EMISSION LIMITS .....                              | 16        |
| 4.2.2 TEST PROCEDURE .....                                        | 17        |
| 4.2.3 DEVIATION FROM TEST STANDARD .....                          | 17        |
| 4.2.4 TEST SETUP .....                                            | 17        |
| 4.2.5 EUT OPERATING CONDITIONS .....                              | 18        |
| 4.2.6 TEST RESULTS .....                                          | 18        |
| <b>5. RADIATED BAND EMISSIONMEASUREMENT .....</b>                 | <b>33</b> |
| 5.1 TEST REQUIREMENT .....                                        | 33        |
| 5.2 TEST PROCEDURE .....                                          | 33        |
| 5.3 DEVIATION FROM TEST STANDARD .....                            | 34        |
| 5.4 TEST SETUP .....                                              | 34        |
| 5.5 EUT OPERATING CONDITIONS .....                                | 34        |
| 5.6 TEST RESULT .....                                             | 35        |
| 6.1 APPLIED PROCEDURES / LIMIT .....                              | 38        |
| 6.2 TEST PROCEDURE .....                                          | 38        |
| 6.3 DEVIATION FROM STANDARD .....                                 | 38        |
| 6.4 TEST SETUP .....                                              | 38        |



|                                                    |    |
|----------------------------------------------------|----|
| 6.5 EUT OPERATION CONDITIONS .....                 | 38 |
| 6.6 TEST RESULT .....                              | 39 |
| 7. 6DB OCCUPIED BANDWIDTH .....                    | 46 |
| 7.1 APPLIED PROCEDURES / LIMIT .....               | 46 |
| 7.2 TEST PROCEDURE .....                           | 46 |
| 7.3 DEVIATION FROM STANDARD .....                  | 46 |
| 7.4 TEST SETUP .....                               | 46 |
| 7.5 EUT OPERATION CONDITIONS .....                 | 46 |
| 7.6 TEST RESULT .....                              | 47 |
| 8. PEAK OUTPUT POWER TEST .....                    | 51 |
| 8.1 APPLIED PROCEDURES/LIMIT .....                 | 51 |
| 8.2 TEST PROCEDURE .....                           | 51 |
| 8.3 DEVIATION FROM STANDARD .....                  | 51 |
| 8.4 TEST SETUP .....                               | 51 |
| 8.5 EUT OPERATION CONDITIONS .....                 | 51 |
| 8.6 TEST RESULT .....                              | 52 |
| 9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION ..... | 53 |
| 9.1 APPLICABLE STANDARD .....                      | 53 |
| 9.2 TEST PROCEDURE .....                           | 53 |
| 9.3 DEVIATION FROM STANDARD .....                  | 53 |
| 9.4 TEST SETUP .....                               | 53 |
| 9.5 EUT OPERATION CONDITIONS .....                 | 53 |
| 9.6 TEST RESULTS .....                             | 53 |
| 10. DUTY CYCLE .....                               | 62 |
| 10.1 APPLIED PROCEDURES / LIMIT .....              | 62 |
| 10.2 DEVIATION FROM STANDARD .....                 | 62 |
| 10.3 TEST SETUP .....                              | 62 |
| 10.4 TEST RESULTS .....                            | 63 |
| 11. ANTENNA REQUIREMENT .....                      | 67 |
| 12. TEST SETUP PHOTO .....                         | 68 |
| 13. EUT CONSTRUCTIONAL DETAILS .....               | 68 |



**1. VERSION**

| Report No.     | Version | Description             | Approved      |
|----------------|---------|-------------------------|---------------|
| DLE-250403006R | Rev.01  | Initial issue of report | Mar. 12, 2025 |
|                |         |                         |               |



## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.247) , Subpart C |                                  |        |        |
|---------------------------------|----------------------------------|--------|--------|
| Standard Section                | Test Item                        | Result | Remark |
| FCC part 15.203/15.247 (c)      | Antenna requirement              | PASS   |        |
| FCC part 15.207                 | AC Power Line Conducted Emission | PASS   |        |
| FCC part 15.247 (b)(3)          | Conducted Peak Output Power      | PASS   |        |
| FCC part 15.247 (a)(2)          | 6dB Occupied Bandwidth           | PASS   |        |
| FCC part 15.247 (e)             | Power Spectral Density           | PASS   |        |
| FCC part 15.247(d)              | Band Edge                        | PASS   |        |
| FCC part 15.205/15.209          | Spurious Emission                | PASS   |        |
| ANSI C63.10:2013                | Duty cycle                       | PASS   |        |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



## 2.1 TEST FACILITY

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Roa Baolong Industrial Zone, Baolong Street, Longgang Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

## 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$  · where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  · providing a level of confidence of approximately 95 % °

| No. | Item                                              | Uncertainty |
|-----|---------------------------------------------------|-------------|
| 1   | 3m camber Radiated spurious emission(9KHz-30MHz)  | U=4.5dB     |
| 2   | 3m camber Radiated spurious emission(30MHz-1GHz)  | U=4.8dB     |
| 3   | 3m chamber Radiated spurious emission(1GHz-6GHz)  | U=4.9dB     |
| 4   | 3m chamber Radiated spurious emission(6GHz-40GHz) | U=5.0dB     |
| 5   | Conducted disturbance                             | U=3.2dB     |
| 6   | RF Band Edge                                      | U=1.68dB    |
| 7   | RF power conducted                                | U=1.86dB    |
| 8   | RF conducted Spurious Emission                    | U=2.2dB     |
| 9   | RF Occupied Bandwidth                             | U=1.8dB     |
| 10  | RF Power Spectral Density                         | U=1.75dB    |
| 11  | humidity uncertainty                              | U=5.3%      |
| 12  | Temperature uncertainty                           | U=0.59°C    |



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                        |                                                                                                                                                                                          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:          | Projector X2pro                                                                                                                                                                          |
| Model No.:             | X2pro<br>X3pro, X4pro, X5pro, X6pro, X7pro, X8pro, X9pro, X10pro, X20pro, X30pro                                                                                                         |
| Model Different.:      | All the model are the same circuit and RF module, except model names and appearance color.                                                                                               |
| Serial No.:            | N/A                                                                                                                                                                                      |
| Hardware Version:      | H1.0                                                                                                                                                                                     |
| Software Version:      | S1.0                                                                                                                                                                                     |
| Sample(s) Status:      | Engineer sample                                                                                                                                                                          |
| Channel numbers:       | 802.11b/g/n20/ax20: 11 CH<br>802.11n40/ax40: 7 CH                                                                                                                                        |
| Channel separation:    | 5MHz                                                                                                                                                                                     |
| Modulation technology: | 802.11b:<br>Direct Sequence Spread Spectrum(DSSS)<br>802.11g/n:<br>Orthogonal Frequency Division Multiplexing(OFDM)<br>802.11ax:<br>Orthogonal Frequency Division Multiple Access(OFDMA) |
| Data Rate              | 802.11b: 1/2/5.5/11Mbit/s<br>802.11g: 6/9/12/24/18/36/48/54Mbit/s<br>802.11n20/n40: MCS0-MCS7<br>802.11ax20/ax40: MCS0-MCS9                                                              |
| Antenna Type:          | FPC Antenna                                                                                                                                                                              |
| Antenna gain:          | 1.3dBi                                                                                                                                                                                   |
| Power supply:          | Input: AC 100-240V,50/60Hz, 1.5A                                                                                                                                                         |



| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2412MHz   | 4       | 2427MHz   | 7       | 2442MHz   | 10      | 2457MHz   |
| 2                                   | 2417MHz   | 5       | 2432MHz   | 8       | 2447MHz   | 11      | 2462MHz   |
| 3                                   | 2422MHz   | 6       | 2437MHz   | 9       | 2452MHz   |         |           |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Test channel    | Frequency (MHz)    |                |
|-----------------|--------------------|----------------|
|                 | 802.11b/g/n20/ax20 | 802.11n40/ax40 |
| Lowest channel  | 2412MHz            | 2422MHz        |
| Middle channel  | 2437MHz            | 2437MHz        |
| Highest channel | 2462MHz            | 2452MHz        |

### 3.2 DESCRIPTION OF TEST MODES

|                                                                                                                                                                                                                                                                                                                                                 |                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| Transmitting mode                                                                                                                                                                                                                                                                                                                               | Keep the EUT in continuously transmitting mode |
| <p>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</p> <p>For battery operated equipment, the equipment tests shall be performed using a new battery.</p> |                                                |


|                                                                                                                                                                                                              |         |         |               |                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------|---------------|-----------------|
| We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows: |         |         |               |                 |
| Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.                                                                                                         |         |         |               |                 |
| Mode                                                                                                                                                                                                         | 802.11b | 802.11g | 802.11n20/n40 | 802.11ax20/ax40 |
| Data rate                                                                                                                                                                                                    | 1Mbps   | 6Mbps   | MCS0(HT0)     | MCS0(HE0)       |

|                   |         |
|-------------------|---------|
| Test Software     | DRUT    |
| Power level setup | Default |




### 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


#### Conducted Emission



#### Radiated Emission



#### Conducted Spurious



### 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment       | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|-----------------|-----------|----------------|------------|------|
| E-1  | Projector X2pro | N/A       | X2pro          | N/A        | EUT  |
|      |                 |           |                |            |      |
|      |                 |           |                |            |      |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |

#### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) EUT is tested with new battery.



## 3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

## Conduction Emissions Test

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No.        | Firmware Version | Last calibration | Calibrated until |
|------|-------------------|--------------|----------|-------------------|------------------|------------------|------------------|
| 1    | LISN              | R&S          | ENV216   | 101471            | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 2    | LISN              | CYBERTEK     | EM5040A  | E1850400149       | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 3    | Test Cable        | N/A          | C-01     | N/A               | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 4    | EMI Test Receiver | R&S          | ESCI3    | 101393            | 4.42 SP3         | Sep. 29, 2024    | Sep. 28, 2025    |
| 5    | EMC Software      | Frad         | EZ-EMC   | Ver.EMC-CON 3A1.1 | N/A              | \                | \                |

## Radiation Emissions &amp; Radiation Spurious Emissions Test

| Item | Equipment                         | Manufacturer   | Type No.        | Serial No.         | Firmware Version | Last calibration | Calibrated until |
|------|-----------------------------------|----------------|-----------------|--------------------|------------------|------------------|------------------|
| 1    | Spectrum Analyzer (9kHz-26.5GHz)  | KEYSIGHT       | N9020A          | MY55370835         | A.17.05          | Sep. 29, 2024    | Sep. 28, 2025    |
| 2    | Spectrum Analyzer (10kHz-39.9GHz) | R&S            | FSV40-N         | 100363             | 1.71 SP2         | Sep. 30, 2024    | Sep. 29, 2025    |
| 3    | EMI Test Receiver (9kHz-7GHz)     | R&S            | ESCI7           | 100969             | 4.32             | Sep. 29, 2024    | Sep. 28, 2025    |
| 4    | Bilog Antenna (30MHz-1500MHz)     | Schwarzbeck    | VULB9168        | 00877              | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 5    | Horn Antenna (1GHz-18GHz)         | Agilent        | AH-118          | 071145             | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 6    | Horn Antenna (15GHz-40GHz)        | A.H.System     | SAS-574         | 588                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 7    | Loop Antenna                      | TESEQ          | HLA6121         | 58357              | N/A              | Oct. 11, 2024    | Oct. 10, 2025    |
| 8    | Amplifier (30-1000MHz)            | EM Electronics | EM330 Amplifier | 60747              | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 9    | Amplifier (1GHz-26.5GHz)          | HuiPu          | 8449B           | 3008A00315         | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 10   | Amplifier (500MHz-40GHz)          | QuanJuDa       | DLE-161         | 097                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 11   | Test Cable                        | N/A            | R-01            | N/A                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 12   | Test Cable                        | N/A            | R-02            | N/A                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 13   | Test Cable                        | N/A            | R-03            | N/A                | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 14   | D.C. Power Supply                 | LongWei        | TPR-6405D       | GQ7516             | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 15   | EMC Software                      | Frad           | EZ-EMC          | Ver.EMC-CO N 3A1.1 | N/A              | \                | \                |
| 16   | Turntable                         | MF             | MF-7802BS       | N/A                | N/A              | \                | \                |
| 17   | Antenna tower                     | MF             | MF-7802BS       | N/A                | N/A              | \                | \                |



## RF Conducted Test

| Item | Equipment                         | Manufacturer                | Type No.    | Serial No.    | Firmware Version | Last calibration | Calibrated until |
|------|-----------------------------------|-----------------------------|-------------|---------------|------------------|------------------|------------------|
| 1    | Spectrum Analyzer (9kHz-26.5GHz)  | KEYSIGHT                    | N9020A      | MY55370835    | A.17.05          | Sep. 29, 2024    | Sep. 28, 2025    |
| 2    | Spectrum Analyzer (10kHz-39.9GHz) | R&S                         | FSV40-N     | 100363        | 1.71 SP2         | Sep. 30, 2024    | Sep. 29, 2025    |
| 3    | Test Cable                        | N/A                         | RF-01       | N/A           | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 4    | Test Cable                        | N/A                         | RF-02       | N/A           | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 5    | Test Cable                        | N/A                         | RF-03       | N/A           | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 6    | ESG Signal Generator              | Agilent                     | E4421B      | GB40051203    | B.03.84          | Sep. 29, 2024    | Sep. 28, 2025    |
| 7    | Signal Generator                  | Agilent                     | N5182A      | MY47420215    | A.01.87          | Sep. 29, 2024    | Sep. 28, 2025    |
| 8    | Magnetic Field Probe Tester       | Narda                       | ELT-400     | 0-0344/M-1752 | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 9    | Van der Hoofden measuring head    | Schwarzbeck Mess-elektronik | VDHH 9502   | 9502-039      | N/A              | Sep. 30, 2024    | Sep. 29, 2025    |
| 10   | Wideband Radio Communication Test | R&S                         | CMW500      | 106504        | V 3.7.22         | Sep. 30, 2024    | Sep. 29, 2025    |
| 11   | MWRF Power Meter Test system      | MW                          | MW100-RF CB | 10371         | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 12   | Power Meter                       | KEYSIGHT                    | N1912AP     | 926431        | A.05.00          | Sep. 29, 2024    | Sep. 28, 2025    |
| 13   | D.C. Power Supply                 | LongWei                     | TPR-6405 D  | GQ7516        | N/A              | Sep. 29, 2024    | Sep. 28, 2025    |
| 14   | RF Software                       | MW                          | MTS8310     | V2.0.0.0      | N/A              | \                | \                |



#### 4. EMC EMISSION TEST

##### 4.1 CONDUCTED EMISSION MEASUREMENT

|                       |                                      |
|-----------------------|--------------------------------------|
| Test Requirement:     | FCC Part15 C Section 15.207          |
| Test Method:          | ANSI C63.10:2013                     |
| Test Frequency Range: | 150KHz to 30MHz                      |
| Receiver setup:       | RBW=9KHz, VBW=30KHz, Sweep time=auto |

##### 4.1.1 POWER LINE CONDUCTED EMISSION Limits

| FREQUENCY (MHz) | Limit (dBuV) |           | Standard |
|-----------------|--------------|-----------|----------|
|                 | Quasi-peak   | Average   |          |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * | FCC      |
| 0.50 -5.0       | 56.00        | 46.00     | FCC      |
| 5.0 -30.0       | 60.00        | 50.00     | FCC      |

Note:

(1) \*Decreases with the logarithm of the frequency.

##### 4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation



#### 4.1.4 TEST SETUP

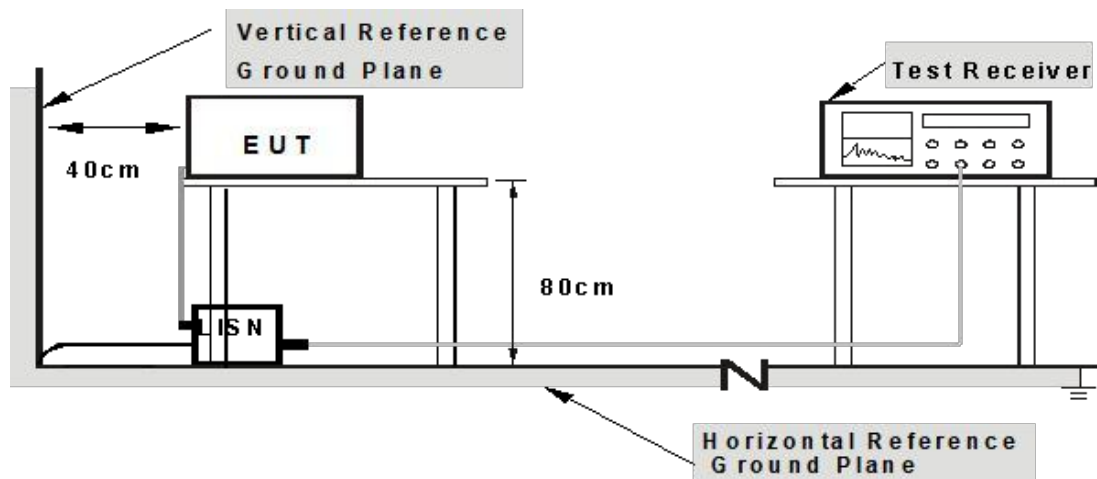

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**


#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



## 4.1.6 TEST RESULT

|               |              |                    |                        |
|---------------|--------------|--------------------|------------------------|
| Temperature:  | 26℃          | Relative Humidity: | 54%                    |
| Pressure:     | 101 kPa      | Polarization:      | L                      |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX 802.11n20 - 2412MHz |

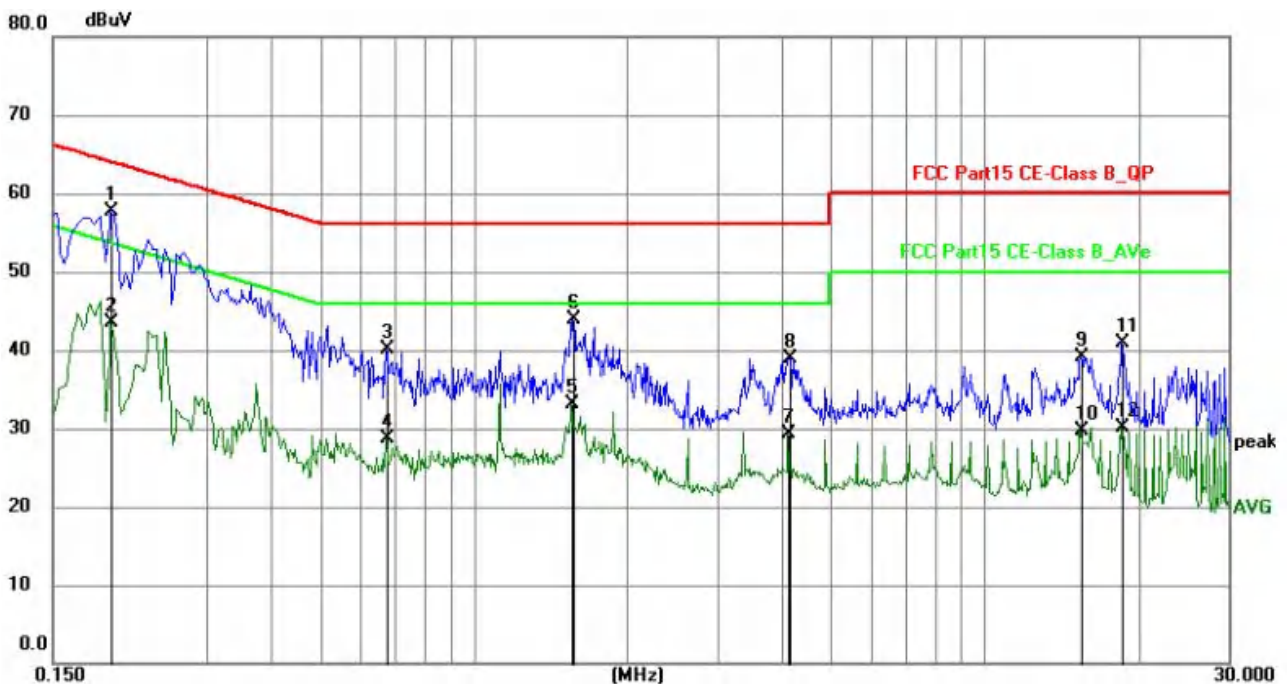


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.1949          | 37.32          | 20.36       | 57.68        | 63.83        | -6.15       | QP       | P   |        |
| 2   | 0.1949          | 23.10          | 20.36       | 43.46        | 53.83        | -10.37      | AVG      | P   |        |
| 3   | 0.6719          | 19.86          | 20.29       | 40.15        | 56.00        | -15.85      | QP       | P   |        |
| 4   | 0.6719          | 8.46           | 20.29       | 28.75        | 46.00        | -17.25      | AVG      | P   |        |
| 5   | 1.5539          | 12.86          | 20.30       | 33.16        | 46.00        | -12.84      | AVG      | P   |        |
| 6   | 1.5625          | 23.66          | 20.30       | 43.96        | 56.00        | -12.04      | QP       | P   |        |
| 7   | 4.1280          | 8.95           | 20.35       | 29.30        | 46.00        | -16.70      | AVG      | P   |        |
| 8   | 4.1459          | 18.61          | 20.35       | 38.96        | 56.00        | -17.04      | QP       | P   |        |
| 9   | 15.3915         | 18.66          | 20.49       | 39.15        | 60.00        | -20.85      | QP       | P   |        |
| 10  | 15.3915         | 9.28           | 20.49       | 29.77        | 50.00        | -20.23      | AVG      | P   |        |
| 11  | 18.6044         | 20.40          | 20.50       | 40.90        | 60.00        | -19.10      | QP       | P   |        |
| 12  | 18.6044         | 9.54           | 20.50       | 30.04        | 50.00        | -19.96      | AVG      | P   |        |

## Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Lism factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. The test data shows only the worst case TX 802.11n20 - 2412MHz.



|               |              |                    |                        |
|---------------|--------------|--------------------|------------------------|
| Temperature:  | 26℃          | Relative Humidity: | 54%                    |
| Pressure:     | 101 kPa      | Polarization:      | N                      |
| Test Voltage: | AC 120V/60Hz | Test Mode:         | TX 802.11n20 - 2412MHz |

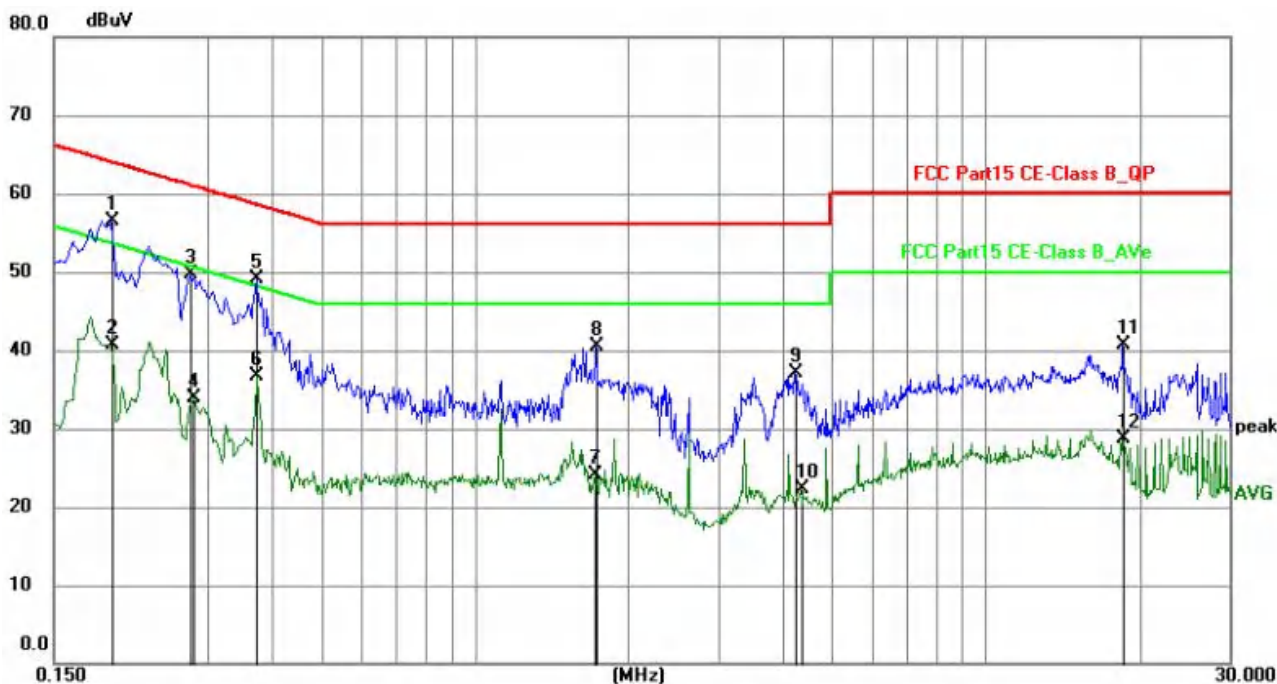

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1   | 0.1949          | 36.20          | 20.35       | 56.55        | 63.83        | -7.28       | QP       | P   |        |
| 2   | 0.1949          | 20.41          | 20.35       | 40.76        | 53.83        | -13.07      | AVG      | P   |        |
| 3   | 0.2787          | 29.40          | 20.35       | 49.75        | 60.85        | -11.10      | QP       | P   |        |
| 4   | 0.2816          | 13.55          | 20.35       | 33.90        | 50.77        | -16.87      | AVG      | P   |        |
| 5   | 0.3750          | 28.83          | 20.33       | 49.16        | 58.39        | -9.23       | QP       | P   |        |
| 6   | 0.3750          | 16.36          | 20.33       | 36.69        | 48.39        | -11.70      | AVG      | P   |        |
| 7   | 1.7200          | 3.90           | 20.30       | 24.20        | 46.00        | -21.80      | AVG      | P   |        |
| 8   | 1.7294          | 20.21          | 20.30       | 40.51        | 56.00        | -15.49      | QP       | P   |        |
| 9   | 4.2404          | 16.74          | 20.34       | 37.08        | 56.00        | -18.92      | QP       | P   |        |
| 10  | 4.3482          | 1.94           | 20.34       | 22.28        | 46.00        | -23.72      | AVG      | P   |        |
| 11  | 18.5955         | 20.14          | 20.52       | 40.66        | 60.00        | -19.34      | QP       | P   |        |
| 12  | 18.5955         | 8.15           | 20.52       | 28.67        | 50.00        | -21.33      | AVG      | P   |        |

## Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Lism factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. The test data shows only the worst case TX 802.11n20 - 2412MHz.



#### 4.2 RADIATED EMISSION MEASUREMENT

|                       |                             |            |        |        |            |
|-----------------------|-----------------------------|------------|--------|--------|------------|
| Test Requirement:     | FCC Part15 C Section 15.209 |            |        |        |            |
| Test Method:          | ANSI C63.10:2013            |            |        |        |            |
| Test Frequency Range: | 9kHz to 25GHz               |            |        |        |            |
| Test site:            | Measurement Distance: 3m    |            |        |        |            |
| Receiver setup:       | Frequency                   | Detector   | RBW    | VBW    | Value      |
|                       | 9KHz-150KHz                 | Quasi-peak | 200Hz  | 600Hz  | Quasi-peak |
|                       | 150KHz-30MHz                | Quasi-peak | 9KHz   | 30KHz  | Quasi-peak |
|                       | 30MHz-1GHz                  | Quasi-peak | 100KHz | 300KHz | Quasi-peak |
|                       | Above 1GHz                  | Peak       | 1MHz   | 3MHz   | Peak       |
|                       |                             | Peak       | 1MHz   | 10Hz   | Average    |

##### 4.2.1 RADIATED EMISSION LIMITS

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

##### LIMITS OF RADIATED EMISSION MEASUREMENT

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



#### 4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested  
and performed pretest to three orthogonal axis. The worst case emissions were reported

#### 4.2.3 DEVIATION FROM TEST STANDARD

No deviation


#### 4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

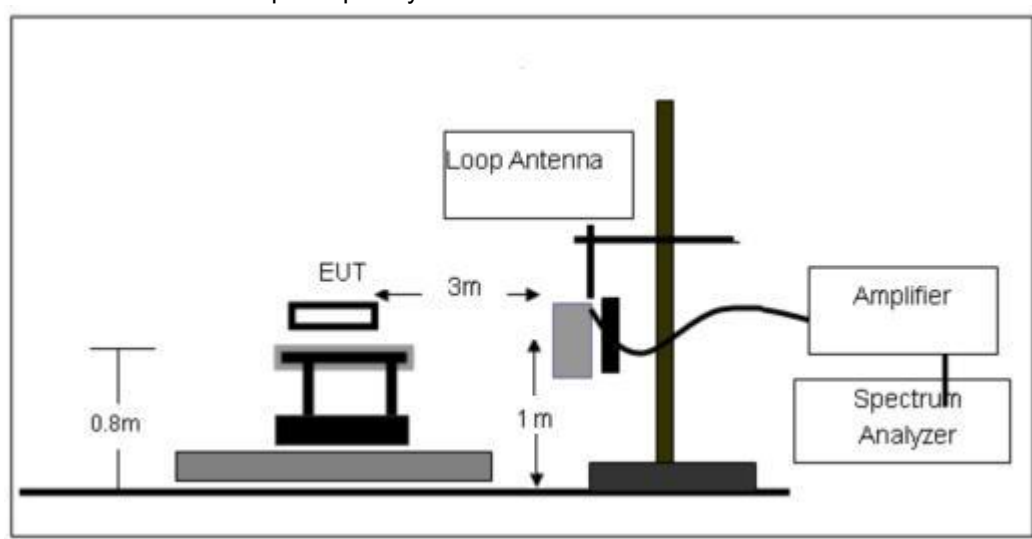




## (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

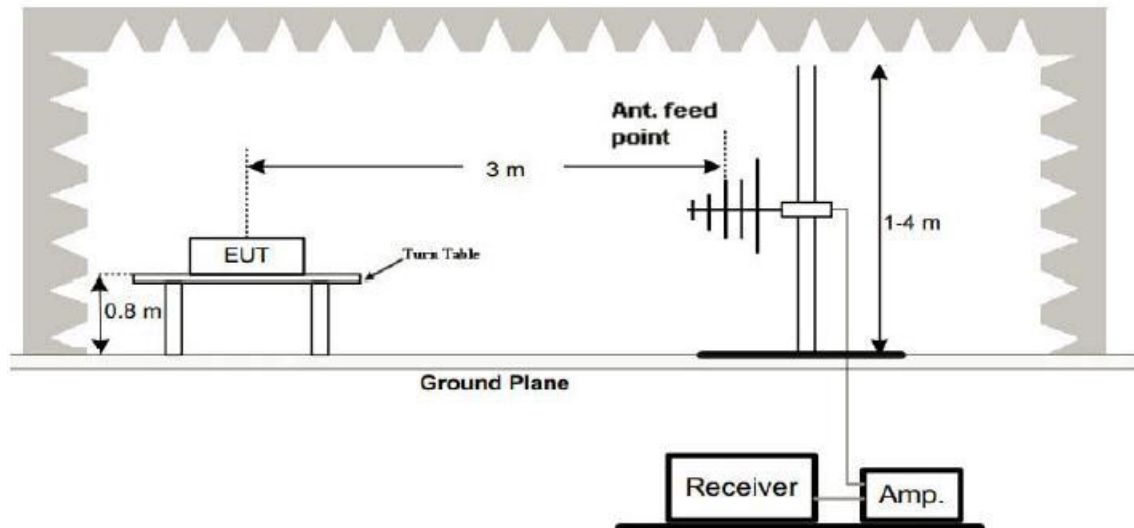

## (C) Radiated Emission Test-Up Frequency Above 1GHz

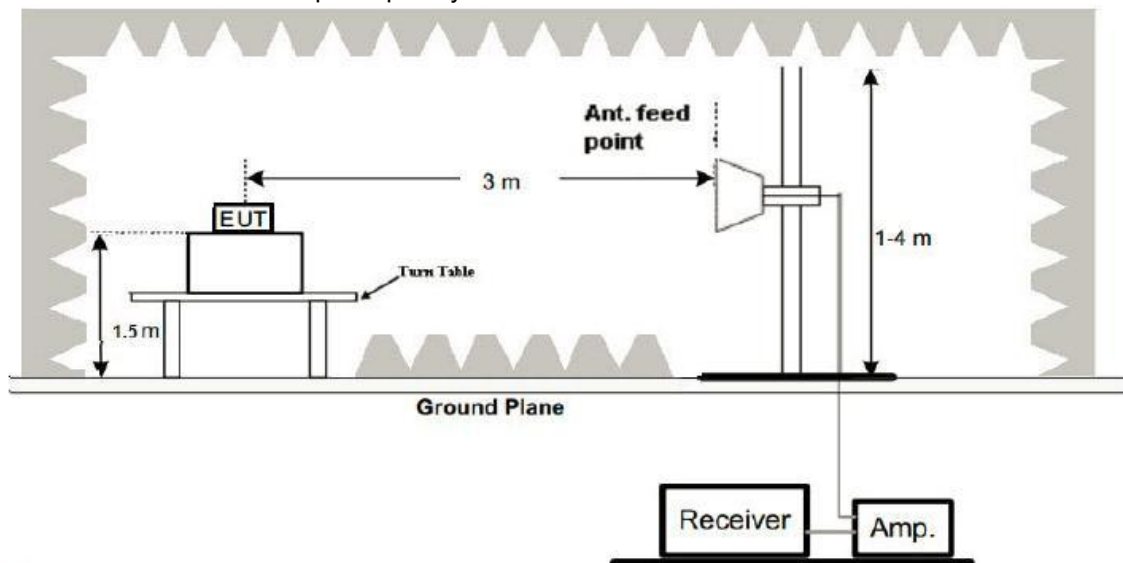

## 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz

|               |              |                    |                        |
|---------------|--------------|--------------------|------------------------|
| Temperature:  | 26°C         | Relative Humidity: | 54%                    |
| Pressure:     | 101 kPa      | Polarization:      | Horizontal             |
| Test Voltage: | AC 120V/60Hz | Test Mode :        | TX 802.11n20 - 2412MHz |

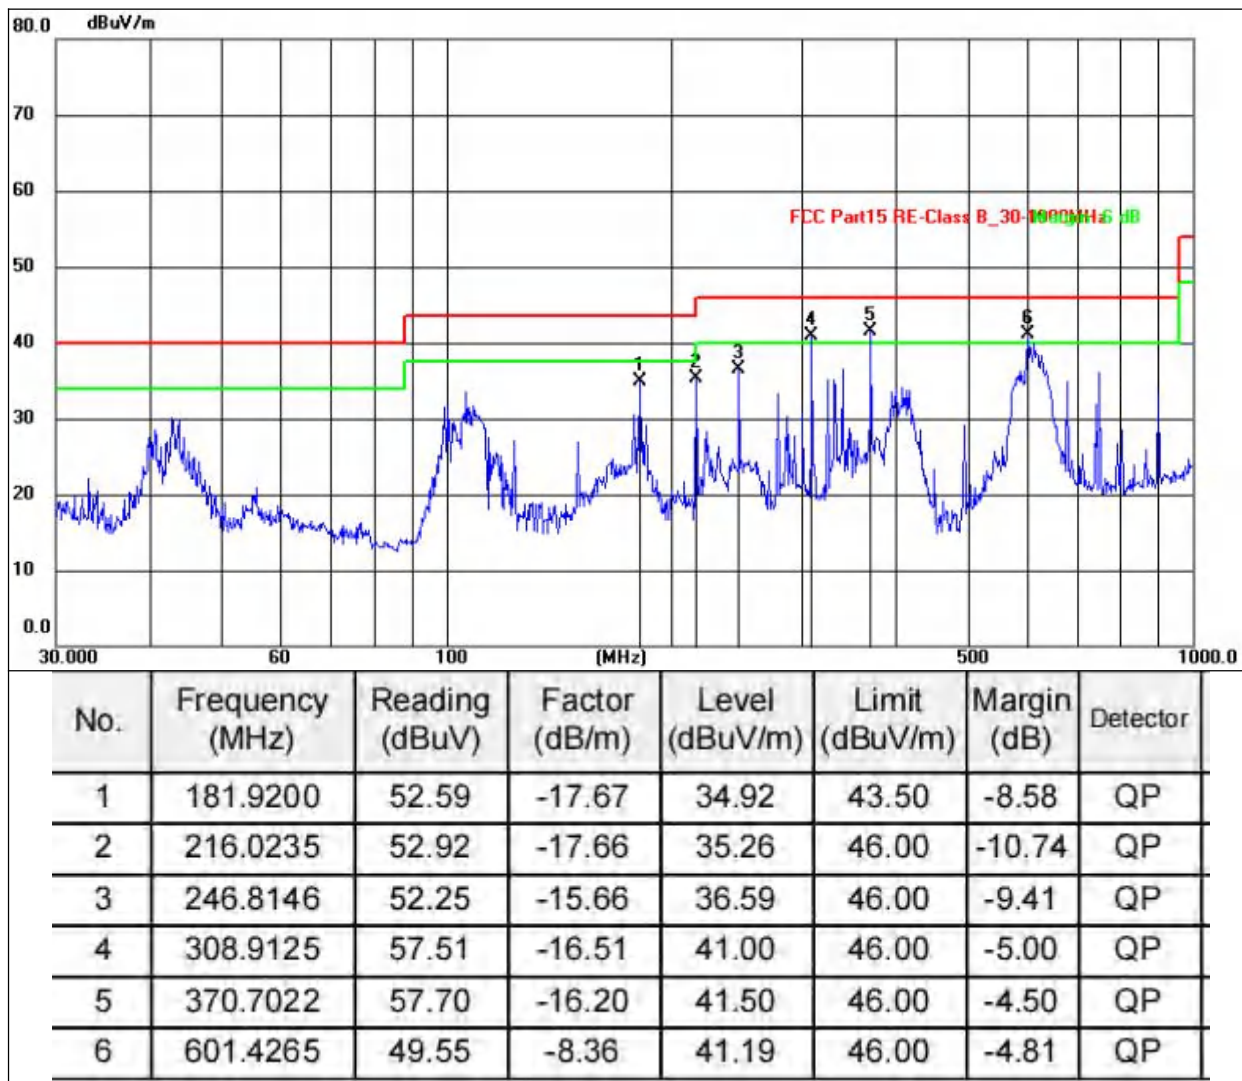


## Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin = Measurement Level-Limit.
7. The test data shows only the worst case TX 802.11n20 - 2412MHz.



|               |              |                    |                        |
|---------------|--------------|--------------------|------------------------|
| Temperature:  | 26℃          | Relative Humidity: | 54%                    |
| Pressure:     | 101kPa       | Polarization:      | Vertical               |
| Test Voltage: | AC 120V/60Hz | Test Mode :        | TX 802.11n20 - 2412MHz |

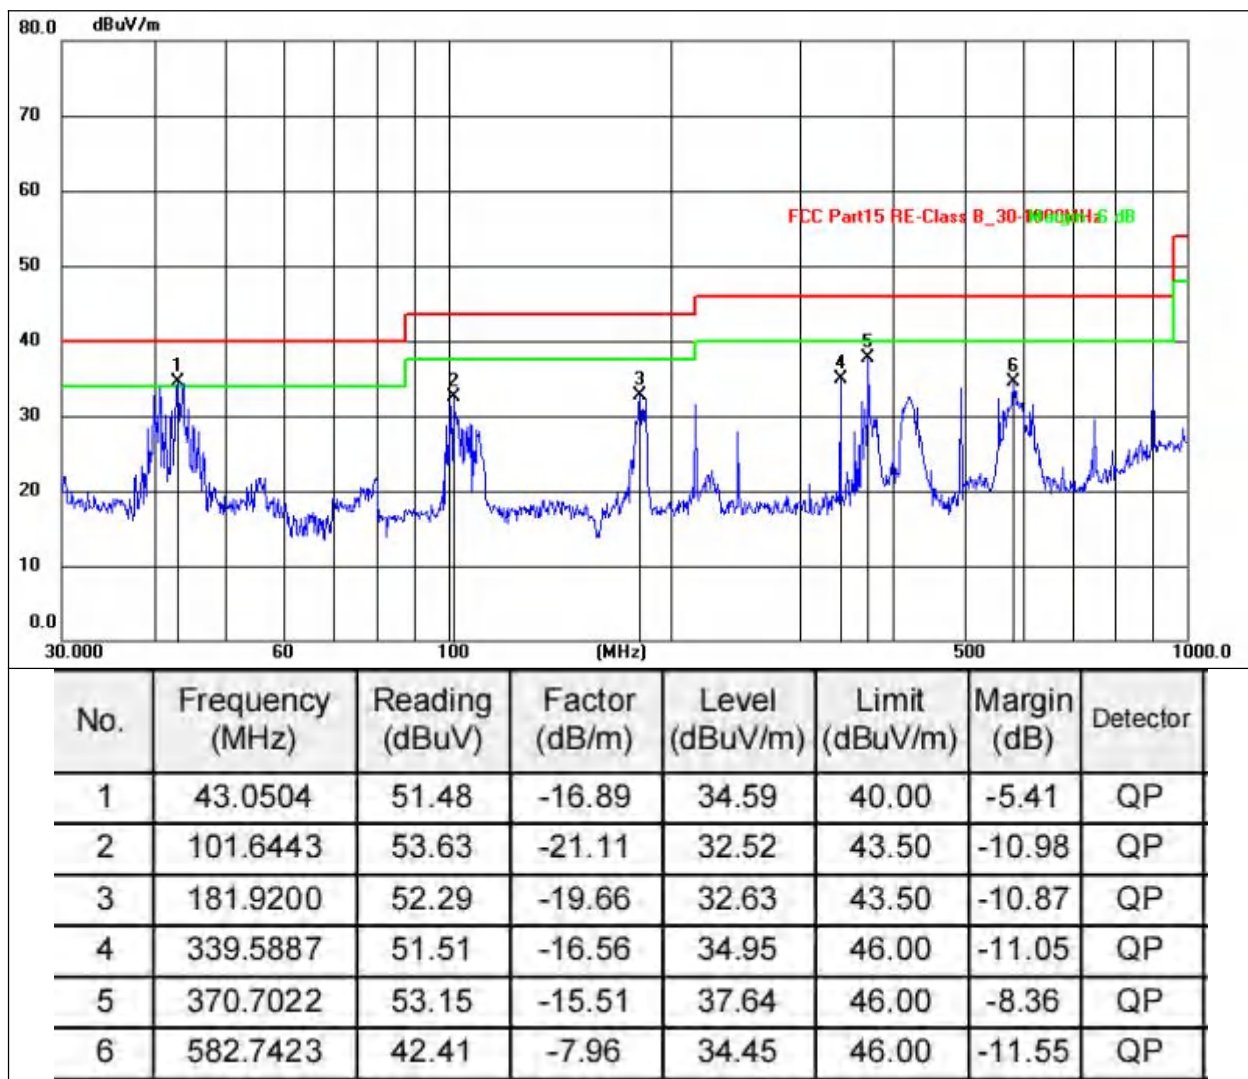

## Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi - Peak measurement were performed at the frequencies with maximized peak emission.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. Final Level = Reading level + Correct Factor.
5. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
6. Margin = Measurement Level-Limit.
7. The test data shows only the worst case TX 802.11n20 - 2412MHz.



1GHz~25GHz

802.11b

| Polar<br>(H/V)      | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits       | Margin | Detect<br>or<br>Type |
|---------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|--------------|--------|----------------------|
|                     | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/<br>m) | (dB)   |                      |
| Low Channel:2412MHz |           |                  |                   |               |                   |                   |              |        |                      |
| V                   | 4824.00   | 51.98            | 30.55             | 5.77          | 24.66             | 51.86             | 74.00        | -22.14 | PK                   |
| V                   | 4824.00   | 43.34            | 30.55             | 5.77          | 24.66             | 43.22             | 54.00        | -10.78 | AV                   |
| V                   | 7236.00   | 52.34            | 30.33             | 6.32          | 24.55             | 52.88             | 74.00        | -21.12 | PK                   |
| V                   | 7236.00   | 43.31            | 30.33             | 6.32          | 24.55             | 43.85             | 54.00        | -10.15 | AV                   |
| V                   | 9648.00   | 54.00            | 30.85             | 7.45          | 24.69             | 55.29             | 74.00        | -18.71 | PK                   |
| V                   | 9648.00   | 43.52            | 30.85             | 7.45          | 24.69             | 44.81             | 54.00        | -9.19  | AV                   |
| V                   | 12060.00  | 52.25            | 31.02             | 8.99          | 25.57             | 55.79             | 74.00        | -18.21 | PK                   |
| V                   | 12060.00  | 43.46            | 31.02             | 8.99          | 25.57             | 47.00             | 54.00        | -7.00  | AV                   |
| H                   | 4824.00   | 54.83            | 30.55             | 5.77          | 24.66             | 54.71             | 74.00        | -19.29 | PK                   |
| H                   | 4824.00   | 43.08            | 30.55             | 5.77          | 24.66             | 42.96             | 54.00        | -11.04 | AV                   |
| H                   | 7236.00   | 52.28            | 30.33             | 6.32          | 24.55             | 52.82             | 74.00        | -21.18 | PK                   |
| H                   | 7236.00   | 43.59            | 30.33             | 6.32          | 24.55             | 44.13             | 54.00        | -9.87  | AV                   |
| H                   | 9648.00   | 51.51            | 30.85             | 7.45          | 24.69             | 52.80             | 74.00        | -21.20 | PK                   |
| H                   | 9648.00   | 43.75            | 30.85             | 7.45          | 24.69             | 45.04             | 54.00        | -8.96  | AV                   |
| H                   | 12060.00  | 51.70            | 31.02             | 8.99          | 25.57             | 55.24             | 74.00        | -18.76 | PK                   |
| H                   | 12060.00  | 43.41            | 31.02             | 8.99          | 25.57             | 46.95             | 54.00        | -7.05  | AV                   |

| Polar<br>(H/V)         | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits       | Margin | Detect<br>or<br>Type |
|------------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|--------------|--------|----------------------|
|                        | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/<br>m) | (dB)   |                      |
| Middle Channel:2437MHz |           |                  |                   |               |                   |                   |              |        |                      |
| V                      | 4874.00   | 52.56            | 30.55             | 5.77          | 24.66             | 52.44             | 74.00        | -21.56 | PK                   |
| V                      | 4874.00   | 43.54            | 30.55             | 5.77          | 24.66             | 43.42             | 54.00        | -10.58 | AV                   |
| V                      | 7311.00   | 52.38            | 30.33             | 6.32          | 24.55             | 52.92             | 74.00        | -21.08 | PK                   |
| V                      | 7311.00   | 43.05            | 30.33             | 6.32          | 24.55             | 43.59             | 54.00        | -10.41 | AV                   |
| V                      | 9748.00   | 51.65            | 30.85             | 7.45          | 24.69             | 52.94             | 74.00        | -21.06 | PK                   |
| V                      | 9748.00   | 43.53            | 30.85             | 7.45          | 24.69             | 44.82             | 54.00        | -9.18  | AV                   |
| V                      | 12185.00  | 52.24            | 31.02             | 8.99          | 25.57             | 55.78             | 74.00        | -18.22 | PK                   |
| V                      | 12185.00  | 43.10            | 31.02             | 8.99          | 25.57             | 46.64             | 54.00        | -7.36  | AV                   |
| H                      | 4874.00   | 51.47            | 30.55             | 5.77          | 24.66             | 51.35             | 74.00        | -22.65 | PK                   |
| H                      | 4874.00   | 43.14            | 30.55             | 5.77          | 24.66             | 43.02             | 54.00        | -10.98 | AV                   |
| H                      | 7311.00   | 54.44            | 30.33             | 6.32          | 24.55             | 54.98             | 74.00        | -19.02 | PK                   |
| H                      | 7311.00   | 43.70            | 30.33             | 6.32          | 24.55             | 44.24             | 54.00        | -9.76  | AV                   |
| H                      | 9748.00   | 50.99            | 30.85             | 7.45          | 24.69             | 52.28             | 74.00        | -21.72 | PK                   |
| H                      | 9748.00   | 43.52            | 30.85             | 7.45          | 24.69             | 44.81             | 54.00        | -9.19  | AV                   |
| H                      | 12185.00  | 52.80            | 31.02             | 8.99          | 25.57             | 56.34             | 74.00        | -17.66 | PK                   |
| H                      | 12185.00  | 43.71            | 31.02             | 8.99          | 25.57             | 47.25             | 54.00        | -6.75  | AV                   |



| Polar<br>(H/V)       | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampli<br>fier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/<br>m) | Margin<br>(dB) | Detect<br>or<br>Type |
|----------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|------------------------|----------------|----------------------|
| High Channel:2462MHz |                    |                            |                           |                       |                           |                               |                        |                |                      |
| V                    | 4924.00            | 50.98                      | 30.55                     | 5.77                  | 24.66                     | 50.86                         | 74.00                  | -23.14         | PK                   |
| V                    | 4924.00            | 43.36                      | 30.55                     | 5.77                  | 24.66                     | 43.24                         | 54.00                  | -10.76         | AV                   |
| V                    | 7386.00            | 50.44                      | 30.33                     | 6.32                  | 24.55                     | 50.98                         | 74.00                  | -23.02         | PK                   |
| V                    | 7386.00            | 43.21                      | 30.33                     | 6.32                  | 24.55                     | 43.75                         | 54.00                  | -10.25         | AV                   |
| V                    | 9848.00            | 53.37                      | 30.85                     | 7.45                  | 24.69                     | 54.66                         | 74.00                  | -19.34         | PK                   |
| V                    | 9848.00            | 43.88                      | 30.85                     | 7.45                  | 24.69                     | 45.17                         | 54.00                  | -8.83          | AV                   |
| V                    | 12310.00           | 52.88                      | 31.02                     | 8.99                  | 25.57                     | 56.42                         | 74.00                  | -17.58         | PK                   |
| V                    | 12310.00           | 43.09                      | 31.02                     | 8.99                  | 25.57                     | 46.63                         | 54.00                  | -7.37          | AV                   |
| H                    | 4924.00            | 50.72                      | 30.55                     | 5.77                  | 24.66                     | 50.60                         | 74.00                  | -23.40         | PK                   |
| H                    | 4924.00            | 43.74                      | 30.55                     | 5.77                  | 24.66                     | 43.62                         | 54.00                  | -10.38         | AV                   |
| H                    | 7386.00            | 53.50                      | 30.33                     | 6.32                  | 24.55                     | 54.04                         | 74.00                  | -19.96         | PK                   |
| H                    | 7386.00            | 43.86                      | 30.33                     | 6.32                  | 24.55                     | 44.40                         | 54.00                  | -9.60          | AV                   |
| H                    | 9848.00            | 51.59                      | 30.85                     | 7.45                  | 24.69                     | 52.88                         | 74.00                  | -21.12         | PK                   |
| H                    | 9848.00            | 43.51                      | 30.85                     | 7.45                  | 24.69                     | 44.80                         | 54.00                  | -9.20          | AV                   |
| H                    | 12310.00           | 52.01                      | 31.02                     | 8.99                  | 25.57                     | 55.55                         | 74.00                  | -18.45         | PK                   |
| H                    | 12310.00           | 43.38                      | 31.02                     | 8.99                  | 25.57                     | 46.92                         | 54.00                  | -7.08          | AV                   |

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11g

| Polar<br>(H/V)      | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detect<br>or<br>Type |
|---------------------|--------------------|----------------------------|-----------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|----------------------|
| Low Channel:2412MHz |                    |                            |                       |                       |                           |                               |                    |                |                      |
| V                   | 4824.00            | 51.98                      | 30.55                 | 5.77                  | 24.66                     | 51.86                         | 74.00              | -22.14         | PK                   |
| V                   | 4824.00            | 43.61                      | 30.55                 | 5.77                  | 24.66                     | 43.49                         | 54.00              | -10.51         | AV                   |
| V                   | 7236.00            | 54.44                      | 30.33                 | 6.32                  | 24.55                     | 54.98                         | 74.00              | -19.02         | PK                   |
| V                   | 7236.00            | 43.67                      | 30.33                 | 6.32                  | 24.55                     | 44.21                         | 54.00              | -9.79          | AV                   |
| V                   | 9648.00            | 52.61                      | 30.85                 | 7.45                  | 24.69                     | 53.90                         | 74.00              | -20.10         | PK                   |
| V                   | 9648.00            | 43.78                      | 30.85                 | 7.45                  | 24.69                     | 45.07                         | 54.00              | -8.93          | AV                   |
| V                   | 12060.00           | 52.09                      | 31.02                 | 8.99                  | 25.57                     | 55.63                         | 74.00              | -18.37         | PK                   |
| V                   | 12060.00           | 43.85                      | 31.02                 | 8.99                  | 25.57                     | 47.39                         | 54.00              | -6.61          | AV                   |
| H                   | 4824.00            | 53.47                      | 30.55                 | 5.77                  | 24.66                     | 53.35                         | 74.00              | -20.65         | PK                   |
| H                   | 4824.00            | 43.38                      | 30.55                 | 5.77                  | 24.66                     | 43.26                         | 54.00              | -10.74         | AV                   |
| H                   | 7236.00            | 53.78                      | 30.33                 | 6.32                  | 24.55                     | 54.32                         | 74.00              | -19.68         | PK                   |
| H                   | 7236.00            | 43.89                      | 30.33                 | 6.32                  | 24.55                     | 44.43                         | 54.00              | -9.57          | AV                   |
| H                   | 9648.00            | 53.97                      | 30.85                 | 7.45                  | 24.69                     | 55.26                         | 74.00              | -18.74         | PK                   |
| H                   | 9648.00            | 43.25                      | 30.85                 | 7.45                  | 24.69                     | 44.54                         | 54.00              | -9.46          | AV                   |
| H                   | 12060.00           | 50.44                      | 31.02                 | 8.99                  | 25.57                     | 53.98                         | 74.00              | -20.02         | PK                   |
| H                   | 12060.00           | 43.29                      | 31.02                 | 8.99                  | 25.57                     | 46.83                         | 54.00              | -7.17          | AV                   |

| Polar<br>(H/V)         | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Detect<br>or<br>Type |
|------------------------|--------------------|----------------------------|-----------------------|-----------------------|---------------------------|-------------------------------|--------------------|----------------|----------------------|
| Middle Channel:2437MHz |                    |                            |                       |                       |                           |                               |                    |                |                      |
| V                      | 4874.00            | 51.71                      | 30.55                 | 5.77                  | 24.66                     | 51.59                         | 74.00              | -22.41         | PK                   |
| V                      | 4874.00            | 43.05                      | 30.55                 | 5.77                  | 24.66                     | 42.93                         | 54.00              | -11.07         | AV                   |
| V                      | 7311.00            | 50.68                      | 30.33                 | 6.32                  | 24.55                     | 51.22                         | 74.00              | -22.78         | PK                   |
| V                      | 7311.00            | 43.61                      | 30.33                 | 6.32                  | 24.55                     | 44.15                         | 54.00              | -9.85          | AV                   |
| V                      | 9748.00            | 54.08                      | 30.85                 | 7.45                  | 24.69                     | 55.37                         | 74.00              | -18.63         | PK                   |
| V                      | 9748.00            | 43.14                      | 30.85                 | 7.45                  | 24.69                     | 44.43                         | 54.00              | -9.57          | AV                   |
| V                      | 12185.00           | 50.03                      | 31.02                 | 8.99                  | 25.57                     | 53.57                         | 74.00              | -20.43         | PK                   |
| V                      | 12185.00           | 43.29                      | 31.02                 | 8.99                  | 25.57                     | 46.83                         | 54.00              | -7.17          | AV                   |
| H                      | 4874.00            | 52.89                      | 30.55                 | 5.77                  | 24.66                     | 52.77                         | 74.00              | -21.23         | PK                   |
| H                      | 4874.00            | 43.39                      | 30.55                 | 5.77                  | 24.66                     | 43.27                         | 54.00              | -10.73         | AV                   |
| H                      | 7311.00            | 51.95                      | 30.33                 | 6.32                  | 24.55                     | 52.49                         | 74.00              | -21.51         | PK                   |
| H                      | 7311.00            | 43.92                      | 30.33                 | 6.32                  | 24.55                     | 44.46                         | 54.00              | -9.54          | AV                   |
| H                      | 9748.00            | 53.55                      | 30.85                 | 7.45                  | 24.69                     | 54.84                         | 74.00              | -19.16         | PK                   |
| H                      | 9748.00            | 43.36                      | 30.85                 | 7.45                  | 24.69                     | 44.65                         | 54.00              | -9.35          | AV                   |
| H                      | 12185.00           | 53.64                      | 31.02                 | 8.99                  | 25.57                     | 57.18                         | 74.00              | -16.82         | PK                   |
| H                      | 12185.00           | 43.19                      | 31.02                 | 8.99                  | 25.57                     | 46.73                         | 54.00              | -7.27          | AV                   |



| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits       | Margin | Detect<br>or<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|--------------|--------|----------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/<br>m) | (dB)   |                      |
| High Channel:2462MHz |           |                  |                   |               |                   |                   |              |        |                      |
| V                    | 4924.00   | 52.51            | 30.55             | 5.77          | 24.66             | 52.39             | 74.00        | -21.61 | PK                   |
| V                    | 4924.00   | 43.53            | 30.55             | 5.77          | 24.66             | 43.41             | 54.00        | -10.59 | AV                   |
| V                    | 7386.00   | 54.07            | 30.33             | 6.32          | 24.55             | 54.61             | 74.00        | -19.39 | PK                   |
| V                    | 7386.00   | 43.60            | 30.33             | 6.32          | 24.55             | 44.14             | 54.00        | -9.86  | AV                   |
| V                    | 9848.00   | 50.17            | 30.85             | 7.45          | 24.69             | 51.46             | 74.00        | -22.54 | PK                   |
| V                    | 9848.00   | 43.14            | 30.85             | 7.45          | 24.69             | 44.43             | 54.00        | -9.57  | AV                   |
| V                    | 12310.00  | 52.10            | 31.02             | 8.99          | 25.57             | 55.64             | 74.00        | -18.36 | PK                   |
| V                    | 12310.00  | 43.32            | 31.02             | 8.99          | 25.57             | 46.86             | 54.00        | -7.14  | AV                   |
| H                    | 4924.00   | 54.42            | 30.55             | 5.77          | 24.66             | 54.30             | 74.00        | -19.70 | PK                   |
| H                    | 4924.00   | 43.43            | 30.55             | 5.77          | 24.66             | 43.31             | 54.00        | -10.69 | AV                   |
| H                    | 7386.00   | 50.66            | 30.33             | 6.32          | 24.55             | 51.20             | 74.00        | -22.80 | PK                   |
| H                    | 7386.00   | 43.18            | 30.33             | 6.32          | 24.55             | 43.72             | 54.00        | -10.28 | AV                   |
| H                    | 9848.00   | 51.20            | 30.85             | 7.45          | 24.69             | 52.49             | 74.00        | -21.51 | PK                   |
| H                    | 9848.00   | 43.39            | 30.85             | 7.45          | 24.69             | 44.68             | 54.00        | -9.32  | AV                   |
| H                    | 12310.00  | 50.21            | 31.02             | 8.99          | 25.57             | 53.75             | 74.00        | -20.25 | PK                   |
| H                    | 12310.00  | 43.03            | 31.02             | 8.99          | 25.57             | 46.57             | 54.00        | -7.43  | AV                   |

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11n20

| Polar<br>(H/V)      | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampl<br>ifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/<br>m) | Margin<br>(dB) | Detect<br>or<br>Type |
|---------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|------------------------|----------------|----------------------|
| Low Channel:2412MHz |                    |                            |                           |                       |                           |                               |                        |                |                      |
| V                   | 4824.00            | 50.02                      | 30.55                     | 5.77                  | 24.66                     | 49.90                         | 74.00                  | -24.10         | PK                   |
| V                   | 4824.00            | 43.46                      | 30.55                     | 5.77                  | 24.66                     | 43.34                         | 54.00                  | -10.66         | AV                   |
| V                   | 7236.00            | 52.11                      | 30.33                     | 6.32                  | 24.55                     | 52.65                         | 74.00                  | -21.35         | PK                   |
| V                   | 7236.00            | 43.88                      | 30.33                     | 6.32                  | 24.55                     | 44.42                         | 54.00                  | -9.58          | AV                   |
| V                   | 9648.00            | 52.29                      | 30.85                     | 7.45                  | 24.69                     | 53.58                         | 74.00                  | -20.42         | PK                   |
| V                   | 9648.00            | 43.67                      | 30.85                     | 7.45                  | 24.69                     | 44.96                         | 54.00                  | -9.04          | AV                   |
| V                   | 12060.00           | 51.32                      | 31.02                     | 8.99                  | 25.57                     | 54.86                         | 74.00                  | -19.14         | PK                   |
| V                   | 12060.00           | 43.17                      | 31.02                     | 8.99                  | 25.57                     | 46.71                         | 54.00                  | -7.29          | AV                   |
| H                   | 4824.00            | 54.42                      | 30.55                     | 5.77                  | 24.66                     | 54.30                         | 74.00                  | -19.70         | PK                   |
| H                   | 4824.00            | 43.79                      | 30.55                     | 5.77                  | 24.66                     | 43.67                         | 54.00                  | -10.33         | AV                   |
| H                   | 7236.00            | 51.78                      | 30.33                     | 6.32                  | 24.55                     | 52.32                         | 74.00                  | -21.68         | PK                   |
| H                   | 7236.00            | 43.34                      | 30.33                     | 6.32                  | 24.55                     | 43.88                         | 54.00                  | -10.12         | AV                   |
| H                   | 9648.00            | 53.95                      | 30.85                     | 7.45                  | 24.69                     | 55.24                         | 74.00                  | -18.76         | PK                   |
| H                   | 9648.00            | 43.51                      | 30.85                     | 7.45                  | 24.69                     | 44.80                         | 54.00                  | -9.20          | AV                   |
| H                   | 12060.00           | 50.45                      | 31.02                     | 8.99                  | 25.57                     | 53.99                         | 74.00                  | -20.01         | PK                   |
| H                   | 12060.00           | 43.71                      | 31.02                     | 8.99                  | 25.57                     | 47.25                         | 54.00                  | -6.75          | AV                   |

| Polar<br>(H/V)         | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampl<br>ifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/<br>m) | Margin<br>(dB) | Detect<br>or<br>Type |
|------------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|------------------------|----------------|----------------------|
| Middle Channel:2437MHz |                    |                            |                           |                       |                           |                               |                        |                |                      |
| V                      | 4874.00            | 50.94                      | 30.55                     | 5.77                  | 24.66                     | 50.82                         | 74.00                  | -23.18         | PK                   |
| V                      | 4874.00            | 43.14                      | 30.55                     | 5.77                  | 24.66                     | 43.02                         | 54.00                  | -10.98         | AV                   |
| V                      | 7311.00            | 50.84                      | 30.33                     | 6.32                  | 24.55                     | 51.38                         | 74.00                  | -22.62         | PK                   |
| V                      | 7311.00            | 43.50                      | 30.33                     | 6.32                  | 24.55                     | 44.04                         | 54.00                  | -9.96          | AV                   |
| V                      | 9748.00            | 53.56                      | 30.85                     | 7.45                  | 24.69                     | 54.85                         | 74.00                  | -19.15         | PK                   |
| V                      | 9748.00            | 43.49                      | 30.85                     | 7.45                  | 24.69                     | 44.78                         | 54.00                  | -9.22          | AV                   |
| V                      | 12185.00           | 52.52                      | 31.02                     | 8.99                  | 25.57                     | 56.06                         | 74.00                  | -17.94         | PK                   |
| V                      | 12185.00           | 43.02                      | 31.02                     | 8.99                  | 25.57                     | 46.56                         | 54.00                  | -7.44          | AV                   |
| H                      | 4874.00            | 53.62                      | 30.55                     | 5.77                  | 24.66                     | 53.50                         | 74.00                  | -20.50         | PK                   |
| H                      | 4874.00            | 43.72                      | 30.55                     | 5.77                  | 24.66                     | 43.60                         | 54.00                  | -10.40         | AV                   |
| H                      | 7311.00            | 53.52                      | 30.33                     | 6.32                  | 24.55                     | 54.06                         | 74.00                  | -19.94         | PK                   |
| H                      | 7311.00            | 43.79                      | 30.33                     | 6.32                  | 24.55                     | 44.33                         | 54.00                  | -9.67          | AV                   |
| H                      | 9748.00            | 54.55                      | 30.85                     | 7.45                  | 24.69                     | 55.84                         | 74.00                  | -18.16         | PK                   |
| H                      | 9748.00            | 43.53                      | 30.85                     | 7.45                  | 24.69                     | 44.82                         | 54.00                  | -9.18          | AV                   |
| H                      | 12185.00           | 51.18                      | 31.02                     | 8.99                  | 25.57                     | 54.72                         | 74.00                  | -19.28         | PK                   |
| H                      | 12185.00           | 43.78                      | 31.02                     | 8.99                  | 25.57                     | 47.32                         | 54.00                  | -6.68          | AV                   |



| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-ampl<br>ifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits       | Margin | Detect<br>or<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|--------------|--------|----------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/<br>m) | (dB)   |                      |
| High Channel:2462MHz |           |                  |                   |               |                   |                   |              |        |                      |
| V                    | 4924.00   | 51.05            | 30.55             | 5.77          | 24.66             | 50.93             | 74.00        | -23.07 | PK                   |
| V                    | 4924.00   | 43.79            | 30.55             | 5.77          | 24.66             | 43.67             | 54.00        | -10.33 | AV                   |
| V                    | 7386.00   | 54.13            | 30.33             | 6.32          | 24.55             | 54.67             | 74.00        | -19.33 | PK                   |
| V                    | 7386.00   | 43.62            | 30.33             | 6.32          | 24.55             | 44.16             | 54.00        | -9.84  | AV                   |
| V                    | 9848.00   | 50.45            | 30.85             | 7.45          | 24.69             | 51.74             | 74.00        | -22.26 | PK                   |
| V                    | 9848.00   | 43.68            | 30.85             | 7.45          | 24.69             | 44.97             | 54.00        | -9.03  | AV                   |
| V                    | 12310.00  | 51.50            | 31.02             | 8.99          | 25.57             | 55.04             | 74.00        | -18.96 | PK                   |
| V                    | 12310.00  | 43.94            | 31.02             | 8.99          | 25.57             | 47.48             | 54.00        | -6.52  | AV                   |
| H                    | 4924.00   | 51.11            | 30.55             | 5.77          | 24.66             | 50.99             | 74.00        | -23.01 | PK                   |
| H                    | 4924.00   | 43.55            | 30.55             | 5.77          | 24.66             | 43.43             | 54.00        | -10.57 | AV                   |
| H                    | 7386.00   | 51.05            | 30.33             | 6.32          | 24.55             | 51.59             | 74.00        | -22.41 | PK                   |
| H                    | 7386.00   | 43.88            | 30.33             | 6.32          | 24.55             | 44.42             | 54.00        | -9.58  | AV                   |
| H                    | 9848.00   | 50.80            | 30.85             | 7.45          | 24.69             | 52.09             | 74.00        | -21.91 | PK                   |
| H                    | 9848.00   | 43.52            | 30.85             | 7.45          | 24.69             | 44.81             | 54.00        | -9.19  | AV                   |
| H                    | 12310.00  | 52.85            | 31.02             | 8.99          | 25.57             | 56.39             | 74.00        | -17.61 | PK                   |
| H                    | 12310.00  | 43.53            | 31.02             | 8.99          | 25.57             | 47.07             | 54.00        | -6.93  | AV                   |

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11n40

| Polar<br>(H/V)      | Frequenc<br>y | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits       | Margin | Detect<br>or<br>Type |
|---------------------|---------------|------------------|-------------------|---------------|-------------------|-------------------|--------------|--------|----------------------|
|                     | (MHz)         | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/<br>m) | (dB)   |                      |
| Low Channel:2422MHz |               |                  |                   |               |                   |                   |              |        |                      |
| V                   | 4844.00       | 52.69            | 30.55             | 5.77          | 24.66             | 52.57             | 74.00        | -21.43 | PK                   |
| V                   | 4844.00       | 43.36            | 30.55             | 5.77          | 24.66             | 43.24             | 54.00        | -10.76 | AV                   |
| V                   | 7266.00       | 53.61            | 30.33             | 6.32          | 24.55             | 54.15             | 74.00        | -19.85 | PK                   |
| V                   | 7266.00       | 43.54            | 30.33             | 6.32          | 24.55             | 44.08             | 54.00        | -9.92  | AV                   |
| V                   | 9688.00       | 51.34            | 30.85             | 7.45          | 24.69             | 52.63             | 74.00        | -21.37 | PK                   |
| V                   | 9688.00       | 43.81            | 30.85             | 7.45          | 24.69             | 45.10             | 54.00        | -8.90  | AV                   |
| V                   | 12110.00      | 51.79            | 31.02             | 8.99          | 25.57             | 55.33             | 74.00        | -18.67 | PK                   |
| V                   | 12110.00      | 43.82            | 31.02             | 8.99          | 25.57             | 47.36             | 54.00        | -6.64  | AV                   |
| H                   | 4844.00       | 53.15            | 30.55             | 5.77          | 24.66             | 53.03             | 74.00        | -20.97 | PK                   |
| H                   | 4844.00       | 43.06            | 30.55             | 5.77          | 24.66             | 42.94             | 54.00        | -11.06 | AV                   |
| H                   | 7266.00       | 51.15            | 30.33             | 6.32          | 24.55             | 51.69             | 74.00        | -22.31 | PK                   |
| H                   | 7266.00       | 43.11            | 30.33             | 6.32          | 24.55             | 43.65             | 54.00        | -10.35 | AV                   |
| H                   | 9688.00       | 51.14            | 30.85             | 7.45          | 24.69             | 52.43             | 74.00        | -21.57 | PK                   |
| H                   | 9688.00       | 43.23            | 30.85             | 7.45          | 24.69             | 44.52             | 54.00        | -9.48  | AV                   |
| H                   | 12110.00      | 52.64            | 31.02             | 8.99          | 25.57             | 56.18             | 74.00        | -17.82 | PK                   |
| H                   | 12110.00      | 43.69            | 31.02             | 8.99          | 25.57             | 47.23             | 54.00        | -6.77  | AV                   |

| Polar<br>(H/V)         | Frequenc<br>y | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits       | Margin | Detect<br>or<br>Type |
|------------------------|---------------|------------------|-------------------|---------------|-------------------|-------------------|--------------|--------|----------------------|
|                        | (MHz)         | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/<br>m) | (dB)   |                      |
| Middle Channel:2437MHz |               |                  |                   |               |                   |                   |              |        |                      |
| V                      | 4874.00       | 50.43            | 30.55             | 5.77          | 24.66             | 50.31             | 74.00        | -23.69 | PK                   |
| V                      | 4874.00       | 43.64            | 30.55             | 5.77          | 24.66             | 43.52             | 54.00        | -10.48 | AV                   |
| V                      | 7311.00       | 53.52            | 30.33             | 6.32          | 24.55             | 54.06             | 74.00        | -19.94 | PK                   |
| V                      | 7311.00       | 43.31            | 30.33             | 6.32          | 24.55             | 43.85             | 54.00        | -10.15 | AV                   |
| V                      | 9748.00       | 52.12            | 30.85             | 7.45          | 24.69             | 53.41             | 74.00        | -20.59 | PK                   |
| V                      | 9748.00       | 43.14            | 30.85             | 7.45          | 24.69             | 44.43             | 54.00        | -9.57  | AV                   |
| V                      | 12185.00      | 54.90            | 31.02             | 8.99          | 25.57             | 58.44             | 74.00        | -15.56 | PK                   |
| V                      | 12185.00      | 43.56            | 31.02             | 8.99          | 25.57             | 47.10             | 54.00        | -6.90  | AV                   |
| H                      | 4874.00       | 51.73            | 30.55             | 5.77          | 24.66             | 51.61             | 74.00        | -22.39 | PK                   |
| H                      | 4874.00       | 43.30            | 30.55             | 5.77          | 24.66             | 43.18             | 54.00        | -10.82 | AV                   |
| H                      | 7311.00       | 52.60            | 30.33             | 6.32          | 24.55             | 53.14             | 74.00        | -20.86 | PK                   |
| H                      | 7311.00       | 43.94            | 30.33             | 6.32          | 24.55             | 44.48             | 54.00        | -9.52  | AV                   |
| H                      | 9748.00       | 54.87            | 30.85             | 7.45          | 24.69             | 56.16             | 74.00        | -17.84 | PK                   |
| H                      | 9748.00       | 43.95            | 30.85             | 7.45          | 24.69             | 45.24             | 54.00        | -8.76  | AV                   |
| H                      | 12185.00      | 53.27            | 31.02             | 8.99          | 25.57             | 56.81             | 74.00        | -17.19 | PK                   |
| H                      | 12185.00      | 43.26            | 31.02             | 8.99          | 25.57             | 46.80             | 54.00        | -7.20  | AV                   |



| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-amp<br>lifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits       | Margin | Detect<br>or<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|--------------|--------|----------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/<br>m) | (dB)   |                      |
| High Channel:2452MHz |           |                  |                   |               |                   |                   |              |        |                      |
| V                    | 4904.00   | 52.16            | 30.55             | 5.77          | 24.66             | 52.04             | 74.00        | -21.96 | PK                   |
| V                    | 4904.00   | 43.06            | 30.55             | 5.77          | 24.66             | 42.94             | 54.00        | -11.06 | AV                   |
| V                    | 7356.00   | 53.18            | 30.33             | 6.32          | 24.55             | 53.72             | 74.00        | -20.28 | PK                   |
| V                    | 7356.00   | 43.04            | 30.33             | 6.32          | 24.55             | 43.58             | 54.00        | -10.42 | AV                   |
| V                    | 9808.00   | 51.49            | 30.85             | 7.45          | 24.69             | 52.78             | 74.00        | -21.22 | PK                   |
| V                    | 9808.00   | 43.42            | 30.85             | 7.45          | 24.69             | 44.71             | 54.00        | -9.29  | AV                   |
| V                    | 12260.00  | 52.79            | 31.02             | 8.99          | 25.57             | 56.33             | 74.00        | -17.67 | PK                   |
| V                    | 12260.00  | 43.15            | 31.02             | 8.99          | 25.57             | 46.69             | 54.00        | -7.31  | AV                   |
| H                    | 4904.00   | 51.77            | 30.55             | 5.77          | 24.66             | 51.65             | 74.00        | -22.35 | PK                   |
| H                    | 4904.00   | 43.22            | 30.55             | 5.77          | 24.66             | 43.10             | 54.00        | -10.90 | AV                   |
| H                    | 7356.00   | 53.38            | 30.33             | 6.32          | 24.55             | 53.92             | 74.00        | -20.08 | PK                   |
| H                    | 7356.00   | 43.56            | 30.33             | 6.32          | 24.55             | 44.10             | 54.00        | -9.90  | AV                   |
| H                    | 9808.00   | 51.61            | 30.85             | 7.45          | 24.69             | 52.90             | 74.00        | -21.10 | PK                   |
| H                    | 9808.00   | 43.68            | 30.85             | 7.45          | 24.69             | 44.97             | 54.00        | -9.03  | AV                   |
| H                    | 12260.00  | 52.51            | 31.02             | 8.99          | 25.57             | 56.05             | 74.00        | -17.95 | PK                   |
| H                    | 12260.00  | 43.78            | 31.02             | 8.99          | 25.57             | 47.32             | 54.00        | -6.68  | AV                   |

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11ax20

| Polar<br>(H/V)      | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampl<br>ifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/<br>m) | Margin<br>(dB) | Detect<br>or<br>Type |
|---------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|------------------------|----------------|----------------------|
| Low Channel:2412MHz |                    |                            |                           |                       |                           |                               |                        |                |                      |
| V                   | 4824.00            | 53.61                      | 30.55                     | 5.77                  | 24.66                     | 53.49                         | 74.00                  | -20.51         | PK                   |
| V                   | 4824.00            | 43.74                      | 30.55                     | 5.77                  | 24.66                     | 43.62                         | 54.00                  | -10.38         | AV                   |
| V                   | 7236.00            | 53.48                      | 30.33                     | 6.32                  | 24.55                     | 54.02                         | 74.00                  | -19.98         | PK                   |
| V                   | 7236.00            | 43.65                      | 30.33                     | 6.32                  | 24.55                     | 44.19                         | 54.00                  | -9.81          | AV                   |
| V                   | 9648.00            | 54.83                      | 30.85                     | 7.45                  | 24.69                     | 56.12                         | 74.00                  | -17.88         | PK                   |
| V                   | 9648.00            | 43.25                      | 30.85                     | 7.45                  | 24.69                     | 44.54                         | 54.00                  | -9.46          | AV                   |
| V                   | 12060.00           | 50.69                      | 31.02                     | 8.99                  | 25.57                     | 54.23                         | 74.00                  | -19.77         | PK                   |
| V                   | 12060.00           | 43.20                      | 31.02                     | 8.99                  | 25.57                     | 46.74                         | 54.00                  | -7.26          | AV                   |
| H                   | 4824.00            | 53.43                      | 30.55                     | 5.77                  | 24.66                     | 53.31                         | 74.00                  | -20.69         | PK                   |
| H                   | 4824.00            | 43.18                      | 30.55                     | 5.77                  | 24.66                     | 43.06                         | 54.00                  | -10.94         | AV                   |
| H                   | 7236.00            | 54.93                      | 30.33                     | 6.32                  | 24.55                     | 55.47                         | 74.00                  | -18.53         | PK                   |
| H                   | 7236.00            | 43.96                      | 30.33                     | 6.32                  | 24.55                     | 44.50                         | 54.00                  | -9.50          | AV                   |
| H                   | 9648.00            | 53.93                      | 30.85                     | 7.45                  | 24.69                     | 55.22                         | 74.00                  | -18.78         | PK                   |
| H                   | 9648.00            | 43.32                      | 30.85                     | 7.45                  | 24.69                     | 44.61                         | 54.00                  | -9.39          | AV                   |
| H                   | 12060.00           | 51.52                      | 31.02                     | 8.99                  | 25.57                     | 55.06                         | 74.00                  | -18.94         | PK                   |
| H                   | 12060.00           | 43.19                      | 31.02                     | 8.99                  | 25.57                     | 46.73                         | 54.00                  | -7.27          | AV                   |

| Polar<br>(H/V)         | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampl<br>ifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/<br>m) | Margin<br>(dB) | Detect<br>or<br>Type |
|------------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|------------------------|----------------|----------------------|
| Middle Channel:2437MHz |                    |                            |                           |                       |                           |                               |                        |                |                      |
| V                      | 4874.00            | 53.19                      | 30.55                     | 5.77                  | 24.66                     | 53.07                         | 74.00                  | -20.93         | PK                   |
| V                      | 4874.00            | 43.02                      | 30.55                     | 5.77                  | 24.66                     | 42.90                         | 54.00                  | -11.10         | AV                   |
| V                      | 7311.00            | 53.14                      | 30.33                     | 6.32                  | 24.55                     | 53.68                         | 74.00                  | -20.32         | PK                   |
| V                      | 7311.00            | 43.79                      | 30.33                     | 6.32                  | 24.55                     | 44.33                         | 54.00                  | -9.67          | AV                   |
| V                      | 9748.00            | 50.51                      | 30.85                     | 7.45                  | 24.69                     | 51.80                         | 74.00                  | -22.20         | PK                   |
| V                      | 9748.00            | 43.93                      | 30.85                     | 7.45                  | 24.69                     | 45.22                         | 54.00                  | -8.78          | AV                   |
| V                      | 12185.00           | 50.98                      | 31.02                     | 8.99                  | 25.57                     | 54.52                         | 74.00                  | -19.48         | PK                   |
| V                      | 12185.00           | 43.64                      | 31.02                     | 8.99                  | 25.57                     | 47.18                         | 54.00                  | -6.82          | AV                   |
| H                      | 4874.00            | 51.71                      | 30.55                     | 5.77                  | 24.66                     | 51.59                         | 74.00                  | -22.41         | PK                   |
| H                      | 4874.00            | 43.80                      | 30.55                     | 5.77                  | 24.66                     | 43.68                         | 54.00                  | -10.32         | AV                   |
| H                      | 7311.00            | 53.65                      | 30.33                     | 6.32                  | 24.55                     | 54.19                         | 74.00                  | -19.81         | PK                   |
| H                      | 7311.00            | 43.69                      | 30.33                     | 6.32                  | 24.55                     | 44.23                         | 54.00                  | -9.77          | AV                   |
| H                      | 9748.00            | 52.99                      | 30.85                     | 7.45                  | 24.69                     | 54.28                         | 74.00                  | -19.72         | PK                   |
| H                      | 9748.00            | 44.00                      | 30.85                     | 7.45                  | 24.69                     | 45.29                         | 54.00                  | -8.71          | AV                   |
| H                      | 12185.00           | 52.93                      | 31.02                     | 8.99                  | 25.57                     | 56.47                         | 74.00                  | -17.53         | PK                   |
| H                      | 12185.00           | 43.29                      | 31.02                     | 8.99                  | 25.57                     | 46.83                         | 54.00                  | -7.17          | AV                   |



| Polar<br>(H/V)       | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-ampl<br>ifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/<br>m) | Margin<br>(dB) | Detect<br>or<br>Type |
|----------------------|--------------------|----------------------------|---------------------------|-----------------------|---------------------------|-------------------------------|------------------------|----------------|----------------------|
| High Channel:2462MHz |                    |                            |                           |                       |                           |                               |                        |                |                      |
| V                    | 4924.00            | 53.24                      | 30.55                     | 5.77                  | 24.66                     | 53.12                         | 74.00                  | -20.88         | PK                   |
| V                    | 4924.00            | 43.50                      | 30.55                     | 5.77                  | 24.66                     | 43.38                         | 54.00                  | -10.62         | AV                   |
| V                    | 7386.00            | 52.67                      | 30.33                     | 6.32                  | 24.55                     | 53.21                         | 74.00                  | -20.79         | PK                   |
| V                    | 7386.00            | 43.44                      | 30.33                     | 6.32                  | 24.55                     | 43.98                         | 54.00                  | -10.02         | AV                   |
| V                    | 9848.00            | 53.95                      | 30.85                     | 7.45                  | 24.69                     | 55.24                         | 74.00                  | -18.76         | PK                   |
| V                    | 9848.00            | 43.10                      | 30.85                     | 7.45                  | 24.69                     | 44.39                         | 54.00                  | -9.61          | AV                   |
| V                    | 12310.00           | 50.93                      | 31.02                     | 8.99                  | 25.57                     | 54.47                         | 74.00                  | -19.53         | PK                   |
| V                    | 12310.00           | 43.89                      | 31.02                     | 8.99                  | 25.57                     | 47.43                         | 54.00                  | -6.57          | AV                   |
| H                    | 4924.00            | 53.69                      | 30.55                     | 5.77                  | 24.66                     | 53.57                         | 74.00                  | -20.43         | PK                   |
| H                    | 4924.00            | 43.99                      | 30.55                     | 5.77                  | 24.66                     | 43.87                         | 54.00                  | -10.13         | AV                   |
| H                    | 7386.00            | 50.79                      | 30.33                     | 6.32                  | 24.55                     | 51.33                         | 74.00                  | -22.67         | PK                   |
| H                    | 7386.00            | 43.10                      | 30.33                     | 6.32                  | 24.55                     | 43.64                         | 54.00                  | -10.36         | AV                   |
| H                    | 9848.00            | 52.07                      | 30.85                     | 7.45                  | 24.69                     | 53.36                         | 74.00                  | -20.64         | PK                   |
| H                    | 9848.00            | 43.73                      | 30.85                     | 7.45                  | 24.69                     | 45.02                         | 54.00                  | -8.98          | AV                   |
| H                    | 12310.00           | 52.25                      | 31.02                     | 8.99                  | 25.57                     | 55.79                         | 74.00                  | -18.21         | PK                   |
| H                    | 12310.00           | 43.96                      | 31.02                     | 8.99                  | 25.57                     | 47.50                         | 54.00                  | -6.50          | AV                   |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11ax40

| Polar<br>(H/V)      | Frequenc<br>y | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits       | Margin | Detect<br>or<br>Type |
|---------------------|---------------|------------------|-------------------|---------------|-------------------|-------------------|--------------|--------|----------------------|
|                     | (MHz)         | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/<br>m) | (dB)   |                      |
| Low Channel:2422MHz |               |                  |                   |               |                   |                   |              |        |                      |
| V                   | 4844.00       | 52.74            | 30.55             | 5.77          | 24.66             | 52.62             | 74.00        | -21.38 | PK                   |
| V                   | 4844.00       | 43.39            | 30.55             | 5.77          | 24.66             | 43.27             | 54.00        | -10.73 | AV                   |
| V                   | 7266.00       | 52.00            | 30.33             | 6.32          | 24.55             | 52.54             | 74.00        | -21.46 | PK                   |
| V                   | 7266.00       | 43.77            | 30.33             | 6.32          | 24.55             | 44.31             | 54.00        | -9.69  | AV                   |
| V                   | 9688.00       | 52.01            | 30.85             | 7.45          | 24.69             | 53.30             | 74.00        | -20.70 | PK                   |
| V                   | 9688.00       | 43.35            | 30.85             | 7.45          | 24.69             | 44.64             | 54.00        | -9.36  | AV                   |
| V                   | 12110.00      | 53.03            | 31.02             | 8.99          | 25.57             | 56.57             | 74.00        | -17.43 | PK                   |
| V                   | 12110.00      | 43.26            | 31.02             | 8.99          | 25.57             | 46.80             | 54.00        | -7.20  | AV                   |
| H                   | 4844.00       | 52.86            | 30.55             | 5.77          | 24.66             | 52.74             | 74.00        | -21.26 | PK                   |
| H                   | 4844.00       | 43.62            | 30.55             | 5.77          | 24.66             | 43.50             | 54.00        | -10.50 | AV                   |
| H                   | 7266.00       | 52.95            | 30.33             | 6.32          | 24.55             | 53.49             | 74.00        | -20.51 | PK                   |
| H                   | 7266.00       | 43.79            | 30.33             | 6.32          | 24.55             | 44.33             | 54.00        | -9.67  | AV                   |
| H                   | 9688.00       | 50.07            | 30.85             | 7.45          | 24.69             | 51.36             | 74.00        | -22.64 | PK                   |
| H                   | 9688.00       | 43.90            | 30.85             | 7.45          | 24.69             | 45.19             | 54.00        | -8.81  | AV                   |
| H                   | 12110.00      | 53.54            | 31.02             | 8.99          | 25.57             | 57.08             | 74.00        | -16.92 | PK                   |
| H                   | 12110.00      | 43.61            | 31.02             | 8.99          | 25.57             | 47.15             | 54.00        | -6.85  | AV                   |

| Polar<br>(H/V)         | Frequenc<br>y | Meter<br>Reading | Pre-ampli<br>fier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits       | Margin | Detect<br>or<br>Type |
|------------------------|---------------|------------------|-------------------|---------------|-------------------|-------------------|--------------|--------|----------------------|
|                        | (MHz)         | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/<br>m) | (dB)   |                      |
| Middle Channel:2437MHz |               |                  |                   |               |                   |                   |              |        |                      |
| V                      | 4874.00       | 53.83            | 30.55             | 5.77          | 24.66             | 53.71             | 74.00        | -20.29 | PK                   |
| V                      | 4874.00       | 43.14            | 30.55             | 5.77          | 24.66             | 43.02             | 54.00        | -10.98 | AV                   |
| V                      | 7311.00       | 53.36            | 30.33             | 6.32          | 24.55             | 53.90             | 74.00        | -20.10 | PK                   |
| V                      | 7311.00       | 43.78            | 30.33             | 6.32          | 24.55             | 44.32             | 54.00        | -9.68  | AV                   |
| V                      | 9748.00       | 52.69            | 30.85             | 7.45          | 24.69             | 53.98             | 74.00        | -20.02 | PK                   |
| V                      | 9748.00       | 43.39            | 30.85             | 7.45          | 24.69             | 44.68             | 54.00        | -9.32  | AV                   |
| V                      | 12185.00      | 51.75            | 31.02             | 8.99          | 25.57             | 55.29             | 74.00        | -18.71 | PK                   |
| V                      | 12185.00      | 43.34            | 31.02             | 8.99          | 25.57             | 46.88             | 54.00        | -7.12  | AV                   |
| H                      | 4874.00       | 54.71            | 30.55             | 5.77          | 24.66             | 54.59             | 74.00        | -19.41 | PK                   |
| H                      | 4874.00       | 43.64            | 30.55             | 5.77          | 24.66             | 43.52             | 54.00        | -10.48 | AV                   |
| H                      | 7311.00       | 54.58            | 30.33             | 6.32          | 24.55             | 55.12             | 74.00        | -18.88 | PK                   |
| H                      | 7311.00       | 43.03            | 30.33             | 6.32          | 24.55             | 43.57             | 54.00        | -10.43 | AV                   |
| H                      | 9748.00       | 53.97            | 30.85             | 7.45          | 24.69             | 55.26             | 74.00        | -18.74 | PK                   |
| H                      | 9748.00       | 43.63            | 30.85             | 7.45          | 24.69             | 44.92             | 54.00        | -9.08  | AV                   |
| H                      | 12185.00      | 50.37            | 31.02             | 8.99          | 25.57             | 53.91             | 74.00        | -20.09 | PK                   |
| H                      | 12185.00      | 43.61            | 31.02             | 8.99          | 25.57             | 47.15             | 54.00        | -6.85  | AV                   |



| Polar<br>(H/V)       | Frequency | Meter<br>Reading | Pre-amp<br>lifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits       | Margin | Detect<br>or<br>Type |
|----------------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|--------------|--------|----------------------|
|                      | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB)              | (dBuV/m)          | (dBuV/<br>m) | (dB)   |                      |
| High Channel:2452MHz |           |                  |                   |               |                   |                   |              |        |                      |
| V                    | 4904.00   | 52.91            | 30.55             | 5.77          | 24.66             | 52.79             | 74.00        | -21.21 | PK                   |
| V                    | 4904.00   | 43.10            | 30.55             | 5.77          | 24.66             | 42.98             | 54.00        | -11.02 | AV                   |
| V                    | 7356.00   | 51.11            | 30.33             | 6.32          | 24.55             | 51.65             | 74.00        | -22.35 | PK                   |
| V                    | 7356.00   | 43.75            | 30.33             | 6.32          | 24.55             | 44.29             | 54.00        | -9.71  | AV                   |
| V                    | 9808.00   | 51.23            | 30.85             | 7.45          | 24.69             | 52.52             | 74.00        | -21.48 | PK                   |
| V                    | 9808.00   | 43.73            | 30.85             | 7.45          | 24.69             | 45.02             | 54.00        | -8.98  | AV                   |
| V                    | 12260.00  | 52.66            | 31.02             | 8.99          | 25.57             | 56.20             | 74.00        | -17.80 | PK                   |
| V                    | 12260.00  | 43.84            | 31.02             | 8.99          | 25.57             | 47.38             | 54.00        | -6.62  | AV                   |
| H                    | 4904.00   | 54.10            | 30.55             | 5.77          | 24.66             | 53.98             | 74.00        | -20.02 | PK                   |
| H                    | 4904.00   | 43.98            | 30.55             | 5.77          | 24.66             | 43.86             | 54.00        | -10.14 | AV                   |
| H                    | 7356.00   | 54.93            | 30.33             | 6.32          | 24.55             | 55.47             | 74.00        | -18.53 | PK                   |
| H                    | 7356.00   | 43.88            | 30.33             | 6.32          | 24.55             | 44.42             | 54.00        | -9.58  | AV                   |
| H                    | 9808.00   | 52.65            | 30.85             | 7.45          | 24.69             | 53.94             | 74.00        | -20.06 | PK                   |
| H                    | 9808.00   | 43.17            | 30.85             | 7.45          | 24.69             | 44.46             | 54.00        | -9.54  | AV                   |
| H                    | 12260.00  | 51.57            | 31.02             | 8.99          | 25.57             | 55.11             | 74.00        | -18.89 | PK                   |
| H                    | 12260.00  | 43.47            | 31.02             | 8.99          | 25.57             | 47.01             | 54.00        | -6.99  | AV                   |

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 5. RADIATED BAND EMISSION MEASUREMENT

### 5.1 TEST REQUIREMENT

|                       |                                                                                                    |          |      |      |         |
|-----------------------|----------------------------------------------------------------------------------------------------|----------|------|------|---------|
| Test Requirement:     | FCC Part15 C Section 15.209 and 15.205                                                             |          |      |      |         |
| Test Method:          | ANSI C63.10: 2013                                                                                  |          |      |      |         |
| Test Frequency Range: | All of the restrict bands were tested, only the worst band's (2390MHz to 2500MHz) data was showed. |          |      |      |         |
| Test site:            | Measurement Distance: 3m                                                                           |          |      |      |         |
| Receiver setup:       | Frequency                                                                                          | Detector | RBW  | VBW  | Value   |
|                       | Above                                                                                              | Peak     | 1MHz | 3MHz | Peak    |
|                       | 1GHz                                                                                               | Average  | 1MHz | 3MHz | Average |

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Class B (dBuV/m) (at 3M) |         |
|-----------------|--------------------------|---------|
|                 | PEAK                     | AVERAGE |
| Above 1000      | 74                       | 54      |

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### 5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the Highest channel

#### Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported




### 5.3 DEVIATION FROM TEST STANDARD

No deviation

### 5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

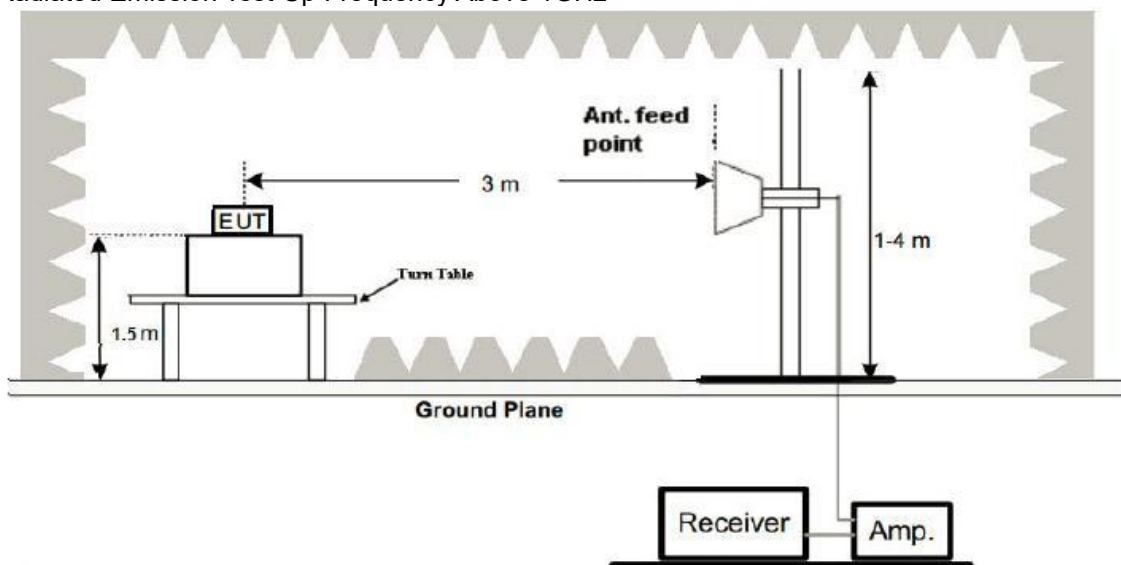

### 5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.4 Unless otherwise a special operating condition is specified in the follows during the testing.



## 5.6 TEST RESULT

|                                                                                                              | Polar<br>(H/V)       | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Dete<br>ctor<br>Type | Result |
|--------------------------------------------------------------------------------------------------------------|----------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|-------------------|----------------|----------------------|--------|
| 802.11b                                                                                                      | LowChannel 2412MHz   |                    |                            |                           |                       |                             |                               |                   |                |                      |        |
|                                                                                                              | H                    | 2390.00            | 53.28                      | 30.22                     | 4.85                  | 23.98                       | 51.89                         | 74.00             | -22.11         | PK                   | PASS   |
|                                                                                                              | H                    | 2390.00            | 44.82                      | 30.22                     | 4.85                  | 23.98                       | 43.43                         | 54.00             | -10.57         | AV                   | PASS   |
|                                                                                                              | H                    | 2400.00            | 53.59                      | 30.22                     | 4.85                  | 23.98                       | 52.20                         | 74.00             | -21.80         | PK                   | PASS   |
|                                                                                                              | H                    | 2400.00            | 44.75                      | 30.22                     | 4.85                  | 23.98                       | 43.36                         | 54.00             | -10.64         | AV                   | PASS   |
|                                                                                                              | V                    | 2390.00            | 54.10                      | 30.22                     | 4.85                  | 23.98                       | 52.71                         | 74.00             | -21.29         | PK                   | PASS   |
|                                                                                                              | V                    | 2390.00            | 44.33                      | 30.22                     | 4.85                  | 23.98                       | 42.94                         | 54.00             | -11.06         | AV                   | PASS   |
|                                                                                                              | V                    | 2400.00            | 53.42                      | 30.22                     | 4.85                  | 23.98                       | 52.03                         | 74.00             | -21.97         | PK                   | PASS   |
|                                                                                                              | V                    | 2400.00            | 44.52                      | 30.22                     | 4.85                  | 23.98                       | 43.13                         | 54.00             | -10.87         | AV                   | PASS   |
|                                                                                                              | HighChannel 2462MHz  |                    |                            |                           |                       |                             |                               |                   |                |                      |        |
|                                                                                                              | H                    | 2483.50            | 54.76                      | 30.22                     | 4.85                  | 23.98                       | 53.37                         | 74.00             | -20.63         | PK                   | PASS   |
|                                                                                                              | H                    | 2483.50            | 44.66                      | 30.22                     | 4.85                  | 23.98                       | 43.27                         | 54.00             | -10.73         | AV                   | PASS   |
|                                                                                                              | H                    | 2500.00            | 53.53                      | 30.22                     | 4.85                  | 23.98                       | 52.14                         | 74.00             | -21.86         | PK                   | PASS   |
|                                                                                                              | H                    | 2500.00            | 44.54                      | 30.22                     | 4.85                  | 23.98                       | 43.15                         | 54.00             | -10.85         | AV                   | PASS   |
|                                                                                                              | V                    | 2483.50            | 54.91                      | 30.22                     | 4.85                  | 23.98                       | 53.52                         | 74.00             | -20.48         | PK                   | PASS   |
|                                                                                                              | V                    | 2483.50            | 44.55                      | 30.22                     | 4.85                  | 23.98                       | 43.16                         | 54.00             | -10.84         | AV                   | PASS   |
|                                                                                                              | V                    | 2500.00            | 54.88                      | 30.22                     | 4.85                  | 23.98                       | 53.49                         | 74.00             | -20.51         | PK                   | PASS   |
|                                                                                                              | V                    | 2500.00            | 44.80                      | 30.22                     | 4.85                  | 23.98                       | 43.41                         | 54.00             | -10.59         | AV                   | PASS   |
| 802.11g                                                                                                      | LowChannel 2412MHz   |                    |                            |                           |                       |                             |                               |                   |                |                      |        |
|                                                                                                              | H                    | 2390.00            | 54.63                      | 30.22                     | 4.85                  | 23.98                       | 53.24                         | 74.00             | -20.76         | PK                   | PASS   |
|                                                                                                              | H                    | 2390.00            | 44.12                      | 30.22                     | 4.85                  | 23.98                       | 42.73                         | 54.00             | -11.27         | AV                   | PASS   |
|                                                                                                              | H                    | 2400.00            | 54.59                      | 30.22                     | 4.85                  | 23.98                       | 53.20                         | 74.00             | -20.80         | PK                   | PASS   |
|                                                                                                              | H                    | 2400.00            | 44.51                      | 30.22                     | 4.85                  | 23.98                       | 43.12                         | 54.00             | -10.88         | AV                   | PASS   |
|                                                                                                              | V                    | 2390.00            | 53.79                      | 30.22                     | 4.85                  | 23.98                       | 52.40                         | 74.00             | -21.60         | PK                   | PASS   |
|                                                                                                              | V                    | 2390.00            | 44.68                      | 30.22                     | 4.85                  | 23.98                       | 43.29                         | 54.00             | -10.71         | AV                   | PASS   |
|                                                                                                              | V                    | 2400.00            | 53.33                      | 30.22                     | 4.85                  | 23.98                       | 51.94                         | 74.00             | -22.06         | PK                   | PASS   |
|                                                                                                              | V                    | 2400.00            | 44.73                      | 30.22                     | 4.85                  | 23.98                       | 43.34                         | 54.00             | -10.66         | AV                   | PASS   |
|                                                                                                              | High Channel 2462MHz |                    |                            |                           |                       |                             |                               |                   |                |                      |        |
|                                                                                                              | H                    | 2483.50            | 53.27                      | 30.22                     | 4.85                  | 23.98                       | 51.88                         | 74.00             | -22.12         | PK                   | PASS   |
|                                                                                                              | H                    | 2483.50            | 44.00                      | 30.22                     | 4.85                  | 23.98                       | 42.61                         | 54.00             | -11.39         | AV                   | PASS   |
|                                                                                                              | H                    | 2500.00            | 53.06                      | 30.22                     | 4.85                  | 23.98                       | 51.67                         | 74.00             | -22.33         | PK                   | PASS   |
|                                                                                                              | H                    | 2500.00            | 44.93                      | 30.22                     | 4.85                  | 23.98                       | 43.54                         | 54.00             | -10.46         | AV                   | PASS   |
|                                                                                                              | V                    | 2483.50            | 53.52                      | 30.22                     | 4.85                  | 23.98                       | 52.13                         | 74.00             | -21.87         | PK                   | PASS   |
|                                                                                                              | V                    | 2483.50            | 44.92                      | 30.22                     | 4.85                  | 23.98                       | 43.53                         | 54.00             | -10.47         | AV                   | PASS   |
|                                                                                                              | V                    | 2500.00            | 54.39                      | 30.22                     | 4.85                  | 23.98                       | 53.00                         | 74.00             | -21.00         | PK                   | PASS   |
|                                                                                                              | V                    | 2500.00            | 44.46                      | 30.22                     | 4.85                  | 23.98                       | 43.07                         | 54.00             | -10.93         | AV                   | PASS   |
| <b>Remark:</b>                                                                                               |                      |                    |                            |                           |                       |                             |                               |                   |                |                      |        |
| Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit |                      |                    |                            |                           |                       |                             |                               |                   |                |                      |        |



|                                                                                                              | Polar<br>(H/V)       | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>level<br>(dBuV/m) | Limit<br>(dBu<br>V/m) | Margin<br>(dB) | Dete<br>ctor<br>Type | Result |
|--------------------------------------------------------------------------------------------------------------|----------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|-----------------------|----------------|----------------------|--------|
| 802.11<br>n20                                                                                                | LowChannel 2412MHz   |                    |                            |                           |                       |                             |                               |                       |                |                      |        |
|                                                                                                              | H                    | 2390.00            | 53.01                      | 30.22                     | 4.85                  | 23.98                       | 51.62                         | 74.00                 | -22.38         | PK                   | PASS   |
|                                                                                                              | H                    | 2390.00            | 44.12                      | 30.22                     | 4.85                  | 23.98                       | 42.73                         | 54.00                 | -11.27         | AV                   | PASS   |
|                                                                                                              | H                    | 2400.00            | 53.79                      | 30.22                     | 4.85                  | 23.98                       | 52.40                         | 74.00                 | -21.60         | PK                   | PASS   |
|                                                                                                              | H                    | 2400.00            | 44.00                      | 30.22                     | 4.85                  | 23.98                       | 42.61                         | 54.00                 | -11.39         | AV                   | PASS   |
|                                                                                                              | V                    | 2390.00            | 54.32                      | 30.22                     | 4.85                  | 23.98                       | 52.93                         | 74.00                 | -21.07         | PK                   | PASS   |
|                                                                                                              | V                    | 2390.00            | 44.28                      | 30.22                     | 4.85                  | 23.98                       | 42.89                         | 54.00                 | -11.11         | AV                   | PASS   |
|                                                                                                              | V                    | 2400.00            | 54.58                      | 30.22                     | 4.85                  | 23.98                       | 53.19                         | 74.00                 | -20.81         | PK                   | PASS   |
|                                                                                                              | V                    | 2400.00            | 44.68                      | 30.22                     | 4.85                  | 23.98                       | 43.29                         | 54.00                 | -10.71         | AV                   | PASS   |
|                                                                                                              | HighChannel 2462MHz  |                    |                            |                           |                       |                             |                               |                       |                |                      |        |
|                                                                                                              | H                    | 2483.50            | 53.15                      | 30.22                     | 4.85                  | 23.98                       | 51.76                         | 74.00                 | -22.24         | PK                   | PASS   |
|                                                                                                              | H                    | 2483.50            | 44.71                      | 30.22                     | 4.85                  | 23.98                       | 43.32                         | 54.00                 | -10.68         | AV                   | PASS   |
|                                                                                                              | H                    | 2500.00            | 53.42                      | 30.22                     | 4.85                  | 23.98                       | 52.03                         | 74.00                 | -21.97         | PK                   | PASS   |
|                                                                                                              | H                    | 2500.00            | 44.61                      | 30.22                     | 4.85                  | 23.98                       | 43.22                         | 54.00                 | -10.78         | AV                   | PASS   |
|                                                                                                              | V                    | 2483.50            | 54.56                      | 30.22                     | 4.85                  | 23.98                       | 53.17                         | 74.00                 | -20.83         | PK                   | PASS   |
|                                                                                                              | V                    | 2483.50            | 44.89                      | 30.22                     | 4.85                  | 23.98                       | 43.50                         | 54.00                 | -10.50         | AV                   | PASS   |
|                                                                                                              | V                    | 2500.00            | 54.32                      | 30.22                     | 4.85                  | 23.98                       | 52.93                         | 74.00                 | -21.07         | PK                   | PASS   |
|                                                                                                              | V                    | 2500.00            | 44.99                      | 30.22                     | 4.85                  | 23.98                       | 43.60                         | 54.00                 | -10.40         | AV                   | PASS   |
| 802.11<br>n40                                                                                                | LowChannel 2422MHz   |                    |                            |                           |                       |                             |                               |                       |                |                      |        |
|                                                                                                              | H                    | 2390.00            | 54.73                      | 30.22                     | 4.85                  | 23.98                       | 53.34                         | 74.00                 | -20.66         | PK                   | PASS   |
|                                                                                                              | H                    | 2390.00            | 44.17                      | 30.22                     | 4.85                  | 23.98                       | 42.78                         | 54.00                 | -11.22         | AV                   | PASS   |
|                                                                                                              | H                    | 2400.00            | 53.47                      | 30.22                     | 4.85                  | 23.98                       | 52.08                         | 74.00                 | -21.92         | PK                   | PASS   |
|                                                                                                              | H                    | 2400.00            | 44.42                      | 30.22                     | 4.85                  | 23.98                       | 43.03                         | 54.00                 | -10.97         | AV                   | PASS   |
|                                                                                                              | V                    | 2390.00            | 53.11                      | 30.22                     | 4.85                  | 23.98                       | 51.72                         | 74.00                 | -22.28         | PK                   | PASS   |
|                                                                                                              | V                    | 2390.00            | 44.53                      | 30.22                     | 4.85                  | 23.98                       | 43.14                         | 54.00                 | -10.86         | AV                   | PASS   |
|                                                                                                              | V                    | 2400.00            | 53.90                      | 30.22                     | 4.85                  | 23.98                       | 52.51                         | 74.00                 | -21.49         | PK                   | PASS   |
|                                                                                                              | V                    | 2400.00            | 44.56                      | 30.22                     | 4.85                  | 23.98                       | 43.17                         | 54.00                 | -10.83         | AV                   | PASS   |
|                                                                                                              | High Channel 2452MHz |                    |                            |                           |                       |                             |                               |                       |                |                      |        |
|                                                                                                              | H                    | 2483.50            | 53.70                      | 30.22                     | 4.85                  | 23.98                       | 52.31                         | 74.00                 | -21.69         | PK                   | PASS   |
|                                                                                                              | H                    | 2483.50            | 44.15                      | 30.22                     | 4.85                  | 23.98                       | 42.76                         | 54.00                 | -11.24         | AV                   | PASS   |
|                                                                                                              | H                    | 2500.00            | 53.05                      | 30.22                     | 4.85                  | 23.98                       | 51.66                         | 74.00                 | -22.34         | PK                   | PASS   |
|                                                                                                              | H                    | 2500.00            | 44.41                      | 30.22                     | 4.85                  | 23.98                       | 43.02                         | 54.00                 | -10.98         | AV                   | PASS   |
|                                                                                                              | V                    | 2483.50            | 53.19                      | 30.22                     | 4.85                  | 23.98                       | 51.80                         | 74.00                 | -22.20         | PK                   | PASS   |
|                                                                                                              | V                    | 2483.50            | 44.61                      | 30.22                     | 4.85                  | 23.98                       | 43.22                         | 54.00                 | -10.78         | AV                   | PASS   |
|                                                                                                              | V                    | 2500.00            | 54.67                      | 30.22                     | 4.85                  | 23.98                       | 53.28                         | 74.00                 | -20.72         | PK                   | PASS   |
|                                                                                                              | V                    | 2500.00            | 44.06                      | 30.22                     | 4.85                  | 23.98                       | 42.67                         | 54.00                 | -11.33         | AV                   | PASS   |
| <b>Remark:</b>                                                                                               |                      |                    |                            |                           |                       |                             |                               |                       |                |                      |        |
| Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit |                      |                    |                            |                           |                       |                             |                               |                       |                |                      |        |



|                | Polar<br>(H/V)       | Frequency<br>(MHz) | Meter<br>Reading<br>(dBuV) | Pre-<br>amplifier<br>(dB) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Emission<br>level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Dete<br>ctor<br>Type | Result |
|----------------|----------------------|--------------------|----------------------------|---------------------------|-----------------------|-----------------------------|-------------------------------|-------------------|----------------|----------------------|--------|
| 802.11<br>ax20 | LowChannel 2412MHz   |                    |                            |                           |                       |                             |                               |                   |                |                      |        |
|                | H                    | 2390.00            | 53.78                      | 30.22                     | 4.85                  | 23.98                       | 52.39                         | 74.00             | -21.61         | PK                   | PASS   |
|                | H                    | 2390.00            | 44.51                      | 30.22                     | 4.85                  | 23.98                       | 43.12                         | 54.00             | -10.88         | AV                   | PASS   |
|                | H                    | 2400.00            | 53.77                      | 30.22                     | 4.85                  | 23.98                       | 52.38                         | 74.00             | -21.62         | PK                   | PASS   |
|                | H                    | 2400.00            | 44.54                      | 30.22                     | 4.85                  | 23.98                       | 43.15                         | 54.00             | -10.85         | AV                   | PASS   |
|                | V                    | 2390.00            | 54.39                      | 30.22                     | 4.85                  | 23.98                       | 53.00                         | 74.00             | -21.00         | PK                   | PASS   |
|                | V                    | 2390.00            | 44.39                      | 30.22                     | 4.85                  | 23.98                       | 43.00                         | 54.00             | -11.00         | AV                   | PASS   |
|                | V                    | 2400.00            | 54.85                      | 30.22                     | 4.85                  | 23.98                       | 53.46                         | 74.00             | -20.54         | PK                   | PASS   |
|                | V                    | 2400.00            | 44.78                      | 30.22                     | 4.85                  | 23.98                       | 43.39                         | 54.00             | -10.61         | AV                   | PASS   |
|                | HighChannel 2462MHz  |                    |                            |                           |                       |                             |                               |                   |                |                      |        |
|                | H                    | 2483.50            | 54.16                      | 30.22                     | 4.85                  | 23.98                       | 52.77                         | 74.00             | -21.23         | PK                   | PASS   |
|                | H                    | 2483.50            | 44.28                      | 30.22                     | 4.85                  | 23.98                       | 42.89                         | 54.00             | -11.11         | AV                   | PASS   |
|                | H                    | 2500.00            | 54.53                      | 30.22                     | 4.85                  | 23.98                       | 53.14                         | 74.00             | -20.86         | PK                   | PASS   |
|                | H                    | 2500.00            | 44.67                      | 30.22                     | 4.85                  | 23.98                       | 43.28                         | 54.00             | -10.72         | AV                   | PASS   |
|                | V                    | 2483.50            | 53.90                      | 30.22                     | 4.85                  | 23.98                       | 52.51                         | 74.00             | -21.49         | PK                   | PASS   |
|                | V                    | 2483.50            | 44.90                      | 30.22                     | 4.85                  | 23.98                       | 43.51                         | 54.00             | -10.49         | AV                   | PASS   |
|                | V                    | 2500.00            | 54.73                      | 30.22                     | 4.85                  | 23.98                       | 53.34                         | 74.00             | -20.66         | PK                   | PASS   |
|                | V                    | 2500.00            | 44.07                      | 30.22                     | 4.85                  | 23.98                       | 42.68                         | 54.00             | -11.32         | AV                   | PASS   |
| 802.11<br>ax40 | LowChannel 2422MHz   |                    |                            |                           |                       |                             |                               |                   |                |                      |        |
|                | H                    | 2390.00            | 54.84                      | 30.22                     | 4.85                  | 23.98                       | 53.45                         | 74.00             | -20.55         | PK                   | PASS   |
|                | H                    | 2390.00            | 44.09                      | 30.22                     | 4.85                  | 23.98                       | 42.70                         | 54.00             | -11.30         | AV                   | PASS   |
|                | H                    | 2400.00            | 54.05                      | 30.22                     | 4.85                  | 23.98                       | 52.66                         | 74.00             | -21.34         | PK                   | PASS   |
|                | H                    | 2400.00            | 44.31                      | 30.22                     | 4.85                  | 23.98                       | 42.92                         | 54.00             | -11.08         | AV                   | PASS   |
|                | V                    | 2390.00            | 53.94                      | 30.22                     | 4.85                  | 23.98                       | 52.55                         | 74.00             | -21.45         | PK                   | PASS   |
|                | V                    | 2390.00            | 44.97                      | 30.22                     | 4.85                  | 23.98                       | 43.58                         | 54.00             | -10.42         | AV                   | PASS   |
|                | V                    | 2400.00            | 53.14                      | 30.22                     | 4.85                  | 23.98                       | 51.75                         | 74.00             | -22.25         | PK                   | PASS   |
|                | V                    | 2400.00            | 44.96                      | 30.22                     | 4.85                  | 23.98                       | 43.57                         | 54.00             | -10.43         | AV                   | PASS   |
|                | High Channel 2452MHz |                    |                            |                           |                       |                             |                               |                   |                |                      |        |
|                | H                    | 2483.50            | 54.25                      | 30.22                     | 4.85                  | 23.98                       | 52.86                         | 74.00             | -21.14         | PK                   | PASS   |
|                | H                    | 2483.50            | 44.45                      | 30.22                     | 4.85                  | 23.98                       | 43.06                         | 54.00             | -10.94         | AV                   | PASS   |
|                | H                    | 2500.00            | 53.92                      | 30.22                     | 4.85                  | 23.98                       | 52.53                         | 74.00             | -21.47         | PK                   | PASS   |
|                | H                    | 2500.00            | 44.52                      | 30.22                     | 4.85                  | 23.98                       | 43.13                         | 54.00             | -10.87         | AV                   | PASS   |
|                | V                    | 2483.50            | 54.95                      | 30.22                     | 4.85                  | 23.98                       | 53.56                         | 74.00             | -20.44         | PK                   | PASS   |
|                | V                    | 2483.50            | 44.46                      | 30.22                     | 4.85                  | 23.98                       | 43.07                         | 54.00             | -10.93         | AV                   | PASS   |
|                | V                    | 2500.00            | 53.17                      | 30.22                     | 4.85                  | 23.98                       | 51.78                         | 74.00             | -22.22         | PK                   | PASS   |
|                | V                    | 2500.00            | 44.11                      | 30.22                     | 4.85                  | 23.98                       | 42.72                         | 54.00             | -11.28         | AV                   | PASS   |

**Remark:**

Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit



## 6. POWER SPECTRAL DENSITY TEST

|                   |                                         |
|-------------------|-----------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (e)         |
| Test Method:      | KDB558074 D0115.247 Meas Guidancev05r02 |

### 6.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                        |           |                       |        |
|---------------------------------|------------------------|-----------|-----------------------|--------|
| Section                         | Test Item              | Limit     | Frequency Range (MHz) | Result |
| 15.247                          | Power Spectral Density | 8dBm/3kHz | 2400-2483.5           | PASS   |

### 6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 6.4 Unless otherwise a special operating condition is specified in the follows during the testing.




## 6.6 TEST RESULT

|               |        |                     |       |
|---------------|--------|---------------------|-------|
| Temperature : | 26℃    | Relative Humidity : | 54%   |
| Pressure :    | 101kPa | Test Voltage :      | DC 9V |


| Test Mode  | Frequency<br>(MHz) | Power Spectral Density<br>(dBm/3kHz) | Limit<br>(dBm/3kHz) | Result |
|------------|--------------------|--------------------------------------|---------------------|--------|
| 802.11b    | 2412               | -16.972                              | 8                   | PASS   |
|            | 2437               | -17.921                              | 8                   | PASS   |
|            | 2462               | -16.822                              | 8                   | PASS   |
| 802.11g    | 2412               | -18.227                              | 8                   | PASS   |
|            | 2437               | -18.429                              | 8                   | PASS   |
|            | 2462               | -17.991                              | 8                   | PASS   |
| 802.11n20  | 2412               | -18.493                              | 8                   | PASS   |
|            | 2437               | -18.669                              | 8                   | PASS   |
|            | 2462               | -18.541                              | 8                   | PASS   |
| 802.11n40  | 2422               | -21.973                              | 8                   | PASS   |
|            | 2437               | -21.884                              | 8                   | PASS   |
|            | 2452               | -20.374                              | 8                   | PASS   |
| 802.11ax20 | 2412               | -19.184                              | 8                   | PASS   |
|            | 2437               | -20.194                              | 8                   | PASS   |
|            | 2462               | -20.685                              | 8                   | PASS   |
| 802.11ax40 | 2422               | -22.63                               | 8                   | PASS   |
|            | 2437               | -22.342                              | 8                   | PASS   |
|            | 2452               | -23.355                              | 8                   | PASS   |




## 802.11b - CH01

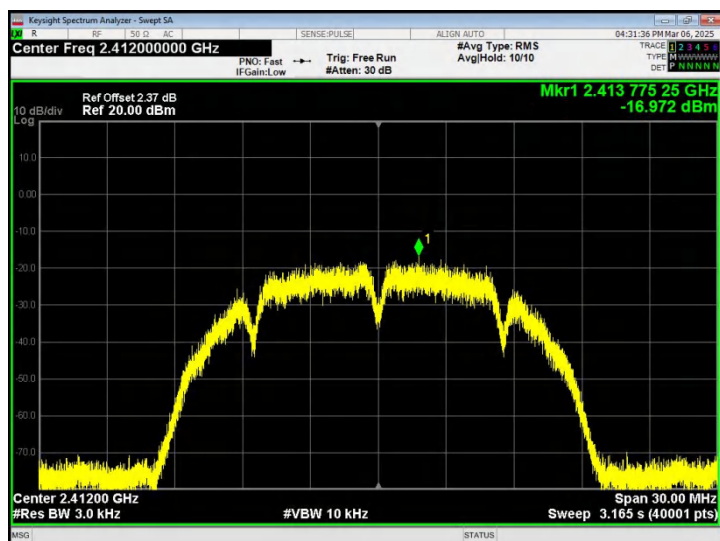

## 802.11b - CH06

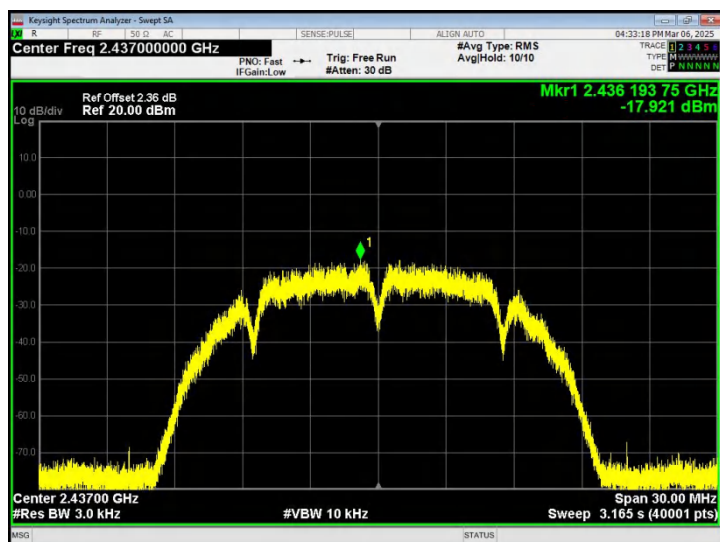


## 802.11b - CH11

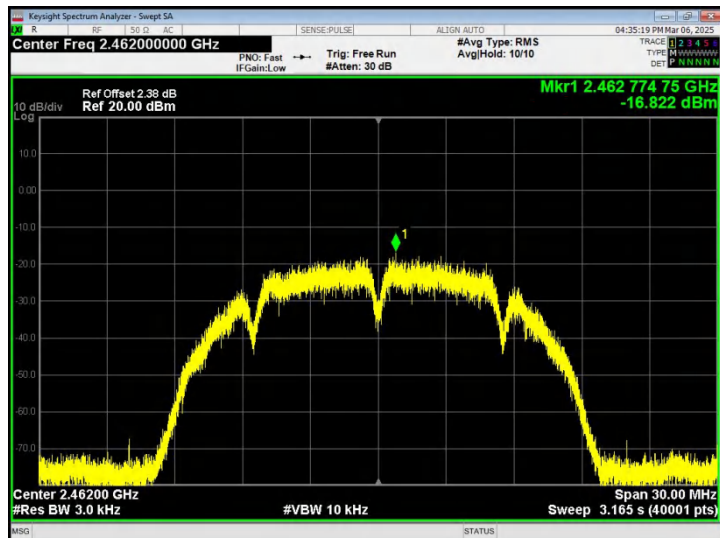





## 802.11g - CH01

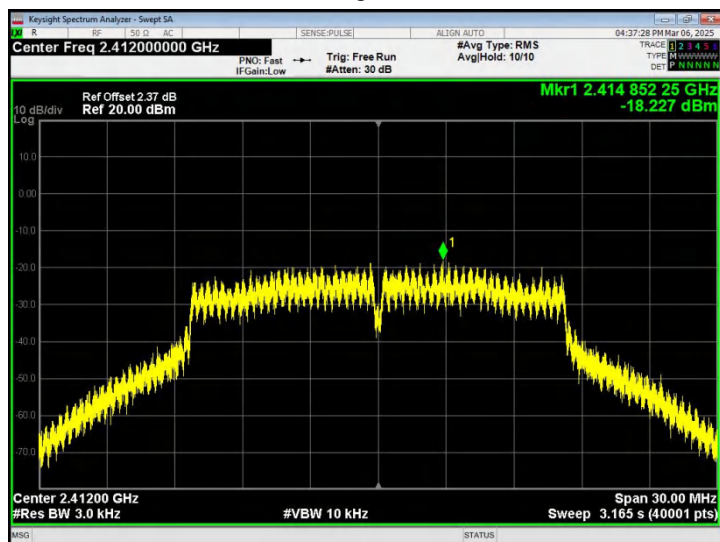

## 802.11g - CH06

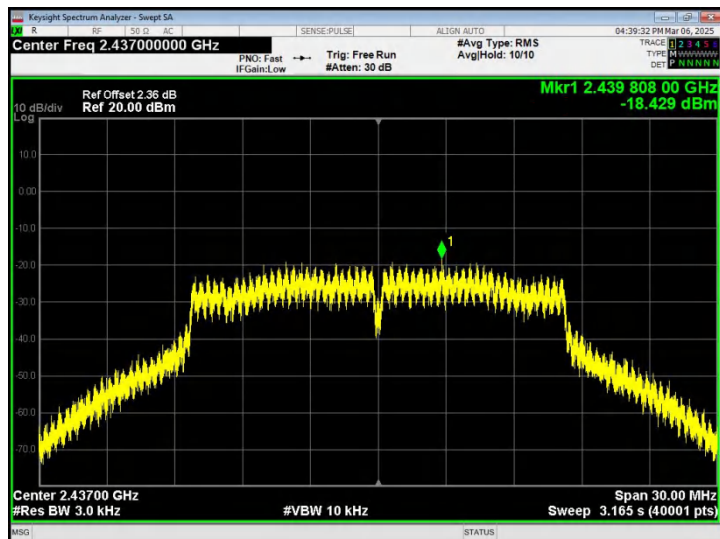


## 802.11g - CH11

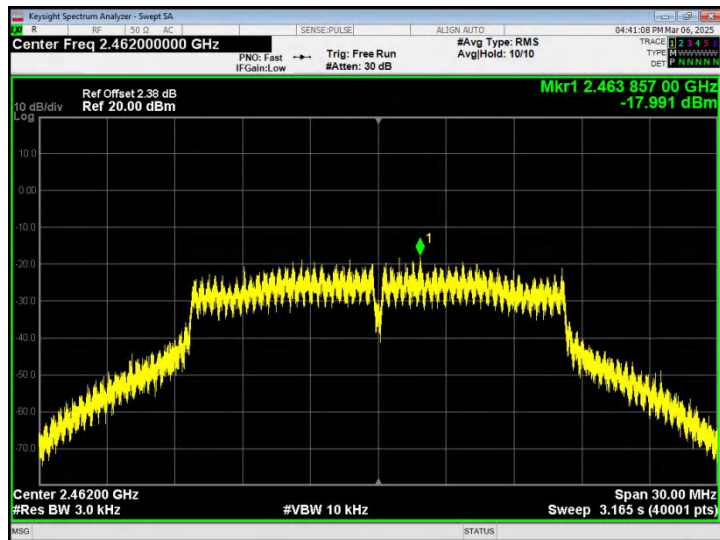





## 802.11n20 - CH01

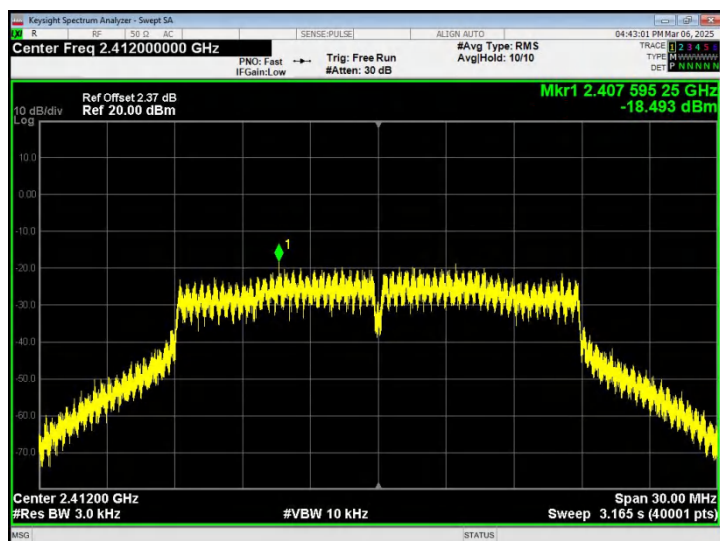

## 802.11n20 - CH06

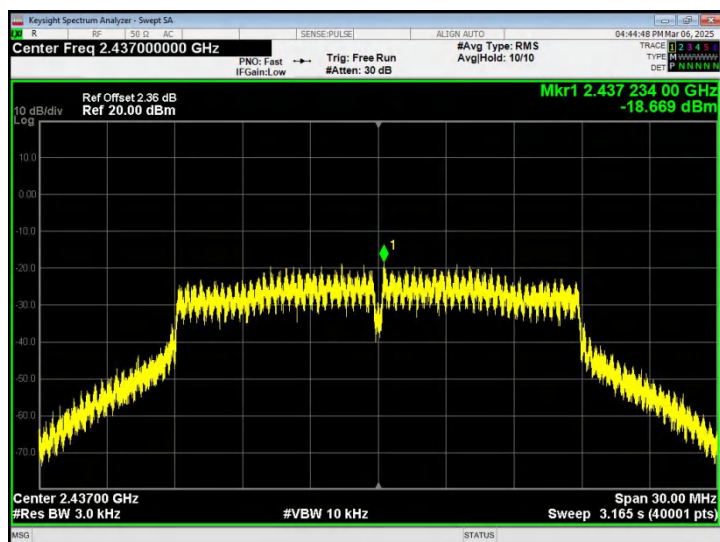


## 802.11n20 - CH11

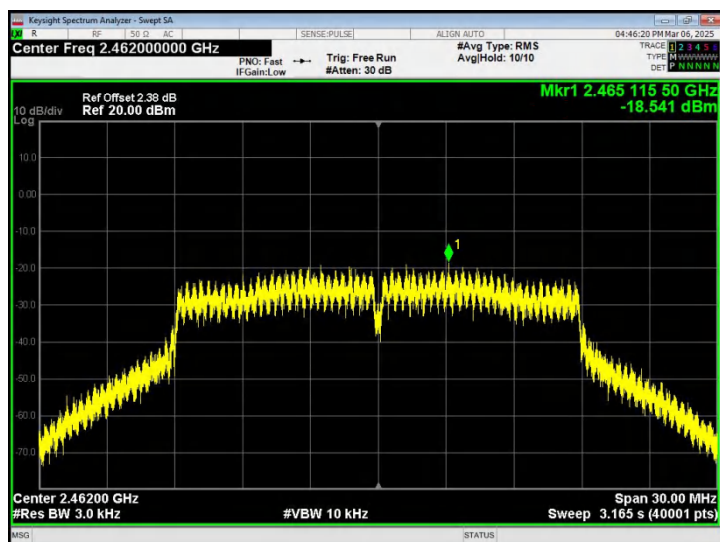





## 802.11n40 - CH03

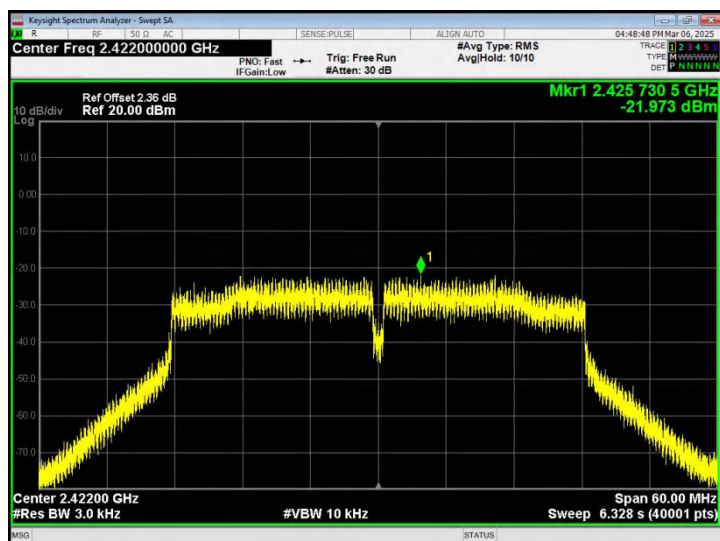

## 802.11n40 - CH06

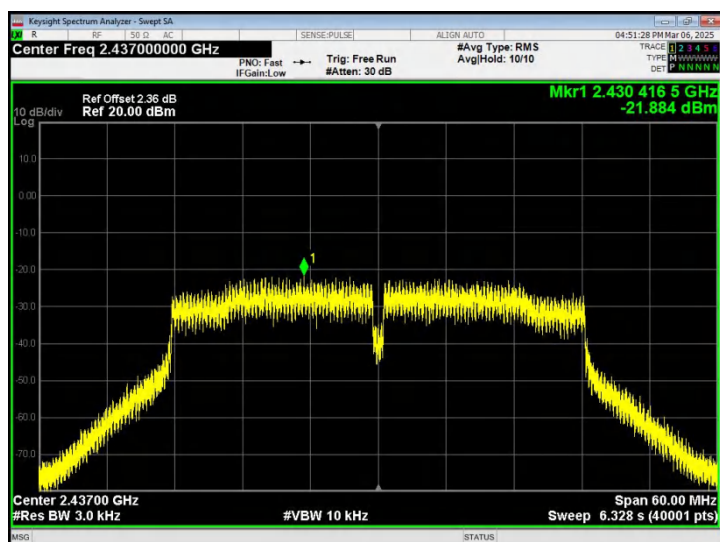


## 802.11n40 - CH09

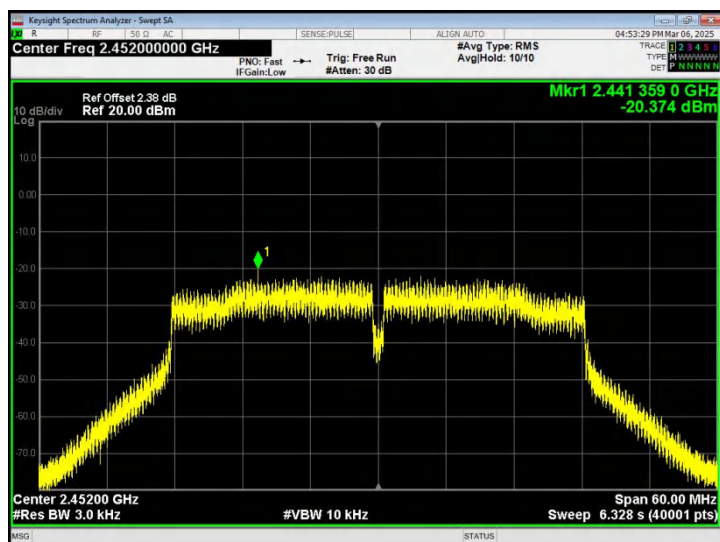





802.11ax20 - CH01

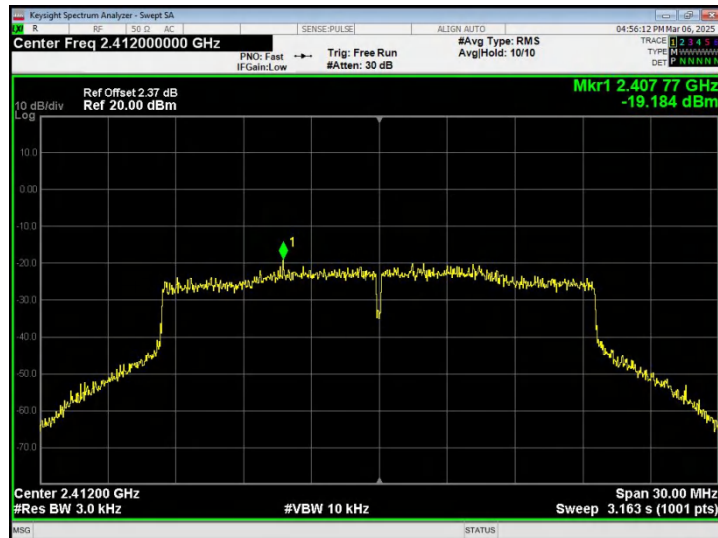

802.11ax20 - CH06

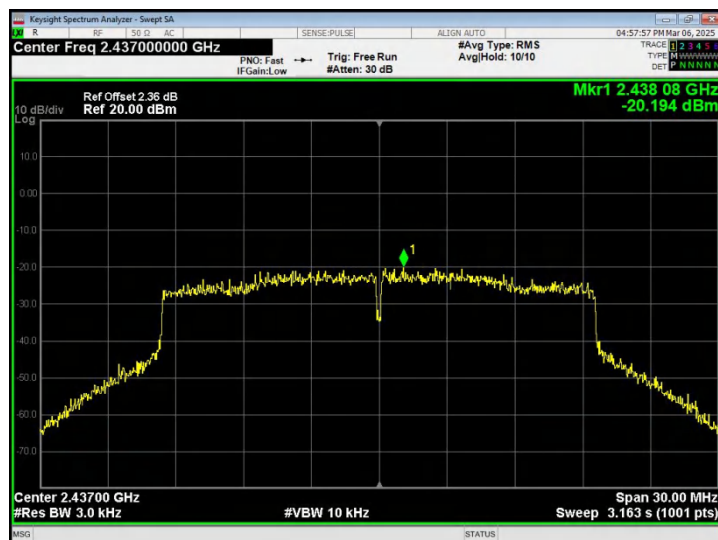


802.11ax20 - CH11

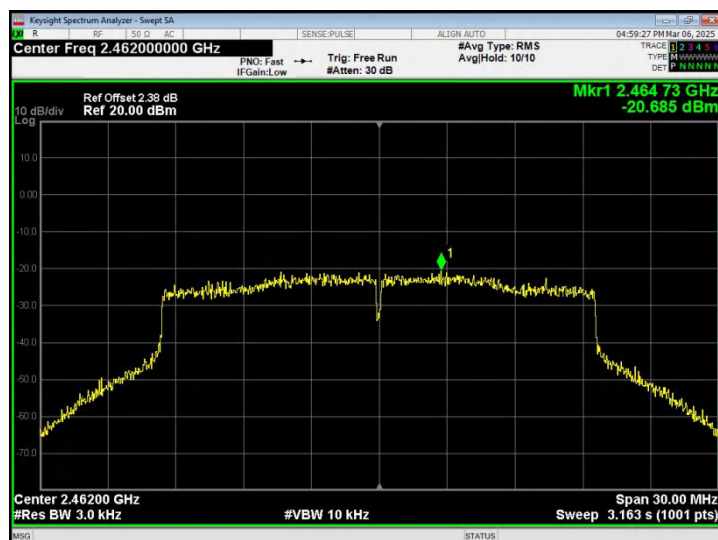





## 802.11ax40 - CH03

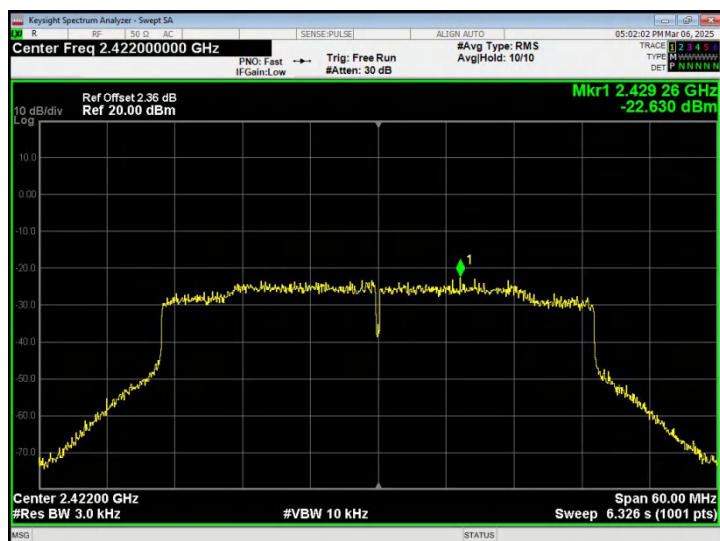

## 802.11ax40 - CH06

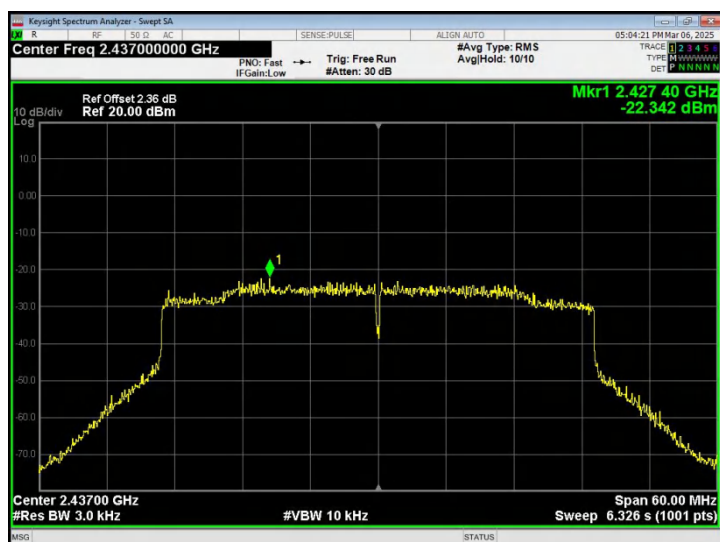

## 802.11ax40 - CH09

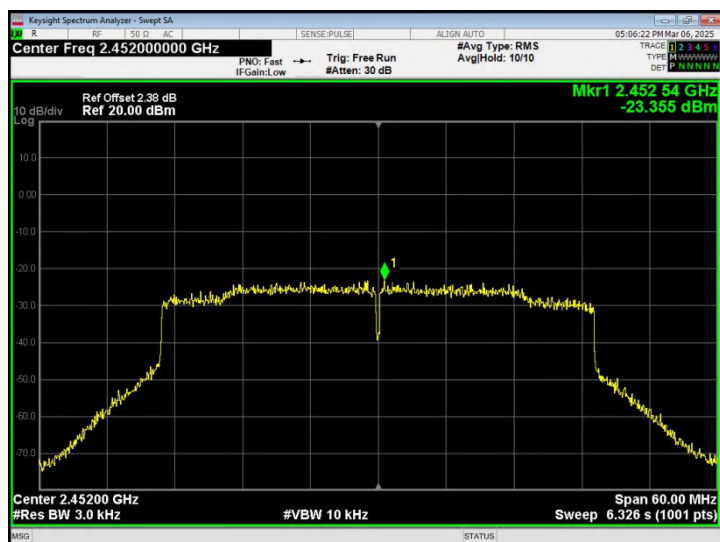



## 7. 6DB OCCUPIED BANDWIDTH

|                   |                                         |
|-------------------|-----------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(2)      |
| Test Method:      | KDB558074 D0115.247 Meas Guidancev05r02 |

### 7.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |           |                                                  |                       |        |
|---------------------------------|-----------|--------------------------------------------------|-----------------------|--------|
| Section                         | Test Item | Limit                                            | Frequency Range (MHz) | Result |
| 15.247(a)(2)                    | Bandwidth | $\geq 500\text{KHz}$<br>(6dB Occupied Bandwidth) | 2400-2483.5           | PASS   |


### 7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

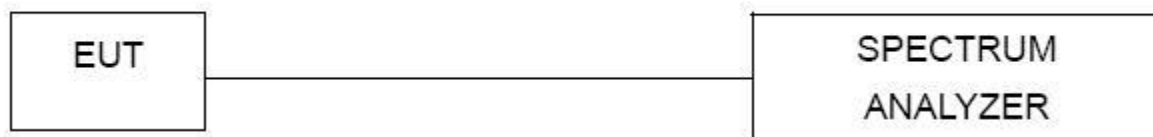

### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 7.4 Unless otherwise a special operating condition is specified in the follows during the testing.



## 7.6 TEST RESULT

|               |        |                     |              |
|---------------|--------|---------------------|--------------|
| Temperature : | 26℃    | Relative Humidity : | 54%          |
| Pressure :    | 101kPa | Test Voltage :      | AC 120V/60Hz |
| Test Mode :   | TX     |                     |              |

| Test Mode  | Test Channel<br>(MHz) | 6dB Occupied Bandwidth<br>(MHz) | Limit<br>(kHz) | Result |
|------------|-----------------------|---------------------------------|----------------|--------|
| 802.11b    | 2412                  | 9.613                           | >500           | Pass   |
|            | 2437                  | 10.112                          |                |        |
|            | 2462                  | 10.033                          |                |        |
| 802.11g    | 2412                  | 12.887                          | >500           | Pass   |
|            | 2437                  | 13.984                          |                |        |
|            | 2462                  | 13.734                          |                |        |
| 802.11n20  | 2412                  | 16.207                          | >500           | Pass   |
|            | 2437                  | 12.905                          |                |        |
|            | 2462                  | 16.501                          |                |        |
| 802.11n40  | 2422                  | 36.297                          | >500           | Pass   |
|            | 2437                  | 26.205                          |                |        |
|            | 2452                  | 30.025                          |                |        |
| 802.11ax20 | 2412                  | 18.589                          | >500           | Pass   |
|            | 2437                  | 17.825                          |                |        |
|            | 2462                  | 15.418                          |                |        |
| 802.11ax40 | 2422                  | 35.704                          | >500           | Pass   |
|            | 2437                  | 31.801                          |                |        |
|            | 2452                  | 29.636                          |                |        |





Test plot as follows:



802.11b

802.11g



Lowest channel

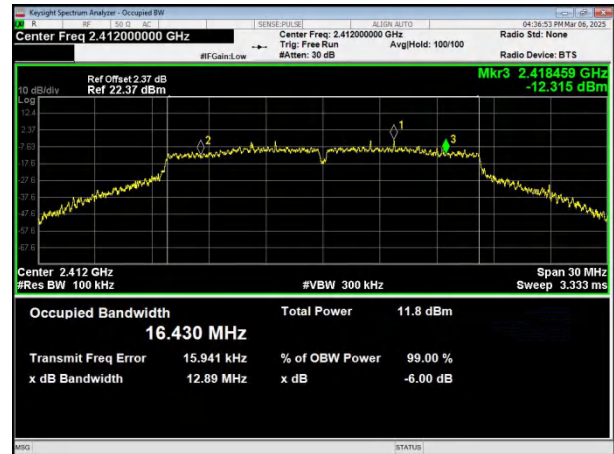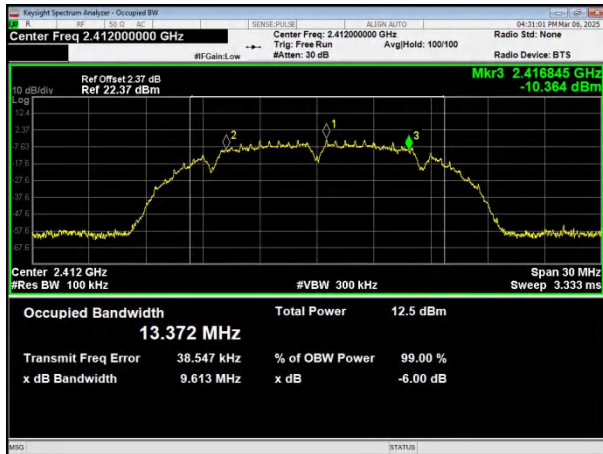

Middle channel

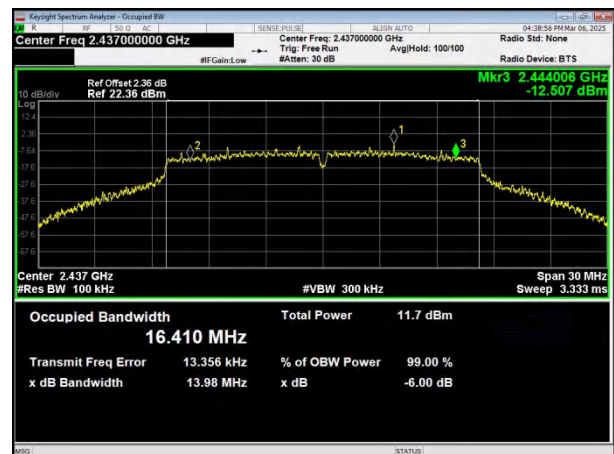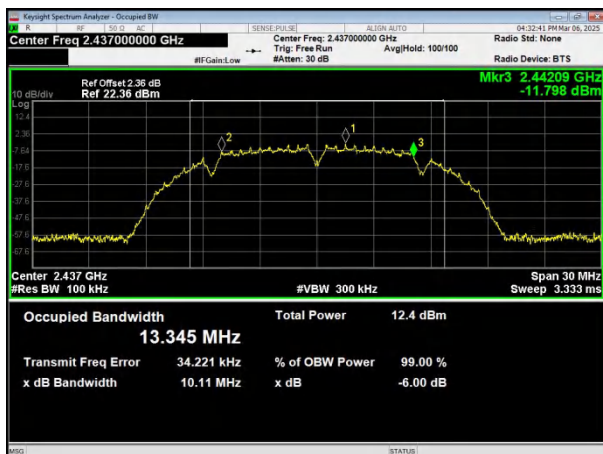

Highest channel

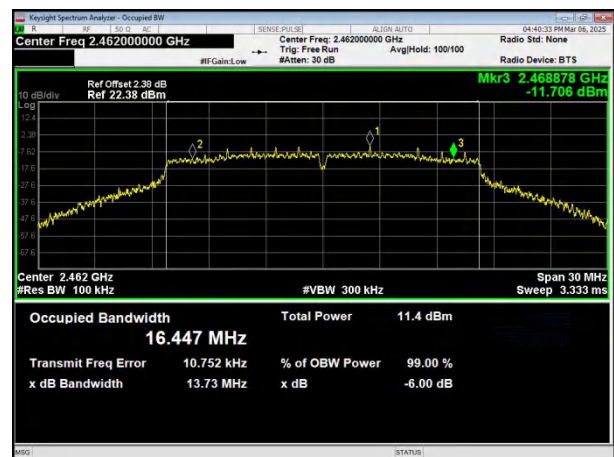
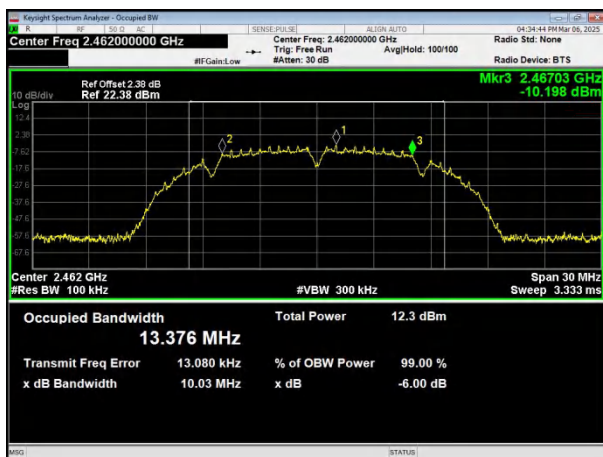






802.11n20

802.11n40



## Lowest channel

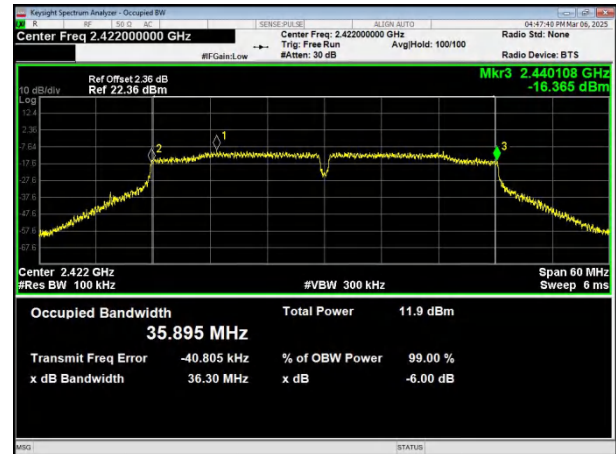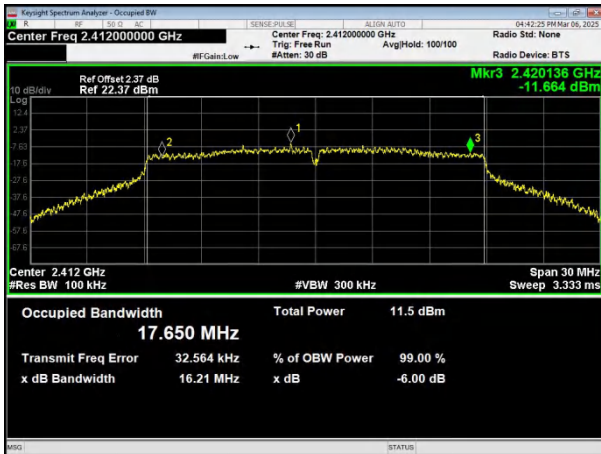

## Middle channel

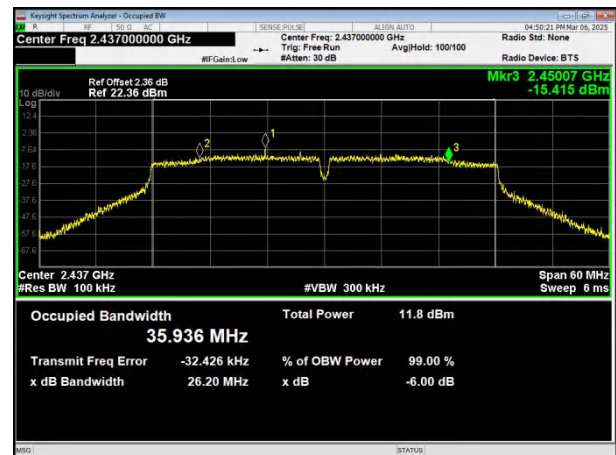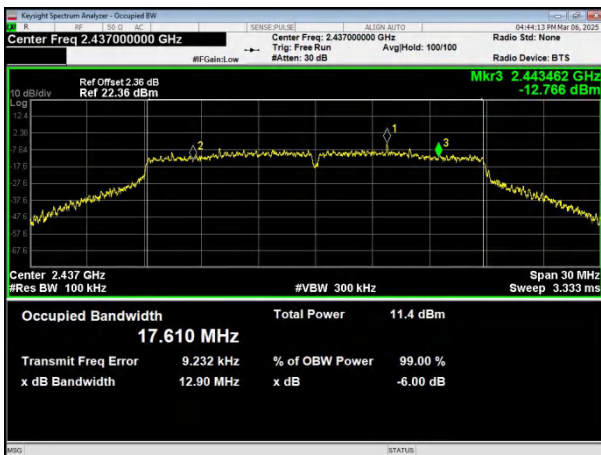

## Highest channel

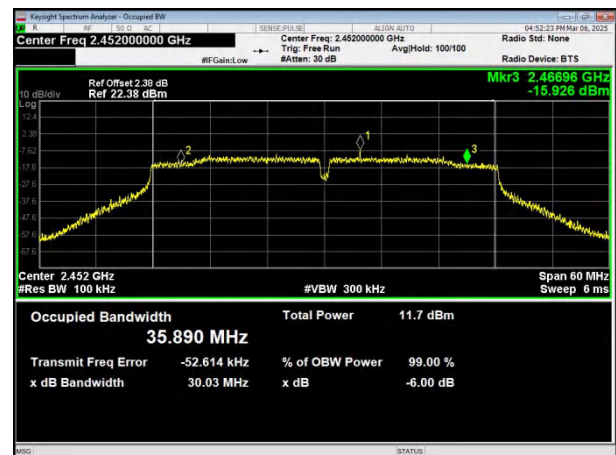
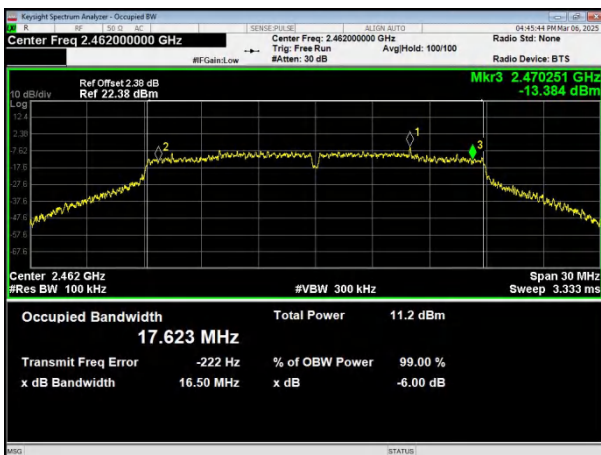






802.11ax20

802.11ax40



## Lowest channel

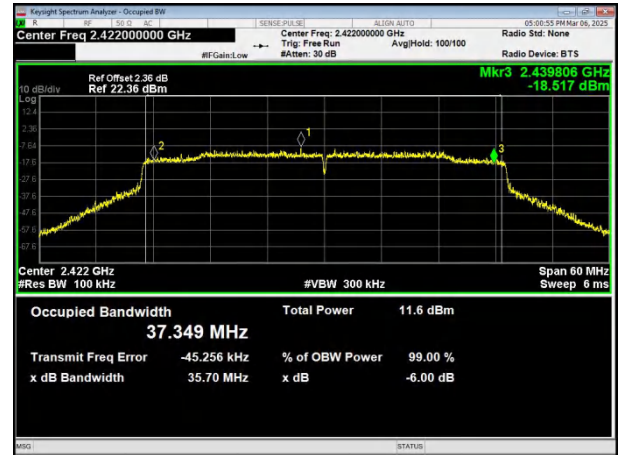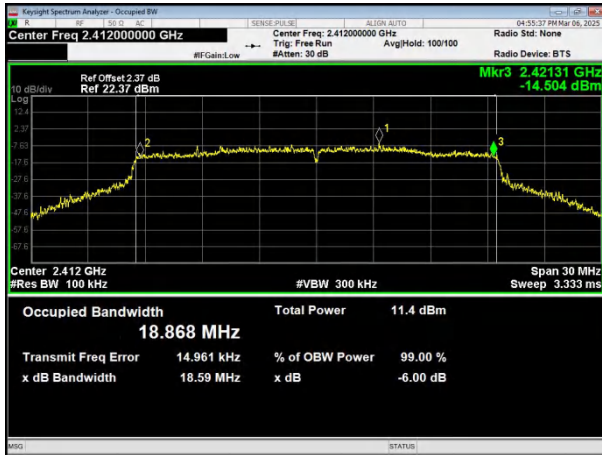

## Middle channel

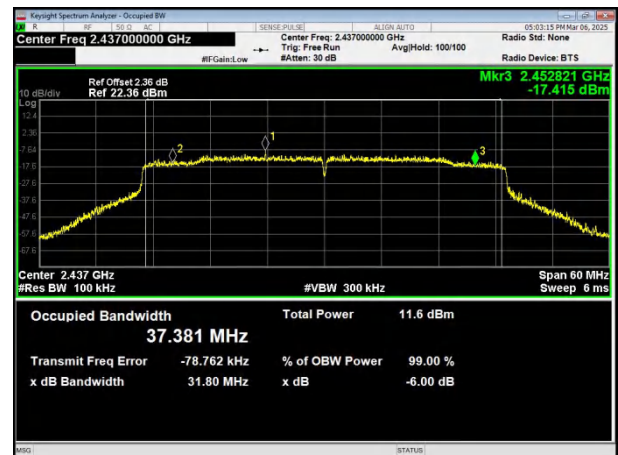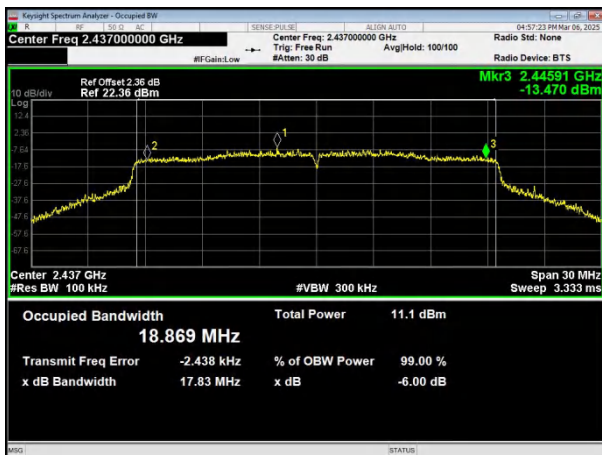

## Highest channel

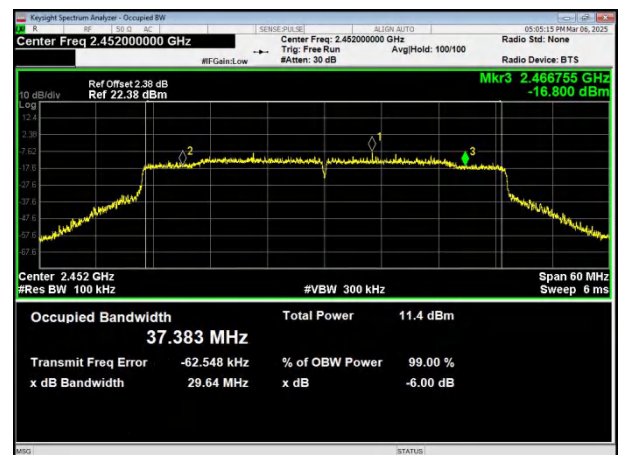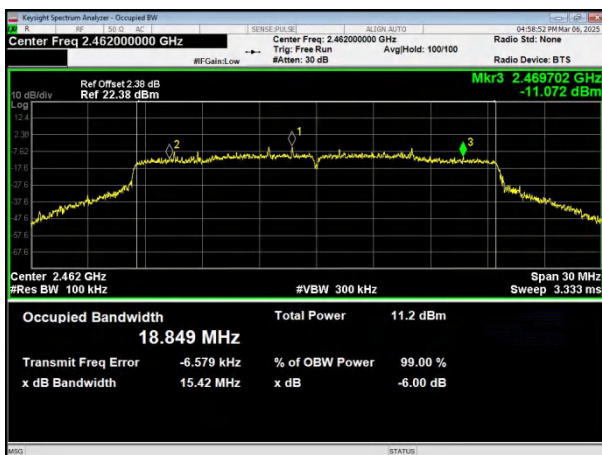



## 8. PEAK OUTPUT POWER TEST

|                   |                                         |
|-------------------|-----------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (b)(3)      |
| Test Method:      | KDB558074 D0115.247 Meas Guidancev05r02 |

### 8.1 APPLIED PROCEDURES/LIMIT

| FCC Part15 (15.247) , Subpart C |                   |                 |                       |        |
|---------------------------------|-------------------|-----------------|-----------------------|--------|
| Section                         | Test Item         | Limit           | Frequency Range (MHz) | Result |
| 15.247(b)(3)                    | Peak Output Power | 1 watt or 30dBm | 2400-2483.5           | PASS   |

### 8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 8.4 Unless otherwise a special operating condition is specified in the follows during the testing.



## 8.6 TEST RESULT

|               |        |                     |              |
|---------------|--------|---------------------|--------------|
| Temperature : | 26℃    | Relative Humidity : | 54%          |
| Pressure :    | 101kPa | Test Voltage :      | AC 120V/60Hz |

| Test Mode  | Test Channel<br>(MHz) | Peak Output Power<br>(dBm) | Limit<br>(dBm) | Result |
|------------|-----------------------|----------------------------|----------------|--------|
| 802.11b    | 2412                  | 7.425                      | 30.00          | Pass   |
|            | 2437                  | 7.376                      |                |        |
|            | 2462                  | 7.173                      |                |        |
| 802.11g    | 2412                  | 10.287                     | 30.00          | Pass   |
|            | 2437                  | 10.231                     |                |        |
|            | 2462                  | 10.034                     |                |        |
| 802.11n20  | 2412                  | 10.297                     | 30.00          | Pass   |
|            | 2437                  | 10.154                     |                |        |
|            | 2462                  | 9.936                      |                |        |
| 802.11n40  | 2422                  | 10.469                     | 30.00          | Pass   |
|            | 2437                  | 10.512                     |                |        |
|            | 2452                  | 10.398                     |                |        |
| 802.11ax20 | 2412                  | 10.878                     | 30.00          | Pass   |
|            | 2437                  | 10.641                     |                |        |
|            | 2462                  | 10.54                      |                |        |
| 802.11ax40 | 2422                  | 10.902                     | 30.00          | Pass   |
|            | 2437                  | 10.944                     |                |        |
|            | 2452                  | 10.751                     |                |        |



## 9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

|                   |                                         |
|-------------------|-----------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d)         |
| Test Method:      | KDB558074 D0115.247 Meas Guidancev05r02 |

### 9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

### 9.2 TEST PROCEDURE


Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP

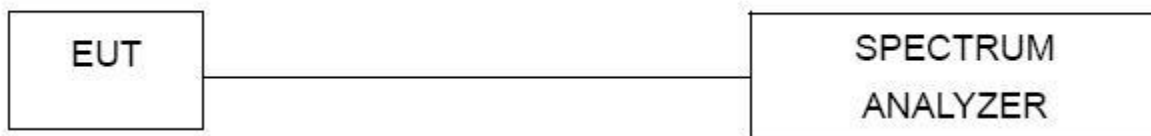

### 9.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 9.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 9.6 TEST RESULTS




Test plot as follows:

802.11b

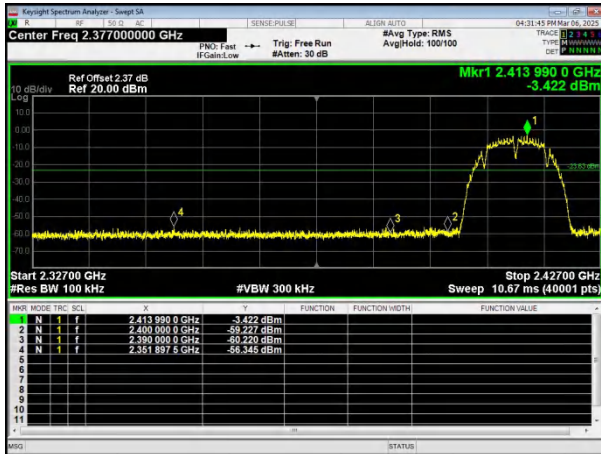


Lowest channel

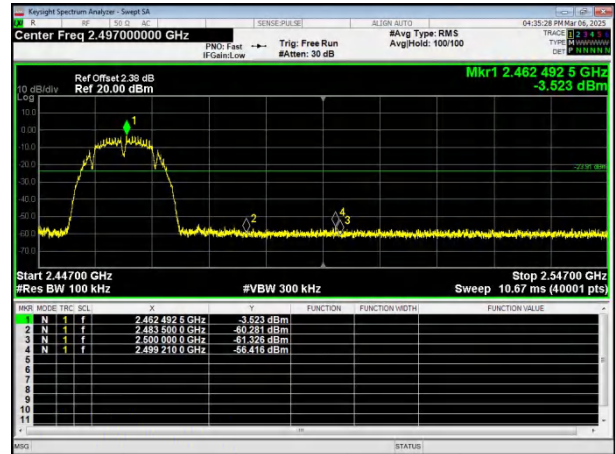


Highest channel

802.11g

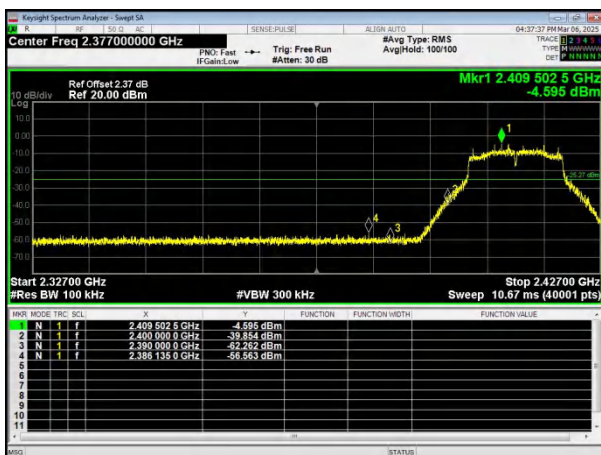


Lowest channel

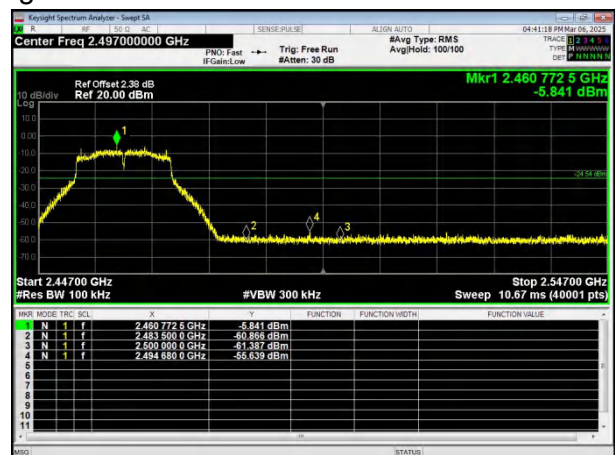


Highest channel

802.11n20

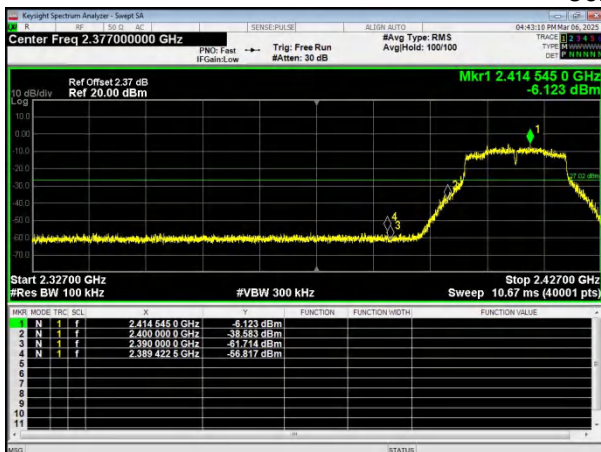

Lowest channel

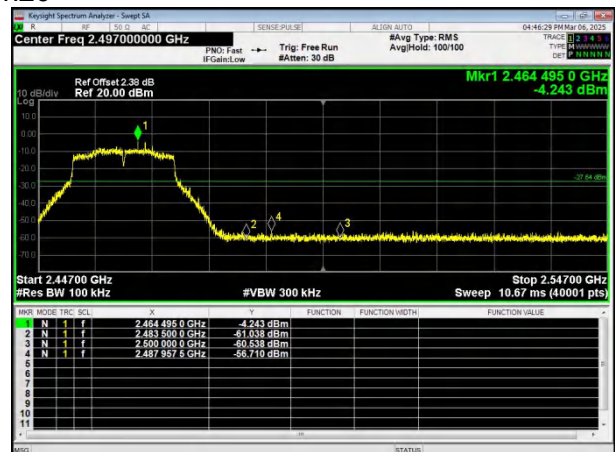


Highest channel







Test plot as follows:


802.11b  
Lowest channel


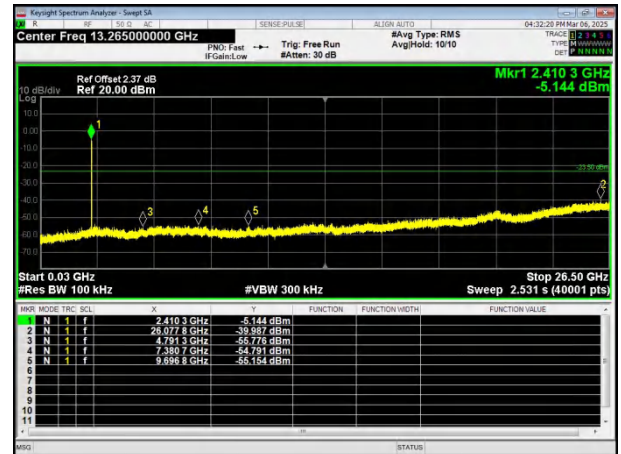


Middle channel

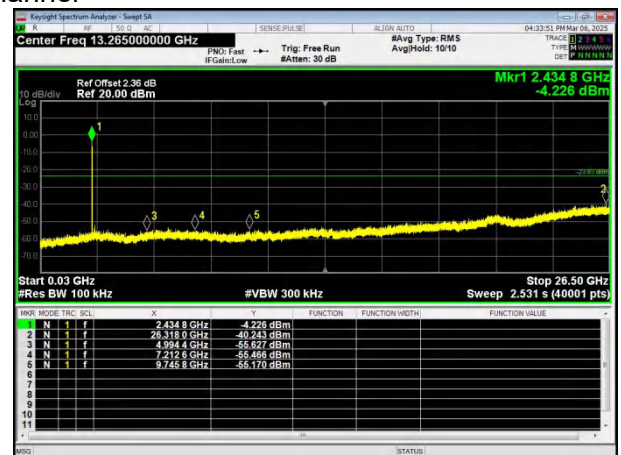
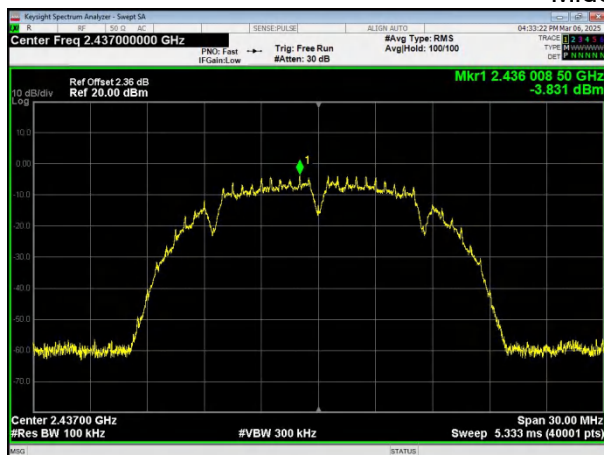


Highest channel


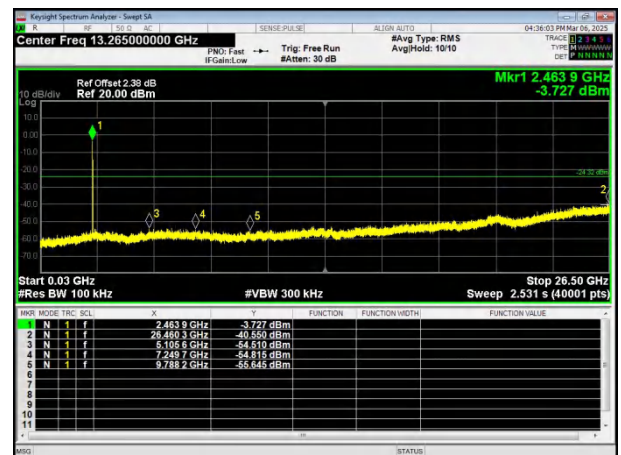


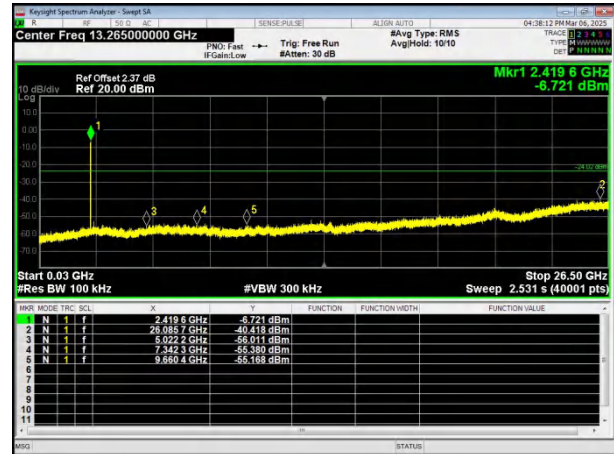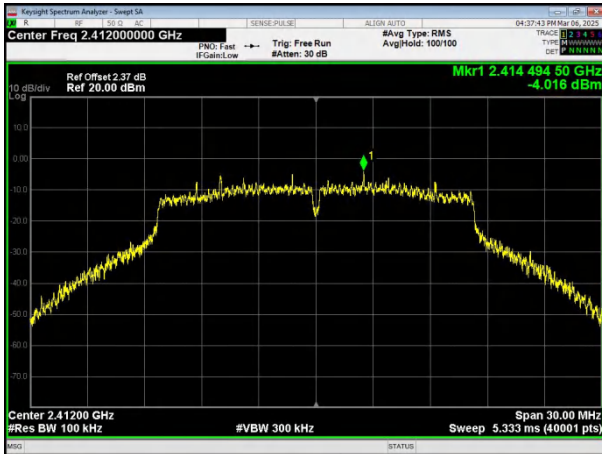802.11g  
Lowest channel

## Middle channel

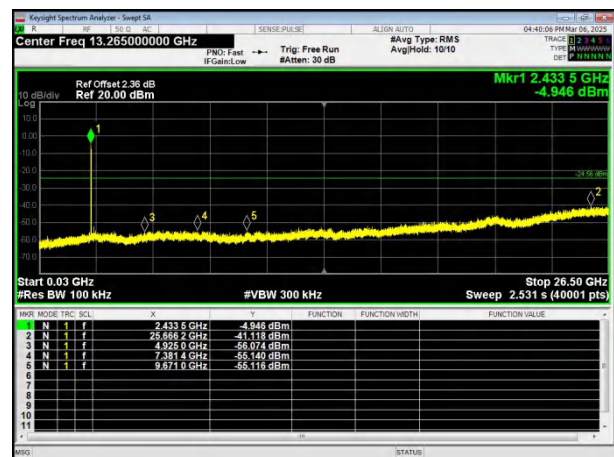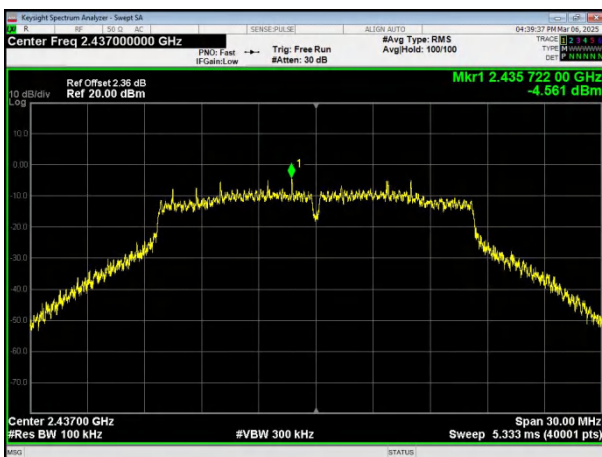



## Highest channel

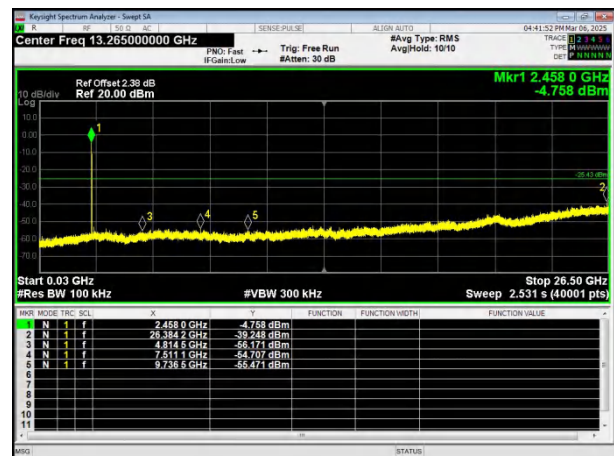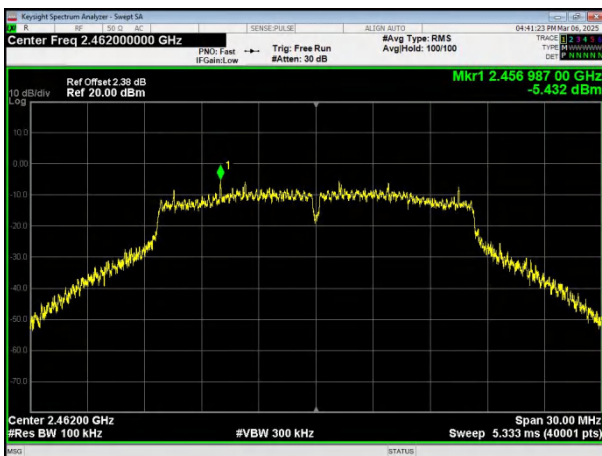





802.11n20


Lowest channel

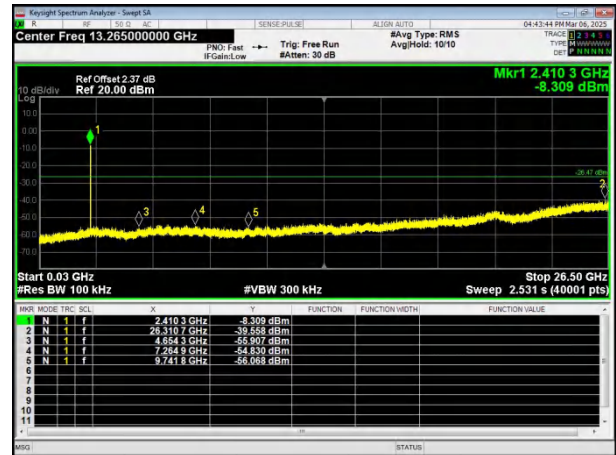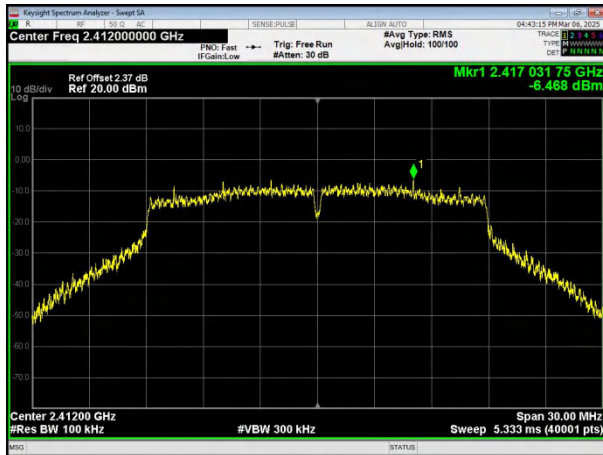

Middle channel

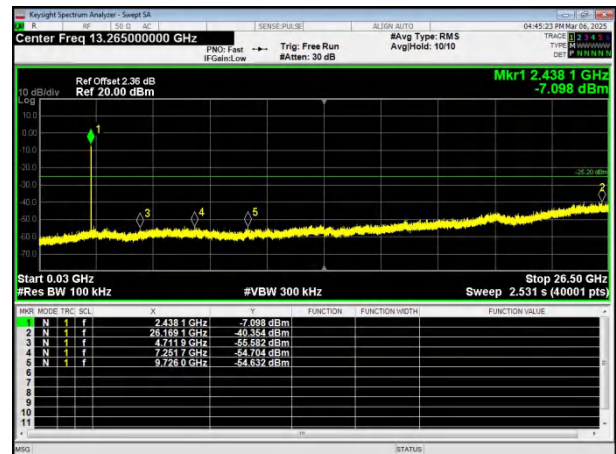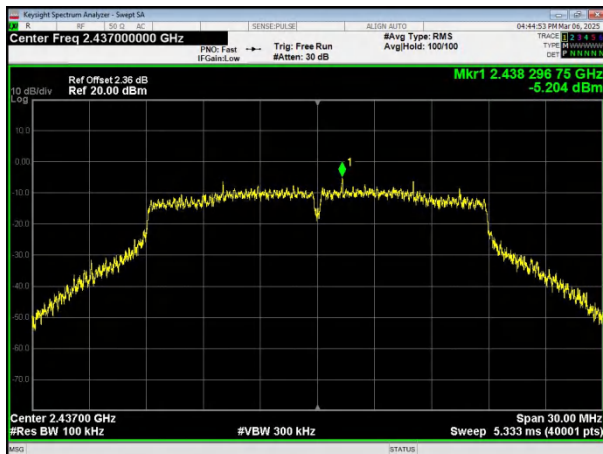



Highest channel

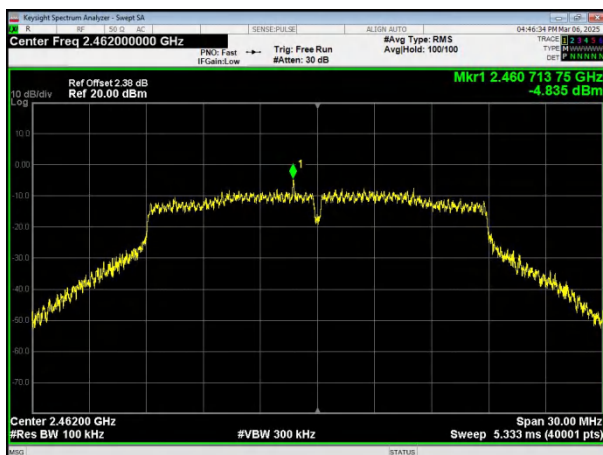





802.11n40



Lowest channel

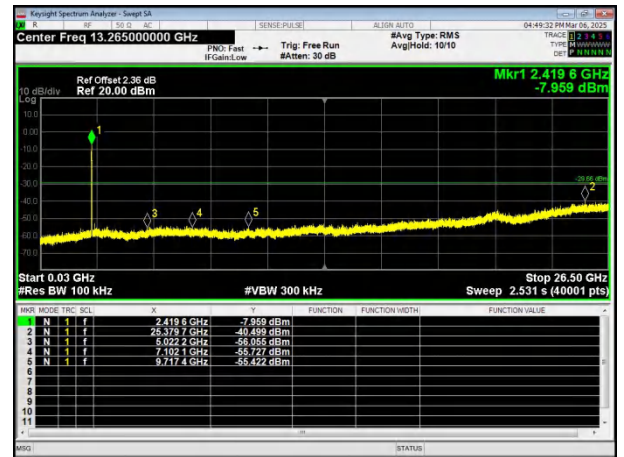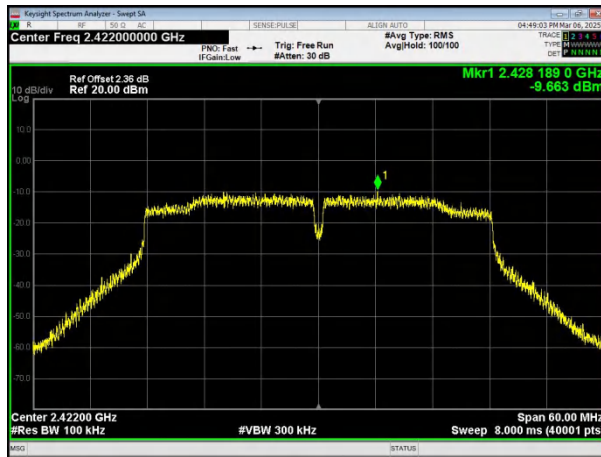

Middle channel

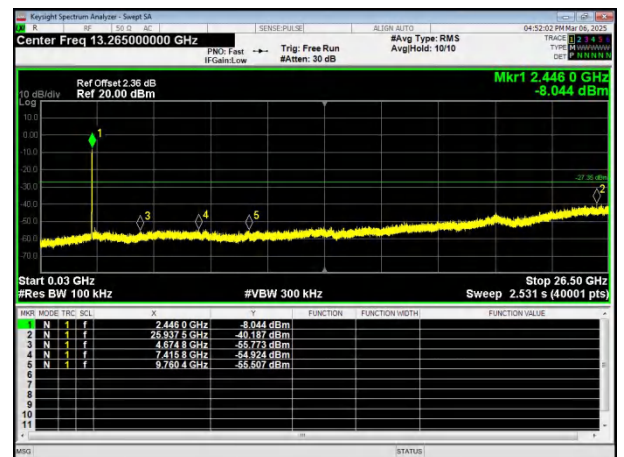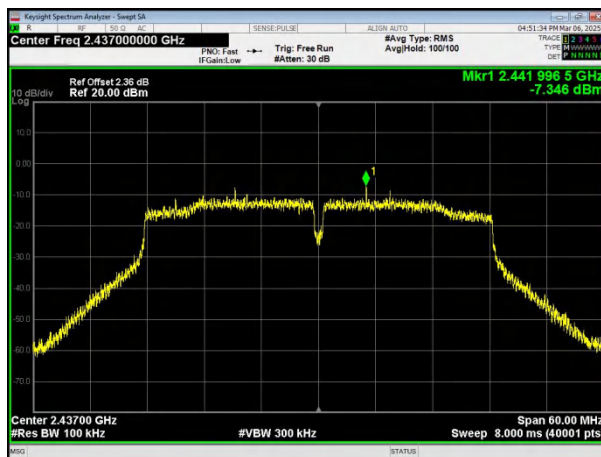



Highest channel

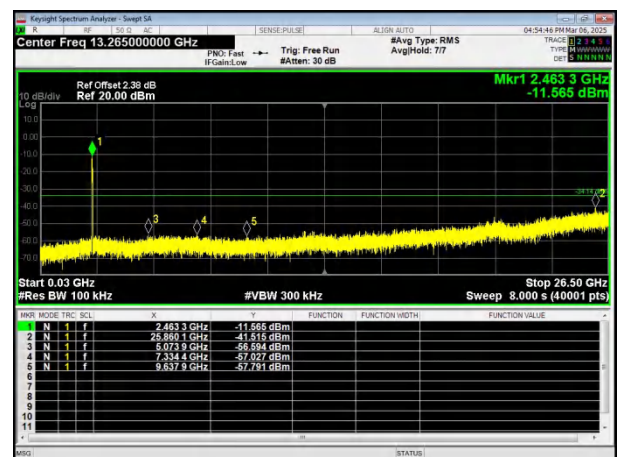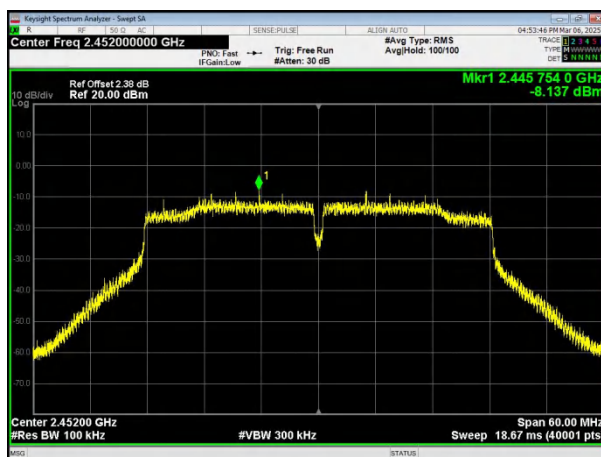




802.11ax20



Lowest channel

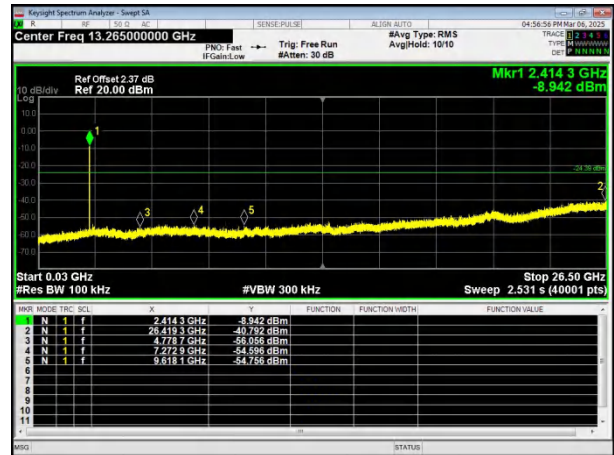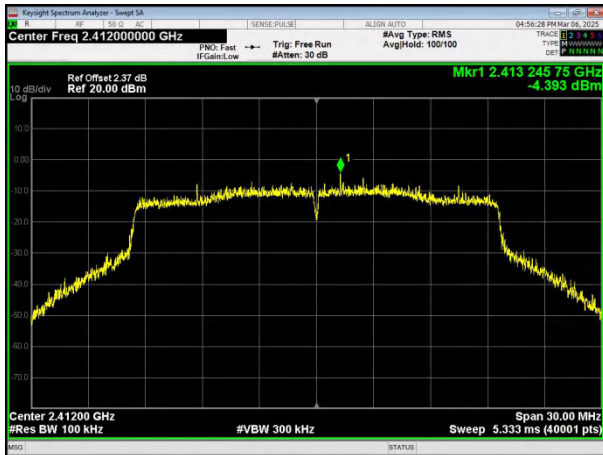

Middle channel

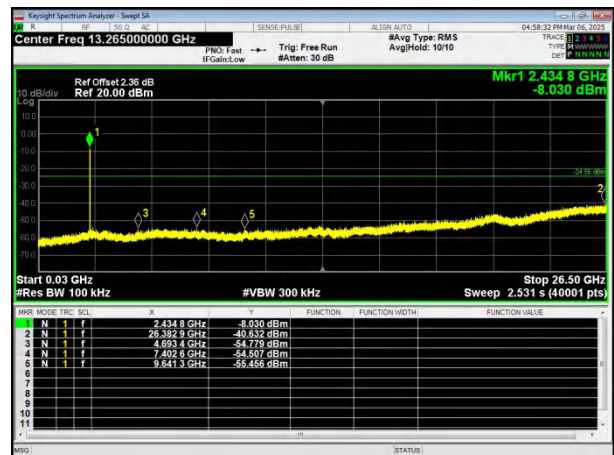



Highest channel

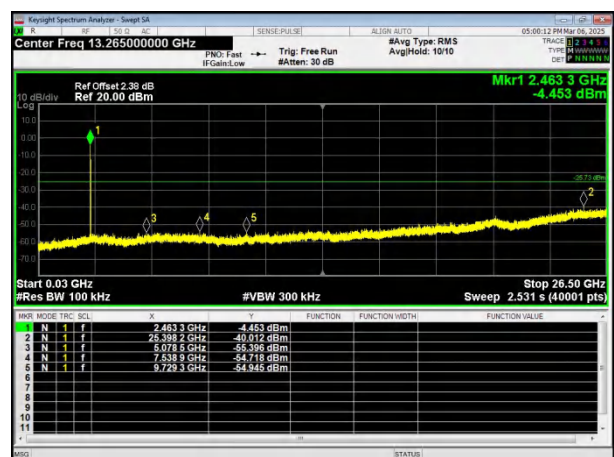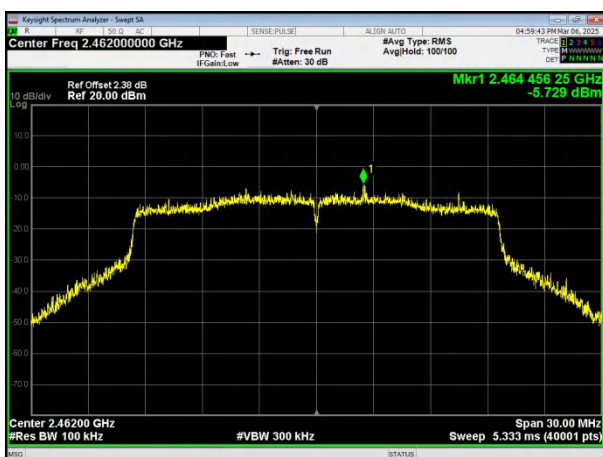





802.11ax40


Lowest channel

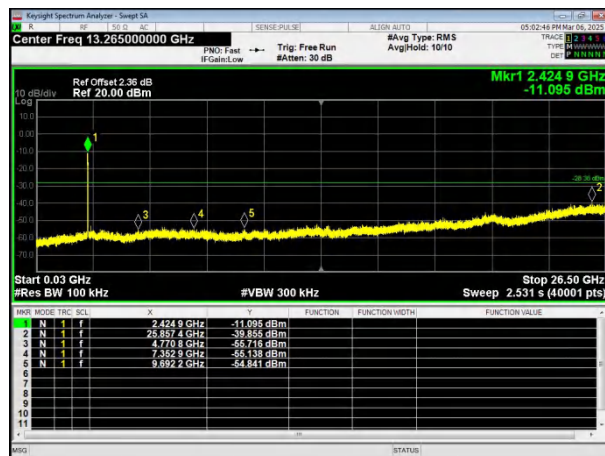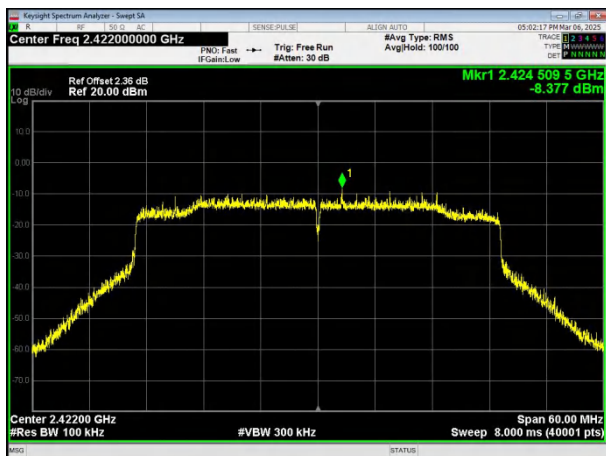

Middle channel

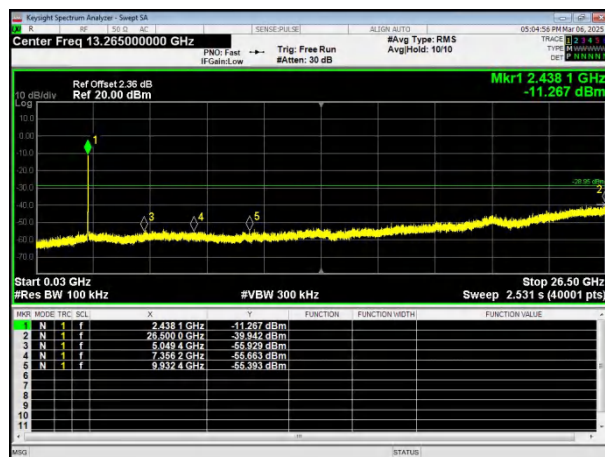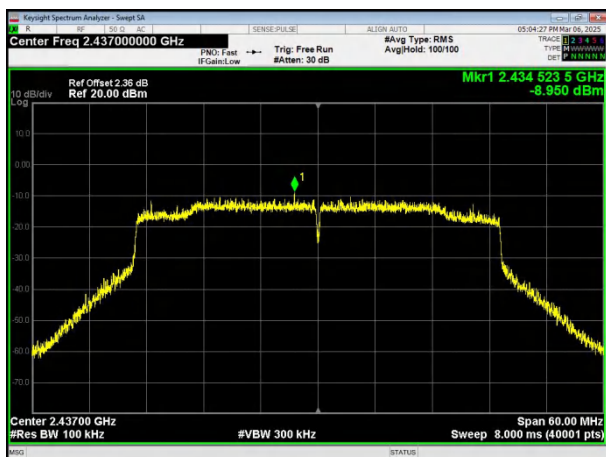

Highest channel

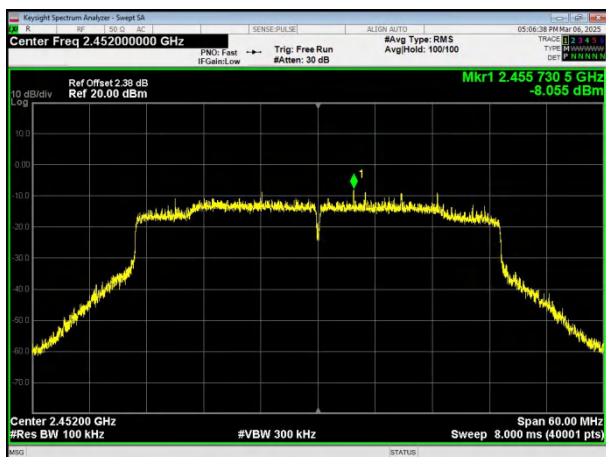



## 10. DUTY CYCLE

|              |                  |
|--------------|------------------|
| Test Method: | ANSI C63.10:2013 |
|--------------|------------------|

### 10.1 APPLIED PROCEDURES / LIMIT

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
  - 1) Set the center frequency of the instrument to the center frequency of the transmission.
  - 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
  - 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
  - 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration  $T$  exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

### 10.2 DEVIATION FROM STANDARD

No deviation.

### 10.3 TEST SETUP






## 10.4 TEST RESULTS

|               |        |                     |              |
|---------------|--------|---------------------|--------------|
| Temperature : | 26℃    | Relative Humidity : | 54%          |
| Pressure :    | 101kPa | Test Voltage :      | AC 120V/60Hz |

| Test Mode  | Test Frequency (MHz) | Duty Cycle (%) | Factor (dB) | Result |
|------------|----------------------|----------------|-------------|--------|
| 802.11b    | 2412                 | 99.05          | 0           | Pass   |
| 802.11g    | 2412                 | 95.87          | 0.18        | Pass   |
| 802.11n20  | 2412                 | 98.88          | 0           | Pass   |
| 802.11n40  | 2422                 | 99             | 0           | Pass   |
| 802.11ax20 | 2412                 | 98.88          | 0           | Pass   |
| 802.11ax40 | 2422                 | 98.88          | 0           | Pass   |

802.11b


2412MHz

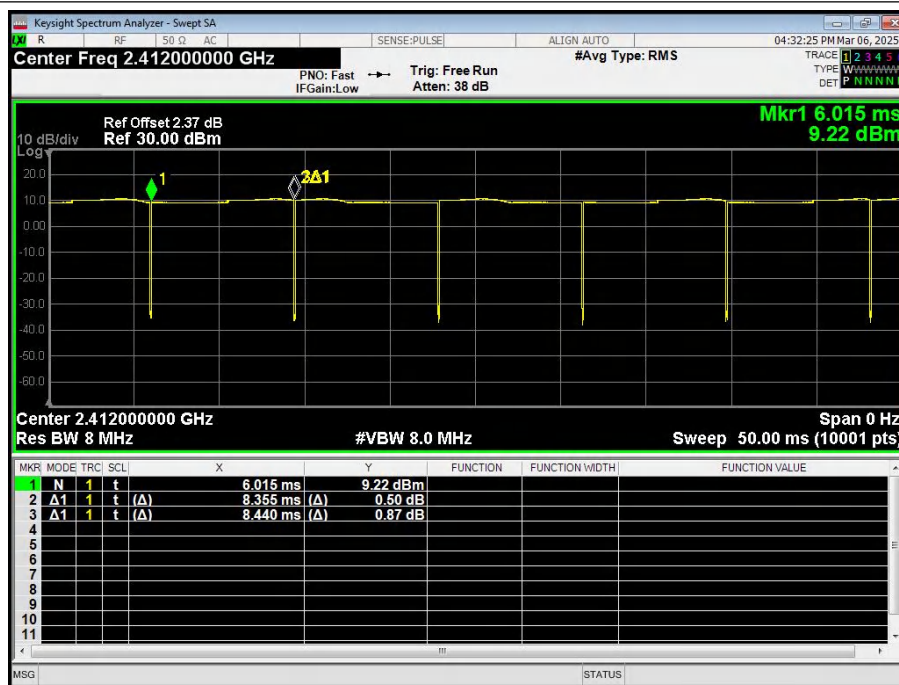




802.11g

2412MHz

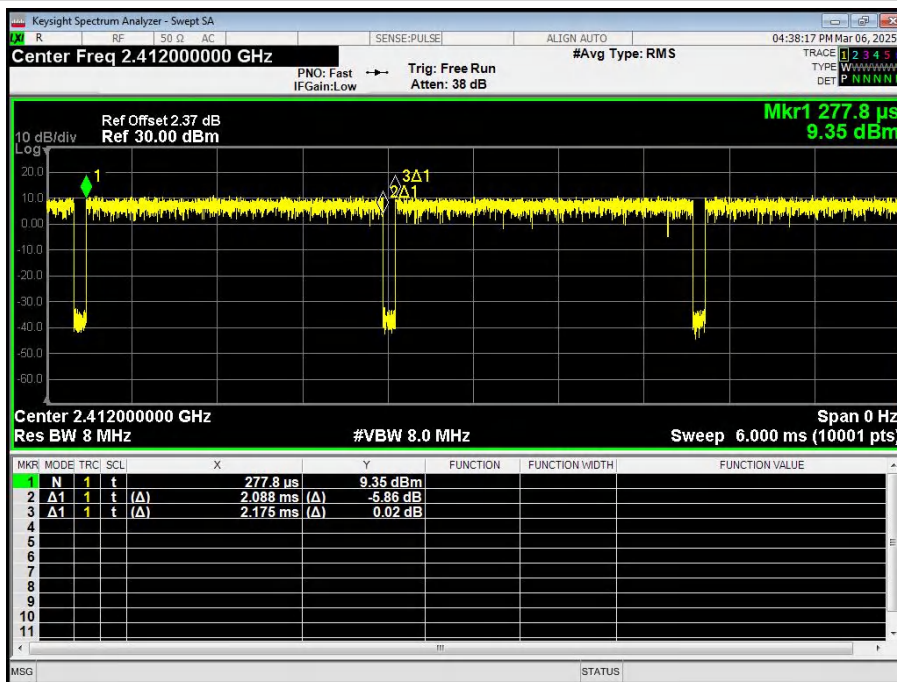

802.11n20


2412MHz

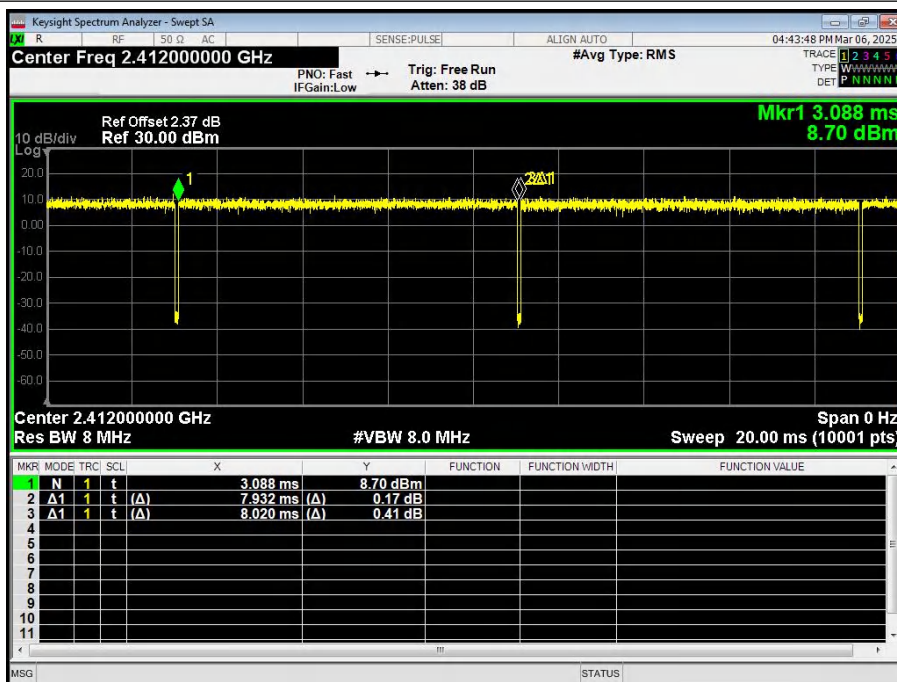




802.11n40

2422MHz

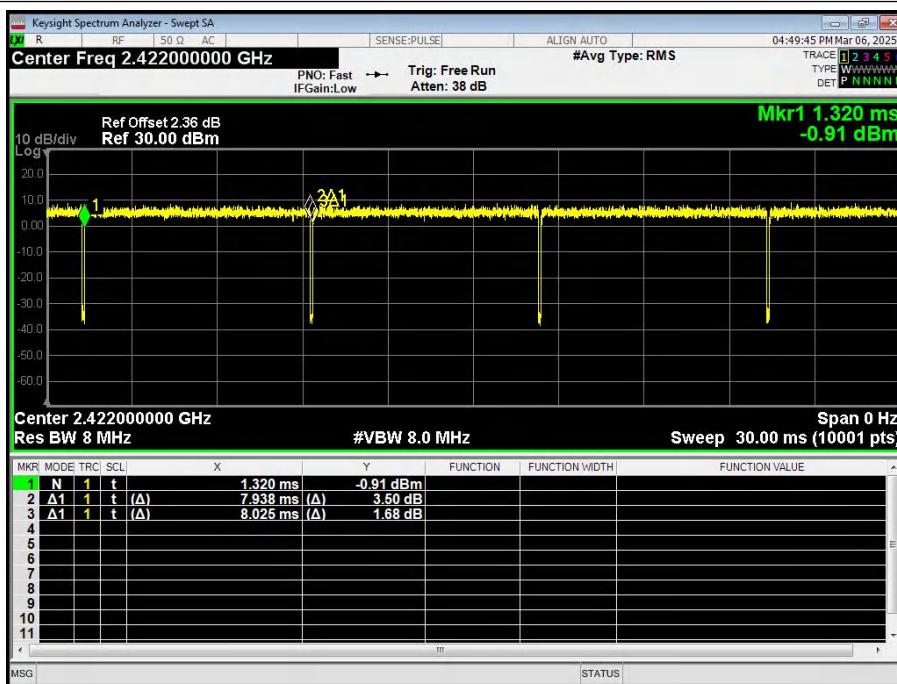

802.11ax20


2412MHz

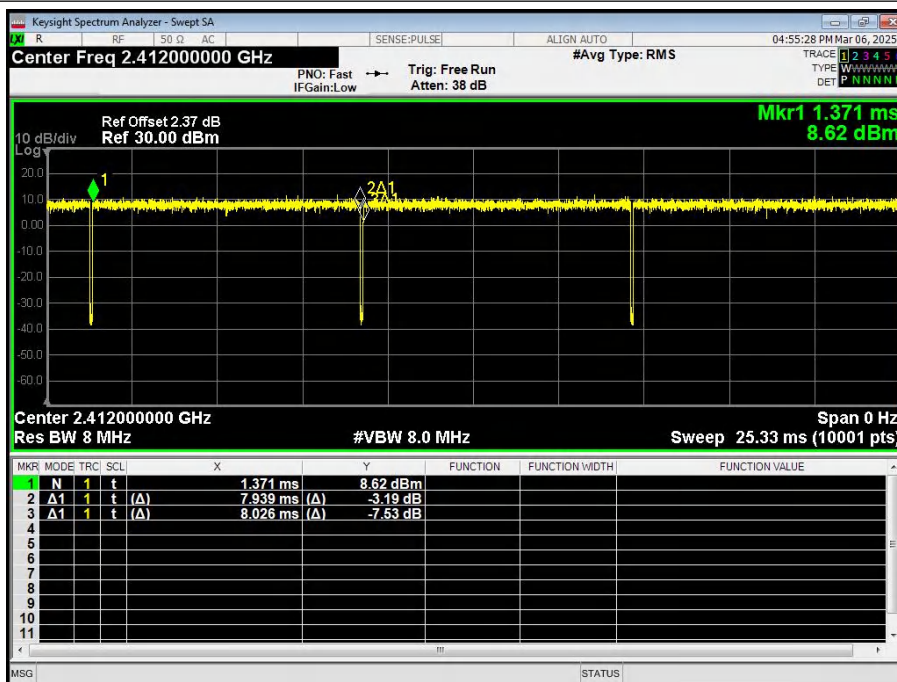



802.11ax40

2422MHz

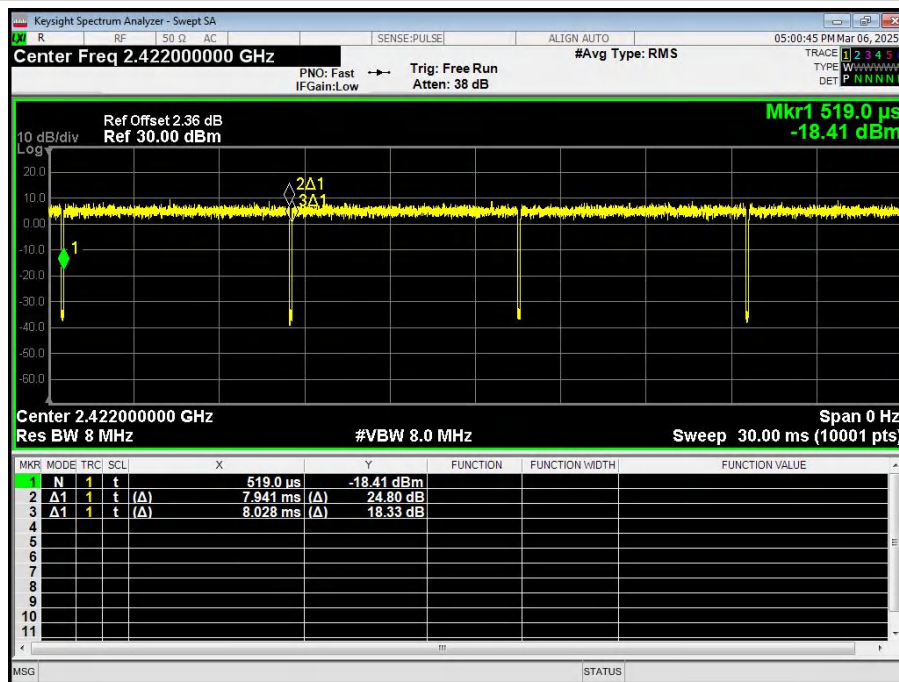

Note: All channel have been tested, and the report only reflects the worst case data.

Duty Cycle =  $T_{on} / T_{total} * 100\%$ ;

Duty Cycle Correction Factor =  $10\log (1/Duty Cycle)$ .



## 11. ANTENNA REQUIREMENT

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| Standard requirement:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | FCC Part15 C Section 15.203 /247(c) |
| <p>15.203 requirement:<br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement:<br/>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p> |                                     |
| EUT Antenna:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                     |
| The antenna is FPC Antenna, the best case gain of the antenna is 1.3dBi, reference to the appendix II for details.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                     |



## 12. TEST SETUP PHOTO

Reference to the appendix I for details.

## 13. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

\*\*\*\*\* END OF REPORT \*\*\*\*\*