

Worst Case Mode:

Worst Case Transfer Rate:

Distance of Measurements:

Operating Frequency:

Channel:

802.11n

MCS0


3 Meters

5270MHz

54



Plot 7-105. Radiated Upper Band Edge Plot (Average – UNII Band 2A - Interior)



Plot 7-106. Radiated Upper Band Edge Plot (Peak – UNII Band 2A - Interior)

Worst Case Mode:

Worst Case Transfer Rate:

Distance of Measurements:

Operating Frequency:

Channel:


802.11n

MCS0


3 Meters

5310MHz

62



Plot 7-107. Radiated Upper Band Edge Plot (Average – UNII Band 2A)



Plot 7-108. Radiated Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFQ720AM	PETEST* ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 70 of 04
1M1907080114-07-R1.ZNF	7/8 - 8/2/2019	Portable Handset	Page 79 of 94



Worst Case Mode:

Worst Case Transfer Rate:

Distance of Measurements:

Operating Frequency:

Channel:

802.11n

MCS0


3 Meters

5510MHz

102



Plot 7-109. Radiated Lower Band Edge Plot (Average – UNII Band 2C)



Plot 7-110. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)

Worst Case Mode:

Worst Case Transfer Rate:

Distance of Measurements:
Operating Frequency:
Channel:


802.11n

MCS0


3 Meters

5550MHz

110



Plot 7-111. Radiated Lower Band Edge Plot (Average – UNII Band 2C - Interior)




Plot 7-112. Radiated Lower Band Edge Plot (Peak – UNII Band 2C - Interior)

FCC ID: ZNFQ720AM	PETEST' ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 90 of 04
1M1907080114-07-R1.ZNF	7/8 - 8/2/2019	Portable Handset	Page 80 of 94



Worst Case Mode:	802.11n	Worst Case Mode:	802.11n
Worst Case Transfer Rate:	MCS0	Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters	Distance of Measurements:	3 Meters
Operating Frequency:	5670MHz	Operating Frequency:	5755MHz
Channel:	134	Channel:	151



PASS Trace: MaxHold Detector: PK VBW: 3 MHz VBW: 3 MHz S6.63 5.23 MHz SWI: 20.6ms 56.63 dBμV/m SWI: 20.6ms 56.63 dBμV/m 5

Plot 7-113. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)

Plot 7-114. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

Worst Case Mode:

Worst Case Transfer Rate:

Distance of Measurements:
Operating Frequency:

Channel:


802.11n

MCS0

3 Meters

5795MHz

159



Plot 7-115. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFQ720AM	PETEST* ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 91 of 04
1M1907080114-07-R1.ZNF	7/8 - 8/2/2019	Portable Handset	Page 81 of 94



7.6.4 Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode:

Worst Case Transfer Rate:

Distance of Measurements:
Operating Frequency:

Channel:


802.11ac

MCS0

3 Meters

5210MHz

42




Plot 7-116. Radiated Lower Band Edge Plot (Average – UNII Band 1)




Plot 7-117. Radiated Lower Band Edge Plot (Peak – UNII Band 1)

Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ac
MCS0
3 Meters
5290MHz
58



Plot 7-118. Radiated Upper Band Edge Plot (Average – UNII Band 2A)



Plot 7-119. Radiated Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: ZNFQ720AM	PETEST* ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 82 of 94
1M1907080114-07-R1.ZNF	7/8 - 8/2/2019	Portable Handset	raye oz ul 94




Worst Case Mode:
Worst Case Transfer Rate:
Distance of Measurements:
Operating Frequency:
Channel:

802.11ac
MCS0
3 Meters
5530MHz
106



Plot 7-120. Radiated Lower Band Edge Plot (Average – UNII Band 2C)




Plot 7-121. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)

Worst Case Mode: Worst Case Transfer Rate: Distance of Measurements: Operating Frequency: Channel:


_ {	802.11ac
-	MCS0
(3 Meters
ļ	5775MHz
•	155

Worst Case Mode: Worst Case Transfer Rate: Distance of Measurements: Operating Frequency: Channel:

802.11ac MCS0 3 Meters 5775MHz 155



Plot 7-122. Radiated Upper Band Edge Plot (Peak – UNII Band 3)



Plot 7-123. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFQ720AM	PETEST* ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 92 of 04
1M1907080114-07-R1.ZNF	7/8 - 8/2/2019	Portable Handset	Page 83 of 94



7.7 Radiated Spurious Emissions Measurements – Below 1GHz §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-22 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-22. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 120kHz (for emissions from 30MHz 1GHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- Trace was allowed to stabilize

FCC ID: ZNFQ720AM	POTEST:	MEASUREMENT REPORT (CERTIFICATION) LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	
1M1907080114-07- R1.ZNF	7/8 - 8/2/2019	Portable Handset	Page 84 of 94



Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

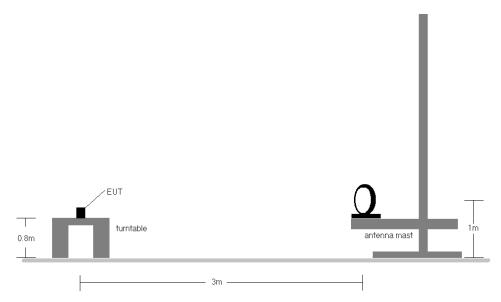


Figure 7-6. Radiated Test Setup < 30MHz

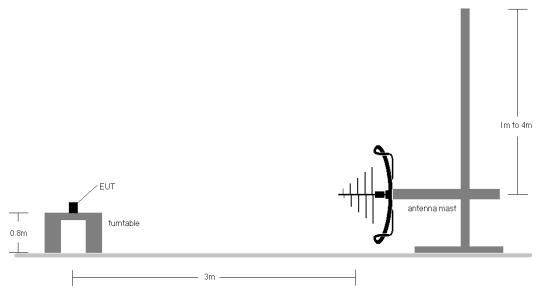


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: ZNFQ720AM	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		
1M1907080114-07- R1.ZNF	7/8 - 8/2/2019	Portable Handset		Page 85 of 94




Test Notes

- 1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-22.
- 2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
- 3. This unit was tested with its standard battery.
- 4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
- 5. Emissions were measured at a 3 meter test distance.
- 6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
- 7. No spurious emissions were detected within 20dB of the limit below 30MHz.
- 8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
- 9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz - 1GHz frequency range, as shown in the subsequent plots.

FCC ID: ZNFQ720AM	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		
1M1907080114-07- R1.ZNF	7/8 - 8/2/2019	Portable Handset		Page 86 of 94



Radiated Spurious Emissions Measurements (Below 1GHz) §15.209; RSS-Gen [8.9]

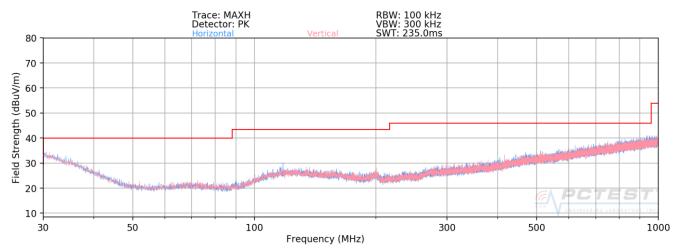

Plot 7-124. Radiated Spurious Plot below 1GHz (802.11a - U3 Ch. 157)

FCC ID: ZNFQ720AM	PCTEST' ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION) LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	
1M1907080114-07- R1.ZNF	7/8 - 8/2/2019	Portable Handset	Page 87 of 94



7.8 Line-Conducted Test Data

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
(IVITIZ)	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-23. Conducted Limits

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the spurious emission of interest
- RBW = 9kHz (for emissions from 150kHz 30MHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

Average Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the spurious emission of interest
- RBW = 9kHz (for emissions from 150kHz 30MHz)
- 3. Detector = RMS
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

FCC ID: ZNFQ720AM	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		
1M1907080114-07- R1.ZNF	7/8 - 8/2/2019	Portable Handset		Page 88 of 94

^{*}Decreases with the logarithm of the frequency.



Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

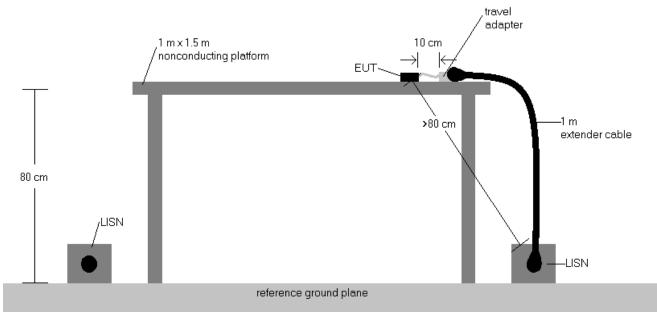



Figure 7-8. Test Instrument & Measurement Setup

Test Notes


- 1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
- 2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
- 3. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- 4. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Corr. (dB)
- 5. Margin (dB) = QP/AV Limit (dB μ V) - QP/AV Level (dB μ V)
- 6. Traces shown in plot are made using a peak detector.
- 7. Deviations to the Specifications: None.

FCC ID: ZNFQ720AM	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	① LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		
1M1907080114-07- R1.ZNF	7/8 - 8/2/2019	Portable Handset		Page 89 of 94



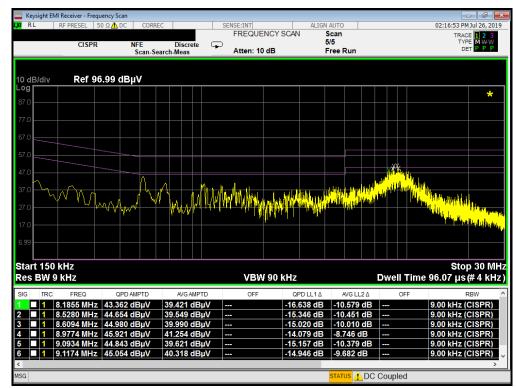

Plot 7-125. Line Conducted Plot with 802.11a UNII Band 1 (L1)

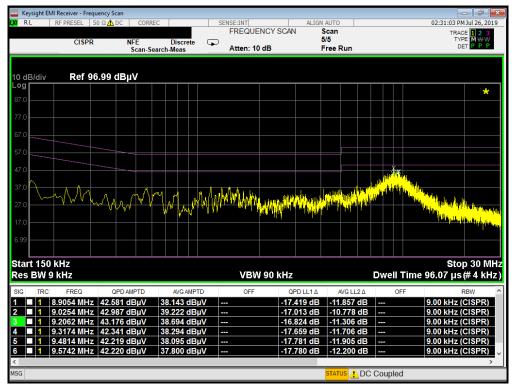


Plot 7-126. Line Conducted Plot with 802.11a UNII Band 1 (N)

FCC ID: ZNFQ720AM	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION) LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	
1M1907080114-07- R1.ZNF	7/8 - 8/2/2019	Portable Handset	Page 90 of 94


© 2019 PCTEST Engineering Laboratory, Inc.

V 9.0 02/01/2019



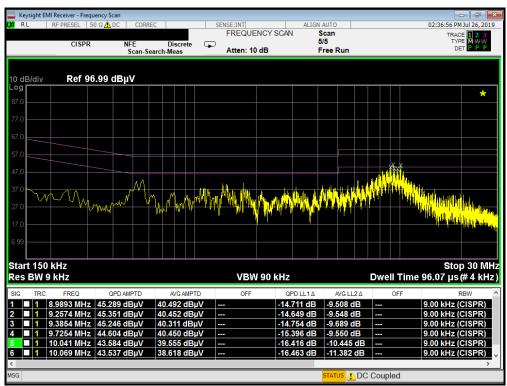


Plot 7-127. Line Conducted Plot with 802.11a UNII Band 2A (L1)

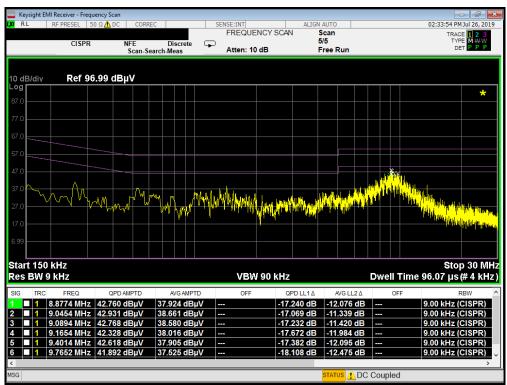


Plot 7-128. Line Conducted Plot with 802.11a UNII Band 2A (N)

FCC ID: ZNFQ720AM	PCTEST INGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION) LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	
1M1907080114-07- R1.ZNF	7/8 - 8/2/2019	Portable Handset	Page 91 of 94



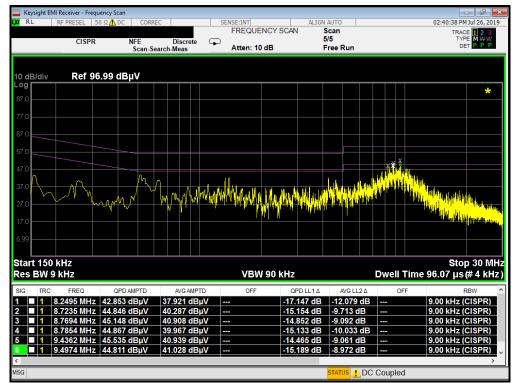

Plot 7-129. Line Conducted Plot with 802.11a UNII Band 2C (L1)

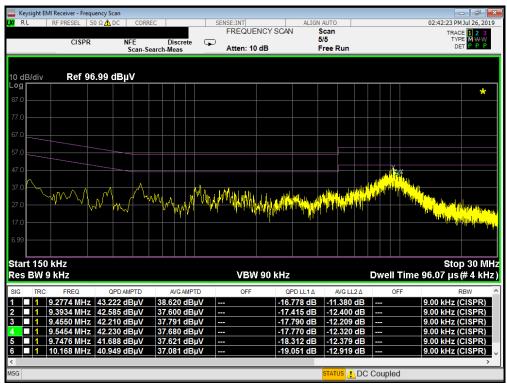


Plot 7-130. Line Conducted Plot with 802.11a UNII Band 2C (N)

FCC ID: ZNFQ720AM	PCTEST INGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION) LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	
1M1907080114-07- R1.ZNF	7/8 - 8/2/2019	Portable Handset	Page 92 of 94


© 2019 PCTEST Engineering Laboratory, Inc.

V 9.0 02/01/2019



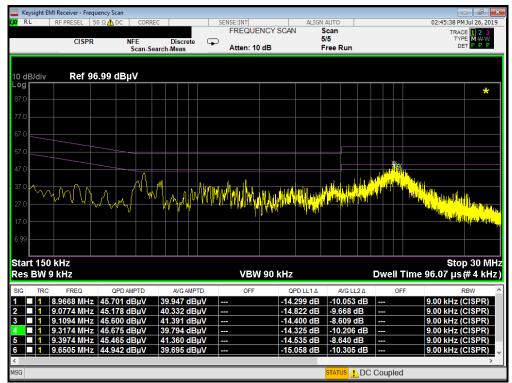

Plot 7-131. Line Conducted Plot with 802.11a UNII Band 3 (L1)

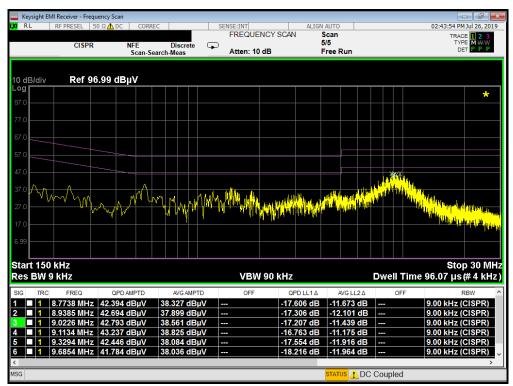

Plot 7-132. Line Conducted Plot with 802.11a UNII Band 3 (N)

FCC ID: ZNFQ720AM	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION) LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	
1M1907080114-07- R1.ZNF	7/8 - 8/2/2019	Portable Handset	Page 93 of 94

© 2019 PCTEST Engineering Laboratory, Inc.

V 9.0 02/01/2019



8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFQ720AM** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

FCC ID: ZNFQ720AM	ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION) LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	
1M1907080114-07- R1.ZNF	7/8 - 8/2/2019	Portable Handset	Page 94 of 94