

Test Report

Product Name	Desktop PC
Model No.	G35CG
FCC ID	MSQ-G35CG

Applicant	ASUSTeK COMPUTER INC.
Address	1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan

Date of Receipt	Dec. 09, 2022
Issued Date	Mar. 30, 2023
Report No.	22C0311R-RFUSV10S-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report




Product Name	Desktop PC
Applicant	ASUSTeK COMPUTER INC.
Address	1F., No. 15, Lide Rd., Beitou Dist., Taipei City 112, Taiwan
Manufacturer	ASUSTeK COMPUTER INC.
Model No.	G35CG
FCC ID	MSQ-G35CG
EUT Rated Voltage	AC 100-240V / 50-60Hz
EUT Test Voltage	AC 120V / 60Hz
Trade Name	ASUS
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :




(Senior Project Specialist / Genie Chang)

Tested By :



(Senior Engineer / Bill Lin)

Approved By :



(Senior Engineer / Jack Hsu)

TABLE OF CONTENTS

1. General Information.....	5
1.1. EUT Description	5
1.2. Tested System Details	6
1.3. Configuration of tested System	8
1.4. EUT Exercise Software	8
1.5. Test Facility	9
1.6. List of Test Equipment	10
1.7. Uncertainty	11
2. Conducted Emission	12
2.1. Test Setup	12
2.2. Limits	12
2.3. Test Procedure	12
2.4. Test Result of Conducted Emission.....	13
3. Radiated Emission	14
3.1. Test Setup	14
3.2. Limits	15
3.3. Test Procedure	16
3.4. Test Result of Radiated Emission.....	17
4. Band Edge	20
4.1. Test Setup	20
4.2. Limits	20
4.3. Test Procedure	20
4.4. Test Result of Band Edge	21
5. Frequency Tolerance	22
5.1. Test Setup	22
5.2. Limits	22
5.3. Test Procedure	22
5.4. Test Result of Frequency Stability	23
6. 20dB Bandwidth	25
6.1. Test Setup	25
6.2. Limits	25
6.3. Test Procedure	25
6.4. Test Result of 20dB Bandwidth.....	26

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 22C0311R-Product Photos

Revision History

Report No.	Version	Description	Issued Date
22C0311R-RFUSV10S-A	V1.0	Initial issue of report.	Mar. 30, 2023

1. General Information

1.1. EUT Description

Product Name	Desktop PC
Trade Name	ASUS
Model No.	G35CG
FCC ID	MSQ-G35CG
Frequency Range	13.56MHz
Modulation	ASK
Antenna Type	Loop

Antenna List

No.	Manufacturer	Part No.	Antenna Type
1	ASUS	60PD0340-NF0A01	Loop

Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	13.56	--	--	--	--	--	--

Note:

1. This device is a Desktop PC with a built-in 13.56MHz transceiver.
2. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.225.
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1	Transmit
-----------	--------	----------


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Monitor	Lenovo	H20215FE0	VY549709	Non-shielded, 1.8m
2 Monitor	DELL	U2415	CN-01RMGX-7426 1-63H-09UL-A02	Non-shielded, 1.8m
3 External HDD	Transcend	TS1TSJ25H3B	F21786-0125	N/A
4 External HDD	Transcend	TS1TSJ25H3B	F21786-0019	N/A
5 iPod shuffle	APPLE	A1373	CC4PW26LF4RY	N/A
6 Microphone & Earphone	KINYO	EM-2101	N/A	N/A
7 Microphone & Earphone	Verbatim	C09024VB	N/A	N/A
8 Microphone & Earphone	KINYO	EM-2101	N/A	N/A
9 FLASH 8GB	Kingston	DT100G3/8GB	N/A	N/A
10 Microphone & Earphone	Verbatim	C09024VB	N/A	N/A
11 Keyboard	Logitech	K120	N/A	N/A
12 Mouse	Logitech	U0026	N/A	N/A
13 External HDD	Transcend	TS1TSJ25H3B	F21786-0005	N/A
14 External HDD	Transcend	TS1TSJ25H3B	F21786-0103	N/A
15 USB 3.0	WD	WDBUZG0010BB K-PESN	WX11A166S2Y3	USB 3.0
16 Cambridge SoundWorks	DigiSun	AU263	N/A	N/A
17 FLASH 64GB	Transcend	JetFlash 790C	N/A	N/A
18 FLASH 64GB	Transcend	JetFlash 790C	N/A	N/A
19 FLASH 64GB	Transcend	JetFlash 790C	N/A	N/A
20 FLASH 8GB	Kingston	DT100G3/8GB	N/A	N/A
21 FLASH 8GB	Kingston	DT100G3/8GB	N/A	N/A
22 NFC TAG	ASUS	NFC TAG	N/A	N/A

Cable Type		Cable Description
A	HDMI Cable	Shielded, 1.8m
B	Display Cable	Shielded, 1.8m
C	HDMI Cable	Shielded, 1.8m
D	HDMI Cable	Shielded, 1.8m
E	Display Cable	Shielded, 1.8m
F	Display Cable	Shielded, 1.8m
G	Mini Display Cable	Shielded, 1.8m
H	USB Cable	Shielded, 0.5m
I	USB Cable	Shielded, 0.5m
J	3.5mm Audio Cable	Shielded, 1m
K	Microphone & Earphone Cable	Non-shielded, 1.7m
L	Microphone & Earphone Cable	Non-shielded, 1.2m
M	Microphone & Earphone Cable	Non-shielded, 1.7m
N	USB Cable	Shielded, 0.8m
O	Microphone & Earphone Cable	Non-shielded, 1.2m
P	USB Cable	Non-shielded, 1.5m
Q	USB Cable	Non-shielded, 1.8m
R	USB Cable	Shielded, 0.5m
S	USB Cable	Shielded, 0.5m
T	USB Cable	Shielded, 0.5m
U	Cambridge SoundWorks Cable	Non-shielded, 1m
V	Power to USB Cable	Non-shielded, 1m

1.3. Configuration of tested System

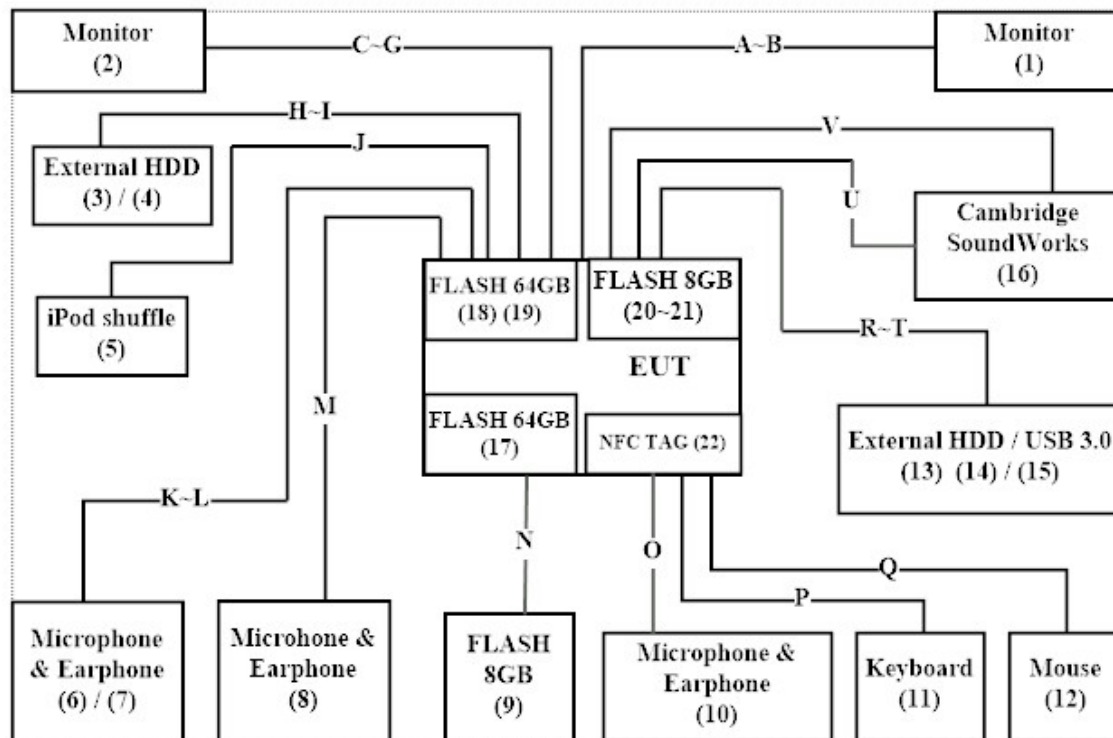

1.4. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.3
- (2) Turn on the power of all equipment.
- (3) Using NFC TAG to trigger NFC continuous transmission.
- (4) Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	23.4 °C
	Humidity (%RH)	10~90 %	55.2 %
Radiated Emission	Temperature (°C)	10~40 °C	21.0 °C
	Humidity (%RH)	10~90 %	60.0 %
Conductive	Temperature (°C)	10~40 °C	21.0 °C
	Humidity (%RH)	10~90 %	55.0 %

USA : FCC Registration Number: TW0033

Canada : CAB Identifier Number: TW3023 / Company Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd

Address : No. 5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan

Performed Location : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan,
R.O.C.

Phone Number : +886-3-275-7255

Fax Number : +886-3-327-8031

Email Address : info.tw@dekra.comWebsite : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conduction Measurements / HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2022/06/23	2023/06/22
V	Two-Line V-Network	R&S	ENV216	101306	2022/05/23	2023/05/22
V	Two-Line V-Network	R&S	ENV216	101307	2022/07/04	2023/07/03
V	Coaxial Cable	SUHNER	RG400_BNC	RF001	2022/05/24	2023/05/23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software Version: E3 210616 dekra V9.

For Conducted Measurements / HY-SR03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Temperature Chamber	KSON	THS-D4T-100	A0606	2022/08/23	2023/08/22
V	Spectrum Analyzer	R&S	FSV40	101149	2022/02/18	2023/02/17

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.

For Radiated measurements /HY-CB01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
	Loop Antenna	AMETEK	HLA6121	56736	2022/05/14	2023/05/13
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2021/08/11	2023/08/10
	Horn Antenna	RF SPIN	DRH18-E	210802A18ES	2022/06/08	2023/06/07
	Horn Antenna	Com-Power	AH-840	101087	2022/06/16	2023/06/15
V	Pre-Amplifier	SGH	SGH0301	20211007-7	2022/02/22	2023/02/21
	Pre-Amplifier	EMCI	EMC051835SE	980312	2022/02/22	2023/02/21
	Pre-Amplifier	EMCI	EMC05820SE	980362	2022/07/28	2023/07/27
	Pre-Amplifier	EMCI	EMC184045SE	980369	2022/05/12	2023/05/11
	Coaxial Cable	EMCI	EMC102-KM-K M-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-K M-7000	170242		
	Filter	MICRO TRONICS	BRM50702	G251	2022/07/27	2023/07/26
	Filter	MICRO TRONICS	BRM50716	G188	2022/07/27	2023/07/26
V	EMI Test Receiver	R&S	ESR3	102792	2021/12/15	2022/12/14
V	Spectrum Analyzer	R&S	FSV3044	101113	2022/01/25	2023/02/24
	Coaxial Cable	SUHNER	SUCOFLEX 106	25450/6	2022/03/22	2023/03/21
V	Coaxial Cable	SGH	HA800	GD20110222-8		
	Coaxial Cable	SGH	SGH18	2021003-8		
	Coaxial Cable	EMCI	EMC106	151113		

Note:

1. Bi-Log Antenna is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software version : E3 210616 dekra V9.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Conducted Emission	± 3.42 dB	
Radiated Emission	Under 1GHz ± 4.05 dB	Above 1GHz ± 4.10 dB
Band Edge	Under 1GHz ± 4.05 dB	Above 1GHz ± 4.10 dB
Frequency Tolerance	± 1544.74 Hz	

2. Conducted Emission

2.1. Test Setup

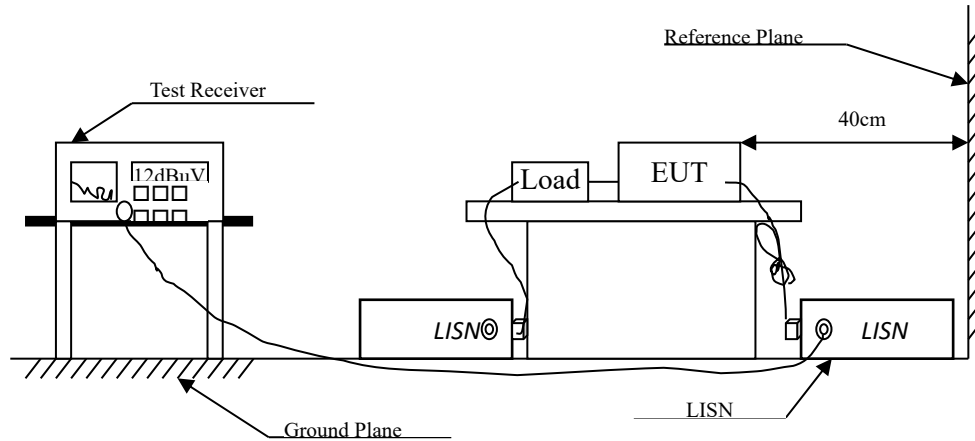

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50 - 5.0	56	46
5.0 - 30	60	50


2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.


2.4. Test Result of Conducted Emission

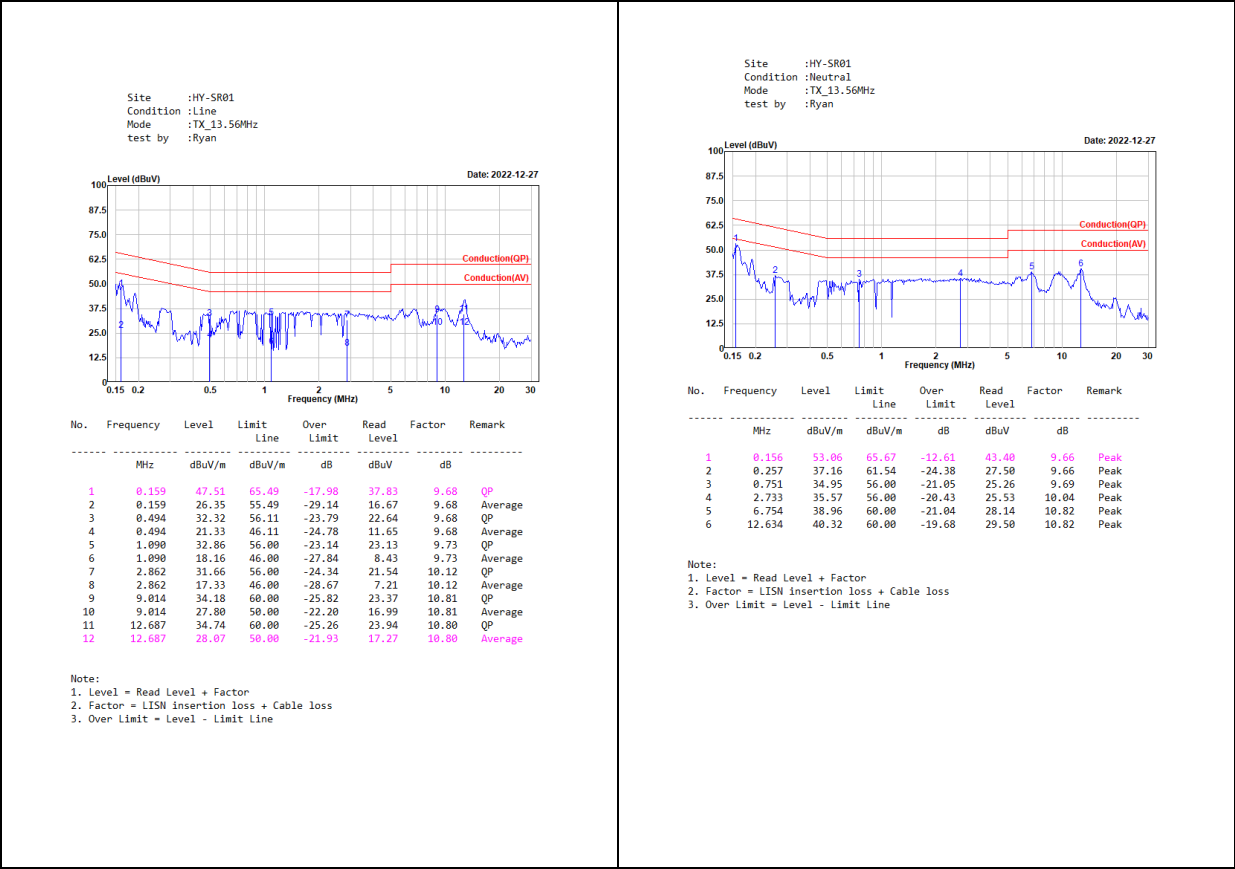


3. Radiated Emission

3.1. Test Setup

Radiated Emission Under 30MHz

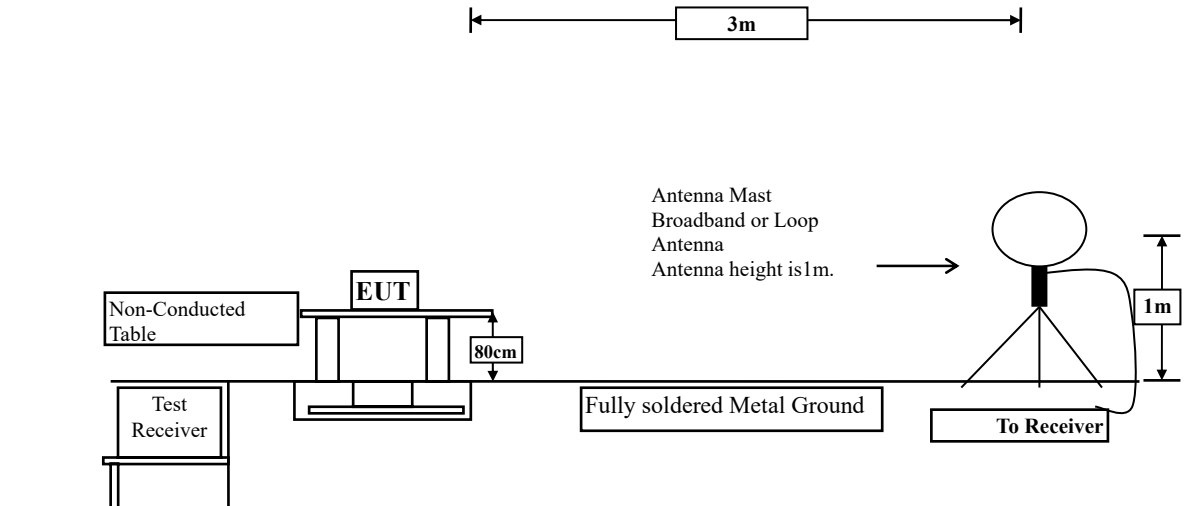

Radiated Emission Below 1GHz

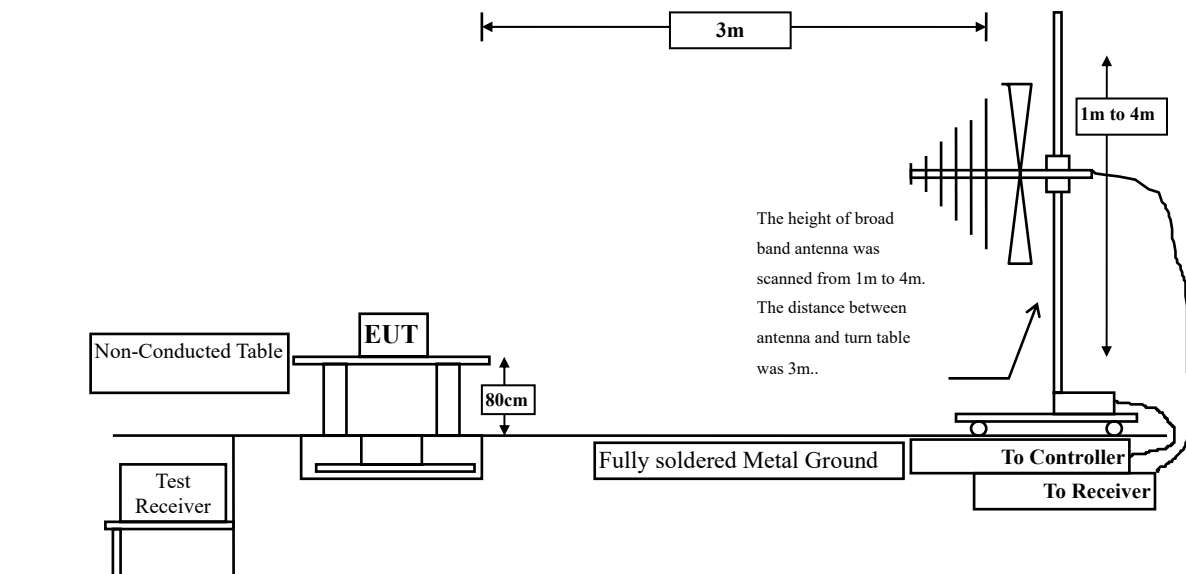

3.2. Limits

➤ Fundamental electric field strength Limit

FCC Part 15 Subpart C Paragraph 15.225 Limits				
Fundamental Frequency MHz	Field strength of fundamental			
	μV/m	Distance (meter)	dBμV/m	Distance (meter)
13.553 – 13.567	15848	30	124	3
13.410 – 13.553 and 13.567 – 13.710	334	30	90.47	3
13.110 – 13.410 and 13.710 – 14.010	106	30	80.50	3
Outside of the 13.110 – 14.010	See 15.209 Limits			

Remarks : 1. RF Voltage (dBμV) = 20 log RF Voltage (μV).

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. The emission limit in this paragraph is based on measurement instrumentation employing an quasi-peak detector.

➤ Spurious electric field strength Limit

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks :

1. RF Voltage (dBμV) = 20 log RF Voltage (μV).
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed.

3.3. Test Procedure

Fundamental electric field strength:

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum electric field strength. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna which is 1 meter above ground. All X-axis, Y-axis and Z-axis polarization of the antenna are set on measurement.

Spurious electric field strength:

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth below 30MHz setting on the field strength meter is 9kHz and above 30MHz is 120kHz.


The frequency range from 9kHz to 10th harmonics is checked.

3.4. Test Result of Radiated Emission





Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_30M-1G
TEST BY :Caster

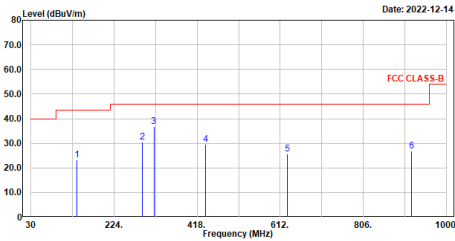


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	137.670	23.16	43.50	-20.34	47.88	-24.72	QP
2	289.960	30.42	46.00	-15.58	54.19	-23.77	QP
3	317.120	36.79	46.00	-9.21	59.66	-22.87	QP
4	438.370	29.58	46.00	-16.42	49.24	-19.66	QP
5	628.490	25.63	46.00	-20.37	41.43	-15.80	QP
6	918.520	26.83	46.00	-19.17	38.81	-11.98	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_30M-1G
TEST BY :Caster

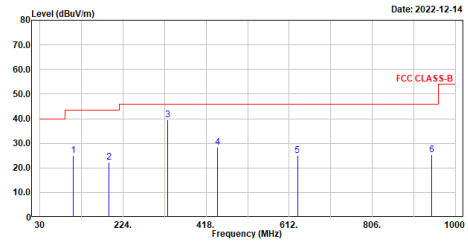

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Mhz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB	
1	107.600	25.00	43.50	-18.50	52.64	-27.64	QP
2	191.990	22.41	43.50	-21.09	49.26	-26.85	QP
3	328.760	39.67	46.00	-6.33	62.20	-22.53	QP
4	445.160	28.27	46.00	-17.73	47.83	-19.56	QP
5	631.400	24.91	46.00	-21.09	40.60	-15.69	QP
6	944.710	25.32	46.00	-20.68	37.08	-11.76	QP


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

4. Band Edge

4.1. Test Setup

Radiated Emission Under 30MHz

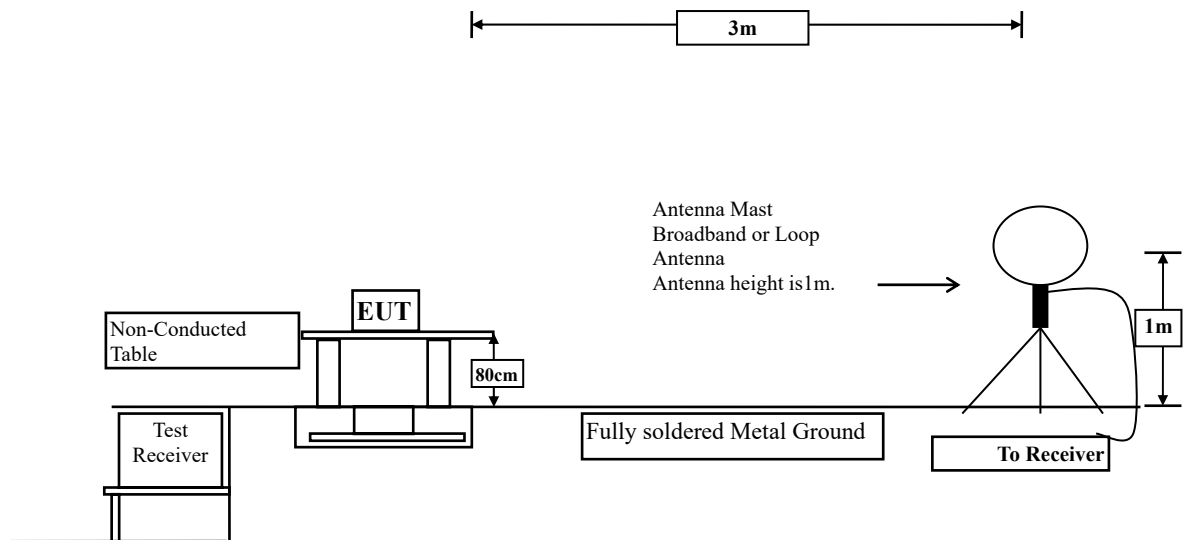

4.2. Limits

The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in Section 15.209. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209

4.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.


The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.


The bandwidth below 30MHz setting on the field strength meter is 9kHz and above 30MHz is 120kHz.

4.4. Test Result of Band Edge

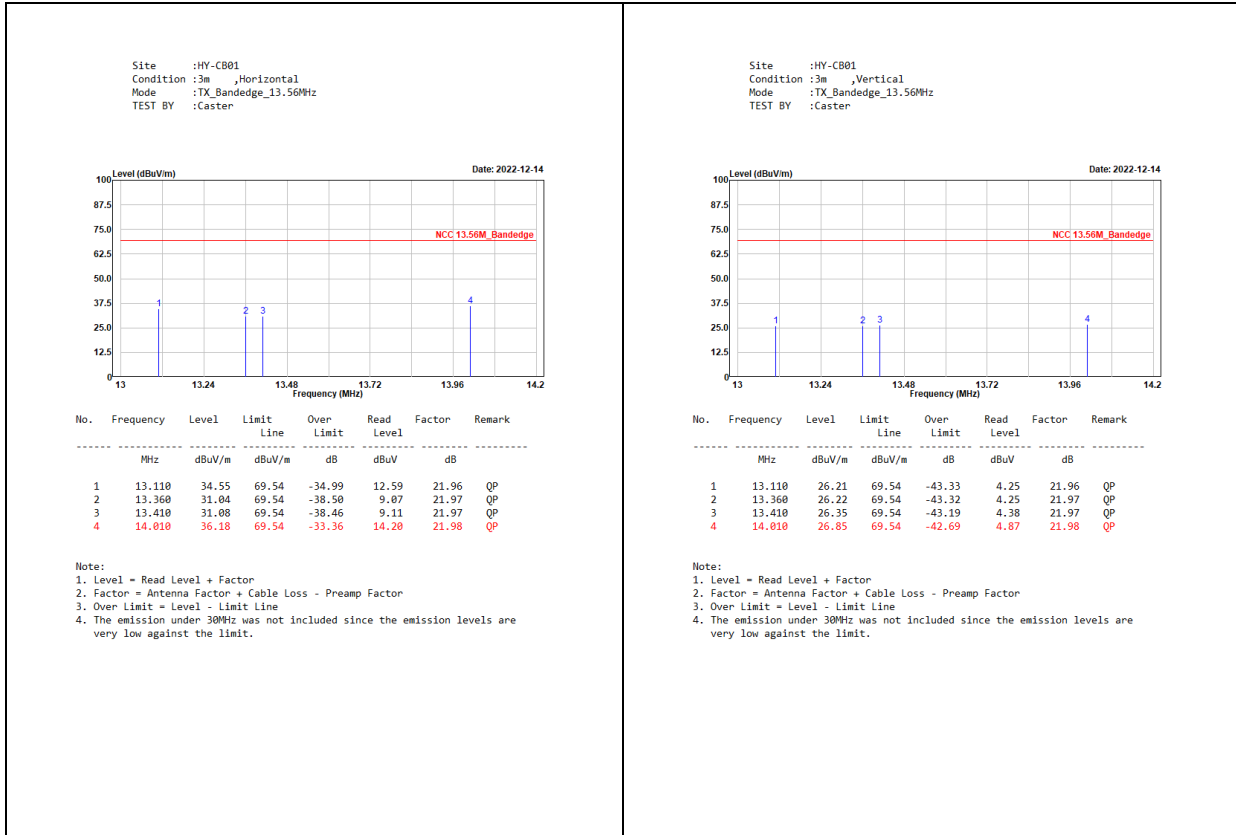

5. Frequency Tolerance

5.1. Test Setup

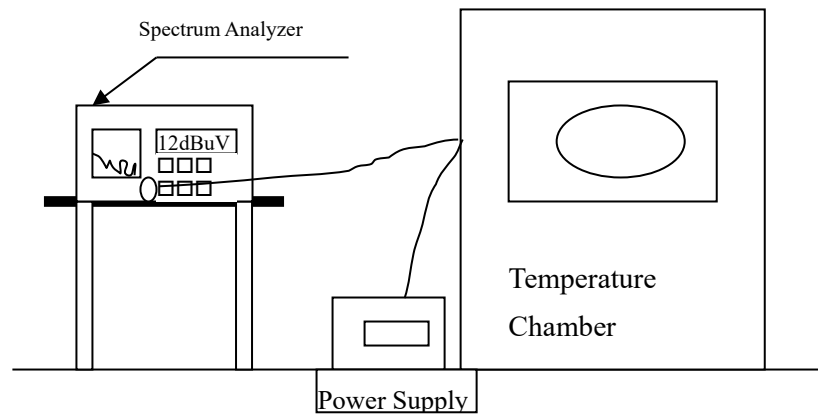

5.2. Limits

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

5.3. Test Procedure

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

5.4. Test Result of Frequency Stability


Product : Desktop PC
 Test Item : Frequency Tolerance
 Test Mode : Transmit
 Test date : 2022/12/28

Temperature (°C)	Voltage (V)	Observe Time	Declared Frequency (MHz)	Read Frequency (MHz)	Tolerance (%)	Limit (%)
20	230	start	13.56	13.55970	-0.002212	±0.01 %
		2mins	13.56	13.55970	-0.002212	
		5mins	13.56	13.55970	-0.002212	
		10mins	13.56	13.55970	-0.002212	
20	253	start	13.56	13.55968	-0.002360	±0.01 %
		2mins	13.56	13.55968	-0.002360	
		5mins	13.56	13.55968	-0.002360	
		10mins	13.56	13.55968	-0.002360	
20	207	start	13.56	13.55968	-0.002360	±0.01 %
		2mins	13.56	13.55968	-0.002360	
		5mins	13.56	13.55968	-0.002360	
		10mins	13.56	13.55968	-0.002360	
50	230	start	13.56	13.55968	-0.002360	±0.01 %
		2mins	13.56	13.55968	-0.002360	
		5mins	13.56	13.55967	-0.002434	
		10mins	13.56	13.55967	-0.002434	
40	230	start	13.56	13.55968	-0.002360	±0.01 %
		2mins	13.56	13.55968	-0.002360	
		5mins	13.56	13.55968	-0.002360	
		10mins	13.56	13.55967	-0.002434	
30	230	start	13.56	13.55969	-0.002286	±0.01 %
		2mins	13.56	13.55969	-0.002286	
		5mins	13.56	13.55969	-0.002286	
		10mins	13.56	13.55968	-0.002360	

10	230	start	13.56	13.55970	-0.002212	± 0.01 %
		2mins	13.56	13.55970	-0.002212	
		5mins	13.56	13.55970	-0.002212	
		10mins	13.56	13.55970	-0.002212	
0	230	start	13.56	13.55970	-0.002212	± 0.01 %
		2mins	13.56	13.55970	-0.002212	
		5mins	13.56	13.55969	-0.002286	
		10mins	13.56	13.55969	-0.002286	
-10	230	start	13.56	13.55969	-0.002286	± 0.01 %
		2mins	13.56	13.55968	-0.002360	
		5mins	13.56	13.55968	-0.002360	
		10mins	13.56	13.55968	-0.002360	
-20	230	start	13.56	13.55968	-0.002360	± 0.01 %
		2mins	13.56	13.55968	-0.002360	
		5mins	13.56	13.55968	-0.002360	
		10mins	13.56	13.55967	-0.002434	

6. 20dB Bandwidth

6.1. Test Setup

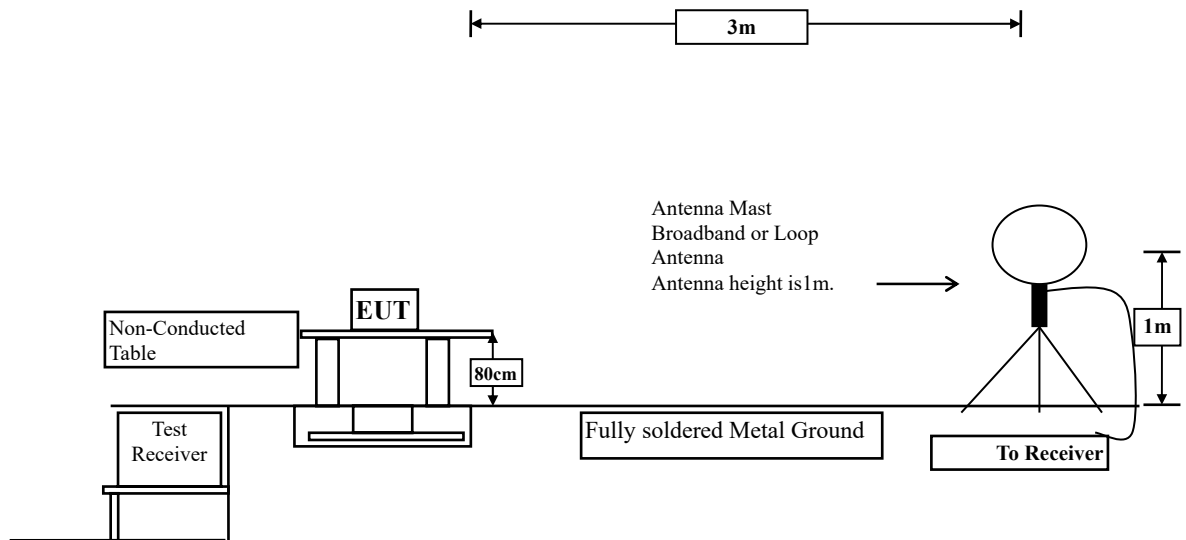

6.2. Limits

The 20dB Bandwidth must be specified in operating frequency band (13.11-14.01 MHz).


6.3. Test Procedure

The EUT was setup according to ANSI C63.4, 2014; tested according to ANSI C63.10 Section 6.9.2 for compliance to FCC 47CFR 15.215 requirements.

6.4. Test Result of 20dB Bandwidth

Product : Desktop PC
 Test Item : 20dB Bandwidth
 Test Mode : Transmit
 Test date : 2023/03/22

Frequency (MHz)	20dB Bandwidth (Hz)	Measurement Level (MHz)	Required Limit (MHz)	Result
13.56	524.5	13.559	>13.11	Pass
		13.559	<14.01	Pass

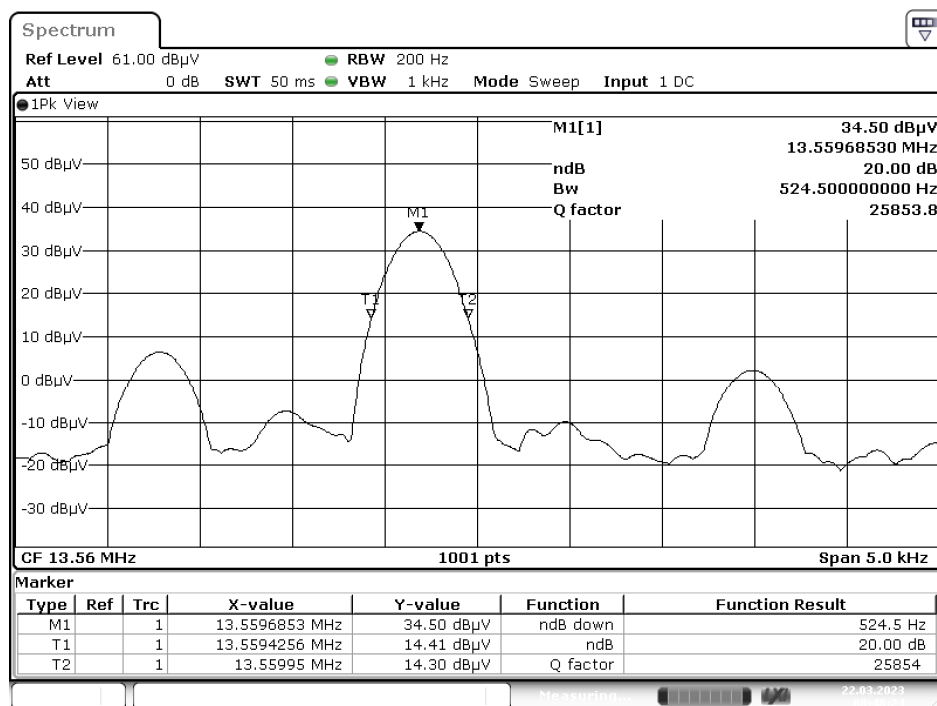

Date: 22.MAR.2023 08:48:24