

TEST REPORT

Report No.: BCTC2011289821E

Applicant: Bird Home Automation GmbH

Product Name: IP Video Camera

Model/Type
reference: B101

Tested Date: 2021-07-12 to 2021-07-21

Issued Date: 2021-07-21




Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2AD99B007D

Product Name: IP Video Camera
Trademark: DoorBird
Model/Type reference: B101
Prepared For: Bird Home Automation GmbH
Address: Uhlandstr. 165, 10719 Berlin, Germany
Manufacturer: Bird Home Automation GmbH
Address: Uhlandstr. 165, 10719 Berlin, Germany
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan
1st Road, Tangwei, Fuhai Subdistrict, Bao'an District,
Shenzhen, Guangdong, China
Sample Received Date: 2021-07-12
Sample tested Date: 2021-07-12 to 2021-07-21
Issue Date: 2021-07-21
Report No.: BCTC2011289821E
Test Standards: FCC Part15.247
ANSI C63.10-2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Tested by:



Willem Wang/Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	5
2. TEST SUMMARY	6
3. MEASUREMENT UNCERTAINTY	7
4. PRODUCT INFORMATION AND TEST SETUP	8
4.1 Product Information	8
4.2 Test Setup Configuration	8
4.3 Support Equipment	9
4.4 Channel List	9
4.5 Test Mode	10
4.6 table of parameters of text software setting	10
5. TEST FACILITY AND TEST INSTRUMENT USED	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. CONDUCTED EMISSIONS	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 EUT operating Conditions	13
6.5 Test Result	14
7. RADIATED EMISSIONS	18
7.1 Block Diagram Of Test Setup	18
7.2 Limit	19
7.3 Test procedure	20
7.4 EUT operating Conditions	21
7.5 Test Result	22
8. RADIATED BAND EMISSION MEASUREMENT AND RESTRICTED BANDS OF OPERATION	31
8.1 Block Diagram Of Test Setup	31
8.2 Limit	31
8.3 Test procedure	32
8.4 EUT operating Conditions	32
8.5 Test Result	33
9. POWER SPECTRAL DENSITY TEST	35
9.1 Block Diagram Of Test Setup	35
9.2 Limit	35
9.3 Test procedure	35
9.4 EUT operating Conditions	35
9.5 Test Result	36
10. BANDWIDTH TEST	43

10.1	Block Diagram Of Test Setup	43
10.2	Limit	43
10.3	Test procedure	43
10.4	EUT operating Conditions	43
10.5	Test Result	44
11.	PEAK OUTPUT POWER TEST	52
11.1	Block Diagram Of Test Setup	52
11.2	Limit	52
11.3	Test procedure	52
11.4	EUT operating Conditions	52
11.5	Test Result	53
12.	100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	54
12.1	Block Diagram Of Test Setup	54
12.2	Limit	54
12.3	Test procedure	54
12.4	EUT operating Conditions	54
12.5	Test Result	55
13.	DUTY CYCLE OF TEST SIGNAL	63
13.1	Standard requirement	63
13.2	Formula	63
13.3	Test procedure	63
13.4	Test Result	63
14.	ANTENNA REQUIREMENT	66
14.1	Limit	66
14.1	Test Result	66
15.	EUT PHOTOGRAPHS	67
16.	EUT TEST SETUP PHOTOGRAPHS	69

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
BCTC2011289821E	2021-07-21	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Conducted Emission	15.207	PASS
2	6dB Bandwidth	15.247 (a)(2)	PASS
3	Peak Output Power	15.247 (b)	PASS
4	Radiated Spurious Emission	15.247 (d)	PASS
5	Power Spectral Density	15.247 (e)	PASS
6	Restricted Band of Operation	15.205	PASS
7	Band Edge (Out of Band Emissions)	15.247 (d)	PASS
8	Antenna Requirement	15.203	PASS

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. PRODUCT INFORMATION AND TEST SETUP


4.1 Product Information

Model/Type reference:	B101
Model differences:	N/A
Hardware Version:	A1.1
Software Version:	A1.1
Operation Frequency:	802.11b/g/n20MHz: 2412MHz ~2462MHz 802.11n40MHz: 2422MHz ~2452MHz
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps
Type of Modulation:	WIFI: OFDM/DSSS
Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH
Antenna installation:	External antenna
Antenna Gain:	1dBi
Ratings:	DC 15V 1A DC 48V (POE)
Adapter	Model: UT20S-150100I Input: AC 100-240V 50/60Hz 0.4A Output: DC 15V 1A


4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
E-1	IP Video Camera	DoorBird	B101	N/A	EUT	E-1
E-2	Adapter	N/A	UT20-150100W	N/A	Auxiliary	E-2

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List for 802.11b/g/n(20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422
04	2427	05	2432	06	2437
07	2442	08	2447	09	2452
10	2457	11	2462		

Channel List for 802.11n(40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432
06	2437	07	2442	08	2447
09	2452				

4.5 Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

Radiated Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

4.6 table of parameters of test software setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	SecureCRT		
Frequency	2412 MHz	2437 MHz	2462 MHz
Parameters	DEF	DEF	DEF
Frequency	2422MHz	2437MHz	2452MHz
Parameters	DEF	DEF	DEF

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

5.2 Test Instrument Used


Conducted emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
LISN	R&S	ENV216	101375	May 28, 2021	May 27, 2022
ISN	HPX	ISN T800	S150900 1	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	EMC-CO N 3A1	\	\

RF conducted test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419B	\	May 28, 2021	May 27, 2022
Power Sensor (AV)	Keysight	E9 300A	\	May 28, 2021	May 27, 2022
Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY4910006 0	May 28, 2021	May 27, 2022
Spectrum Analyzer 9kHz-40GHz	R&S	FSP40	100363	May 28, 2021	May 27, 2022

Radiated emissions Test (966 chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
Receiver	R&S	ESRP	101154	May 28, 2021	May 27, 2022
Amplifier	SKET	LAPA_01G 18G-45dB	\	May 28, 2021	May 27, 2022
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 28, 2021	May 27, 2022
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	VULB9163 -942	Jun. 01, 2021	May 31, 2022
Horn Antenna	SCHWARZBE CK	BBHA9120 D	1541	Jun. 02, 2021	Jun. 01, 2022
Horn Antenna (18GHz-40 GHz)	SCHWARZBE CK	BBHA9170	822	Jun. 10, 2020	Jun. 09, 2021
Amplifier (18GHz-40 GHz)	MITEQ	TTA1840-3 5-HG	2034381	May 28, 2021	May 27, 2022
Loop Antenna (9kHz-30M Hz)	SCHWARZBE CK	FMZB1519 B	014	Jun. 02, 2021	Jun. 01, 2022
RF cables1 (9kHz-30MH z)	Huber+Suhnar	9kHz-30M Hz	B1702988- 0008	May 28, 2021	May 27, 2022
RF cables2 (30MHz-1G Hz)	Huber+Suhnar	30MHz-1G Hz	1486150	May 28, 2021	May 27, 2022
RF cables3 (1GHz-40G Hz)	Huber+Suhnar	1GHz-40G Hz	1607106	May 28, 2021	May 27, 2022
Power Metter	Keysight	E4419B	\	May 28, 2021	May 27, 2022
Power Sensor (AV)	Keysight	E9 300A	\	May 28, 2021	May 27, 2022
Signal Analyzer 20kHz-26.5 GHz	KEYSIGHT	N9020A	MY491000 60	May 28, 2021	May 27, 2022
Spectrum Analyzer 9kHz-40G Hz	R&S	FSP40	100363	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. CONDUCTED EMISSIONS

6.1 Block Diagram Of Test Setup

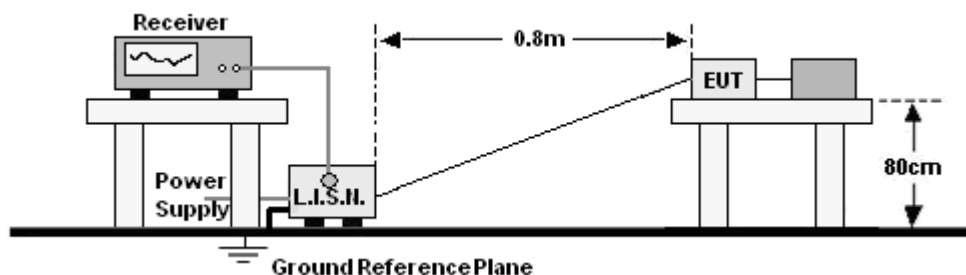

6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:
1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	AC120V/60Hz
Test Mode :	Mode 5	Polarization :	L

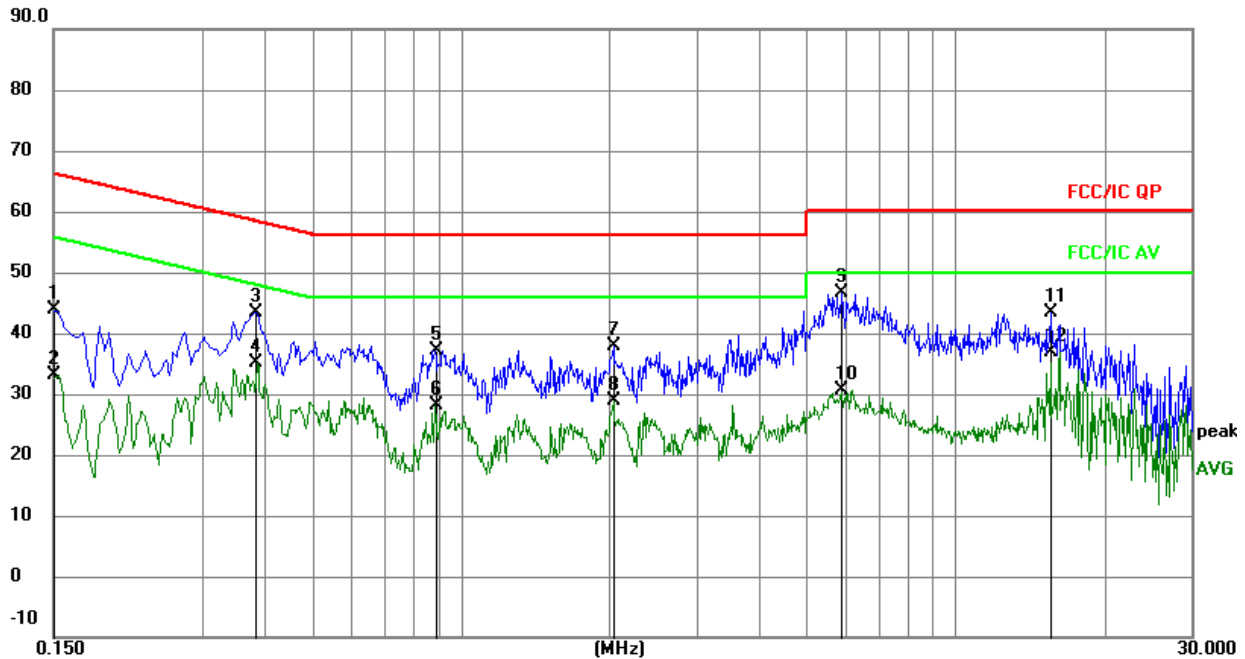


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	34.31	9.52	43.83	66.00	-22.17	QP
2		0.1500	23.56	9.52	33.08	56.00	-22.92	AVG
3		0.3832	33.86	9.51	43.37	58.21	-14.84	QP
4	*	0.3832	25.69	9.51	35.20	48.21	-13.01	AVG
5		0.8850	27.61	9.60	37.21	56.00	-18.79	QP
6		0.8850	18.54	9.60	28.14	46.00	-17.86	AVG
7		2.0333	28.34	9.59	37.93	56.00	-18.07	QP
8		2.0333	19.32	9.59	28.91	46.00	-17.09	AVG
9		5.8980	36.84	9.76	46.60	60.00	-13.40	QP
10		5.8980	20.78	9.76	30.54	50.00	-19.46	AVG
11		15.5523	33.72	9.71	43.43	60.00	-16.57	QP
12		15.5523	27.16	9.71	36.87	50.00	-13.13	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	AC120V/60Hz
Test Mode :	Mode 5	Polarization :	N

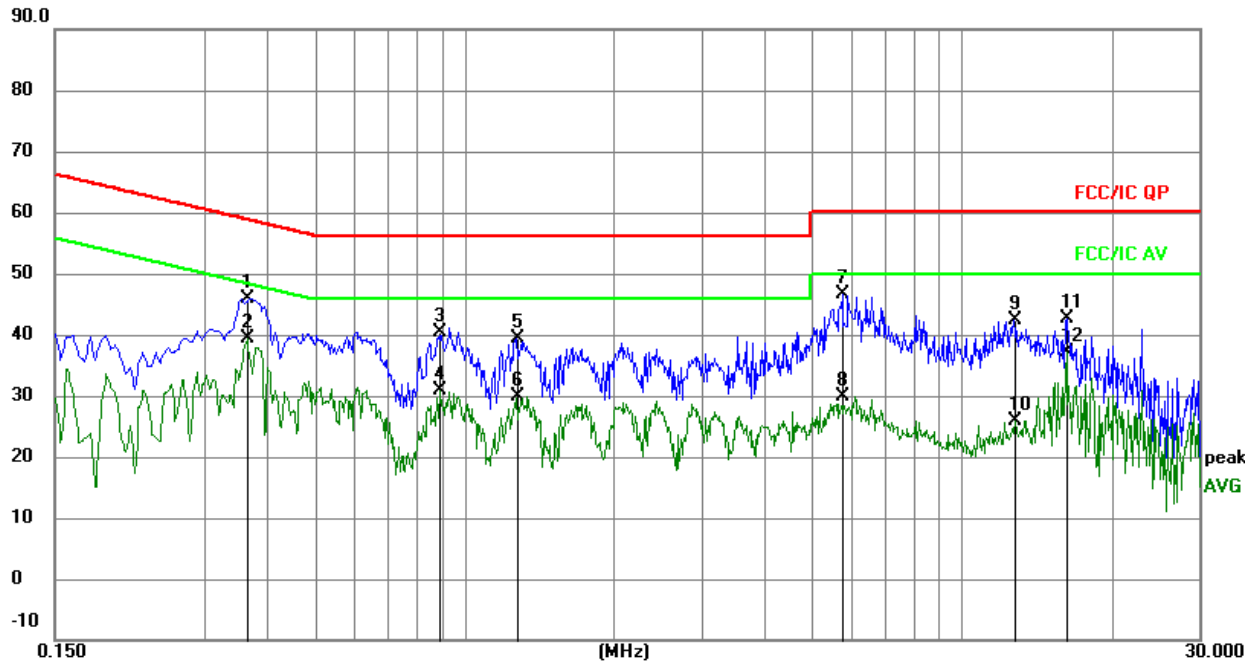


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.3660	36.41	9.53	45.94	58.59	-12.65	QP
2	*	0.3660	29.77	9.53	39.30	48.59	-9.29	AVG
3		0.8925	30.67	9.60	40.27	56.00	-15.73	QP
4		0.8925	21.35	9.60	30.95	46.00	-15.05	AVG
5		1.2705	29.79	9.58	39.37	56.00	-16.63	QP
6		1.2705	20.24	9.58	29.82	46.00	-16.18	AVG
7		5.7480	36.83	9.77	46.60	60.00	-13.40	QP
8		5.7480	20.21	9.77	29.98	50.00	-20.02	AVG
9		12.7680	32.61	9.70	42.31	60.00	-17.69	QP
10		12.7680	16.19	9.70	25.89	50.00	-24.11	AVG
11		16.2285	32.80	9.72	42.52	60.00	-17.48	QP
12		16.2285	27.51	9.72	37.23	50.00	-12.77	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 48V(POE)
Test Mode :	Mode 5	Polarization :	L

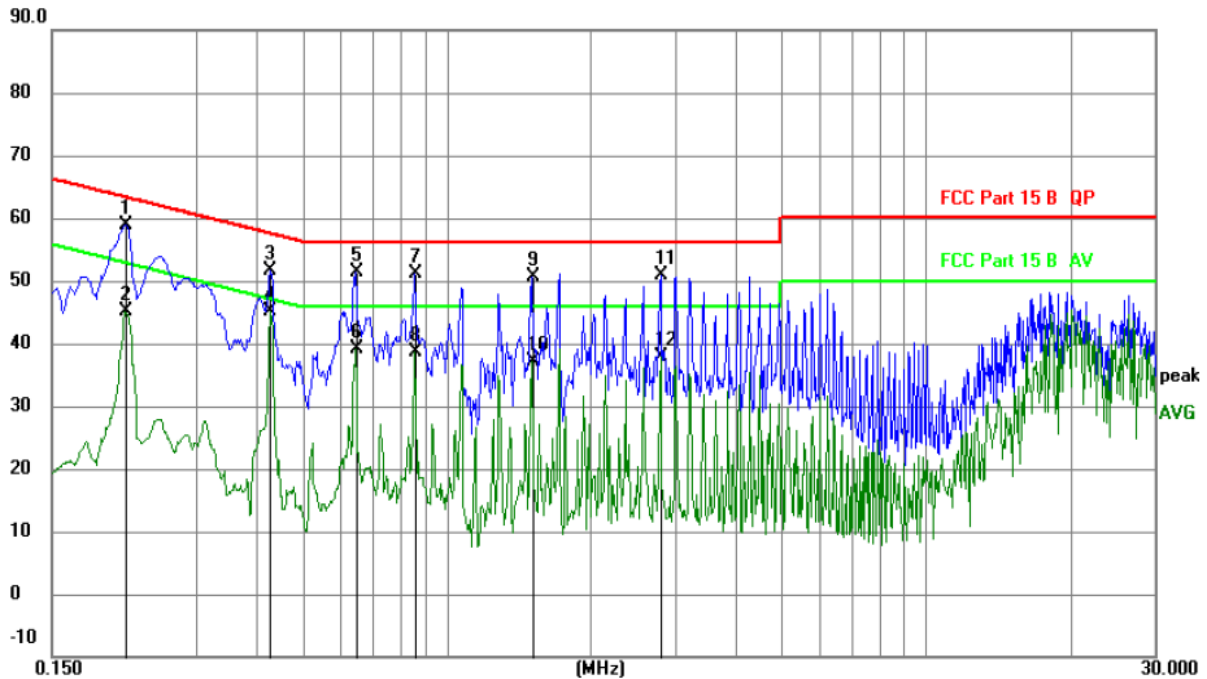


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz		dB	dBuV	dBuV	dB	Detector
1		0.2128	39.36	19.60	58.96	63.10	-4.14	QP
2		0.2128	25.45	19.60	45.05	53.10	-8.05	AVG
3		0.4282	32.00	19.61	51.61	57.29	-5.68	QP
4	*	0.4282	25.44	19.61	45.05	47.29	-2.24	AVG
5		0.6440	31.81	19.61	51.42	56.00	-4.58	QP
6		0.6440	19.54	19.61	39.15	46.00	-6.85	AVG
7		0.8573	31.58	19.61	51.19	56.00	-4.81	QP
8		0.8573	19.04	19.61	38.65	46.00	-7.35	AVG
9		1.5033	30.92	19.62	50.54	56.00	-5.46	QP
10		1.5033	17.52	19.62	37.14	46.00	-8.86	AVG
11		2.7942	31.19	19.64	50.83	56.00	-5.17	QP
12		2.7942	18.15	19.64	37.79	46.00	-8.21	AVG

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 48V(POE)
Test Mode :	Mode 5	Polarization :	N

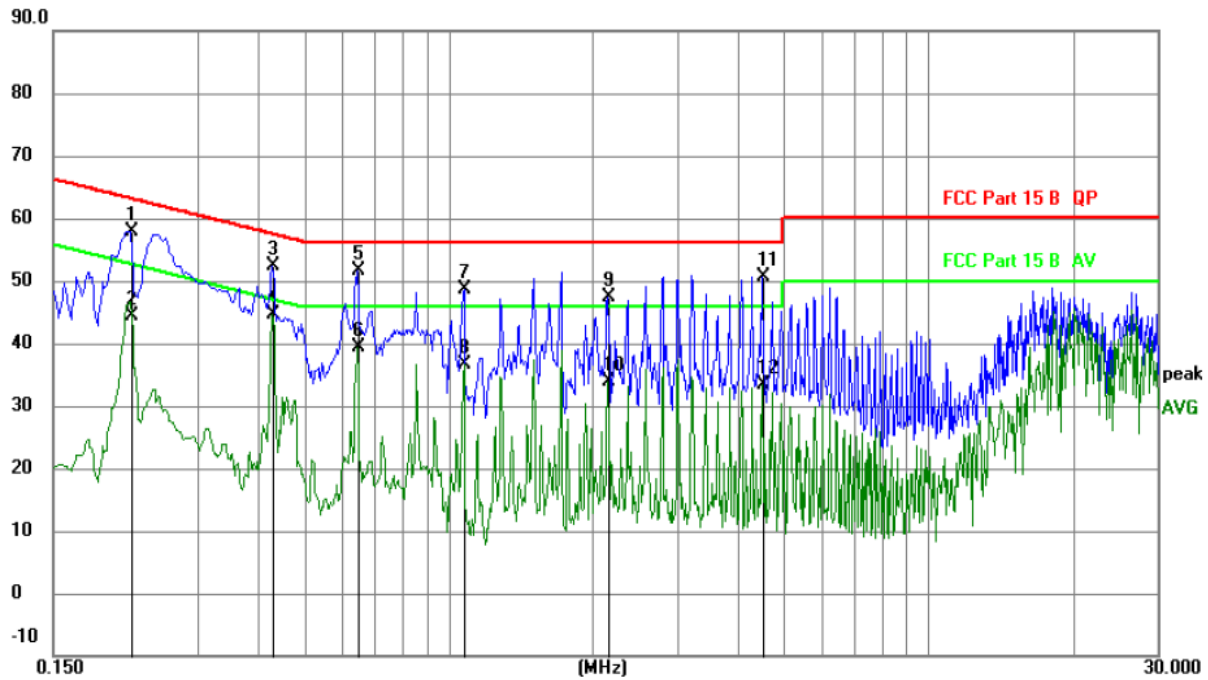

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2175	38.38	19.60	57.98	62.91	-4.93	QP
2		0.2175	24.72	19.60	44.32	52.91	-8.59	AVG
3		0.4290	32.68	19.61	52.29	57.27	-4.98	QP
4	*	0.4290	25.11	19.61	44.72	47.27	-2.55	AVG
5		0.6450	31.98	19.61	51.59	56.00	-4.41	QP
6		0.6450	19.70	19.61	39.31	46.00	-6.69	AVG
7		1.0770	28.97	19.62	48.59	56.00	-7.41	QP
8		1.0770	17.01	19.62	36.63	46.00	-9.37	AVG
9		2.1525	27.72	19.62	47.34	56.00	-8.66	QP
10		2.1525	14.37	19.62	33.99	46.00	-12.01	AVG
11		4.5150	31.01	19.69	50.70	56.00	-5.30	QP
12		4.5150	13.59	19.69	33.28	46.00	-12.72	AVG


7. RADIATED EMISSIONS

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

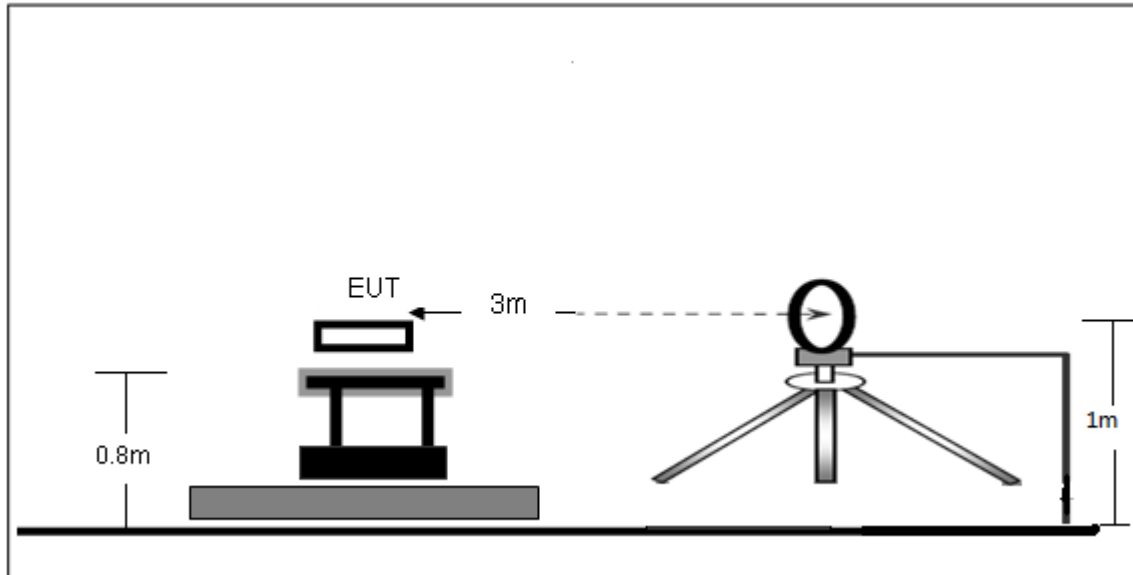

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

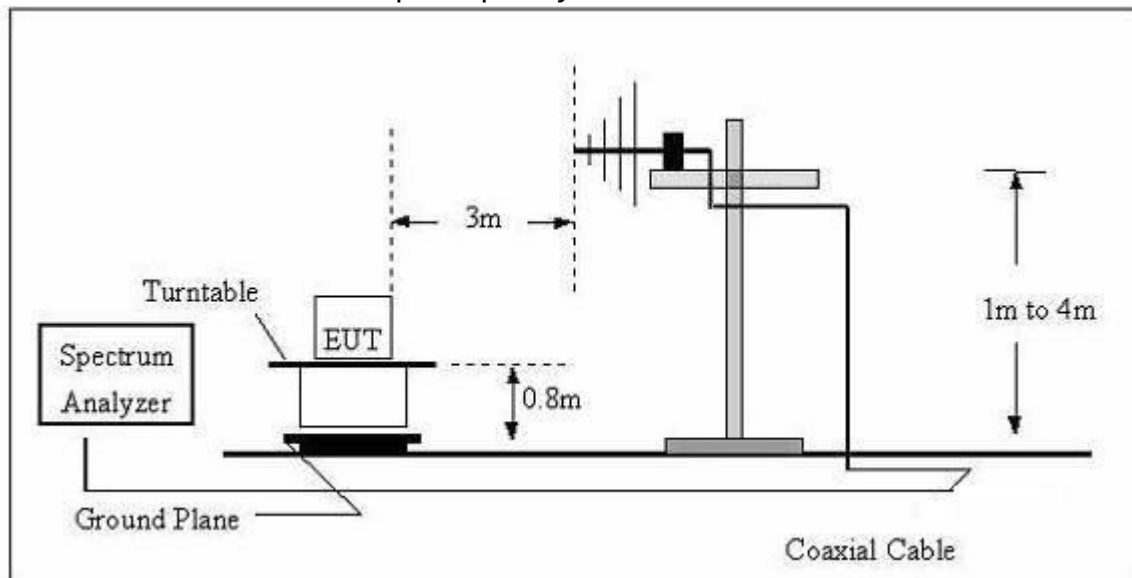

(C) Radiated Emission Test-Up Frequency Above 1GHz

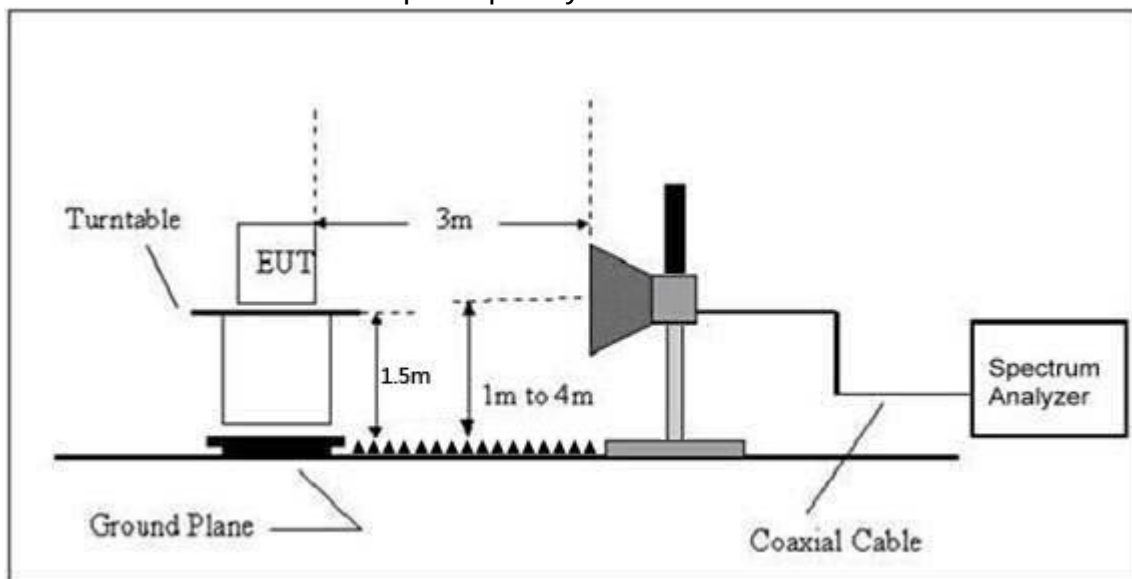

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(kHz)$	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(kHz)$	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT

(a) For an intentional radiator

the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.

(5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1)through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel , the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26°C	Relative Humidity:	24%
Pressure:	101 kPa	Test Voltage :	AC120V/60Hz
Test Mode :	Mode 5	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	AC120V/60Hz
Test Mode :	Mode 5	Polarization :	Horizontal

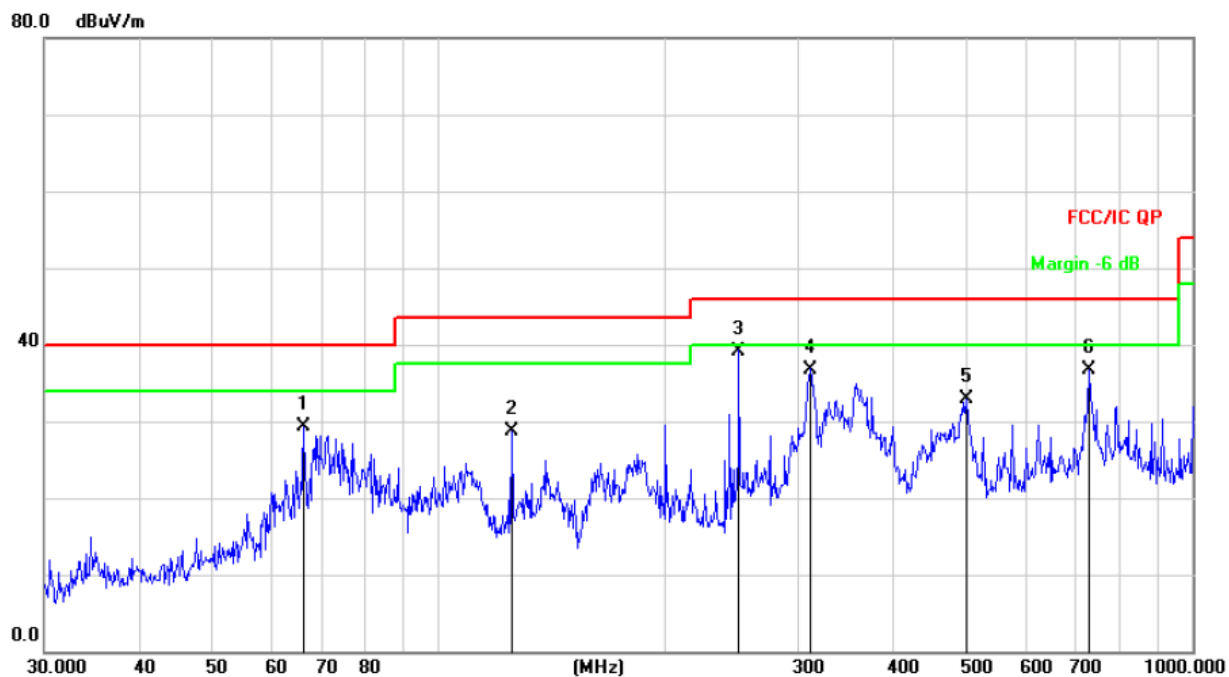


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		66.2662	46.58	-17.34	29.24	40.00	-10.76	QP
2		125.0066	46.62	-17.89	28.73	43.50	-14.77	QP
3	*	250.3012	54.34	-15.14	39.20	46.00	-6.80	QP
4		311.0867	50.10	-13.30	36.80	46.00	-9.20	QP
5		501.1790	41.85	-8.91	32.94	46.00	-13.06	QP
6		729.3583	41.41	-4.67	36.74	46.00	-9.26	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	AC120V/60Hz
Test Mode :	Mode 5	Polarization :	Vertical

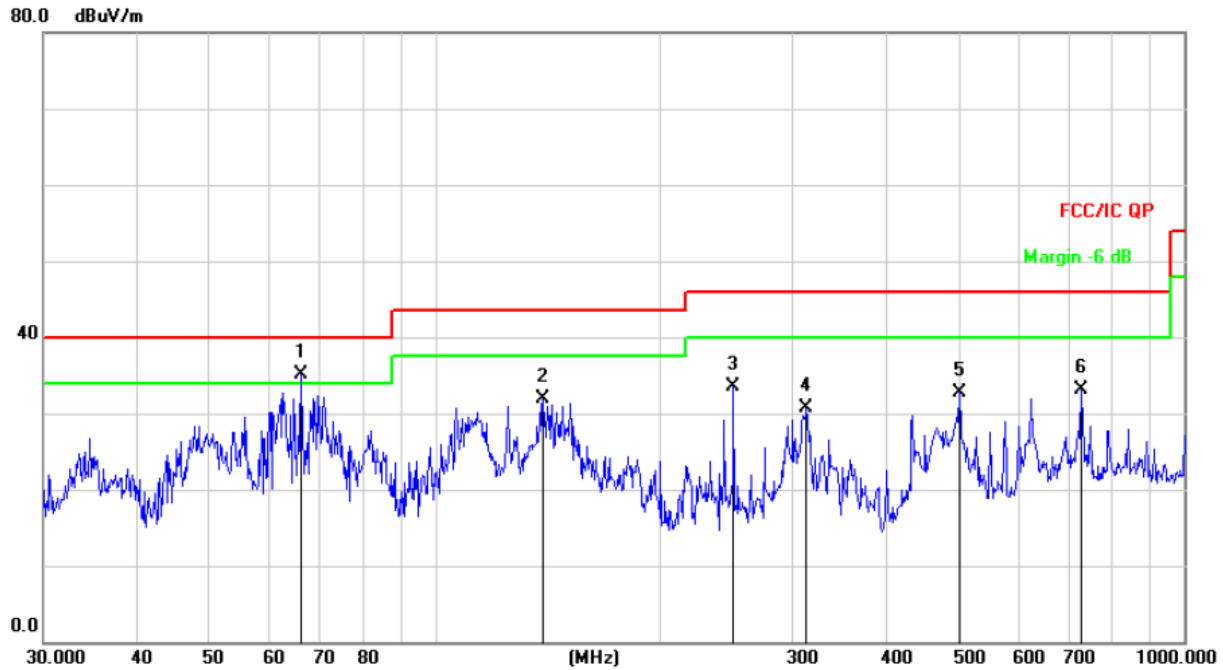


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1	*	66.2660	52.50	-17.34	35.16	40.00	-4.84	QP
2		139.3613	50.75	-18.81	31.94	43.50	-11.56	QP
3		250.3012	48.58	-15.14	33.44	46.00	-12.56	QP
4		313.2760	43.92	-13.24	30.68	46.00	-15.32	QP
5		501.1790	41.60	-8.91	32.69	46.00	-13.31	QP
6		729.3583	37.81	-4.67	33.14	46.00	-12.86	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	DC 48V(POE)
Test Mode :	Mode 5	Polarization :	Horizontal

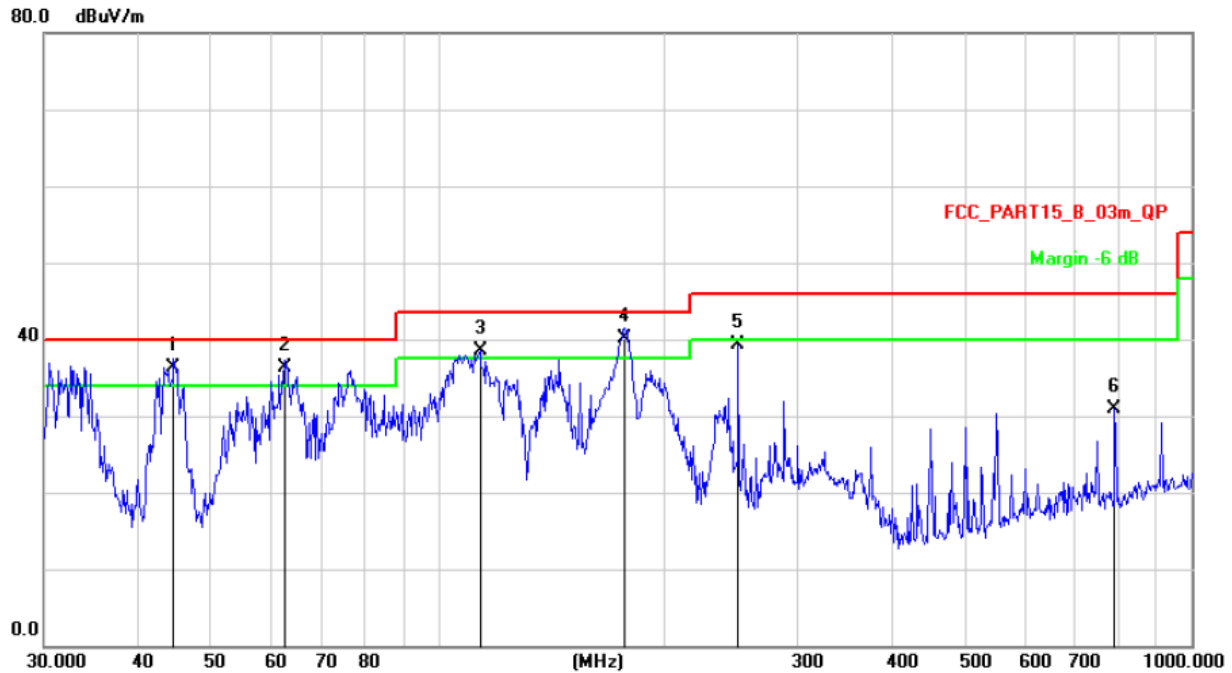


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	!	44.5868	51.48	-15.15	36.33	40.00	-3.67	QP
2	!	62.6507	52.76	-16.51	36.25	40.00	-3.75	QP
3	!	113.7143	55.67	-17.16	38.51	43.50	-4.99	QP
4	*	176.8878	57.91	-17.78	40.13	43.50	-3.37	QP
5		250.3012	54.42	-15.14	39.28	46.00	-6.72	QP
6		790.6188	34.70	-3.77	30.93	46.00	-15.07	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	DC 48V(POE)
Test Mode :	Mode 5	Polarization :	Vertical

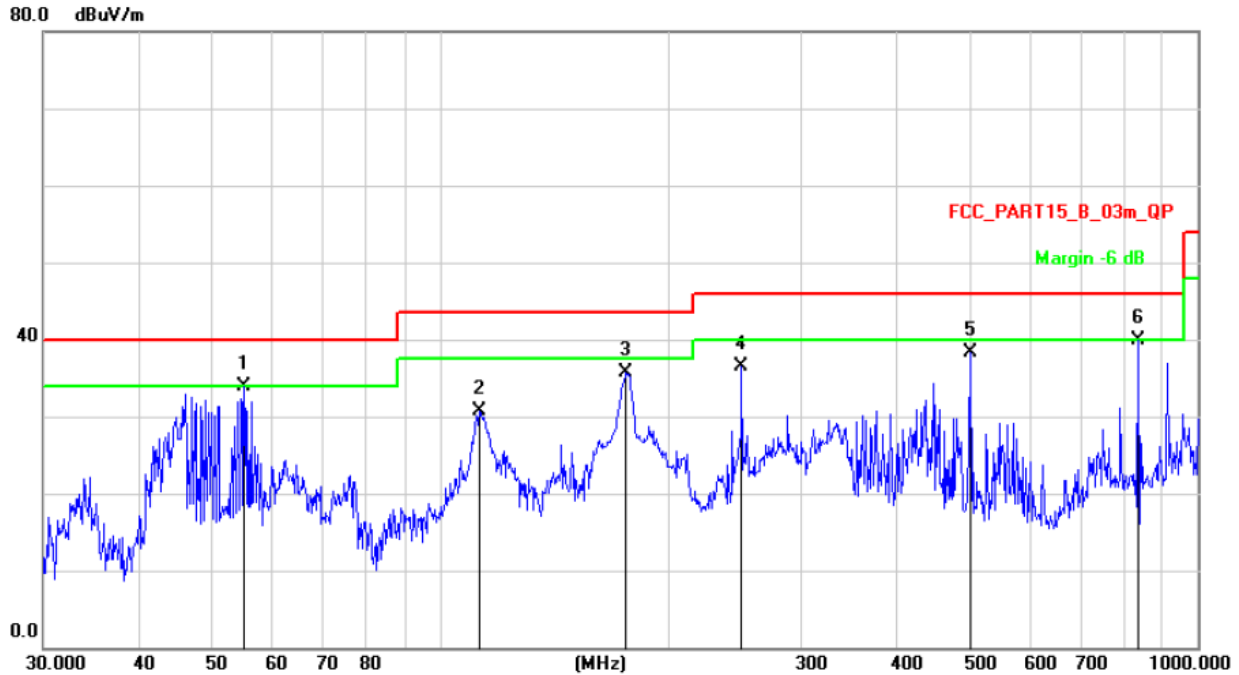

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	55.2207	49.26	-15.40	33.86	40.00	-6.14	QP
2	112.9196	47.89	-17.11	30.78	43.50	-12.72	QP
3	176.2686	53.46	-17.82	35.64	43.50	-7.86	QP
4	250.3012	51.71	-15.14	36.57	46.00	-9.43	QP
5	501.1790	47.27	-8.91	38.36	46.00	-7.64	QP
6 *	833.3171	42.76	-2.89	39.87	46.00	-6.13	QP

Between 1GHz – 25GHz
802.11b

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	53.36	-0.43	52.93	74.00	-21.07	PK
V	4824.00	44.19	-0.43	43.76	54.00	-10.24	AV
V	7236.00	43.38	8.31	51.69	74.00	-22.31	PK
V	7236.00	33.25	8.31	41.56	54.00	-12.44	AV
H	4824.00	49.04	-0.43	48.61	74.00	-25.39	PK
H	4824.00	39.72	-0.43	39.29	54.00	-14.71	AV
H	7236.00	41.32	8.31	49.63	74.00	-24.37	PK
H	7236.00	32.99	8.31	41.30	54.00	-12.70	AV
Middle channel:2437MHz							
V	4874.00	51.01	-0.38	50.63	74.00	-23.37	PK
V	4874.00	44.44	-0.38	44.06	54.00	-9.94	AV
V	7311.00	41.63	8.83	50.46	74.00	-23.54	PK
V	7311.00	31.89	8.83	40.72	54.00	-13.28	AV
H	4874.00	49.26	-0.38	48.88	74.00	-25.12	PK
H	4874.00	38.95	-0.38	38.57	54.00	-15.43	AV
H	7311.00	39.53	8.83	48.36	74.00	-25.64	PK
H	7311.00	31.19	8.83	40.02	54.00	-13.98	AV
High channel:2462MHz							
V	4924.00	53.96	-0.32	53.64	74.00	-20.36	PK
V	4924.00	43.09	-0.32	42.77	54.00	-11.23	AV
V	7386.00	47.89	9.35	57.24	74.00	-16.76	PK
V	7386.00	38.87	9.35	48.22	54.00	-5.78	AV
H	4924.00	50.98	-0.32	50.66	74.00	-23.34	PK
H	4924.00	41.85	-0.32	41.53	54.00	-12.47	AV
H	7386.00	46.55	9.35	55.90	74.00	-18.10	PK
H	7386.00	37.90	9.35	47.25	54.00	-6.75	AV

Remark:

- 1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	54.23	-0.43	53.80	74.00	-20.20	PK
V	4824.00	45.36	-0.43	44.93	54.00	-9.07	AV
V	7236.00	44.77	8.31	53.08	74.00	-20.92	PK
V	7236.00	34.61	8.31	42.92	54.00	-11.08	AV
H	4824.00	52.01	-0.43	51.58	74.00	-22.42	PK
H	4824.00	41.04	-0.43	40.61	54.00	-13.39	AV
H	7236.00	42.25	8.31	50.56	74.00	-23.44	PK
H	7236.00	33.91	8.31	42.22	54.00	-11.78	AV
Middle channel:2437MHz							
V	4874.00	50.52	-0.38	50.14	74.00	-23.86	PK
V	4874.00	41.84	-0.38	41.46	54.00	-12.54	AV
V	7311.00	43.06	8.83	51.89	74.00	-22.11	PK
V	7311.00	33.89	8.83	42.72	54.00	-11.28	AV
H	4874.00	48.49	-0.38	48.11	74.00	-25.89	PK
H	4874.00	38.45	-0.38	38.07	54.00	-15.93	AV
H	7311.00	40.96	8.83	49.79	74.00	-24.21	PK
H	7311.00	32.44	8.83	41.27	54.00	-12.73	AV
High channel:2462MHz							
V	4924.00	52.18	-0.32	51.86	74.00	-22.14	PK
V	4924.00	42.49	-0.32	42.17	54.00	-11.83	AV
V	7386.00	43.43	9.35	52.78	74.00	-21.22	PK
V	7386.00	32.82	9.35	42.17	54.00	-11.83	AV
H	4924.00	50.15	-0.32	49.83	74.00	-24.17	PK
H	4924.00	39.64	-0.32	39.32	54.00	-14.68	AV
H	7386.00	41.69	9.35	51.04	74.00	-22.96	PK
H	7386.00	32.98	9.35	42.33	54.00	-11.67	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	53.73	-0.43	53.30	74.00	-20.70	PK
V	4824.00	43.09	-0.43	42.66	54.00	-11.34	AV
V	7236.00	45.71	8.31	54.02	74.00	-19.98	PK
V	7236.00	35.60	8.31	43.91	54.00	-10.09	AV
H	4824.00	52.00	-0.43	51.57	74.00	-22.43	PK
H	4824.00	41.62	-0.43	41.19	54.00	-12.81	AV
H	7236.00	43.72	8.31	52.03	74.00	-21.97	PK
H	7236.00	36.18	8.31	44.49	54.00	-9.51	AV
Middle channel:2437MHz							
V	4874.00	52.62	-0.38	52.24	74.00	-21.76	PK
V	4874.00	43.71	-0.38	43.33	54.00	-10.67	AV
V	7311.00	43.69	8.83	52.52	74.00	-21.48	PK
V	7311.00	34.51	8.83	43.34	54.00	-10.66	AV
H	4874.00	51.36	-0.38	50.98	74.00	-23.02	PK
H	4874.00	41.77	-0.38	41.39	54.00	-12.61	AV
H	7311.00	41.68	8.83	50.51	74.00	-23.49	PK
H	7311.00	34.51	8.83	43.34	54.00	-10.66	AV
High channel:2462MHz							
V	4924.00	54.43	-0.32	54.11	74.00	-19.89	PK
V	4924.00	44.84	-0.32	44.52	54.00	-9.48	AV
V	7386.00	48.42	9.35	57.77	74.00	-16.23	PK
V	7386.00	37.55	9.35	46.90	54.00	-7.10	AV
H	4924.00	52.99	-0.32	52.67	74.00	-21.33	PK
H	4924.00	42.60	-0.32	42.28	54.00	-11.72	AV
H	7386.00	46.32	9.35	55.67	74.00	-18.33	PK
H	7386.00	38.36	9.35	47.71	54.00	-6.29	AV

Remark:

- 1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2422MHz							
V	4844.00	54.71	-0.43	54.28	74.00	-19.72	PK
V	4844.00	43.89	-0.43	43.46	54.00	-10.54	AV
V	7266.00	45.10	8.31	53.41	74.00	-20.59	PK
V	7266.00	34.28	8.31	42.59	54.00	-11.41	AV
H	4844.00	50.99	-0.43	50.56	74.00	-23.44	PK
H	4844.00	40.57	-0.43	40.14	54.00	-13.86	AV
H	7266.00	42.55	8.31	50.86	74.00	-23.14	PK
H	7266.00	35.34	8.31	43.65	54.00	-10.35	AV
Middle channel:2437MHz							
V	4874.00	51.59	-0.38	51.21	74.00	-22.79	PK
V	4874.00	44.52	-0.38	44.14	54.00	-9.86	AV
V	7311.00	44.58	8.83	53.41	74.00	-20.59	PK
V	7311.00	35.12	8.83	43.95	54.00	-10.05	AV
H	4874.00	49.88	-0.38	49.50	74.00	-24.50	PK
H	4874.00	39.18	-0.38	38.80	54.00	-15.20	AV
H	7311.00	41.68	8.83	50.51	74.00	-23.49	PK
H	7311.00	33.00	8.83	41.83	54.00	-12.17	AV
High channel:2452MHz							
V	4904.00	53.56	-0.32	53.24	74.00	-20.76	PK
V	4904.00	43.27	-0.32	42.95	54.00	-11.05	AV
V	7356.00	46.31	9.35	55.66	74.00	-18.34	PK
V	7356.00	35.90	9.35	45.25	54.00	-8.75	AV
H	4904.00	52.38	-0.32	52.06	74.00	-21.94	PK
H	4904.00	42.40	-0.32	42.08	54.00	-11.92	AV
H	7356.00	44.27	9.35	53.62	74.00	-20.38	PK
H	7356.00	37.21	9.35	46.56	54.00	-7.44	AV


Remark:

- 1.Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
- 2.If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8. RADIATED BAND EMISSION MEASUREMENT AND RESTRICTED BANDS OF OPERATION

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

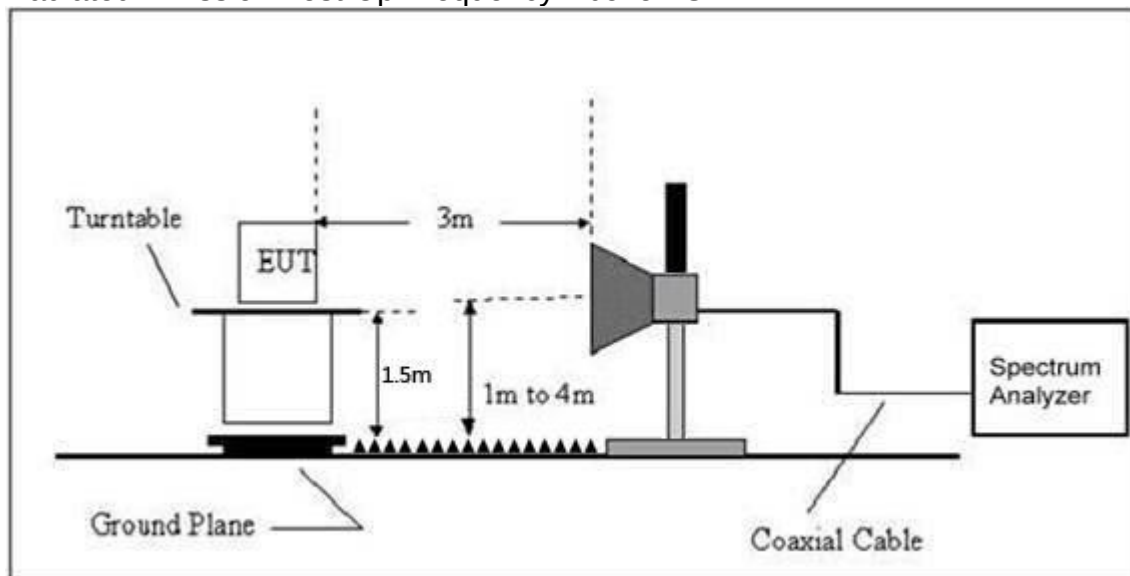

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3)Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g.Test the EUT in the lowest channel,, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Measure- ment (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11b	Low Channel 2412MHz								
	H	2390.00	57.84	-6.70	51.14	74.00	54.00	-22.86	PASS
	H	2400.00	49.77	-6.71	43.06	74.00	54.00	-30.94	PASS
	V	2390.00	57.72	-6.70	51.02	74.00	54.00	-22.98	PASS
	V	2400.00	49.80	-6.71	43.09	74.00	54.00	-30.91	PASS
	High Channel 2462MHz								
	H	2483.50	56.87	-6.79	50.08	74.00	54.00	-23.92	PASS
	H	2485.00	48.89	-6.81	42.08	74.00	54.00	-31.92	PASS
	V	2483.50	57.76	-6.79	50.97	74.00	54.00	-23.03	PASS
	V	2485.00	48.81	-6.81	42.00	74.00	54.00	-32.00	PASS
802.11g	Low Channel 2412MHz								
	H	2390.00	57.33	-6.70	50.63	74.00	54.00	-23.37	PASS
	H	2400.00	48.88	-6.71	42.17	74.00	54.00	-31.83	PASS
	V	2390.00	58.00	-6.70	51.30	74.00	54.00	-22.70	PASS
	V	2400.00	50.85	-6.71	44.14	74.00	54.00	-29.86	PASS
	High Channel 2462MHz								
	H	2483.50	56.90	-6.79	50.11	74.00	54.00	-23.89	PASS
	H	2485.00	49.89	-6.81	43.08	74.00	54.00	-30.92	PASS
	V	2483.50	56.19	-6.79	49.40	74.00	54.00	-24.60	PASS
	V	2485.00	48.00	-6.81	41.19	74.00	54.00	-32.81	PASS

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Measurement - Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
- 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Measure- ment (dBuV/m)		Over	Result
					PK	PK	AV	PK	
802.11 n20	Low Channel 2412MHz								
	H	2390.00	57.74	-6.70	51.04	74.00	54.00	-22.96	PASS
	H	2400.00	49.09	-6.71	42.38	74.00	54.00	-31.62	PASS
	V	2390.00	57.11	-6.70	50.41	74.00	54.00	-23.59	PASS
	V	2400.00	48.29	-6.71	41.58	74.00	54.00	-32.42	PASS
	High Channel 2462MHz								
	H	2483.50	57.03	-6.79	50.24	74.00	54.00	-23.76	PASS
	H	2500.00	50.01	-6.81	43.20	74.00	54.00	-30.80	PASS
	V	2483.50	56.88	-6.79	50.09	74.00	54.00	-23.91	PASS
	V	2500.00	48.97	-6.81	42.16	74.00	54.00	-31.84	PASS
802.11 n40	Low Channel 2422MHz								
	H	2390.00	56.97	-6.70	50.27	74.00	54.00	-23.73	PASS
	H	2400.00	49.77	-6.71	43.06	74.00	54.00	-30.94	PASS
	V	2390.00	57.00	-6.70	50.30	74.00	54.00	-23.70	PASS
	V	2400.00	49.63	-6.71	42.92	74.00	54.00	-31.08	PASS
	High Channel 2452MHz								
	H	2483.50	55.81	-6.79	49.02	74.00	54.00	-24.98	PASS
	H	2500.00	48.68	-6.81	41.87	74.00	54.00	-32.13	PASS
	V	2483.50	57.38	-6.79	50.59	74.00	54.00	-23.41	PASS
	V	2500.00	49.87	-6.81	43.06	74.00	54.00	-30.94	PASS

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Measurement - Limit
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
- 3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

9. POWER SPECTRAL DENSITY TEST

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

9.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 EUT operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

9.5 Test Result


Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz

Test Mode	Frequency	Power Spectral Density(dBm/3kHz)	Limit (dBm/3kHz)	Result
TX b Mode	2412 MHz	-11.774	8	PASS
	2437 MHz	-12.557	8	PASS
	2462 MHz	-10.404	8	PASS
TX g Mode	2412 MHz	-16.481	8	PASS
	2437 MHz	-16.869	8	PASS
	2462 MHz	-17.325	8	PASS
TX n Mode(20M)	2412 MHz	-16.796	8	PASS
	2437 MHz	-16.677	8	PASS
	2462 MHz	-16.887	8	PASS
TX n Mode(40M)	2422 MHz	-16.695	8	PASS
	2437 MHz	-18.262	8	PASS
	2452 MHz	-16.933	8	PASS


TX b CH01




TX b CH06

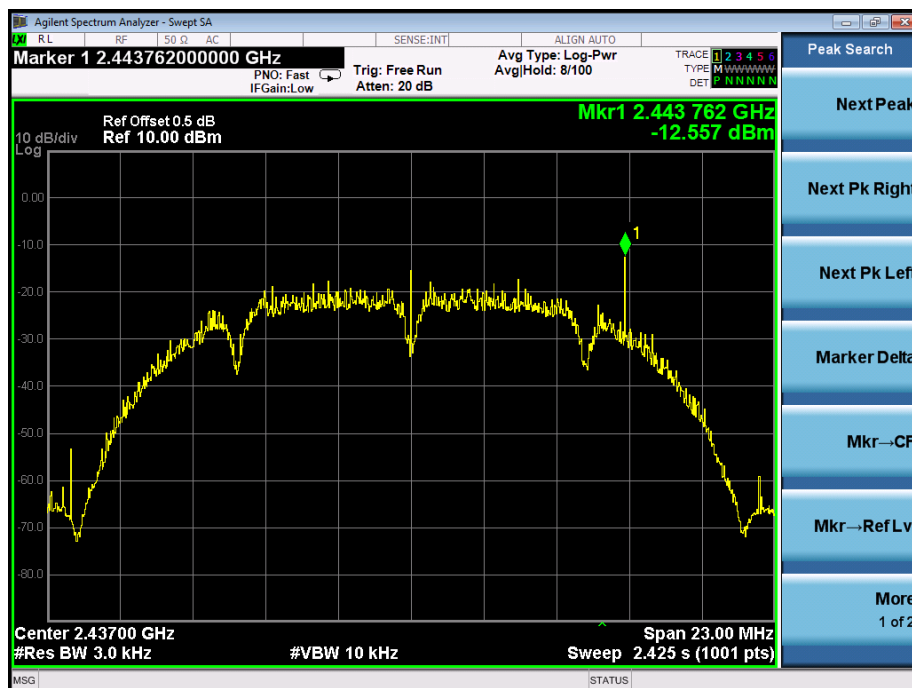


TX b CH11

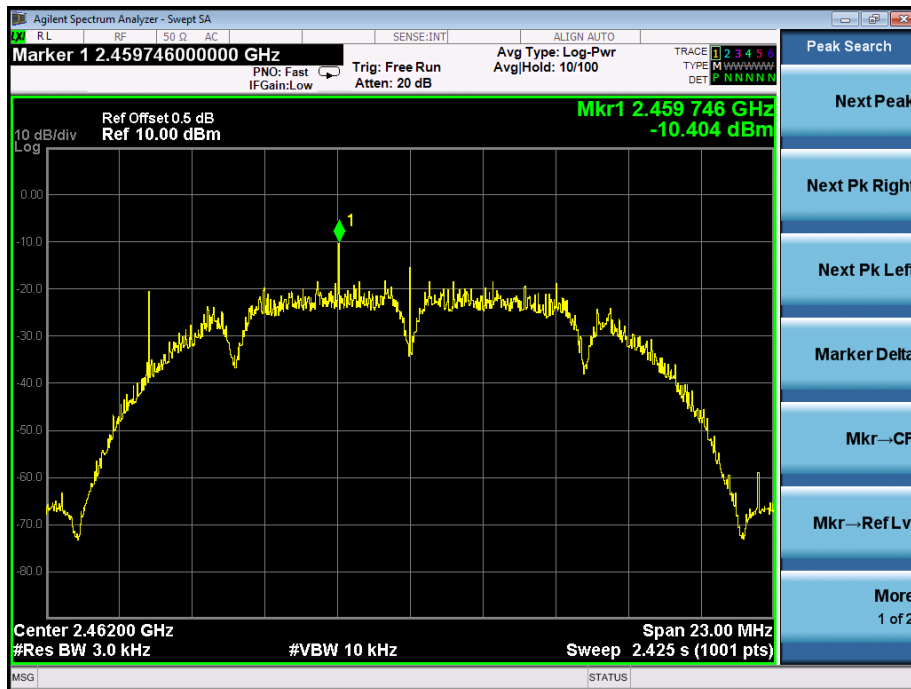


TX g CH01

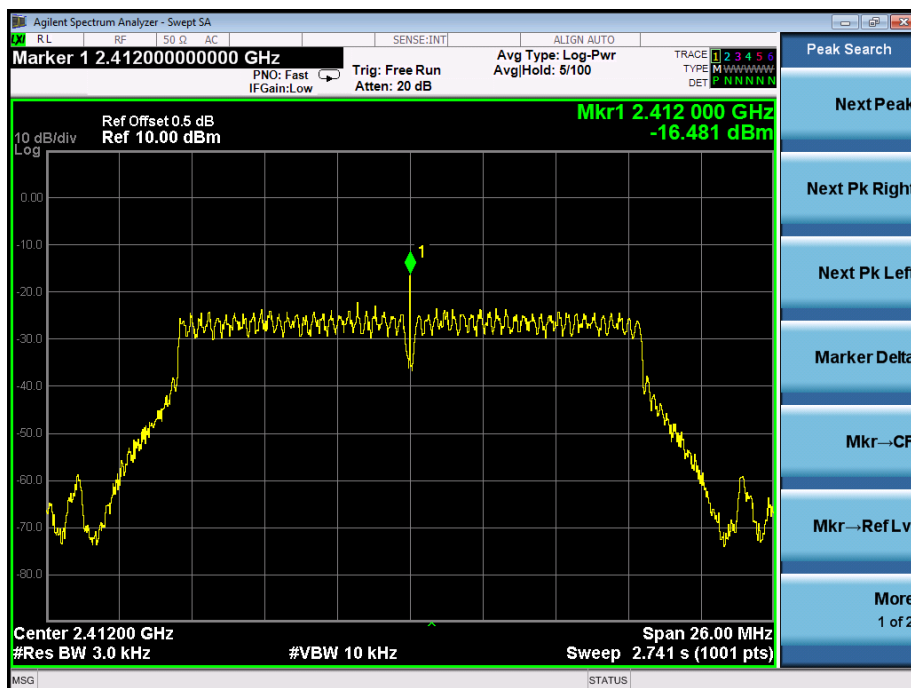


TX g CH06

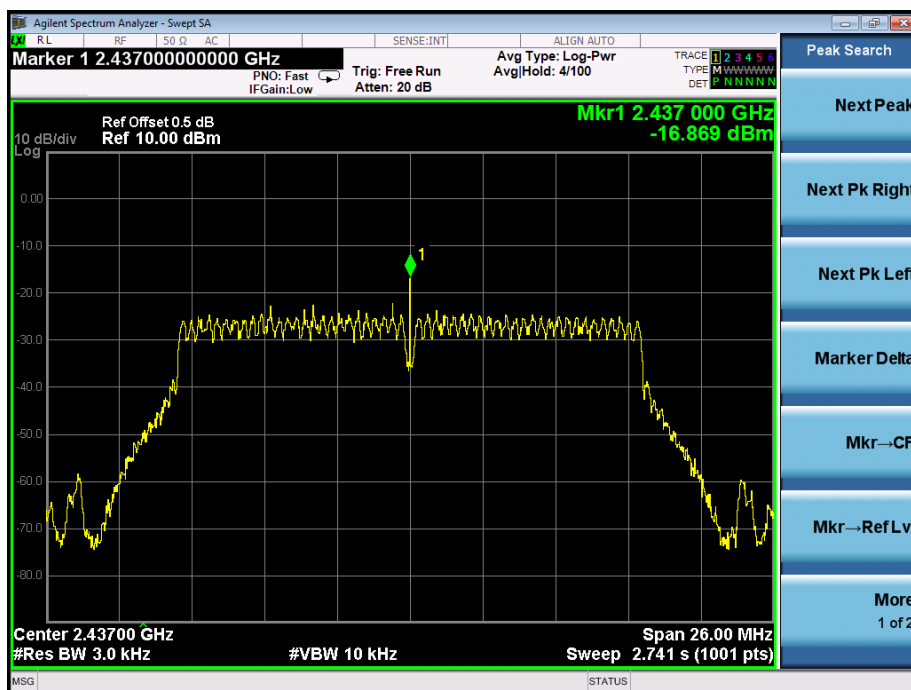


TX g CH11

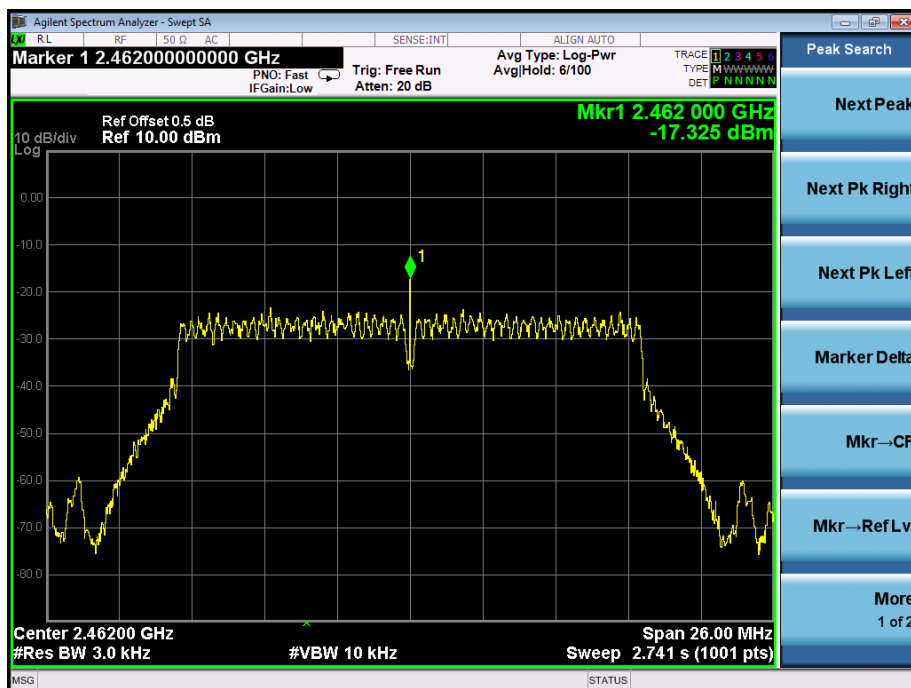


TX n20 CH01

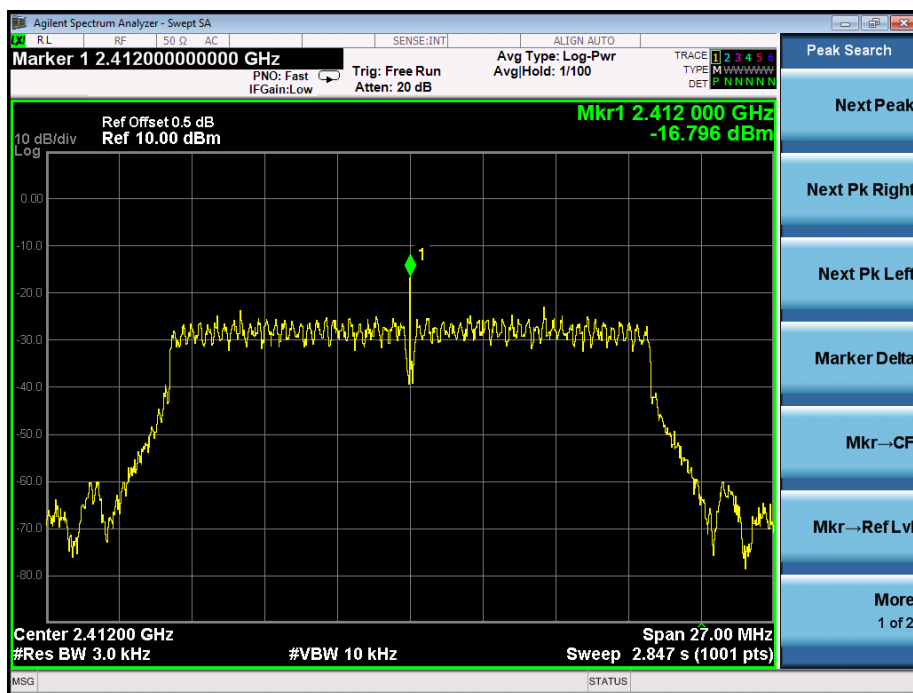


TX n20 CH06

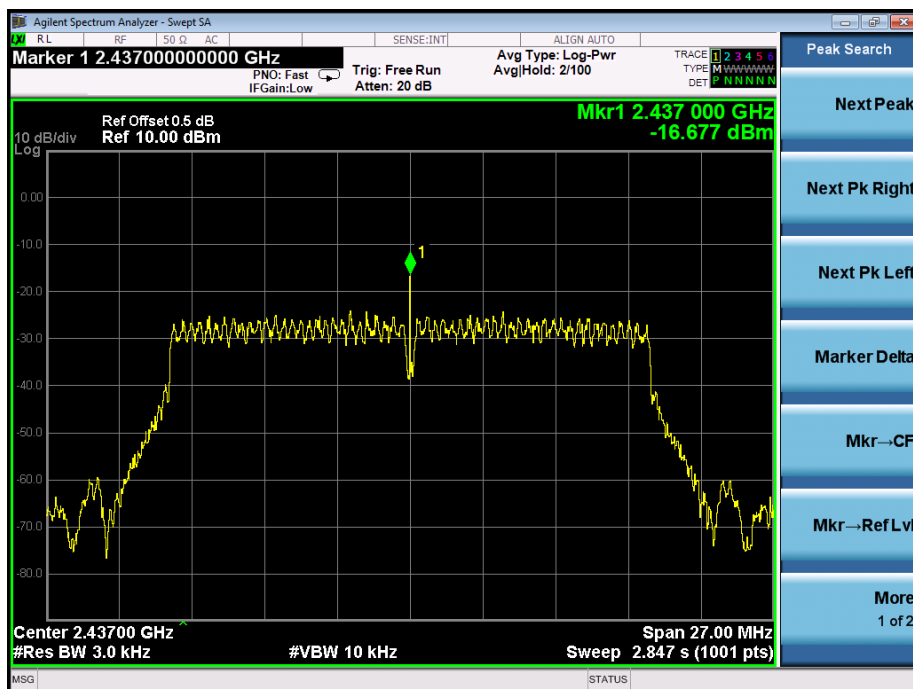


TX n20 CH11

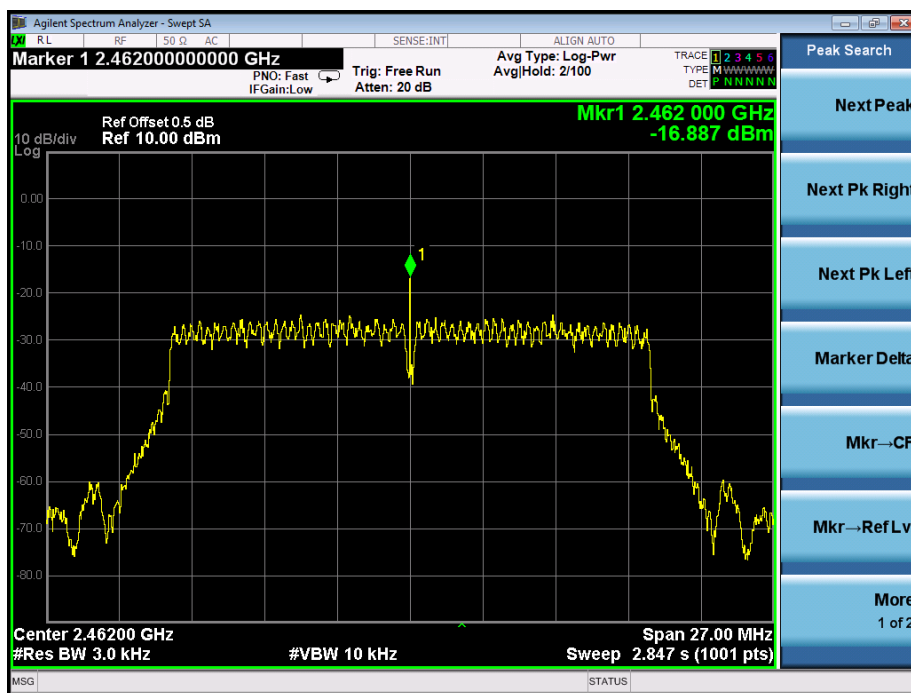


TX n40 CH03

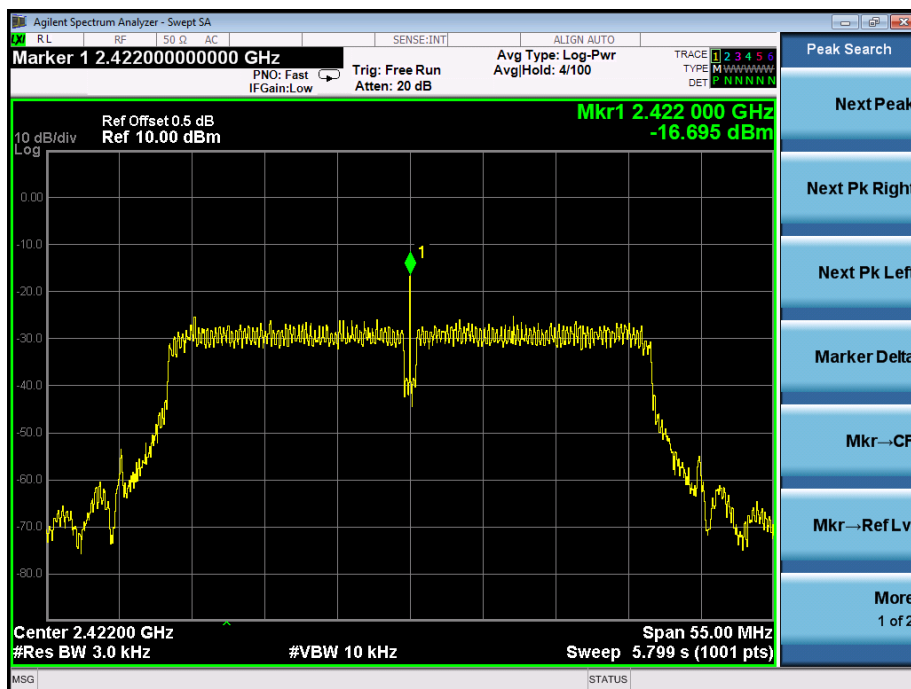

TX n40 CH06

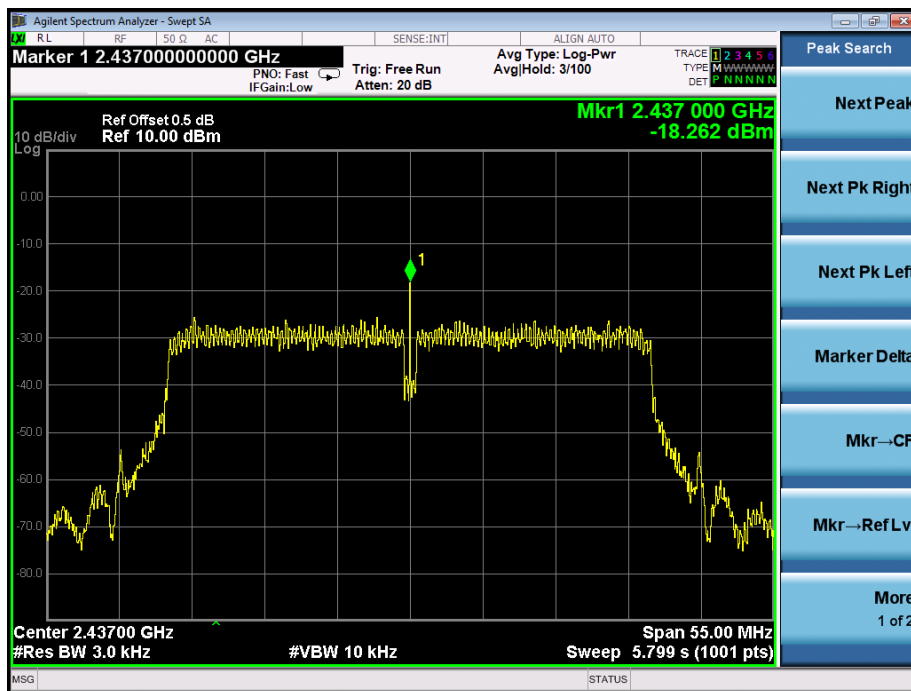


TX n40 CH09

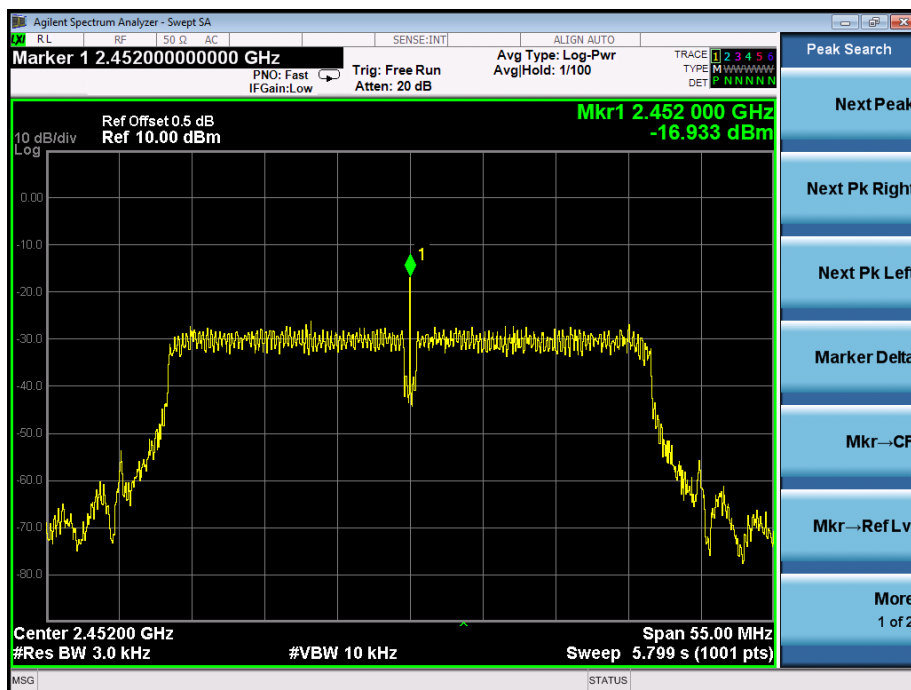

10. BANDWIDTH TEST

10.1 Block Diagram Of Test Setup

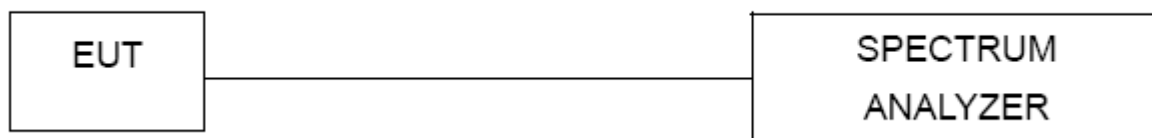

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 EUT operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.


Note: Power Spectral Density(dBm)=Reading+Cable Loss

10.5 Test Result


Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX b Mode		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2412	12.09	500	Pass
2437	12.14	500	Pass
2462	12.15	500	Pass


TX CH 01

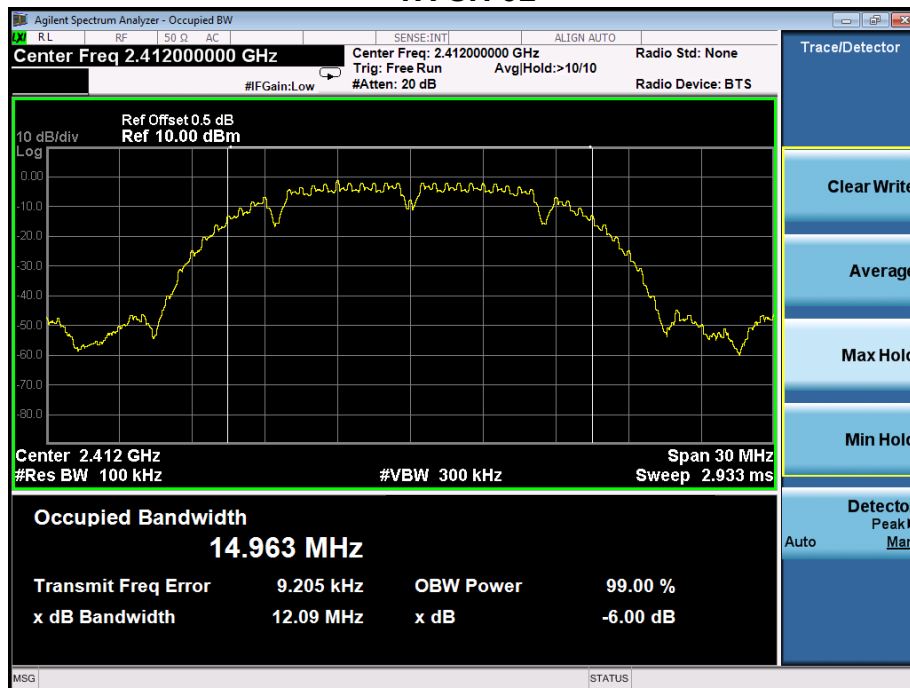

TX CH 06

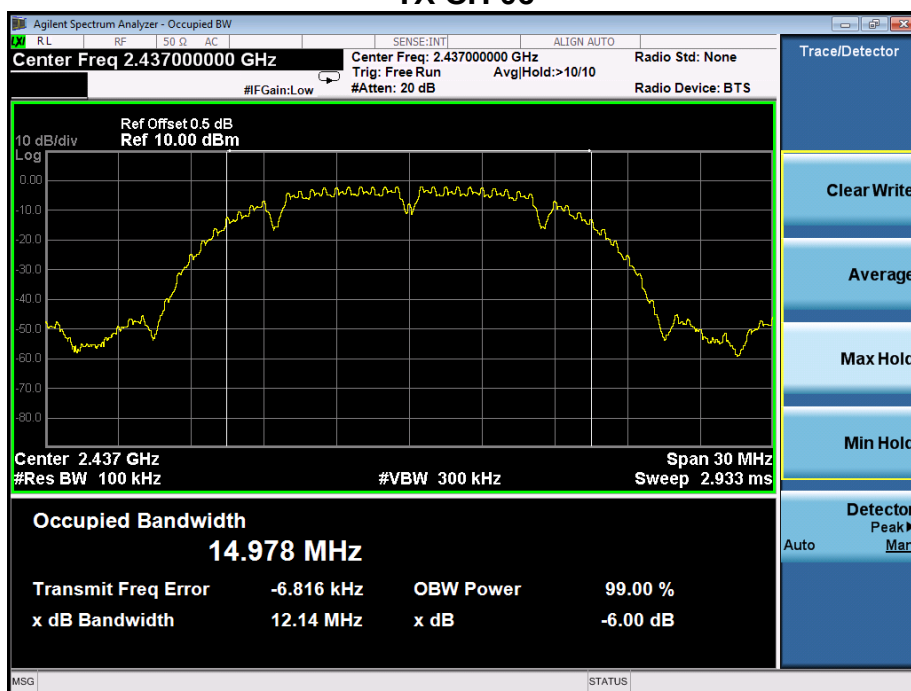


TX CH 11

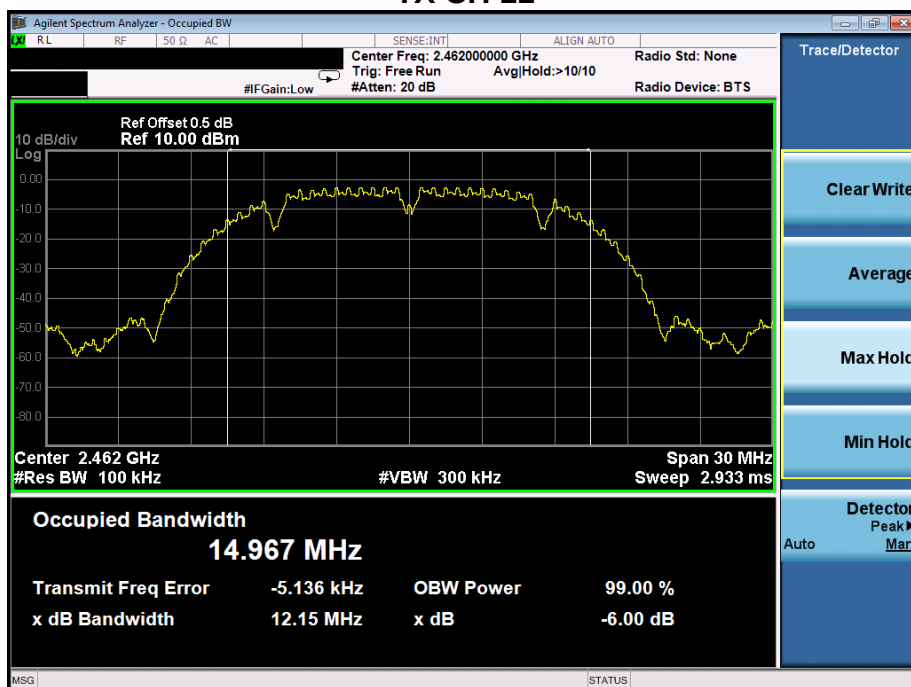


Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX g Mode		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2412	16.35	500	Pass
2437	16.35	500	Pass
2462	16.37	500	Pass


TX CH 01

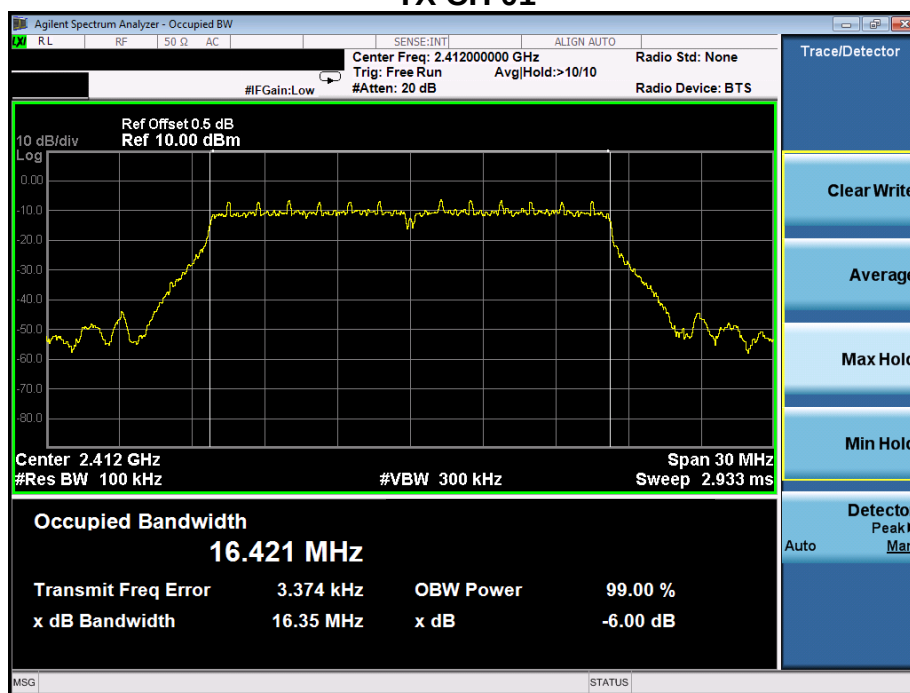

TX CH 06

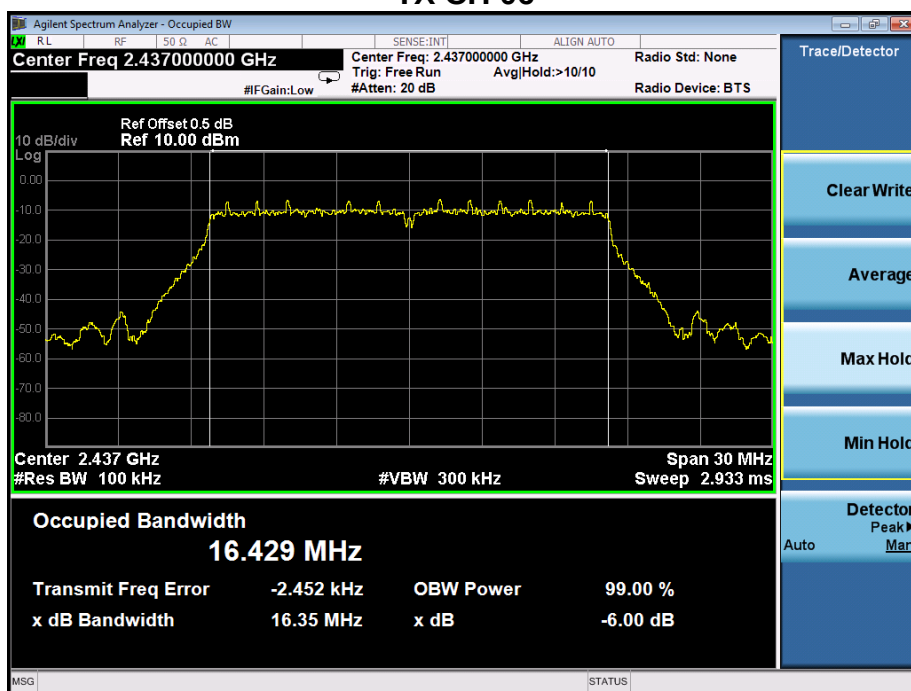


TX CH 11

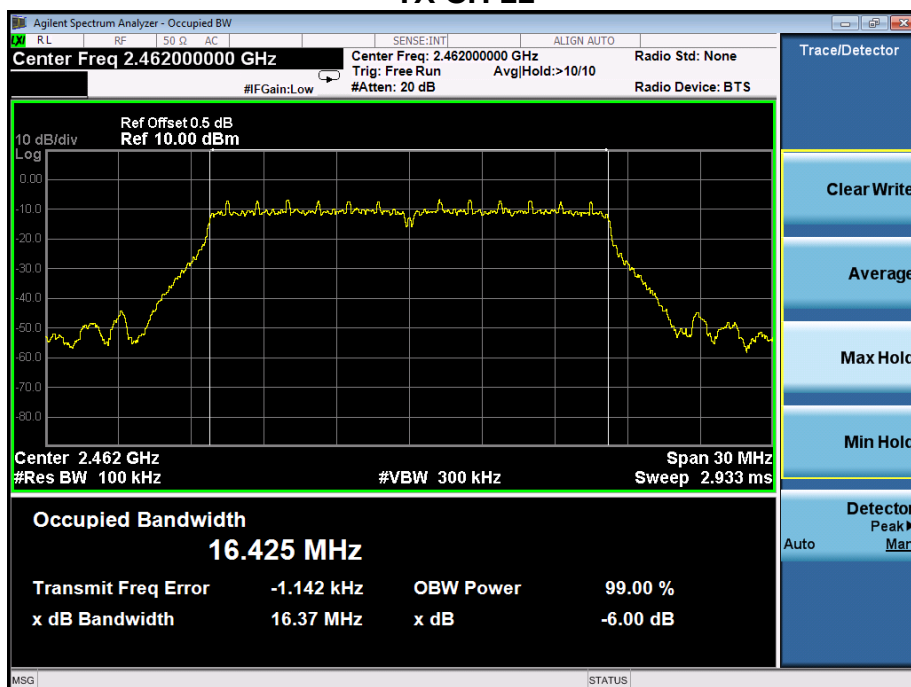


Temperature:	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX n Mode(20M)		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2412	17.08	500	Pass
2437	17.10	500	Pass
2462	17.11	500	Pass


TX CH 01

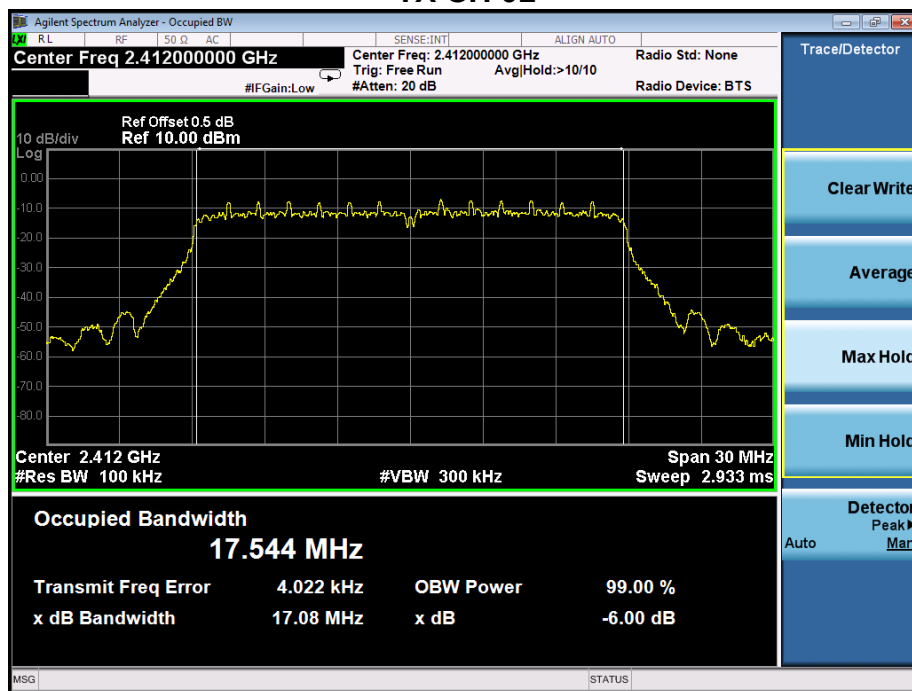

TX CH 06

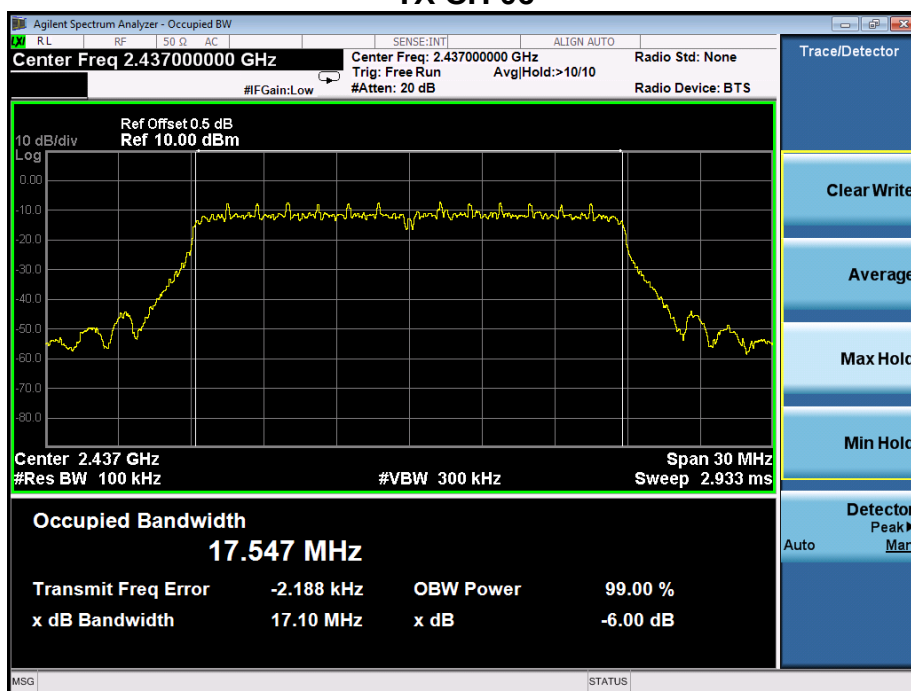

TX CH 11

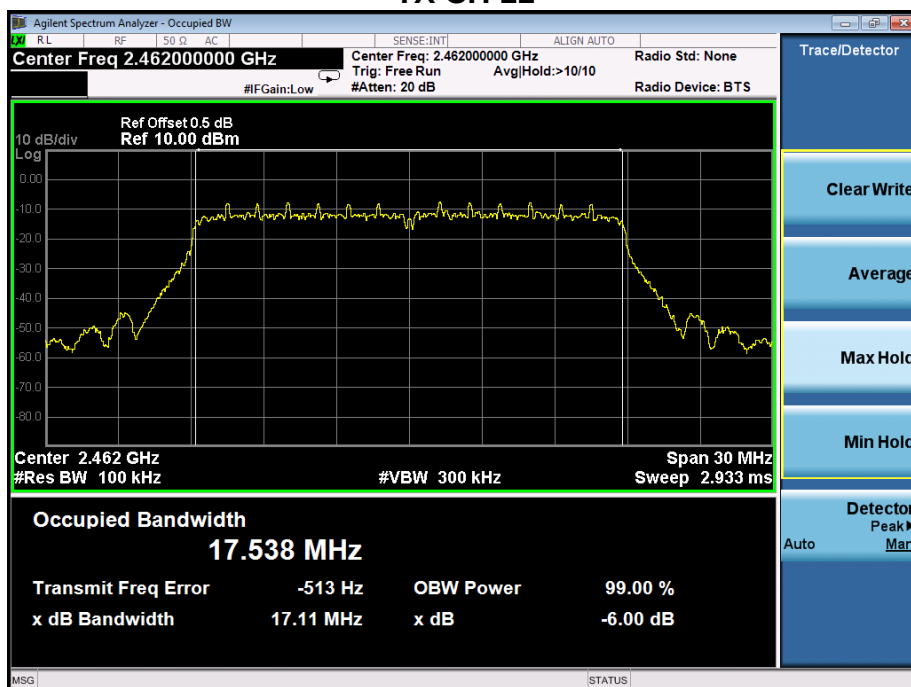

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC120V/60Hz
Test Mode :	TX n Mode(40M)		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2422	35.39	500	Pass
2437	35.66	500	Pass
2452	35.40	500	Pass

TX CH 03

