

Inter**Lab**[®]
Final Report on
WLAN tranceiver
INARI5-WLAN-1

FCC ID: 2ABVH-INARI51
IC: 11875A-INARI51

Report Reference: MDE_AAVAM_1408_FCCg_rev1
According to: Title 47 CFR chapter I part 15 subpart C
FCC ID: 2ABVH-INARI51
IC: 11875A-INARI51

Date: August 19, 2015
Test Laboratory:
7 layers AG
Borsigstrasse 11
40880 Ratingen
Germany



Note:
The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender
Chairman of the Supervisory Board:
Peter Mertel
Vorstand Board:
Dr. H. Ansorge

Registergericht registered in:
Düsseldorf, HRB 44096
USt-IdNr VAT No.:
DE 203159652
TAX No. 147/5869/0385
A Bureau Veritas Group Company

1 Administrative Data


1.1 Project Data

Project Responsible: Dirk Bratsch
Date Of Test Report: 2015/08/19
Date of first test: 2015/01/12
Date of last test: 2015/02/27

1.2 Applicant Data

Company Name: Aava Mobile Oy
Street: Nahkatehtaankatu 2
City: 90130 Oulu
Country: Finland
Contact Person: Mr. Antti Aho
Fax: +3588373811

1.3 Signature of the Testing Responsible

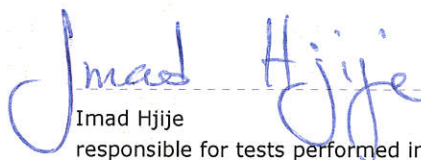

Imad Hjije
responsible for tests performed in: Lab 1

1.4 Signature of the Accreditation Responsible



B. Retka [B. RETKA]
Accreditation scope responsible person
responsible for Lab 1

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: INARI5-WLAN-1

Type / Model / Family:	WLAN tranceiver INARI5-WLAN-1
	FCC ID: 2ABVH-INARI51 IC: 11875A-INARI51
Product Category:	Others
Manufacturer: Company Name:	Please see applicant data
Contact Person:	-

Parameter List:

Parameter name	Value
AC Power Supply	120V/60Hz

2.2 Detailed Description of OUT Samples

Sample : ad01

OUT Identifier	INARI5-WLAN-1		
Sample Description	Standard Sample #2		
Serial No.	EDB65F3C		
HW Status	Preproduction		
SW Status	Android 4.4		
Low Voltage	3.5 V	Low Temp.	-10 °C
High Voltage	4.35 V	High Temp.	+55 °C
Nominal Voltage	3.8 V	Normal Temp.	+25 °C

Sample : ae01

OUT Identifier	INARI5-WLAN-1		
Sample Description	Conducted Sample #2		
Serial No.	EB44900043		
HW Status	Preproduction		
SW Status	Android 4.4		
Low Voltage	3.5 V	Low Temp.	-10 °C
High Voltage	4.35 V	High Temp.	55 °C
Nominal Voltage	3.8 V	Normal Temp.	25 °C

2.3 OUT Features

Features for OUT: INARI5-WLAN-1

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
Features for scope: FCC_v2			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
BTLE	Support of Bluetooth Low Energy		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
TantC	temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment		
Wa1	EUT supports WLAN in mode a in the band 5150 MHz - 5250 MHz		
Wa2	EUT supports WLAN in mode a in the band 5250 MHz - 5350 MHz		
Wa3	EUT supports WLAN in mode a in the band 5470 MHz - 5725 MHz		
Wa4	EUT supports WLAN in mode a in the band 5725 MHz - 5825 MHz		
Wa5	EUT supports WLAN in mode a in the band 5725 MHz - 5850 MHz		
Wa6	EUT supports WLAN in mode a in the band 5745 MHz - 5805 MHz		
Wa7	EUT supports WLAN in mode a in the band 5180 MHz - 5240 MHz		
Wa8	EUT supports WLAN in mode a in the band 5260 MHz - 5320 MHz		
Wa9	EUT supports WLAN in mode a in the band 5500 MHz - 5600 MHz		
Wa10	EUT supports WLAN in mode a in the band 5650 MHz - 5700 MHz		
Wb	EUT supports WLAN in mode b in the band 2400 MHz - 2483.5 MHz		
Wg	EUT supports WLAN in mode g in the band 2400 MHz - 2483.5 MHz		
Wn	EUT supports WLAN in mode n in the band 5150 MHz - 5850 MHz.		
Wn	EUT supports WLAN in mode n in the band 2400 MHz - 2483.5 MHz		

2.4 Auxiliary Equipment

AE No.	Type Designation	Serial No.	HW Status	SW Status	Description
AE 02	-	-	-	-	Headset
AE 03	-	-	-	-	Temperature Sensor
AE 01	Delta Electronics ADP-10BW C	053W41T00KM	Rev.: 00	-	AC/DC Converter

2.5 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

Setup No.	List of OUT samples	List of auxiliary equipment
	Sample No. Sample Description	AE No. AE Description

S01_AC01 (Conducted measurements Setup)

Sample: ae01 Conducted Sample #2

S02_AD01 (Conducted emissions measurement Setup)

Sample: ad01	Standard Sample #2	AE 02	Headset
		AE 03	Temperature Sensor
		AE 01	AC/DC Converter

3 Results

3.1 General

Documentation of tested devices:

Available at the test laboratory.

Interpretation of the test results:

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

Note:

1. This report contains the abbreviated information content pertaining to services rendered. Supporting documentation not included herein is maintained and available at the laboratory.
2. All tests are performed under environmental conditions within the requirements of the specifications. Environmental conditions are available at the laboratory.
3. This test report covers the Bluetooth Low Energy functionality of this device. Only conducted measurements have been performed. Radiated spurious emissions are covered by normal Bluetooth being the worst case with regards to the Output power.
4. This report is a revision of MDE_AAVAM_1408_FCCg. Corresponding revision table can be found in the Annex.

3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES	Subpart C - Intentional Radiators; 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

3.3 List of Test Specification

<i>Test Specification:</i>	FCC part 2 and 15
<i>Version</i>	10-1-13 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES

3.4 Summary

<i>Test Case Identifier / Name</i> <i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i> <i>Ref.</i>	<i>Setup</i>
15c.1 Conducted emissions (AC power line) §15.207 15c.1; Mode = transmit	Passed	2015/02/27		S02_AD01
15c.10 Power density §15.247 (e) 15c.10; Frequency = Low/Mid/High	Passed	2015/01/12	Lab 1	S01_AC01
15c.11 6dB Bandwidth §15.247 (a) (2) 15c.11; Frequency = Low/Mid/High	Passed	2015/01/12	Lab 1	S01_AC01
15c.4 Peak power output §15.247 (b) (1) 15c.4; Mode = Bluetooth Low Energy	Passed	2015/01/12	Lab 1	S01_AC01
15c.5 Spurious RF conducted emissions §15.247 (d) 15c.5; Mode = Bluetooth Low Energy	Passed	2015/01/12	Lab 1	S01_AC01
15c.6 Band edge compliance §15.247 (d) 15c.6; Frequency = 2402, Mode = Bluetooth Low Energy	Passed	2015/01/12	Lab 1	S01_AC01
15c.6; Frequency = 2480, Mode = Bluetooth Low Energy	Passed	2015/01/12	Lab 1	S01_AC01

3.5 Detailed Results

3.5.1 15c.1 Conducted emissions (AC power line) §15.207

Test: 15c.1; Mode = transmit

<i>Result:</i>	Passed
<i>Setup No.:</i>	S02_AD01
<i>Date of Test:</i>	2015/02/27 10:43
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

AC MAINS CONDUCTED

EUT: (DE1004006ad01)
Manufacturer: AAVA Mobile
Operating Condition: BT TX on 2441 MHz (worst case), loopback mode, 1-DH1
Test Site: 7 layers Ratingen
Operator: URO
Test Specification: ANSI C63.4; FCC 15.107 / 15.207
Comment: AC/DC Adapter ; 120 V / 60 Hz
Start of Test: 27.02.2015 / 09:55:24

SCAN TABLE: "FCC Voltage"

Short Description:	FCC Voltage	Meas.	IF	Transducer
Start Stop Step	Detector	Time	Bandw.	
Frequency Frequency Width				
150.0 kHz 30.0 MHz 5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
	Average			

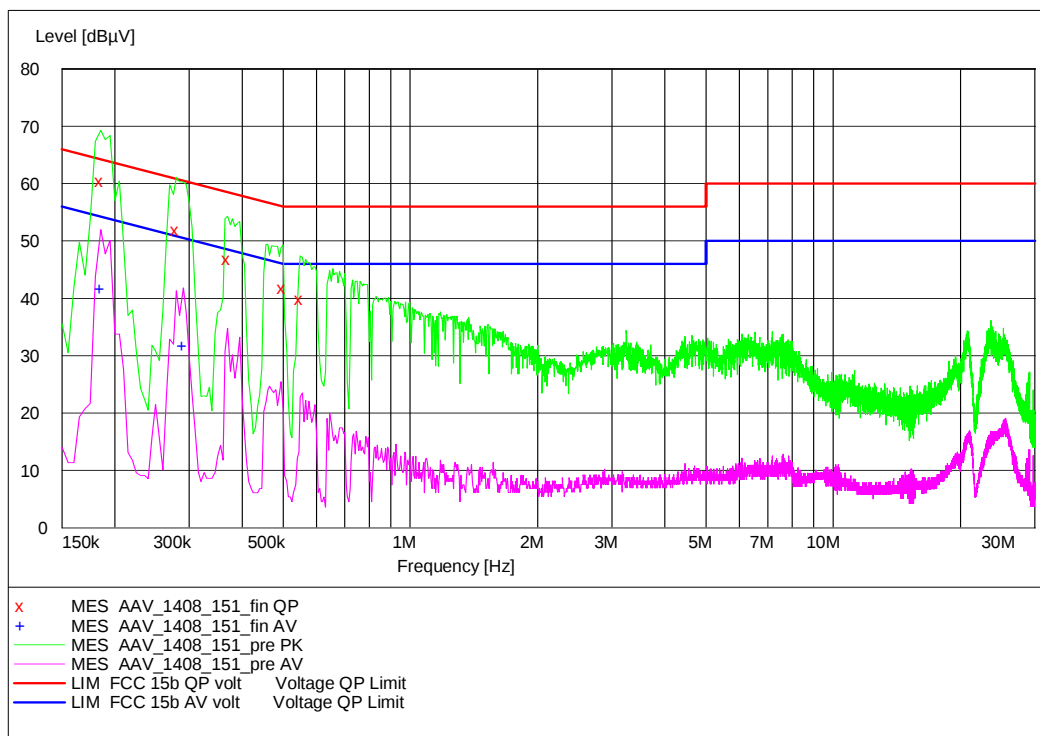

MEASUREMENT RESULT: "AAV_1408_151_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.185000	60.40	10.1	64	3.9	N	GND
0.280000	52.00	10.1	61	8.8	N	GND
0.370000	46.90	10.1	59	11.6	N	FLO
0.500000	41.90	10.1	56	14.1	L1	FLO
0.550000	39.80	10.1	56	16.2	N	GND

MEASUREMENT RESULT: "AAV_1408_151_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.185000	41.70	10.1	54	12.6	L1	GND
0.290000	31.80	10.1	51	18.7	L1	GND

3.5.2 15c.10 Power density §15.247 (e)


Test: 15c.10; Frequency = Low/Mid/High

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AC01
<i>Date of Test:</i>	2015/01/12 10:19
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

		Power Density		
		2402 MHz	2440 MHz	2480 MHz
Modulation	Conditions	Power Density (dBm)	Power Density (dBm)	Power Density (dBm)
GFSK	TN, VN	-10.39	-11.69	-11.15


Maximum Power Density	-10.39	dbm
-----------------------	--------	-----

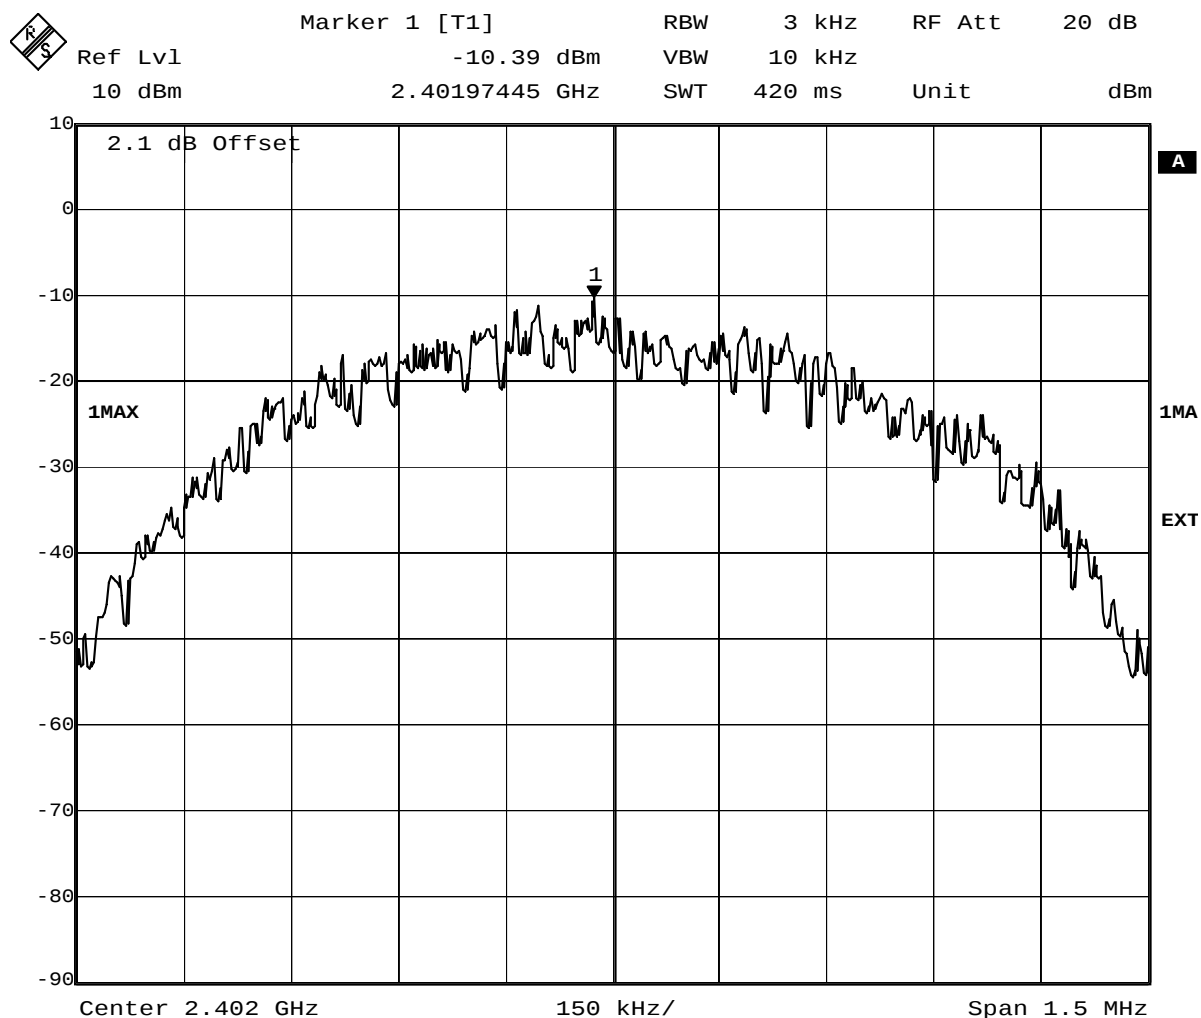

Date: 12.JAN.2015 10:04:07

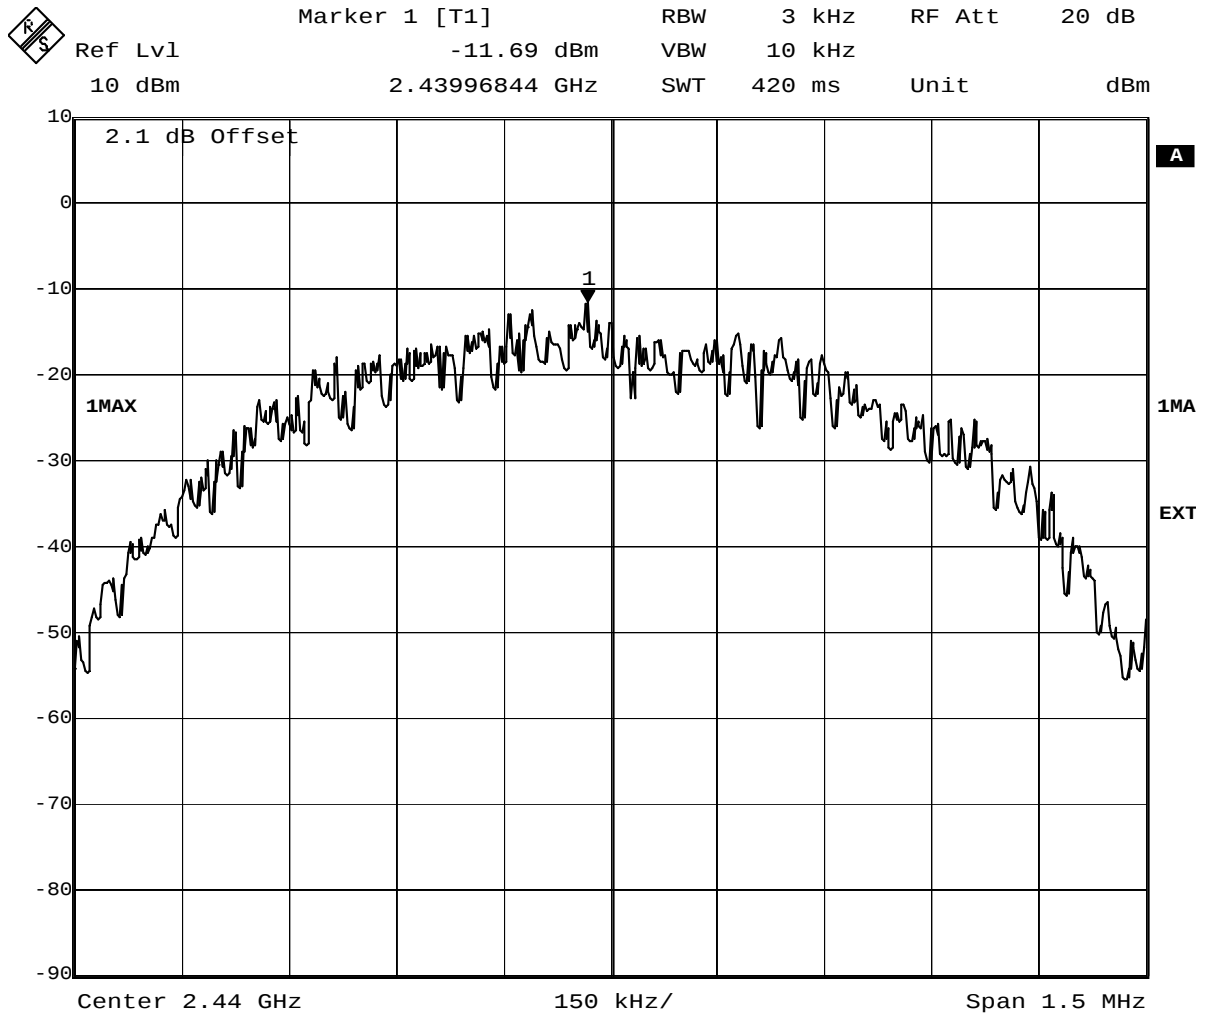

Date: 12.JAN.2015 10:04:50

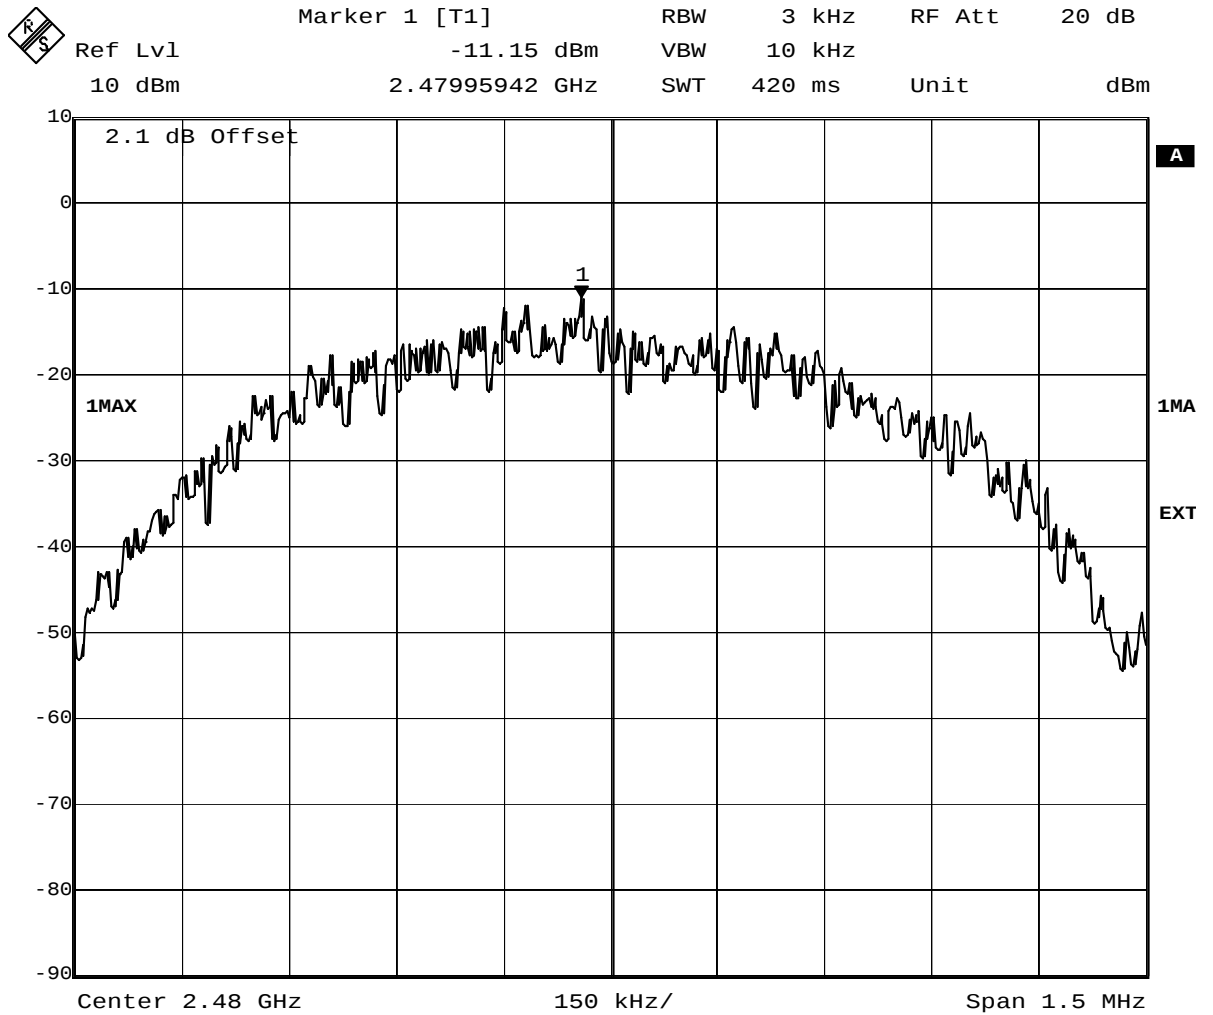

Date: 12.JAN.2015 10:05:44


3.5.3 15c.11 6dB Bandwidth §15.247 (a) (2)

Test: 15c.11; Frequency = Low/Mid/High


<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AC01
<i>Date of Test:</i>	2015/01/12 12:26
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:


Modulation	Frequency	6dB Bandwidth KHz
GFSK	2402 MHz	751.504
	2440 MHz	757.515
	2480 MHz	751.504

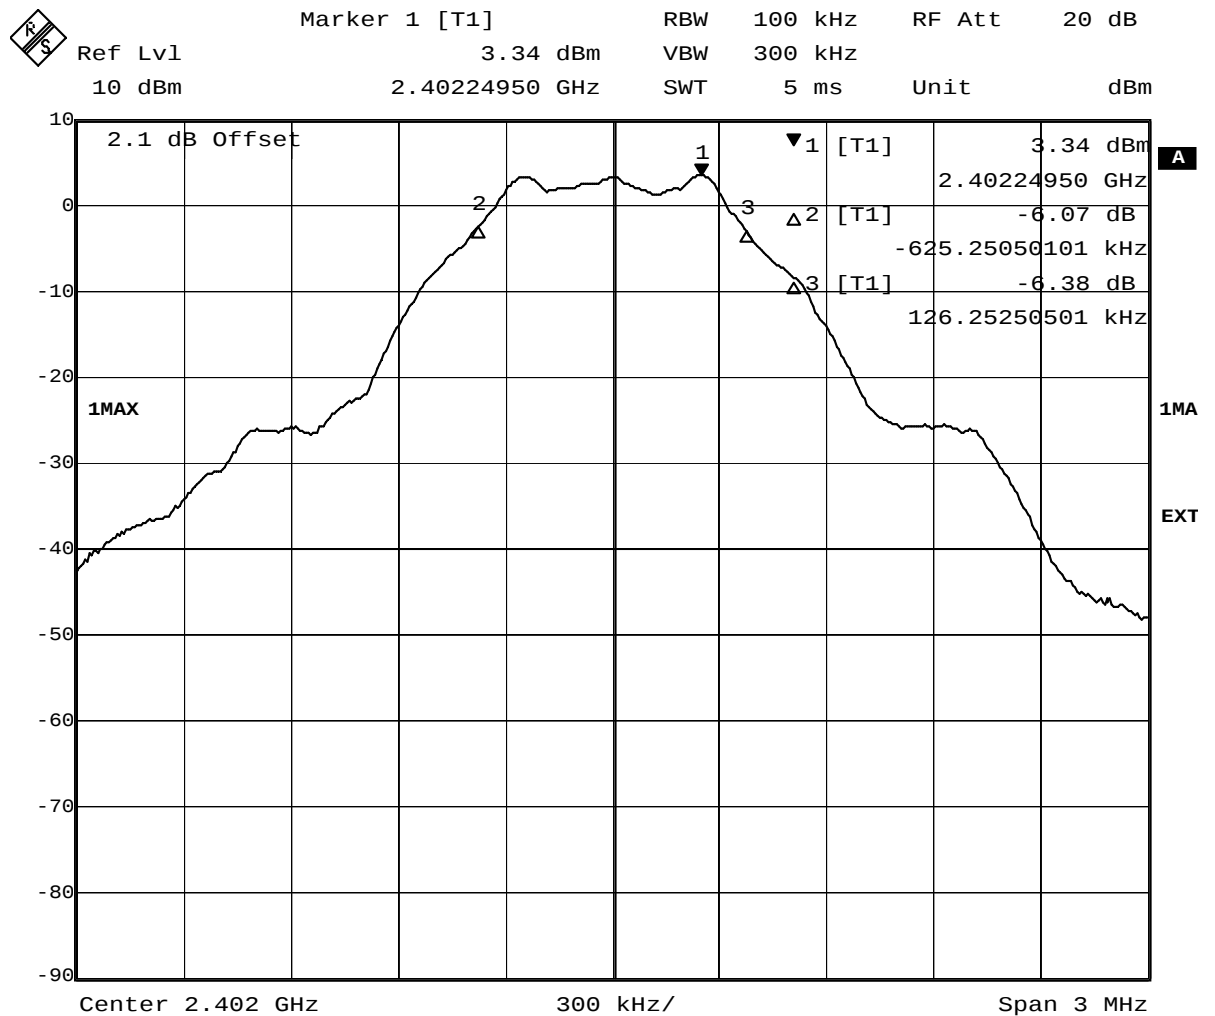

Date: 12.JAN.2015 09:54:09

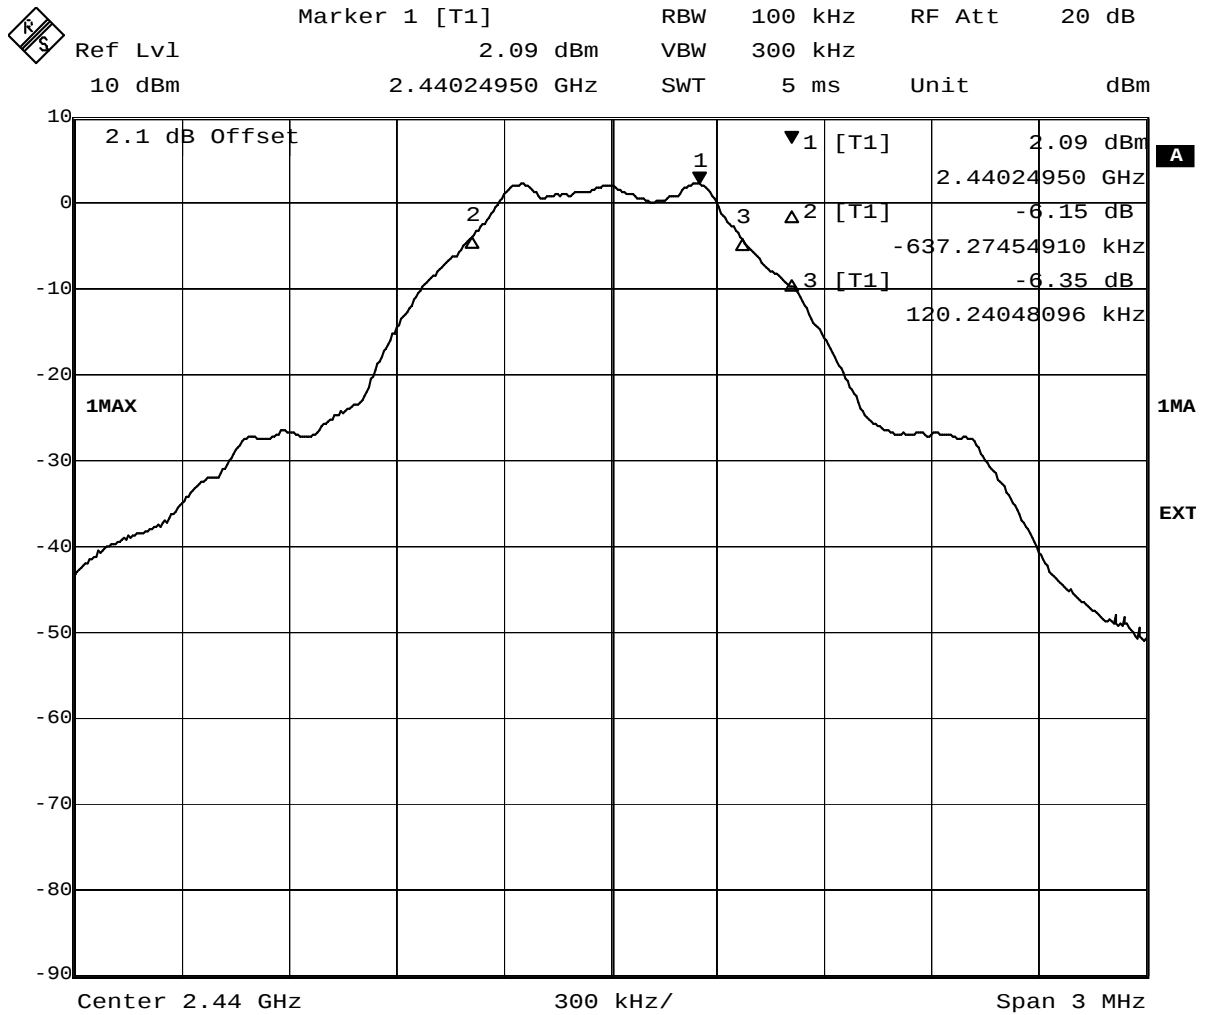

Date: 12.JAN.2015 09:56:16

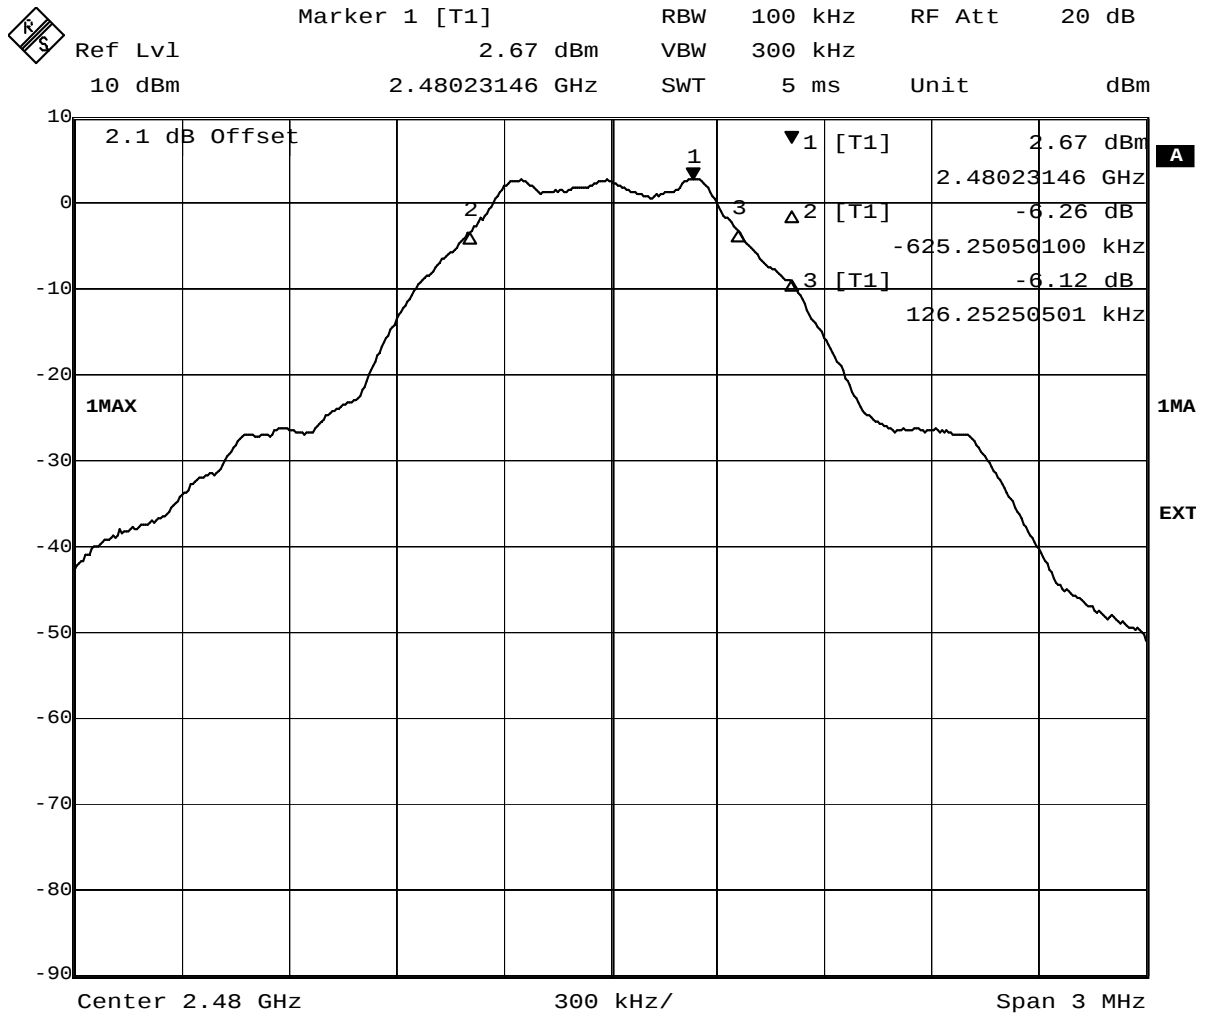

Date: 12.JAN.2015 09:57:30

3.5.4 15c.4 Peak power output §15.247 (b) (1)


Test: 15c.4; Mode = Bluetooth Low Energy

<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AC01
<i>Date of Test:</i>	2015/01/12 10:18
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

		Conducted Transmitter Power					
		2402 MHz		2440 MHz		2480 MHz	
Modulation	Conditions	Output Power (dBm)	Output Power (mW)	Output Power (dBm)	Output Power (mW)	Output Power (dBm)	Output Power (mW)
GFSK	TN, VN	3.91	2.46	2.68	1.85	3.27	2.12


Max Conducted Output Power (FSK Modulation)	3.91	dBm	2.46	mW
---	------	-----	------	----

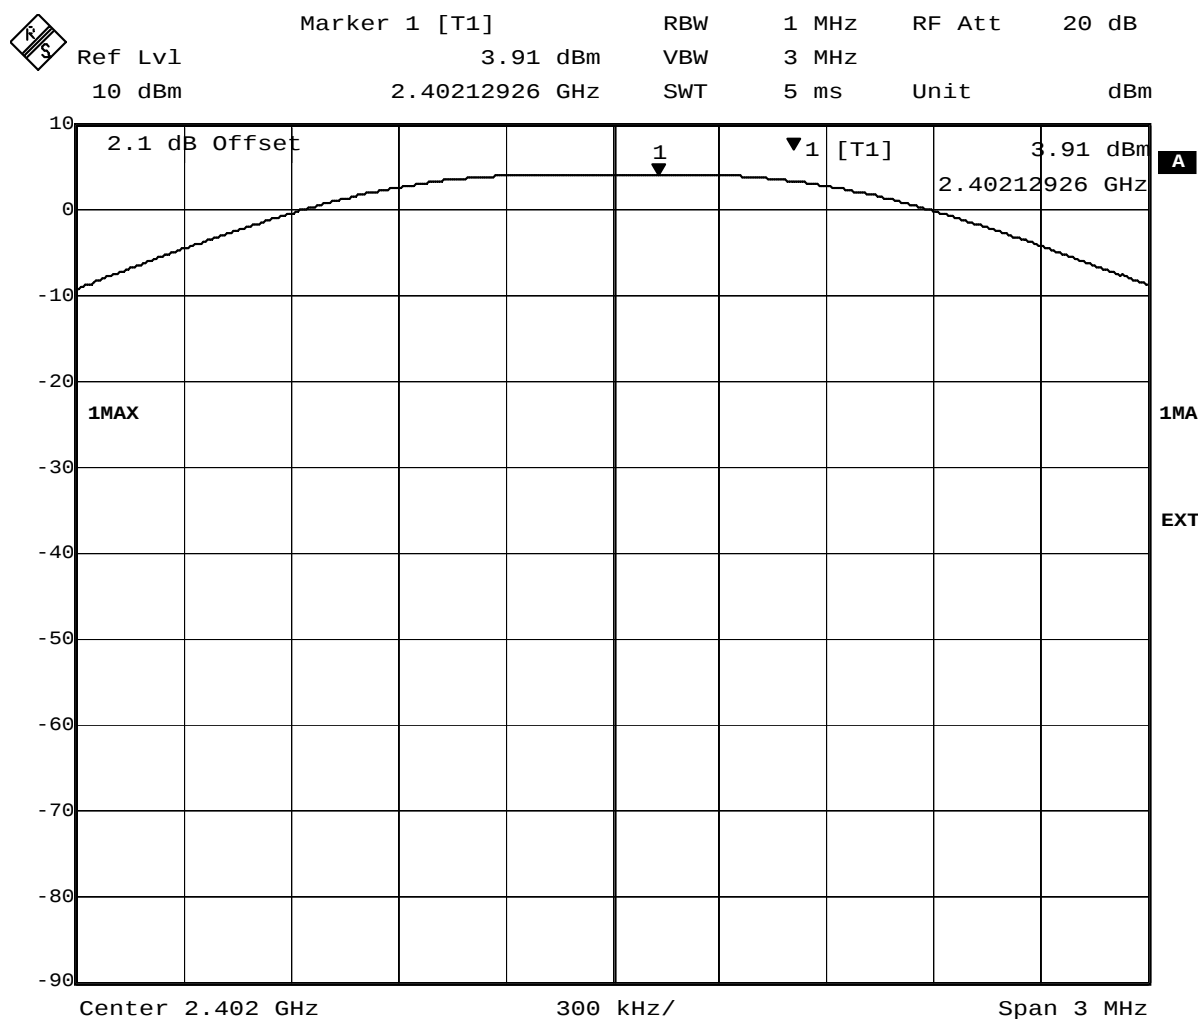

Date: 12.JAN.2015 10:00:26

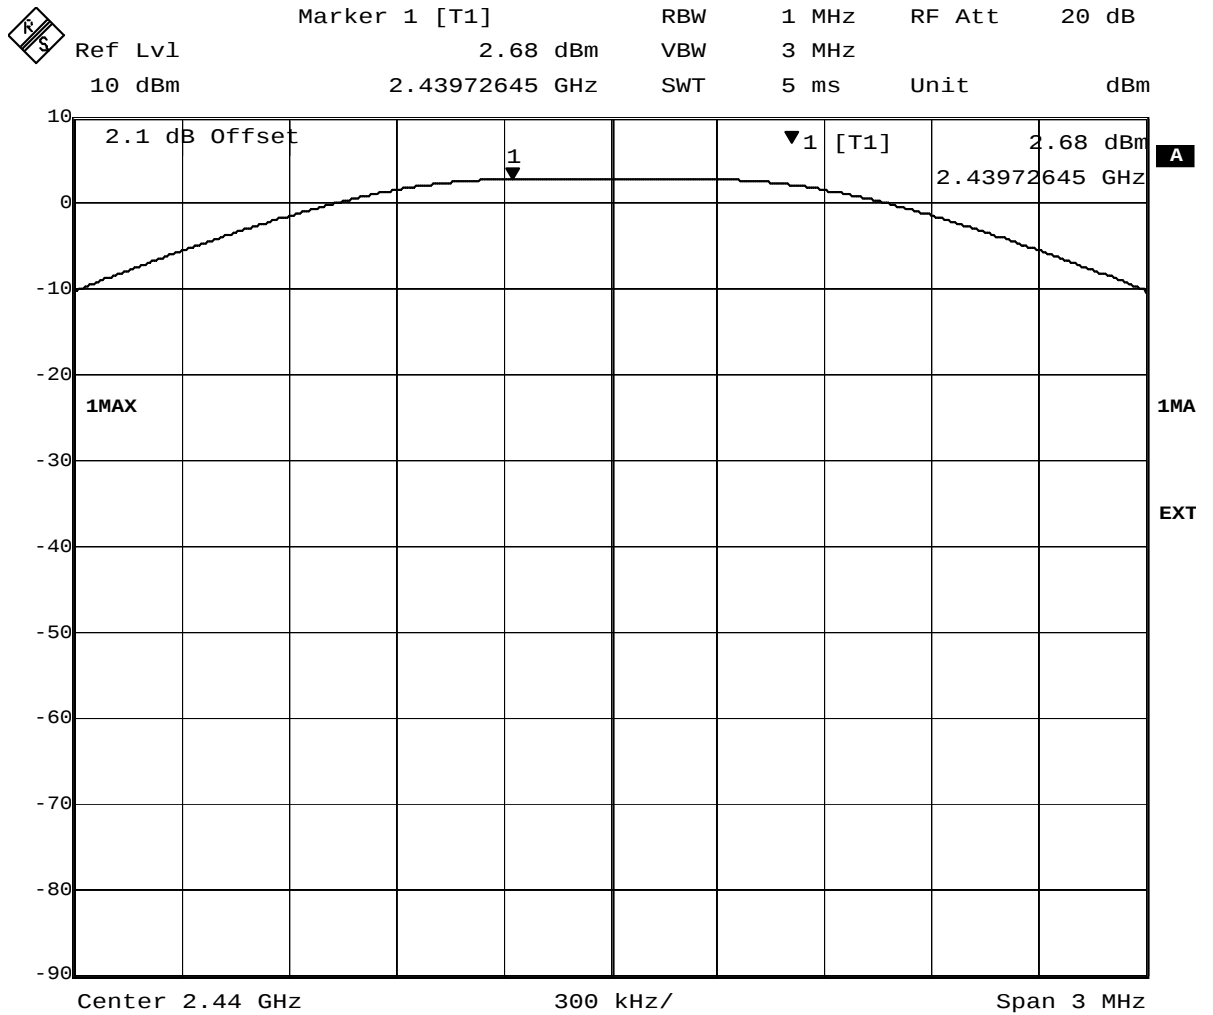

Date: 12.JAN.2015 10:00:59

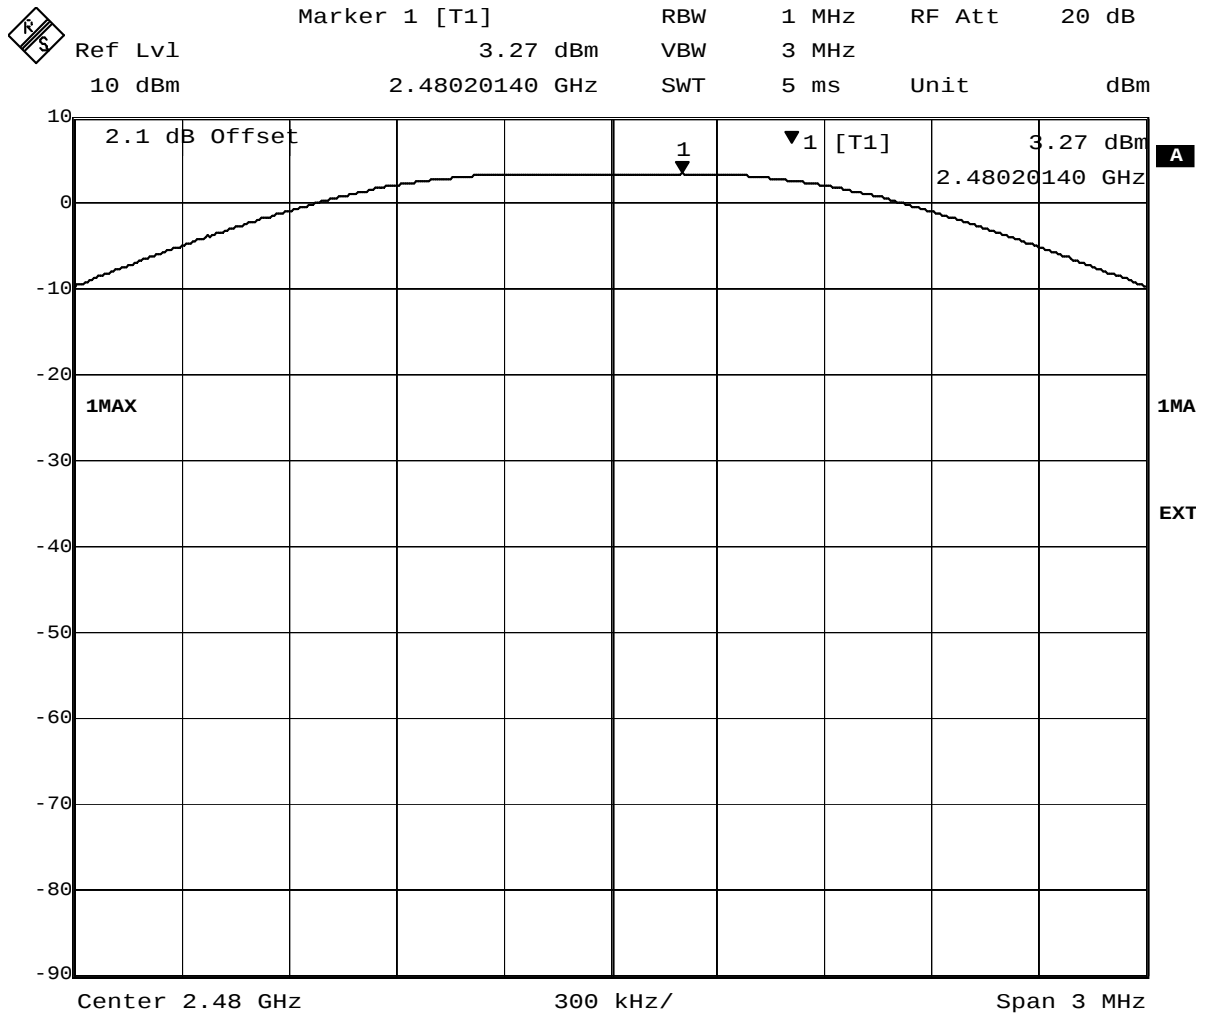

Date: 12.JAN.2015 10:01:31

3.5.5 15c.5 Spurious RF conducted emissions §15.247 (d)


Test: 15c.5; Mode = Bluetooth Low Energy


<i>Result:</i>	Passed
<i>Setup No.:</i>	S01_AC01
<i>Date of Test:</i>	2015/01/12 10:54
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:


Frequency range 30 MHz - 26 GHz			BT transmit using 1 Mbps with GFSK modulation		
Channel (MHz)	Frequency of emission MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2402	**	-56.02	4.54	-15.50	40.52
2440	**	-55.75	3.39	-16.60	39.15
2480	**	-55.18	4.03	-16.00	39.18

* Reference value measured in the Band edge compliance test
** No Peaks found within 20 dB of limit line.

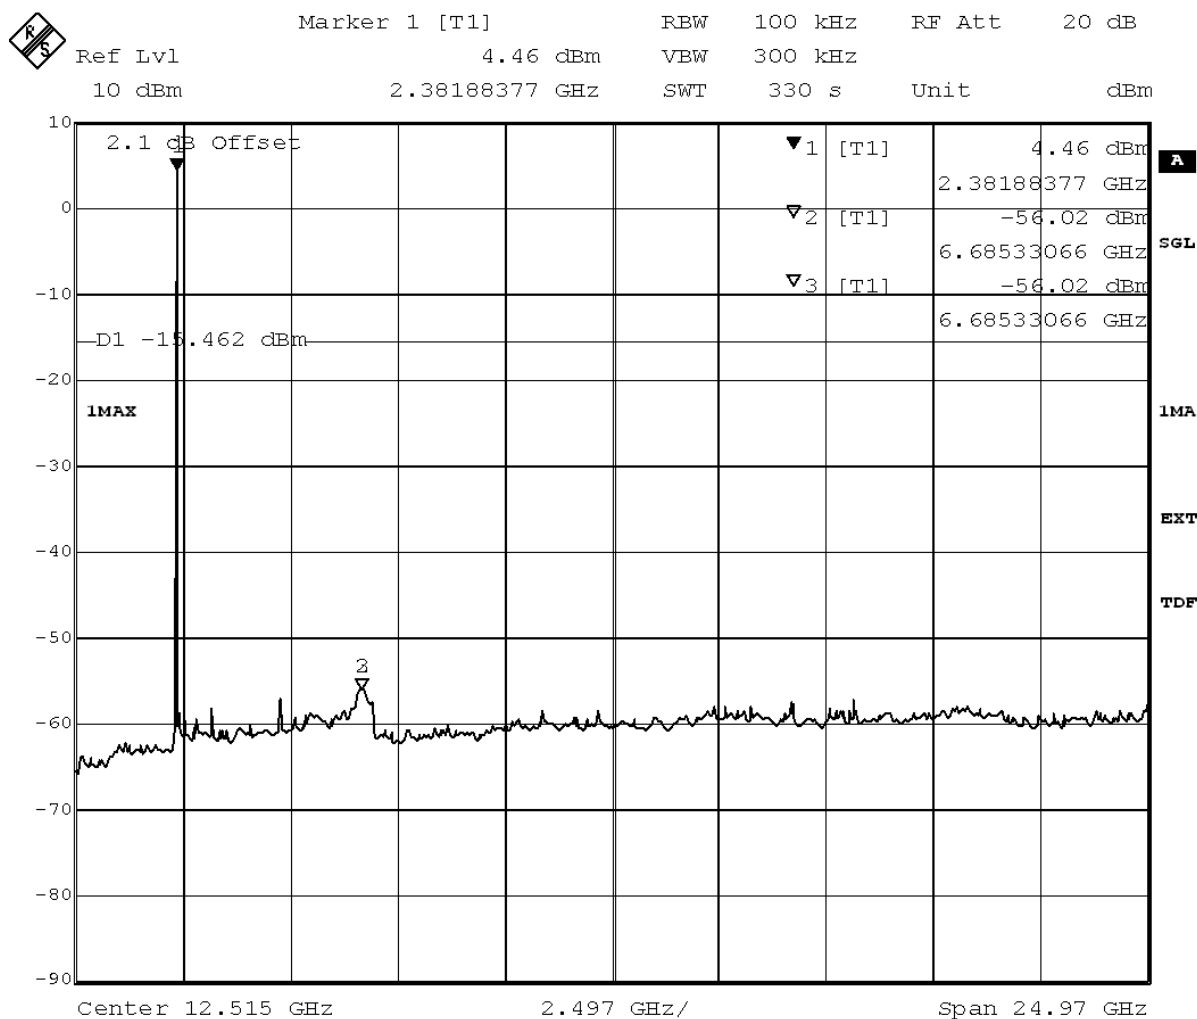

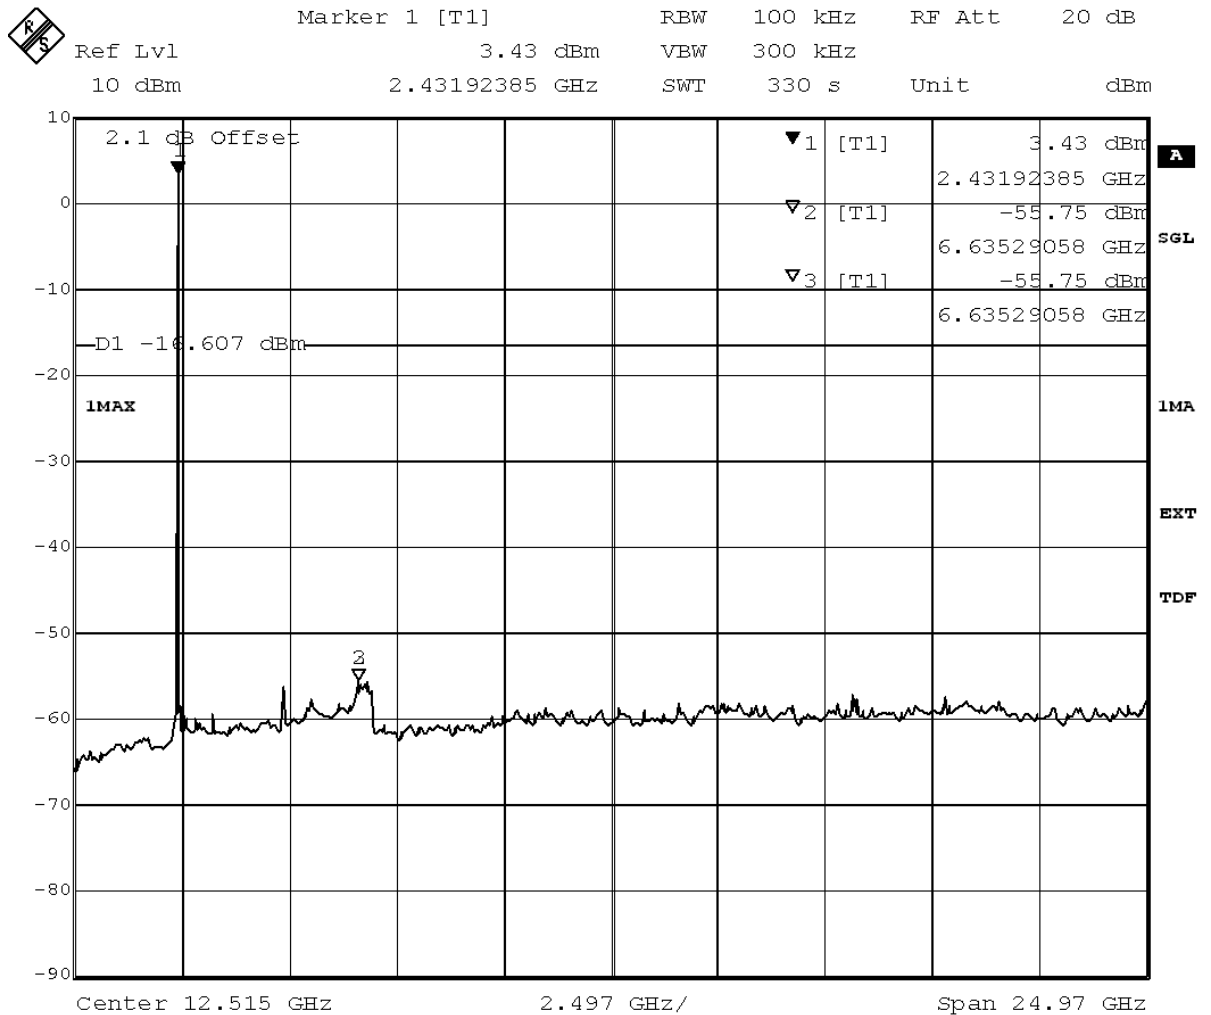

Title: spurious emissions
Comment A: CH M2: 2440 MHz
Date: 12.JAN.2015 10:44:19

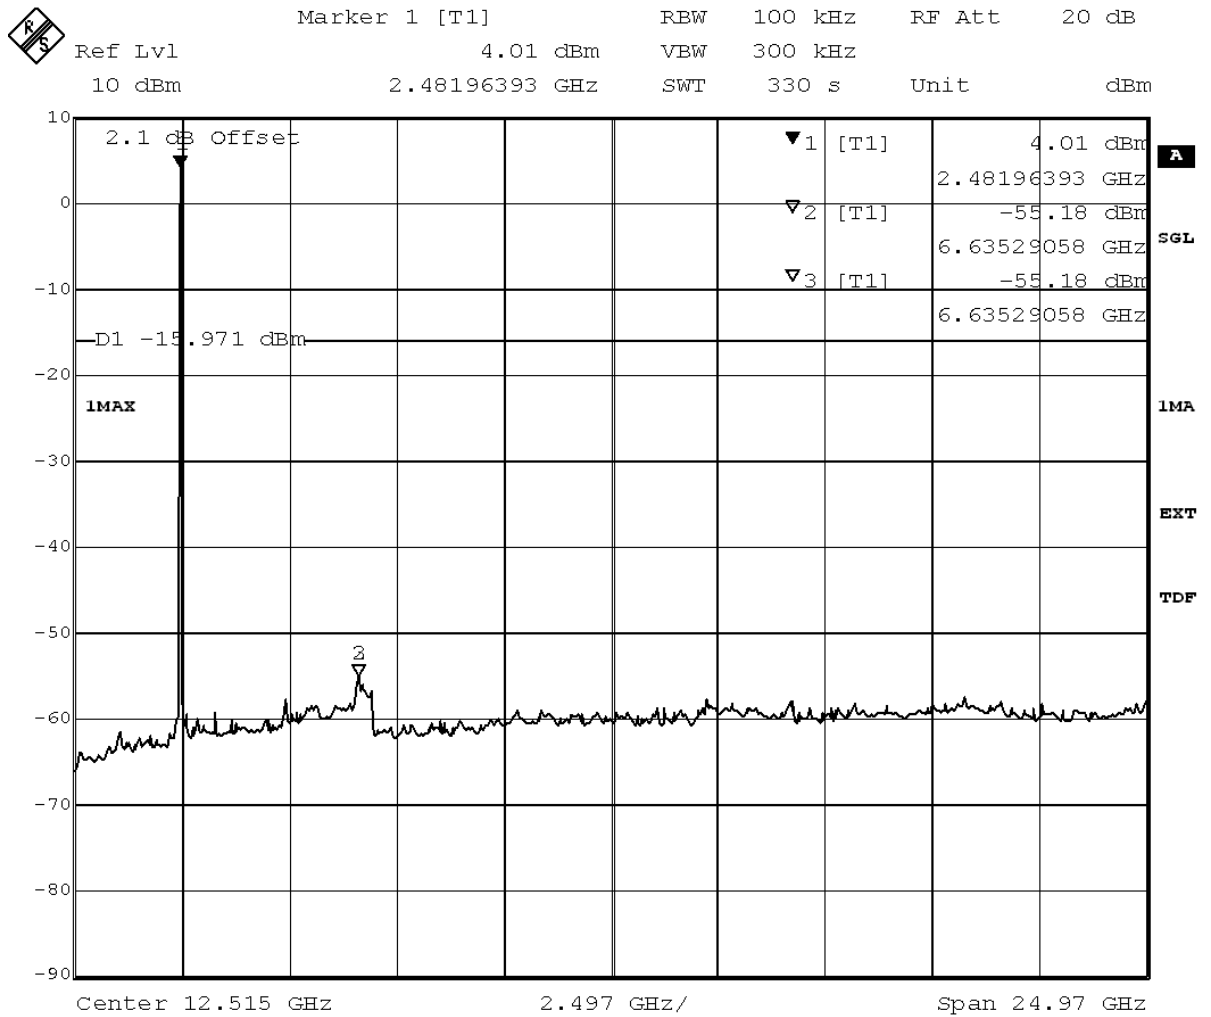

Title: spurious emissions
 Comment A: CH T:2480 MHz
 Date: 12.JAN.2015 10:58:20


3.5.6 15c.6 Band edge compliance §15.247 (d)

Test: 15c.6; Frequency = 2402, Mode = Bluetooth Low Energy

Result: Passed
Setup No.: S01_AC01
Date of Test: 2015/01/12 10:49
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-55.05	4.54	-15.46	39.59

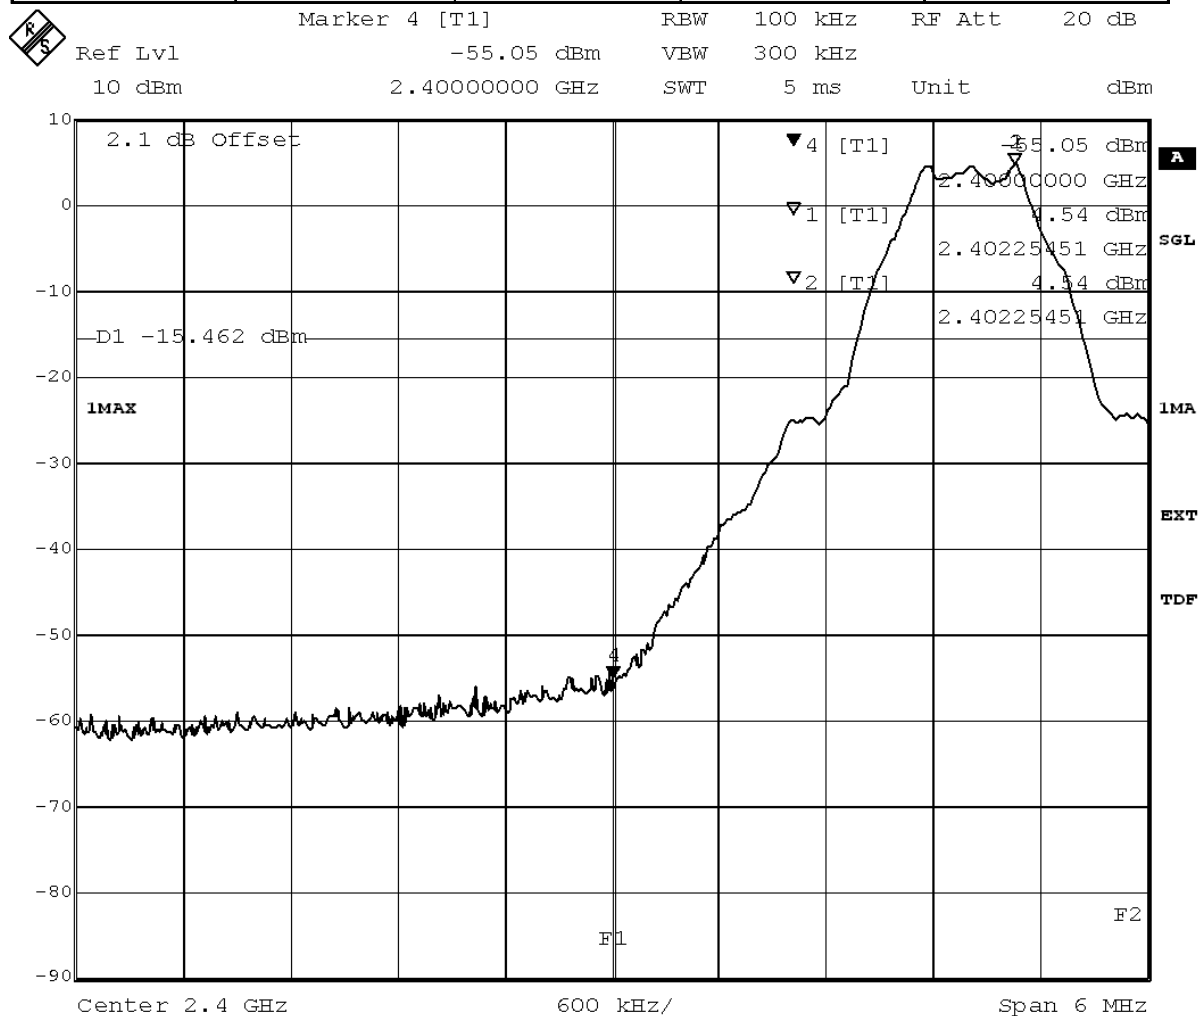


Title: Band Edge Compliance
Comment A: CH B: 2402 MHz
Date: 12.JAN.2015 10:11:48

Test: 15c.6; Frequency = 2480, Mode = Bluetooth Low Energy

Result: Passed
Setup No.: S01_AC01
Date of Test: 2015/01/12 10:53
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-59.94	4.03	-15.97	43.97

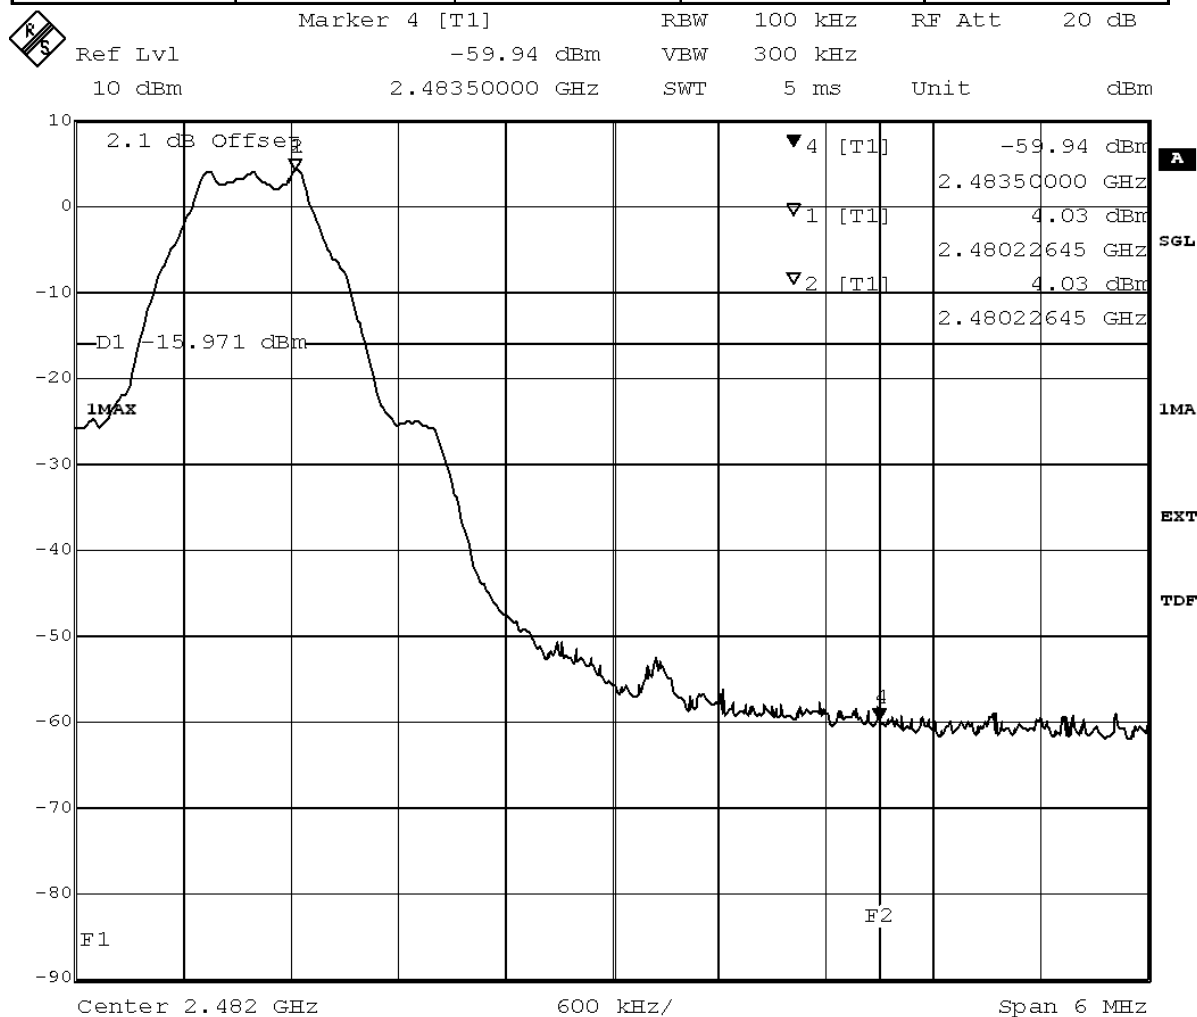

Title: Band Edge Compliance
Comment A: CH T:2480 MHz
Date: 12.JAN.2015 10:46:23

4 Test Equipment Details

4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Multimeter 12

Lab ID: Lab 1
Description: Ex-Tech 520
Serial Number: 05157876

Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/12/04 2015/12/03

Test Equipment Regulatory Bluetooth RF Test Solution

Lab ID: Lab 1
Description: Regulatory Bluetooth RF Tests
Type: Bluetooth RF
Serial Number: 001

Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit CBT	CBT	100302	Rohde & Schwarz GmbH & Co.KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2014/08/29 2015/08/28
Power Meter NRVD	NRVD	832025/059	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2014/08/29 2015/08/28
Power Sensor NRV Z1 A	PROBE	832279/013	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2014/08/28 2015/08/27
Power Supply	NGSM 32/10	2725	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2013/06/20 2015/06/19
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2014/08/29 2015/08/28
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2013/06/21 2016/06/20

Test Equipment Shielded Room 07

Lab ID: Lab 1
Description: Shielded Room 4m x 6m

Test Equipment T/H Logger 15

Lab ID: Lab 1
Description: Lufft Opus10
Serial Number: 13985

Single Devices for T/H Logger 15

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 15 (Environ)	Opus10 THI (8152.00)	13985	Lufft Mess- und Regeltechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2013/01/07 2015/03/09

Test Equipment Temperature Chamber 01

Lab ID: Lab 1
Manufacturer: see single devices
Description: Temperature Chamber KWP 120/70
Type: Weiss
Serial Number: see single devices

Single Devices for Temperature Chamber 01

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2014/03/12 2016/03/11

5 Annex

5.1 Additional Information for Report

Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15. The following subparts are applicable to the results in this test report

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

additional documents

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000. Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.4-2014 is applied.

Description of Methods of Measurements

Conducted emissions (AC power line)

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads. The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dB μ V) = 20 log (Limit (μ V)/1 μ V).

Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The resolution bandwidth for measuring the output power was set to 3 MHz. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) = $10 \log (\text{Limit (W)}/1\text{mW})$
==> Maximum Output Power: 30 dBm

Spurious RF conducted emissions

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4–2014.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.4.

The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

The Loop antenna HFH2-Z2 is used.

Step 1: pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz

- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test site
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz – 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s (BT Timing 1.25 ms)
- Turntable angle range: -180 to $+180^\circ$
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to $+180^\circ$
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by $\pm 22.5^\circ$ around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by ± 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to $+22.5^\circ$ around the determined value
- Height variation range: -0.25 m to $+0.25$ m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

- EMI receiver settings for step 4:
- Detector: Quasi-Peak (< 1 GHz)
 - Measured frequencies: in step 1 determined frequencies
 - IF – Bandwidth: 120 kHz
 - Measuring time: 1 s

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz: The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2–4 are omitted. Step 1 was performed with one height of the receiving antenna only.

- EMI receiver settings:
- Detector: Peak, Average
 - IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement. For the enhanced data rate packets the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at basic data rate. Typically, the measurement for these packets is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the basic data rate. Please refer to the results for the used frequency range.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limit (dBμV/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dBμV/m)+30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dBμV/m)+10dB
1.705 - 30	30	30	Limit (dBμV/m)+10dB

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limit (dBμV/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m})$

Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4, FCC §15.31

Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements: 1. Show compliance of the lower band edge by a conducted measurement and 2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

...

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the lower band edge the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the higher band edge the limit is "specified in Section 15.209(a)".

Power density

Standard FCC Part 15, 10-1-11 Subpart C

The test was performed according to: FCC §15.31

Test Description

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 30 kHz
- Sweep Time: Coupled

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

6-dB bandwidth

Standard FCC Part 15, 10-1-11 Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was setup to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. The results recorded were measured with the modulation which produce the worst-case (widest) occupied bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 MHz


Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Used conversion factor: Output power (dBm) = 10 log (Output power (W) / 1mW)

Setup Drawings

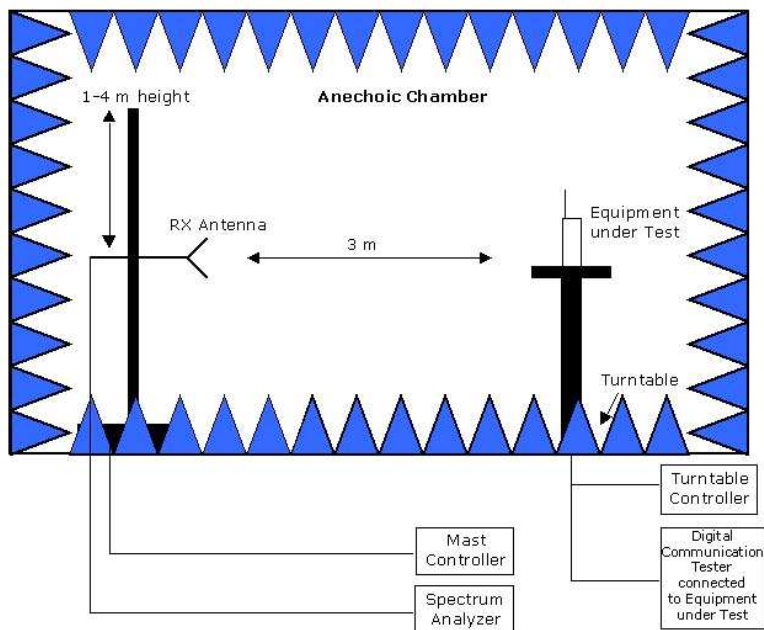

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber:
Measurements below 1 GHz: Semi-anechoic, conducting ground plane.
Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces

November, 2014

To Whom This May Concern

**Correlation of measurement requirements for
DTS (e.g. WLAN 2.4 GHz, BT LE) equipment
from
FCC and IC**

DTS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Occupied bandwidth	§ 15.247 (a) (2)	RSS-210 Issue 8: A8.2 (a)
Peak conducted output power	§ 15.247 (b) (3), (4)	RSS-210 Issue 8: A8.4 (4)
Transmitter spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 4: 6.13 / 8.9/8.10; RSS-210 Issue 8: A8.5
Transmitter spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 4: 6.13 / 8.9/8.10; RSS-210 Issue 8: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210 Issue 8: A8.5
Power density	§ 15.247 (e)	RSS-210 Issue 8: A8.2 (b)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	–	RSS-210 Issue 8: 2.3 RSS Gen Issue 4: 5 / 7 *)

*) Receivers are exempted from certification besides if operating in stand-alone mode in the frequency range 30–960 MHz or if these are scanner receivers.

Revision History

Report version control			
Version	Release date	Change Description	Version validity
initial	2015-08-19	--	invalid
rev1	2015-08-18	- ANSI 63.4:2009 replaced by ANSI 63.4:2014 - Adding a note regarding radiated spurious emissions - Updating conducted emissions results on AC mains - Updating the table in page 23 - Adding IEEE 802.11n (5 GHz) to the supported features	valid

6 Index

1 Administrative Data	2
1.1 Project Data	2
1.2 Applicant Data	2
1.3 Signature of the Testing Responsible	2
1.4 Signature of the Accreditation Responsible	2
2 Test Object Data	3
2.1 General OUT Description	3
2.2 Detailed Description of OUT Samples	3
2.3 OUT Features	4
2.4 Auxiliary Equipment	5
2.5 Setups used for Testing	5
3 Results	6
3.1 General	6
3.2 List of the Applicable Body	6
3.3 List of Test Specification	6
3.4 Summary	7
3.5 Detailed Results	8
3.5.1 15c.1 Conducted emissions (AC power line) §15.207	8
3.5.2 15c.10 Power density §15.247 (e)	10
3.5.3 15c.11 6dB Bandwidth §15.247 (a) (2)	14
3.5.4 15c.4 Peak power output §15.247 (b) (1)	18
3.5.5 15c.5 Spurious RF conducted emissions §15.247 (d)	22
3.5.6 15c.6 Band edge compliance §15.247 (d)	26
4 Test Equipment Details	28
4.1 List of Used Test Equipment	28
5 Annex	30
5.1 Additional Information for Report	30
6 Index	41

