

FCC SAR Test Report

Report No. : W7L-P22050002SA01

Applicant : HMD Global Oy

Address : Bertel Jungin aukio 9,02600 Espoo,Finland

Manufacturer : HMD Global Oy

Address : Bertel Jungin aukio 9,02600 Espoo,Finland

Product : Tablet PC

FCC ID : 2AJOTTA-1462

Brand : NOKIA

Model No. : TA-1462

Standards : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1992 / IEEE 1528:2013
KDB 865664 D01 v01r04 / KDB 865664 D02 v01r02 / KDB 248227 D01 v02r02
KDB 447498 D04 v01 / KDB 616217 D04 v01r02 / KDB 941225 D01 v03r01
KDB 941225 D05 v02r05 / KDB 941225 D06 v02r01

Sample Received Date : May. 10, 2022

Date of Testing : May. 23, 2022 ~ May. 31, 2022

FCC Designation No. : CN1171 FCC Site Registration No. : 525120

CERTIFICATION: The above equipment have been tested by **BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by A2LA or any government agencies.

Prepared By : Jerry Chen
Jerry Chen / Engineer

Approved By : Luke Lu
Luke Lu / Manager



This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1. Summary of Maximum SAR Value	4
2. Description of Equipment Under Test	5
3. SAR Measurement System	6
3.1 Definition of Specific Absorption Rate (SAR)	6
3.2 SPEAG DASY System	6
3.2.1 Robot.....	7
3.2.2 Probes.....	8
3.2.3 Data Acquisition Electronics (DAE)	8
3.2.4 Phantoms	9
3.2.5 Device Holder.....	10
3.2.6 System Validation Dipoles.....	10
3.2.7 Tissue Simulating Liquids.....	11
3.3 SAR System Verification	13
3.4 SAR Measurement Procedure	14
3.4.1 Area & Zoom Scan Procedure	14
3.4.2 Volume Scan Procedure.....	14
3.4.3 Power Drift Monitoring.....	15
3.4.4 Spatial Peak SAR Evaluation	15
3.4.5 SAR Averaged Methods	15
4. SAR Measurement Evaluation	16
4.1 EUT Configuration and Setting.....	16
4.2 EUT Testing Position	37
4.2.1 Body Exposure Conditions	37
4.2.2 SAR Test Exclusion Evaluations.....	38
4.2.3 Simultaneous Transmission Possibilities.....	40
4.3 Tissue Verification	40
4.4 System Verification.....	40
4.5 Maximum Output Power.....	41
4.5.1 Maximum Conducted Power	41
4.5.2 Measured Conducted Power Result.....	44
4.6 SAR Testing Results	59
4.6.1 SAR Test Reduction Considerations	59
4.6.2 SAR Results for Body Exposure Condition (Separation Distance is 0 cm Gap).....	61
4.6.3 SAR Measurement Variability.....	64
4.6.4 Simultaneous Multi-band Transmission Evaluation	65
5. Calibration of Test Equipment.....	86
6. Measurement Uncertainty	87
7. Information on the Testing Laboratories	89
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate for Probe and Dipole	
Appendix D. Photographs of EUT and Setup	

Release Control Record

Report No.	Reason for Change	Date Issued
W7L-P22050002SA01	Initial release	Jun. 15, 2022

FCC SAR Test Report

1. Summary of Maximum SAR Value

Equipment Class	Mode	Highest Reported Body SAR _{1g} (W/kg)
PCB	GSM850	1.17
	GSM1900	1.12
	WCDMA II	1.18
	WCDMA IV	0.65
	WCDMA V	0.94
	LTE 2	1.15
	LTE 5	0.99
	LTE 7	1.12
	LTE 66 / 4	1.19
DTS	2.4G WLAN	1.13
NII	5.2G WLAN	N/A
	5.3G WLAN	1.17
	5.6G WLAN	1.18
	5.8G WLAN	1.19
DSS	Bluetooth	0.34
Highest Simultaneous Transmission SAR		1.03

Note:

- The SAR limit (Head & Body: SAR_{1g} 1.6 W/kg, Extremity: SAR_{10g} 4.0 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.

FCC SAR Test Report

2. Description of Equipment Under Test

EUT Type	Tablet PC
FCC ID	2AJOTTA-1462
Brand Name	NOKIA
Model Name	TA-1462
HW Version	V0.2
SW Version	00WW_0_190
Tx Frequency Bands (Unit: MHz)	GSM850 : 824.2 ~ 848.8 GSM1900 : 1850.2 ~ 1909.8 WCDMA Band II : 1852.4 ~ 1907.6 WCDMA Band IV : 1712.4 ~ 1752.6 WCDMA Band V : 826.4 ~ 846.6 LTE Band 2 : 1850.7 ~ 1909.3 LTE Band 4 : 1710.7 ~ 1754.3 LTE Band 5 : 824.7 ~ 848.3 LTE Band 7 : 2502.5 ~ 2567.5 LTE Band 66 : 1710.7 ~ 1799.3 WLAN : 2412 ~ 2462, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5720, 5745 ~ 5825 Bluetooth : 2402 ~ 2480
Uplink Modulations	GSM & GPRS & EDGE : GMSK, 8PSK WCDMA : BPSK, QPSK LTE : QPSK, 16QAM 802.11b : DSSS 802.11a/g/n/ac : OFDM Bluetooth : GFSK, $\pi/4$ -DQPSK, 8-DPSK
Maximum Tune-up Conducted Power (Unit: dBm)	Please refer to section 4.5.1 of this report.
Antenna Type	PIFA Antenna
EUT Stage	Identical Prototype

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.
2. This device supports both LTE B4 and B66. Since the supported frequency span for LTE B4 falls completely within the LTE B66, they have the same target power, and share the same transmission path, therefore SAR was only assessed for LTE B66.
3. For WWAN and WLAN, when the p-sensor is detect close to the body safe, power reduction will be activated to limit the maximum power. Proximity sensor triggering distances please refer to section 4.1 in this report.
4. According to the product equivalence statement provided by the manufacturer, sample 1/2 the only difference is the LCD. Therefore, sample 1 was full test, sample 2 verify the worst case.

List of Accessory:

LCD 1	Manufacturer	China display Optoelectronics Technology (Huizhou) Company Limited
	Brand Name	Huaxian
	Model Name	8019-3
	Spec.	LCD, 8", 800 * 1280, Add-on, α -Si, Non-airgap, A3
LCD 2	Manufacturer	CHONG QIAN COE DISPLAY TECHNOLOGY CO., LTD.
	Brand Name	COE
	Model Name	T080ET011-HD1-QT
	Spec.	LCD, 8", 800 * 1280

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.



Fig-3.1 DASY System Setup

3.2.1 Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig-3.2 DASY5

FCC SAR Test Report

3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

Model	EX3DV4	
Construction	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Model	ES3DV3	
Construction	Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 4 GHz Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	

3.2.3 Data Acquisition Electronics (DAE)

Model	DAE3, DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5 μ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	

FCC SAR Test Report

3.2.4 Phantoms


Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	

Model	ELI	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	

FCC SAR Test Report

3.2.5 Device Holder

Model	Mounting Device	
Construction	In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
Material	POM	

Model	Laptop Extensions Kit	
Construction	Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner.	
Material	POM, Acrylic glass, Foam	


3.2.6 System Validation Dipoles

Model	D-Serial	
Construction	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
Frequency	750 MHz to 5800 MHz	
Return Loss	> 20 dB	
Power Capability	> 100 W ($f < 1\text{GHz}$), > 40 W ($f > 1\text{GHz}$)	

FCC SAR Test Report

3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.

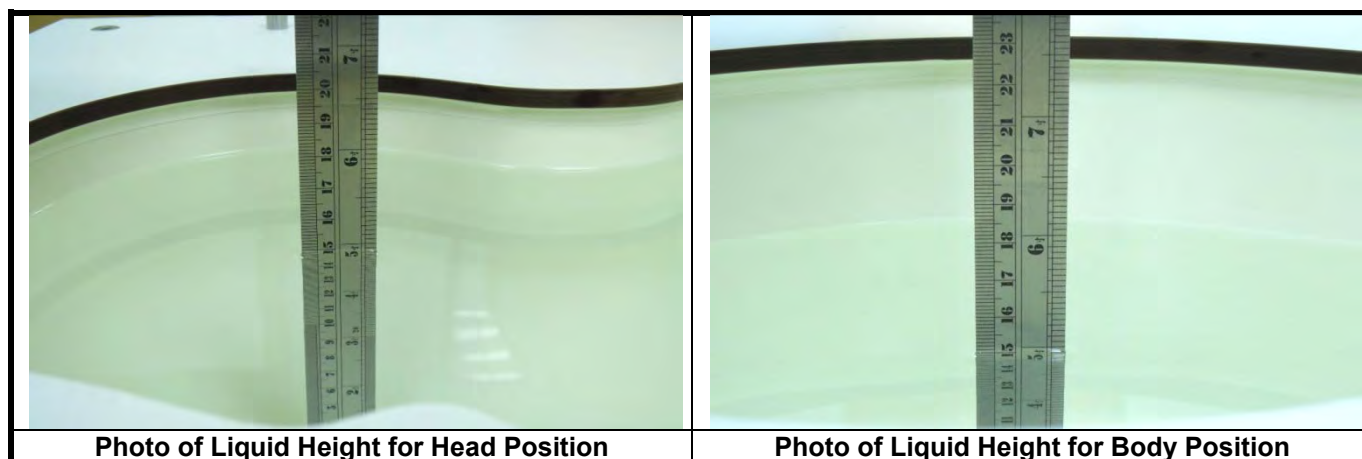

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528, and KDB 865664 D01 Appendix A. For the body tissue simulating liquids, the dielectric properties are defined in KDB 865664 D01 Appendix A. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a dielectric assessment kit and a network analyzer.

Table-3.1 Targets of Tissue Simulating Liquid

Frequency (MHz)	Target Permittivity	Range of $\pm 5\%$	Target Conductivity	Range of $\pm 5\%$
For Head				
750	41.9	39.8 ~ 44.0	0.89	0.85 ~ 0.93
835	41.5	39.4 ~ 43.6	0.90	0.86 ~ 0.95
900	41.5	39.4 ~ 43.6	0.97	0.92 ~ 1.02
1450	40.5	38.5 ~ 42.5	1.20	1.14 ~ 1.26
1640	40.3	38.3 ~ 42.3	1.29	1.23 ~ 1.35
1750	40.1	38.1 ~ 42.1	1.37	1.30 ~ 1.44
1800	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
1900	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2000	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2300	39.5	37.5 ~ 41.5	1.67	1.59 ~ 1.75
2450	39.2	37.2 ~ 41.2	1.80	1.71 ~ 1.89
2600	39.0	37.1 ~ 41.0	1.96	1.86 ~ 2.06
3500	37.9	36.0 ~ 39.8	2.91	2.76 ~ 3.06
5200	36.0	34.2 ~ 37.8	4.66	4.43 ~ 4.89
5300	35.9	34.1 ~ 37.7	4.76	4.52 ~ 5.00
5500	35.6	33.8 ~ 37.4	4.96	4.71 ~ 5.21
5600	35.5	33.7 ~ 37.3	5.07	4.82 ~ 5.32
5800	35.3	33.5 ~ 37.1	5.27	5.01 ~ 5.53

FCC SAR Test Report

The following table gives the recipes for tissue simulating liquids.

Table-3.2 Recipes of Tissue Simulating Liquid

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H750	0.2	-	0.2	1.5	56.0	-	42.1	-
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H900	0.2	-	0.2	1.4	58.0	-	40.2	-
H1450	-	43.3	-	0.6	-	-	56.1	-
H1640	-	45.8	-	0.5	-	-	53.7	-
H1750	-	47.0	-	0.4	-	-	52.6	-
H1800	-	44.5	-	0.3	-	-	55.2	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2000	-	44.5	-	0.1	-	-	55.4	-
H2300	-	44.9	-	0.1	-	-	55.0	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H2600	-	45.1	-	0.1	-	-	54.8	-
H3500	-	8.0	-	0.2	-	20.0	71.8	-
H5G	-	-	-	-	-	17.2	65.5	17.3

3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

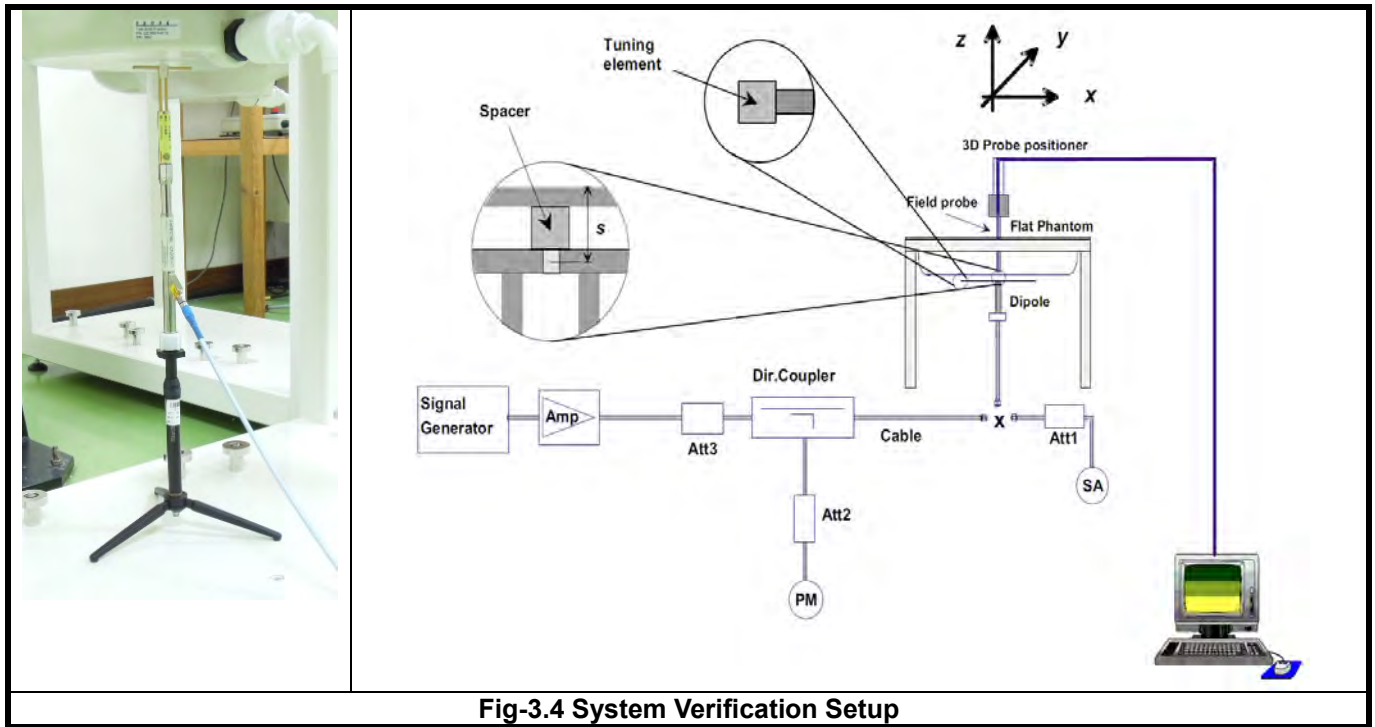


Fig-3.4 System Verification Setup

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The spectrum analyzer measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- Make EUT to transmit maximum output power
- Measure conducted output power through RF cable
- Place the EUT in the specific position of phantom
- Perform SAR testing steps on the DASY system
- Record the SAR value

3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. According to KDB 865664 D01, the resolution for Area and Zoom scan is specified in the table below.

Items	<= 2 GHz	2-3 GHz	3-4 GHz	4-5 GHz	5-6 GHz
Area Scan ($\Delta x, \Delta y$)	<= 15 mm	<= 12 mm	<= 12 mm	<= 10 mm	<= 10 mm
Zoom Scan ($\Delta x, \Delta y$)	<= 8 mm	<= 5 mm	<= 5 mm	<= 4 mm	<= 4 mm
Zoom Scan (Δz)	<= 5 mm	<= 5 mm	<= 4 mm	<= 3 mm	<= 2 mm
Zoom Scan Volume	>= 30 mm	>= 30 mm	>= 28 mm	>= 25 mm	>= 22 mm

Note:

When zoom scan is required and report SAR is <= 1.4 W/kg, the zoom scan resolution of $\Delta x / \Delta y$ (2-3GHz: <= 8 mm, 3-4GHz: <= 7 mm, 4-6GHz: <= 5 mm) may be applied.

3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

3.4.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

4. SAR Measurement Evaluation

4.1 EUT Configuration and Setting

<Connections between EUT and System Simulator>

For WWAN SAR testing, the EUT was linked and controlled by base station emulator (Agilent E5515C is used for GSM/WCDMA/CDMA, and Anritsu MT8820C is used for LTE). Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

< Proximity Sensor Triggering Distances >

The proximity sensor triggering distance was determined per KDB 616217 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.


In the preliminary triggering distance testing, the tissue-equivalent medium for different frequency bands were used for verification; no other frequency bands tissue-equivalent medium was found to result in shortest triggering than that for 5700MHz, and the tissue-equivalent medium for 5700MHz was used for formal proximity sensor triggering testing.

Summary for power verification per distance was tabulated in the below table.

FCC SAR Test Report


WWAN Antenna

Output Power Verification in dBm for EUT Rear Face (moving toward phantom)											
Distance (mm)	10	11	12	13	14	15	16	17	18	19	20
GSM850 Ch189 (GPRS 2Txslots)	26.30	26.30	26.30	26.30	26.30	30.43	30.43	30.43	30.43	30.43	30.43
GSM1900 Ch512 (GPRS 2Txslots)	22.98	22.98	22.98	22.98	22.98	27.94	27.94	27.94	27.94	27.94	27.94
WCDMA II Ch9400 (RMC12.2K)	15.81	15.81	15.81	15.81	15.81	22.14	22.14	22.14	22.14	22.14	22.14
WCDMA IV Ch1312 (RMC12.2K)	15.55	15.55	15.55	15.55	15.55	22.34	22.34	22.34	22.34	22.34	22.34
WCDMA V Ch4233 (RMC12.2K)	20.55	20.55	20.55	20.55	20.55	22.45	22.45	22.45	22.45	22.45	22.45
LTE 2 Ch18900 (QPSK20M_1RB_OS0)	16.13	16.13	16.13	16.13	16.13	23.27	23.27	23.27	23.27	23.27	23.27
LTE 4 Ch20175 (QPSK20M_1RB_OS0)	15.78	15.78	15.78	15.78	15.78	23.27	23.27	23.27	23.27	23.27	23.27
LTE 5 Ch20600 (QPSK10M_1RB_OS49)	20.77	20.77	20.77	20.77	20.77	22.43	22.43	22.43	22.43	22.43	22.43
LTE 7 Ch21100 (QPSK20M_1RB_OS99)	14.47	14.47	14.47	14.47	14.47	23.09	23.09	23.09	23.09	23.09	23.09
LTE 66 Ch132322 (QPSK20M_1RB_OS0)	15.53	15.53	15.53	15.53	15.53	23.07	23.07	23.07	23.07	23.07	23.07

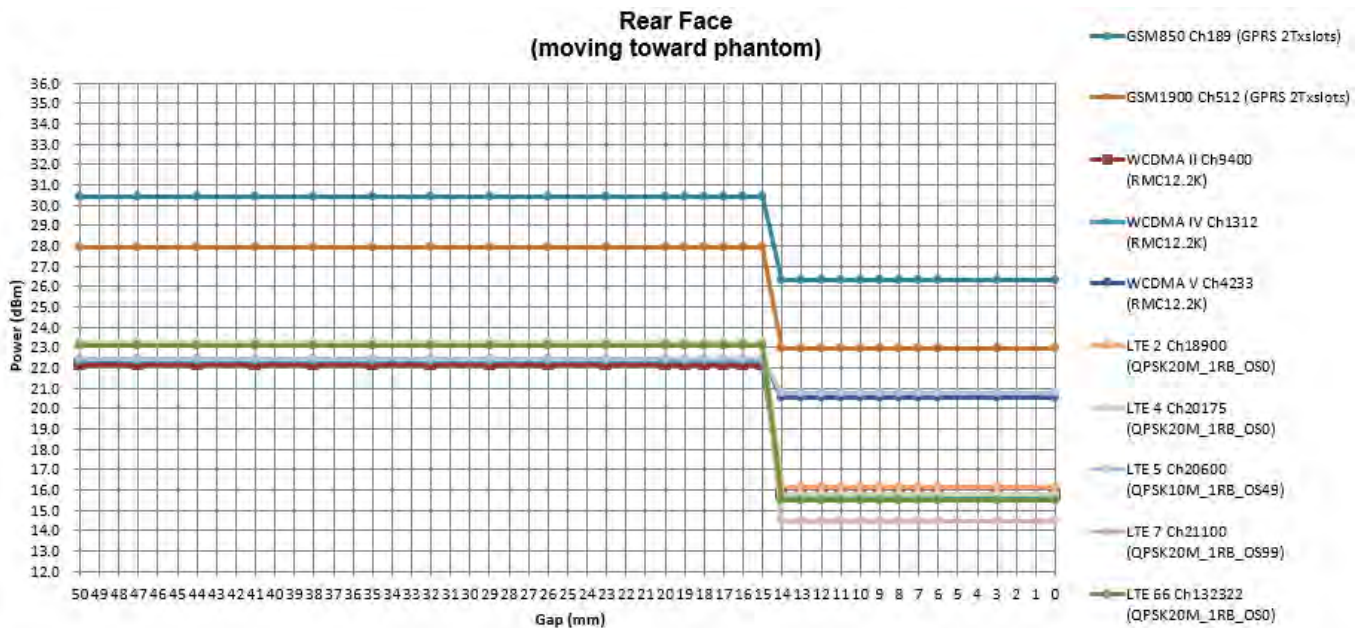


FCC SAR Test Report

Output Power Verification in dBm for EUT Rear Face (moving away phantom)											
Distance (mm)	11	12	13	14	16	17	18	19	20	21	22
GSM850 Ch189 (GPRS 2Txslots)	26.30	26.30	26.30	26.30	26.30	30.43	30.43	30.43	30.43	30.43	30.43
GSM1900 Ch512 (GPRS 2Txslots)	22.98	22.98	22.98	22.98	22.98	27.94	27.94	27.94	27.94	27.94	27.94
WCDMA II Ch9400 (RMC12.2K)	15.81	15.81	15.81	15.81	15.81	22.14	22.14	22.14	22.14	22.14	22.14
WCDMA IV Ch1312 (RMC12.2K)	15.55	15.55	15.55	15.55	15.55	22.34	22.34	22.34	22.34	22.34	22.34
WCDMA V Ch4233 (RMC12.2K)	20.55	20.55	20.55	20.55	20.55	22.45	22.45	22.45	22.45	22.45	22.45
LTE 2 Ch18900 (QPSK20M_1RB_OS0)	16.13	16.13	16.13	16.13	16.13	23.27	23.27	23.27	23.27	23.27	23.27
LTE 4 Ch20175 (QPSK20M_1RB_OS0)	15.78	15.78	15.78	15.78	15.78	23.27	23.27	23.27	23.27	23.27	23.27
LTE 5 Ch20600 (QPSK10M_1RB_OS49)	20.77	20.77	20.77	20.77	20.77	22.43	22.43	22.43	22.43	22.43	22.43
LTE 7 Ch21100 (QPSK20M_1RB_OS99)	14.47	14.47	14.47	14.47	14.47	23.09	23.09	23.09	23.09	23.09	23.09
LTE 66 Ch132322 (QPSK20M_1RB_OS0)	15.53	15.53	15.53	15.53	15.53	23.07	23.07	23.07	23.07	23.07	23.07

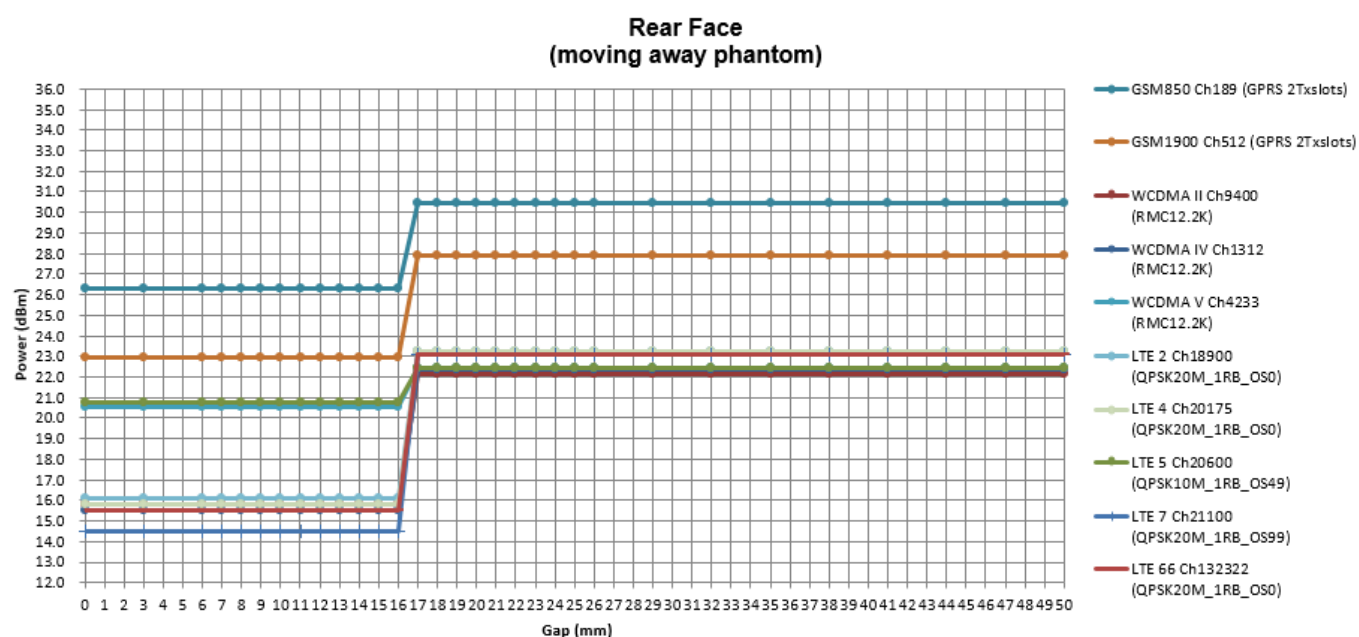


FCC SAR Test Report

Output Power Verification in dBm for EUT Right Side (moving toward phantom)											
Distance (mm)	4	5	6	7	8	9	10	11	12	13	14
GSM850 Ch189 (GPRS 2Txslots)	26.30	26.30	26.30	26.30	26.30	30.43	30.43	30.43	30.43	30.43	30.43
GSM1900 Ch512 (GPRS 2Txslots)	22.98	22.98	22.98	22.98	22.98	27.94	27.94	27.94	27.94	27.94	27.94
WCDMA II Ch9400 (RMC12.2K)	15.81	15.81	15.81	15.81	15.81	22.14	22.14	22.14	22.14	22.14	22.14
WCDMA IV Ch1312 (RMC12.2K)	15.55	15.55	15.55	15.55	15.55	22.34	22.34	22.34	22.34	22.34	22.34
WCDMA V Ch4233 (RMC12.2K)	20.55	20.55	20.55	20.55	20.55	22.45	22.45	22.45	22.45	22.45	22.45
LTE 2 Ch18900 (QPSK20M_1RB_OS0)	16.13	16.13	16.13	16.13	16.13	23.27	23.27	23.27	23.27	23.27	23.27
LTE 4 Ch20175 (QPSK20M_1RB_OS0)	15.78	15.78	15.78	15.78	15.78	23.27	23.27	23.27	23.27	23.27	23.27
LTE 5 Ch20600 (QPSK10M_1RB_OS49)	20.77	20.77	20.77	20.77	20.77	22.43	22.43	22.43	22.43	22.43	22.43
LTE 7 Ch21100 (QPSK20M_1RB_OS99)	14.47	14.47	14.47	14.47	14.47	23.09	23.09	23.09	23.09	23.09	23.09
LTE 66 Ch132322 (QPSK20M_1RB_OS0)	15.53	15.53	15.53	15.53	15.53	23.07	23.07	23.07	23.07	23.07	23.07

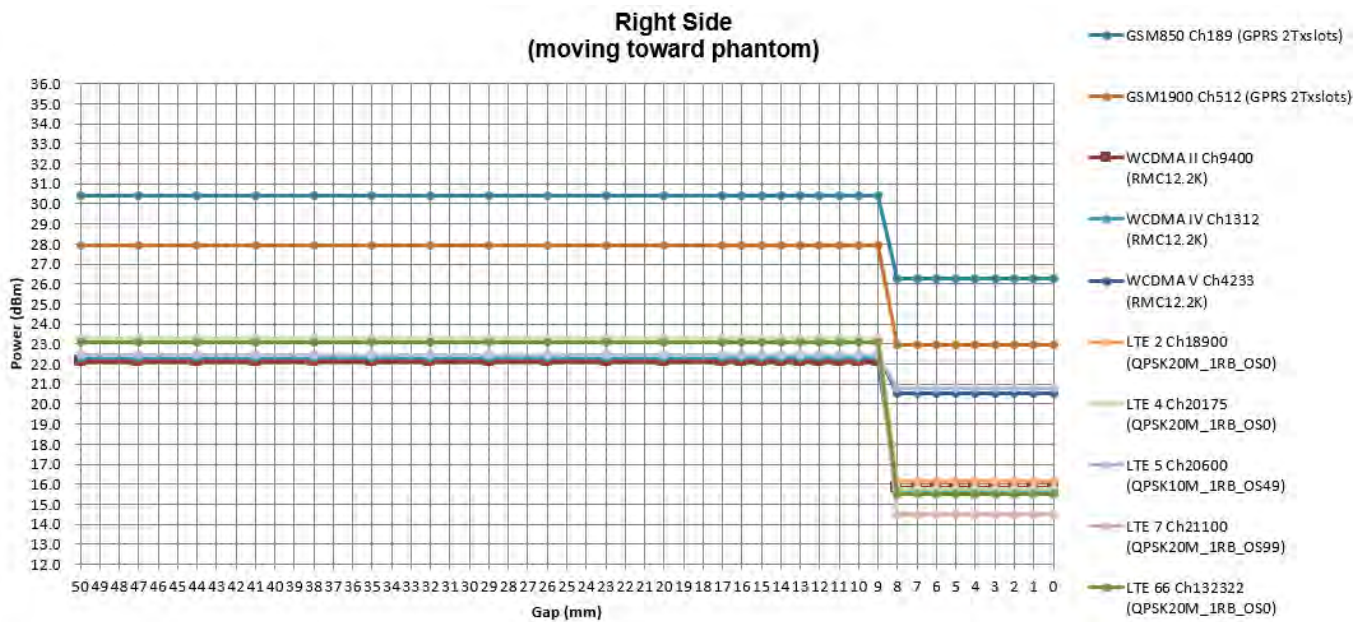


FCC SAR Test Report

Output Power Verification in dBm for EUT Right Side (moving away phantom)											
Distance (mm)	6	7	8	9	10	11	12	13	14	15	16
GSM850 Ch189 (GPRS 2Txslots)	26.30	26.30	26.30	26.30	26.30	30.43	30.43	30.43	30.43	30.43	30.43
GSM1900 Ch512 (GPRS 2Txslots)	22.98	22.98	22.98	22.98	22.98	27.94	27.94	27.94	27.94	27.94	27.94
WCDMA II Ch9400 (RMC12.2K)	15.81	15.81	15.81	15.81	15.81	22.14	22.14	22.14	22.14	22.14	22.14
WCDMA IV Ch1312 (RMC12.2K)	15.55	15.55	15.55	15.55	15.55	22.34	22.34	22.34	22.34	22.34	22.34
WCDMA V Ch4233 (RMC12.2K)	20.55	20.55	20.55	20.55	20.55	22.45	22.45	22.45	22.45	22.45	22.45
LTE 2 Ch18900 (QPSK20M_1RB_OS0)	16.13	16.13	16.13	16.13	16.13	23.27	23.27	23.27	23.27	23.27	23.27
LTE 4 Ch20175 (QPSK20M_1RB_OS0)	15.78	15.78	15.78	15.78	15.78	23.27	23.27	23.27	23.27	23.27	23.27
LTE 5 Ch20600 (QPSK10M_1RB_OS49)	20.77	20.77	20.77	20.77	20.77	22.43	22.43	22.43	22.43	22.43	22.43
LTE 7 Ch21100 (QPSK20M_1RB_OS99)	14.47	14.47	14.47	14.47	14.47	23.09	23.09	23.09	23.09	23.09	23.09
LTE 66 Ch132322 (QPSK20M_1RB_OS0)	15.53	15.53	15.53	15.53	15.53	23.07	23.07	23.07	23.07	23.07	23.07

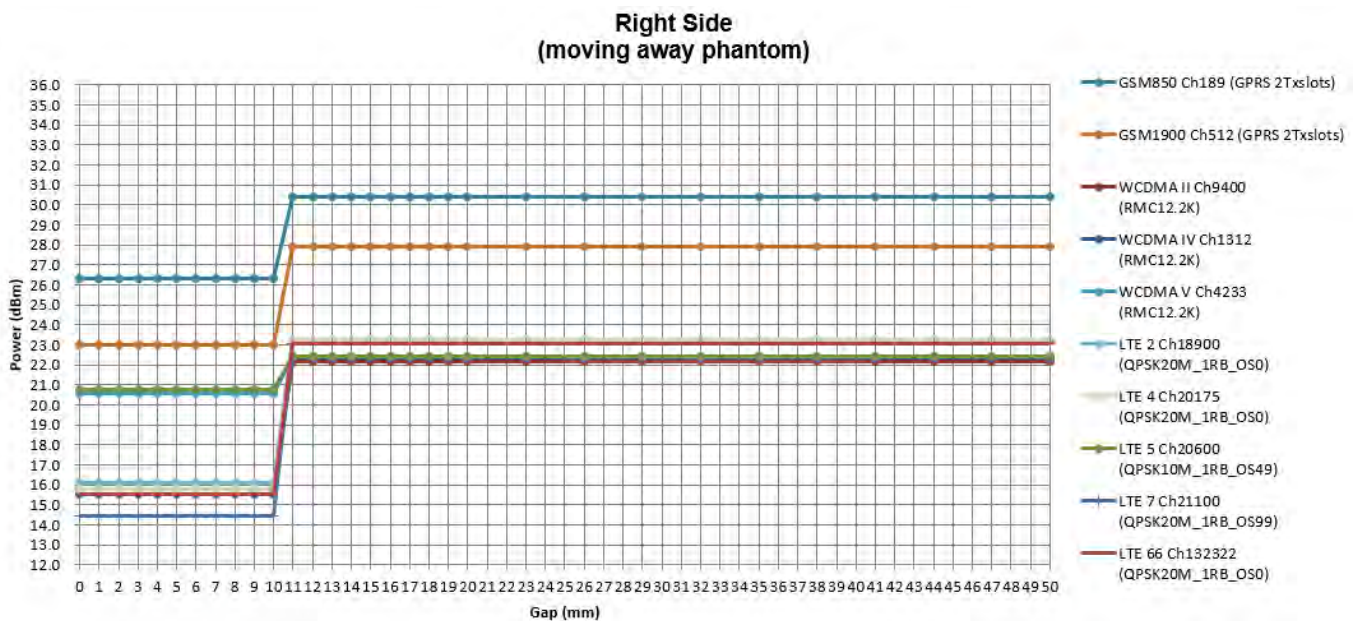


FCC SAR Test Report

Output Power Verification in dBm for EUT Bottom Side (moving toward phantom)											
Distance (mm)	9	10	11	12	13	14	15	16	17	18	19
GSM850 Ch189 (GPRS 2Txslots)	26.30	26.30	26.30	26.30	26.30	30.43	30.43	30.43	30.43	30.43	30.43
GSM1900 Ch512 (GPRS 2Txslots)	22.98	22.98	22.98	22.98	22.98	27.94	27.94	27.94	27.94	27.94	27.94
WCDMA II Ch9400 (RMC12.2K)	15.81	15.81	15.81	15.81	15.81	22.14	22.14	22.14	22.14	22.14	22.14
WCDMA IV Ch1312 (RMC12.2K)	15.55	15.55	15.55	15.55	15.55	22.34	22.34	22.34	22.34	22.34	22.34
WCDMA V Ch4233 (RMC12.2K)	20.55	20.55	20.55	20.55	20.55	22.45	22.45	22.45	22.45	22.45	22.45
LTE 2 Ch18900 (QPSK20M_1RB_OS0)	16.13	16.13	16.13	16.13	16.13	23.27	23.27	23.27	23.27	23.27	23.27
LTE 4 Ch20175 (QPSK20M_1RB_OS0)	15.78	15.78	15.78	15.78	15.78	23.27	23.27	23.27	23.27	23.27	23.27
LTE 5 Ch20600 (QPSK10M_1RB_OS49)	20.77	20.77	20.77	20.77	20.77	22.43	22.43	22.43	22.43	22.43	22.43
LTE 7 Ch21100 (QPSK20M_1RB_OS99)	14.47	14.47	14.47	14.47	14.47	23.09	23.09	23.09	23.09	23.09	23.09
LTE 66 Ch132322 (QPSK20M_1RB_OS0)	15.53	15.53	15.53	15.53	15.53	23.07	23.07	23.07	23.07	23.07	23.07

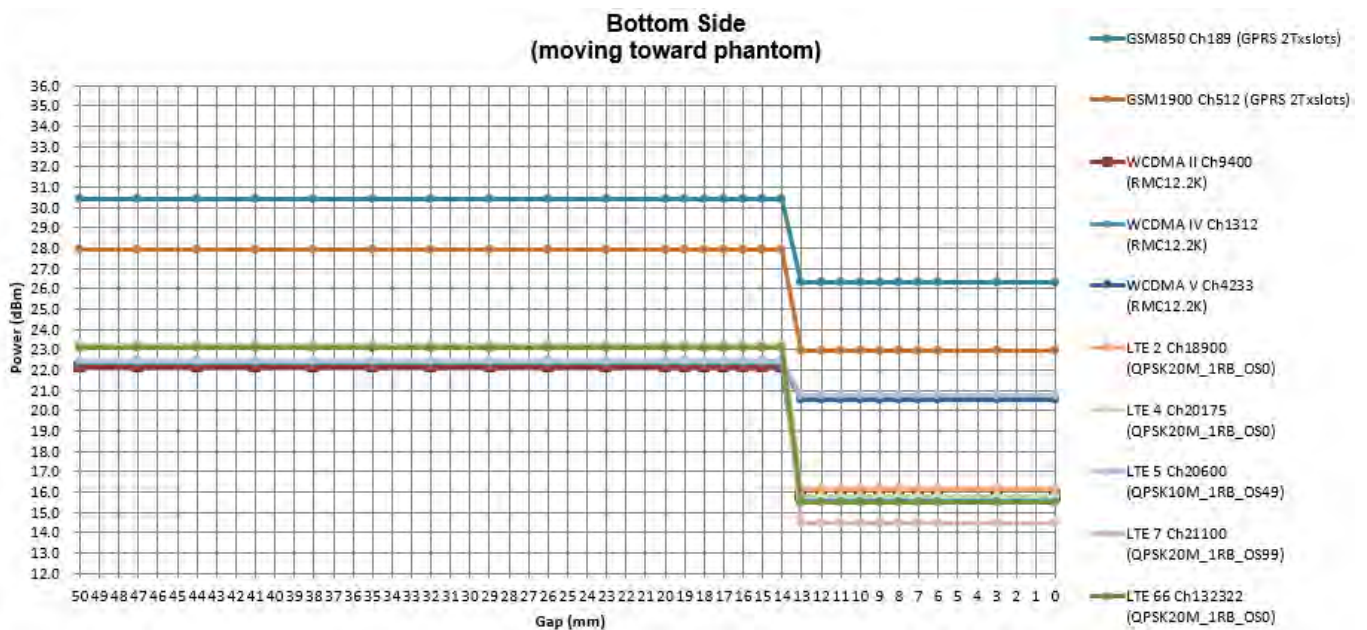

FCC SAR Test Report


Output Power Verification in dBm for EUT Bottom Side (moving away phantom)											
Distance (mm)	11	12	13	14	15	16	17	18	19	20	21
GSM850 Ch189 (GPRS 2Txslots)	26.30	26.30	26.30	26.30	26.30	30.43	30.43	30.43	30.43	30.43	30.43
GSM1900 Ch512 (GPRS 2Txslots)	22.98	22.98	22.98	22.98	22.98	27.94	27.94	27.94	27.94	27.94	27.94
WCDMA II Ch9400 (RMC12.2K)	15.81	15.81	15.81	15.81	15.81	22.14	22.14	22.14	22.14	22.14	22.14
WCDMA IV Ch1312 (RMC12.2K)	15.55	15.55	15.55	15.55	15.55	22.34	22.34	22.34	22.34	22.34	22.34
WCDMA V Ch4233 (RMC12.2K)	20.55	20.55	20.55	20.55	20.55	22.45	22.45	22.45	22.45	22.45	22.45
LTE 2 Ch18900 (QPSK20M_1RB_OS0)	16.13	16.13	16.13	16.13	16.13	23.27	23.27	23.27	23.27	23.27	23.27
LTE 4 Ch20175 (QPSK20M_1RB_OS0)	15.78	15.78	15.78	15.78	15.78	23.27	23.27	23.27	23.27	23.27	23.27
LTE 5 Ch20600 (QPSK10M_1RB_OS49)	20.77	20.77	20.77	20.77	20.77	22.43	22.43	22.43	22.43	22.43	22.43
LTE 7 Ch21100 (QPSK20M_1RB_OS99)	14.47	14.47	14.47	14.47	14.47	23.09	23.09	23.09	23.09	23.09	23.09
LTE 66 Ch132322 (QPSK20M_1RB_OS0)	15.53	15.53	15.53	15.53	15.53	23.07	23.07	23.07	23.07	23.07	23.07

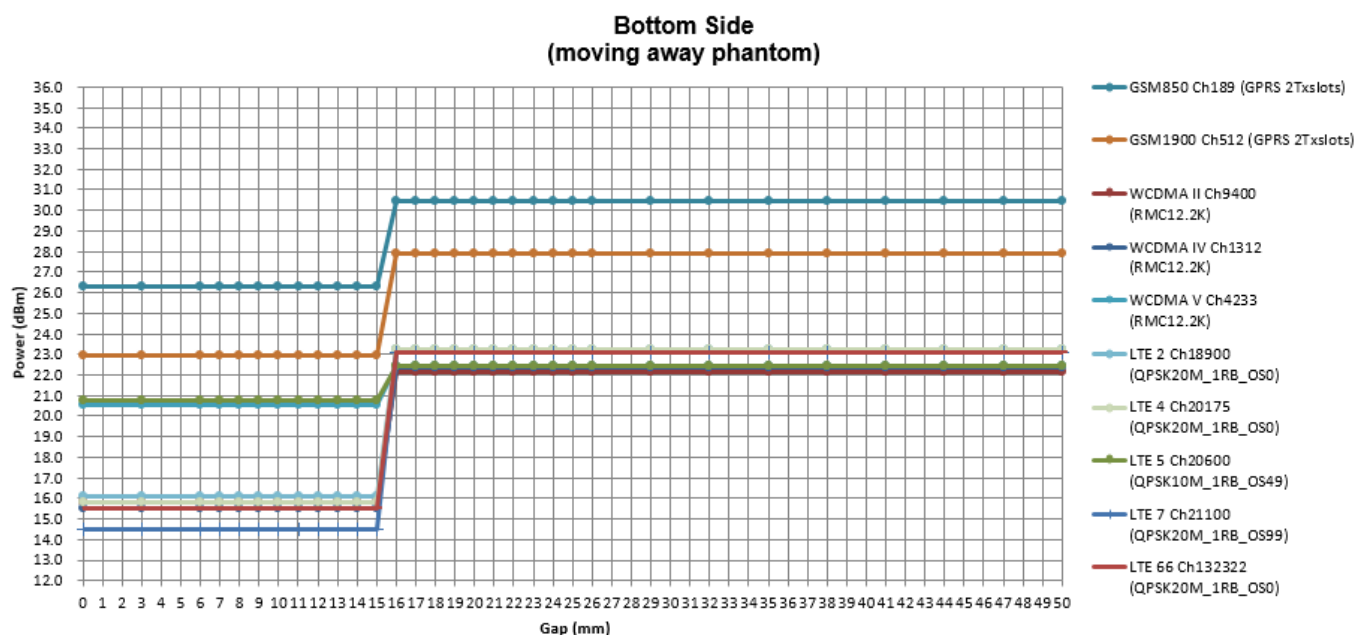

FCC SAR Test Report

WLAN Antenna


Output Power Verification in dBm for EUT Rear Face (moving toward phantom)											
Distance (mm)	10	11	12	13	14	15	16	17	18	19	20
WLAN2.4G Ch6 (802.11b)	16.44	16.44	16.44	16.44	16.44	21.22	21.22	21.22	21.22	21.22	21.22
WLAN5.2G Ch36 (802.11a)	8.75	8.75	8.75	8.75	8.75	15.72	15.72	15.72	15.72	15.72	15.72
WLAN5.3G Ch64 (802.11a)	8.59	8.59	8.59	8.59	8.59	16.42	16.42	16.42	16.42	16.42	16.42
WLAN5.6G Ch144&Ch140 (802.11a)	12.25	12.25	12.25	12.25	12.25	17.92	17.92	17.92	17.92	17.92	17.92
WLAN5.8G Ch149 (802.11a)	12.46	12.46	12.46	12.46	12.46	15.72	15.72	15.72	15.72	15.72	15.72

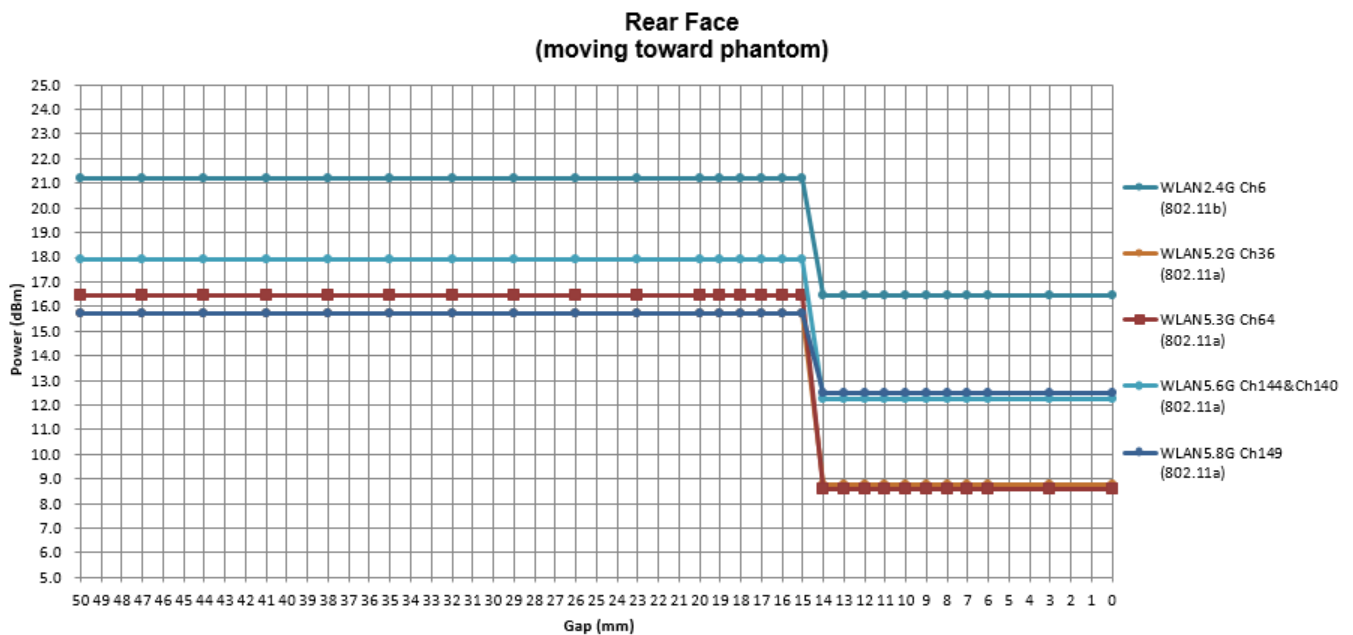

FCC SAR Test Report

Output Power Verification in dBm for EUT Rear Face (moving away phantom)											
Distance (mm)	11	12	13	14	16	17	18	19	20	21	22
WLAN2.4G Ch6 (802.11b)	16.44	16.44	16.44	16.44	16.44	21.22	21.22	21.22	21.22	21.22	21.22
WLAN5.2G Ch36 (802.11a)	8.75	8.75	8.75	8.75	8.75	15.72	15.72	15.72	15.72	15.72	15.72
WLAN5.3G Ch64 (802.11a)	8.59	8.59	8.59	8.59	8.59	16.42	16.42	16.42	16.42	16.42	16.42
WLAN5.6G Ch144&Ch140 (802.11a)	12.25	12.25	12.25	12.25	12.25	17.92	17.92	17.92	17.92	17.92	17.92
WLAN5.8G Ch149 (802.11a)	12.46	12.46	12.46	12.46	12.46	15.72	15.72	15.72	15.72	15.72	15.72


**Rear Face
(moving away phantom)**

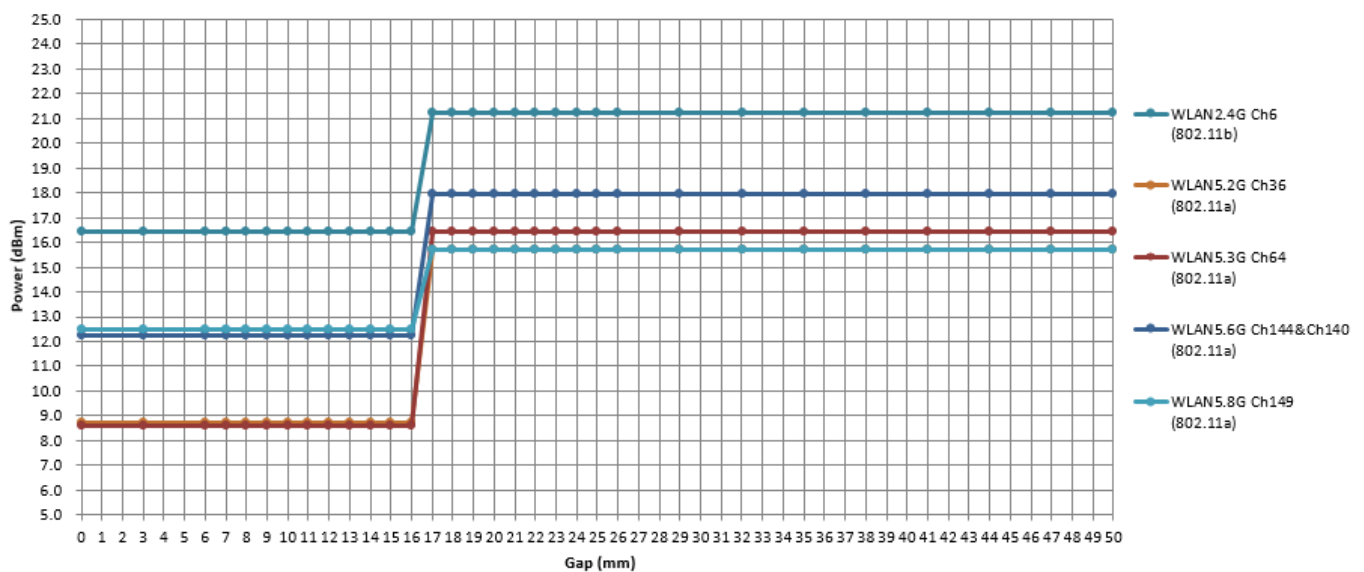

FCC SAR Test Report

Output Power Verification in dBm for EUT Left Side (moving toward phantom)											
Distance (mm)	4	5	6	7	8	9	10	11	12	13	14
WLAN2.4G Ch6 (802.11b)	16.44	16.44	16.44	16.44	16.44	21.22	21.22	21.22	21.22	21.22	21.22
WLAN5.2G Ch36 (802.11a)	8.75	8.75	8.75	8.75	8.75	15.72	15.72	15.72	15.72	15.72	15.72
WLAN5.3G Ch64 (802.11a)	8.59	8.59	8.59	8.59	8.59	16.42	16.42	16.42	16.42	16.42	16.42
WLAN5.6G Ch144&Ch140 (802.11a)	12.25	12.25	12.25	12.25	12.25	17.92	17.92	17.92	17.92	17.92	17.92
WLAN5.8G Ch149 (802.11a)	12.46	12.46	12.46	12.46	12.46	15.72	15.72	15.72	15.72	15.72	15.72


**Left Side
(moving toward phantom)**

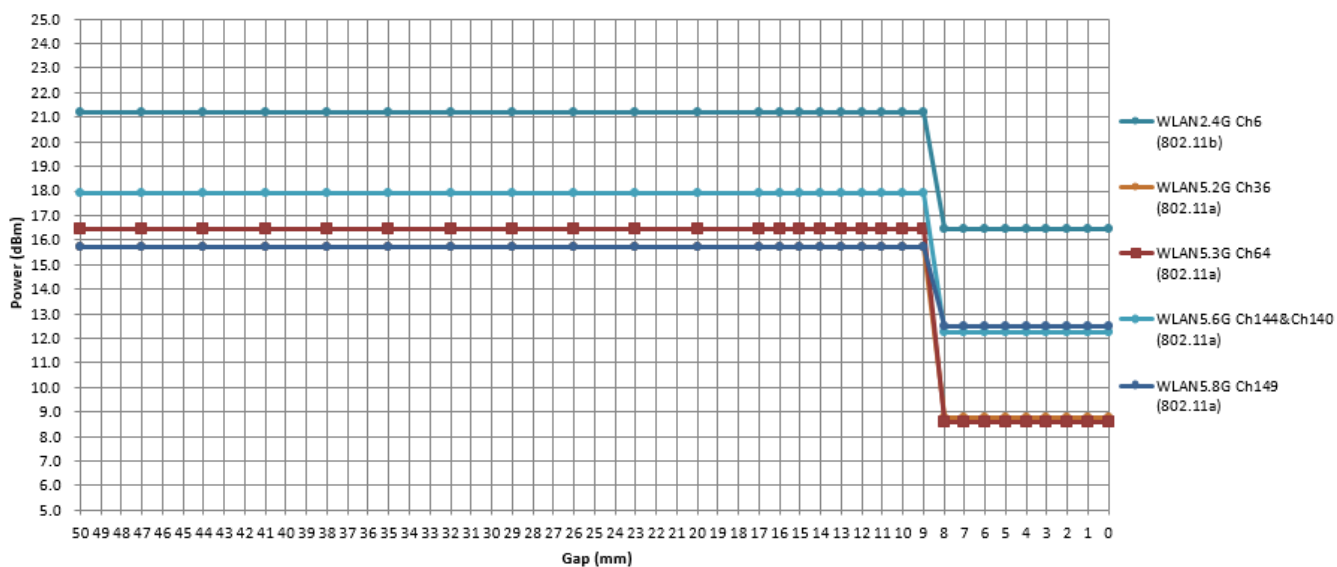

FCC SAR Test Report


Output Power Verification in dBm for EUT Left Side (moving away phantom)											
Distance (mm)	6	7	8	9	10	11	12	13	14	15	16
WLAN2.4G Ch6 (802.11b)	16.44	16.44	16.44	16.44	16.44	21.22	21.22	21.22	21.22	21.22	21.22
WLAN5.2G Ch36 (802.11a)	8.75	8.75	8.75	8.75	8.75	15.72	15.72	15.72	15.72	15.72	15.72
WLAN5.3G Ch64 (802.11a)	8.59	8.59	8.59	8.59	8.59	16.42	16.42	16.42	16.42	16.42	16.42
WLAN5.6G Ch144&Ch140 (802.11a)	12.25	12.25	12.25	12.25	12.25	17.92	17.92	17.92	17.92	17.92	17.92
WLAN5.8G Ch149 (802.11a)	12.46	12.46	12.46	12.46	12.46	15.72	15.72	15.72	15.72	15.72	15.72

**Left Side
(moving away phantom)**

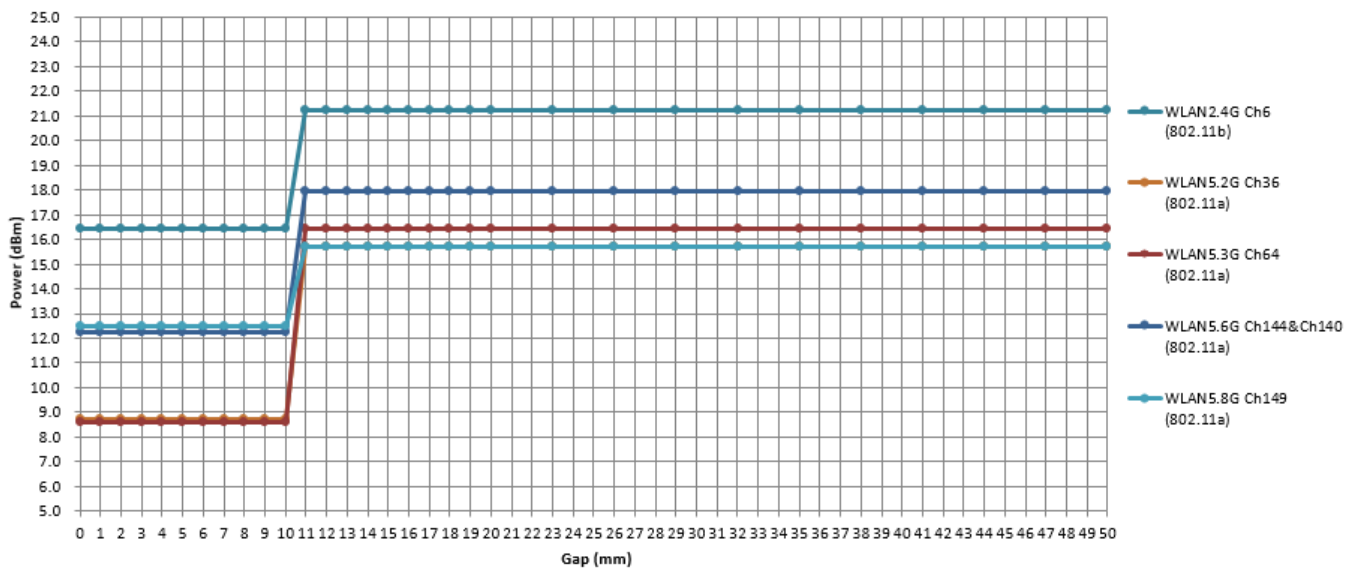


FCC SAR Test Report

Output Power Verification in dBm for EUT Top Side (moving toward phantom)											
Distance (mm)	12	13	14	15	16	17	18	19	20	21	22
WLAN2.4G Ch6 (802.11b)	16.44	16.44	16.44	16.44	16.44	21.22	21.22	21.22	21.22	21.22	21.22
WLAN5.2G Ch36 (802.11a)	8.75	8.75	8.75	8.75	8.75	15.72	15.72	15.72	15.72	15.72	15.72
WLAN5.3G Ch64 (802.11a)	8.59	8.59	8.59	8.59	8.59	16.42	16.42	16.42	16.42	16.42	16.42
WLAN5.6G Ch144&Ch140 (802.11a)	12.25	12.25	12.25	12.25	12.25	17.92	17.92	17.92	17.92	17.92	17.92
WLAN5.8G Ch149 (802.11a)	12.46	12.46	12.46	12.46	12.46	15.72	15.72	15.72	15.72	15.72	15.72

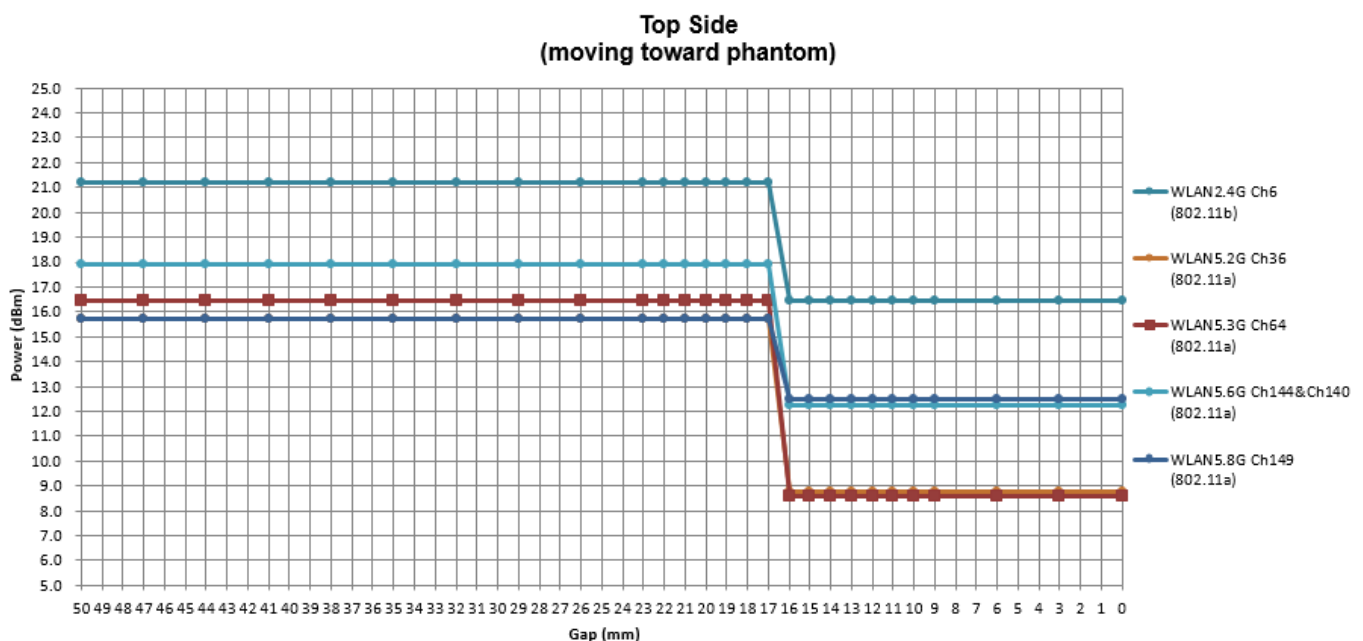

FCC SAR Test Report

Output Power Verification in dBm for EUT Top Side (moving away phantom)											
Distance (mm)	14	15	16	17	18	19	20	21	22	23	24
WLAN2.4G Ch6 (802.11b)	16.44	16.44	16.44	16.44	16.44	21.22	21.22	21.22	21.22	21.22	21.22
WLAN5.2G Ch36 (802.11a)	8.75	8.75	8.75	8.75	8.75	15.72	15.72	15.72	15.72	15.72	15.72
WLAN5.3G Ch64 (802.11a)	8.59	8.59	8.59	8.59	8.59	16.42	16.42	16.42	16.42	16.42	16.42
WLAN5.6G Ch144&Ch140 (802.11a)	12.25	12.25	12.25	12.25	12.25	17.92	17.92	17.92	17.92	17.92	17.92
WLAN5.8G Ch149 (802.11a)	12.46	12.46	12.46	12.46	12.46	15.72	15.72	15.72	15.72	15.72	15.72

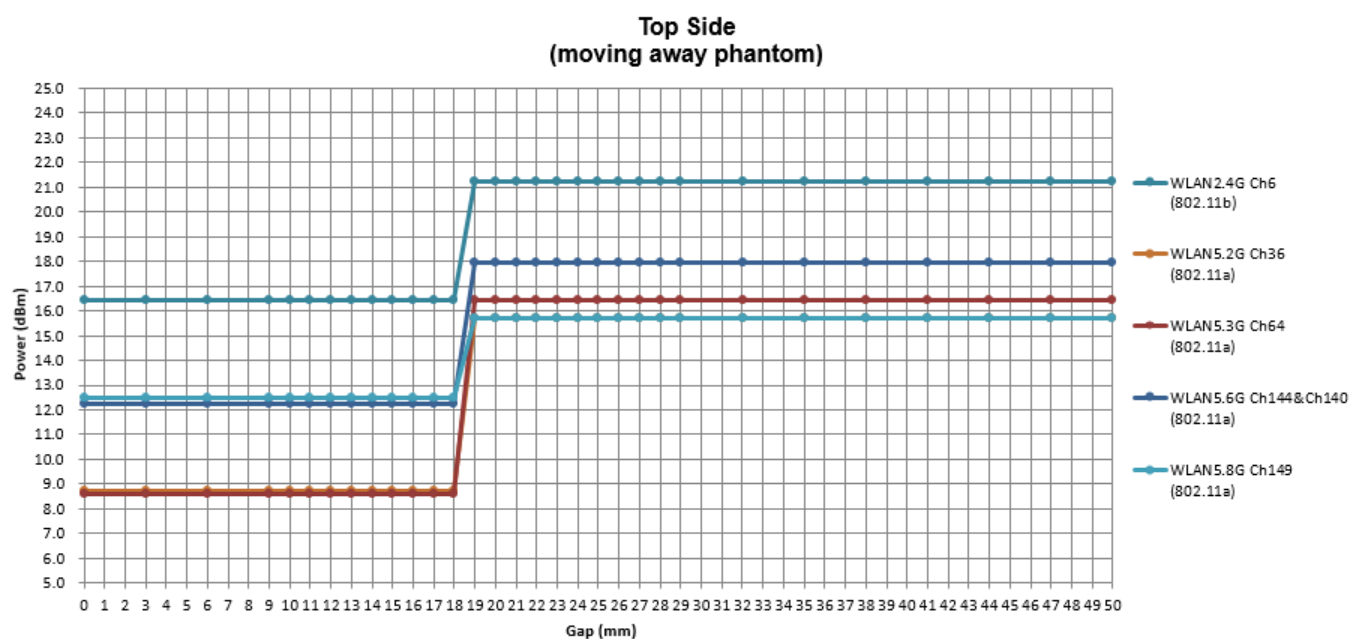

FCC SAR Test Report

Proximity Sensor Coverage (KDB 616217 D04 §6.3)

Since the proximity sensor is collocated with antenna in one component, the procedure for proximity sensor coverage is not required.

Proximity Sensor Tilt Angle Influences(KDB 616217 D04 §6.4)


The proximity sensor tilt angle influence was determined per KDB 616217 for applicable edge. Summary for proximity sensor tilt angle influence is shown in below.

WWAN Antenna

Orientation	Separation Distance (mm)	Tilt Angle										
		-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°
Right Side	8	On	On	On	On	On	On	On	On	On	On	On
Bottom Side	13	On	On	On	On	On	On	On	On	On	On	On

WLAN Antenna

Orientation	Separation Distance (mm)	Tilt Angle										
		-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°
Left Side	8	On	On	On	On	On	On	On	On	On	On	On
Top Side	16	On	On	On	On	On	On	On	On	On	On	On

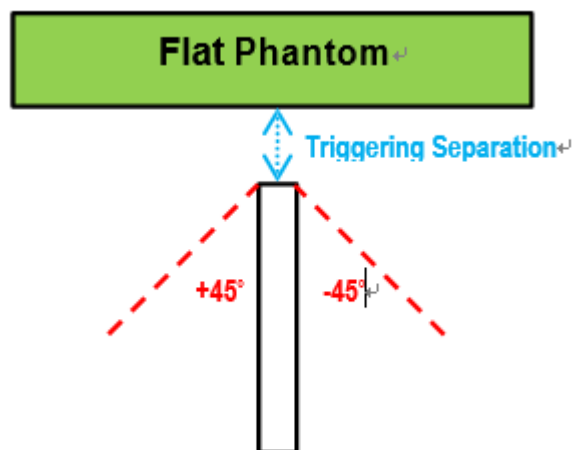

FCC SAR Test Report

Summary for Proximity Sensor Triggering Test

According to the procedures noticed in KDB 616217 D04,

The WWAN for proximity sensor triggering distance is 14 mm for EUT Rear Face, 8mm for Right Side and 13 mm for Bottom Side. The separation distance of 8mm / 13 mm determined by the smallest triggering distance on Right Side / Bottom Side is used to access the tilt angle influence and the sensor does not release during ± 45 degree. Therefore, the smallest separation distance for tilt angle influence is 8mm for the Right Side and 13 mm for the Bottom Side. The conservation triggering distances based on the separation distance for the sensor trigger / not triggered as EUT with power reduction at 0 mm, and EUT without power reduction at 13 mm for EUT Rear Face, 7mm for Right Side and 12 mm for Bottom Side were used to test SAR.

The WLAN for proximity sensor triggering distance is 14 mm for EUT Rear Face, 8mm for Left Side and 16 mm for Top Side. The separation distance of 8 mm / 16mm determined by the smallest triggering distance on Left Side / Top Side is used to access the tilt angle influence and the sensor does not release during ± 45 degree. Therefore, the smallest separation distance for tilt angle influence is 8 mm for the Left Side and 16mm for the Top Side. The conservation triggering distances based on the separation distance for the sensor trigger / not triggered as EUT with power reduction at 0 mm, and EUT without power reduction at 13 mm for EUT Rear Face, 7mm for Left Side and 15 mm for Top Side were used to test SAR.

The power reduction is depends on the proximity sensor input. For a steady SAR test, the power reduction was enabled or disabled manually by engineering software during SAR testing.

WWAN Proximity Sensor Trigger Distance (mm)			
Position	Rear Face	Right Side	Bottom Side
Minimum	14	8	13

WLAN Proximity Sensor Trigger Distance (mm)			
Position	Rear Face	Left Side	Top Side
Minimum	14	8	16

FCC SAR Test Report

<Considerations Related to GSM / GPRS / EDGE for Setup and Testing>

The maximum multi-slot capability supported by this device is as below.

1. This EUT is class B device
2. This EUT supports GPRS multi-slot class 12 (max. uplink: 4, max. downlink: 4, total timeslots: 5)
3. This EUT supports EDGE multi-slot class 12 (max. uplink: 4, max. downlink: 4, total timeslots: 5)

For GSM850 frequency band, the power control level is set to 5 for GSM mode and GPRS (GMSK: CS1), and set to 8 for EDGE (GMSK: MCS1, 8PSK: MCS9). For GSM1900 frequency band, the power control level is set to 0 for GSM mode and GPRS (GMSK: CS1), and set to 2 for EDGE (GMSK: MCS1, 8PSK: MCS9).

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

Frame-averaged power = 10 x log (Burst-averaged power mW x Slot used / 8)

<Considerations Related to WCDMA for Setup and Testing>

WCDMA Handsets Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.

WCDMA Handsets Body-worn SAR

SAR for body-worn configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode.

Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the "Release 5 HSDPA Data Devices", for the highest reported SAR body-worn exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

Handsets with Release 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the "Release 6 HSPA Data Devices", for the highest reported body-worn exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn measurements is tested for next to the ear head exposure.

FCC SAR Test Report

Release 5 HSDPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH / HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾	MPR
1	2 / 15	15 / 15	64	2 / 15	4 / 15	0.0	0
2	12 / 15 ⁽³⁾	15 / 15 ⁽³⁾	64	12 / 15 ⁽³⁾	24 / 15	1.0	0
3	15 / 15	8 / 15	64	15 / 8	30 / 15	1.5	0.5
4	15 / 15	4 / 15	64	15 / 4	30 / 15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs} / \beta_c = 30 / 15 \Leftrightarrow \beta_{hs} = 30 / 15 * \beta_c$.
Note 2: CM = 1 for $\beta_c / \beta_d = 12 / 15$, $\beta_{hs} / \beta_c = 24 / 15$.
Note 3: For subtest 2 the β_c / β_d ratio of 12 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11 / 15$ and $\beta_d = 15 / 15$.

Release 6 HSPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode. Otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing. Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in below.

FCC SAR Test Report

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11 / 15 ⁽³⁾	15 / 15 ⁽³⁾	64	11 / 15 ⁽³⁾	22 / 15	209 / 225	1039 / 225	4	1	1.0	0.0	20	75
2	6 / 15	15 / 15	64	6 / 15	12 / 15	12 / 15	94 / 75	4	1	3.0	2.0	12	67
3	15 / 15	9 / 15	64	15 / 9	30 / 15	30 / 15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2 / 15	15 / 15	64	2 / 15	4 / 15	2 / 15	56 / 75	4	1	3.0	2.0	17	71
5	15 / 15 ⁽⁴⁾	15 / 15 ⁽⁴⁾	64	15 / 15 ⁽⁴⁾	30 / 15	24 / 15	134 / 15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs} / \beta_c = 30 / 15 \Leftrightarrow \beta_{hs} = 30 / 15 * \beta_c$.

Note 2: CM = 1 for $\beta_c / \beta_d = 12 / 15$, $\beta_{hs} / \beta_c = 24 / 15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c / β_d ratio of 11 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10 / 15$ and $\beta_d = 15 / 15$.

Note 4: For subtest 5 the β_c / β_d ratio of 15 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14 / 15$ and $\beta_d = 15 / 15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSPA+ SAR Guidance

The 3G SAR test reduction procedure is applied to HSPA+ (uplink) with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 6 HSPA, SAR is required for Rel. 7 HSPA+. Power is measured for HSPA+ that supports uplink 16QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

DC-HSDPA SAR Guidance

The 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 5 HSDPA, SAR is required for Rel. 8 DC-HSDPA. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

<Considerations Related to LTE for Setup and Testing>

This device contains LTE transmitter which follows 3GPP standards, supports QPSK and 16QAM modulations, and supported LTE band and channel bandwidth is listed in below. The output power was tested per 3GPP TS 36.521-1 maximum transmit procedures for both QPSK 16QAM and 64QAM modulation. The results please refer to section 4.6 of this report.

EUT Supported LTE Band and Channel Bandwidth						
LTE Band	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz
2	V	V	V	V	V	V
4	V	V	V	V	V	V
5	V	V	V	V		
7			V	V	V	V
66	V	V	V	V	V	V

FCC SAR Test Report

The LTE maximum power reduction (MPR) in accordance with 3GPP TS 36.101 is active all times during LTE operation. The allowed MPR for the maximum output power is specified in below.

Modulation	Channel Bandwidth / RB Configurations						LTE MPR Setting (dB)
	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	<= 5	<= 4	<= 8	<= 12	<= 16	<= 18	1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

Note: MPR is according to the standard and implemented in the circuit (mandatory).

In addition, the device is compliant with additional maximum power reduction (A-MPR) requirements defined in 3GPP TS 36.101 section 6.2.4 that was disabled for all FCC compliance testing.

During LTE SAR testing, the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB was set in base station simulator. When the EUT has registered and communicated to base station simulator, the simulator set to make EUT transmitting the maximum radiated power.

<Considerations Related to WLAN for Setup and Testing>

In general, various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. These chipset based test mode utilities are generally hardware and manufacturer dependent, and often include substantial flexibility to reconfigure or reprogram a device. A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

Initial Test Configuration

An initial test configuration is determined for OFDM transmission modes in 2.4 GHz and 5 GHz bands according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

FCC SAR Test Report

Subsequent Test Configuration

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. When the highest reported SAR for the initial test configuration according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

SAR Test Configuration and Channel Selection

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is using largest channel bandwidth, lowest order modulation, lowest data rate, and lowest order 802.11 mode (i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n). After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

Test Reduction for U-NII-1 (5.2 GHz) and U-NII-2A (5.3 GHz) Bands

For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition).
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.


<Considerations Related to Bluetooth for Setup and Testing>

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

FCC SAR Test Report

<BT Duty Cycle of Test Signal>

BT_GFSK: Duty cycle = $2.910 / 3.750 = 0.776$

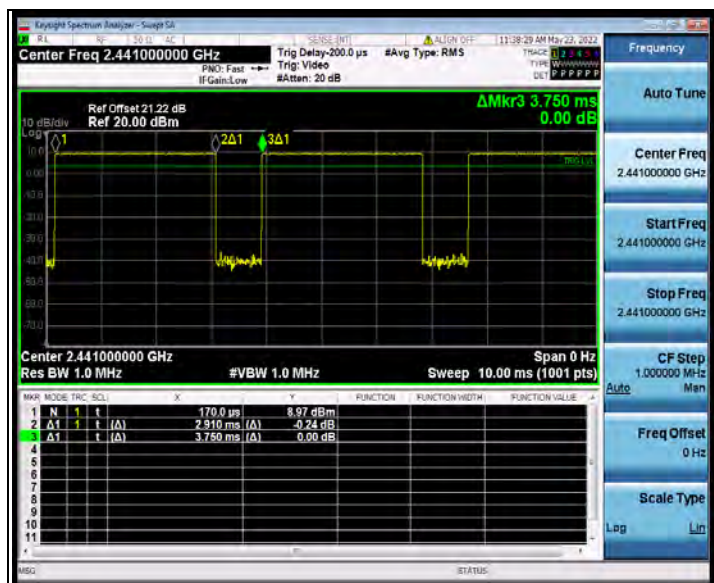

4.2 EUT Testing Position

4.2.1 Body Exposure Conditions

For full-size tablet, according to KDB 616217 D04, SAR evaluation is required for back surface and edges of the devices. The back surface and edges of the tablet are tested with the tablet touching the phantom. Exposures from antennas through the front surface of the display section of a tablet are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

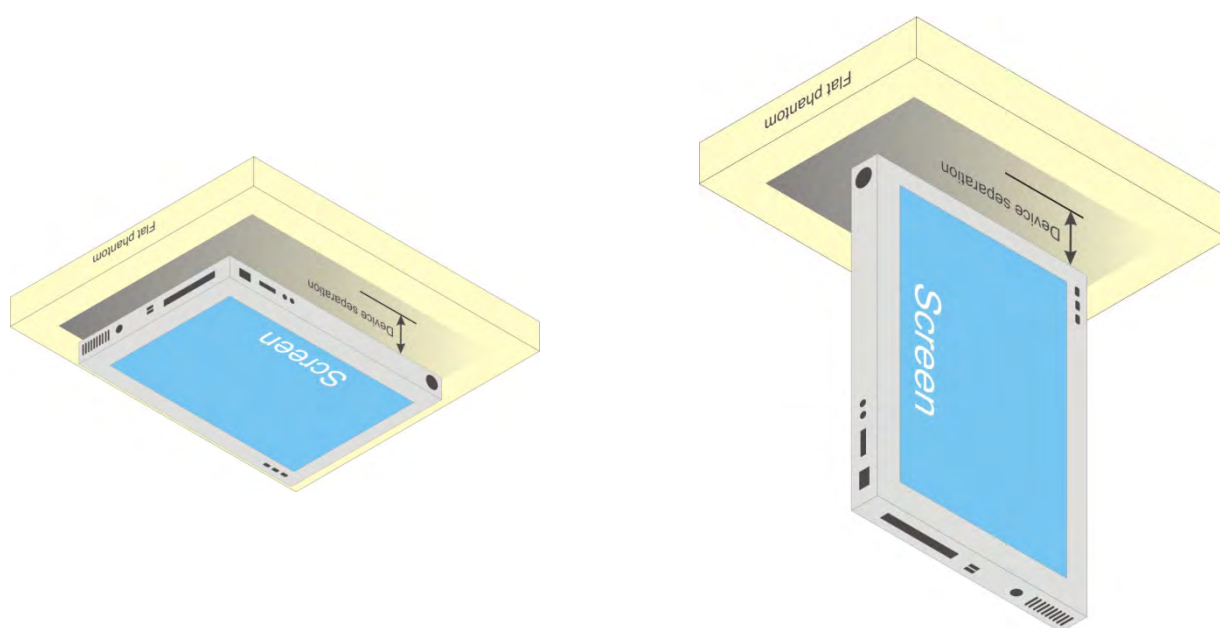


Fig-4.1 Illustration for Tablet Setup

FCC SAR Test Report

4.2.2 SAR Test Exclusion Evaluations

According to KDB 447498 D04 Appendix B, the SAR test exclusion condition is based on source-based time-averaged maximum conducted output power, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The SAR exclusion threshold is determined by the following.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

Exposure Position	Wireless Interface	GPRS 850 Class 10	GPRS 1900 Class 10	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 66
	Calculated Frequency	848MHz	1909MHz	1907MHz	1750MHz	846MHz	1909MHz	1754MHz	848MHz	2567MHz	1779MHz
	Maximum power (dBm)	32	29	24	24	24.00	24	24	24	23.5	24
	Maximum rated power(mW)	1585.0	794.0	251.0	251.0	251.0	251.0	251.0	251.0	224.0	251.0
Rear Face	Separation distance(mm)	0.0									
	exclusion threshold	9.0	3.0	3.0	4.0	9.0	3.0	4.0	9.0	3.0	4.0
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Top Side	Separation distance(mm)	194.0									
	exclusion threshold	1656.0	2893.0	2893.0	2894.0	1653.0	2893.0	2894.0	1656.0	2887.0	2894.0
	Testing required?	No	No	No	No	No	No	No	No	No	No
Right Side	Separation distance(mm)	12.0									
	exclusion threshold	31.0	17.0	17.0	18.0	32.0	17.0	18.0	31.0	14.0	18.0
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Bottom Side	Separation distance(mm)	0.0									
	exclusion threshold	9.0	3.0	3.0	4.0	9.0	3.0	4.0	9.0	3.0	4.0
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Left Side	Separation distance(mm)	66.0									
	exclusion threshold	357.0	394.0	395.0	403.0	357.0	394.0	403.0	357.0	367.0	401.0
	Testing required?	Yes	Yes	No	No	No	No	No	No	No	No

FCC SAR Test Report

Exposure Position	Wireless Interface	BT	BLE	WLAN2.4G	WLAN5G
	Calculated Frequency	2480MHz	2480MHz	2462MHz	5825MHz
	Maximum power (dBm)	10.5	4	22	18
	Maximum rated power(mW)	11.0	3.0	158.0	63.0
Rear Face	Separation distance(mm)	0.0	0.0	0.0	0.0
	exclusion threshold	3.0	3.0	3.0	1.0
	Testing required?	Yes	No	Yes	Yes
Top Side	Separation distance(mm)	0.0	0.0	0.0	0.0
	exclusion threshold	3.0	3.0	3.0	1.0
	Testing required?	Yes	No	Yes	Yes
Right Side	Separation distance(mm)	60.0	60.0	60.0	60.0
	exclusion threshold	309.0	309.0	309.0	247.0
	Testing required?	No	No	No	No
Bottom Side	Separation distance(mm)	191.0	191.0	191.0	191.0
	exclusion threshold	2803.0	2803.0	2803.0	2779.0
	Testing required?	No	No	No	No
Left Side	Separation distance(mm)	16.0	16.0	16.0	16.0
	exclusion threshold	25.0	25.0	25.0	16.0
	Testing required?	No	No	Yes	Yes

FCC SAR Test Report

4.2.3 Simultaneous Transmission Possibilities

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
1	WWAN + WLAN2.4G	Yes
2	WWAN + WLAN5G	Yes
3	WWAN + BT	Yes
4	WLAN2.4G + BT	Yes
5	WLAN5G + BT	Yes
6	WWAN + WLAN2.4G + BT	Yes
7	WWAN + WLAN5G + BT	Yes

4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

Test Date	Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Target Conductivity (σ)	Target Permittivity (ϵ_r)	Conductivity Deviation (%)	Permittivity Deviation (%)
May. 27, 2022	Head	835	22.5	0.918	42.918	0.90	41.50	2.00	3.42
May. 28, 2022	Head	1750	22.3	1.342	38.765	1.37	40.10	-2.04	-3.33
May. 29, 2022	Head	1900	22.4	1.435	40.484	1.40	40.00	2.50	1.21
May. 30, 2022	Head	2450	22.4	1.845	39.401	1.80	39.20	2.50	0.51
May. 31, 2022	Head	2600	22.6	2.039	37.739	1.96	39.00	4.03	-3.23
May. 23, 2022	Head	5250	22.2	4.726	36.478	4.71	35.90	0.34	1.61
May. 24, 2022	Head	5600	22.4	5.154	35.866	5.07	35.50	1.66	1.03
May. 25, 2022	Head	5800	22.5	5.385	35.489	5.27	35.30	2.18	0.54

Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within $\pm 5\%$ of the target values. Liquid temperature during the SAR testing must be within $\pm 2^\circ\text{C}$.

4.4 System Verification

The measuring result for system verification is tabulated as below.

Test Date	Mode	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
May. 27, 2022	Head	835	9.47	2.47	9.88	4.33	4d139	3873	1389
May. 28, 2022	Head	1750	36.60	8.60	34.40	-6.01	1071	3873	1389
May. 29, 2022	Head	1900	39.70	10.60	42.40	6.80	5d159	3873	1389
May. 30, 2022	Head	2450	53.60	14.40	57.60	7.46	893	3873	1389
May. 31, 2022	Head	2600	55.80	15.00	60.00	7.53	1110	3873	1389
May. 23, 2022	Head	5250	76.90	8.05	80.50	4.68	1133	3873	1389
May. 24, 2022	Head	5600	81.20	7.95	79.50	-2.09	1133	3873	1389
May. 25, 2022	Head	5800	78.00	7.20	72.00	-7.69	1133	3873	1389

Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.

FCC SAR Test Report

4.5 Maximum Output Power

4.5.1 Maximum Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

WWAN

Mode	GSM850		GSM1900	
	Full Power	Reduced Power	Full Power	Reduced Power
GPRS (GMSK, 1Tx-slot)	34.0	30.5	31.0	26.0
GPRS (GMSK, 2Tx-slot)	32.0	28.0	29.0	23.5
GPRS (GMSK, 3Tx-slot)	29.0	26.0	27.0	21.5
GPRS (GMSK, 4Tx-slot)	27.0	24.5	25.0	20.0
EDGE (8PSK, 1Tx-slot)	27.0	27.0	27.0	26.0
EDGE (8PSK, 2Tx-slot)	25.0	25.0	25.0	23.0
EDGE (8PSK, 3Tx-slot)	23.0	23.0	23.0	21.5
EDGE (8PSK, 4Tx-slot)	20.5	20.5	22.0	20.0

Mode	WCDMA Band II		WCDMA Band IV		WCDMA Band V	
	Full Power	Reduced Power	Full Power	Reduced Power	Full Power	Reduced Power
RMC 12.2K	24.0	16.5	24.0	17.0	24.0	22.0
HSDPA	23.0	15.5	23.0	16.0	23.0	21.0
DC-HSDPA	23.0	15.5	23.0	16.0	23.0	21.0
HSUPA	23.0	15.5	23.0	16.0	23.0	21.0
HSPA+	20.5	13.0	20.5	13.5	20.5	18.5

Mode	LTE 2		LTE 4		LTE 5	
	Full Power	Reduced Power	Full Power	Reduced Power	Full Power	Reduced Power
QPSK	24.0	17.0	24.0	16.5	24.0	22.0
16QAM	23.0	16.0	23.0	15.5	23.0	21.0

Mode	LTE 7		LTE 66	
	Full Power	Reduced Power	Full Power	Reduced Power
QPSK	23.5	15.0	24.0	16.5
16QAM	22.5	14.0	23.0	15.5

WLAN/BT

Mode	WLAN2.4G		
	Channel	Full Power	Reduced Power
802.11b	1	20.00	15.00
	6	22.00	17.00
	11	21.00	16.00
802.11g	1	17.00	13.00
	6	20.00	16.00
	11	18.00	14.00
802.11n20	1	16.00	12.00
	6	19.00	15.00
	11	17.00	13.00
802.11n40	3	17.00	13.00
	6	19.00	15.00
	9	16.00	13.00

FCC SAR Test Report

Mode	WLAN5.2G		
	Channel	Full Power	Reduced Power
802.11a	36	17.00	9.00
	40	16.00	9.00
	44	17.00	9.00
	48	16.00	9.00
802.11n20	36	16.00	8.50
	40	16.00	8.50
	44	16.00	8.50
	48	16.00	8.50
802.11n40	38	14.00	8.00
	46	15.00	8.00
802.11ac20	36	16.00	8.50
	40	16.00	8.50
	44	16.00	8.50
	48	16.00	8.50
802.11ac40	38	14.00	8.00
	46	15.00	8.00
802.11ac80	42	12.00	8.00

Mode	WLAN5.3G		
	Channel	Full Power	Reduced Power
802.11a	52	17.00	9.00
	56	16.00	9.00
	60	17.00	9.00
	64	17.00	9.00
802.11n20	52	16.00	8.50
	56	16.00	8.50
	60	16.00	8.50
	64	16.00	8.50
802.11n40	54	15.00	8.00
	62	15.00	8.00
802.11ac20	52	16.00	8.50
	56	16.00	8.50
	60	16.00	8.50
	64	16.00	8.50
802.11ac40	54	15.00	8.00
	62	15.00	8.00
802.11ac80	58	15.00	8.00

FCC SAR Test Report

Mode	WLAN5.6G		
	Channel	Full Power	Reduced Power
802.11a	100	18.00	12.00
	116	18.50	13.00
	124	18.50	13.00
	132	18.50	13.00
	140	18.50	13.00
	144	18.50	13.00
802.11n20	100	17.00	11.50
	116	17.50	12.50
	124	17.50	12.50
	132	17.50	12.50
	140	17.50	12.50
	144	17.50	12.50
802.11n40	102	16.50	11.00
	110	17.00	12.00
	126	17.00	12.00
	134	17.00	12.00
	142	17.00	12.00
802.11ac20	100	17.00	11.50
	116	18.00	12.50
	124	18.00	12.50
	132	18.00	12.50
	140	18.00	12.50
	144	18.00	12.50
802.11ac40	102	17.00	11.00
	110	17.50	12.00
	126	17.50	12.00
	134	17.50	12.00
	142	17.50	12.00
802.11ac80	106	16.50	10.50
	122	17.50	11.50
	138	17.50	11.50

Mode	WLAN5.8G		
	Channel	Full Power	Reduced Power
802.11a	149	16.50	13.00
	157	16.50	13.00
	165	16.50	13.00
802.11n20	149	16.00	12.50
	157	16.00	12.50
	165	16.00	12.50
802.11n40	151	16.00	12.50
	159	16.00	12.50
802.11ac20	149	16.00	12.50
	157	16.00	12.50
	165	16.00	12.50
802.11ac40	151	16.00	12.00
	159	16.00	12.00
802.11ac80	155	15.50	12.00

Mode	Bluetooth
BR/EDR	10.5
LE	4.0

FCC SAR Test Report

4.5.2 Measured Conducted Power Result

The measuring conducted average power (Unit: dBm) is shown as below.

<Full Power>

WWAN

Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Maximum Burst-Averaged Output Power						
GPRS (GMSK, 1Tx-slot)	32.21	32.25	32.23	29.42	29.61	29.45
GPRS (GMSK, 2Tx-slot)	30.42	30.43	30.39	27.94	27.82	27.64
GPRS (GMSK, 3Tx-slot)	28.15	28.17	28.15	25.73	25.64	25.43
GPRS (GMSK, 4Tx-slot)	26.06	26.08	26.08	23.74	23.60	23.34
EDGE (8PSK, 1Tx-slot)	26.10	25.97	25.96	26.19	25.64	25.88
EDGE (8PSK, 2Tx-slot)	24.19	23.94	23.97	24.09	23.80	24.18
EDGE (8PSK, 3Tx-slot)	21.53	21.21	21.14	22.03	21.76	22.13
EDGE (8PSK, 4Tx-slot)	19.07	19.90	18.88	20.36	19.48	19.94
Maximum Frame-Averaged Output Power						
GPRS (GMSK, 1Tx-slot)	23.21	23.25	23.23	20.42	20.61	20.45
GPRS (GMSK, 2Tx-slot)	24.42	24.43	24.39	21.94	21.82	21.64
GPRS (GMSK, 3Tx-slot)	23.89	23.91	23.89	21.47	21.38	21.17
GPRS (GMSK, 4Tx-slot)	23.06	23.08	23.08	20.74	20.60	20.34
EDGE (8PSK, 1Tx-slot)	17.10	16.97	16.96	17.19	16.64	16.88
EDGE (8PSK, 2Tx-slot)	18.19	17.94	17.97	18.09	17.80	18.18
EDGE (8PSK, 3Tx-slot)	17.27	16.95	16.88	17.77	17.50	17.87
EDGE (8PSK, 4Tx-slot)	16.07	16.90	15.88	17.36	16.48	16.94

Band	WCDMA Band II			WCDMA Band IV			WCDMA Band V			3GPP MPR (dB)
Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233	
Frequency (MHz)	1852.4	1880.0	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6	
RMC 12.2K	22.06	22.14	22.10	22.34	22.24	22.27	22.39	22.41	22.45	-
HSDPA Subtest-1	21.11	21.08	21.35	21.25	21.33	21.29	21.44	21.49	21.38	0
HSDPA Subtest-2	21.08	21.17	21.12	21.39	21.36	21.34	21.35	21.61	21.58	0
HSDPA Subtest-3	20.56	20.66	20.41	20.53	20.52	20.44	20.59	20.61	20.55	0.5
HSDPA Subtest-4	20.49	20.59	20.60	20.49	20.58	20.60	20.55	20.60	20.45	0.5
DC-HSDPA Subtest-1	21.15	21.16	21.07	21.42	21.57	21.53	21.37	21.35	21.41	0
DC-HSDPA Subtest-2	21.03	21.14	21.11	21.51	21.46	21.44	21.42	21.46	21.50	0
DC-HSDPA Subtest-3	20.50	20.61	20.57	20.53	20.55	20.46	20.66	20.45	20.62	0.5
DC-HSDPA Subtest-4	20.53	20.48	20.44	20.71	20.69	20.44	20.82	20.78	20.75	0.5
HSUPA Subtest-1	21.05	21.11	21.09	21.44	21.39	21.52	21.35	21.44	21.45	0
HSUPA Subtest-2	19.58	19.32	19.48	19.46	19.41	19.66	19.93	19.88	19.86	2
HSUPA Subtest-3	20.46	20.55	20.32	20.58	20.67	20.45	20.85	20.67	20.74	1
HSUPA Subtest-4	19.72	19.60	19.34	19.62	19.58	19.47	19.77	19.69	19.70	2
HSUPA Subtest-5	21.10	21.11	21.15	21.50	21.59	21.48	21.70	21.66	21.61	0
HSPA+ Subtest-1	19.07	19.01	19.11	19.35	19.45	19.21	19.46	19.44	19.32	2.5

FCC SAR Test Report

LTE Band 2															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100				Channel		18675	18900	19125	
		Frequency(MHz)		1860	1880	1900				Frequency(MHz)		1857.5	1880	1902.5	
20M	QPSK	1	0	22.86	23.27	23.07	0	15M	QPSK	1	0	22.78	23.23	23.02	0
		1	50	22.88	23.09	23.05	0			1	37	22.86	23.01	23.04	0
		1	99	22.83	23.24	23.04	0			1	74	22.75	23.20	22.99	0
		50	0	22.37	22.64	22.54	1			36	0	22.34	22.58	22.52	1
		50	25	22.34	22.57	22.43	1			36	19	22.32	22.50	22.38	1
		50	50	22.25	22.54	22.48	1			36	39	22.19	22.46	22.46	1
	16QAM	100	0	22.37	22.68	22.38	1		16QAM	75	0	22.36	22.66	22.30	1
		1	0	22.40	22.71	22.57	1			1	0	22.33	22.63	22.51	1
		1	50	21.84	22.11	22.01	1			1	37	21.81	22.05	21.99	1
		1	99	21.94	22.17	22.03	1			1	74	21.92	22.10	21.98	1
		50	0	21.41	21.70	21.64	2			36	0	21.35	21.62	21.62	2
		50	25	21.47	21.68	21.64	2			36	19	21.45	21.60	21.63	2
10M	QPSK	50	50	21.38	21.79	21.59	2	5M	16QAM	36	39	21.30	21.75	21.54	2
		100	0	21.55	21.76	21.72	2			75	0	21.53	21.68	21.71	2
	16QAM	1	0	22.85	23.23	22.99	0		QPSK	1	0	22.80	23.25	23.01	0
		1	24	22.84	23.06	22.99	0			1	12	22.81	23.04	23.03	0
		1	49	22.81	23.23	23.00	0			1	24	22.77	23.17	22.99	0
		25	0	22.31	22.59	22.53	1			12	0	22.30	22.59	22.52	1
		25	12	22.33	22.55	22.38	1			12	6	22.26	22.55	22.37	1
		25	25	22.17	22.47	22.46	1			12	13	22.17	22.53	22.46	1
3M	QPSK	50	0	22.36	22.64	22.35	1			25	0	22.33	22.63	22.30	1
		1	0	22.37	22.70	22.51	1	1.4M	16QAM	1	0	22.32	22.70	22.55	1
		1	24	21.80	22.06	21.99	1			1	12	21.79	22.06	21.97	1
		1	49	21.88	22.15	22.00	1			1	24	21.92	22.09	22.02	1
		25	0	21.39	21.62	21.63	2			12	0	21.33	21.66	21.59	2
		25	12	21.39	21.64	21.59	2			12	6	21.44	21.62	21.62	2
	16QAM	25	25	21.35	21.73	21.57	2			12	13	21.36	21.72	21.54	2
		50	0	21.54	21.71	21.64	2			25	0	21.49	21.68	21.70	2
3M	QPSK	1	0	22.81	23.20	23.02	0	1.4M	QPSK	1	0	22.78	23.23	23.02	0
		1	7	22.86	23.01	23.03	0			1	2	22.85	23.03	23.03	0
		1	14	22.78	23.16	23.03	0			1	5	22.81	23.17	22.99	0
		8	0	22.33	22.59	22.49	1			3	0	22.81	23.06	23.02	1
		8	3	22.26	22.56	22.38	1			3	1	22.83	23.05	22.85	1
		8	7	22.21	22.49	22.47	1			3	3	22.70	22.96	22.92	1
	16QAM	15	0	22.31	22.66	22.33	1			6	0	22.36	22.62	22.36	1
		1	0	22.33	22.66	22.55	1		16QAM	1	0	22.35	22.64	22.52	1
		1	7	21.76	22.09	21.96	1			1	2	21.82	22.03	21.99	1
		1	14	21.92	22.09	22.01	1			1	5	21.89	22.09	22.02	1
		8	0	21.33	21.64	21.56	2			3	0	21.87	22.15	22.09	2
		8	3	21.41	21.66	21.58	2			3	1	21.89	22.17	22.09	2
3M	QPSK	8	7	21.31	21.74	21.57	2			3	3	21.84	22.24	22.08	2
		15	0	21.49	21.69	21.67	2			6	0	21.49	21.74	21.67	2
	16QAM	1	0	22.81	23.20	23.02	0	1.4M	QPSK	1	0	22.78	23.23	23.02	0
		1	7	22.86	23.01	23.03	0			1	2	22.85	23.03	23.03	0
		1	14	22.78	23.16	23.03	0			1	5	22.81	23.17	22.99	0
		8	0	22.33	22.59	22.49	1			3	0	22.81	23.06	23.02	1
		8	3	22.26	22.56	22.38	1			3	1	22.83	23.05	22.85	1
		8	7	22.21	22.49	22.47	1			3	3	22.70	22.96	22.92	1
	16QAM	15	0	22.31	22.66	22.33	1			6	0	22.36	22.62	22.36	1
		1	0	22.33	22.66	22.55	1		16QAM	1	0	22.35	22.64	22.52	1
		1	7	21.76	22.09	21.96	1			1	2	21.82	22.03	21.99	1
		1	14	21.92	22.09	22.01	1			1	5	21.89	22.09	22.02	1
		8	0	21.33	21.64	21.56	2			3	0	21.87	22.15	22.09	2
		8	3	21.41	21.66	21.58	2			3	1	21.89	22.17	22.09	2
3M	QPSK	8	7	21.31	21.74	21.57	2			3	3	21.84	22.24	22.08	2
		15	0	21.49	21.69	21.67	2			6	0	21.49	21.74	21.67	2

FCC SAR Test Report

LTE Band 4															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300				Channel		20025	20175	20325	
		Frequency(MHz)		1720	1732.5	1745				Frequency(MHz)		1717.5	1732.5	1747.5	
20M	QPSK	1	0	23.21	23.27	23.03	0	15M	QPSK	1	0	23.17	23.24	22.97	0
		1	50	23.16	23.22	22.98	0			1	37	23.14	23.21	22.94	0
		1	99	23.13	23.19	23.09	0			1	74	23.07	23.14	23.08	0
		50	0	22.66	22.68	22.44	1			36	0	22.65	22.66	22.39	1
		50	25	22.55	22.61	22.53	1			36	19	22.47	22.54	22.51	1
		50	50	22.79	22.77	22.61	1			36	39	22.78	22.73	22.58	1
	16QAM	100	0	22.58	22.66	22.38	1		75	0	22.55	22.65	22.32	1	
		1	0	22.80	22.82	22.70	1		16QAM	1	0	22.76	22.77	22.68	1
		1	50	22.72	22.84	22.64	1			1	37	22.66	22.82	22.61	1
		1	99	22.73	22.65	22.61	1			1	74	22.71	22.57	22.60	1
		50	0	21.77	21.89	21.69	2			36	0	21.69	21.85	21.64	2
		50	25	21.80	21.78	21.68	2			36	19	21.77	21.72	21.66	2
50	50	21.89	21.85	21.61	2	36	39	21.88		21.80	21.53	2			
100	0	21.75	21.85	21.65	2	75	0	21.69	21.82	21.61	2				
W	MCS Index	Channel		20000	20175	20350	3GPP MPR (dB)	BW	MCS Index	Channel		19975	20175	20375	3GPP MPR (dB)
		Frequency(MHz)		1715	1732.5	1750				Frequency(MHz)		1712.5	1732.5	1752.5	
10M	QPSK	1	0	23.13	23.23	22.98	0	5M	QPSK	1	0	23.16	23.19	23.02	0
		1	24	23.13	23.16	22.96	0			1	12	23.12	23.17	22.93	0
		1	49	23.11	23.12	23.04	0			1	24	23.05	23.18	23.04	0
		25	0	22.60	22.60	22.42	1			12	0	22.62	22.63	22.43	1
		25	12	22.54	22.59	22.45	1			12	6	22.49	22.59	22.48	1
		25	25	22.72	22.69	22.55	1			12	13	22.72	22.72	22.59	1
	16QAM	50	0	22.55	22.60	22.36	1		25	0	22.50	22.64	22.33	1	
		1	0	22.78	22.75	22.65	1		16QAM	1	0	22.78	22.74	22.68	1
		1	24	22.66	22.76	22.62	1			1	12	22.64	22.78	22.56	1
		1	49	22.71	22.57	22.60	1			1	24	22.67	22.63	22.55	1
		25	0	21.69	21.85	21.64	2			12	0	21.70	21.84	21.67	2
		25	12	21.78	21.70	21.67	2			12	6	21.74	21.71	21.63	2
25	25	21.81	21.81	21.56	2	12	13	21.82		21.80	21.59	2			
50	0	21.72	21.79	21.63	2	25	0	21.67	21.83	21.59	2				
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR (dB)	BW	MCS Index	Channel		19957	20175	20393	3GPP MPR (dB)
		Frequency(MHz)		1711.5	1732.5	1753.5				Frequency(MHz)		1710.7	1732.5	1754.3	
3M	QPSK	1	0	23.15	23.20	22.98	0	1.4M	QPSK	1	0	23.13	23.23	22.98	0
		1	7	23.09	23.17	22.96	0			1	2	23.13	23.16	22.96	0
		1	14	23.05	23.17	23.03	0			1	5	23.11	23.12	23.04	0
		8	0	22.58	22.67	22.42	1			3	0	23.10	23.10	22.92	1
		8	3	22.51	22.56	22.45	1			3	1	23.04	23.09	22.95	1
		8	7	22.71	22.76	22.59	1			3	3	23.24	23.19	23.05	1
	16QAM	15	0	22.53	22.61	22.34	1		16QAM	6	0	22.57	22.60	22.36	1
		1	0	22.78	22.74	22.69	1			1	0	22.75	22.75	22.65	1
		1	7	22.64	22.80	22.59	1			1	2	22.70	22.76	22.62	1
		1	14	22.70	22.59	22.59	1			1	5	22.68	22.57	22.60	1
		8	0	21.75	21.82	21.64	2			3	0	22.23	22.34	22.14	2
		8	3	21.74	21.70	21.66	2			3	1	22.22	22.27	22.13	2
8	7	21.88	21.83	21.53	2	3	3	22.35	22.30	22.10	2				
15	0	21.70	21.77	21.59	2	6	0	21.69	21.83	21.60	2				

FCC SAR Test Report

LTE Band 5															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600				Channel		20425	20525	20625	
		Frequency(MHz)		829	836.5	844				Frequency(MHz)		826.5	836.5	846.5	
10M	QPSK	1	0	22.24	22.30	22.36	0	5M	QPSK	1	0	22.20	22.25	22.31	0
		1	24	22.16	22.30	22.32	0			1	12	22.08	22.29	22.27	0
		1	49	22.27	22.33	22.43	0			1	24	22.23	22.28	22.42	0
		25	0	21.77	21.88	21.91	1			12	0	21.71	21.86	21.86	1
		25	12	21.64	21.73	21.82	1			12	6	21.57	21.68	21.80	1
		25	25	21.62	21.75	21.78	1			12	13	21.54	21.73	21.73	1
		50	0	21.81	21.82	21.94	1			25	0	21.79	21.74	21.92	1
	16QAM	1	0	22.04	22.13	22.17	1		16QAM	1	0	21.96	22.07	22.09	1
		1	24	22.09	22.20	22.22	1			1	12	22.03	22.18	22.16	1
		1	49	22.03	22.12	22.21	1			1	24	21.96	22.07	22.19	1
		25	0	21.00	21.06	21.14	2			12	0	20.94	20.99	21.09	2
		25	12	20.94	21.03	21.12	2			12	6	20.87	20.98	21.10	2
		25	25	20.90	21.03	21.05	2			12	13	20.82	21.01	20.99	2
		50	0	20.75	20.89	20.94	2			25	0	20.67	20.88	20.92	2
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR (dB)	BW	MCS Index	Channel		20407	20525	20643	3GPP MPR (dB)
		Frequency(MHz)		825.5	836.5	847.5						Frequency(MHz)		824.7	
3M	QPSK	1	0	22.18	22.23	22.31	0	1.4M	QPSK	1	0	22.23	22.24	22.34	0
		1	7	22.09	22.25	22.30	0			1	2	22.11	22.23	22.27	0
		1	14	22.19	22.31	22.37	0			1	5	22.25	22.25	22.41	0
		8	0	21.69	21.87	21.89	1			3	0	21.92	22.00	22.10	1
		8	3	21.60	21.68	21.74	1			3	1	21.80	21.88	21.97	1
		8	7	21.54	21.74	21.76	1			3	3	21.74	21.94	21.93	1
		15	0	21.76	21.77	21.90	1			6	0	21.77	21.77	21.93	1
	16QAM	1	0	22.02	22.05	22.16	1		16QAM	1	0	21.98	22.11	22.12	1
		1	7	22.01	22.16	22.17	1			1	2	22.02	22.15	22.20	1
		1	14	22.00	22.06	22.19	1			1	5	21.95	22.10	22.16	1
		8	0	20.98	20.99	21.09	2			3	0	21.18	21.18	21.32	2
		8	3	20.88	20.95	21.10	2			3	1	21.06	21.17	21.24	2
		8	7	20.89	21.01	20.97	2			3	3	21.04	21.21	21.19	2
		15	0	20.70	20.81	20.88	2			6	0	20.70	20.81	20.93	2

LTE Band 7															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350				Channel		20825	21100	21375	
		Frequency(MHz)		2510	2535	2560				Frequency(MHz)		2507.5	2535	2562.5	
20M	QPSK	1	0	22.96	22.96	22.74	0	15M	QPSK	1	0	22.95	22.94	22.66	0
		1	50	22.87	22.87	22.73	0			1	37	22.80	22.79	22.67	0
		1	99	23.06	23.09	22.95	0			1	74	23.03	23.03	22.93	0
		50	0	22.32	22.28	22.14	1			36	0	22.30	22.21	22.09	1
		50	25	22.50	22.51	22.39	1			36	19	22.44	22.41	22.37	1
		50	50	22.44	22.39	22.30	1			36	39	22.42	22.31	22.29	1
	16QAM	100	0	22.39	22.44	22.27	1		75	0	22.31	22.40	22.22	1	
		1	0	22.73	22.68	22.59	1		16QAM	1	0	22.71	22.60	22.58	1
		1	50	22.65	22.70	22.53	1			1	37	22.57	22.66	22.48	1
		1	99	22.85	22.83	22.71	1			1	74	22.82	22.77	22.69	1
		50	0	21.61	21.57	21.43	2			36	0	21.59	21.50	21.38	2
		50	25	21.56	21.55	21.45	2			36	19	21.50	21.47	21.43	2
50	50	21.76	21.76	21.54	2	36	39	21.75		21.74	21.46	2			
100	0	21.56	21.54	21.40	2	75	0	21.51	21.46	21.34	2				
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR (dB)	BW	MCS Index	Channel		20775	21100	21425	3GPP MPR (dB)
		Frequency(MHz)		2505	2535	2565				Frequency(MHz)		2502.5	2535	2567.5	
10M	QPSK	1	0	22.90	22.88	22.72	0	5M	QPSK	1	0	22.92	22.91	22.69	0
		1	24	22.85	22.79	22.72	0			1	12	22.79	22.86	22.68	0
		1	49	22.98	23.05	22.90	0			1	24	23.02	23.04	22.94	0
		25	0	22.30	22.20	22.13	1			12	0	22.26	22.26	22.09	1
		25	12	22.42	22.45	22.34	1			12	6	22.43	22.44	22.37	1
		25	25	22.41	22.33	22.28	1			12	13	22.36	22.37	22.25	1
		50	0	22.37	22.37	22.22	1			25	0	22.37	22.36	22.25	1
	16QAM	1	0	22.67	22.60	22.57	1		16QAM	1	0	22.65	22.62	22.51	1
		1	24	22.64	22.68	22.45	1			1	12	22.59	22.68	22.47	1
		1	49	22.80	22.75	22.65	1			1	24	22.78	22.78	22.69	1
		25	0	21.60	21.51	21.41	2			12	0	21.55	21.50	21.38	2
		25	12	21.54	21.47	21.44	2			12	6	21.49	21.50	21.43	2
		25	25	21.68	21.72	21.49	2			12	13	21.68	21.74	21.48	2
		50	0	21.54	21.46	21.39	2			25	0	21.48	21.53	21.38	2

FCC SAR Test Report

LTE Band 66															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572				Channel		132047	132322	132597	
		Frequency(MHz)		1720	1745	1770				Frequency(MHz)		1717.5	1745	1772.5	
20M	QPSK	1	0	23.01	23.07	23.02	0	15M	QPSK	1	0	22.95	23.05	22.96	0
		1	50	22.86	22.86	23.02	0			1	37	22.79	22.81	23.00	0
		1	99	22.91	22.82	22.95	0			1	74	22.85	22.75	22.90	0
		50	0	22.40	22.40	22.50	1			36	0	22.33	22.35	22.48	1
		50	25	22.44	22.56	22.51	1			36	19	22.36	22.54	22.45	1
		50	50	22.35	22.50	22.54	1			36	39	22.27	22.49	22.52	1
	16QAM	100	0	22.50	22.41	22.39	1			75	0	22.46	22.36	22.31	1
		1	0	23.00	23.15	22.99	1		16QAM	1	0	22.92	23.14	22.97	1
		1	50	23.03	22.97	22.87	1			1	37	22.98	22.92	22.83	1
		1	99	23.03	22.79	22.87	1			1	74	23.01	22.71	22.86	1
		50	0	21.62	21.68	21.72	2			36	0	21.54	21.64	21.67	2
		50	25	21.70	21.55	21.74	2			36	19	21.67	21.49	21.72	2
10M	QPSK	50	50	21.69	21.48	21.61	2	5M	QPSK	36	39	21.67	21.41	21.56	2
		100	0	21.67	21.55	21.80	2			75	0	21.61	21.47	21.78	2
	16QAM	1	0	22.93	23.03	22.97	0		16QAM	1	0	22.96	23.00	22.97	0
		1	24	22.84	22.78	23.01	0			1	12	22.84	22.78	23.00	0
		1	49	22.83	22.78	22.90	0			1	24	22.86	22.74	22.94	0
		25	0	22.37	22.34	22.48	1			12	0	22.36	22.35	22.45	1
	16QAM	25	12	22.42	22.49	22.46	1			12	6	22.36	22.55	22.46	1
		25	25	22.29	22.42	22.52	1			12	13	22.31	22.45	22.53	1
3M	QPSK	50	0	22.49	22.39	22.31	1			25	0	22.44	22.39	22.34	1
		1	0	22.93	23.07	22.93	1	1.4M	QPSK	1	0	22.93	23.03	22.97	0
		1	24	23.00	22.91	22.85	1			1	2	22.83	22.80	23.00	0
		1	49	23.01	22.72	22.82	1			1	5	22.89	22.75	22.90	0
		25	0	21.56	21.60	21.70	2			3	0	22.84	22.82	22.98	1
		25	12	21.68	21.47	21.73	2			3	1	22.93	23.04	22.93	1
	16QAM	25	25	21.61	21.44	21.56	2			3	3	22.80	22.92	22.98	1
		50	0	21.65	21.47	21.79	2			6	0	22.49	22.35	22.37	1
		1	0	22.98	23.07	22.98	1		16QAM	1	0	22.95	23.08	22.94	1
		1	7	22.95	22.93	22.82	1			1	2	23.01	22.89	22.85	1
		1	14	23.00	22.73	22.85	1			1	5	22.98	22.71	22.86	1
		8	0	21.61	21.63	21.64	2			3	0	22.08	22.13	22.17	2
3M	QPSK	8	3	21.64	21.52	21.70	2			3	1	22.12	22.04	22.19	2
		8	7	21.67	21.41	21.56	2			3	3	22.15	21.93	22.10	2
		15	0	21.61	21.47	21.78	2			6	0	21.61	21.53	21.75	2
	16QAM	1	0	22.95	23.02	23.01	0	1.4M	QPSK	1	0	22.93	23.03	22.97	0
		1	7	22.85	22.84	22.97	0			1	2	22.83	22.80	23.00	0
		1	14	22.83	22.75	22.93	0			1	5	22.89	22.75	22.90	0
		8	0	22.39	22.36	22.47	1			3	0	22.84	22.82	22.98	1
		8	3	22.41	22.55	22.45	1			3	1	22.93	23.04	22.93	1
		8	7	22.31	22.45	22.52	1			3	3	22.80	22.92	22.98	1
3M	QPSK	15	0	22.44	22.39	22.36	1			6	0	22.49	22.35	22.37	1
		1	0	22.98	23.07	22.98	1		16QAM	1	0	22.95	23.08	22.94	1
		1	7	22.95	22.93	22.82	1			1	2	23.01	22.89	22.85	1
		1	14	23.00	22.73	22.85	1			1	5	22.98	22.71	22.86	1
		8	0	21.61	21.63	21.64	2			3	0	22.08	22.13	22.17	2
		8	3	21.64	21.52	21.70	2			3	1	22.12	22.04	22.19	2
	16QAM	8	7	21.67	21.41	21.56	2			3	3	22.15	21.93	22.10	2
		15	0	21.61	21.47	21.78	2			6	0	21.61	21.53	21.75	2

FCC SAR Test Report

WLAN/BT

WLAN2.4G	Mode	Channel	Average power (dBm)	Duty Cycle %
	802.11b	1	18.42	99.04
		6	21.22	
		11	19.53	
	802.11g	1	15.83	95.14
		6	18.40	
		11	16.89	
	802.11n20	1	15.05	93.50
		6	17.95	
		11	16.24	
	802.11n40	3	16.18	89.23
		6	17.76	
		9	14.86	

WLAN5.2G	Mode	Channel	Average power (dBm)	Duty Cycle %
	802.11a	36	15.72	95.14
		40	15.40	
		44	15.55	
		48	14.82	
	802.11n20	36	15.13	94.26
		40	14.72	
		44	14.55	
		48	14.24	
	802.11n40	38	12.18	89.23
		46	14.04	
	802.11ac20	36	15.42	94.31
		40	14.87	
		44	14.61	
		48	14.22	
	802.11ac40	38	12.09	89.23
		46	13.82	
	802.11ac80	42	10.35	80.56

WLAN5.3G	Mode	Channel	Average power (dBm)	Duty Cycle %
	802.11a	52	15.42	95.14
		56	14.96	
		60	15.40	
		64	16.42	
	802.11n20	52	14.96	94.26
		56	14.47	
		60	14.45	
		64	14.31	
	802.11n40	54	14.32	89.23
		62	13.93	
	802.11ac20	52	14.97	94.31
		56	14.41	
		60	14.40	
		64	14.35	
	802.11ac40	54	14.28	89.23
		62	13.81	
	802.11ac80	58	13.62	80.56

FCC SAR Test Report

	Mode	Channel	Average power (dBm)	Duty Cycle %
WLAN5.6G	802.11a	100	16.43	95.14
		116	17.13	
		124	17.07	
		132	17.10	
		140	17.22	
		144	17.92	
	802.11n20	100	15.76	94.26
		116	16.56	
		124	17.00	
		132	17.05	
		140	16.73	
		144	17.24	
	802.11n40	102	15.46	89.23
		110	15.75	
		126	15.95	
		134	16.28	
		142	16.34	
	802.11ac20	100	15.85	94.31
		116	16.51	
		124	16.55	
		132	16.61	
		140	16.64	
		144	17.66	
	802.11ac40	102	15.35	89.23
		110	15.62	
		126	15.90	
		134	16.15	
		142	17.26	
	802.11ac80	106	14.92	80.56
		122	15.72	
		138	16.99	

	Mode	Channel	Average power (dBm)	Duty Cycle %
WLAN5.8G	802.11a	149	15.72	95.14
		157	15.31	
		165	15.01	
	802.11n20	149	15.51	94.26
		157	15.55	
		165	15.26	
	802.11n40	151	15.41	89.23
		159	15.06	
	802.11ac20	149	15.83	94.31
		157	15.51	
		165	15.23	
	802.11ac40	151	15.27	89.23
		159	14.91	
	802.11ac80	155	14.49	80.56

FCC SAR Test Report

Bluetooth	Mode	Channel	Average power (dBm)	Duty Cycle %
	BT GFSK	0	9.64	77.87
		39	9.71	77.60
		78	9.04	77.60
	BT DQPSK	0	9.10	77.33
		39	9.55	
		78	8.50	
	BT 8DPSK	0	9.09	77.33
		39	9.52	
		78	8.48	
	BLE 1Mbps	0	2.57	87.23
		19	3.04	
		39	2.13	
	BLE 2Mbps	0	1.26	65.60
		19	1.72	
		39	0.87	
	BLE S2	0	2.48	81.28
		19	2.98	
		39	2.02	
	BLE S8	0	3.34	94.76
		19	3.84	
		39	2.88	

FCC SAR Test Report

<Reduced Power> WWAN

Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Maximum Burst-Averaged Output Power						
GPRS (GMSK, 1Tx-slot)	28.32	28.35	28.30	25.16	24.93	24.72
GPRS (GMSK, 2Tx-slot)	26.22	26.30	26.24	22.98	22.84	22.60
GPRS (GMSK, 3Tx-slot)	25.20	25.23	25.20	20.97	20.79	20.52
GPRS (GMSK, 4Tx-slot)	23.16	23.19	23.18	19.66	19.46	19.18
EDGE (8PSK, 1Tx-slot)	26.13	25.96	25.88	25.14	24.56	25.02
EDGE (8PSK, 2Tx-slot)	23.98	23.84	23.69	21.28	20.83	21.16
EDGE (8PSK, 3Tx-slot)	21.27	20.96	21.03	19.65	18.89	19.32
EDGE (8PSK, 4Tx-slot)	18.85	18.70	18.46	17.83	17.05	17.58
Maximum Frame-Averaged Output Power						
GPRS (GMSK, 1Tx-slot)	19.32	19.35	19.30	16.16	15.93	15.72
GPRS (GMSK, 2Tx-slot)	20.22	20.30	20.24	16.98	16.84	16.60
GPRS (GMSK, 3Tx-slot)	20.94	20.97	20.94	16.71	16.53	16.26
GPRS (GMSK, 4Tx-slot)	20.16	20.19	20.18	16.66	16.46	16.18
EDGE (8PSK, 1Tx-slot)	17.13	16.96	16.88	16.14	15.56	16.02
EDGE (8PSK, 2Tx-slot)	17.98	17.84	17.69	15.28	14.83	15.16
EDGE (8PSK, 3Tx-slot)	17.01	16.70	16.77	15.39	14.63	15.06
EDGE (8PSK, 4Tx-slot)	15.85	15.70	15.46	14.83	14.05	14.58

Band	WCDMA Band II			WCDMA Band IV			WCDMA Band V			3GPP MPR (dB)
Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233	
Frequency (MHz)	1852.4	1880.0	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6	
RMC 12.2K	15.33	15.81	15.29	15.55	15.25	15.28	20.52	20.50	20.55	-
HSDPA Subtest-1	14.08	14.02	14.33	14.60	14.66	14.38	19.61	19.53	19.60	0
HSDPA Subtest-2	14.06	14.10	14.07	14.58	14.62	14.32	19.55	19.58	19.58	0
HSDPA Subtest-3	13.50	13.58	13.39	14.01	14.11	13.96	19.02	19.00	19.11	0.5
HSDPA Subtest-4	13.47	13.52	13.55	14.05	14.15	13.95	18.97	19.03	19.07	0.5
DC-HSDPA Subtest-1	14.09	14.08	14.05	14.58	14.61	14.35	19.64	19.55	19.66	0
DC-HSDPA Subtest-2	14.02	14.12	14.03	14.55	14.53	14.39	19.58	19.56	16.60	0
DC-HSDPA Subtest-3	13.44	13.59	13.51	14.03	14.08	13.93	19.06	19.03	19.17	0.5
DC-HSDPA Subtest-4	13.46	13.43	13.42	14.00	14.04	13.88	19.11	19.05	19.08	0.5
HSUPA Subtest-1	13.99	14.04	14.04	14.52	14.66	14.33	19.56	19.53	19.49	0
HSUPA Subtest-2	12.52	12.30	12.45	12.69	12.58	12.39	17.66	17.52	17.46	2
HSUPA Subtest-3	13.44	13.47	13.31	13.45	13.64	13.55	18.49	18.62	18.53	1
HSUPA Subtest-4	12.64	12.56	12.29	12.73	12.46	12.45	17.60	17.44	17.52	2
HSUPA Subtest-5	14.07	14.05	14.13	14.61	14.55	14.40	19.56	19.44	19.46	0
HSPA+ Subtest-1	12.03	11.96	12.10	12.33	12.01	11.98	17.03	17.11	17.06	2.5

FCC SAR Test Report

LTE Band 2															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100				Channel		18675	18900	19125	
		Frequency(MHz)		1860	1880	1900				Frequency(MHz)		1857.5	1880	1902.5	
20M	QPSK	1	0	15.47	16.13	15.68	0	15M	QPSK	1	0	15.39	16.09	15.63	0
		1	50	14.53	15.09	14.72	0			1	37	14.51	15.01	14.71	0
		1	99	14.62	15.28	14.83	0			1	74	14.54	15.24	14.78	0
		50	0	14.76	15.35	14.95	1			36	0	14.73	15.29	14.93	1
		50	25	14.27	14.84	14.42	1			36	19	14.25	14.77	14.37	1
		50	50	14.24	14.84	14.46	1			36	39	14.18	14.76	14.44	1
	16QAM	100	0	14.52	15.13	14.63	1		16QAM	75	0	14.51	15.11	14.55	1
		1	0	15.16	15.77	15.35	1			1	0	15.09	15.69	15.29	1
		1	50	14.10	14.69	14.29	1			1	37	14.07	14.63	14.27	1
		1	99	14.35	14.92	14.50	1			1	74	14.33	14.85	14.45	1
		50	0	13.80	14.40	14.02	2			36	0	13.74	14.32	14.00	2
		50	25	13.29	13.85	13.48	2			36	19	13.27	13.77	13.47	2
10M	QPSK	50	50	13.18	13.84	13.39	2	5M	16QAM	36	39	13.10	13.80	13.34	2
		100	0	13.46	14.02	13.65	2			75	0	13.44	13.94	13.64	2
	16QAM	1	0	15.46	16.09	15.60	0		QPSK	1	0	15.41	16.11	15.62	0
		1	24	14.49	15.06	14.66	0			1	12	14.46	15.04	14.70	0
		1	49	14.60	15.27	14.79	0			1	24	14.56	15.21	14.78	0
		25	0	14.70	15.30	14.94	1			12	0	14.69	15.30	14.93	1
		25	12	14.26	14.82	14.37	1			12	6	14.19	14.82	14.36	1
		25	25	14.16	14.77	14.44	1			12	13	14.16	14.83	14.44	1
3M	QPSK	50	0	14.51	15.09	14.60	1			25	0	14.48	15.08	14.55	1
		1	0	15.13	15.76	15.29	1	1.4M	16QAM	1	0	15.08	15.76	15.33	1
		1	24	14.06	14.64	14.27	1			1	12	14.05	14.64	14.25	1
		1	49	14.29	14.90	14.47	1			1	24	14.33	14.84	14.49	1
		25	0	13.78	14.32	14.01	2			12	0	13.72	14.36	13.97	2
		25	12	13.21	13.81	13.43	2			12	6	13.26	13.79	13.46	2
	16QAM	25	25	13.15	13.78	13.37	2			12	13	13.16	13.77	13.34	2
		50	0	13.45	13.97	13.57	2			25	0	13.40	13.94	13.63	2
3M	QPSK	1	0	15.42	16.06	15.63	0	1.4M	QPSK	1	0	15.39	16.09	15.63	0
		1	7	14.51	15.01	14.70	0			1	2	14.50	15.03	14.70	0
		1	14	14.57	15.20	14.82	0			1	5	14.60	15.21	14.78	0
		8	0	14.72	15.30	14.90	1			3	0	15.20	15.77	15.43	1
		8	3	14.19	14.83	14.37	1			3	1	14.76	15.32	14.84	1
		8	7	14.20	14.79	14.45	1			3	3	14.69	15.26	14.90	1
3M	16QAM	15	0	14.46	15.11	14.58	1			6	0	14.51	15.07	14.61	1
		1	0	15.09	15.72	15.33	1		16QAM	1	0	15.11	15.70	15.30	1
		1	7	14.02	14.67	14.24	1			1	2	14.08	14.61	14.27	1
		1	14	14.33	14.84	14.48	1			1	5	14.30	14.84	14.49	1
		8	0	13.72	14.34	13.94	2			3	0	14.26	14.85	14.47	2
		8	3	13.23	13.83	13.42	2			3	1	13.71	14.34	13.93	2
3M	16QAM	8	7	13.11	13.79	13.37	2			3	3	13.64	14.29	13.88	2
		15	0	13.40	13.95	13.60	2			6	0	13.40	14.00	13.60	2

FCC SAR Test Report

LTE Band 4																	
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)		
		Channel		20050	20175	20300				Channel		20025	20175	20325			
		Frequency(MHz)		1720	1732.5	1745				Frequency(MHz)		1717.5	1732.5	1747.5			
20M	QPSK	1	0	14.78	15.78	14.97	0	15M	QPSK	1	0	14.74	15.75	14.91	0		
		1	50	14.07	15.19	14.26	0			1	37	14.05	15.18	14.22	0		
		1	99	14.32	15.44	14.58	0			1	74	14.26	15.39	14.57	0		
		50	0	13.76	14.86	13.93	1			36	0	13.75	14.84	13.88	1		
		50	25	13.57	14.69	13.84	1			36	19	13.49	14.62	13.82	1		
		50	50	13.77	14.85	13.96	1			36	39	13.76	14.81	13.93	1		
	16QAM	100	0	13.72	14.85	13.90	1		75	0	13.69	14.84	13.84	1			
		1	0	14.15	15.25	14.38	1		1	0	14.11	15.20	14.36	1			
		1	50	13.94	15.09	14.18	1		1	37	13.88	15.07	14.15	1			
		1	99	14.23	15.28	14.45	1		1	74	14.21	15.20	14.44	1			
		50	0	12.73	13.88	12.97	2		36	0	12.65	13.84	12.92	2			
		50	25	12.66	13.74	12.88	2		36	19	12.63	13.68	12.86	2			
W	MCS Index	Channel		20000	20175	20350	3GPP MPR (dB)	BW	MCS Index	Channel		19975	20175	20375	3GPP MPR (dB)		
		Frequency(MHz)		1715	1732.5	1750				Frequency(MHz)		1712.5	1732.5	1752.5			
		1	0	14.70	15.74	14.92				0	1	0	14.73	15.70		14.96	0
		1	24	14.04	15.13	14.24				0	1	12	14.03	15.14		14.21	0
10M	QPSK	1	49	14.30	15.37	14.53	0	5M	QPSK	1	24	14.24	15.43	14.53	0		
		25	0	13.70	14.78	13.91	1			12	0	13.72	14.81	13.92	1		
		25	12	13.56	14.67	13.76	1			12	6	13.51	14.67	13.79	1		
		25	25	13.70	14.77	13.90	1			12	13	13.70	14.80	13.94	1		
		50	0	13.69	14.79	13.88	1			25	0	13.64	14.83	13.85	1		
		1	0	14.13	15.18	14.33	1			1	0	14.13	15.17	14.36	1		
	16QAM	1	24	13.88	15.01	14.16	1		16QAM	1	12	13.86	15.03	14.10	1		
		1	49	14.21	15.20	14.44	1			1	24	14.17	15.26	14.39	1		
		25	0	12.65	13.84	12.92	2			12	0	12.66	13.83	12.95	2		
		25	12	12.64	13.66	12.87	2			12	6	12.60	13.67	12.83	2		
		25	25	12.68	13.79	12.85	2			12	13	12.69	13.78	12.88	2		
		50	0	12.67	13.78	12.91	2			25	0	12.62	13.82	12.87	2		
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR (dB)	BW	MCS Index	Channel		19957	20175	20393	3GPP MPR (dB)		
		Frequency(MHz)		1711.5	1732.5	1753.5				Frequency(MHz)		1710.7	1732.5	1754.3			
3M	QPSK	1	0	14.72	15.71	14.92	0	1.4M	QPSK	1	0	14.70	15.74	14.92	0		
		1	7	14.00	15.14	14.24	0			1	2	14.04	15.13	14.24	0		
		1	14	14.24	15.42	14.52	0			1	5	14.30	15.37	14.53	0		
		8	0	13.68	14.85	13.91	1			3	0	14.20	15.28	14.41	1		
		8	3	13.53	14.64	13.76	1			3	1	14.06	15.17	14.26	1		
		8	7	13.69	14.84	13.94	1			3	3	14.22	15.27	14.40	1		
		15	0	13.67	14.80	13.86	1			6	0	13.71	14.79	13.88	1		
	16QAM	1	0	14.13	15.17	14.37	1		16QAM	1	0	14.10	15.18	14.33	1		
		1	7	13.86	15.05	14.13	1			1	2	13.92	15.01	14.16	1		
		1	14	14.20	15.22	14.43	1			1	5	14.18	15.20	14.44	1		
		8	0	12.71	13.81	12.92	2			3	0	13.19	14.33	13.42	2		
		8	3	12.60	13.66	12.86	2			3	1	13.08	14.23	13.33	2		
		8	7	12.75	13.81	12.82	2			3	3	13.22	14.28	13.39	2		
		15	0	12.65	13.76	12.87	2			6	0	12.64	13.82	12.88	2		

FCC SAR Test Report

LTE Band 5															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600				Channel		20425	20525	20625	
		Frequency(MHz)		829	836.5	844				Frequency(MHz)		826.5	836.5	846.5	
10M	QPSK	1	0	20.44	20.51	20.62	0	5M	QPSK	1	0	20.40	20.46	20.57	0
		1	24	20.42	20.57	20.64	0			1	12	20.34	20.56	20.59	0
		1	49	20.55	20.62	20.77	0			1	24	20.51	20.57	20.76	0
		25	0	19.77	19.89	20.02	1			12	0	19.71	19.87	19.97	1
		25	12	19.73	19.83	19.97	1			12	6	19.66	19.78	19.95	1
		25	25	19.67	19.81	19.89	1			12	13	19.59	19.79	19.84	1
	16QAM	50	0	19.88	19.90	20.07	1		25	0	19.86	19.82	20.05	1	
		1	0	19.76	19.86	19.95	1		16QAM	1	0	19.68	19.80	19.87	1
		1	24	19.70	19.82	19.89	1			1	12	19.64	19.80	19.83	1
		1	49	19.65	19.75	19.89	1			1	24	19.58	19.70	19.87	1
		25	0	18.43	18.50	18.63	2			12	0	18.37	18.43	18.58	2
		25	12	18.28	18.38	18.52	2			12	6	18.21	18.33	18.50	2
25	25	18.14	18.28	18.35	2	12	13	18.06		18.26	18.29	2			
50	0	18.29	18.44	18.54	2	25	0	18.21	18.43	18.52	2				
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR (dB)	BW	MCS Index	Channel		20407	20525	20643	3GPP MPR (dB)
		Frequency(MHz)		825.5	836.5	847.5				Frequency(MHz)		824.7	836.5	848.3	
3M	QPSK	1	0	20.38	20.44	20.57	0	1.4M	QPSK	1	0	20.43	20.45	20.60	0
		1	7	20.35	20.52	20.62	0			1	2	20.37	20.50	20.59	0
		1	14	20.47	20.60	20.71	0			1	5	20.53	20.54	20.75	0
		8	0	19.69	19.88	20.00	1			3	0	19.92	20.01	20.21	1
		8	3	19.69	19.78	19.89	1			3	1	19.89	19.98	20.12	1
		8	7	19.59	19.80	19.87	1			3	3	19.79	20.00	20.04	1
	16QAM	15	0	19.83	19.85	20.03	1		6	0	19.84	19.85	20.06	1	
		1	0	19.74	19.78	19.94	1		16QAM	1	0	19.70	19.84	19.90	1
		1	7	19.62	19.78	19.84	1			1	2	19.63	19.77	19.87	1
		1	14	19.62	19.69	19.87	1			1	5	19.57	19.73	19.84	1
		8	0	18.41	18.43	18.58	2			3	0	18.61	18.62	18.81	2
		8	3	18.22	18.30	18.50	2			3	1	18.40	18.52	18.64	2
8	7	18.13	18.26	18.27	2	3	3	18.28		18.46	18.49	2			
15	0	18.24	18.36	18.48	2	6	0	18.24	18.36	18.53	2				

LTE Band 7															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350				Channel		20825	21100	21375	
		Frequency(MHz)		2510	2535	2560				Frequency(MHz)		2507.5	2535	2562.5	
20M	QPSK	1	0	11.91	12.77	12.58	0	15M	QPSK	1	0	11.90	12.75	12.50	0
		1	50	11.60	12.48	12.27	0			1	37	11.53	12.40	12.21	0
		1	99	12.20	13.08	12.79	0			1	74	12.17	13.02	12.77	0
		50	0	11.23	12.10	11.93	1			36	0	11.21	12.03	11.88	1
		50	25	11.36	12.20	11.99	1			36	19	11.30	12.12	11.97	1
		50	50	11.34	12.17	12.01	1			36	39	11.32	12.09	12.00	1
		100	0	11.29	12.22	11.98	1			75	0	11.21	12.18	11.93	1
	16QAM	1	0	11.76	12.59	12.43	1		16QAM	1	0	11.74	12.51	12.42	1
		1	50	11.26	12.19	11.95	1			1	37	11.18	12.15	11.90	1
		1	99	11.43	12.29	12.10	1			1	74	11.40	12.23	12.08	1
		50	0	10.36	11.20	10.99	2			36	0	10.34	11.13	10.94	2
		50	25	10.24	11.11	10.94	2			36	19	10.18	11.03	10.92	2
		50	50	10.35	11.23	10.94	2			36	39	10.34	11.21	10.86	2
		100	0	10.29	11.15	10.94	2			75	0	10.24	11.07	10.88	2
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR (dB)	BW	MCS Index	Channel		20775	21100	21425	3GPP MPR (dB)
		Frequency(MHz)		2505	2535	2565				Frequency(MHz)		2502.5	2535	2567.5	
10M	QPSK	1	0	11.85	12.69	12.56	0	5M	QPSK	1	0	11.87	12.72	12.53	0
		1	24	11.58	12.40	12.26	0			1	12	11.52	12.47	12.22	0
		1	49	12.12	13.04	12.74	0			1	24	12.16	13.03	12.78	0
		25	0	11.21	12.02	11.92	1			12	0	11.17	12.08	11.88	1
		25	12	11.28	12.16	11.94	1			12	6	11.29	12.15	11.97	1
		25	25	11.31	12.11	11.99	1			12	13	11.26	12.15	11.96	1
		50	0	11.27	12.15	11.93	1			25	0	11.27	12.14	11.96	1
	16QAM	1	0	11.70	12.51	12.41	1		16QAM	1	0	11.68	12.53	12.35	1
		1	24	11.25	12.17	11.87	1			1	12	11.20	12.17	11.89	1
		1	49	11.38	12.21	12.04	1			1	24	11.36	12.24	12.08	1
		25	0	10.35	11.14	10.97	2			12	0	10.30	11.13	10.94	2
		25	12	10.22	11.03	10.93	2			12	6	10.17	11.06	10.92	2
		25	25	10.27	11.19	10.89	2			12	13	10.27	11.21	10.88	2
		50	0	10.27	11.07	10.93	2			25	0	10.21	11.14	10.92	2

FCC SAR Test Report

LTE Band 66															
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572				Channel		132047	132322	132597	
		Frequency(MHz)		1720	1745	1770				Frequency(MHz)		1717.5	1745	1772.5	
20M	QPSK	1	0	14.79	15.53	15.08	0	15M	QPSK	1	0	14.73	15.51	15.02	0
		1	50	14.65	14.97	14.89	0			1	37	14.58	14.92	14.87	0
		1	99	14.58	14.91	14.62	0			1	74	14.52	14.84	14.57	0
		50	0	13.67	14.16	13.61	1			36	0	13.60	14.11	13.59	1
		50	25	13.70	14.52	14.04	1			36	19	13.62	14.50	13.98	1
		50	50	13.59	14.29	13.77	1			36	39	13.51	14.28	13.75	1
	16QAM	100	0	13.59	14.38	13.84	1		16QAM	75	0	13.55	14.33	13.76	1
		1	0	14.61	15.48	14.96	1			1	0	14.53	15.47	14.94	1
		1	50	13.66	14.46	13.96	1			1	37	13.61	14.41	13.92	1
		1	99	14.22	14.96	14.52	1			1	74	14.20	14.88	14.51	1
		50	0	12.75	13.59	13.07	2			36	0	12.67	13.55	13.02	2
		50	25	12.68	13.15	12.68	2			36	19	12.65	13.09	12.66	2
10M	QPSK	50	50	12.59	13.28	12.79	2	5M	QPSK	36	39	12.57	13.21	12.74	2
		100	0	12.63	13.41	12.96	2			75	0	12.57	13.33	12.94	2
	16QAM	1	0	14.71	15.49	15.03	0		16QAM	1	0	14.74	15.46	15.03	0
		1	24	14.63	14.89	14.88	0			1	12	14.63	14.89	14.87	0
		1	49	14.50	14.87	14.57	0			1	24	14.53	14.83	14.61	0
		25	0	13.64	14.10	13.59	1			12	0	13.63	14.11	13.56	1
		25	12	13.68	14.45	13.99	1			12	6	13.62	14.51	13.99	1
		25	25	13.53	14.21	13.75	1			12	13	13.55	14.24	13.76	1
3M	QPSK	50	0	13.58	14.36	13.76	1		QPSK	25	0	13.53	14.36	13.79	1
		1	0	14.54	15.40	14.90	1		16QAM	1	0	14.54	15.43	14.94	1
		1	24	13.63	14.40	13.94	1			1	12	13.58	14.44	13.91	1
		1	49	14.20	14.89	14.47	1			1	24	14.20	14.88	14.50	1
		25	0	12.69	13.51	13.05	2			12	0	12.67	13.53	12.99	2
		25	12	12.66	13.07	12.67	2			12	6	12.62	13.13	12.62	2
1.4M	QPSK	25	25	12.51	13.24	12.74	2	1.4M	QPSK	12	13	12.52	13.23	12.77	2
		50	0	12.61	13.33	12.95	2			25	0	12.57	13.34	12.91	2
	16QAM	1	0	14.73	15.48	15.07	0		16QAM	1	0	14.71	15.49	15.03	0
		1	7	14.64	14.95	14.84	0			1	2	14.62	14.91	14.87	0
		1	14	14.50	14.84	14.60	0			1	5	14.56	14.84	14.57	0
		8	0	13.66	14.12	13.58	1			3	0	14.11	14.58	14.09	1
		8	3	13.67	14.51	13.98	1			3	1	14.19	15.00	14.46	1
		8	7	13.55	14.24	13.75	1			3	3	14.04	14.71	14.21	1
3M	QPSK	15	0	13.53	14.36	13.81	1	1.4M	QPSK	6	0	13.58	14.32	13.82	1
		1	0	14.59	15.40	14.95	1		16QAM	1	0	14.56	15.41	14.91	1
		1	7	13.58	14.42	13.91	1			1	2	13.64	14.38	13.94	1
		1	14	14.19	14.90	14.50	1			1	5	14.17	14.88	14.51	1
		8	0	12.74	13.54	12.99	2			3	0	13.21	14.04	13.52	2
		8	3	12.62	13.12	12.64	2			3	1	13.10	13.64	13.13	2
3M	QPSK	8	7	12.57	13.21	12.74	2		16QAM	3	3	13.05	13.73	13.28	2
		15	0	12.57	13.33	12.94	2			6	0	12.57	13.39	12.91	2
	16QAM	1	0	14.73	15.48	15.07	0		QPSK	1	0	14.71	15.49	15.03	0
		1	7	14.64	14.95	14.84	0			1	2	14.62	14.91	14.87	0
		1	14	14.50	14.84	14.60	0			1	5	14.56	14.84	14.57	0
		8	0	13.66	14.12	13.58	1			3	0	14.11	14.58	14.09	1
		8	3	13.67	14.51	13.98	1			3	1	14.19	15.00	14.46	1
		8	7	13.55	14.24	13.75	1			3	3	14.04	14.71	14.21	1

FCC SAR Test Report

WLAN/BT

WLAN2.4G	Mode	Channel	Average power (dBm)	Duty Cycle %
	802.11b	1	13.57	99.04
		6	16.44	
		11	14.53	
	802.11g	1	11.80	95.14
		6	14.45	
		11	12.92	
	802.11n20	1	11.07	93.50
		6	13.98	
		11	12.31	
	802.11n40	3	12.22	89.23
		6	13.82	
		9	11.92	

WLAN5.2G	Mode	Channel	Average power (dBm)	Duty Cycle %
	802.11a	36	8.75	95.14
		40	8.21	
		44	8.15	
		48	7.81	
	802.11n20	36	8.09	94.26
		40	7.69	
		44	7.31	
		48	6.91	
	802.11n40	38	7.45	89.23
		46	6.65	
	802.11ac20	36	8.05	94.31
		40	7.63	
		44	7.30	
		48	6.81	
	802.11ac40	38	6.90	89.23
		46	6.39	
	802.11ac80	42	6.49	80.56

WLAN5.3G	Mode	Channel	Average power (dBm)	Duty Cycle %
	802.11a	52	8.15	95.14
		56	8.01	
		60	7.74	
		64	8.59	
	802.11n20	52	7.64	94.26
		56	7.32	
		60	7.03	
		64	6.85	
	802.11n40	54	7.01	89.23
		62	6.51	
	802.11ac20	52	7.55	94.31
		56	7.22	
		60	7.01	
		64	6.81	
	802.11ac40	54	6.81	89.23
		62	6.33	
	802.11ac80	58	6.12	80.56

FCC SAR Test Report

	Mode	Channel	Average power (dBm)	Duty Cycle %
WLAN5.6G	802.11a	100	10.84	95.14
		116	12.16	
		124	12.11	
		132	11.86	
		140	12.25	
		144	12.09	
	802.11n20	100	10.50	94.26
		116	11.51	
		124	11.91	
		132	11.81	
		140	11.61	
		144	11.72	
	802.11n40	102	10.25	89.23
		110	10.72	
		126	11.56	
		134	11.34	
		142	11.44	
	802.11ac20	100	10.58	94.31
		116	11.55	
		124	11.98	
		132	11.81	
		140	11.64	
		144	11.72	
	802.11ac40	102	10.15	89.23
		110	10.56	
		126	11.39	
		134	11.22	
		142	11.29	
	802.11ac80	106	9.90	80.56
		122	10.77	
		138	10.66	

	Mode	Channel	Average power (dBm)	Duty Cycle %
WLAN5.8G	802.11a	149	12.46	95.14
		157	12.13	
		165	11.82	
	802.11n20	149	11.92	94.26
		157	11.45	
		165	11.20	
	802.11n40	151	11.39	89.23
		159	11.06	
	802.11ac20	149	11.89	94.31
		157	11.40	
		165	11.23	
	802.11ac40	151	11.28	89.23
		159	10.85	
	802.11ac80	155	10.13	80.56

FCC SAR Test Report

4.6 SAR Testing Results

4.6.1 SAR Test Reduction Considerations

<KDB 447498 D04, General RF Exposure Guidance>

Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:

- (1) ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- (2) ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- (3) ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

<KDB 941225 D01, 3G SAR Measurement Procedures>

The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

<KDB 941225 D05, SAR Evaluation Considerations for LTE Devices>

- (1) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

- (2) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

- (3) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> 1/2$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

- (4) Other channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is $> 1/2$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

FCC SAR Test Report

<KDB 248227 D01, SAR Guidance for Wi-Fi Transmitters>

- (1) For handsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is ≤ 0.4 W/kg, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
- (2) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is ≤ 0.8 W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.
- (3) For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is > 0.8 W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is ≤ 1.2 W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is ≤ 1.2 W/kg.
- (4) For WLAN MIMO mode, the power-based standalone SAR test exclusion or the sum of SAR provision in KDB 447498 to determine simultaneous transmission SAR test exclusion should be applied. Otherwise, SAR for MIMO mode will be measured with all applicable antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

FCC SAR Test Report

4.6.2 SAR Results for Body Exposure Condition (Separation Distance is 0 cm Gap)

<GSM / WCDMA>

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Ch.	Power Reduction	Sample	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Tune-up Scaling Factor	Scaled SAR-1g (W/kg)
	GSM850	GPRS 2Tx slot	Rear Face	0	189	Reduced Power	1	28.0	26.30	0.09	0.635	1.48	0.94
	GSM850	GPRS 2Tx slot	Left Side	0	189	Full Power	1	32.0	30.43	-0.05	0.039	1.44	0.06
	GSM850	GPRS 2Tx slot	Right Side	0	189	Reduced Power	1	28.0	26.30	-0.07	0.488	1.48	0.72
	GSM850	GPRS 2Tx slot	Bottom Side	0	189	Reduced Power	1	28.0	26.30	-0.06	0.368	1.48	0.54
	GSM850	GPRS 2Tx slot	Rear Face	1.3	189	Full Power	1	32.0	30.43	-0.1	0.422	1.44	0.61
	GSM850	GPRS 2Tx slot	Right Side	0.7	189	Full Power	1	32.0	30.43	0.09	0.231	1.44	0.33
	GSM850	GPRS 2Tx slot	Bottom Side	1.2	189	Full Power	1	32.0	30.43	0.04	0.292	1.44	0.42
1	GSM850	GPRS 2Tx slot	Rear Face	0	128	Reduced Power	1	28.0	26.22	0.18	0.777	1.51	1.17
	GSM850	GPRS 2Tx slot	Rear Face	0	251	Reduced Power	1	28.0	26.24	0.16	0.500	1.50	0.75
	GSM850	GPRS 2Tx slot	Rear Face	0	128	Reduced Power	2	28.0	26.22	-0.04	0.761	1.51	1.15
2	GSM1900	GPRS 2Tx slot	Rear Face	0	512	Reduced Power	1	23.5	22.98	0.06	0.998	1.13	1.12
	GSM1900	GPRS 2Tx slot	Left Side	0	512	Full Power	1	29.0	27.94	0.07	0.081	1.28	0.10
	GSM1900	GPRS 2Tx slot	Right Side	0	512	Reduced Power	1	23.5	22.98	0.01	0.247	1.13	0.28
	GSM1900	GPRS 2Tx slot	Bottom Side	0	512	Reduced Power	1	23.5	22.98	-0.07	0.510	1.13	0.57
	GSM1900	GPRS 2Tx slot	Rear Face	1.3	512	Full Power	1	29.0	27.94	-0.11	0.294	1.28	0.38
	GSM1900	GPRS 2Tx slot	Right Side	0.7	512	Full Power	1	29.0	27.94	-0.07	0.219	1.28	0.28
	GSM1900	GPRS 2Tx slot	Bottom Side	1.2	512	Full Power	1	29.0	27.94	0.01	0.138	1.28	0.18
	GSM1900	GPRS 2Tx slot	Rear Face	0	661	Reduced Power	1	23.5	22.84	0.08	0.932	1.16	1.08
	GSM1900	GPRS 2Tx slot	Rear Face	0	810	Reduced Power	1	23.5	22.60	-0.05	0.782	1.23	0.96
	GSM1900	GPRS 2Tx slot	Rear Face	0	512	Reduced Power	2	23.5	22.98	0.01	0.991	1.13	1.12
3	WCDMA II	RMC12.2K	Rear Face	0	9400	Reduced Power	1	16.5	15.81	0.07	1.010	1.17	1.18
	WCDMA II	RMC12.2K	Right Side	0	9400	Reduced Power	1	16.5	15.81	-0.14	0.293	1.17	0.34
	WCDMA II	RMC12.2K	Bottom Side	0	9400	Reduced Power	1	16.5	15.81	-0.07	0.430	1.17	0.50
	WCDMA II	RMC12.2K	Rear Face	1.3	9400	Full Power	1	24.0	22.14	0.07	0.496	1.53	0.76
	WCDMA II	RMC12.2K	Right Side	0.7	9400	Full Power	1	24.0	22.14	0.06	0.425	1.53	0.65
	WCDMA II	RMC12.2K	Bottom Side	1.2	9400	Full Power	1	24.0	22.14	0.11	0.205	1.53	0.31
	WCDMA II	RMC12.2K	Rear Face	0	9262	Reduced Power	1	16.5	15.33	0.1	0.863	1.31	1.13
	WCDMA II	RMC12.2K	Rear Face	0	9538	Reduced Power	1	16.5	15.29	0.02	0.818	1.32	1.08
	WCDMA II	RMC12.2K	Rear Face	0	9400	Reduced Power	2	16.5	15.81	-0.1	0.994	1.17	1.17
4	WCDMA IV	RMC12.2K	Rear Face	0	1312	Reduced Power	1	17.0	15.55	-0.01	0.464	1.40	0.65
	WCDMA IV	RMC12.2K	Right Side	0	1312	Reduced Power	1	17.0	15.55	-0.08	0.228	1.40	0.32
	WCDMA IV	RMC12.2K	Bottom Side	0	1312	Reduced Power	1	17.0	15.55	0.01	0.296	1.40	0.41
	WCDMA IV	RMC12.2K	Rear Face	1.3	1312	Full Power	1	24.0	22.34	-0.04	0.326	1.47	0.48
	WCDMA IV	RMC12.2K	Right Side	0.7	1312	Full Power	1	24.0	22.34	0.08	0.275	1.47	0.40
	WCDMA IV	RMC12.2K	Bottom Side	1.2	1312	Full Power	1	24.0	22.34	0.03	0.117	1.47	0.17
	WCDMA IV	RMC12.2K	Rear Face	0	1312	Reduced Power	2	17.0	15.55	0.06	0.459	1.40	0.64
	WCDMA V	RMC12.2K	Rear Face	0	4233	Reduced Power	1	22.0	20.55	0.02	0.600	1.40	0.84
	WCDMA V	RMC12.2K	Right Side	0	4233	Reduced Power	1	22.0	20.55	-0.04	0.668	1.40	0.93
	WCDMA V	RMC12.2K	Bottom Side	0	4233	Reduced Power	1	22.0	20.55	0.02	0.408	1.40	0.57
	WCDMA V	RMC12.2K	Rear Face	1.3	4233	Full Power	1	24.0	22.45	0.08	0.284	1.43	0.41
	WCDMA V	RMC12.2K	Right Side	0.7	4233	Full Power	1	24.0	22.45	0.02	0.318	1.43	0.45
	WCDMA V	RMC12.2K	Bottom Side	1.2	4233	Full Power	1	24.0	22.45	0.03	0.185	1.43	0.26
	WCDMA V	RMC12.2K	Rear Face	0	4132	Reduced Power	1	22.0	20.52	0	0.660	1.41	0.93
	WCDMA V	RMC12.2K	Rear Face	0	4182	Reduced Power	1	22.0	20.50	-0.09	0.624	1.41	0.88
	WCDMA V	RMC12.2K	Right Side	0	4132	Reduced Power	1	22.0	20.52	-0.17	0.655	1.41	0.92
5	WCDMA V	RMC12.2K	Right Side	0	4182	Reduced Power	1	22.0	20.50	-0.06	0.664	1.41	0.94
	WCDMA V	RMC12.2K	Right Side	0	4182	Reduced Power	2	22.0	20.50	0.07	0.651	1.41	0.92

FCC SAR Test Report

<LTE>

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Ch.	Power Reduction	Sample	RB	offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Tune-up Scaling Factor	Scaled SAR-1g (W/kg)
	LTE 2	QPSK20M	Rear Face	0	18900	Reduced Power	1	1	0	17.0	16.13	0.08	0.903	1.22	1.10
	LTE 2	QPSK20M	Right Side	0	18900	Reduced Power	1	1	0	17.0	16.13	-0.07	0.292	1.22	0.36
	LTE 2	QPSK20M	Bottom Side	0	18900	Reduced Power	1	1	0	17.0	16.13	0.01	0.465	1.22	0.57
	LTE 2	QPSK20M	Rear Face	1.3	18900	Full Power	1	1	0	24.0	23.27	-0.08	0.527	1.18	0.62
	LTE 2	QPSK20M	Right Side	0.7	18900	Full Power	1	1	0	24.0	23.27	-0.04	0.412	1.18	0.49
	LTE 2	QPSK20M	Bottom Side	1.2	18900	Full Power	1	1	0	24.0	23.27	-0.13	0.244	1.18	0.29
	LTE 2	QPSK20M	Rear Face	0	18700	Reduced Power	1	1	0	17.0	15.47	0.08	0.758	1.42	1.08
6	LTE 2	QPSK20M	Rear Face	0	19100	Reduced Power	1	1	0	17.0	15.68	0	0.852	1.36	1.15
	LTE 2	QPSK20M	Rear Face	0	18900	Reduced Power	1	50	0	16.0	15.35	-0.04	0.738	1.16	0.86
	LTE 2	QPSK20M	Right Side	0	18900	Reduced Power	1	50	0	16.0	15.35	-0.07	0.240	1.16	0.28
	LTE 2	QPSK20M	Bottom Side	0	18900	Reduced Power	1	50	0	16.0	15.35	0	0.393	1.16	0.46
	LTE 2	QPSK20M	Rear Face	1.3	18900	Full Power	1	50	0	23.0	22.64	0.11	0.462	1.09	0.50
	LTE 2	QPSK20M	Right Side	0.7	18900	Full Power	1	50	0	23.0	22.64	-0.09	0.416	1.09	0.45
	LTE 2	QPSK20M	Bottom Side	1.2	18900	Full Power	1	50	0	23.0	22.64	-0.06	0.211	1.09	0.23
	LTE 2	QPSK20M	Rear Face	0	18700	Reduced Power	1	50	0	16.0	14.76	0.03	0.670	1.33	0.89
	LTE 2	QPSK20M	Rear Face	0	19100	Reduced Power	1	50	0	16.0	14.95	0.02	0.732	1.27	0.93
	LTE 2	QPSK20M	Rear Face	0	18900	Reduced Power	1	100	0	16.0	15.13	0.03	0.705	1.22	0.86
	LTE 2	QPSK20M	Rear Face	0	19100	Reduced Power	2	1	0	17.0	15.68	0.06	0.839	1.36	1.14
	LTE 5	QPSK10M	Rear Face	0	20600	Reduced Power	1	1	49	22.0	20.77	-0.07	0.687	1.33	0.91
	LTE 5	QPSK10M	Right Side	0	20600	Reduced Power	1	1	49	22.0	20.77	-0.06	0.682	1.33	0.91
	LTE 5	QPSK10M	Bottom Side	0	20600	Reduced Power	1	1	49	22.0	20.77	-0.15	0.455	1.33	0.60
	LTE 5	QPSK10M	Rear Face	1.3	20600	Full Power	1	1	49	24.0	22.43	-0.07	0.213	1.44	0.31
	LTE 5	QPSK10M	Right Side	0.7	20600	Full Power	1	1	49	24.0	22.43	-0.11	0.172	1.44	0.25
	LTE 5	QPSK10M	Bottom Side	1.2	20600	Full Power	1	1	49	24.0	22.43	0.14	0.196	1.44	0.28
	LTE 5	QPSK10M	Rear Face	0	20450	Reduced Power	1	1	49	22.0	20.55	0.1	0.685	1.40	0.96
	LTE 5	QPSK10M	Rear Face	0	20525	Reduced Power	1	1	49	22.0	20.62	-0.07	0.685	1.37	0.94
	LTE 5	QPSK10M	Right Side	0	20450	Reduced Power	1	1	49	22.0	20.55	0	0.669	1.40	0.93
7	LTE 5	QPSK10M	Right Side	0	20525	Reduced Power	1	1	49	22.0	20.62	0.12	0.723	1.37	0.99
	LTE 5	QPSK10M	Rear Face	0	20600	Reduced Power	1	25	0	21.0	20.02	0.04	0.560	1.25	0.70
	LTE 5	QPSK10M	Right Side	0	20600	Reduced Power	1	25	0	21.0	20.02	-0.01	0.674	1.25	0.84
	LTE 5	QPSK10M	Bottom Side	0	20600	Reduced Power	1	25	0	21.0	20.02	-0.01	0.420	1.25	0.53
	LTE 5	QPSK10M	Rear Face	1.3	20600	Full Power	1	25	0	23.0	21.91	0.05	0.184	1.29	0.24
	LTE 5	QPSK10M	Right Side	0.7	20600	Full Power	1	25	0	23.0	21.91	-0.02	0.140	1.29	0.18
	LTE 5	QPSK10M	Bottom Side	1.2	20600	Full Power	1	25	0	23.0	21.91	-0.06	0.174	1.29	0.22
	LTE 5	QPSK10M	Right Side	0	20450	Reduced Power	1	25	0	21.0	19.77	-0.06	0.623	1.33	0.83
	LTE 5	QPSK10M	Right Side	0	20525	Reduced Power	1	25	0	21.0	19.89	-0.09	0.631	1.29	0.81
	LTE 5	QPSK10M	Rear Face	0	20600	Reduced Power	1	50	0	21.0	20.07	0.07	0.500	1.24	0.62
	LTE 5	QPSK10M	Right Side	0	20600	Reduced Power	1	50	0	21.0	20.07	-0.01	0.637	1.24	0.79
	LTE 5	QPSK10M	Right Side	0	20525	Reduced Power	2	1	49	22.0	20.62	-0.09	0.717	1.37	0.99
8	LTE 7	QPSK20M	Rear Face	0	21100	Reduced Power	1	1	99	15.0	14.47	0.04	0.995	1.13	1.12
	LTE 7	QPSK20M	Right Side	0	21100	Reduced Power	1	1	99	15.0	14.47	-0.14	0.483	1.13	0.55
	LTE 7	QPSK20M	Bottom Side	0	21100	Reduced Power	1	1	99	15.0	14.47	0.08	0.825	1.13	0.93
	LTE 7	QPSK20M	Rear Face	1.3	21100	Full Power	1	1	99	23.5	23.09	-0.01	0.679	1.10	0.75
	LTE 7	QPSK20M	Right Side	0.7	21100	Full Power	1	1	99	23.5	23.09	0.03	0.347	1.10	0.38
	LTE 7	QPSK20M	Bottom Side	1.2	21100	Full Power	1	1	99	23.5	23.09	0.08	0.500	1.10	0.55
	LTE 7	QPSK20M	Rear Face	0	20850	Reduced Power	1	1	99	15.0	13.84	-0.09	0.826	1.31	1.08
	LTE 7	QPSK20M	Rear Face	0	21350	Reduced Power	1	1	99	15.0	14.45	0	0.797	1.14	0.90
	LTE 7	QPSK20M	Bottom Side	0	20850	Reduced Power	1	1	99	15.0	13.84	-0.09	0.514	1.31	0.67
	LTE 7	QPSK20M	Bottom Side	0	21350	Reduced Power	1	1	99	15.0	14.45	-0.11	0.622	1.14	0.71
	LTE 7	QPSK20M	Rear Face	0	21100	Reduced Power	1	50	25	14.0	13.81	0.09	0.760	1.04	0.79
	LTE 7	QPSK20M	Right Side	0	21100	Reduced Power	1	50	25	14.0	13.81	-0.1	0.399	1.04	0.42
	LTE 7	QPSK20M	Bottom Side	0	21100	Reduced Power	1	50	25	14.0	13.81	0.07	0.514	1.04	0.54
	LTE 7	QPSK20M	Rear Face	1.3	21100	Full Power	1	50	25	23.0	22.51	0.06	0.630	1.12	0.71
	LTE 7	QPSK20M	Right Side	0.7	21100	Full Power	1	50	25	23.0	22.51	-0.01	0.287	1.12	0.32
	LTE 7	QPSK20M	Bottom Side	1.2	21100	Full Power	1	50	25	23.0	22.51	0	0.441	1.12	0.49
	LTE 7	QPSK20M	Rear Face	0	21100	Reduced Power	1	100	0	14.0	13.68	0.07	0.874	1.08	0.94
	LTE 7	QPSK20M	Bottom Side	0	21100	Reduced Power	1	100	0	14.0	13.68	-0.19	0.544	1.08	0.59
	LTE 7	QPSK20M	Rear Face	0	21100	Reduced Power	2	1	99	15.0	14.47	-0.1	0.979	1.13	1.11
	LTE 66	QPSK20M	Rear Face	0	132322	Reduced Power	1	1	0	16.5	15.53	0.01	0.944	1.25	1.18
	LTE 66	QPSK20M	Right Side	0	132322	Reduced Power	1	1	0	16.5	15.53	-0.18	0.271	1.25	0.34
	LTE 66	QPSK20M	Bottom Side	0	132322	Reduced Power	1	1	0	16.5	15.53	-0.08	0.615	1.25	0.77

FCC SAR Test Report

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Ch.	Power Reduction	Sample	RB	offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Tune-up Scaling Factor	Scaled SAR-1g (W/kg)
	LTE 66	QPSK20M	Rear Face	1.3	132322	Full Power	1	1	0	24.0	23.07	-0.05	0.348	1.24	0.43
	LTE 66	QPSK20M	Right Side	0.7	132322	Full Power	1	1	0	24.0	23.07	-0.08	0.220	1.24	0.27
	LTE 66	QPSK20M	Bottom Side	1.2	132322	Full Power	1	1	0	24.0	23.07	-0.18	0.128	1.24	0.16
	LTE 66	QPSK20M	Rear Face	0	132072	Reduced Power	1	1	0	16.5	14.79	0	0.540	1.48	0.80
9	LTE 66	QPSK20M	Rear Face	0	132572	Reduced Power	1	1	0	16.5	15.08	0.13	0.856	1.39	1.19
	LTE 66	QPSK20M	Rear Face	0	132322	Reduced Power	1	50	25	15.5	14.52	-0.09	0.625	1.25	0.78
	LTE 66	QPSK20M	Right Side	0	132322	Reduced Power	1	50	25	15.5	14.52	-0.07	0.159	1.25	0.20
	LTE 66	QPSK20M	Bottom Side	0	132322	Reduced Power	1	50	25	15.5	14.52	-0.12	0.444	1.25	0.56
	LTE 66	QPSK20M	Rear Face	1.3	132322	Full Power	1	50	25	23.0	22.56	-0.02	0.303	1.11	0.34
	LTE 66	QPSK20M	Right Side	0.7	132322	Full Power	1	50	25	23.0	22.56	0	0.182	1.11	0.20
	LTE 66	QPSK20M	Bottom Side	1.2	132322	Full Power	1	50	25	23.0	22.56	0.01	0.111	1.11	0.12
	LTE 66	QPSK20M	Rear Face	0	132322	Reduced Power	1	100	0	15.5	14.38	0.08	0.667	1.29	0.86
	LTE 66	QPSK20M	Rear Face	0	132572	Reduced Power	2	1	0	16.5	15.08	0.09	0.849	1.39	1.18

<WLAN / BT >

Plot No.	Band	Mode	Test Position	Separation Distance (cm)	Ch.	Power Reduction	Sample	Duty Cycle %	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Duty Cycle Scaling Factor	Tune-up Scaling Factor	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Rear Face	0	6	Reduced Power	1	99.04	17.0	16.44	0.11	0.907	1.01	1.14	1.04
	WLAN2.4G	802.11b	Left Side	0	6	Reduced Power	1	99.04	17.0	16.44	0.09	0.041	1.01	1.14	0.05
	WLAN2.4G	802.11b	Top Side	0	6	Reduced Power	1	99.04	17.0	16.44	-0.03	0.199	1.01	1.14	0.23
	WLAN2.4G	802.11b	Rear Face	1.3	6	Full Power	1	99.04	22.0	21.22	-0.12	0.223	1.01	1.20	0.27
	WLAN2.4G	802.11b	Left Side	0.7	6	Full Power	1	99.04	22.0	21.22	-0.07	0.145	1.01	1.20	0.18
	WLAN2.4G	802.11b	Top Side	1.5	6	Full Power	1	99.04	22.0	21.22	0.06	0.054	1.01	1.20	0.06
10	WLAN2.4G	802.11b	Rear Face	0	11	Reduced Power	1	99.04	16.0	14.53	0.03	0.798	1.01	1.40	1.13
	WLAN2.4G	802.11b	Rear Face	0	11	Reduced Power	2	99.04	16.0	14.53	0.09	0.777	1.01	1.40	1.10
	WLAN5G	802.11a	Rear Face	0	64	Reduced Power	1	95.14	9.0	8.59	0.04	0.770	1.05	1.10	0.89
	WLAN5G	802.11a	Left Side	0	64	Reduced Power	1	95.14	9.0	8.59	-0.09	0.025	1.05	1.10	0.03
	WLAN5G	802.11a	Top Side	0	64	Reduced Power	1	95.14	9.0	8.59	0.01	0.046	1.05	1.10	0.05
	WLAN5G	802.11a	Rear Face	1.3	64	Full Power	1	95.14	17.0	16.42	0.04	0.173	1.05	1.14	0.21
	WLAN5G	802.11a	Left Side	0.7	64	Full Power	1	95.14	17.0	16.42	0.01	0.063	1.05	1.14	0.08
	WLAN5G	802.11a	Top Side	1.5	64	Full Power	1	95.14	17.0	16.42	0.05	0.030	1.05	1.14	0.04
11	WLAN5G	802.11a	Rear Face	0	52	Reduced Power	1	95.14	9.0	8.15	-0.01	0.918	1.05	1.22	1.17
	WLAN5G	802.11a	Rear Face	0	52	Reduced Power	2	95.14	9.0	8.15	0.14	0.899	1.05	1.22	1.15
	WLAN5G	802.11a	Rear Face	0	140	Reduced Power	1	95.14	13.0	12.25	0.01	0.742	1.05	1.19	0.93
	WLAN5G	802.11a	Left Side	0	140	Reduced Power	1	95.14	13.0	12.25	-0.02	0.029	1.05	1.19	0.04
	WLAN5G	802.11a	Top Side	0	140	Reduced Power	1	95.14	13.0	12.25	0.06	0.068	1.05	1.19	0.09
	WLAN5G	802.11a	Rear Face	1.3	144	Full Power	1	95.14	18.5	17.92	0.18	0.097	1.05	1.14	0.12
	WLAN5G	802.11a	Left Side	0.7	144	Full Power	1	95.14	18.5	17.92	-0.05	0.044	1.05	1.14	0.05
	WLAN5G	802.11a	Top Side	1.5	144	Full Power	1	95.14	18.5	17.92	0.03	0.023	1.05	1.14	0.03
12	WLAN5G	802.11a	Rear Face	0	116	Reduced Power	1	95.14	13.0	12.16	-0.01	0.929	1.05	1.21	1.18
	WLAN5G	802.11a	Rear Face	0	116	Reduced Power	2	95.14	13.0	12.16	0.07	0.911	1.05	1.21	1.16
	WLAN5G	802.11a	Rear Face	0	149	Reduced Power	1	95.14	13.0	12.46	0.05	0.988	1.05	1.13	1.18
	WLAN5G	802.11a	Left Side	0	149	Reduced Power	1	95.14	13.0	12.46	-0.02	0.036	1.05	1.13	0.04
	WLAN5G	802.11a	Top Side	0	149	Reduced Power	1	95.14	13.0	12.46	0.05	0.100	1.05	1.13	0.12
	WLAN5G	802.11a	Rear Face	1.3	149	Full Power	1	95.14	16.5	15.72	0.07	0.074	1.05	1.20	0.09
	WLAN5G	802.11a	Left Side	0.7	149	Full Power	1	95.14	16.5	15.72	-0.05	0.036	1.05	1.20	0.05
	WLAN5G	802.11a	Top Side	1.5	149	Full Power	1	95.14	16.5	15.72	-0.09	0.023	1.05	1.20	0.03
13	WLAN5G	802.11a	Rear Face	0	157	Reduced Power	1	95.14	13.0	12.13	0.12	0.928	1.05	1.22	1.19
	WLAN5G	802.11a	Rear Face	0	157	Reduced Power	2	95.14	13.0	12.13	0	0.914	1.05	1.22	1.17
14	BT	GFSK	Rear Face	0	39	Full Power	1	77.6	10.5	9.71	0	0.221	1.29	1.20	0.34
	BT	GFSK	Top Side	0	39	Full Power	1	77.6	10.5	9.71	0.07	0.108	1.29	1.20	0.17
	BT	GFSK	Rear Face	0	39	Full Power	2	77.6	10.5	9.71	0.01	0.218	1.29	1.20	0.34

FCC SAR Test Report

4.6.3 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Band	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio	2nd Repeated SAR-1g (W/kg)	L/S Ratio	3rd Repeated SAR-1g (W/kg)	L/S Ratio
LTE 66	Rear Face	132322	0.944	0.937	1.01	N/A	N/A	N/A	N/A
WCDMA II	Rear Face	9400	1.01	0.997	1.01	N/A	N/A	N/A	N/A
LTE 7	Rear Face	21100	0.995	0.978	1.02	N/A	N/A	N/A	N/A
WLAN2.4G	Rear Face	6	0.907	0.889	1.02	N/A	N/A	N/A	N/A
WLAN5G	Rear Face	52	0.918	0.904	1.02	N/A	N/A	N/A	N/A
WLAN5G	Rear Face	116	0.929	0.910	1.02	N/A	N/A	N/A	N/A
WLAN5G	Rear Face	149	0.988	0.969	1.02	N/A	N/A	N/A	N/A

FCC SAR Test Report

4.6.4 Simultaneous Multi-band Transmission Evaluation

<SAR Summation Analysis>

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR_{1g} of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR_{1g} 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR_{1g} is greater than the SAR limit (SAR_{1g} 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

WWAN Band	Exposure Position	1	2	3	4	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN Ant 1 1g SAR (W/kg)	5GHz WLAN Ant 1 1g SAR (W/kg)	Bluetooth Ant 1 1g SAR (W/kg)		
GSM850	Rear Face at 0mm	1.171	1.130	1.192	0.342	2.643	2.705
	Left side at 0mm	0.056	0.047	0.043		0.103	0.099
	Right side at 0mm	0.722				0.722	0.722
	Top side at 0mm		0.229	0.119	0.167	0.396	0.286
	Bottom side at 0mm	0.544				0.544	0.544
	Rear Face at 13mm	0.606	0.269	0.208		0.875	0.814
	Left side at 7mm		0.175	0.076		0.175	0.076
	Right side at 7mm	0.332				0.332	0.332
	Top side at 15mm		0.065	0.036		0.065	0.036
	Bottom side at 12mm	0.419				0.419	0.419
GSM1900	Rear Face at 0mm	1.125	1.130	1.192	0.342	2.598	2.659
	Left side at 0mm	0.104	0.047	0.043		0.151	0.147
	Right side at 0mm	0.278				0.278	0.278
	Top side at 0mm		0.229	0.119	0.167	0.396	0.286
	Bottom side at 0mm	0.575				0.575	0.575
	Rear Face at 13mm	0.375	0.269	0.208		0.645	0.583
	Left side at 7mm		0.175	0.076		0.175	0.076
	Right side at 7mm	0.280				0.280	0.280
	Top side at 15mm		0.065	0.036		0.065	0.036
	Bottom side at 12mm	0.176				0.176	0.176
WCDMA II	Rear Face at 0mm	1.184	1.130	1.192	0.342	2.657	2.718
	Left side at 0mm		0.047	0.043		0.047	0.043
	Right side at 0mm	0.343				0.343	0.343
	Top side at 0mm		0.229	0.119	0.167	0.396	0.286
	Bottom side at 0mm	0.504				0.504	0.504
	Rear Face at 13mm	0.761	0.269	0.208		1.031	0.969
	Left side at 7mm		0.175	0.076		0.175	0.076
	Right side at 7mm	0.652				0.652	0.652

FCC SAR Test Report

WWAN Band	Exposure Position	1	2	3	4	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 1	5GHz WLAN Ant 1	Bluetooth Ant 1		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
	Top side at 15mm		0.065	0.036		0.065	0.036
	Bottom side at 12mm	0.315				0.315	0.315
WCDMA IV	Rear Face at 0mm	0.648	1.130	1.192	0.342	2.121	2.182
	Left side at 0mm		0.047	0.043		0.047	0.043
	Right side at 0mm	0.318				0.318	0.318
	Top side at 0mm		0.229	0.119	0.167	0.396	0.286
	Bottom side at 0mm	0.413				0.413	0.413
	Rear Face at 13mm	0.478	0.269	0.208		0.747	0.686
	Left side at 7mm		0.175	0.076		0.175	0.076
	Right side at 7mm	0.403				0.403	0.403
	Top side at 15mm		0.065	0.036		0.065	0.036
	Bottom side at 12mm	0.171				0.171	0.171
WCDMA V	Rear Face at 0mm	0.928	1.130	1.192	0.342	2.401	2.462
	Left side at 0mm		0.047	0.043		0.047	0.043
	Right side at 0mm	0.938				0.938	0.938
	Top side at 0mm		0.229	0.119	0.167	0.396	0.286
	Bottom side at 0mm	0.570				0.570	0.570
	Rear Face at 13mm	0.406	0.269	0.208		0.675	0.614
	Left side at 7mm		0.175	0.076		0.175	0.076
	Right side at 7mm	0.454				0.454	0.454
	Top side at 15mm		0.065	0.036		0.065	0.036
	Bottom side at 12mm	0.264				0.264	0.264
LTE 2	Rear Face at 0mm	1.155	1.130	1.192	0.342	2.627	2.689
	Left side at 0mm		0.047	0.043		0.047	0.043
	Right side at 0mm	0.357				0.357	0.357
	Top side at 0mm		0.229	0.119	0.167	0.396	0.286
	Bottom side at 0mm	0.568				0.568	0.568
	Rear Face at 13mm	0.623	0.269	0.208		0.893	0.831
	Left side at 7mm		0.175	0.076		0.175	0.076
	Right side at 7mm	0.487				0.487	0.487
	Top side at 15mm		0.065	0.036		0.065	0.036
	Bottom side at 12mm	0.289				0.289	0.289
LTE 5	Rear Face at 0mm	0.957	1.130	1.192	0.342	2.429	2.491
	Left side at 0mm		0.047	0.043		0.047	0.043
	Right side at 0mm	0.993				0.993	0.993
	Top side at 0mm		0.229	0.119	0.167	0.396	0.286

FCC SAR Test Report

WWAN Band	Exposure Position	1	2	3	4	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 1	5GHz WLAN Ant 1	Bluetooth Ant 1		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
	Bottom side at 0mm	0.604				0.604	0.604
	Rear Face at 13mm	0.306	0.269	0.208		0.575	0.514
	Left side at 7mm		0.175	0.076		0.175	0.076
	Right side at 7mm	0.247				0.247	0.247
	Top side at 15mm		0.065	0.036		0.065	0.036
	Bottom side at 12mm	0.281				0.281	0.281
LTE 7	Rear Face at 0mm	1.124	1.130	1.192	0.342	2.597	2.658
	Left side at 0mm		0.047	0.043		0.047	0.043
	Right side at 0mm	0.546				0.546	0.546
	Top side at 0mm		0.229	0.119	0.167	0.396	0.286
	Bottom side at 0mm	0.932				0.932	0.932
	Rear Face at 13mm	0.746	0.269	0.208		1.016	0.954
	Left side at 7mm		0.175	0.076		0.175	0.076
	Right side at 7mm	0.381				0.381	0.381
	Top side at 15mm		0.065	0.036		0.065	0.036
	Bottom side at 12mm	0.550				0.550	0.550
LTE 66 / 4	Rear Face at 0mm	1.187	1.130	1.192	0.342	2.660	2.721
	Left side at 0mm		0.047	0.043		0.047	0.043
	Right side at 0mm	0.339				0.339	0.339
	Top side at 0mm		0.229	0.119	0.167	0.396	0.286
	Bottom side at 0mm	0.769				0.769	0.769
	Rear Face at 13mm	0.431	0.269	0.208		0.701	0.639
	Left side at 7mm		0.175	0.076		0.175	0.076
	Right side at 7mm	0.273				0.273	0.273
	Top side at 15mm		0.065	0.036		0.065	0.036
	Bottom side at 12mm	0.159				0.159	0.159

Note: Summed 1+2+4 covers Summed 1+2 / 1+4 / 2+4, Summed 1+3+4 covers Summed 1+3 / 1+4 / 3+4.

FCC SAR Test Report

<SAR to Peak Location Separation Ratio Analysis>

The simultaneous transmitting antennas in each operating mode and exposure condition combination are considered one pair at a time to determine the SPLSR. When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following formula.

$$\text{Peak Location Separation Distance} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

Where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the area or zoom scans.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location will be translated onto the test device to determine the peak location separation for the antenna pair.


The SPLSR is determined by the following formula.

$$\text{SPLSR} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{R_i}$$

Where SAR_1 and SAR_2 are the highest reported or estimated SAR for each antenna in the pair, and R_i is the separation distance between the peak SAR locations for the antenna pair in mm.


When the SPLSR is ≤ 0.04 , the simultaneous transmission SAR is not required. Otherwise, the enlarged zoom scan and volume scan post-processing procedures will be performed.

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
GSM850	Rear Face	1.17	0	-0.0525	-0.079	-0.181	203.2	2.64	0.02	Not required
WLAN2.4G+BT		1.47	0	0.0528	0.0948	-0.18				

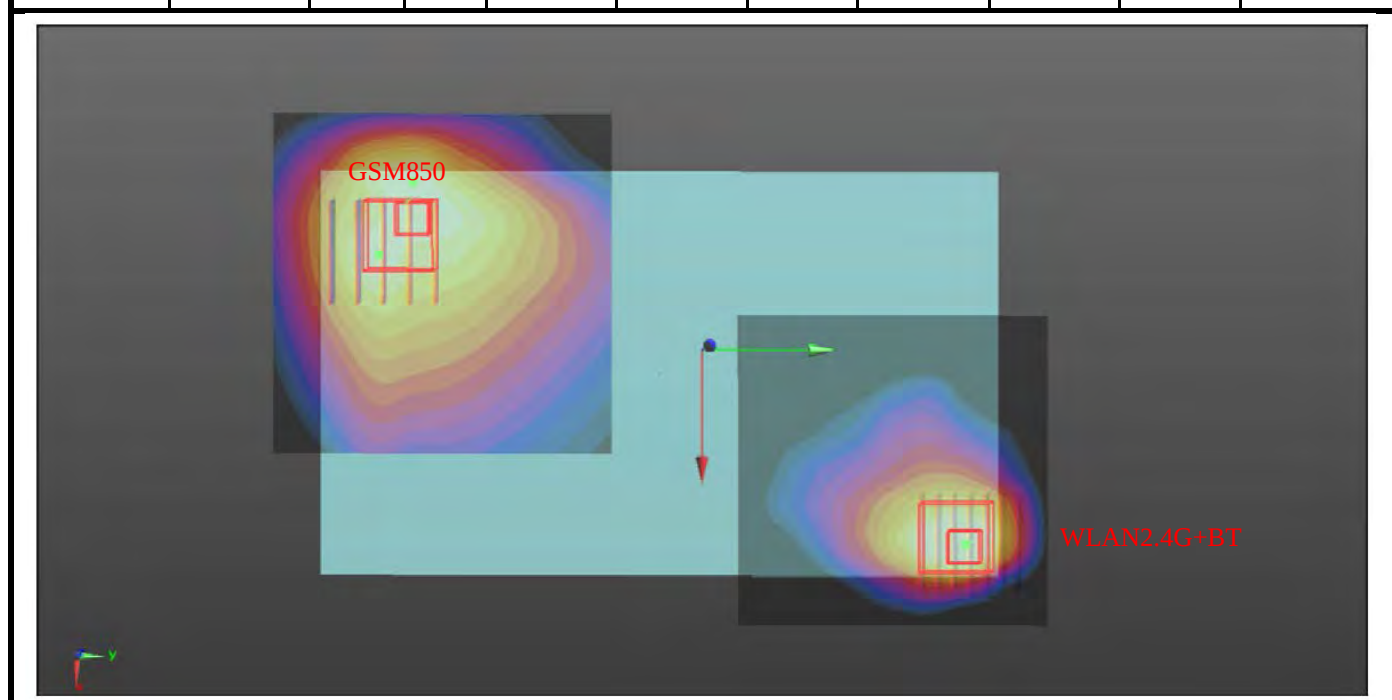


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
GSM850	Rear Face	1.17	0	-0.0525	-0.079	-0.181	207.9	2.70	0.02	Not required
WLAN5G+BT		1.53	0	0.0516	0.101	-0.181				

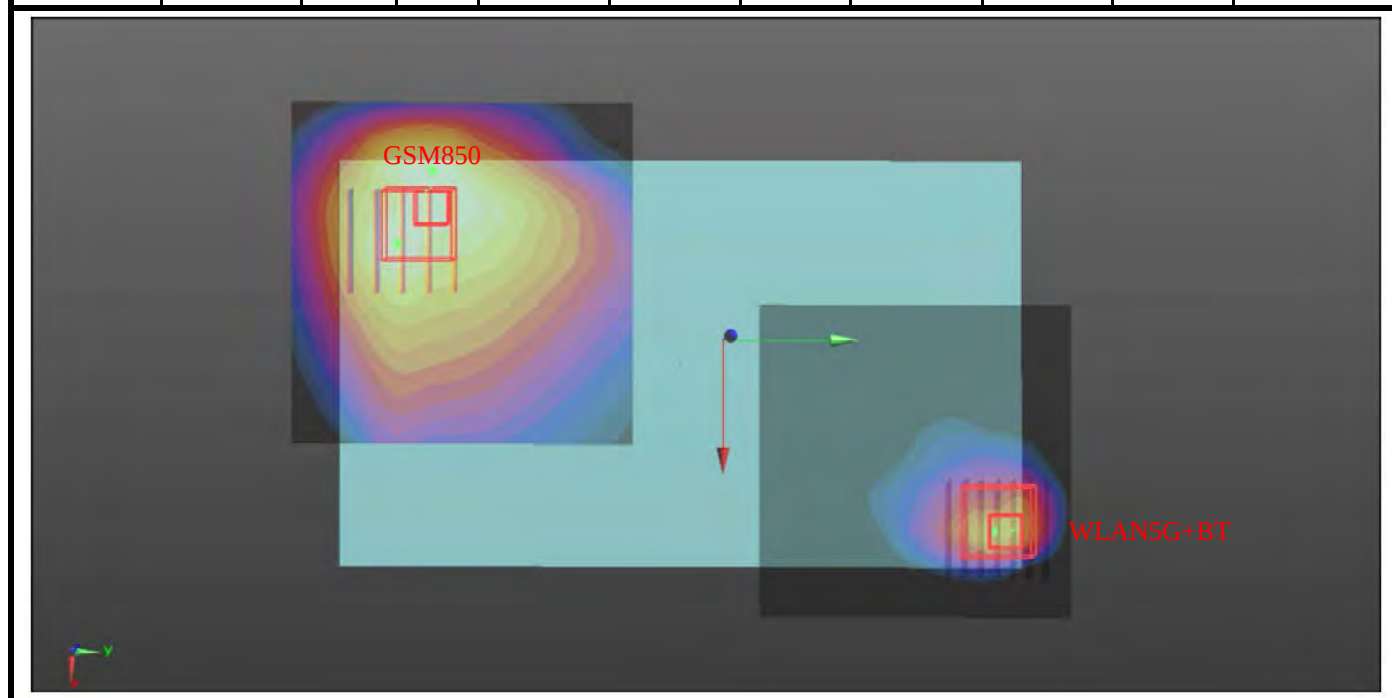


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
GSM1900	Rear Face	1.13	0	-0.047	-0.0825	-0.181	203.5	2.60	0.02	Not required
WLAN2.4G+BT		1.47	0	0.0528	0.0948	-0.18				

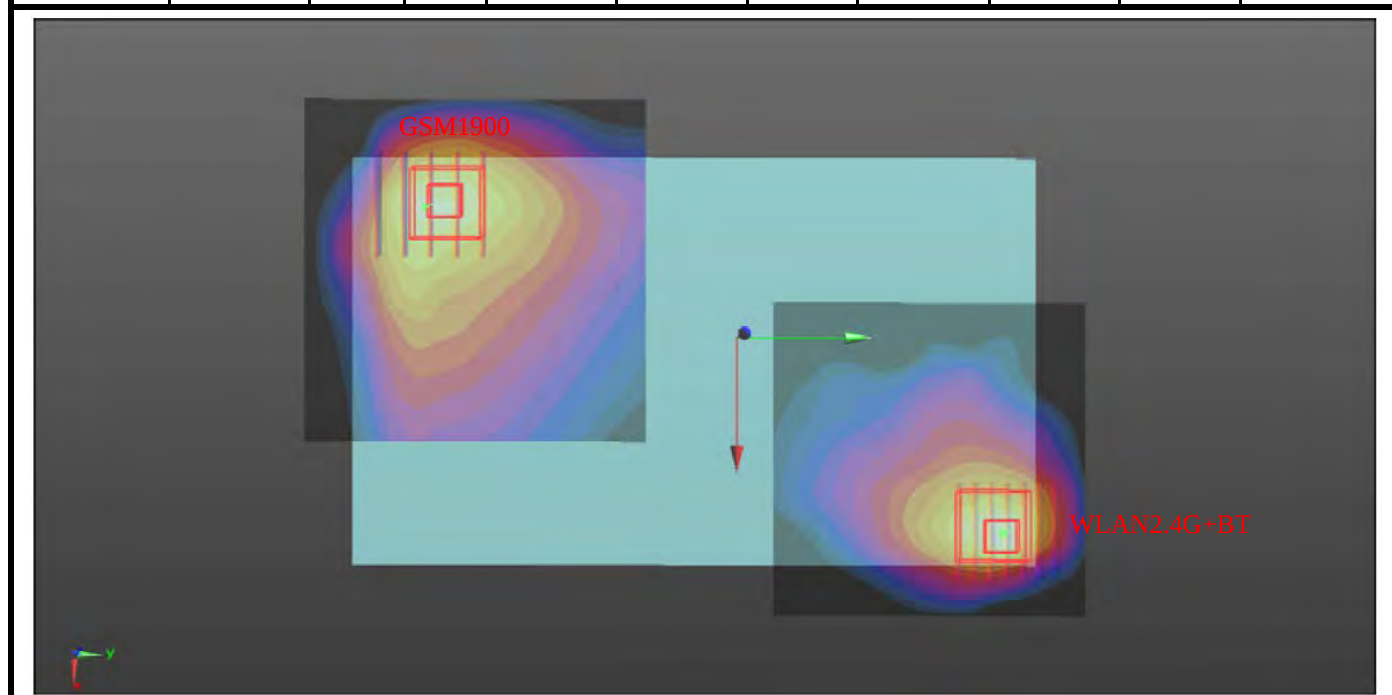


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
GSM1900	Rear Face	1.13	0	-0.047	-0.0825	-0.181	208.3	2.66	0.02	Not required
WLAN5G+BT		1.53	0	0.0516	0.101	-0.181				

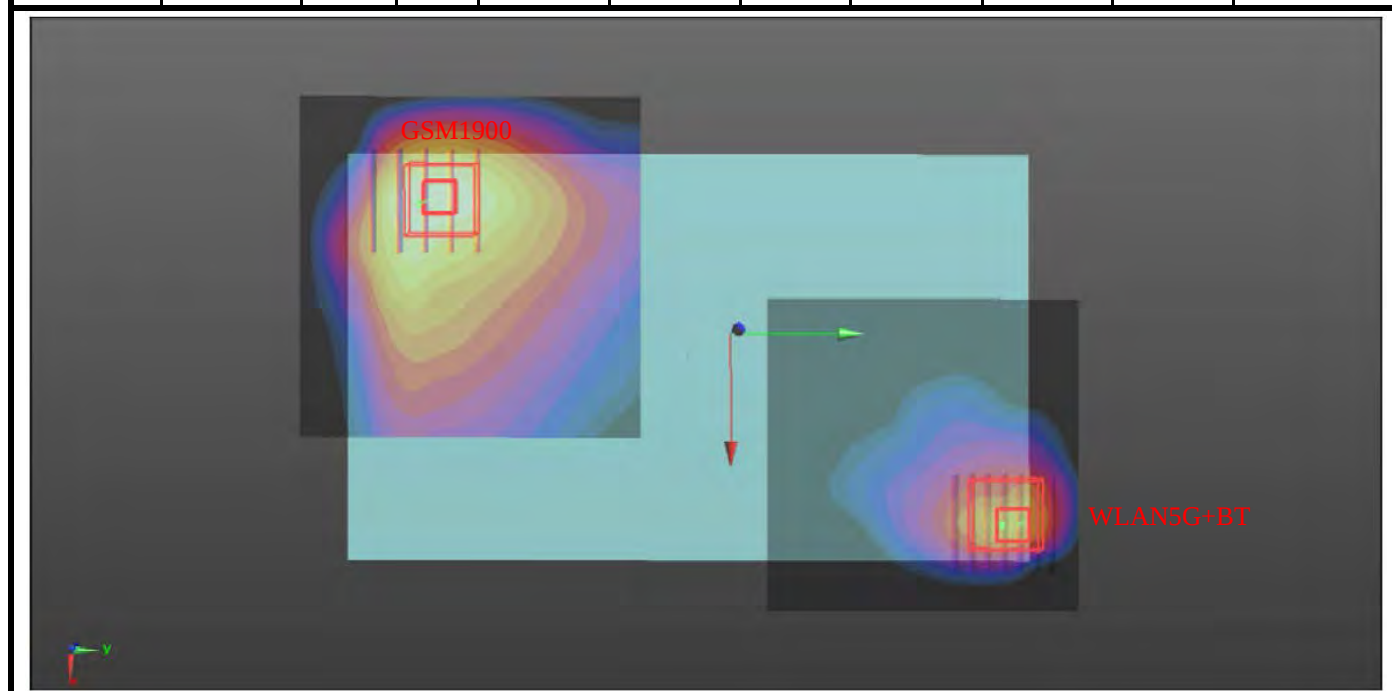


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
WCDMA II	Rear Face	1.18	0	-0.0465	-0.087	-0.18	207.2	2.65	0.02	Not required
WLAN2.4G+BT		1.47	0	0.0528	0.0948	-0.18				

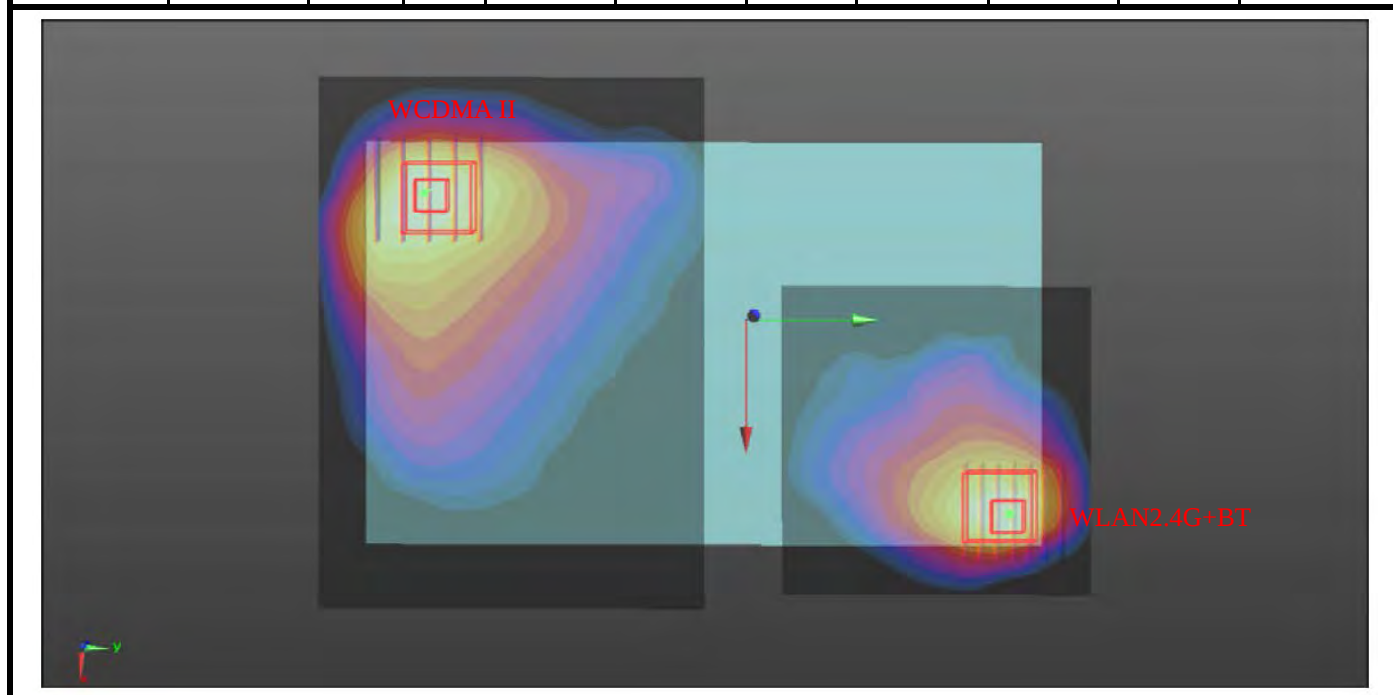


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
WCDMA II	Rear Face	1.18	0	-0.0465	-0.087	-0.18	212.1	2.71	0.02	Not required
WLAN5G+BT		1.53	0	0.0516	0.101	-0.181				

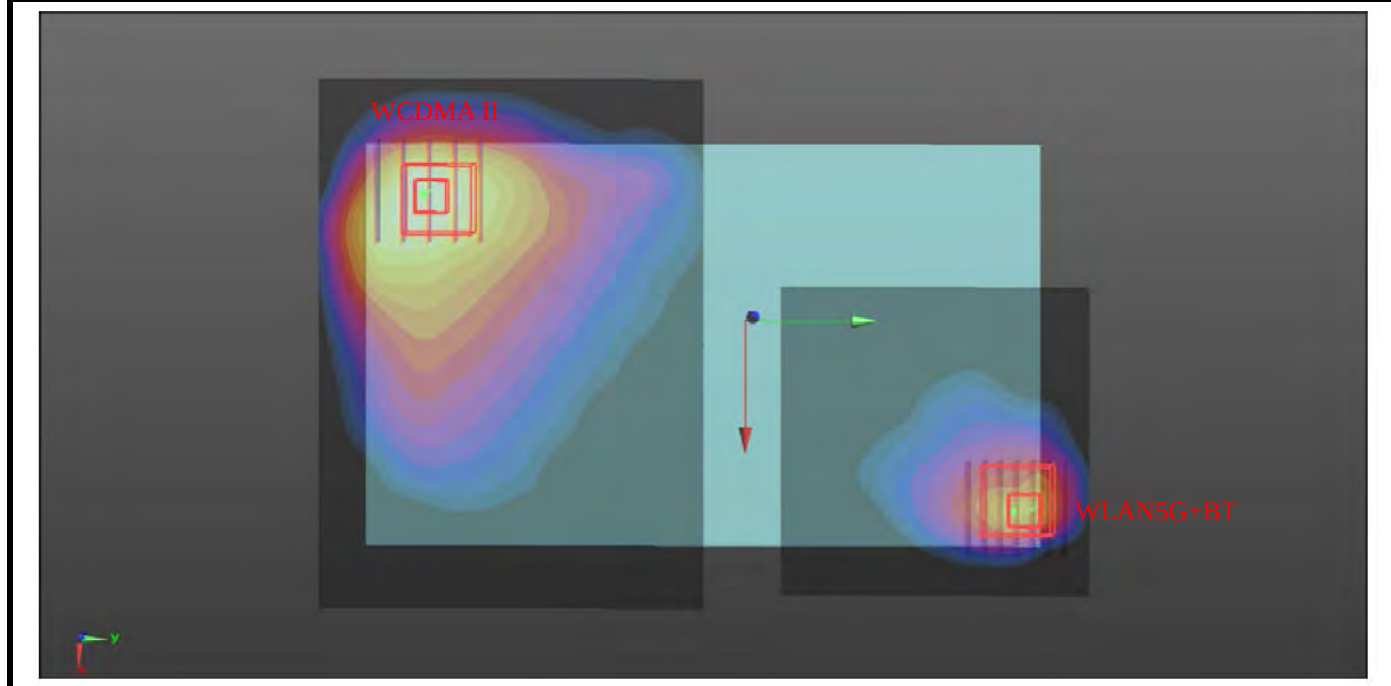


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
WCDMA IV	Rear Face	0.648	0	-0.0455	-0.0825	-0.181	202.7	2.12	0.02	Not required
WLAN2.4G+BT		1.47	0	0.0528	0.0948	-0.18				

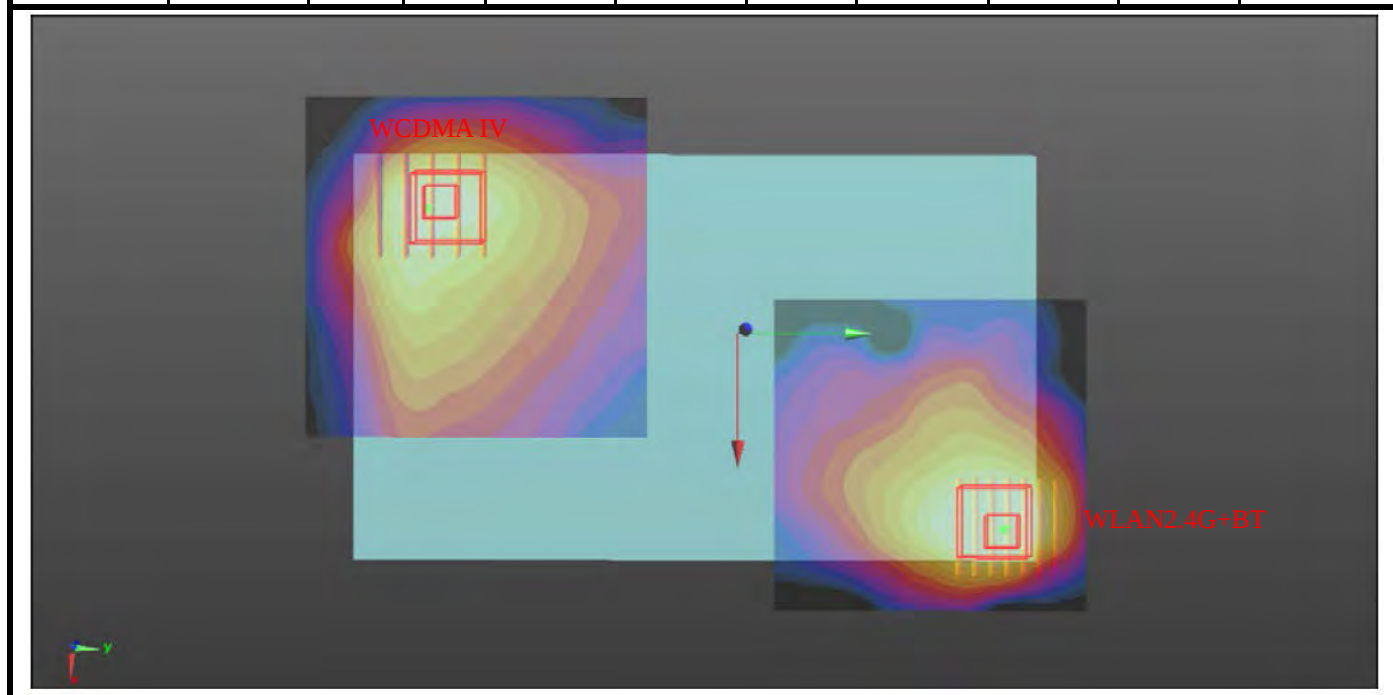


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
WCDMA IV	Rear Face	0.648	0	-0.0455	-0.0825	-0.181	207.6	2.18	0.02	Not required
WLAN5G+BT		1.53	0	0.0516	0.101	-0.181				

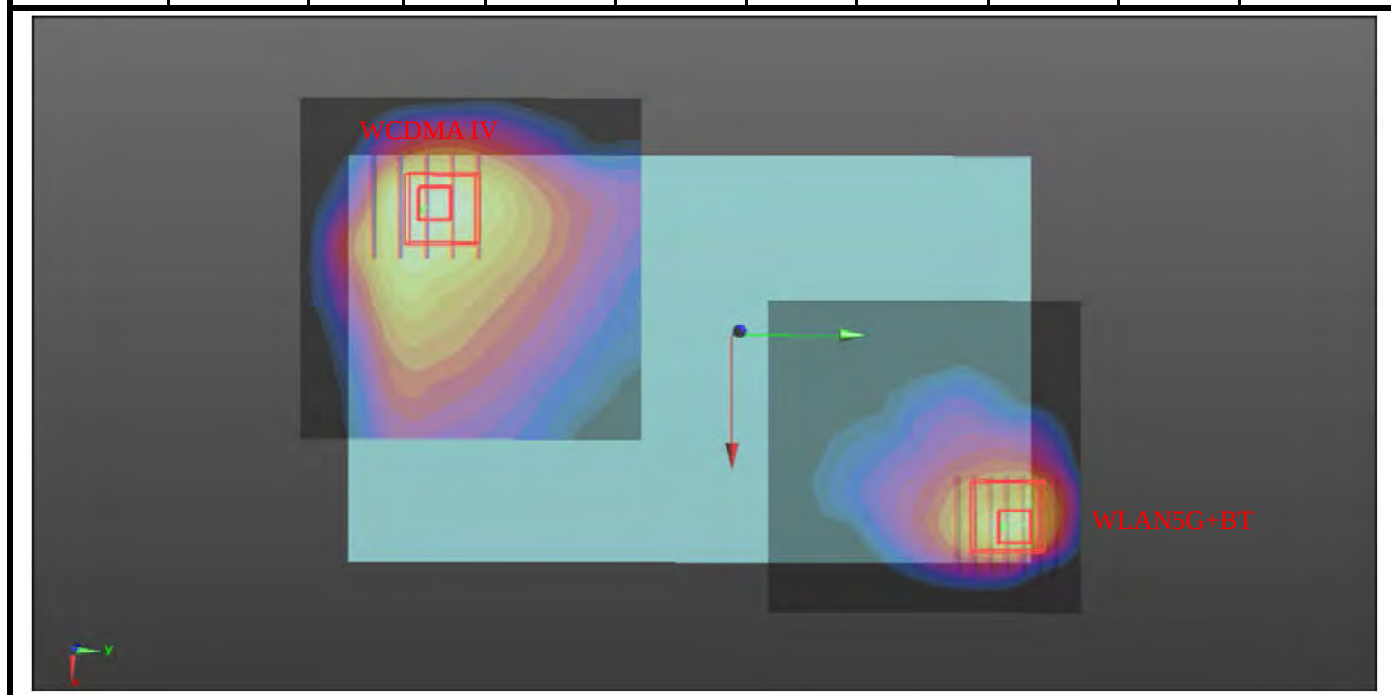


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
WCDMA V	Rear Face	0.928	0	-0.0525	-0.079	-0.181	203.2	2.40	0.02	Not required
WLAN2.4G+BT		1.47	0	0.0528	0.0948	-0.18				

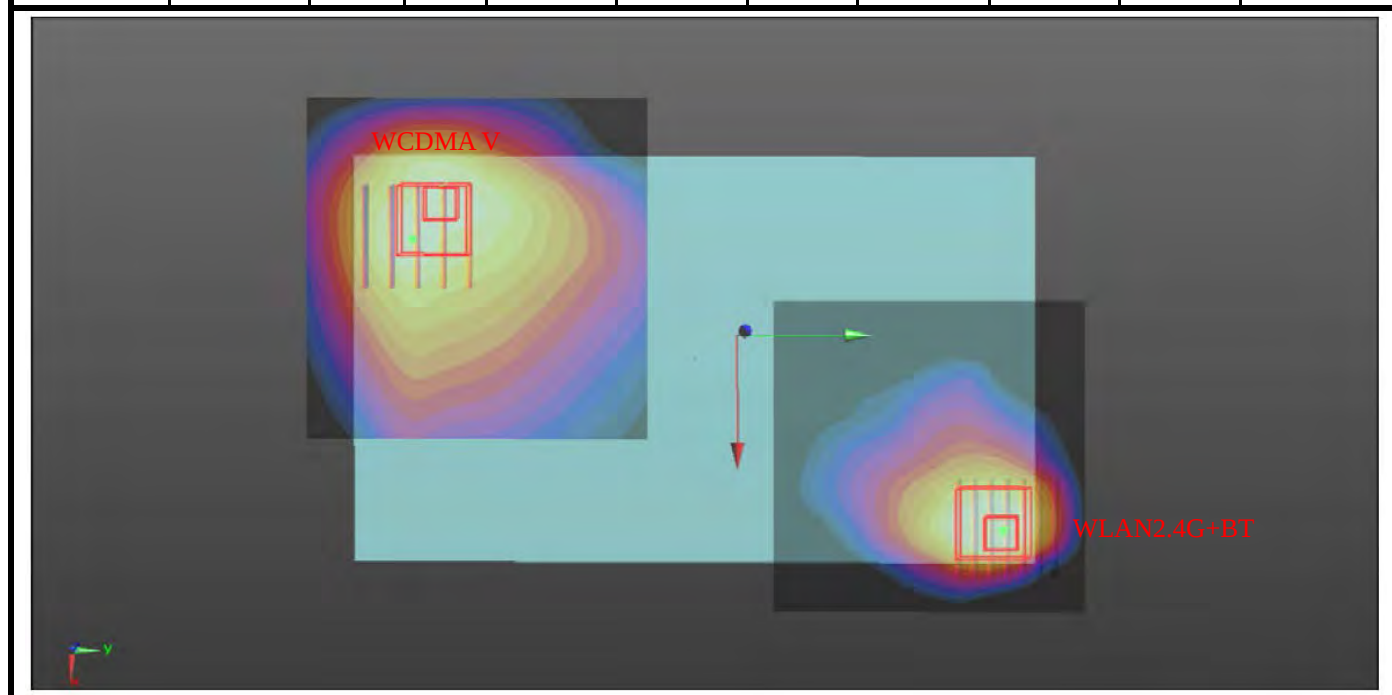


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
WCDMA V	Rear Face	0.928	0	-0.0525	-0.079	-0.181	207.9	2.46	0.02	Not required
WLAN5G+BT		1.53	0	0.0516	0.101	-0.181				

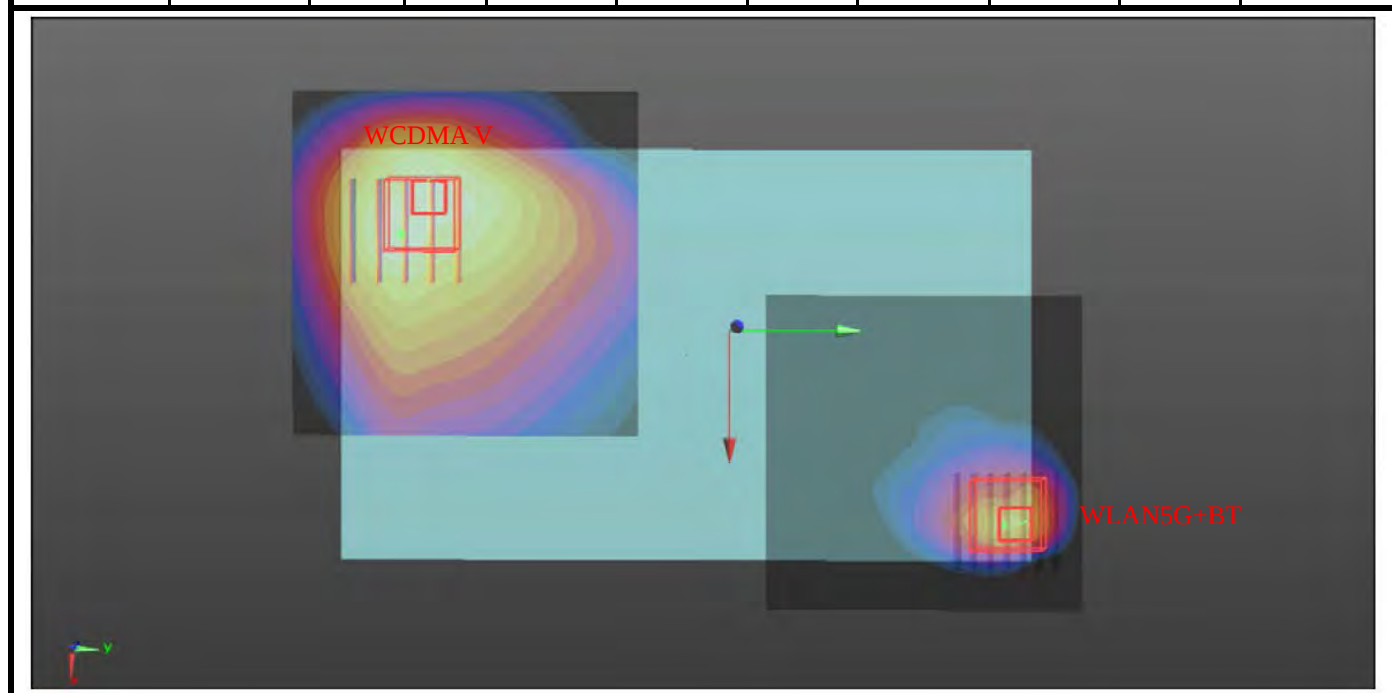


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
LTE 2	Rear Face	1.16	0	-0.047	-0.0855	-0.181	206.1	2.63	0.02	Not required
WLAN2.4G+BT		1.47	0	0.0528	0.0948	-0.18				

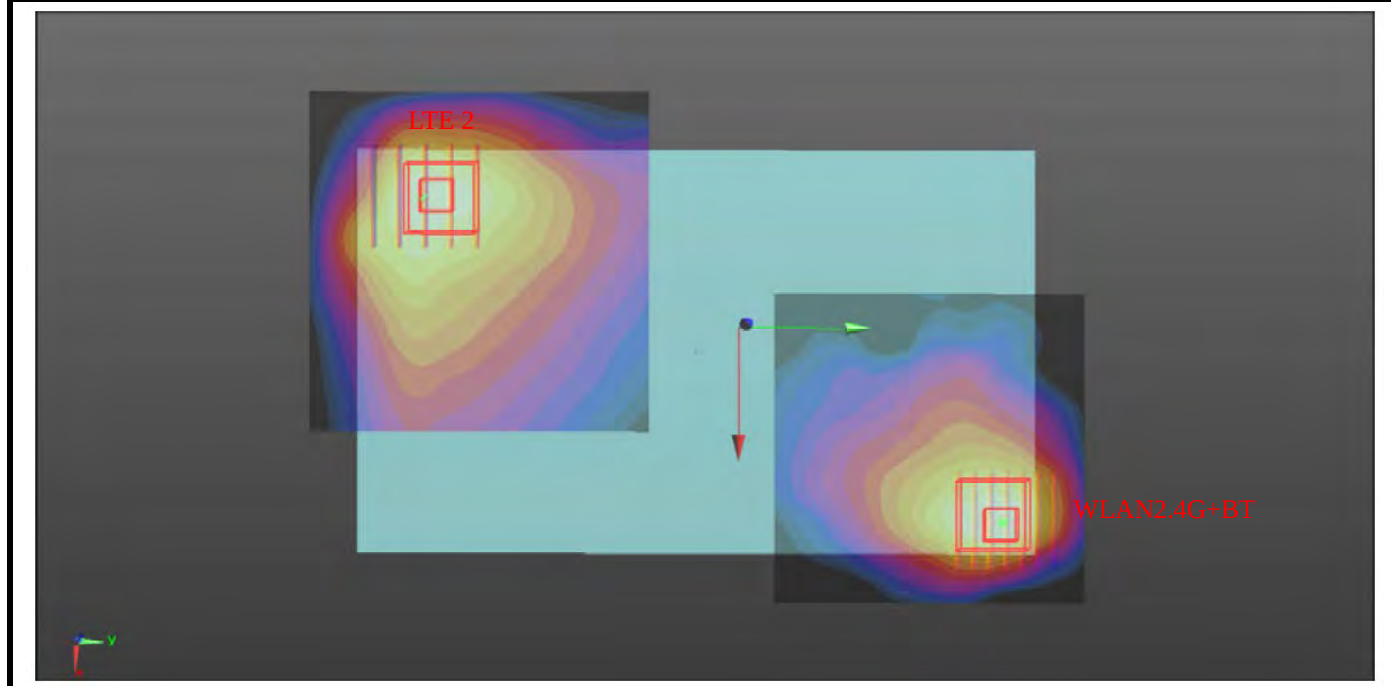


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
LTE 2	Rear Face	1.16	0	-0.047	-0.0855	-0.181	211.0	2.69	0.02	Not required
WLAN5G+BT		1.53	0	0.0516	0.101	-0.181				

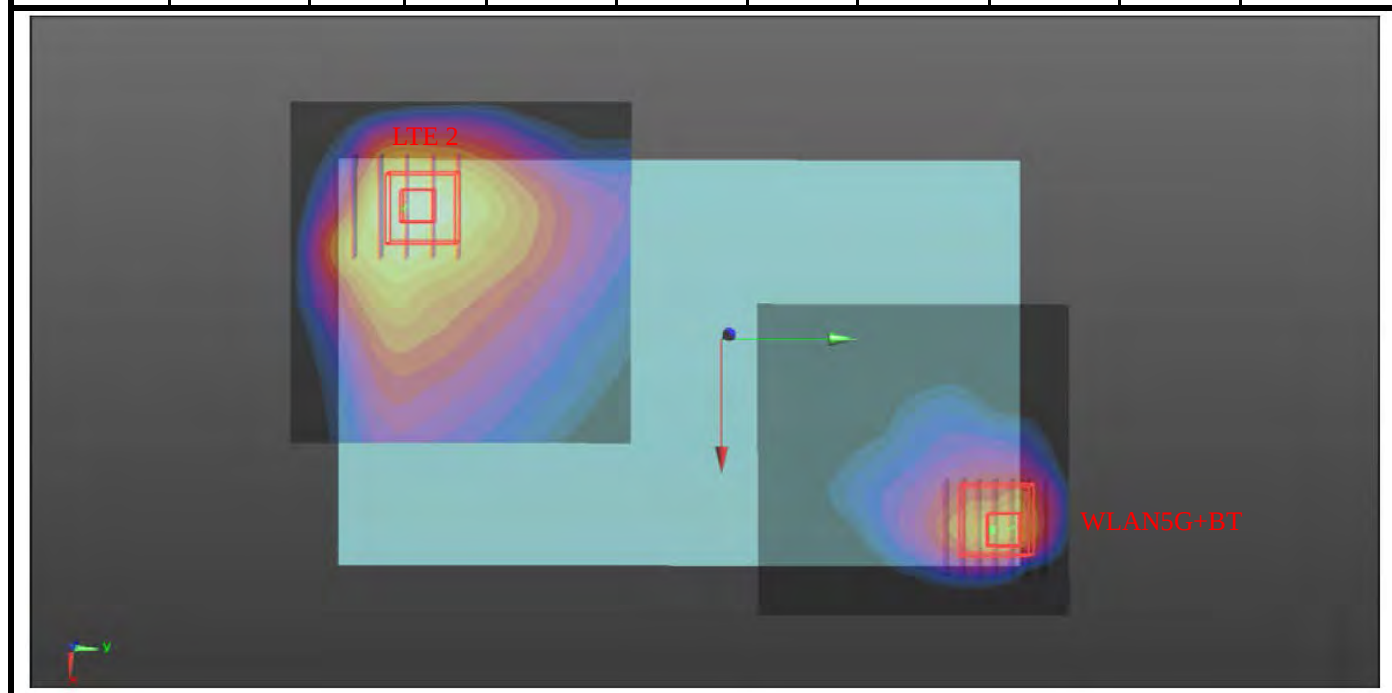


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
LTE 5	Rear Face	0.957	0	-0.0575	-0.0845	-0.18	210.5	2.43	0.02	Not required
WLAN2.4G+BT		1.47	0	0.0528	0.0948	-0.18				

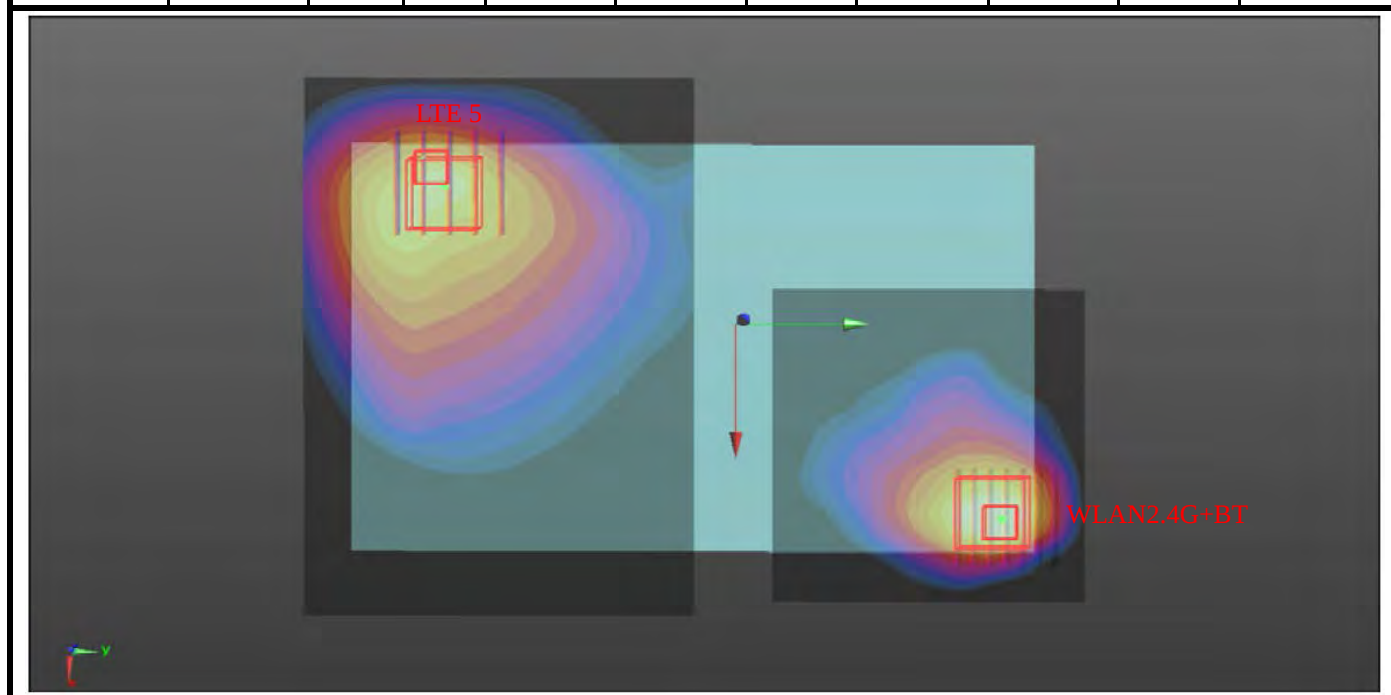


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
LTE 5	Rear Face	0.957	0	-0.0575	-0.0845	-0.18	215.2	2.49	0.02	Not required
WLAN5G+BT		1.53	0	0.0516	0.101	-0.181				

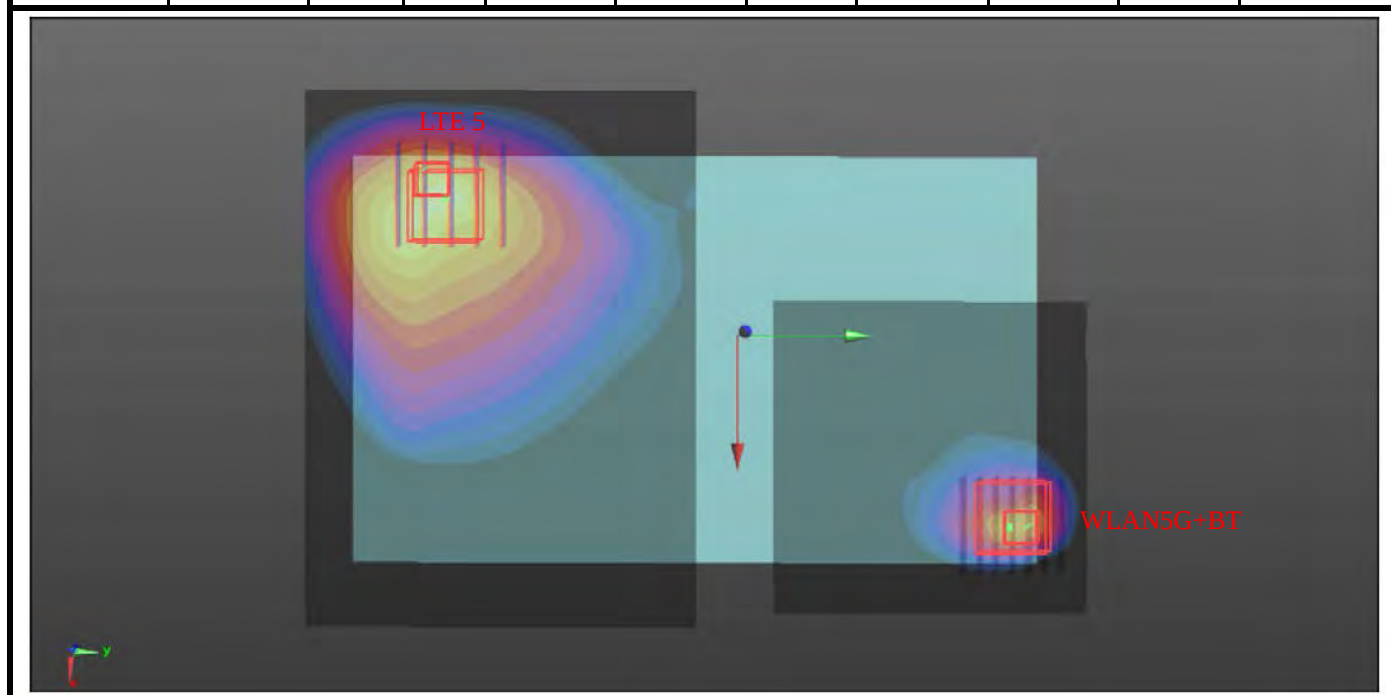


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
LTE 7	Rear Face	1.12	0	-0.0542	-0.09	-0.181	213.5	2.59	0.02	Not required
WLAN2.4G+BT		1.47	0	0.0528	0.0948	-0.18				

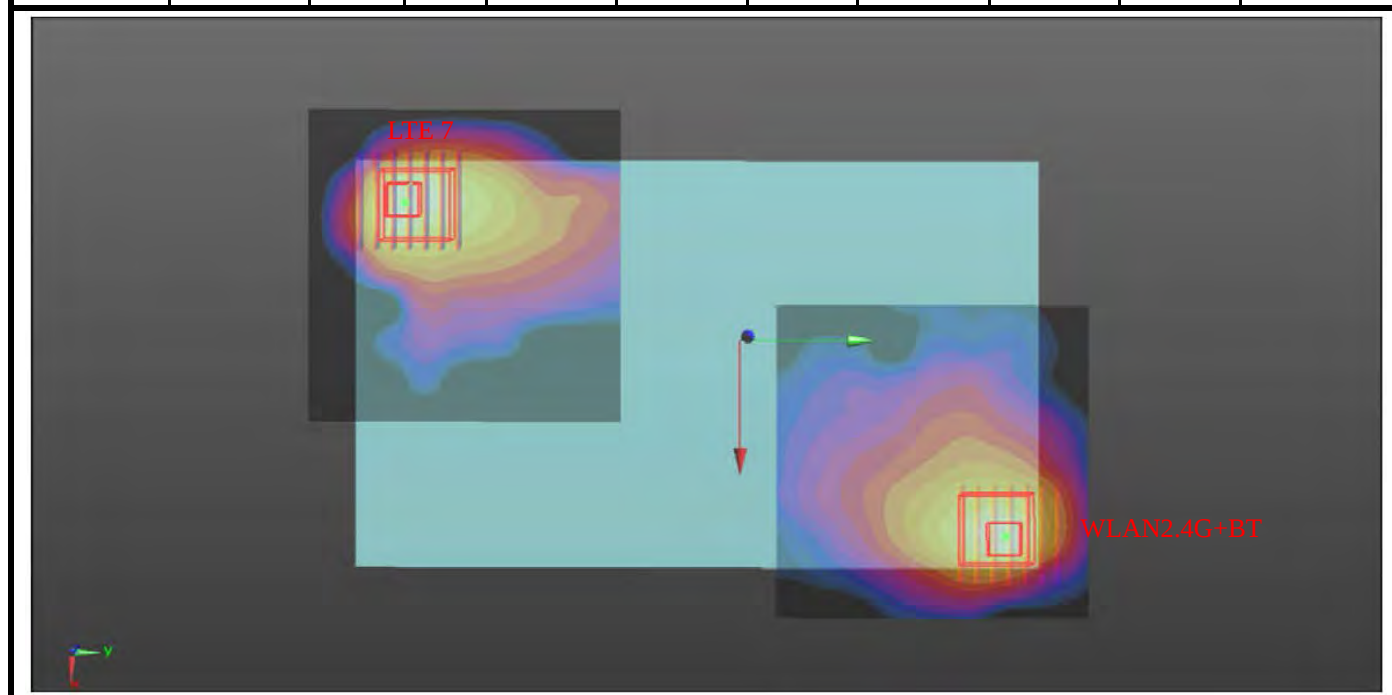


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
LTE 7	Rear Face	1.12	0	-0.0542	-0.09	-0.181	218.3	2.65	0.02	Not required
WLAN5G+BT		1.53	0	0.0516	0.101	-0.181				

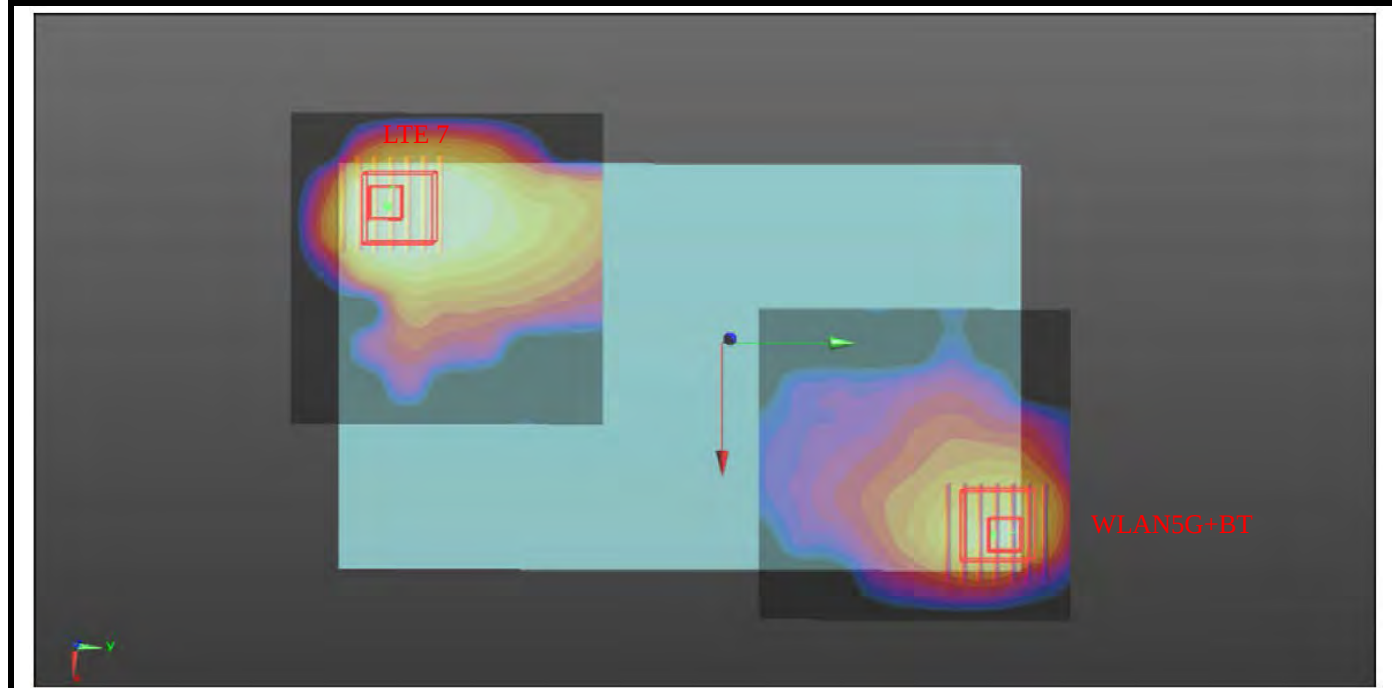


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
LTE 66	Rear Face	1.19	0	-0.048	-0.084	-0.18	205.3	2.66	0.02	Not required
WLAN2.4G+BT		1.47	0	0.0528	0.0948	-0.18				

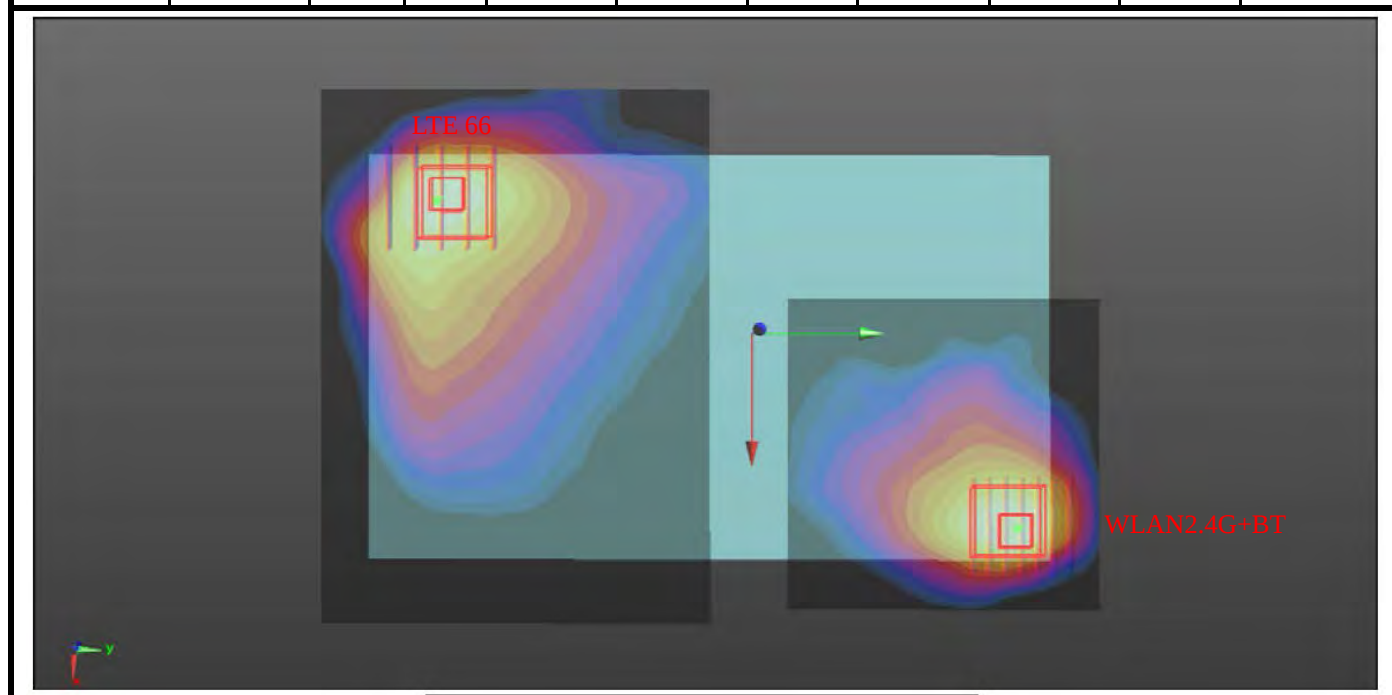

FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
			(mm)	X	Y	Z				
LTE 66	Rear Face	1.19	0	-0.048	-0.084	-0.18	210.1	2.72	0.02	Not required
WLAN5G+BT		1.53	0	0.0516	0.101	-0.181				

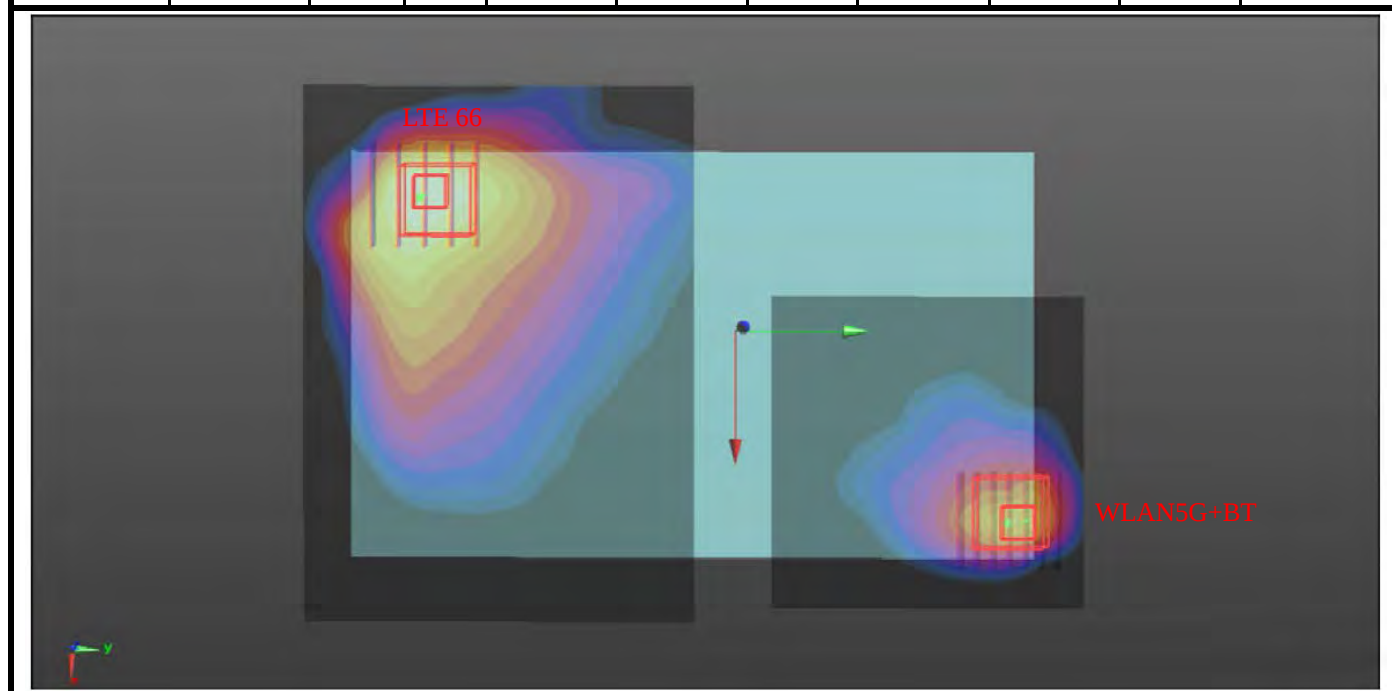

Test Engineer : Dennis Ye, and Rikou Lu

5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	D835V2	4d139	Sep. 17, 2021	1 Year
System Validation Dipole	SPEAG	D1750V2	1071	Sep. 18, 2021	1 Year
System Validation Dipole	SPEAG	D1900V2	5d159	Sep. 16, 2021	1 Year
System Validation Dipole	SPEAG	D2450V2	893	Sep. 18, 2021	1 Year
System Validation Dipole	SPEAG	D2600V2	1110	Sep. 16, 2021	1 Year
System Validation Dipole	SPEAG	D5GHzV2	1133	Sep. 14, 2021	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1389	Oct. 26, 2021	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	3873	Aug. 25, 2021	1 Year
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 15, 2022	1 Year
Wireless Communication Test Set	Agilent	E5515C	MY50260600	May. 12, 2022	1 Year
ENA Series Network Analyzer	Agilent	E5071C	MY46214638	May. 07, 2022	1 Year
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510355	May. 14, 2022	1 Year
MXG Analog Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 18, 2022	1 Year
Power Meter	Agilent	N1914A	MY52180044	Feb. 19, 2022	1 Year
Power Sensor	Agilent	E9304A H18	MY52050011	Feb. 20, 2022	1 Year
Power Meter	ANRITSU	ML2495A	1506002	Feb. 22, 2022	1 Year
Power Sensor	ANRITSU	MA2411B	1339353	May. 14, 2022	1 Year
Temp. & Humi. Recorder	HUATO	A2000TH	HE20107684	May. 11, 2022	1 Year
Electronic Thermometer	YONGFA	YF-160A	120100323	May. 14, 2022	1 Year
Coupler	Woken	0110A056020-10	COM27RW1A3	May. 11, 2022	1 Year

FCC SAR Test Report

6. Measurement Uncertainty

DASY5 Uncertainty Budget								
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)	(Vi) Veff
Measurement System								
Probe Calibration	6.0	N	1	1	1	6.0	6.0	∞
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9	∞
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6	∞
Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6	∞
Modulation Response	3.2	R	1.732	1	1	1.8	1.8	∞
Readout Electronics	0.3	N	1	1	1	0.3	0.3	∞
Response Time	0.0	R	1.732	1	1	0.0	0.0	∞
Integration Time	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2	∞
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7	∞
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2	∞
Test Sample Related								
Device Positioning	3.0	N	1	1	1	3.0	3.0	35
Device Holder	3.6	N	1	1	1	3.6	3.6	12
Power Drift	5.0	R	1.732	1	1	2.9	2.9	∞
Power Scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5	∞
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0	∞
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1	5
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0	∞
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0	∞
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0	5
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8	∞
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4	∞
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1	∞
Combined Std. Uncertainty						11.4%	11.4%	1013
Coverage Factor for 95 %						K=2	K=2	
Expanded STD Uncertainty						22.9%	22.7%	

Uncertainty budget for frequency range 30 MHz to 3 GHz

FCC SAR Test Report

DASY5 Uncertainty Budget								
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)	(Vi) Veff
Measurement System								
Probe Calibration	6.55	N	1	1	1	6.5	6.5	∞
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9	∞
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2	∞
Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6	∞
Modulation Response	3.2	R	1.732	1	1	1.8	1.8	∞
Readout Electronics	0.3	N	1	1	1	0.3	0.3	∞
Response Time	0.0	R	1.732	1	1	0.0	0.0	∞
Integration Time	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2	∞
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9	∞
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	3.0	N	1	1	1	3.0	3.0	35
Device Holder	3.6	N	1	1	1	3.6	3.6	12
Power Drift	5.0	R	1.732	1	1	2.9	2.9	∞
Power Scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8	∞
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0	∞
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1	5
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0	∞
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0	∞
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0	5
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8	∞
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4	∞
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1	∞
Combined Std. Uncertainty						12.5%	12.5%	1458
Coverage Factor for 95 %						K=2	K=2	
Expanded STD Uncertainty						25.0%	24.9%	

Uncertainty budget for frequency range 3 GHz to 6 GHz

7. Information on the Testing Laboratories

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Add: No. B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industry Park, Nanshan District, Shenzhen, Guangdong, China

Tel: 86-755-8869-6566

Fax: 86-755-8869-6577

Email: customerservice.sw@cn.bureauveritas.com

Web Site: www.bureauveritas.com

The road map of all our labs can be found in our web site also.

---END---

Appendix A. SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

System Check_HSL835_20220527

DUT: Dipole:835 MHz;Type:D835V2

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium: HSL835_0527 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 42.918$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.3°C ; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.36, 9.36, 9.36); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 3.25 W/kg



Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.791 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.68 W/kg

SAR(1 g) = 2.47 W/kg ; SAR(10 g) = 1.62 W/kg

Maximum value of SAR (measured) = 3.29 W/kg

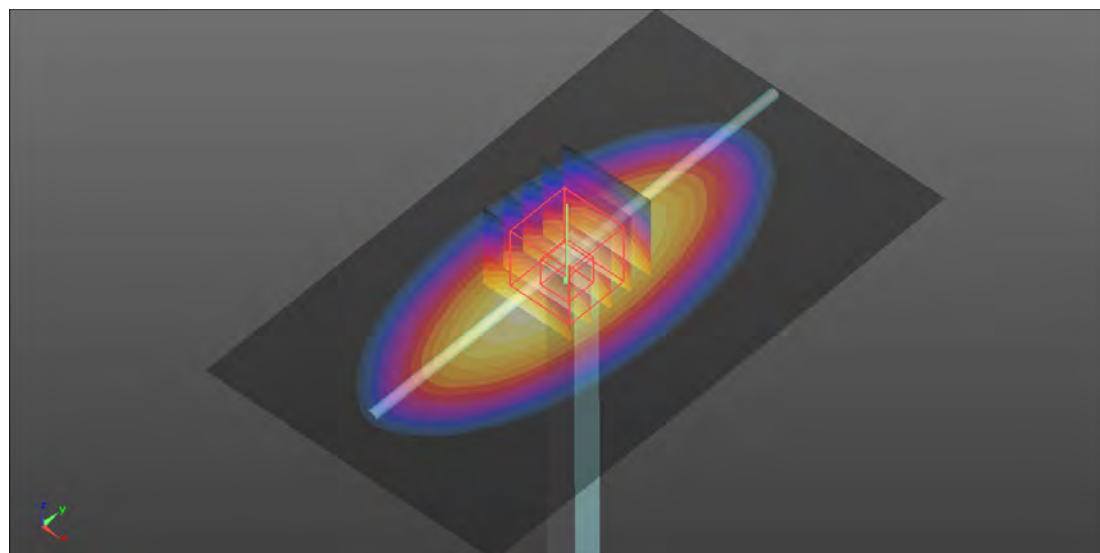

0 dB = 3.29 W/kg

System Check_HSL1750_20220528

DUT: Dipole:1750 MHz;Type:D1750V2

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL1750_0528 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 38.765$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.19, 8.19, 8.19); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.3 W/kg



Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 102.9 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 8.6 W/kg; SAR(10 g) = 4.55 W/kg

Maximum value of SAR (measured) = 13.4 W/kg

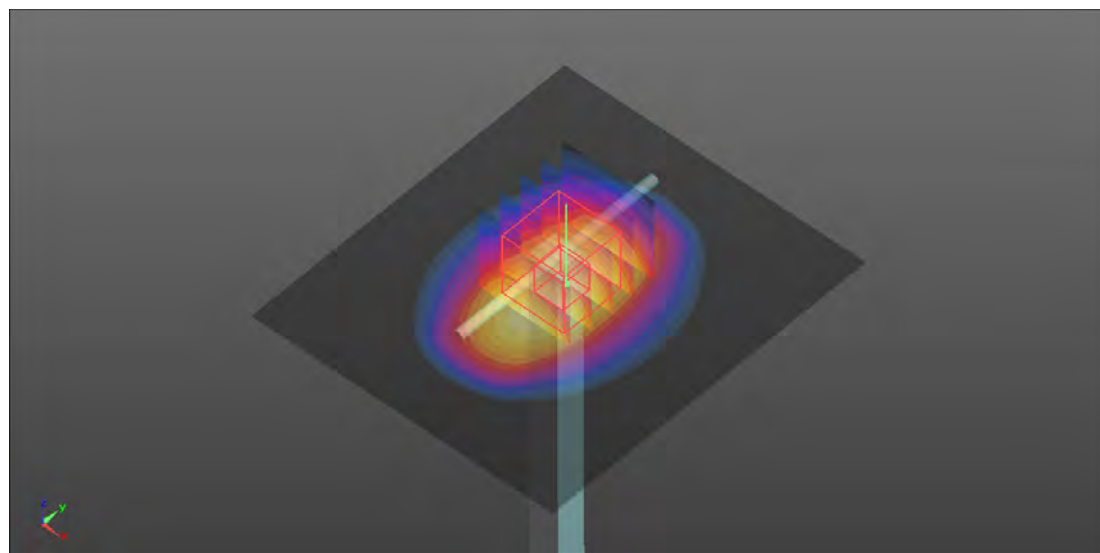

0 dB = 13.4 W/kg

System Check_HSL1900_20220529**DUT: Dipole:1900MHz;Type:D1900V2**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900_0529 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 40.484$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8, 8, 8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 16.1 W/kg



Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 101.7 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 19.3 W/kg

SAR(1 g) = 10.6 W/kg; SAR(10 g) = 5.52 W/kg

Maximum value of SAR (measured) = 16.3 W/kg

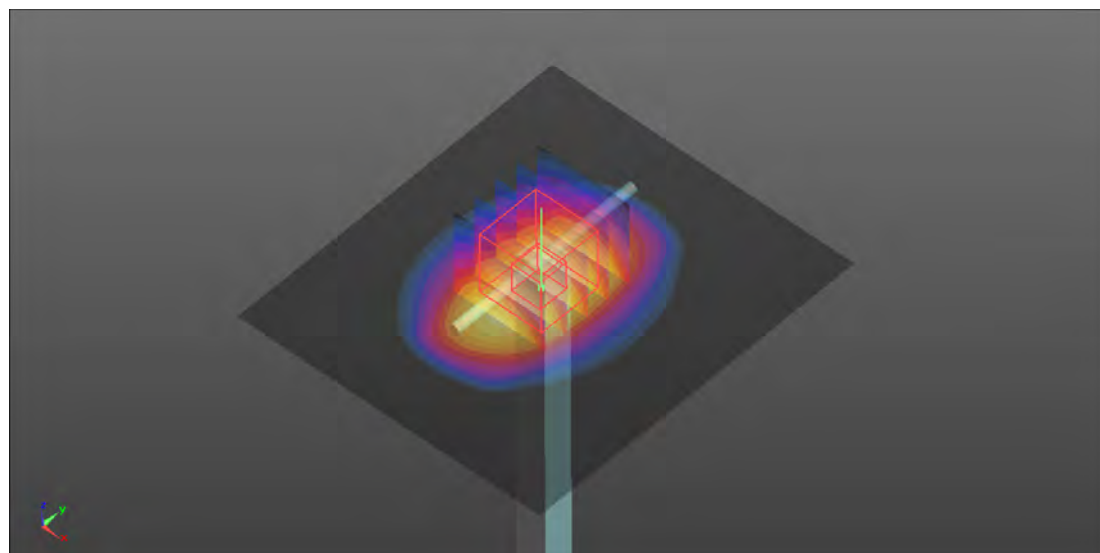

0 dB = 16.3 W/kg

System Check_HSL2450_20220530**DUT: Dipole:2450 MHz;Type:D2450V2**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL2450_0530 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.845$ S/m; $\epsilon_r = 39.401$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.88, 7.88, 7.88); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 24.2 W/kg



Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 112.5 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 14.4 W/kg; SAR(10 g) = 6.61 W/kg

Maximum value of SAR (measured) = 24.2 W/kg

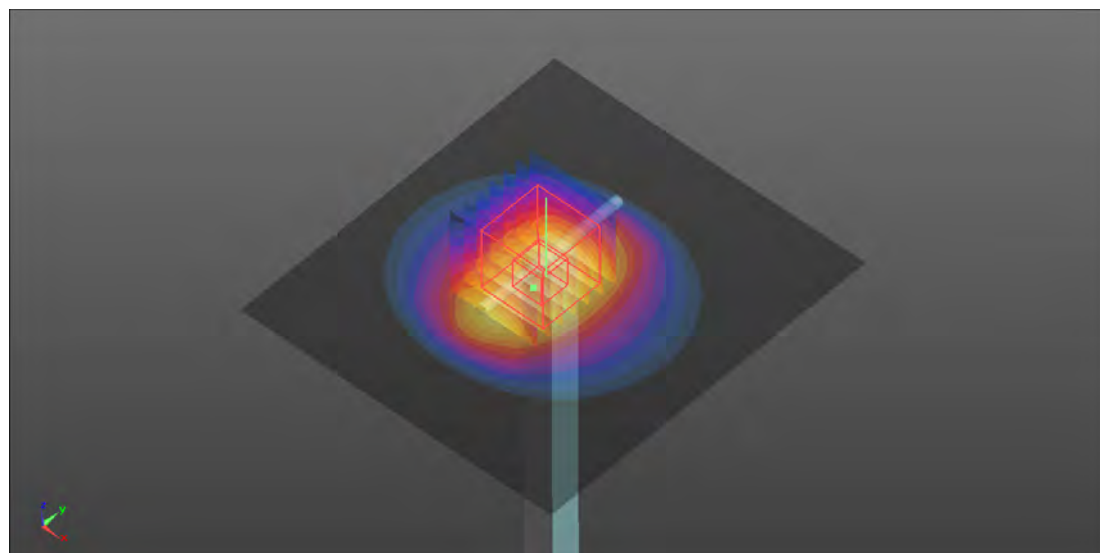

0 dB = 24.2 W/kg

System Check_HSL2600_20220531**DUT: Dipole 2600 MHz;Type:D2600V2**

Communication System: CW; Frequency: 2600 MHz;Duty Cycle: 1:1

Medium: HSL2600_0531 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.039$ S/m; $\epsilon_r = 37.739$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.66, 7.66, 7.66); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 26.3 W/kg



Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.8 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 33.0 W/kg

SAR(1 g) = 15 W/kg; SAR(10 g) = 6.57 W/kg

Maximum value of SAR (measured) = 26.2 W/kg

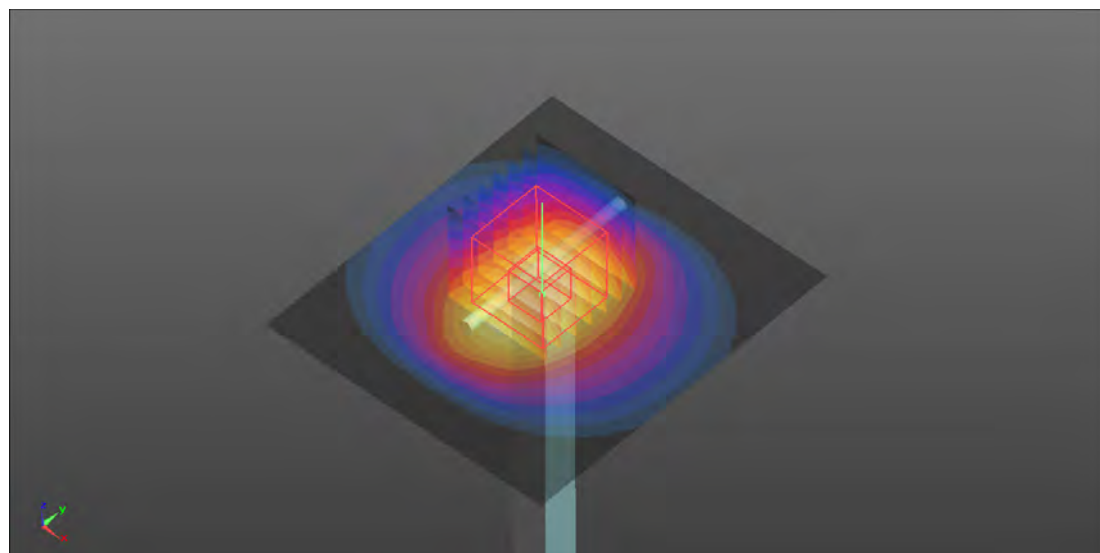

0 dB = 26.2 W/kg

System Check_HSL5250_20220523**DUT: Dipole 5GHzV2;Type:D5GHzV2**

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL5G_0523 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.726$ S/m; $\epsilon_r = 36.478$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1°C; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.8, 4.8, 4.8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.4 W/kg



Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 55.186 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 33.9 W/kg

SAR(1 g) = 8.05 W/kg; SAR(10 g) = 2.27 W/kg

Maximum value of SAR (measured) = 20.5 W/kg

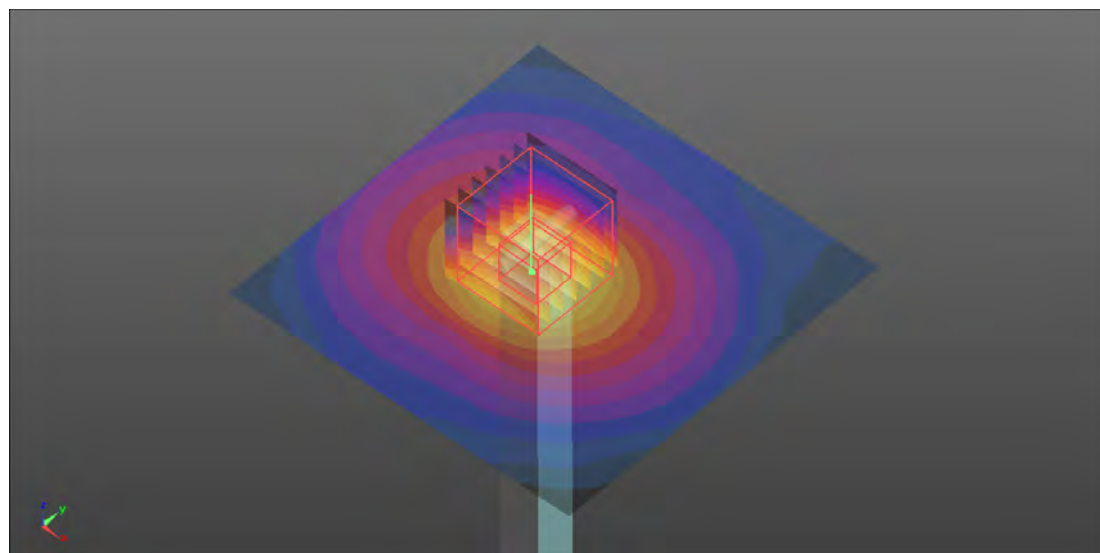

0 dB = 20.5 W/kg

System Check_HSL5600_20220524

DUT: Dipole 5GHzV2;Type:D5GHzV2

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL5G_0524 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.154$ S/m; $\epsilon_r = 35.866$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.5, 4.5, 4.5); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.5 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 57.515 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 33.7 W/kg

SAR(1 g) = 7.95 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 20.1 W/kg

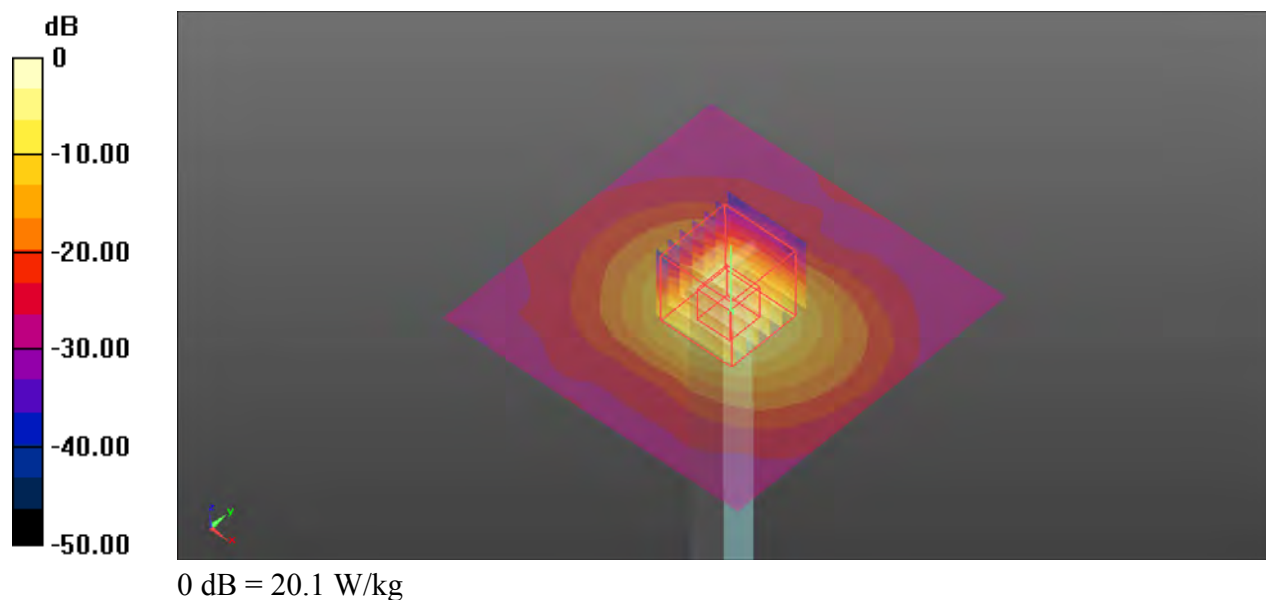

System Check_HSL5800_20220525**DUT: Dipole 5GHzV2;Type:D5GHzV2**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: HSL5G_0525 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.385$ S/m; $\epsilon_r = 35.489$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.49, 4.49, 4.49); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.0 W/kg



Pin=100mW/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 52.501 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 33.8 W/kg

SAR(1 g) = 7.2 W/kg; SAR(10 g) = 2.11 W/kg

Maximum value of SAR (measured) = 19.2 W/kg

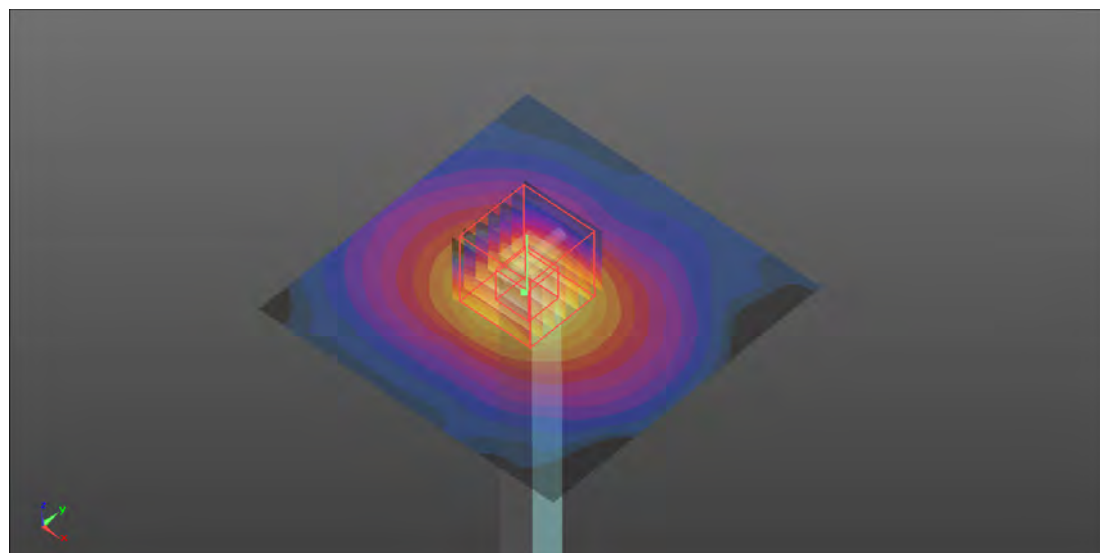

0 dB = 19.2 W/kg

Appendix B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

P01 GSM850_GPRS10_Rear Face_0cm_Ch128

Communication System: GPRS10; Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium: HSL835_0527 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 43.065$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.36, 9.36, 9.36); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.15 W/kg



- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.350 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.464 W/kg

Maximum value of SAR (measured) = 1.09 W/kg

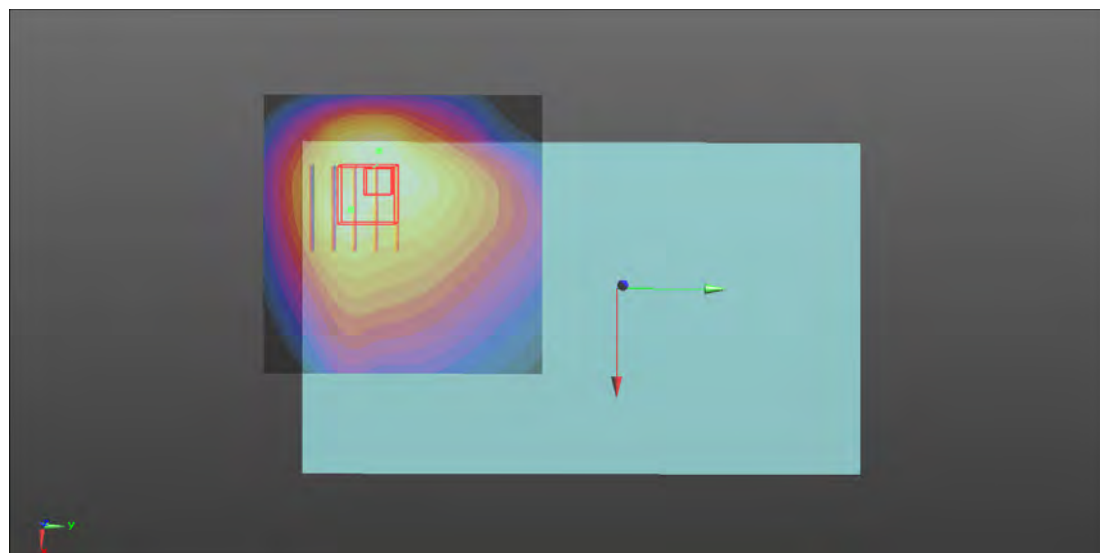

0 dB = 1.09 W/kg

P02 GSM1900_GPRS10_Rear Face_0cm_Ch512

Communication System: GPRS10; Frequency: 1850.2 MHz; Duty Cycle: 1:4.15

Medium: HSL1900_0529 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.385$ S/m; $\epsilon_r = 40.669$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8, 8, 8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.66 W/kg



- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.715 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 0.998 W/kg; SAR(10 g) = 0.501 W/kg

Maximum value of SAR (measured) = 1.50 W/kg

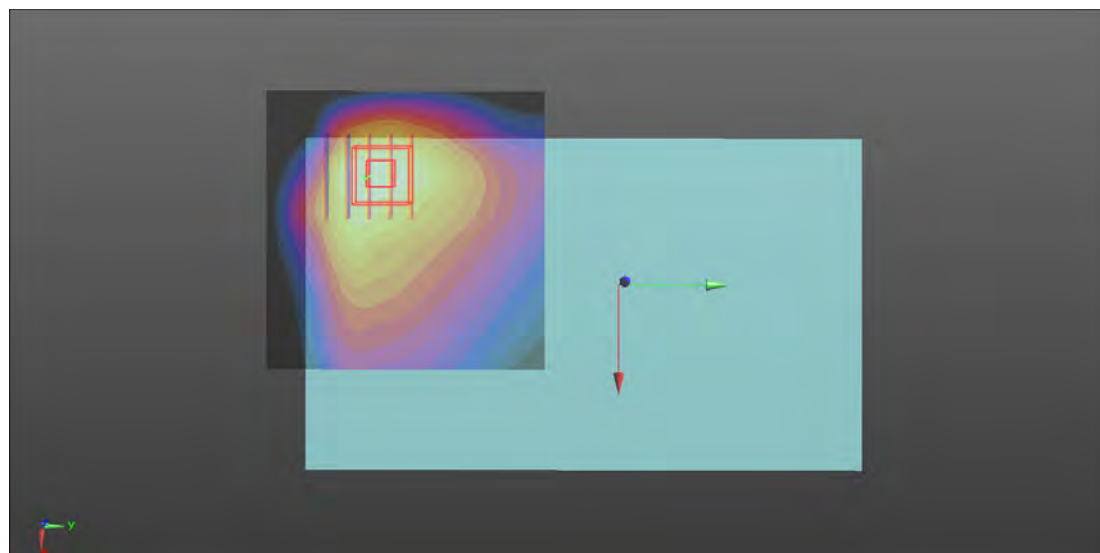

0 dB = 1.50 W/kg

P03 WCDMA II_RMC12.2K_Rear Face_0cm_Ch9400

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900_0529 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.555$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8, 8, 8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (111x81x1)**: Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.82 W/kg


- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.101 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.517 W/kg

Maximum value of SAR (measured) = 1.54 W/kg

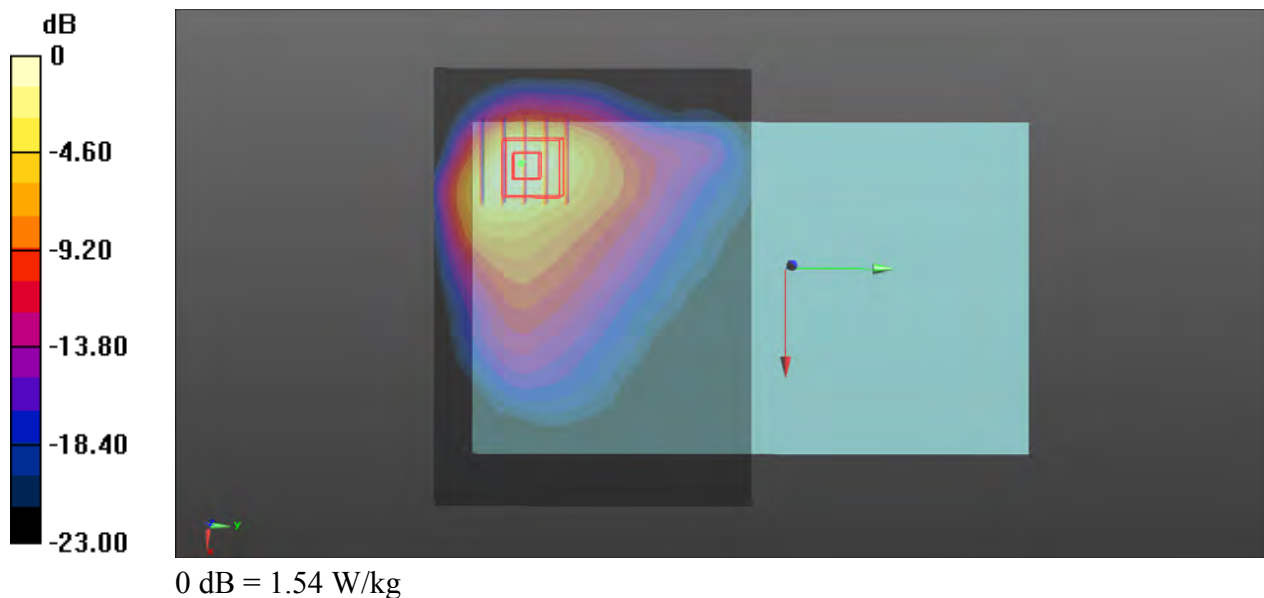

P04 WCDMA IV_RMC12.2K_Rear Face_0cm_Ch1312

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: HSL1750_0528 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.305$ S/m; $\epsilon_r = 38.927$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.19, 8.19, 8.19); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.763 W/kg



- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.189 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.929 W/kg

SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 0.698 W/kg

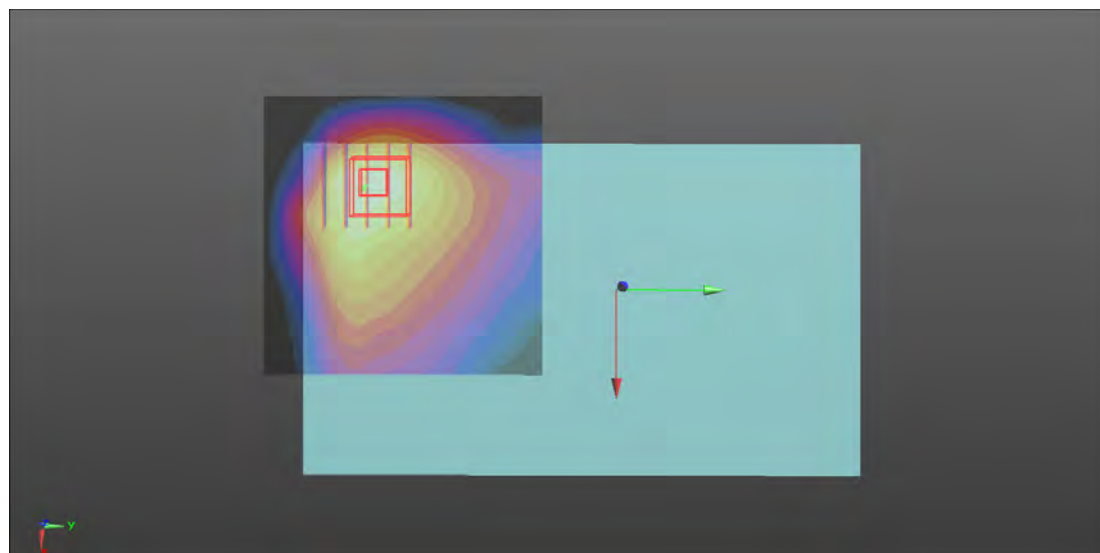

0 dB = 0.698 W/kg

P05 WCDMA V_RMC12.2K_Right Side_0cm_Ch4182

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835_0527 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 42.904$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.36, 9.36, 9.36); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (41x161x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.72 W/kg



- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.261 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.00 W/kg

SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 1.86 W/kg

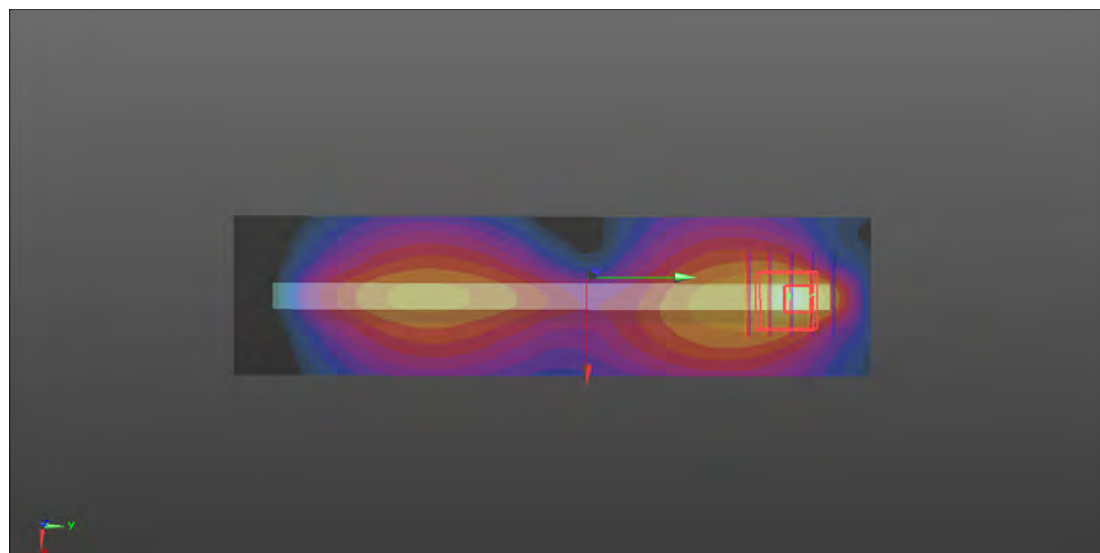

0 dB = 1.86 W/kg

P06 LTE 2_QPSK20M_Rear Face_0cm_Ch19100_1RB_OS0

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900_0529 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 40.484$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8, 8, 8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.48 W/kg



- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.391 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.852 W/kg; SAR(10 g) = 0.430 W/kg

Maximum value of SAR (measured) = 1.32 W/kg

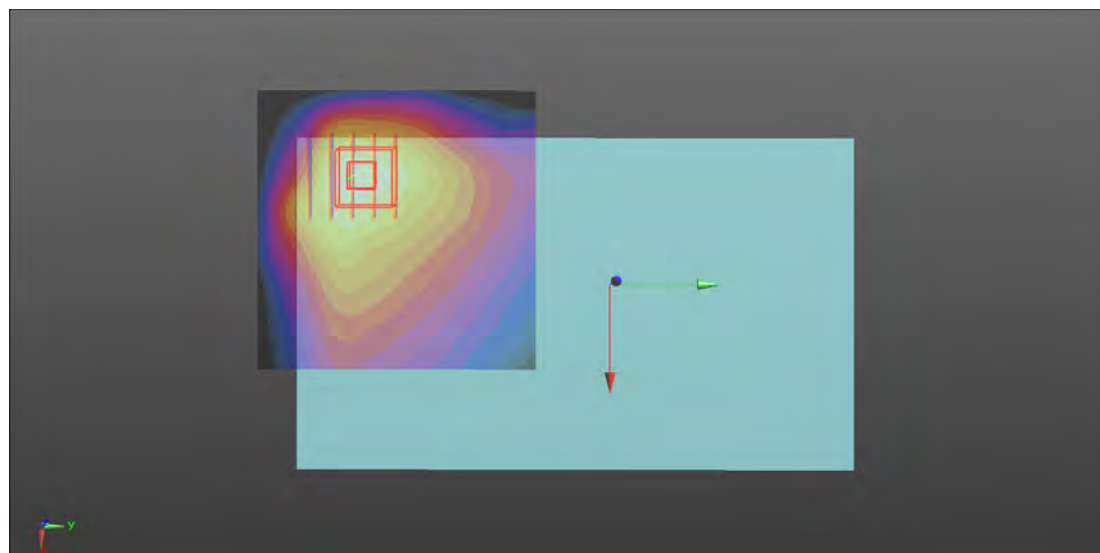

0 dB = 1.32 W/kg

P07 LTE 5_QPSK10M_Right Side_0cm_Ch20525_1RB_OS49

Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835_0527 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 42.903$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.36, 9.36, 9.36); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.75 W/kg



- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.008 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.91 W/kg

SAR(1 g) = 0.723 W/kg; SAR(10 g) = 0.272 W/kg

Maximum value of SAR (measured) = 1.45 W/kg

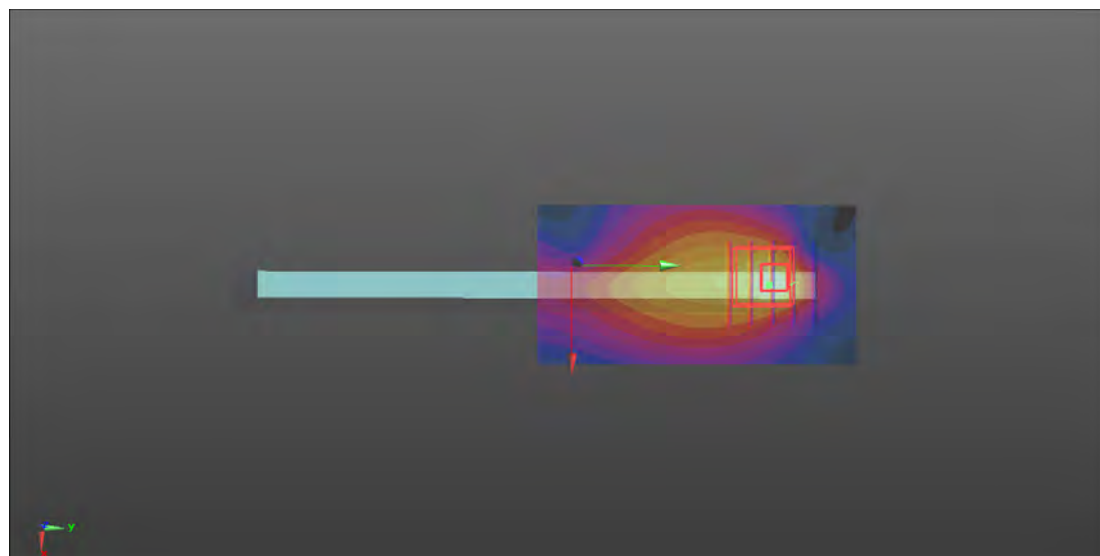

0 dB = 1.45 W/kg

P08 LTE 7_QPSK20M_Rear Face_0cm_Ch21100_1RB_OS99

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600_0531 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.013$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.66, 7.66, 7.66); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1214
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x81x1):** Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 2.28 W/kg



- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.629 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.54 W/kg

SAR(1 g) = 0.995 W/kg; SAR(10 g) = 0.379 W/kg

Maximum value of SAR (measured) = 2.14 W/kg

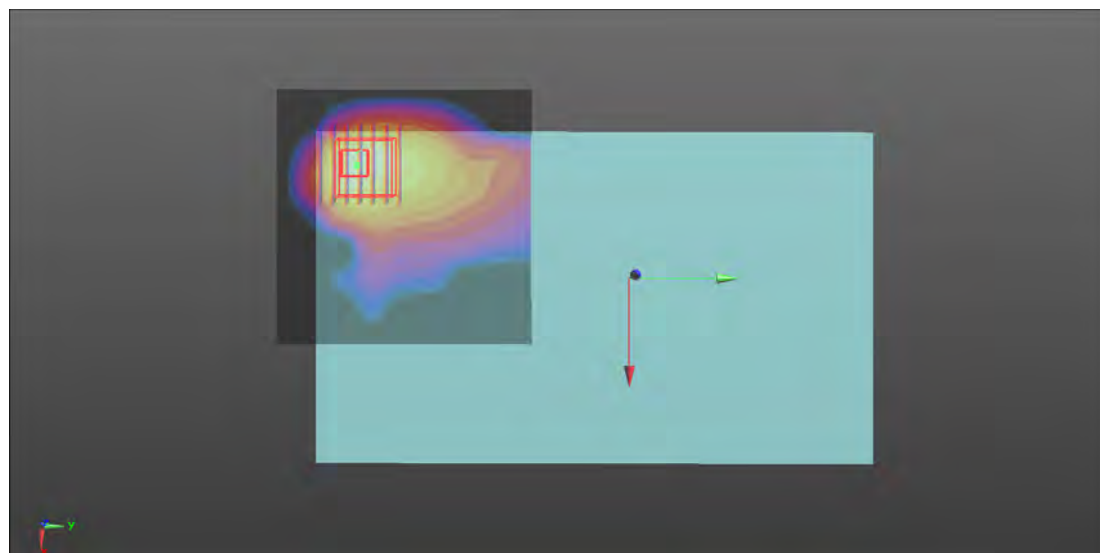

0 dB = 2.14 W/kg