

TEST REPORT

Reference No...... : WTH22X01000806W-3
FCC ID : 2A5Z3-LST-S02W-W02
Applicant : Xi'an SuperHii Network Technology Co.,Ltd
Address : A11804,Xi'an National Digital Publishing Base,NO.996,TianGu 7th Road,
High-tech Zone,Xi'an,Shaanxi Province,China
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Smart Shopping Cart
Model No...... : Trolley-S600-XXX
Standards : FCC Part 15.247
Date of Receipt sample : 2022-01-04
Date of Test..... : 2022-01-04 to 2022-03-05
Date of Issue : 2022-03-05
Test Report Form No. : WTX_Part 15_247W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.


Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,

Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:



Mike Shi



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	10
3. ANTENNA REQUIREMENT	11
3.1 STANDARD APPLICABLE	11
3.2 EVALUATION INFORMATION	11
4. POWER SPECTRAL DENSITY	12
4.1 STANDARD APPLICABLE	12
4.2 TEST SETUP BLOCK DIAGRAM	12
4.3 TEST PROCEDURE	12
4.4 SUMMARY OF TEST RESULTS/PLOTS	12
5. DTS BANDWIDTH	13
5.1 STANDARD APPLICABLE	13
5.2 TEST SETUP BLOCK DIAGRAM	13
5.3 TEST PROCEDURE	13
5.4 SUMMARY OF TEST RESULTS/PLOTS	13
6. RF OUTPUT POWER	14
6.1 STANDARD APPLICABLE	14
6.2 TEST SETUP BLOCK DIAGRAM	14
6.3 TEST PROCEDURE	14
6.4 SUMMARY OF TEST RESULTS/PLOTS	14
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	15
7.1 STANDARD APPLICABLE	15
7.2 TEST PROCEDURE	15
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
7.4 SUMMARY OF TEST RESULTS/PLOTS	17
8. OUT OF BAND EMISSIONS	25
8.1 STANDARD APPLICABLE	25
8.2 TEST PROCEDURE	25
8.3 SUMMARY OF TEST RESULTS/PLOTS	26
9. CONDUCTED EMISSIONS	35
9.1 TEST PROCEDURE	35
9.2 BASIC TEST SETUP BLOCK DIAGRAM	35
9.3 TEST RECEIVER SETUP	35
9.4 SUMMARY OF TEST RESULTS/PLOTS	35
APPENDIX SUMMARY	38
APPENDIX A	39
APPENDIX B	44
APPENDIX C	49
APPENDIX D	54
APPENDIX PHOTOGRAPHS	62

Report version

Version No.	Date of issue	Description
Rev.00	2022-03-05	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Smart Shopping Cart
Trade Name:	/
Model No.:	Trolley-S600-XXX
Adding Model:	/
Rated Voltage:	Charging Port:DC36V Battery:DC11.1V
Battery Capacity:	83Wh
Power Adapter:	/
Note: The test data is gathered from a production sample provided by the manufacturer.	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	15.20dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	FPC Antenna
Antenna Gain:	3dBi
Note: The Antenna Gain is provided by the customer and can affect the validity of results.	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the FCC rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	/	SPF-3604	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2021-03-27	2022-03-26
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91705	2021-04-27	2023-04-26

				82		
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2021-04-27	2022-04-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2021-03-27	2022-03-26
☐ Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2021-04-12	2022-04-11
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2021-05-06	2022-05-05
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2021-12-03	2022-12-02
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2021-04-15	2022-04-14
☒ Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2021-04-12	2022-04-11
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2021-04-15	2022-04-14
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2021-04-12	2022-04-11
☐ Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2021-04-12	2022-04-11
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2021-04-12	2022-04-11

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has an FPC antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

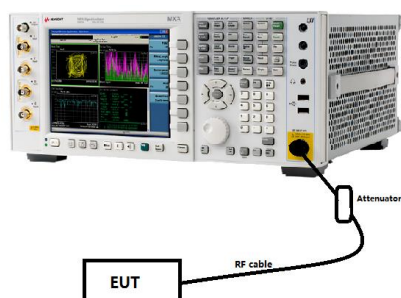

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

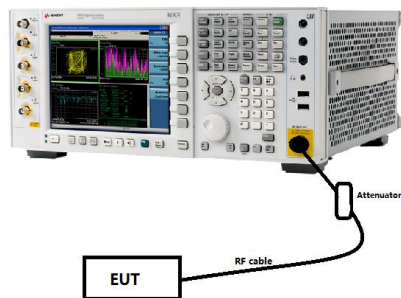

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- Set RBW = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

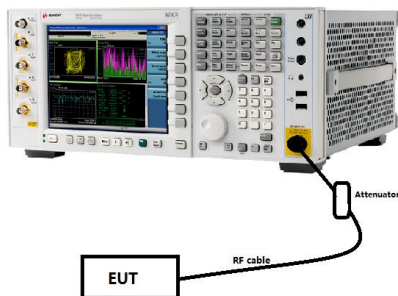

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth.

- Set span to at least 1.5 times the OBW.
- Set RBW = 1-5% of the OBW, not to exceed 1MHz.
- Set VBW $\geq 3 \times$ RBW.
- Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

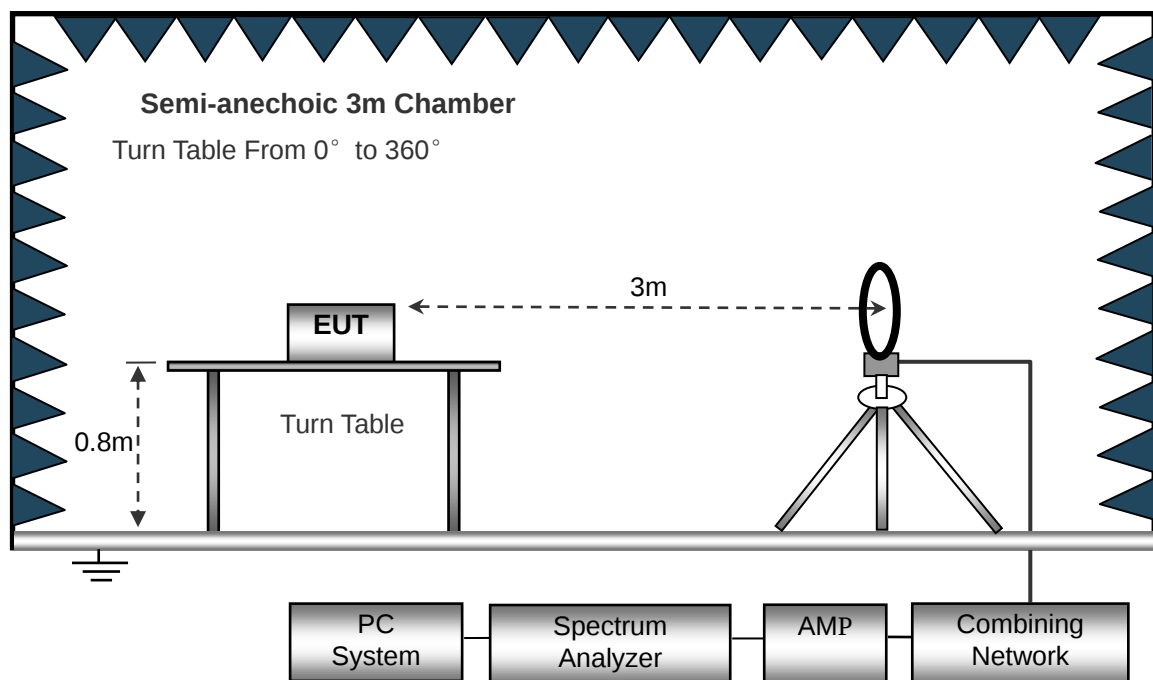

The test setup for emission measurement from 30MHz to 1GHz.

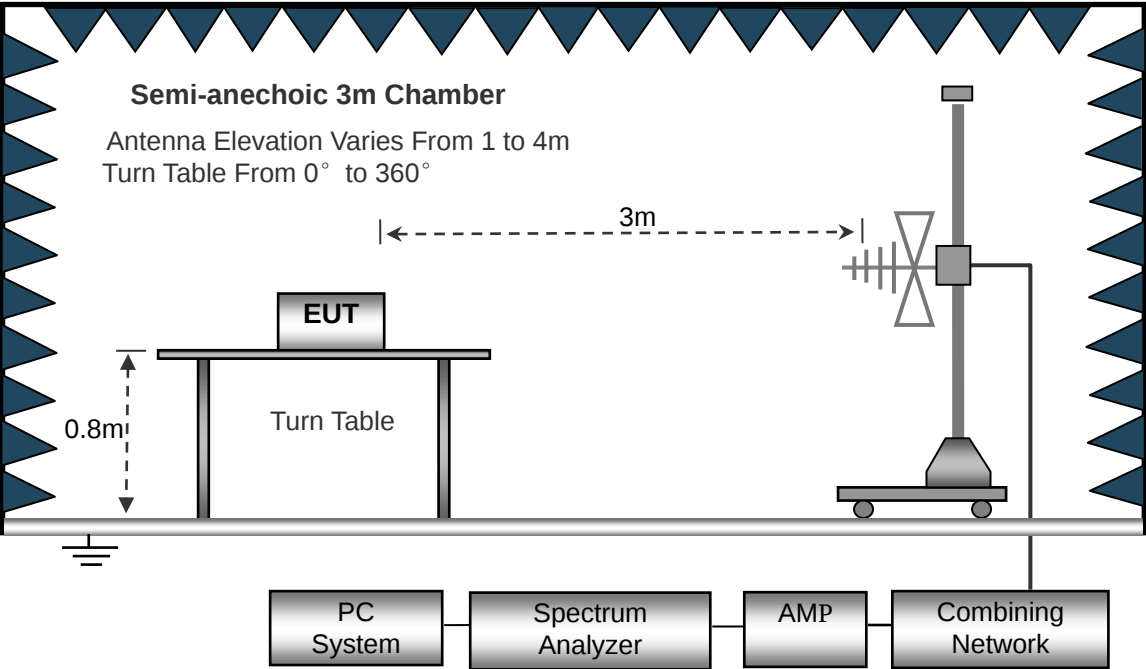

The test setup for emission measurement above 1GHz.

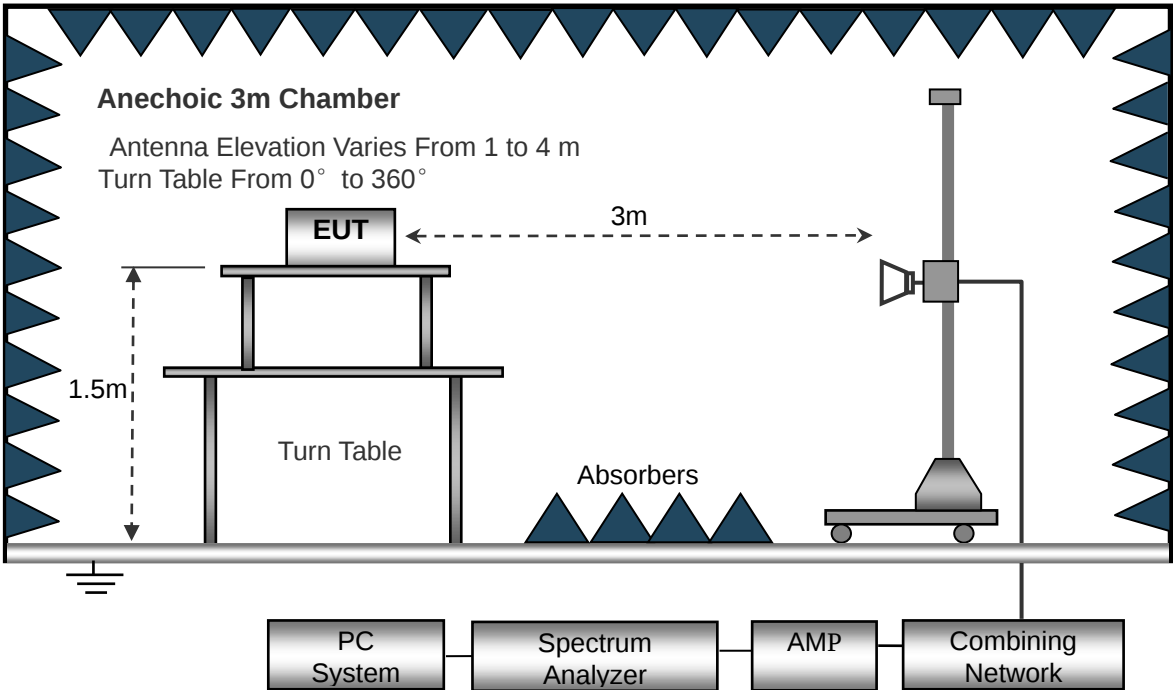

Frequency :9kHz-30MHz RBW=10KHz, VBW =30KHz Sweep time= Auto Trace = max hold Detector function = peak	Frequency :30MHz-1GHz RBW=120KHz, VBW=300KHz Sweep time= Auto Trace = max hold Detector function = peak, QP	Frequency :Above 1GHz RBW=1MHz, VBW=3MHz(Peak), 10Hz(AV) Sweep time= Auto Trace = max hold Detector function = peak, AV
---	--	--

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


7.4 Summary of Test Results/Plots

Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_11Mbps) is recorded in this report.


➤ Spurious Emissions Below 1GHz

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

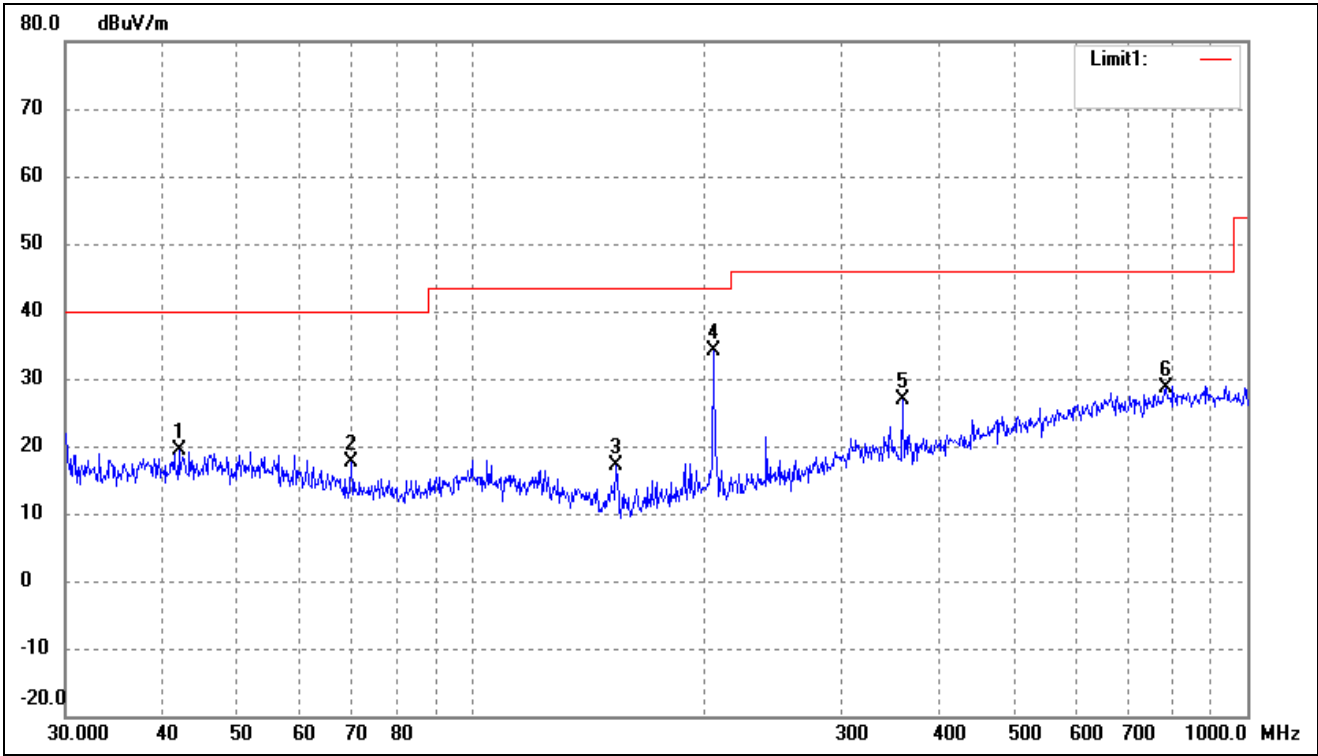


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.0066	26.29	-6.99	19.30	40.00	-20.70	-	-	peak
2	70.0903	27.76	-10.18	17.58	40.00	-22.42	-	-	peak
3	153.7385	29.56	-12.44	17.12	43.50	-26.38	-	-	peak
4	204.9551	43.74	-9.56	34.18	43.50	-9.32	-	-	peak
5	359.1860	32.03	-5.12	26.91	46.00	-19.09	-	-	peak
6	785.0935	26.51	2.00	28.51	46.00	-17.49	-	-	peak

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

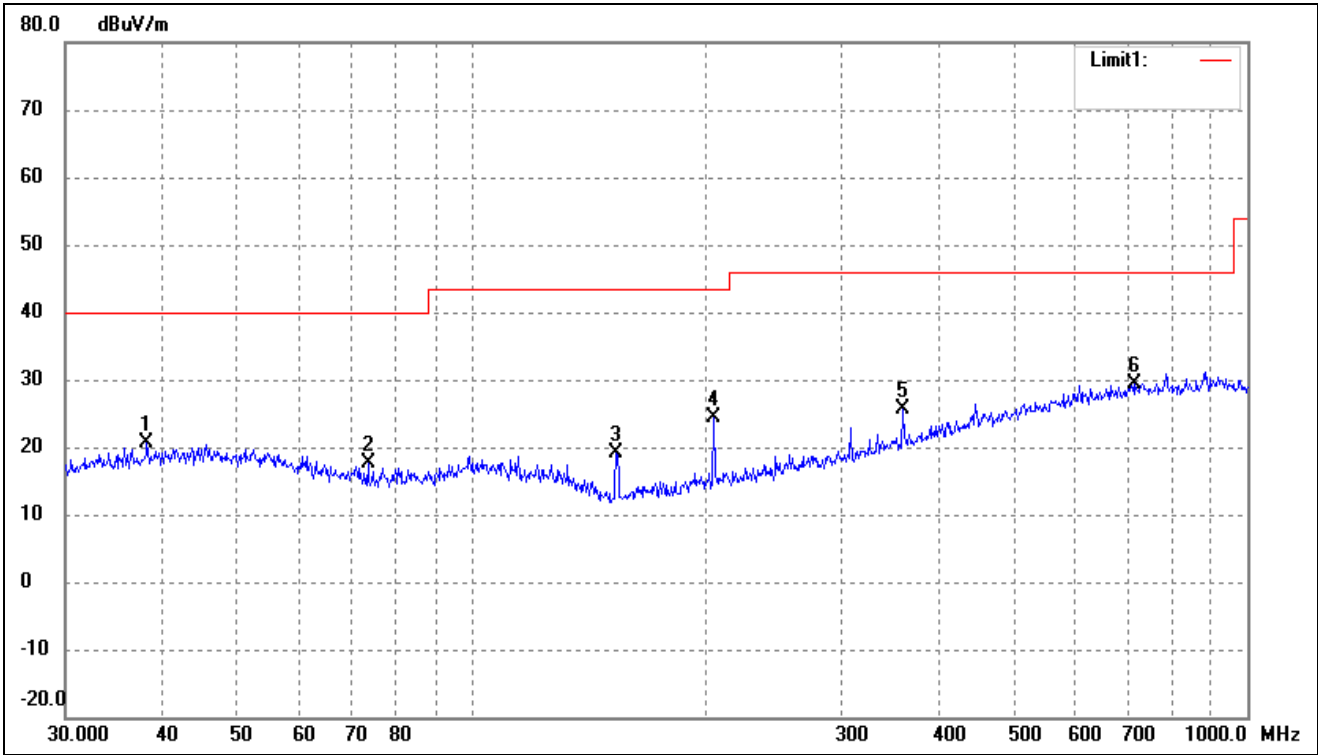


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.2120	28.13	-7.45	20.68	40.00	-19.32	-	-	peak
2	73.6170	27.89	-10.38	17.51	40.00	-22.49	-	-	peak
3	153.7385	31.57	-12.44	19.13	43.50	-24.37	-	-	peak
4	204.9551	33.82	-9.56	24.26	43.50	-19.24	-	-	peak
5	359.1860	30.72	-5.12	25.60	46.00	-20.40	-	-	peak
6	716.6820	27.78	1.54	29.32	46.00	-16.68	-	-	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

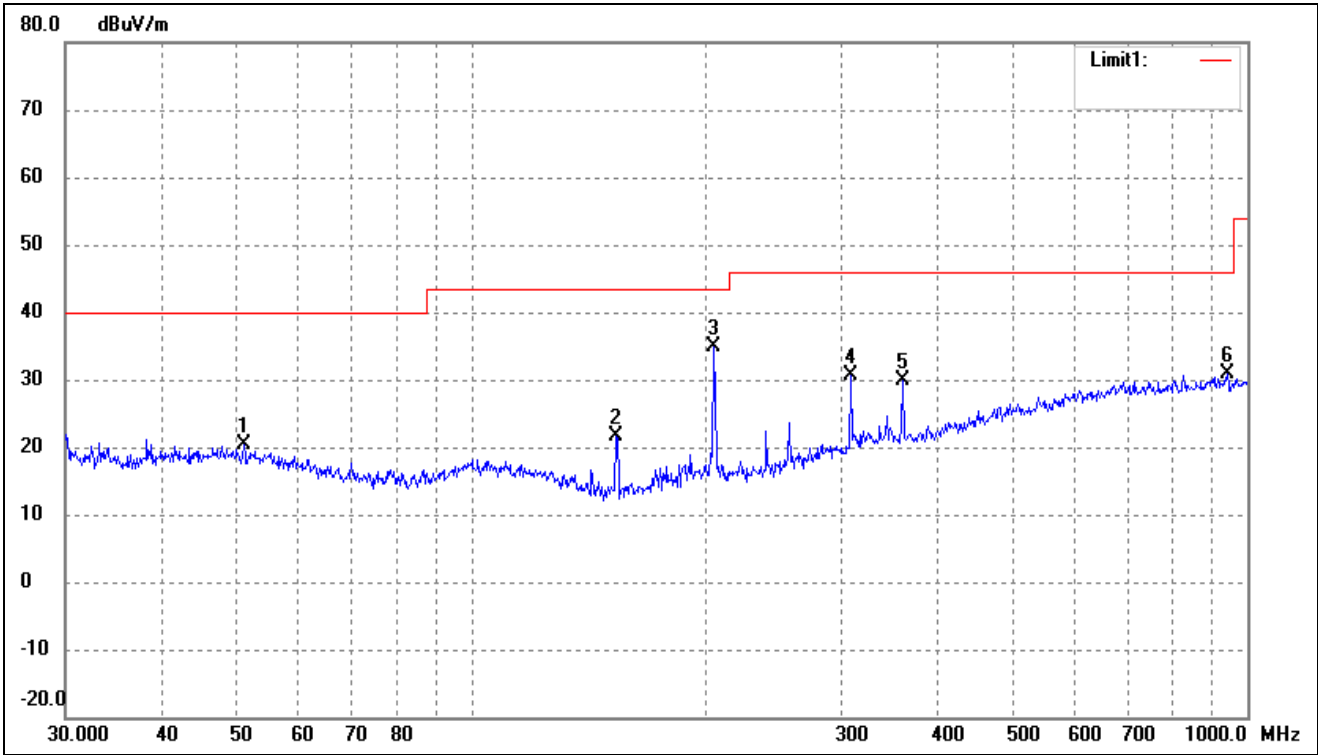


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.9420	27.57	-7.10	20.47	40.00	-19.53	-	-	peak
2	153.7385	34.06	-12.44	21.62	43.50	-21.88	-	-	peak
3	205.6751	44.31	-9.54	34.77	43.50	-8.73	-	-	peak
4	308.9126	37.35	-6.68	30.67	46.00	-15.33	-	-	peak
5	359.1860	34.89	-5.12	29.77	46.00	-16.23	-	-	peak
6	942.1305	28.36	2.61	30.97	46.00	-15.03	-	-	peak

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

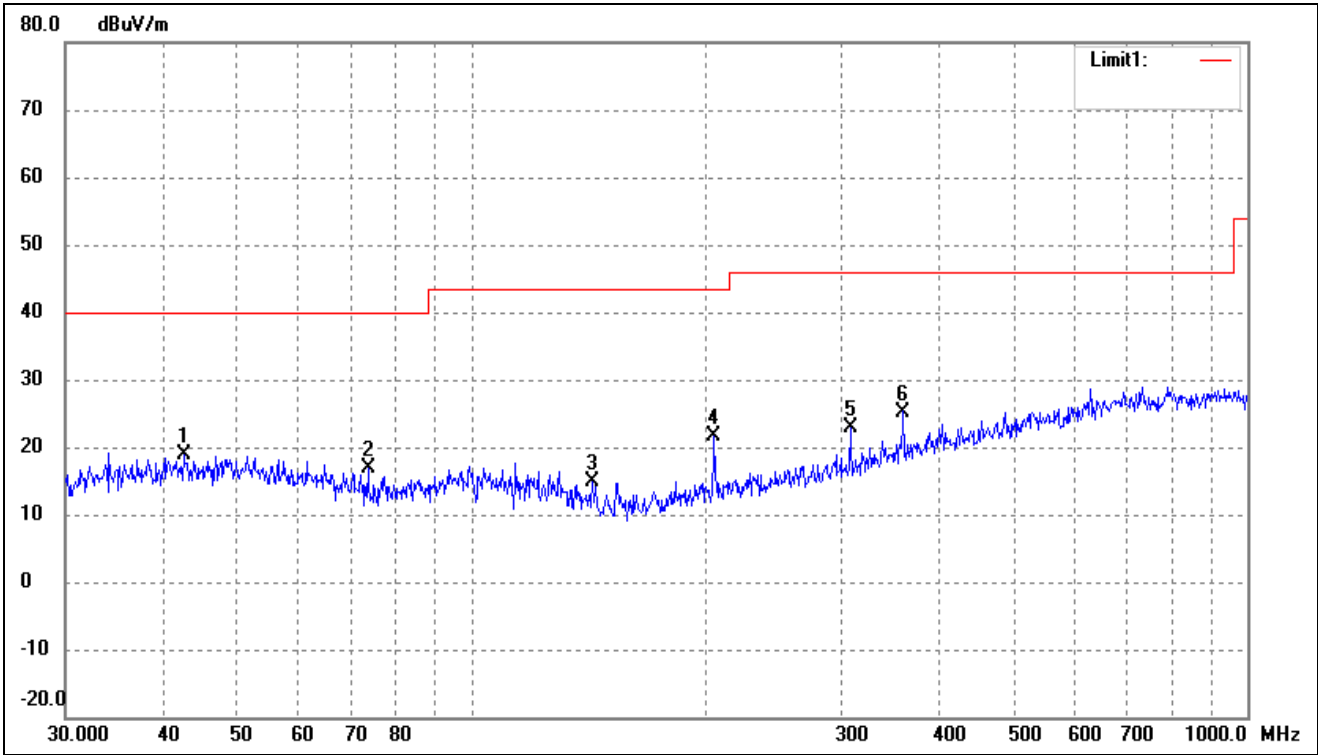


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.6000	25.76	-6.99	18.77	40.00	-21.23	-	-	peak
2	73.6170	27.22	-10.38	16.84	40.00	-23.16	-	-	peak
3	143.3261	27.25	-12.38	14.87	43.50	-28.63	-	-	peak
4	205.6751	31.05	-9.54	21.51	43.50	-21.99	-	-	peak
5	307.8313	29.60	-6.71	22.89	46.00	-23.11	-	-	peak
6	360.4477	30.34	-5.09	25.25	46.00	-20.75	-	-	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

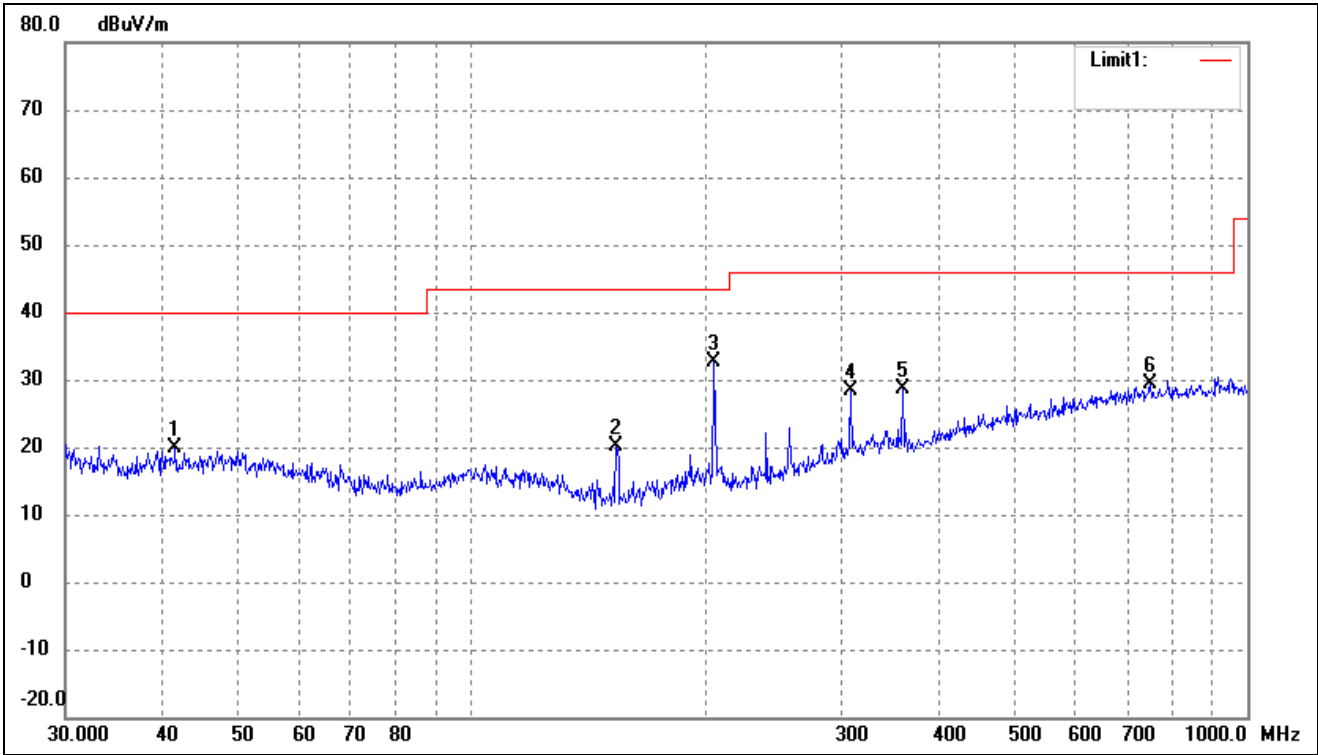

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.5670	26.94	-7.00	19.94	40.00	-20.06	-	-	peak
2	153.7385	32.55	-12.44	20.11	43.50	-23.39	-	-	peak
3	205.6751	42.11	-9.54	32.57	43.50	-10.93	-	-	peak
4	307.8313	35.00	-6.71	28.29	46.00	-17.71	-	-	peak
5	359.1860	33.78	-5.12	28.66	46.00	-17.34	-	-	peak
6	750.1083	27.68	1.76	29.44	46.00	-16.56	-	-	peak

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

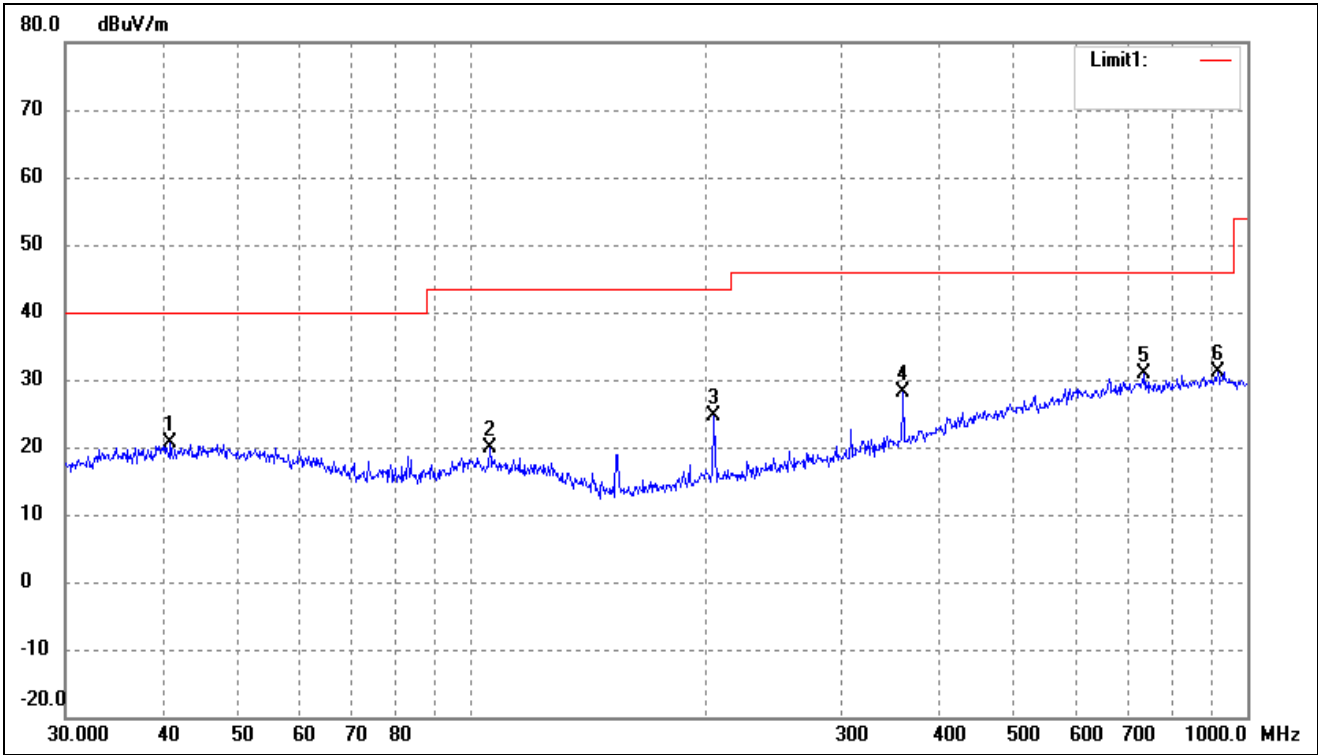

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.9881	27.52	-7.00	20.52	40.00	-19.48	-	-	peak
2	105.6415	28.60	-8.80	19.80	43.50	-23.70	-	-	peak
3	205.6751	34.11	-9.54	24.57	43.50	-18.93	-	-	peak
4	360.4477	33.11	-5.09	28.02	46.00	-17.98	-	-	peak
5	737.0714	29.27	1.67	30.94	46.00	-15.06	-	-	peak
6	916.0687	28.44	2.69	31.13	46.00	-14.87	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b_11Mbps (worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	58.35	-4.50	53.85	74	-20.15	H	PK
4824.000	48.90	-4.50	44.40	54	-9.60	H	AV
7236.000	51.85	1.14	52.99	74	-21.01	H	PK
7236.000	44.37	1.14	45.51	54	-8.49	H	AV
4824.000	58.33	-4.50	53.83	74	-20.17	V	PK
4824.000	50.65	-4.50	46.15	54	-7.85	V	AV
7236.000	49.09	1.14	50.23	74	-23.77	V	PK
7236.000	42.59	1.14	43.73	54	-10.27	V	AV
Middle Channel-2437MHz							
4874.000	58.82	-4.47	54.35	74	-19.65	H	PK
4874.000	49.02	-4.47	44.55	54	-9.45	H	AV
7311.000	52.91	1.47	54.38	74	-19.62	H	PK
7311.000	46.53	1.47	48.00	54	-6.00	H	AV
4874.000	60.61	-4.47	56.14	74	-17.86	V	PK
4874.000	49.05	-4.47	44.58	54	-9.42	V	AV
7311.000	49.27	1.47	50.74	74	-23.26	V	PK
7311.000	41.91	1.47	43.38	54	-10.62	V	AV
High Channel-2462MHz							
4924.000	59.83	-4.44	55.39	74	-18.61	H	PK
4924.000	48.96	-4.44	44.52	54	-9.48	H	AV
7386.000	54.13	1.79	55.92	74	-18.08	H	PK
7386.000	44.82	1.79	46.61	54	-7.39	H	AV
4924.000	59.41	-4.44	54.97	74	-19.03	V	PK
4924.000	50.39	-4.44	45.95	54	-8.05	V	AV
7386.000	52.32	1.79	54.11	74	-19.89	V	PK
7386.000	41.48	1.79	43.27	54	-10.73	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) $VBW \geq [3 \times RBW]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots


➤ Radiated test

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

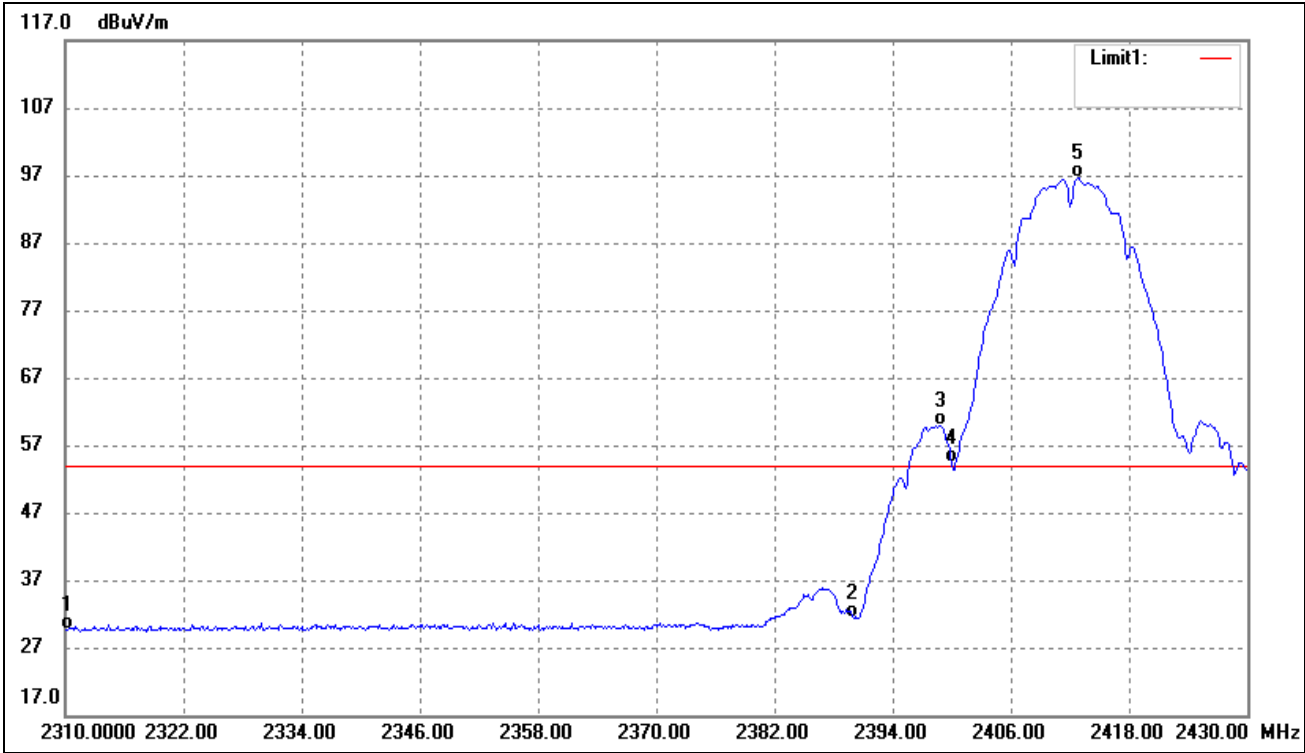


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.46	-10.82	29.64	54.00	-24.36	Average Detector
	2310.000	51.99	-10.82	41.17	74.00	-32.83	Peak Detector
2	2390.000	42.13	-10.70	31.43	54.00	-22.57	Average Detector
	2390.000	53.03	-10.70	42.33	74.00	-31.67	Peak Detector
3	2400.000	64.97	-10.69	54.28	/	/	Average Detector
	2400.000	70.91	-10.69	60.22	/	/	Peak Detector
4	2398.800	70.59	-10.69	59.90	Delta=36.83dBc		Average Detector
5	2412.720	107.40	-10.67	96.73			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

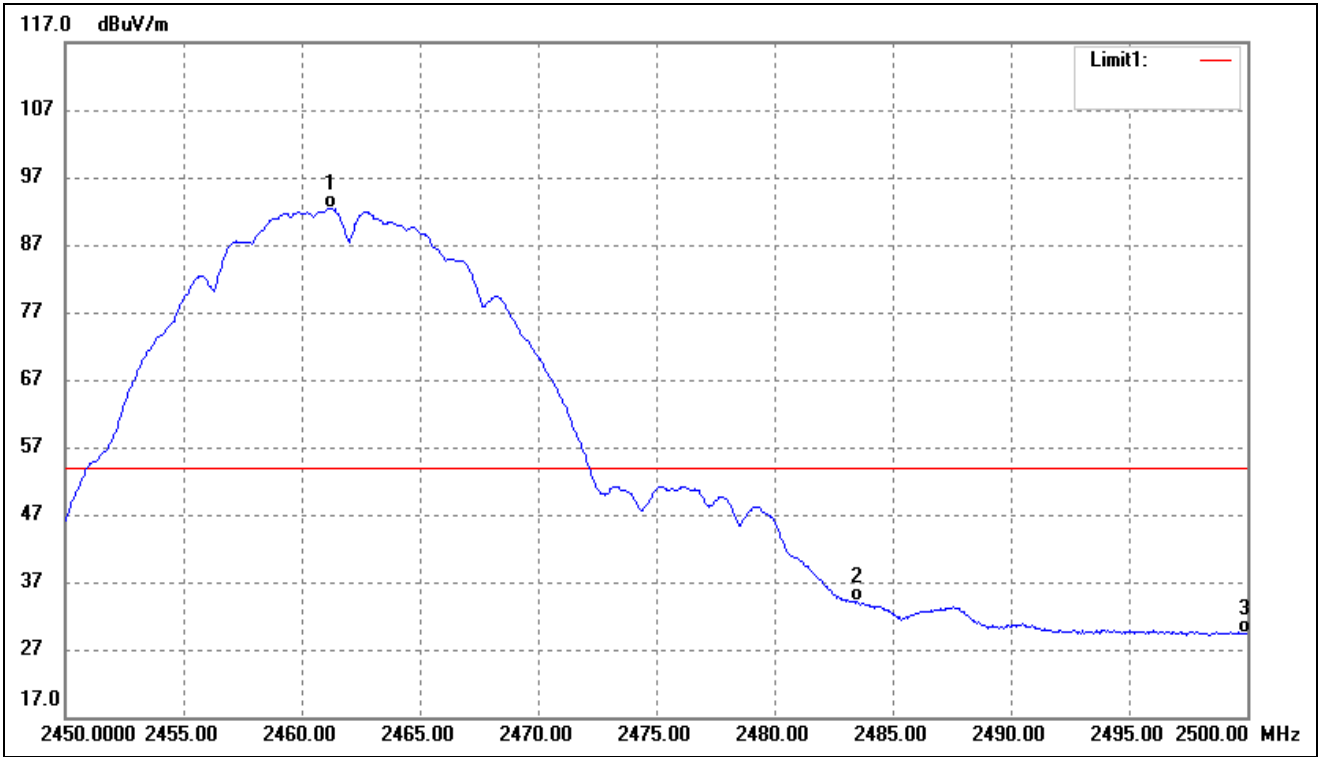


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.250	103.05	-10.61	92.44	/	/	Average Detector
	2460.850	107.43	-10.61	96.82	/	/	Peak Detector
2	2483.500	44.73	-10.58	34.15	54.00	-19.85	Average Detector
	2483.500	55.91	-10.58	45.33	74.00	-28.67	Peak Detector
3	2500.000	40.00	-10.55	29.45	54.00	-24.55	Average Detector
	2500.000	51.06	-10.55	40.51	74.00	-33.49	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)

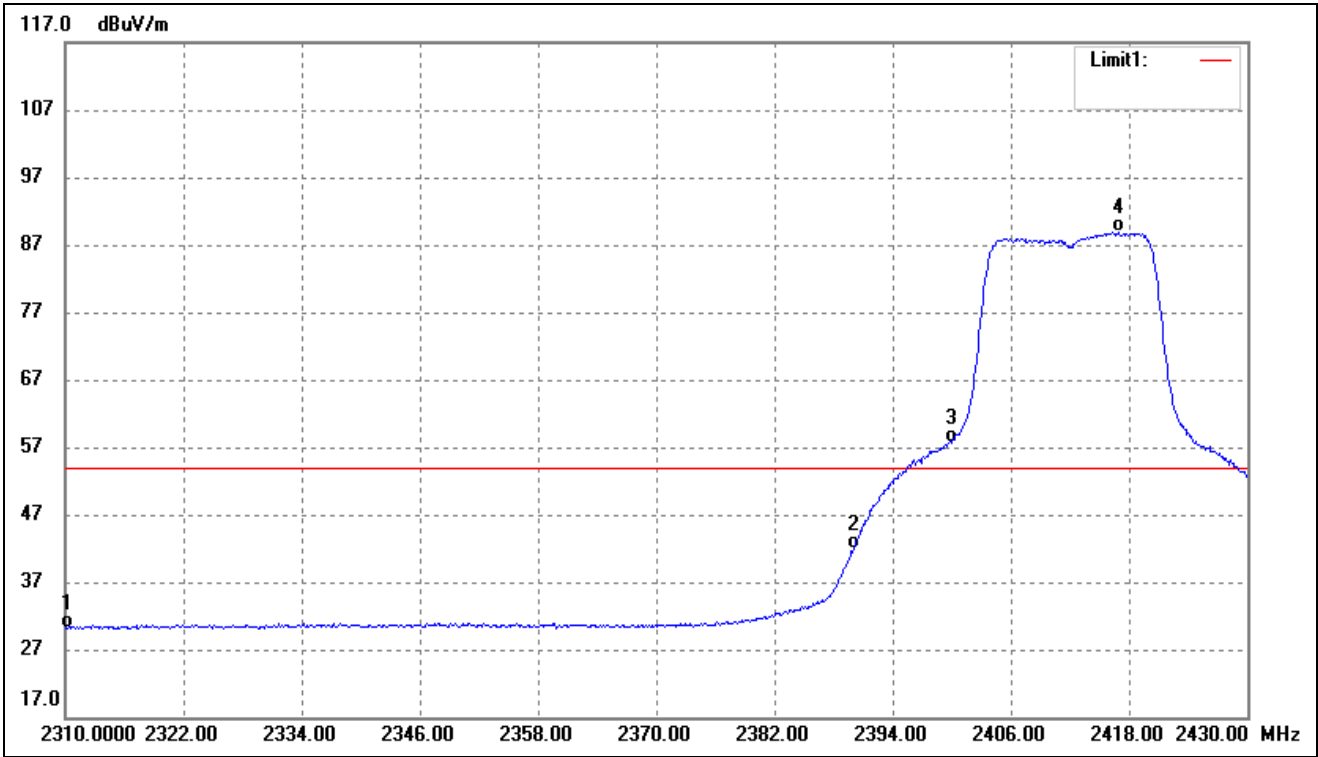


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.03	-10.82	30.21	54.00	-23.79	Average Detector
	2310.000	52.54	-10.82	41.72	74.00	-32.28	Peak Detector
2	2390.000	52.59	-10.70	41.89	54.00	-12.11	Average Detector
	2390.000	74.54	-10.70	63.84	74.00	-10.16	Peak Detector
3	2400.000	68.24	-10.69	57.55	Delta=31.30dBc		Average Detector
4	2416.920	99.51	-10.66	88.85			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)

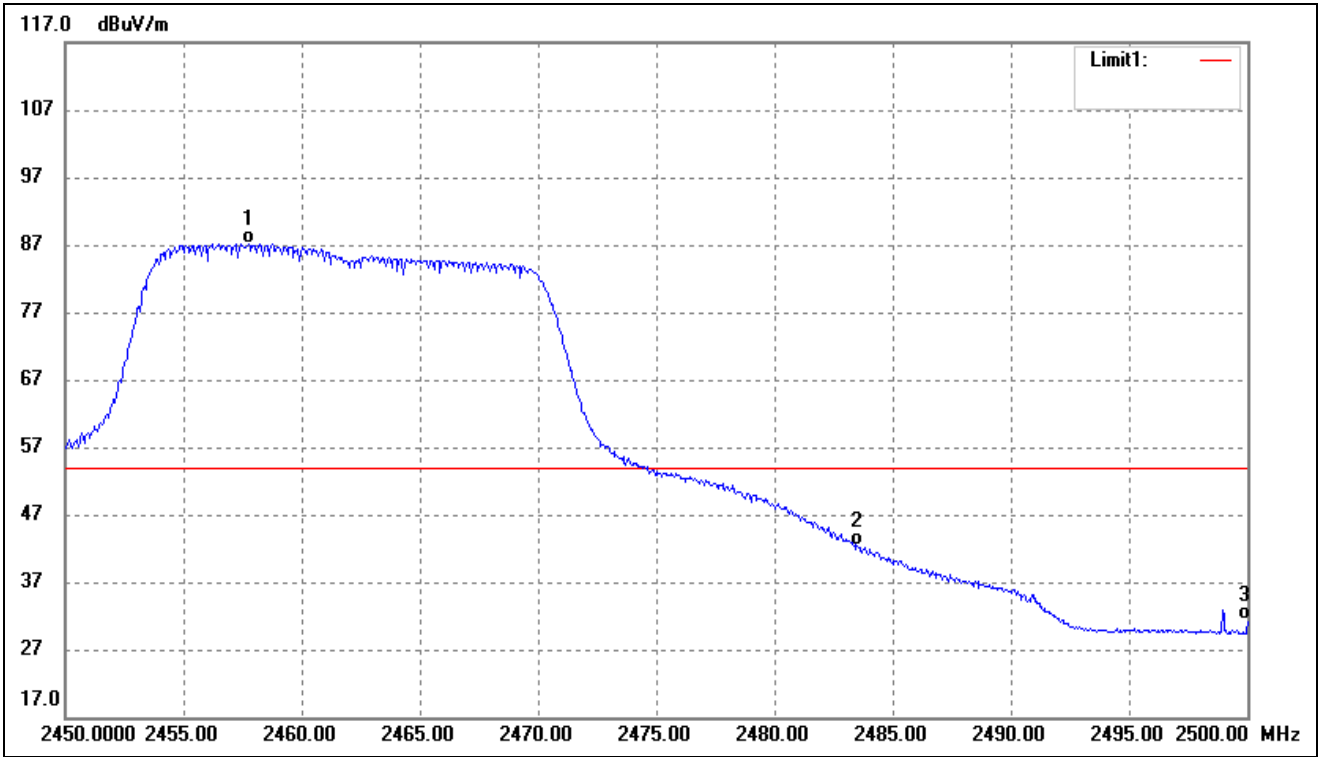


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2457.750	97.80	-10.61	87.19	/	/	Average Detector
	2457.750	108.37	-10.61	97.76	/	/	Peak Detector
2	2483.500	52.95	-10.58	42.37	54.00	-11.63	Average Detector
	2483.500	71.50	-10.58	60.92	74.00	-13.08	Peak Detector
3	2500.000	41.86	-10.55	31.31	54.00	-22.69	Average Detector
	2500.000	51.74	-10.55	41.19	74.00	-32.81	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Horizontal (worst case)

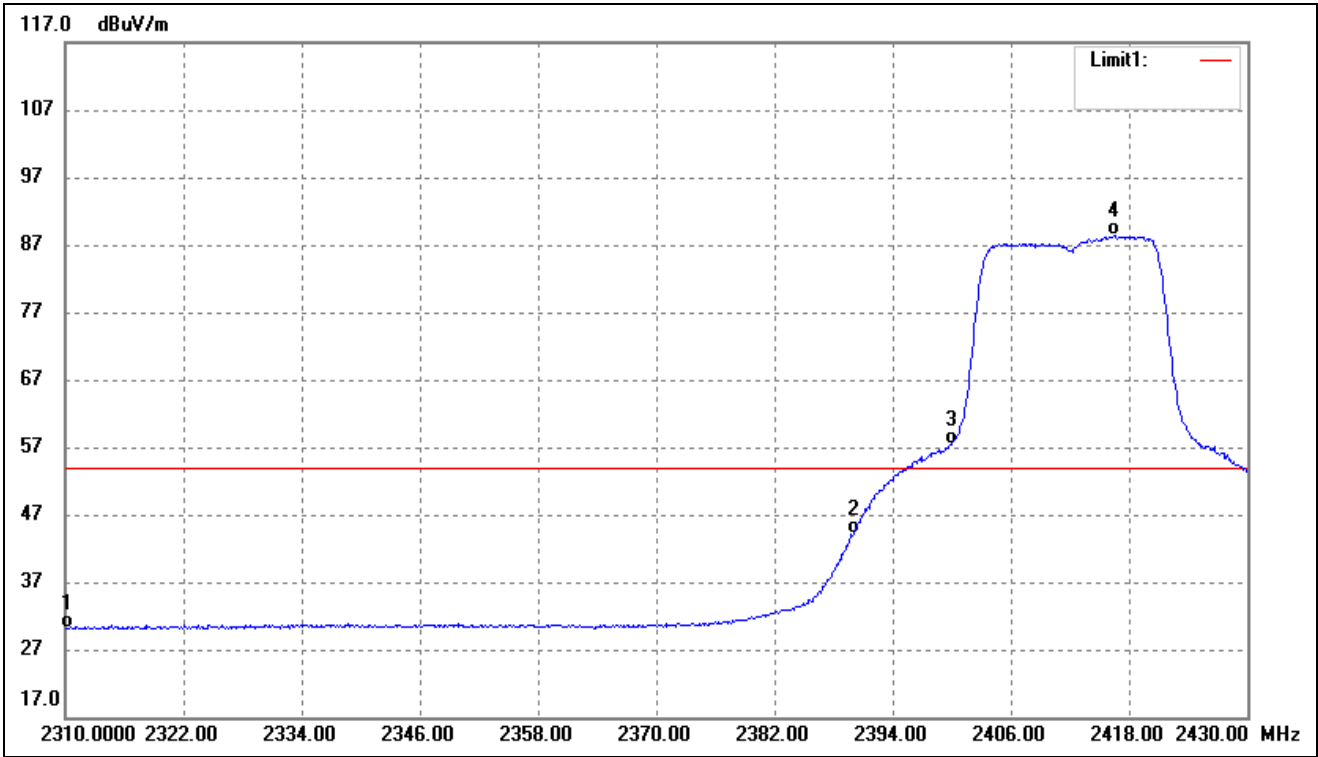


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.99	-10.82	30.17	54.00	-23.83	Average Detector
	2310.000	53.17	-10.82	42.35	74.00	-31.65	Peak Detector
2	2390.000	54.76	-10.70	44.06	54.00	-9.94	Average Detector
	2310.000	53.17	-10.82	42.35	74.00	-31.65	Peak Detector
3	2400.000	67.96	-10.69	57.27	Delta=31.09dBc		Average Detector
4	2416.440	99.02	-10.66	88.36			Average Detector

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)

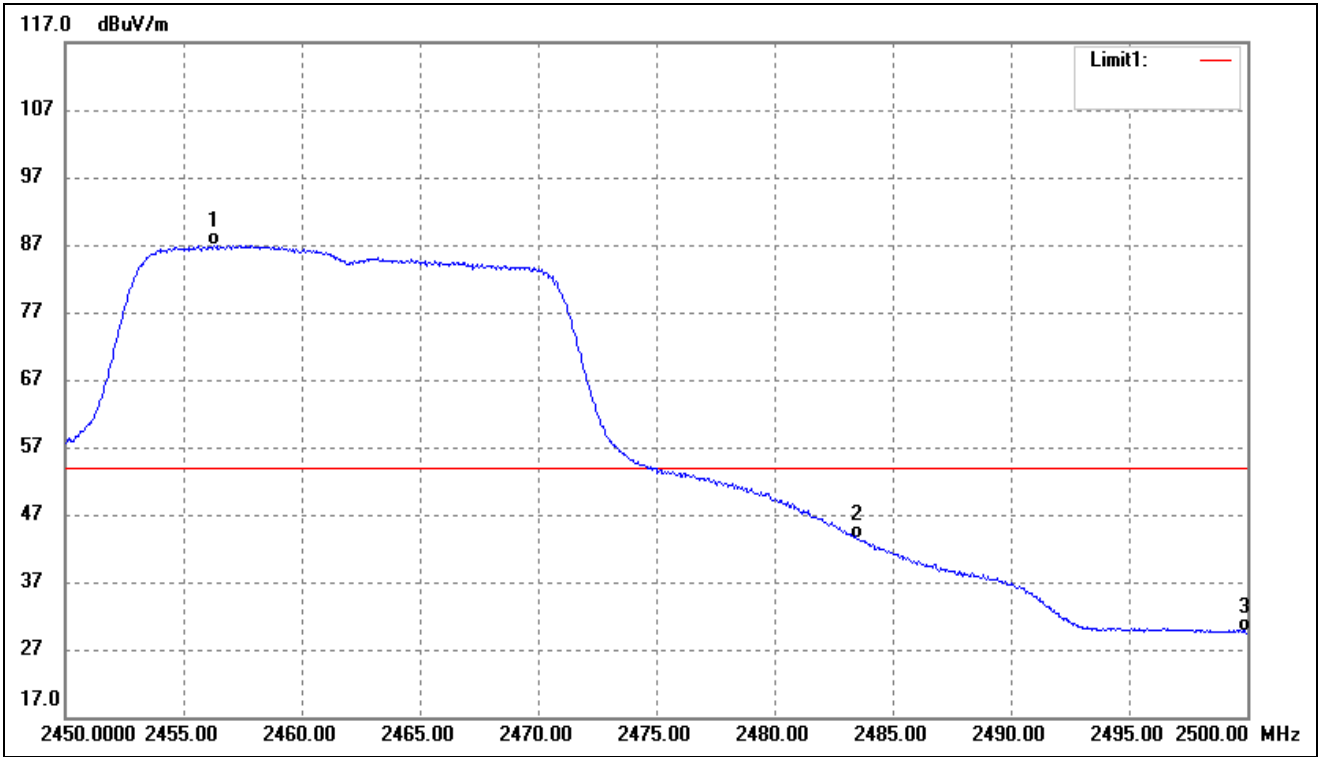


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2456.300	97.45	-10.61	86.84	/	/	Average Detector
	2458.700	108.68	-10.61	98.07	/	/	Peak Detector
2	2483.500	54.07	-10.58	43.49	54.00	-10.51	Average Detector
	2483.500	70.46	-10.58	59.88	74.00	-14.12	Peak Detector
3	2500.000	40.09	-10.55	29.54	54.00	-24.46	Average Detector
	2500.000	51.88	-10.55	41.33	74.00	-32.67	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

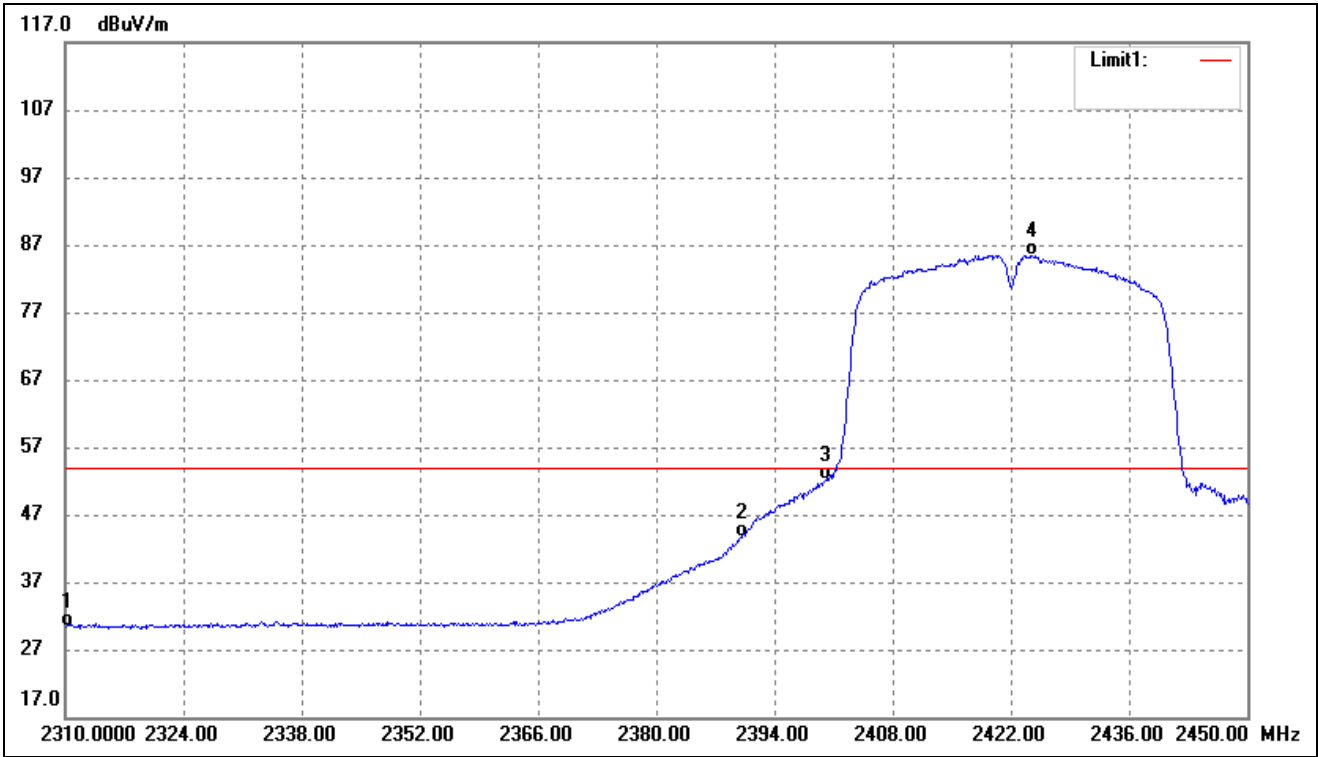

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.14	-10.82	30.32	54.00	-23.68	Average Detector
	2310.000	52.63	-10.82	41.81	74.00	-32.19	Peak Detector
2	2390.000	54.35	-10.70	43.65	54.00	-10.35	Average Detector
	2390.000	70.38	-10.70	59.68	74.00	-14.32	Peak Detector
3	2400.000	62.79	-10.69	52.10	Delta=33.27dBc		Average Detector
4	2424.520	96.02	-10.65	85.37			Average Detector

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Horizontal (worst case)

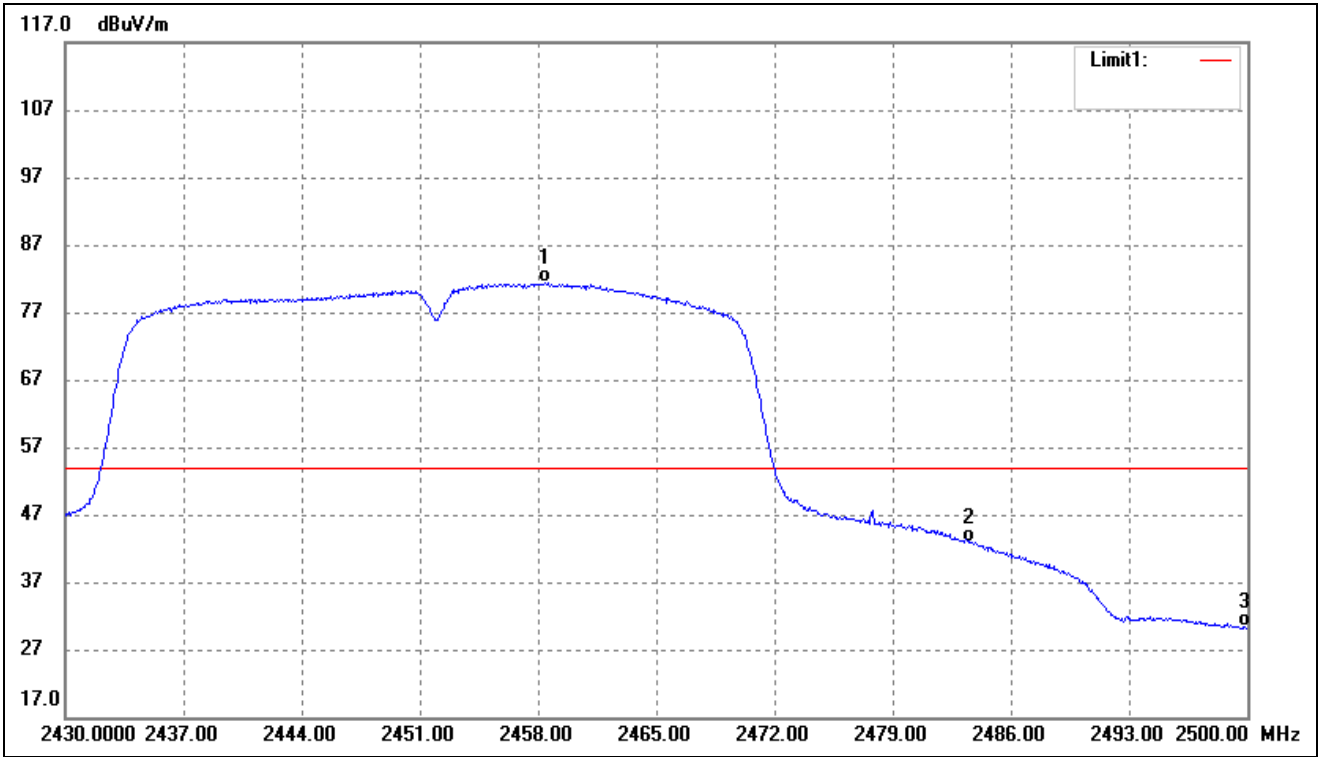

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2458.420	92.01	-10.61	81.40	/	/	Average Detector
	2457.650	104.33	-10.61	93.72	/	/	Peak Detector
2	2483.500	53.41	-10.58	42.83	54.00	-11.17	Average Detector
	2483.500	70.72	-10.58	60.14	74.00	-13.86	Peak Detector
3	2500.000	40.81	-10.55	30.26	54.00	-23.74	Average Detector
	2500.000	53.12	-10.55	42.57	74.00	-31.43	Peak Detector

➤ Conducted test

Please refer to Appendix D

9. Conducted Emissions


9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

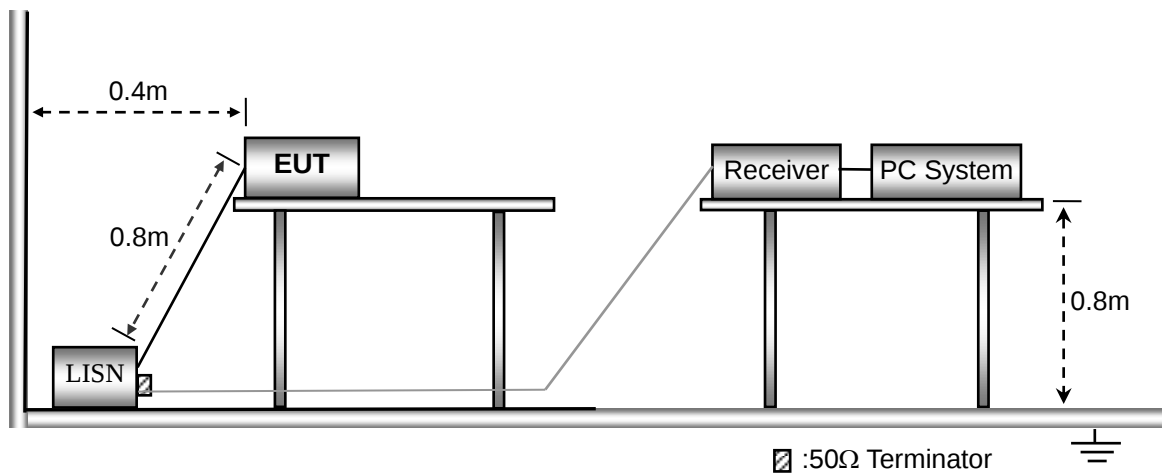


9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

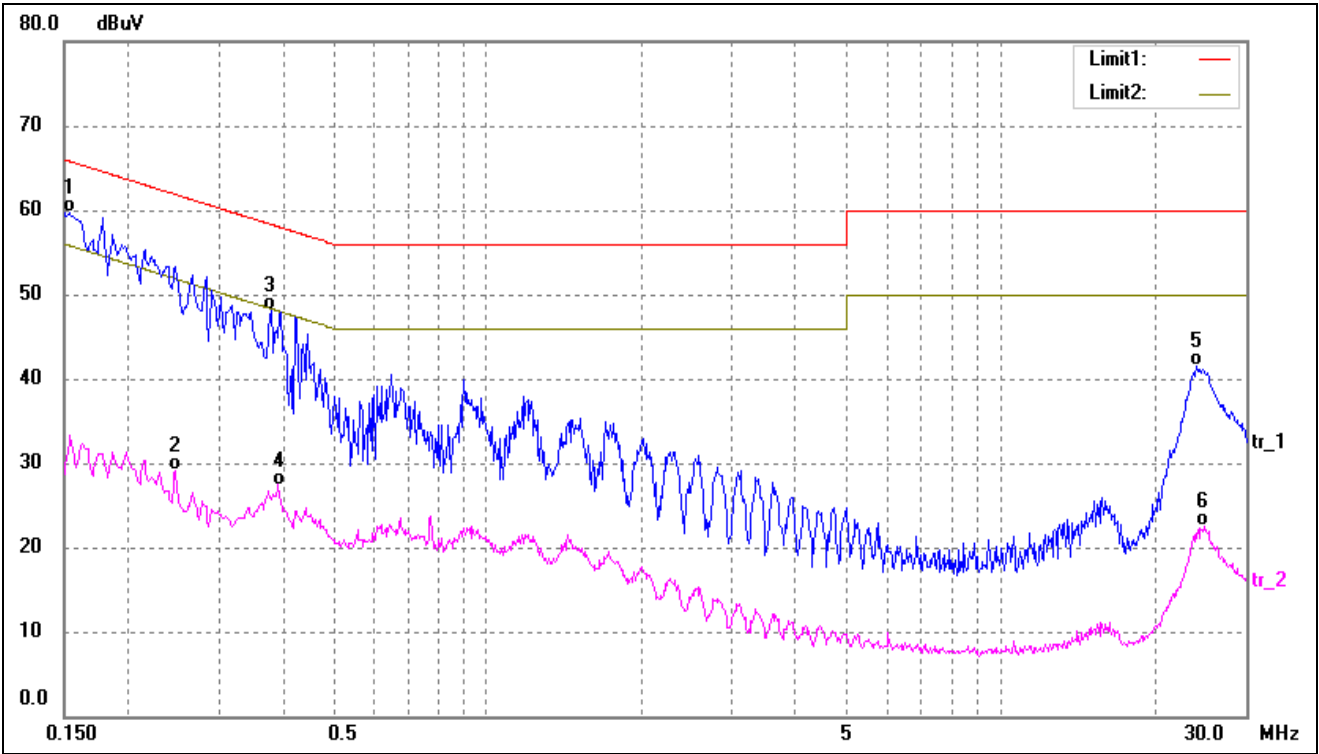

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1532	49.42	10.37	59.79	65.82	-6.03	QP
2	0.2460	18.73	10.35	29.08	51.89	-22.81	AVG
3	0.3780	37.76	10.30	48.06	58.32	-10.26	QP
4	0.3900	17.10	10.30	27.40	48.06	-20.66	AVG
5	24.1260	31.29	10.22	41.51	60.00	-18.49	QP
6	24.8180	12.27	10.21	22.48	50.00	-27.52	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

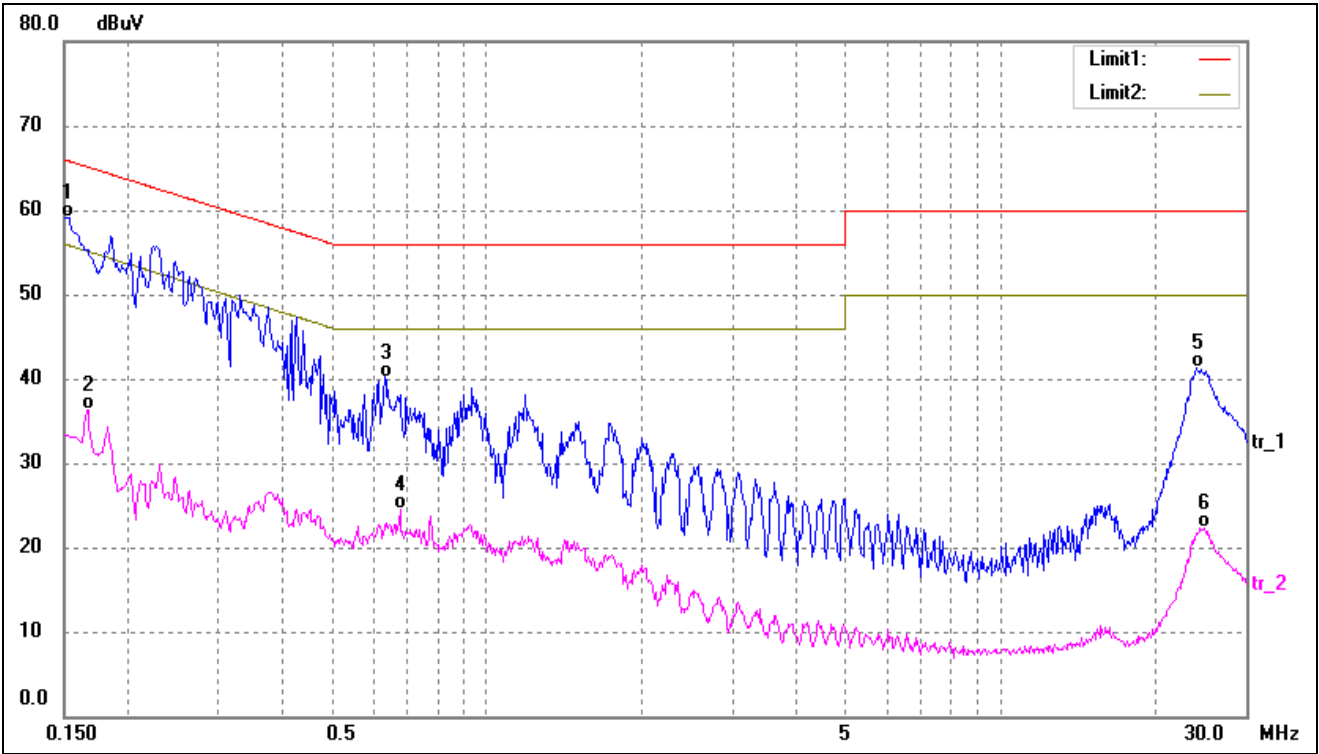

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.1532	48.65	10.37	59.02	65.82	-6.80	QP
2	0.1660	26.01	10.37	36.38	55.16	-18.78	AVG
3	0.6300	29.86	10.34	40.20	56.00	-15.80	QP
4	0.6780	14.23	10.37	24.60	46.00	-21.40	AVG
5	24.0820	31.11	10.22	41.33	60.00	-18.67	QP
6	24.9380	12.15	10.21	22.36	50.00	-27.64	AVG

APPENDIX SUMMARY

Project No.	WTH22X01000806W	Test Engineer	Dashan
Start date	2022/02/20	Finish date	2022/02/22
Temperature	24.5℃	Humidity	47%
RF specifications	WIFI-2.4G		




APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

APPENDIX A

Power Spectral Density			
Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b_11Mbps	2412	-15.23	8
	2437	-15.39	8
	2462	-15.50	8
802.11g_54Mbps	2412	-19.07	8
	2437	-19.14	8
	2462	-19.84	8
802.11n-HT20_MCS7	2412	-19.78	8
	2437	-20.33	8
	2462	-19.98	8
802.11n-HT40_MCS7	2422	-24.16	8
	2437	-23.97	8
	2452	-24.08	8

802.11b-Low	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.41134 GHz -15.23 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.411340000 GHz -15.23 dBm Center 2.412 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11b-Middle	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.43772 GHz -15.39 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.437720000 GHz -15.39 dBm Center 2.437 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11b-High	Agilent R T Ref 10 dBm Atten 20 dB Mkr1 2.46269 GHz -15.5 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.462690000 GHz -15.5 dBm Center 2.462 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

802.11g-Low	Agilent Ref 10 dBm Atten 20 dB Mkr1 2.41947 GHz -19.07 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.419470000 GHz -19.07 dBm Center 2.412 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11g-Middle	Agilent Ref 10 dBm Atten 20 dB Mkr1 2.44201 GHz -19.14 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.442010000 GHz -19.14 dBm Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11g-High	Agilent Ref 10 dBm Atten 20 dB Mkr1 2.45696 GHz -19.84 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 FC AA Marker 2.456960000 GHz -19.84 dBm Center 2.462 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts) Span 30 MHz Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

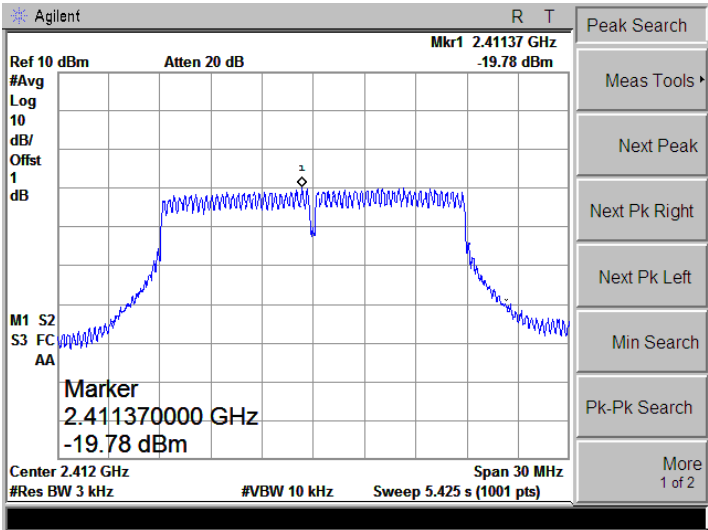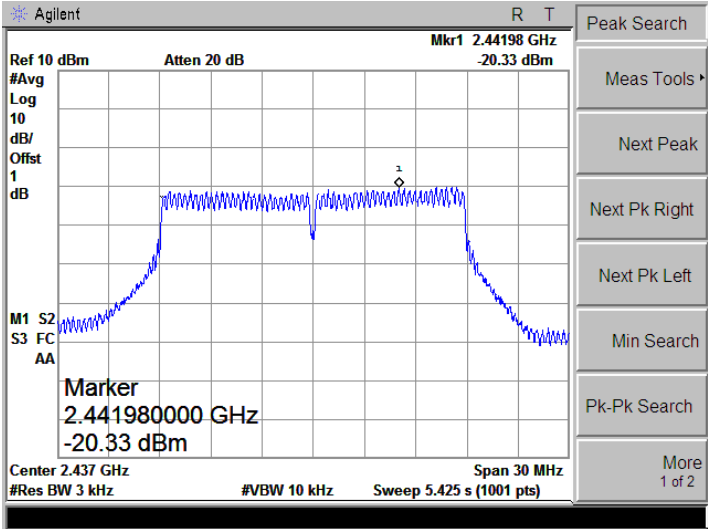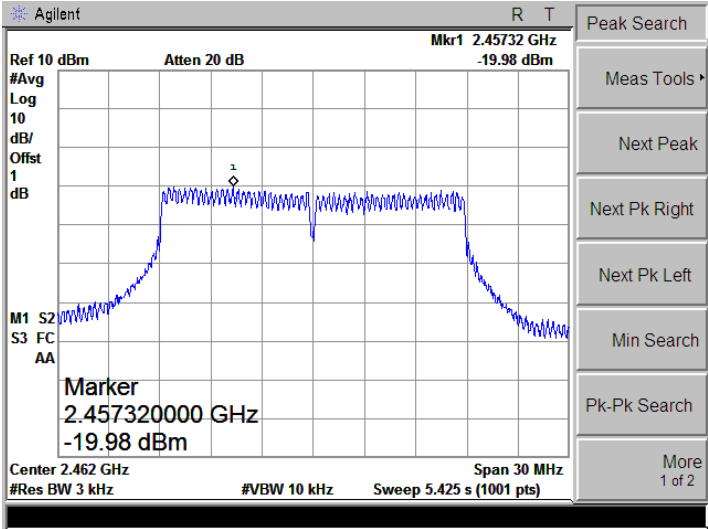802.11n-HT20-Low	
802.11n-HT20-Middle	
802.11n-HT20-High	

802.11n-HT40-Low	Agilent Ref 10 dBm Atten 20 dB Mkr1 2.41072 GHz -24.16 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.410720000 GHz -24.16 dBm Center 2.422 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts) Span 60 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT40-Middle	Agilent Ref 10 dBm Atten 20 dB Mkr1 2.45074 GHz -23.97 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.450740000 GHz -23.97 dBm Center 2.437 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts) Span 60 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11n-HT40-High	Agilent Ref 10 dBm Atten 20 dB Mkr1 2.44948 GHz -24.08 dBm #Avg Log 10 dB/ Offset 1 dB M1 S2 S3 FC AA Marker 2.449480000 GHz -24.08 dBm Center 2.452 GHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts) Span 60 MHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

APPENDIX B

DTS Bandwidth			
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b_11Mbps	2412	8.535	≥500
	2437	8.514	≥500
	2462	8.567	≥500
802.11g_54Mbps	2412	16.302	≥500
	2437	16.396	≥500
	2462	16.398	≥500
802.11n-HT20_MCS7	2412	17.337	≥500
	2437	17.579	≥500
	2462	17.411	≥500
802.11n-HT40_MCS7	2422	35.064	≥500
	2437	35.499	≥500
	2452	35.126	≥500

802.11b-Low	Agilent Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Center 2.41200000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offset 1 dB Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 13.1217 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 109.959 kHz x dB Bandwidth 8.535 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-Middle	Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Center 2.43700000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 13.2456 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 61.483 kHz x dB Bandwidth 8.514 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-High	Agilent Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Center 2.46200000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offset 1 dB Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 13.5361 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -173.663 kHz x dB Bandwidth 8.567 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11g-Low	Agilent Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Center 2.41200000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offset 1 dB Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 16.5030 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 14.646 kHz x dB Bandwidth 16.302 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11g-Middle	Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Center 2.43700000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 16.6315 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 5.026 kHz x dB Bandwidth 16.396 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11g-High	Agilent Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Center 2.462 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offset 1 dB Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 16.7386 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -115.173 kHz x dB Bandwidth 16.398 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT20-Low	Agilent Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Center 2.41200000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offset 1 dB Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 17.6456 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 12.708 kHz x dB Bandwidth 17.337 MHz Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT20-Middle	Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Center 2.43700000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 17.7468 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -7.239 kHz x dB Bandwidth 17.579 MHz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-High	Agilent Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Center 2.46200000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offset 1 dB Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 30 MHz Occupied Bandwidth 17.7574 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -53.556 kHz x dB Bandwidth 17.411 MHz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT40-Low	Agilent Ch Freq 2.422 GHz Trig Free Occupied Bandwidth Center 2.42200000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offst 1 dB Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Occupied Bandwidth 35.8364 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 9.888 kHz x dB Bandwidth 35.064 MHz Freq/Channel Center Freq 2.42200000 GHz Start Freq 2.39200000 GHz Stop Freq 2.45200000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT40-Middle	Agilent Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Center 2.437000000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offst 1 dB Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Occupied Bandwidth 36.0069 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -59.963 kHz x dB Bandwidth 35.499 MHz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent Ch Freq 2.452 GHz Trig Free Occupied Bandwidth Center 2.452000000 GHz Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Offst 1 dB Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Occupied Bandwidth 35.7894 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -11.130 kHz x dB Bandwidth 35.126 MHz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2

APPENDIX C

Test Mode	Frequency MHz	Reading dBm	Limit dBm
802.11b _ 11Mbps	2412	15.08	30.00
	2437	15.20	30.00
	2462	15.11	30.00
802.11g_54Mbps	2412	13.26	30.00
	2437	13.18	30.00
	2462	13.44	30.00
802.11n HT20_MCS7	2412	12.39	30.00
	2437	12.67	30.00
	2462	12.63	30.00
802.11n HT40_MCS7	2422	11.91	30.00
	2437	11.69	30.00
	2452	11.47	30.00

802.11b-Low	Agilent Ch Freq 2.412 GHz Channel Power Center 2.41200000 GHz Ref 20 dBm #Avg Log 10 dB/ Offset 1 dB Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power 15.08 dBm / 20.0000 MHz Power Spectral Density -57.93 dBm/Hz Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Scale Type Log Lin
802.11b-Middle	Agilent Ch Freq 2.437 GHz Channel Power Center 2.437 GHz Ref 20 dBm #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power 15.20 dBm / 20.0000 MHz Power Spectral Density -57.81 dBm/Hz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-High	Agilent Ch Freq 2.462 GHz Channel Power Center 2.462 GHz Ref 20 dBm #Avg Log 10 dB/ Offset 1 dB Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power 15.11 dBm / 20.0000 MHz Power Spectral Density -57.90 dBm/Hz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2




802.11g-Low	Agilent Ch Freq 2.412 GHz Trig Free Channel Power Center 2.41200000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 13.26 dBm / 20.0000 MHz -59.76 dBm/Hz Trace/View Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11g-Middle	Agilent Ch Freq 2.437 GHz Trig Free Channel Power Center 2.43700000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 13.18 dBm / 20.0000 MHz -59.83 dBm/Hz Trace/View Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11g-High	Agilent Ch Freq 2.462 GHz Trig Free Channel Power Center 2.46200000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power Power Spectral Density 13.44 dBm / 20.0000 MHz -59.57 dBm/Hz Trace/View Trace Clear Write Max Hold Min Hold View Blank More 1 of 2


802.11n-HT20-Low	Agilent Ch Freq 2.412 GHz Trig Free Channel Power Center 2.41200000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.412 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power 12.39 dBm / 20.0000 MHz Power Spectral Density -60.62 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-Middle	Agilent Ch Freq 2.437 GHz Trig Free Channel Power Center 2.43700000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.437 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power 12.67 dBm / 20.0000 MHz Power Spectral Density -60.35 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT20-High	Agilent Ch Freq 2.462 GHz Trig Free Channel Power Center 2.46200000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.462 GHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Span 30 MHz Channel Power 12.63 dBm / 20.0000 MHz Power Spectral Density -60.38 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

802.11n-HT40-Low	Agilent Ch Freq 2.422 GHz Channel Power Center 2.422000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.422 GHz #Res BW 1 MHz #VBW 3 MHz Span 60 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 11.91 dBm / 40.0000 MHz -64.11 dBm/Hz Freq/Channel Center Freq 2.42200000 GHz Start Freq 2.39200000 GHz Stop Freq 2.45200000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT40-Middle	Agilent Ch Freq 2.437 GHz Channel Power Center 2.437000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Span 60 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 11.69 dBm / 40.0000 MHz -64.33 dBm/Hz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11n-HT40-High	Agilent Ch Freq 2.452 GHz Channel Power Center 2.452000000 GHz Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offset 1 dB Center 2.452 GHz #Res BW 1 MHz #VBW 3 MHz Span 60 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 11.47 dBm / 40.0000 MHz -64.55 dBm/Hz Trace/View 1 2 3 Trace Clear Write Max Hold Min Hold View Blank More 1 of 2


APPENDIX D




Conducted Out of Band Emissions

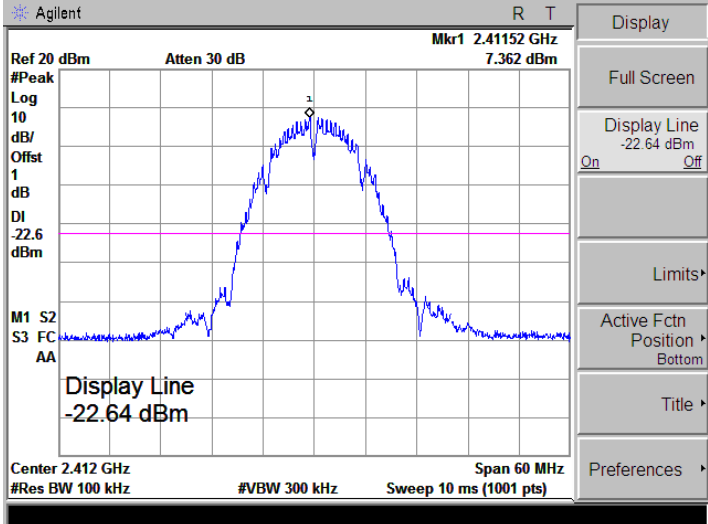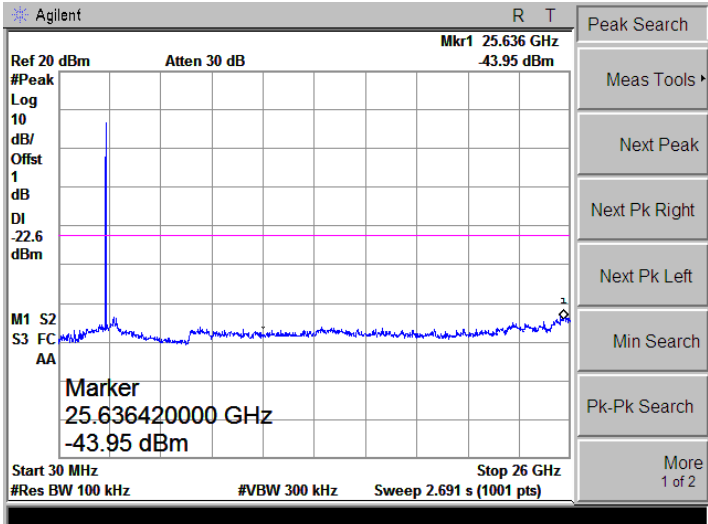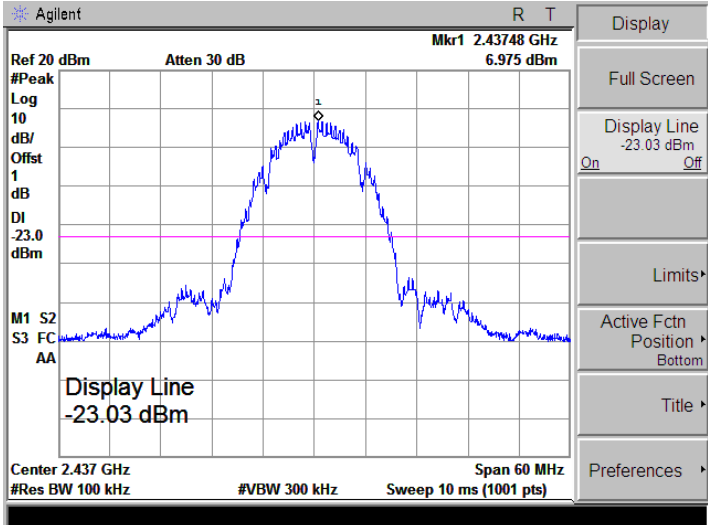
802.11b-Low	
	
802.11b-Middle	



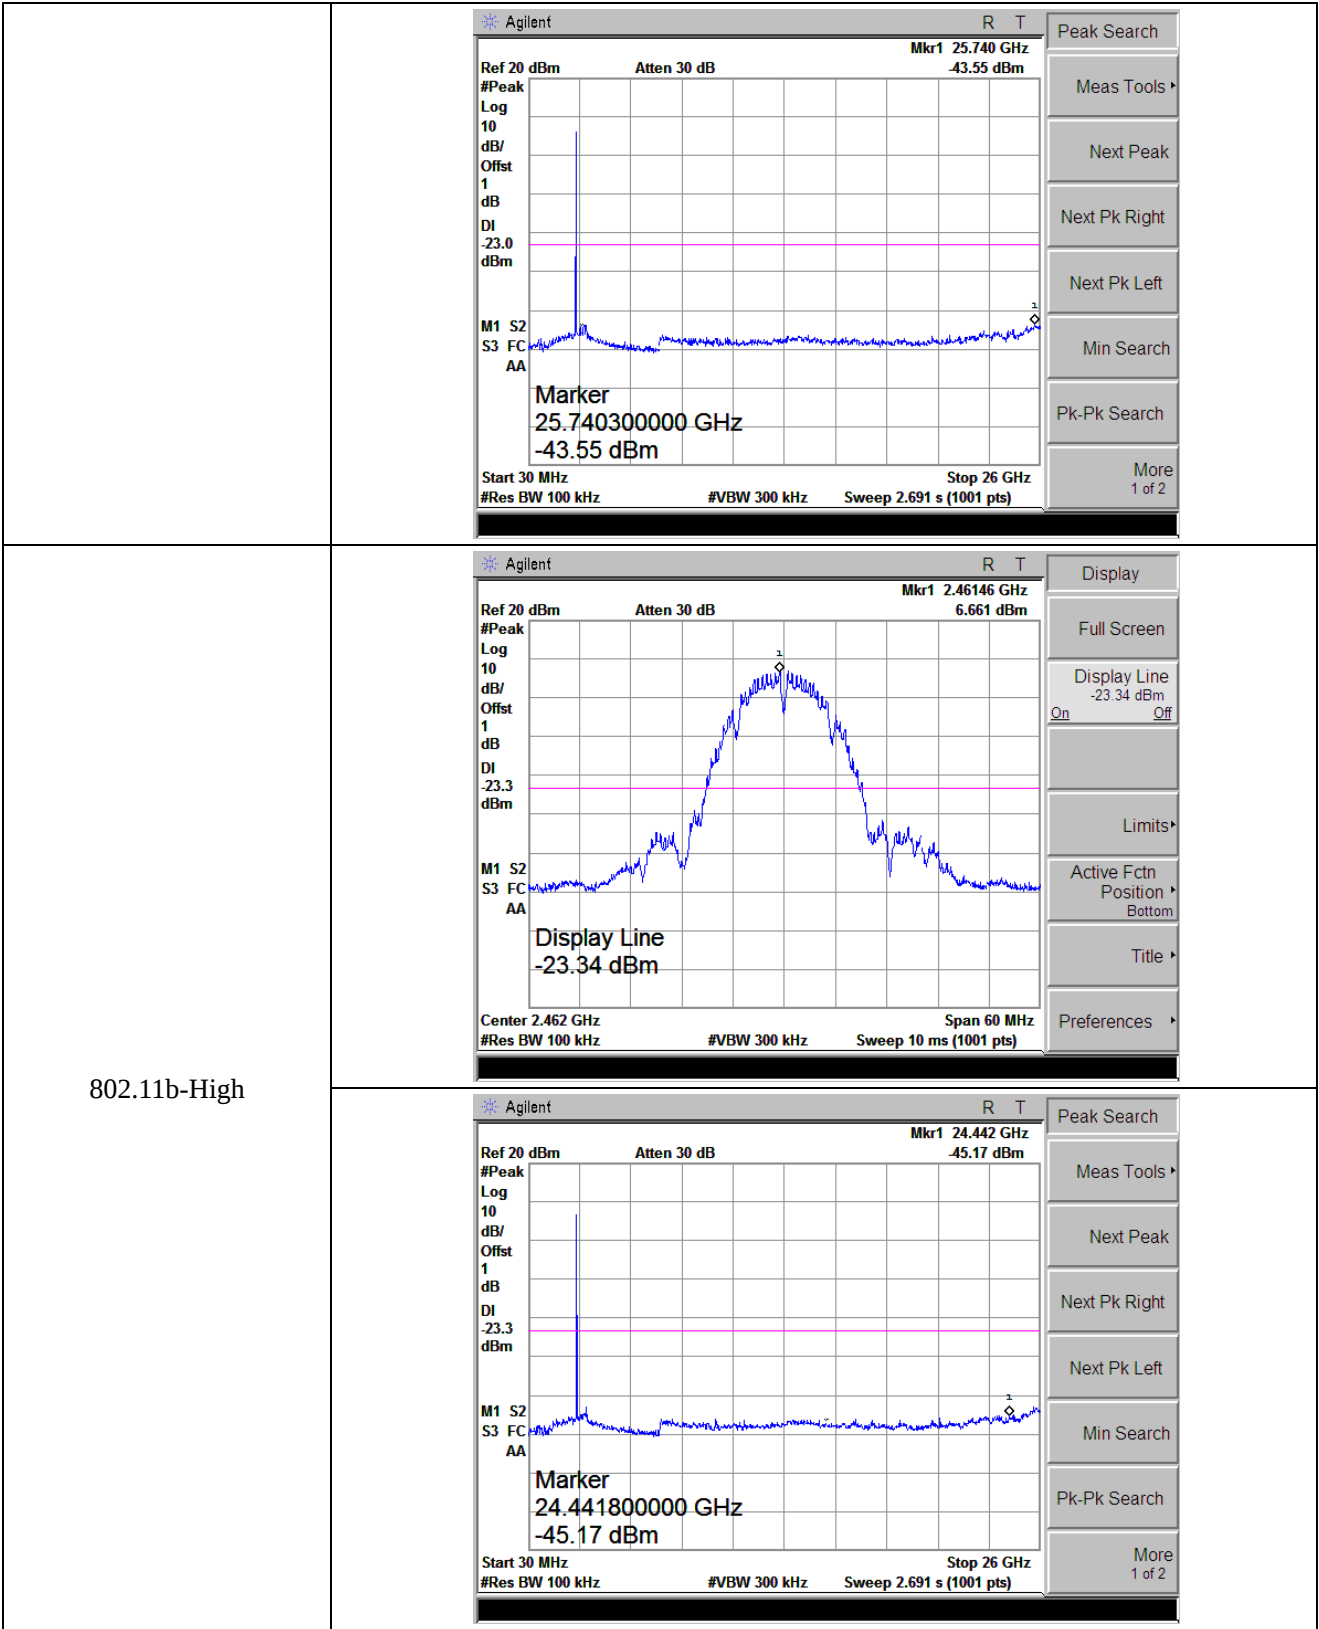



802.11g-Low	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.41698 GHz 3.289 dBm #Peak Log 10 dB/ Offset 1 dB DI -26.7 dBm M1 S2 S3 FC AA Display Line -26.71 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Display Full Screen Display Line -26.71 dBm On Off Limits Active Fctn Position Bottom Title Preferences
	Agilent Ref 20 dBm Atten 30 dB Mkr1 25.221 GHz 45.27 dBm #Peak Log 10 dB/ Offset 1 dB DI -26.7 dBm M1 S2 S3 FC AA Marker 25.220900000 GHz -45.27 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.691 s (1001 pts) Stop 26 GHz Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2
802.11g-Middle	Agilent Ref 20 dBm Atten 30 dB Mkr1 2.44450 GHz 3.724 dBm #Peak Log 10 dB/ Offset 1 dB DI -26.3 dBm M1 S2 S3 FC AA Display Line -26.28 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 60 MHz Display Full Screen Display Line -26.28 dBm On Off Limits Active Fctn Position Bottom Title Preferences

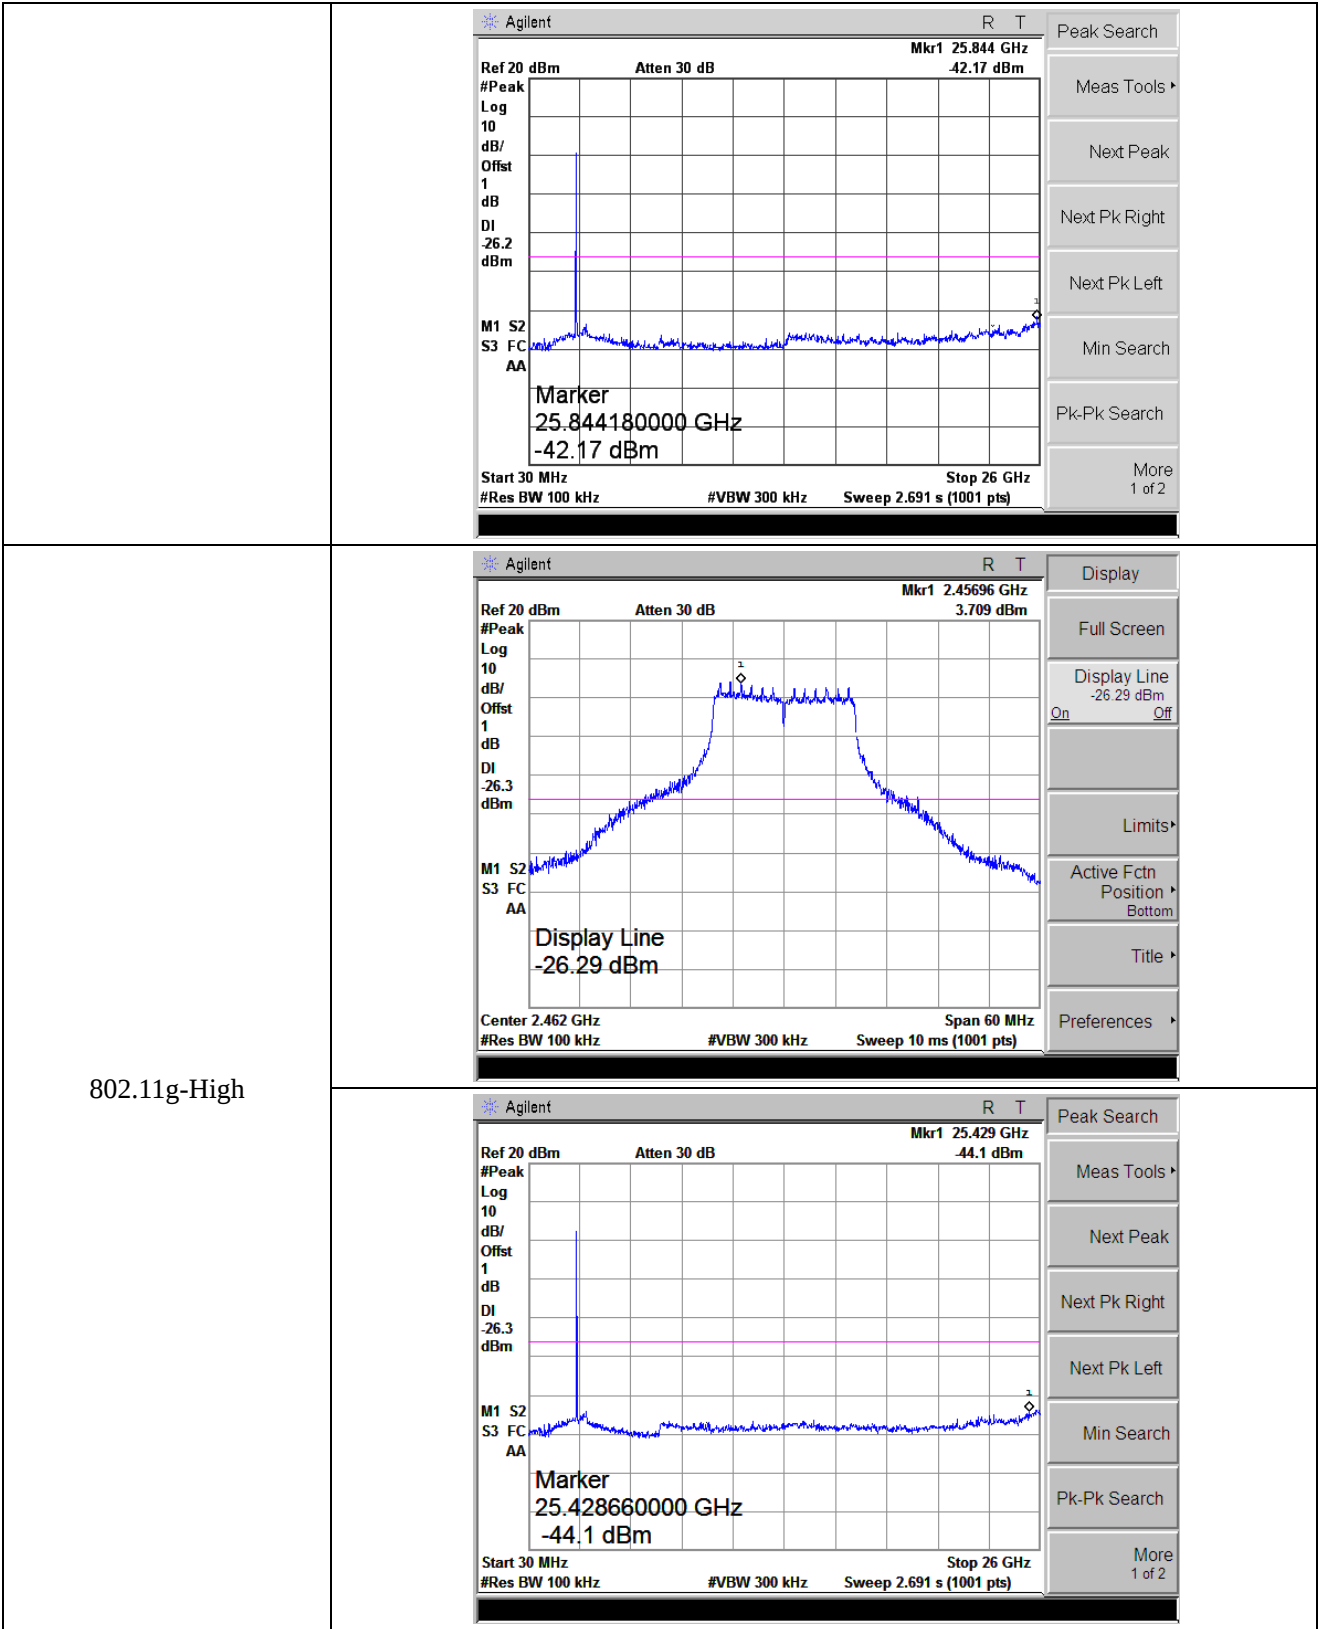

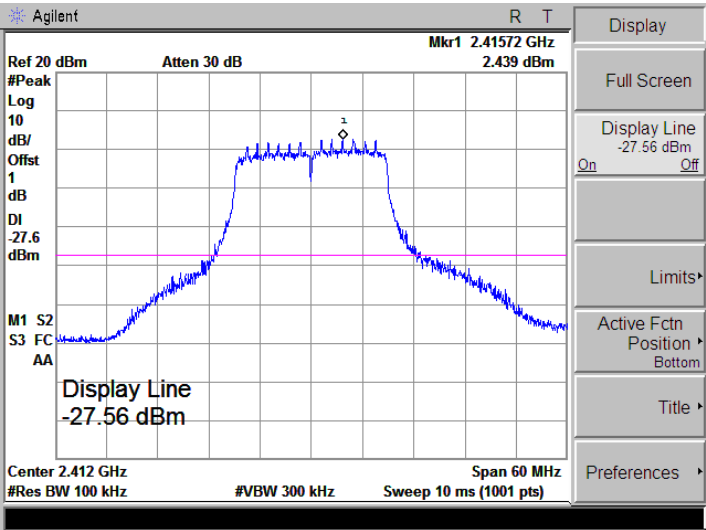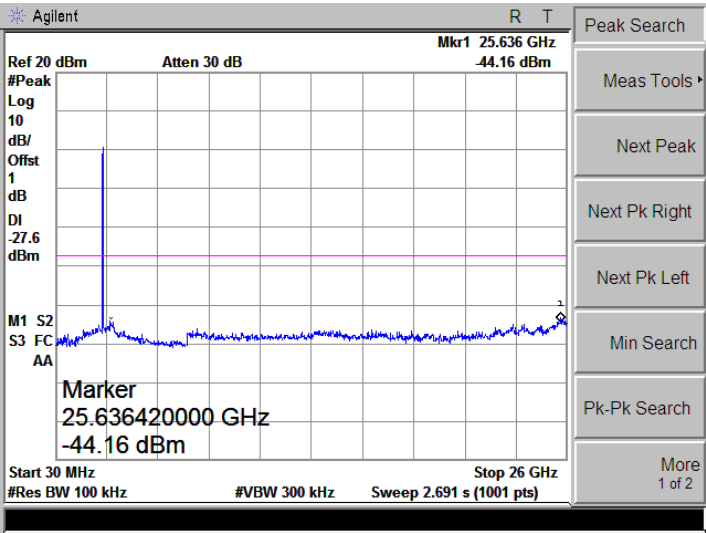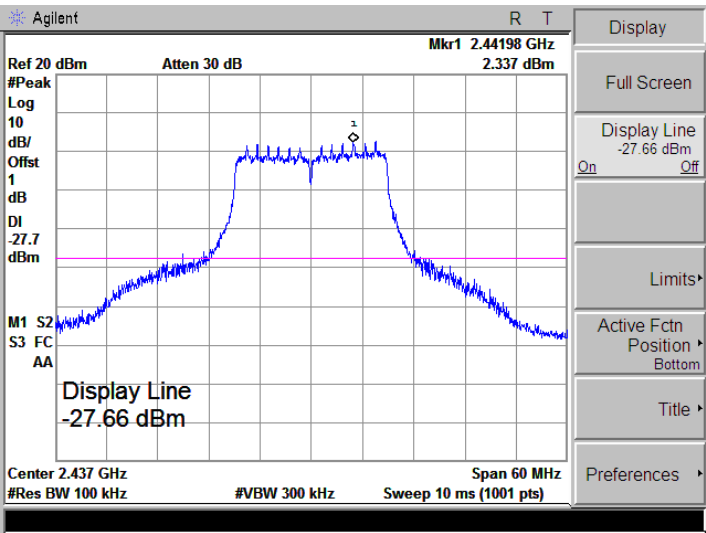802.11n-HT20-Low	
	
802.11n-HT20-Middle	

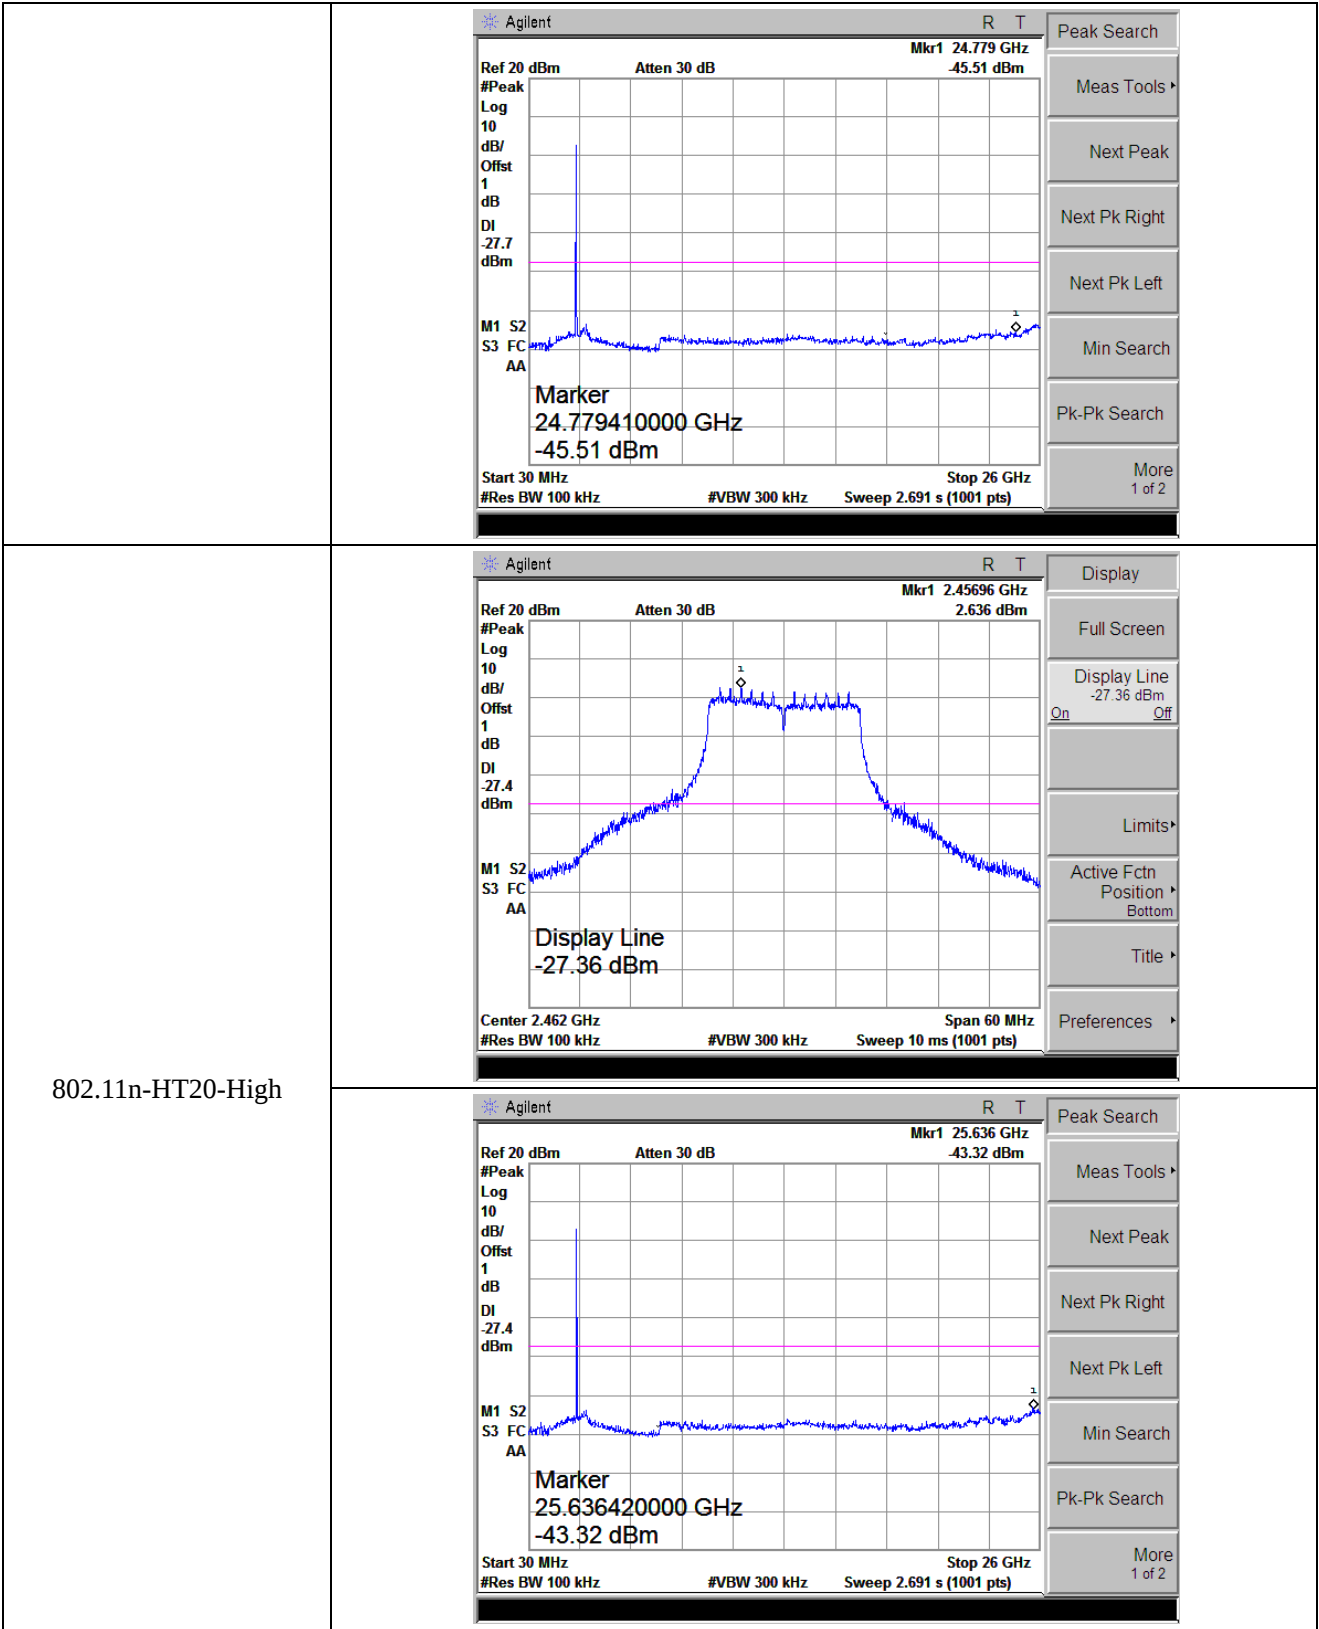

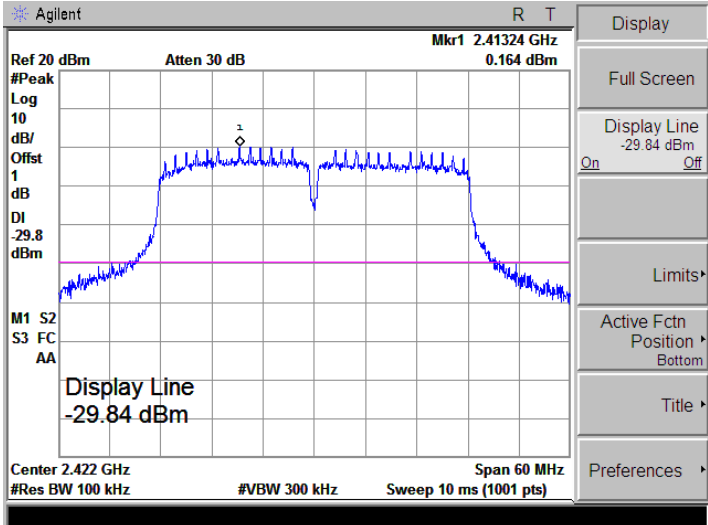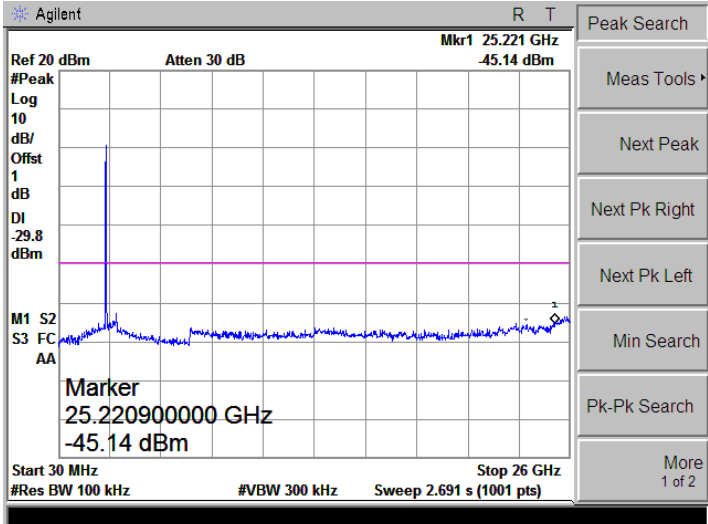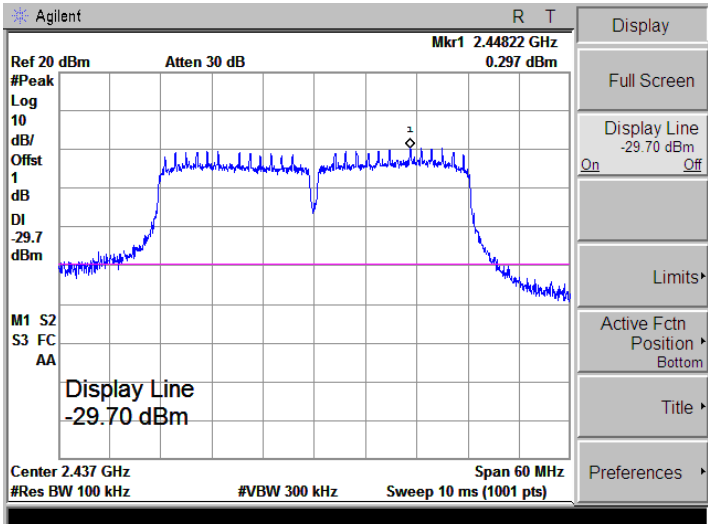802.11n-HT40-Low	
	
802.11n-HT40-Middle	

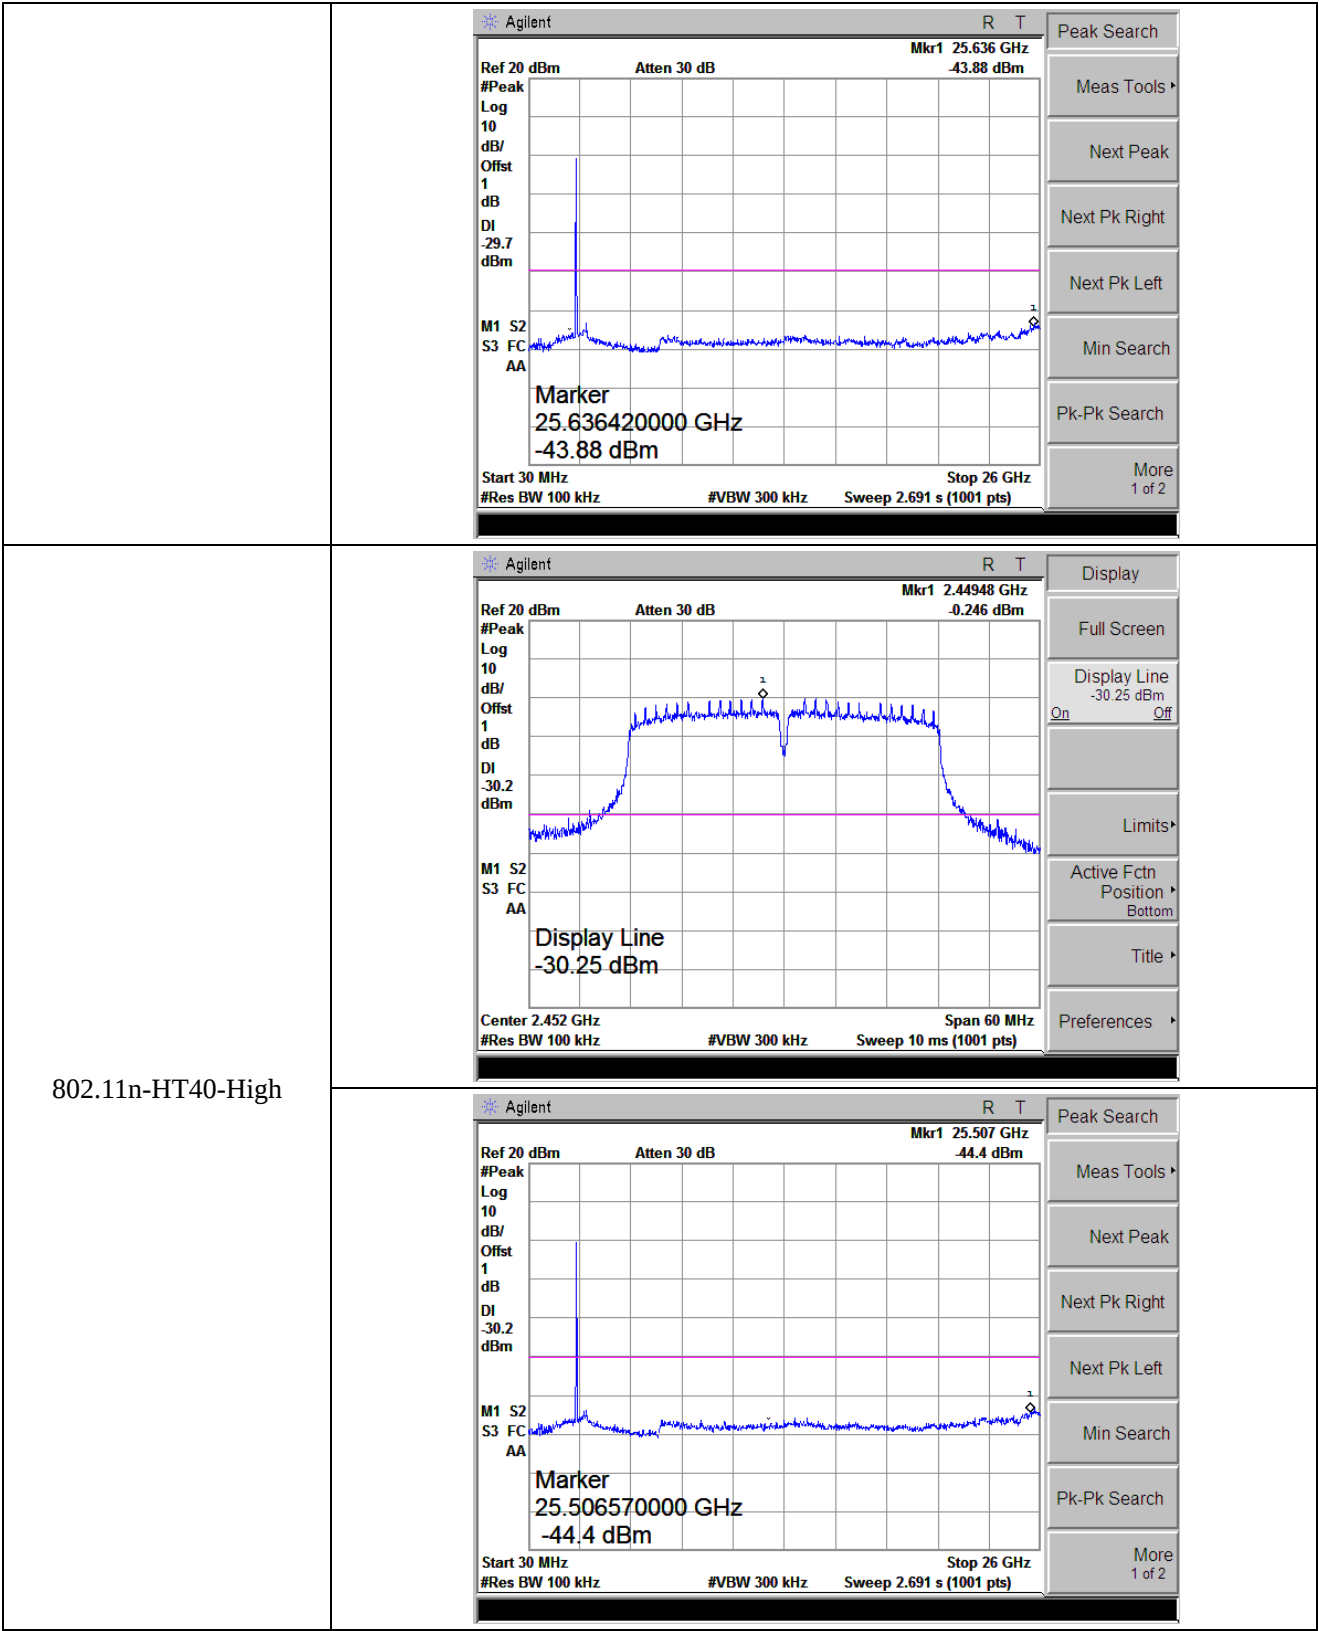

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******