



# EMC TEST REPORT

**Applicant** ZTE Corporation

**FCC ID** SRQ-ZTEBLADEA6MAX

**Product** LTE/WCDMA/GSM(GPRS)  
Multi-Mode Digital Mobile Phone

**Model** ZTE BLADE A6 MAX、ZTE BLADE  
A0605、BLADE A6 MAX

**Report No.** RXA1711-0356EMC

**Issue Date** November 24, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2017)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Wei Liu*

*Guangchang Fan*

*Performed by: Wei Liu/ Manager*

*Approved by: Guangchang Fan/ Director*

**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Client Information.....	6
2.2	General information.....	6
2.3	Applied Standards.....	7
2.4	Test Mode.....	8
3	Test Case Results .....	9
3.1	Radiated Emission .....	9
3.2	Conducted Emission .....	15
4	Main Test Instrument.....	18
	ANNEX A: The EUT Appearance and Test Configuration.....	19
	A.1 EUT Appearance .....	19
	A.2 Test Setup.....	22
	A.3 Auxiliary test equipment.....	24



### Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	15.107, ANSI C63.4-2014	PASS
Test Date: November 1, 2017~ November 22, 2017			

# 1 Test Laboratory

## 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement any government agencies.

## 1.2 Test facility

### **CNAS (accreditation number: L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

### **VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



### 1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2 General Description of Equipment under Test

### 2.1 Client Information

<b>Applicant</b>	ZTE Corporation
<b>Applicant address</b>	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
<b>Manufacturer</b>	ZTE Corporation
<b>Manufacturer address</b>	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

### 2.2 General information

EUT Description	
Device Type:	Portable Device
Model Number:	ZTE BLADE A6 MAX、ZTE BLADE A0605、BLADE A6 MAX
IMEI:	867224030006579
HW Version:	tyuA
SW Version:	TEL_MX_P809F15V1.0.0
Antenna Type:	Internal Antenna
Test Mode:	Transfer Data Mode
EUT Accessory	
Adapter	Manufacturer: SHENZHEN RUIJING INDUSTRIAL CO LTD Model: STC-A515A-Z
Battery	Manufacturer: SCUD (FUJIAN) Electronics Co., Ltd. Model: Li3939T44P8h856743
Earphone	Manufacturer: GoerTek Inc Model: HA3-3
USB Cable 1	Manufacturer: Chuan electronics co., ltd USB length 70cm ,shielding cable
USB Cable 2	Manufacturer: KoEY Huaxing electronics co., ltd USB length 70cm ,shielding cable
Auxiliary test equipment	
PC	PC Manufacturer: lenovo Model: Thinkpad T540p (SN : SL10E37685)
Remark: The information of the EUT is declared by the manufacturer.	



## 2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

### Test standards

**FCC Code CFR47 Part15B (2017)**

**ANSI C63.4 (2014)**

## 2.4 Test Mode

Test Mode	
Mode 1:	Adapter + USB cable+ earphone + Camera On +GPS Rx +Idle
Mode 2:	Adapter + USB cable+ earphone +Idle
Mode 3:	Adapter + USB cable +Idle
Mode 4:	USB Copy(EUT with PC) + USB cable +earphone + Camera On + GPS Rx +Idle
Mode 5:	Camera On +earphone + GPS Rx +Idle
Mode 6:	Earphone +Idle

During the test, the preliminary test was performed in all modes (Camera /GPS) with all frequency bands (GSM/ WCDMA/ LTE/ BT/ Wi-Fi), mode 4 (with Camera + GPS Rx + GSM/ WCDMA/ LTE/ BT/ Wi-Fi idle) selected as the worst condition. The test data of the worst-case condition was recorded in this report.



### 3 Test Case Results

#### 3.1 Radiated Emission

##### Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa

##### Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=1MHz / VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.


During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

## Test Setup

### Below 1GHz

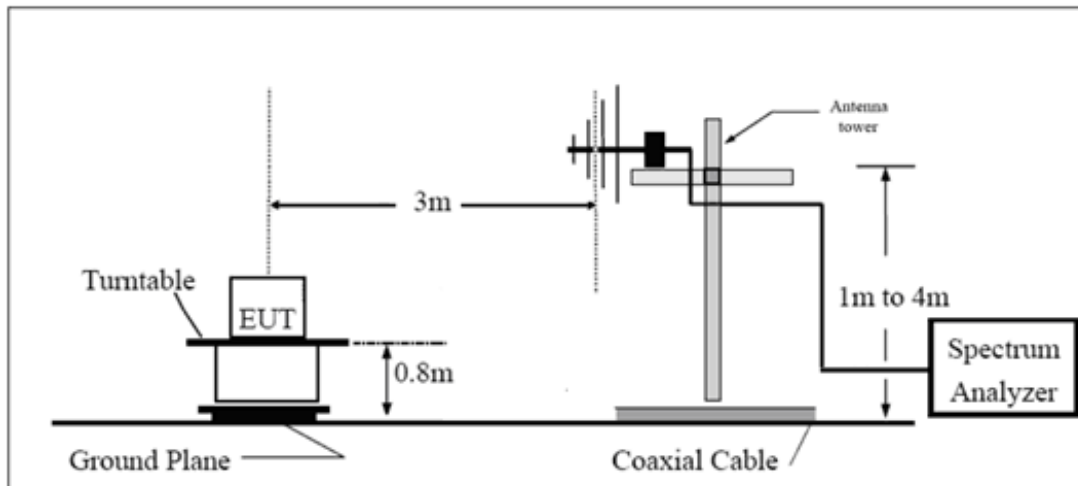

### Above 1GHz

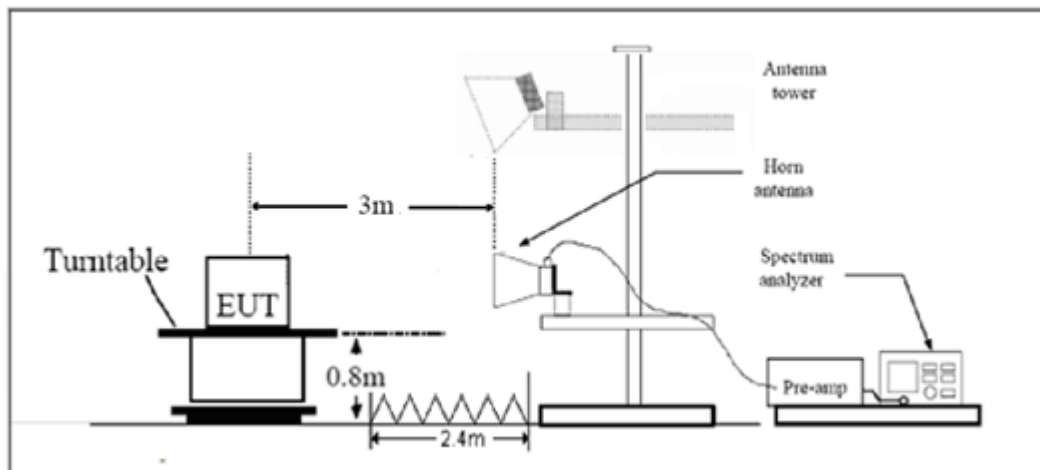

Note: Area side:2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

**Limits**

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 <sup>th</sup> harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak


**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .  $U = 3.92$  dB.

## Test Results

The following graphs display the maximum values of horizontal and vertical by software.  
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

FCC RE 0.03-1GHz QP Class B

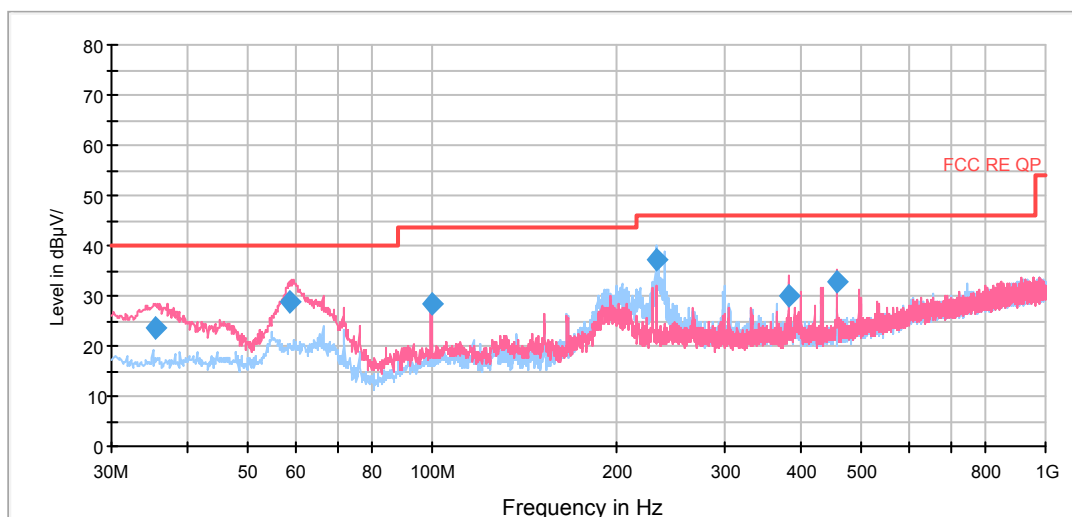


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
35.533750	23.6	11.4	100.0	V	0.0	12.2	16.4	40.0
58.537500	28.6	15.9	100.0	V	275.0	12.7	11.4	40.0
99.757500	28.4	15.2	100.0	V	86.0	13.2	15.1	43.5
232.770000	37.3	23.9	125.0	H	80.0	13.4	8.7	46.0
380.533750	30.0	11.9	125.0	V	0.0	18.1	16.0	46.0
458.376250	32.9	13.9	100.0	V	0.0	19.0	13.1	46.0

**Remark:** 1. Quasi-Peak = Reading value + Correction factor  
2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)  
3. Margin = Limit – Quasi-Peak

RE 1G-6GHz PK+AV

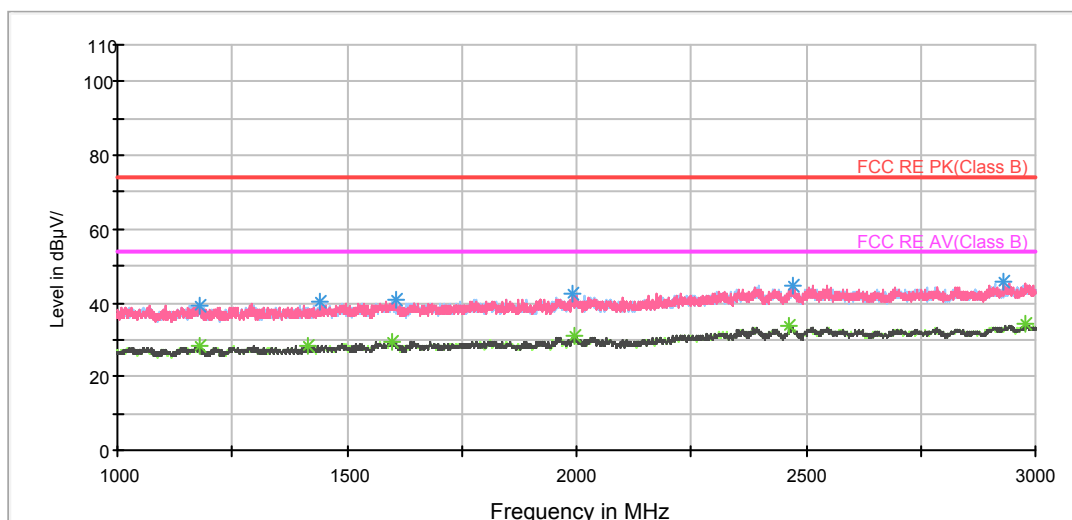


Radiated Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1179.750000	39.2	47.0	100.0	V	76.0	-7.8	34.8	74
1439.500000	40.2	47.3	100.0	H	60.0	-7.1	33.8	74
1605.750000	41.0	46.9	100.0	V	0.0	-5.9	33.0	74
1992.500000	42.6	47.2	100.0	V	122.0	-4.6	31.4	74
2472.250000	44.6	46.7	100.0	H	180.0	-2.1	29.4	74
2930.500000	45.7	47.3	100.0	V	102.0	-1.6	28.3	74

Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1177.750000	28.1	35.9	100.0	V	0.0	-7.8	25.9	54
1412.750000	28.2	35.6	100.0	H	193.0	-7.4	25.8	54
1599.250000	29.4	35.4	100.0	H	246.0	-6.0	24.6	54
1997.750000	31.0	35.6	100.0	H	272.0	-4.6	23.0	54
2463.250000	33.7	35.8	100.0	H	137.0	-2.1	20.3	54
2979.250000	34.3	35.6	100.0	H	265.0	-1.3	19.7	54

RE 3-18GHz PK+AV

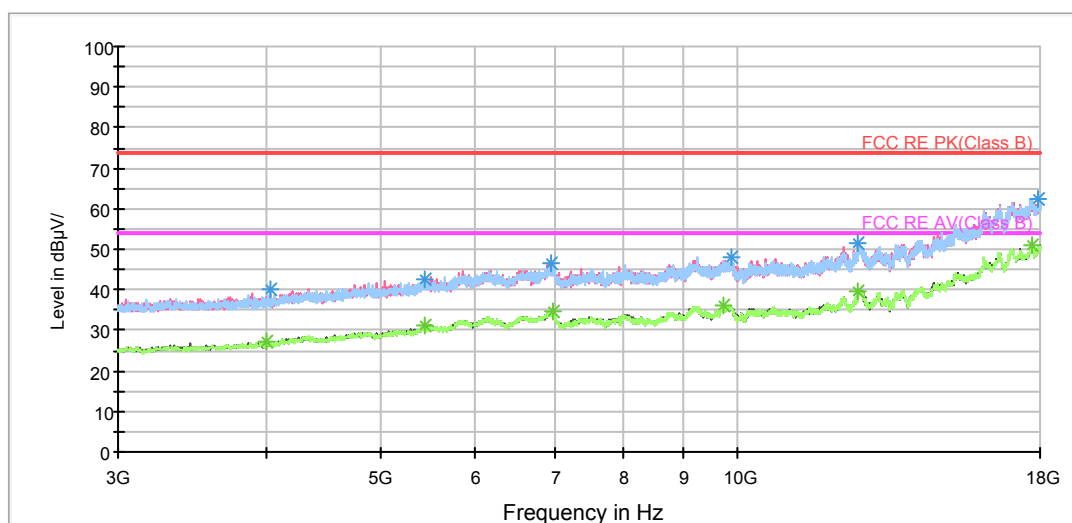

Radiated Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4038.750000	40.0	41.0	100.0	H	330.0	-1.0	34.0	74
5445.000000	42.5	39.6	100.0	H	0.0	2.9	31.5	74
6948.750000	46.4	40.2	100.0	H	0.0	6.2	27.6	74
9871.875000	47.9	37.6	100.0	H	63.0	10.3	26.1	74
12648.750000	51.7	37.5	100.0	V	310.0	14.2	22.3	74
17898.750000	62.4	37.3	100.0	V	128.0	25.1	11.6	74

Frequency (MHz)	Average (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4005.000000	27.0	28.1	100.0	V	80.0	-1.1	27.0	54
5439.375000	31.1	28.2	100.0	V	249.0	2.9	22.9	54
6993.750000	34.6	28.1	100.0	V	174.0	6.5	19.4	54
9742.500000	36.1	26.1	100.0	H	109.0	10.0	17.9	54
12650.625000	39.8	25.7	100.0	H	33.0	14.1	14.2	54
17718.750000	50.8	26.2	100.0	H	78.0	24.6	3.2	54

## 3.2 Conducted Emission

### Ambient condition


Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

### Test Setup

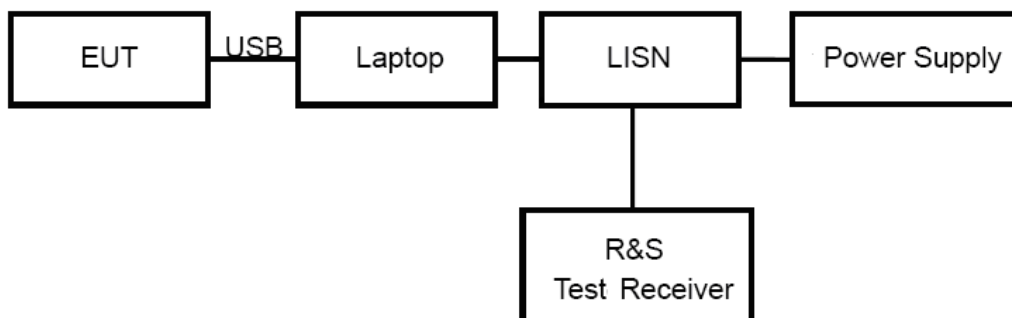

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

### Limits


Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .  $U = 2.69$  dB.

## Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

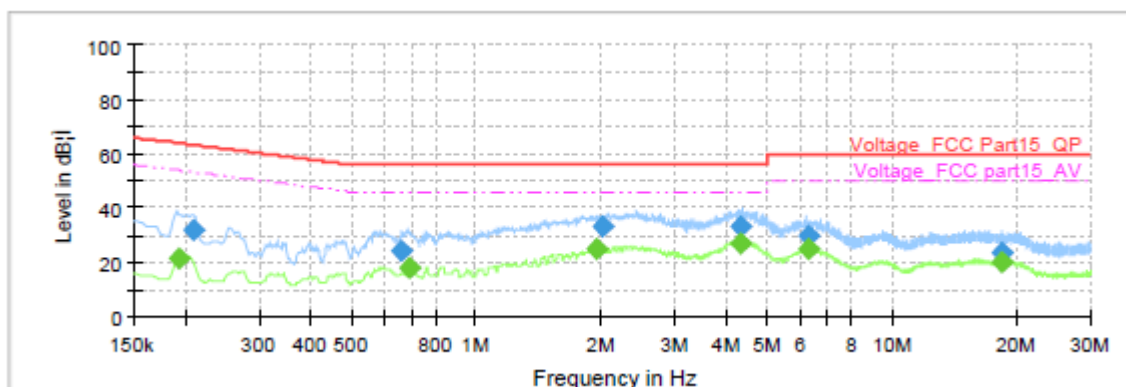


## Final Result

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter
0.192750	---	21.37	53.92	32.54	1000.0	9.000	L1	ON
0.208500	31.93	---	63.27	31.33	1000.0	9.000	L1	ON
0.658500	24.16	---	56.00	31.84	1000.0	9.000	L1	ON
0.690000	---	17.86	46.00	28.14	1000.0	9.000	L1	ON
1.941000	---	25.34	46.00	20.66	1000.0	9.000	L1	ON
2.013000	33.65	---	56.00	22.35	1000.0	9.000	L1	ON
4.314750	33.41	---	56.00	22.59	1000.0	9.000	L1	ON
4.317000	---	26.99	46.00	19.01	1000.0	9.000	L1	ON
6.279000	---	24.65	50.00	25.35	1000.0	9.000	L1	ON
6.308250	29.52	---	60.00	30.48	1000.0	9.000	L1	ON
18.442500	---	19.92	50.00	30.08	1000.0	9.000	L1	ON
18.460500	23.64	---	60.00	36.36	1000.0	9.000	L1	ON

L line

Conducted Emission from 150 KHz to 30 MHz



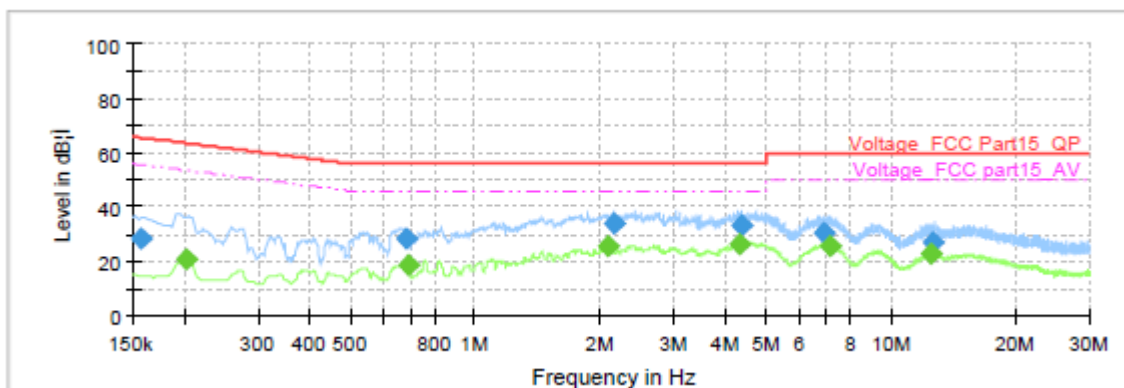

## Final Result

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter
0.156750	28.34	---	65.63	37.29	1000.0	9.000	N	ON
0.201750	---	20.72	53.54	32.82	1000.0	9.000	N	ON
0.681000	28.23	---	56.00	27.77	1000.0	9.000	N	ON
0.687750	---	18.65	46.00	27.35	1000.0	9.000	N	ON
2.073750	---	25.82	46.00	20.18	1000.0	9.000	N	ON
2.145750	34.29	---	56.00	21.71	1000.0	9.000	N	ON
4.348500	---	26.64	46.00	19.36	1000.0	9.000	N	ON
4.362000	33.30	---	56.00	22.70	1000.0	9.000	N	ON
6.913500	30.78	---	60.00	29.22	1000.0	9.000	N	ON
7.104750	---	25.88	50.00	24.12	1000.0	9.000	N	ON
12.540750	---	22.91	50.00	27.09	1000.0	9.000	N	ON
12.653250	26.85	---	60.00	33.15	1000.0	9.000	N	ON

N line

Conducted Emission from 150 KHz to 30 MHz

## 4 Main Test Instrument

Name	Manufacturer	Type	Serial Number	Last Cal.	Cal. Due Date
Signal Analyzer	R&S	FSV30	100815	2016-12-16	2017-12-15
EMI Test Receiver	R&S	ESCI	100948	2017-05-20	2018-05-19
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-02-18	2019-02-17
Trilog Antenna	SCHWARZBECK	VULB 9163	9163-201	2014-12-06	2017-12-05
Horn Antenna	R&S	HF907	100126	2014-12-06	2017-12-05
Horn Antenna	ETS-Lindgren	3160-09	00102643	2015-01-30	2018-01-29
EMI Test Receiver	R&S	ESCS30	100138	2016-12-16	2017-12-15
LISN	R&S	ENV216	101171	2016-12-16	2019-12-15
Bore Sight Antenna mast	ETS	2171B	00058752	NA	NA

## ANNEX A: The EUT Appearance and Test Configuration

### A.1 EUT Appearance



Front Side



Back Side

a: EUT



b: Adapter



c :Earphone







d : USB Cable

Picture 1 EUT

## A.2 Test Setup

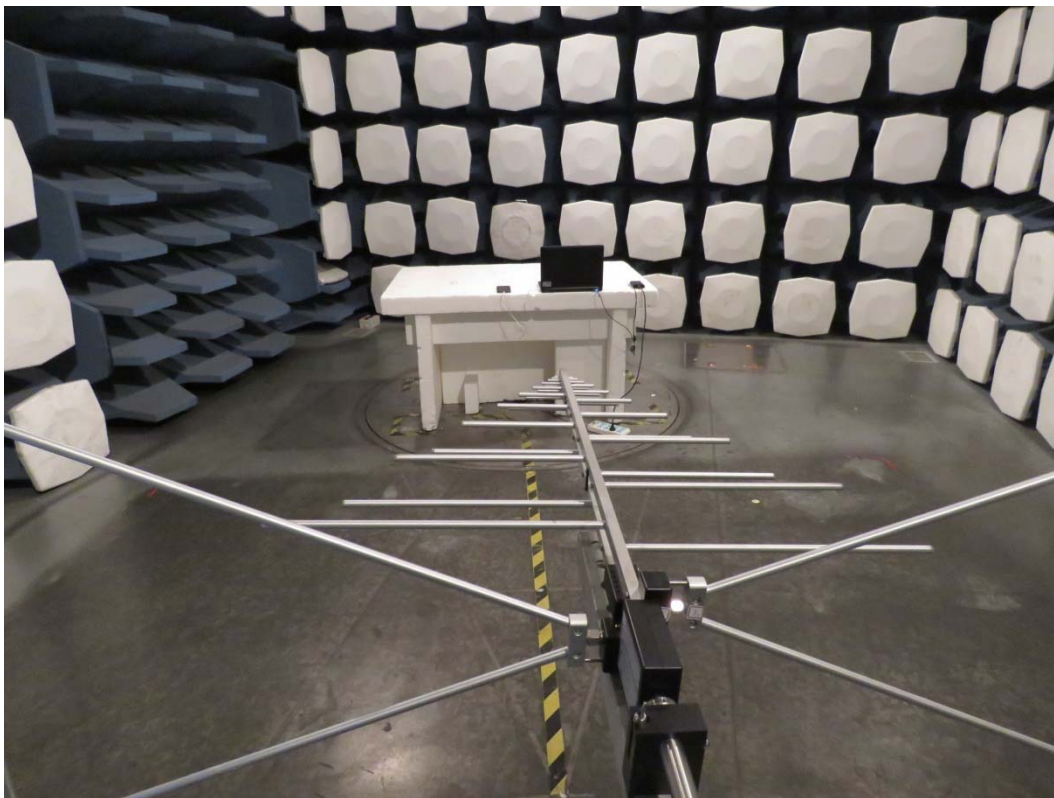

a: Below 1GHz

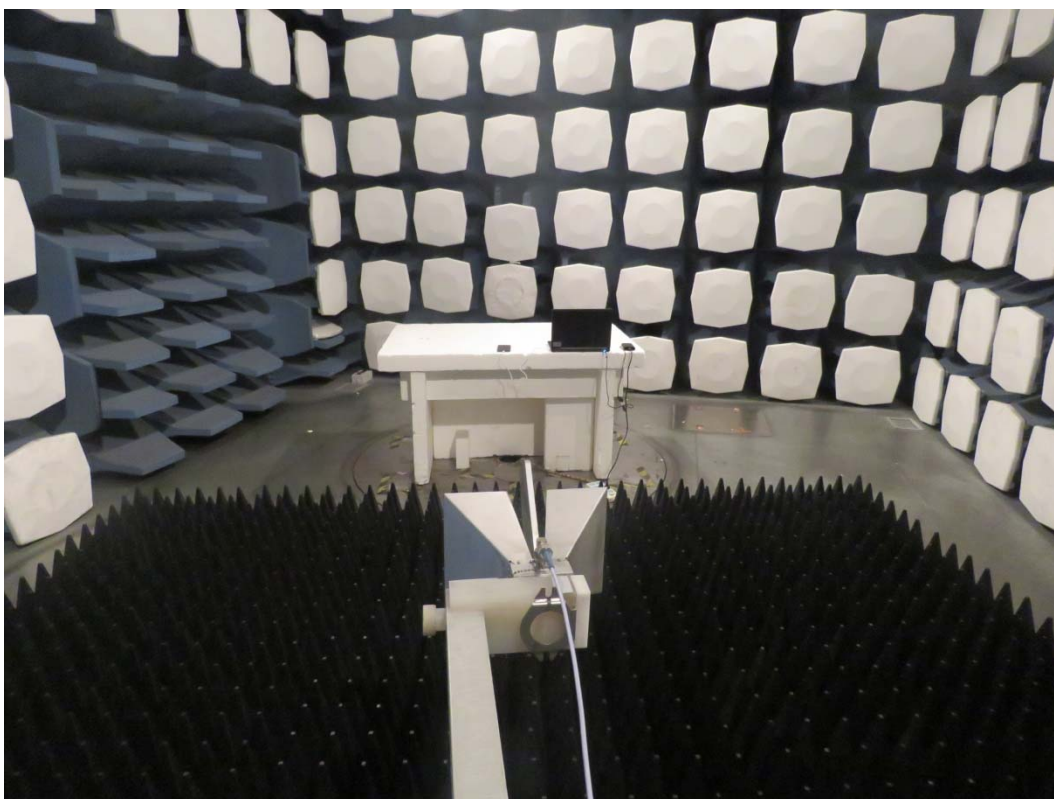

b: Above 1GHz

**Picture 2 Radiated Emission Test Setup**



**Picture 3 Conducted Emission Test Setup**



### A.3 Auxiliary test equipment

