




FCC RADIO TEST REPORT

FCC ID : B94HNI57CPS
Equipment : Notebook Computer
Brand Name : HP
Model Name : HSN-I57C
Applicant : HP Inc.
1501 Page Mill Road, Palo Alto CA 94304 USA
Standard : FCC 47 CFR Part 2, Part 27(D)

The product was received on Sep. 04, 2023 and testing was performed from Sep. 29, 2023 to Oct. 06, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Site.....	6
1.4 Applied Standards	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	7
2.3 Support Unit used in test configuration and system	8
2.4 Frequency List of Low/Middle/High Channels	8
3 Conducted Test Items.....	9
3.1 Measuring Instruments	9
3.2 Conducted Output Power Measurement	10
3.3 Effective Isotropic Radiated Power.....	11
4 Radiated Test Items	12
4.1 Measuring Instruments	12
4.2 Radiated Spurious Emission Measurement	14
5 List of Measuring Equipment.....	15
6 Uncertainty of Evaluation	16
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG281920-08D	01	Initial issue of report	Oct. 17, 2023
FG281920-08D	02	Revise Product Feature This report is an updated version, replacing the report issued on Oct. 17, 2023.	Oct. 20, 2023

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	-	Peak-to-Average Ratio	-	See Note
3.3	§27.50 (a)(3)	Effective Isotropic Radiated Power	Pass	-
-	§2.1049	Occupied Bandwidth	-	See Note
-	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement	-	See Note
-	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission	-	See Note
-	§2.1055 §27.54	Frequency Stability Temperature & Voltage	-	See Note
4.2	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission	Pass	13.22 dB under the limit at 9241.00 MHz

Note:

- For host device, Radiated Spurious Emission and Equivalent Isotropic Radiated Power are verified and complies with the limit in this test report.
- For host device, the Conducted Output Power is no difference after compared to module (Model: FM101-GL)

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo

Report Producer: Rachel Hsieh

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and Wi-Fi 6GHz 802.11ax
Integrated WLAN Module	Brand Name: Realtek Model Name: RTL8852CE FCC ID: TX2-RTL8852CE
Integrated WLAN Module	Brand Name: Intel Model Name: AX211NGW FCC ID: PD9AX211NG
Antenna Type	WWAN: PIFA Antenna WLAN: <Main>: PIFA Antenna <Aux.>: PIFA Antenna Bluetooth: PIFA Antenna

WWAN Antenna Information				
Antenna 5 (Notebook Mode)	Part number	6036B0327801 (81EABL15.G79)	Peak gain (dBi)	LTE Band 30 : 0.88
			Type	PIFA
Antenna 5 (Tablet Mode)	Part number	6036B0327801 (81EABL15.G79)	Peak gain (dBi)	LTE Band 30 : 0.75
			Type	PIFA

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Site

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333
Test Site No.	Sporton Site No.
	TH03-HY
Test Engineer	Cotty Hsu
Temperature (°C)	22.2~23.1
Relative Humidity (%)	51~56

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010
Test Site No.	Sporton Site No.
	03CH21-HY (TAF Code: 3786)
Test Engineer	Jack Cheng, Ray Lung and Sky Chang
Temperature (°C)	18~26
Relative Humidity (%)	50~70
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.4 Applied Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, Part 27(D)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


Modulation Type	Modulation
A	QPSK
B	16QAM

Test Item	Modulation Type	Bandwidth	RB Size	Channel
Conducted Power	A, B	All	1, Half, Full	L, M, H
EIRP	A, B	All	1, Half, Full	L, M, H
RSE	A	10 MHz or less	1RB	L, M, H

Remark:

1. Evaluated all the transmitter signal and reporting worst-case configuration among all modulation types.
2. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst-case emissions are reported.
3. During the RSE preliminary test, the standalone mode and charging modes were verified. It is determined that the adapter mode is the worst case for the official test.

2.2 Connection Diagram of Test System

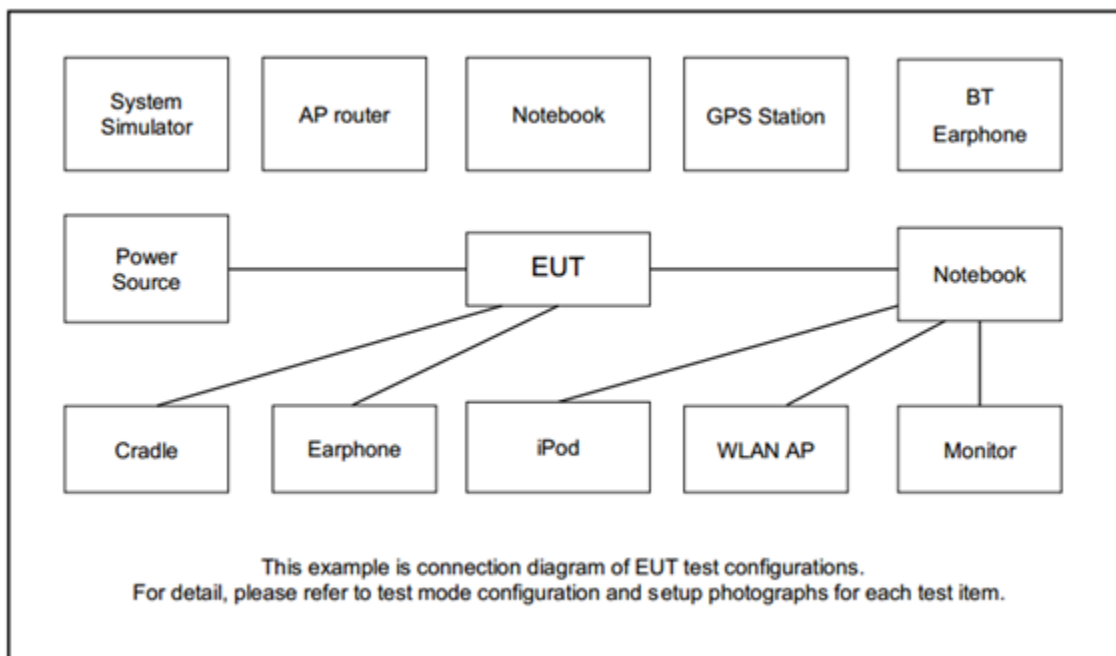



2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.4 Frequency List of Low/Middle/High Channels

LTE Band 30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power

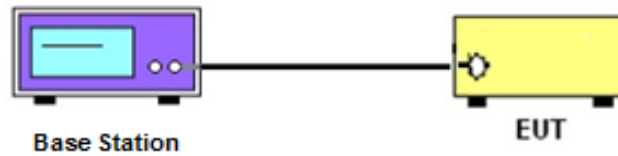

3.1.3 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power Measurement

3.2.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.3 Effective Isotropic Radiated Power

3.3.1 Description of Effective Isotropic Radiated Power

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

Remark: EIRP use worst case measure the total power to cover per 5MHz Power.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.4.5

1. Determine the EIRP by adding the effective antenna gain to the adjusted power level.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

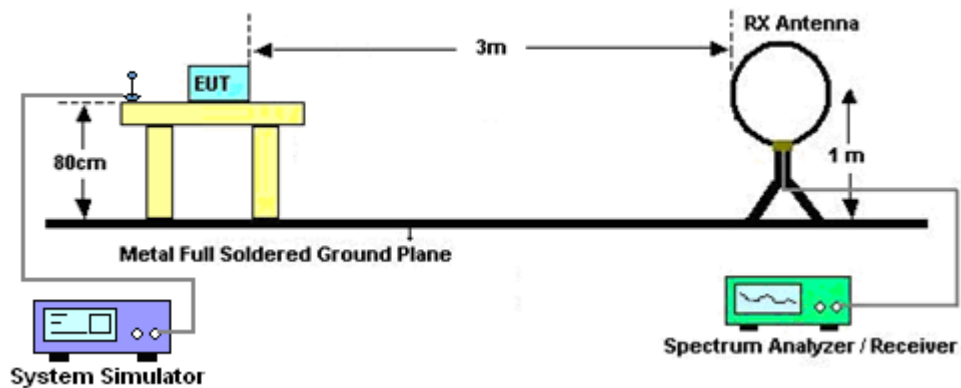


For radiated test from 30MHz to 1GHz

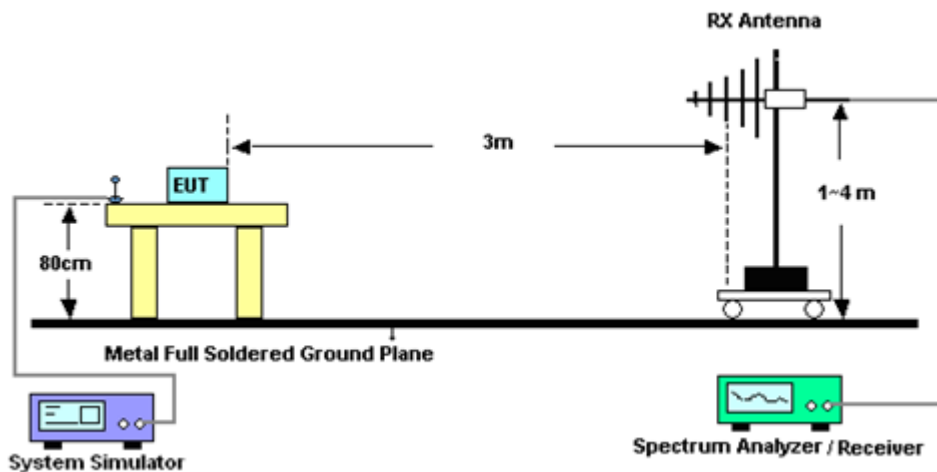

For radiated test from 1GHz to 18GHz

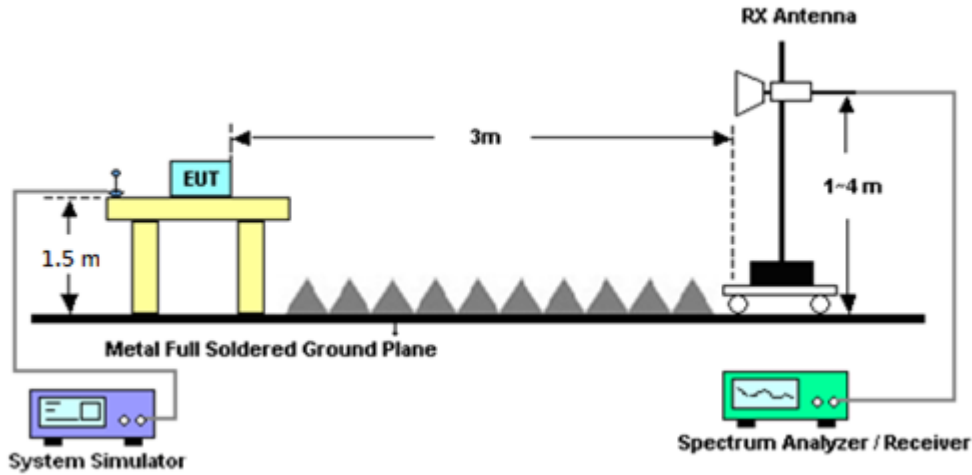

For radiated test above 18GHz

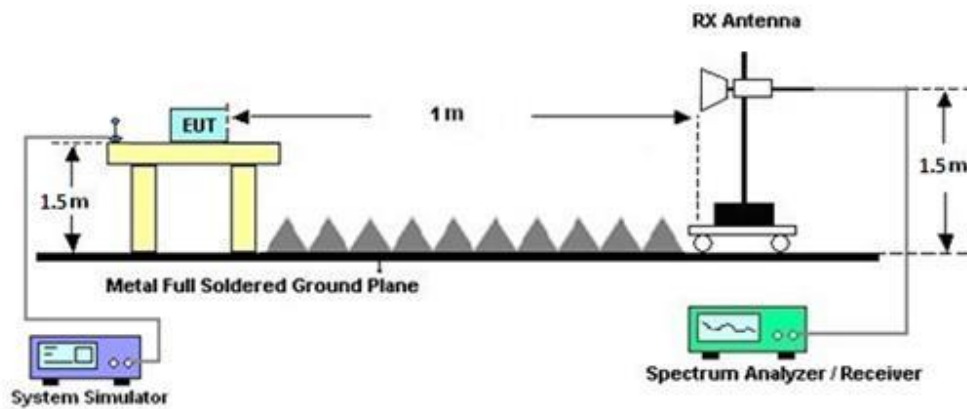

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. To convert spectrum reading E(dBuV/m) to EIRP(dBm)
 $EIRP(dBm) = Level (dBuV/m) + 20\log(d) - 104.77$, where d is the distance at which field strength limit is specified in the rules
8. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamp Factor.
9. ERP (dBm) = EIRP (dBm) - 2.15
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [70 + 10\log(P)] (dB)$
 $= [30 + 10\log(P)] (dBm) - [70 + 10\log(P)] (dB)$
 $= -40dBm.$



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Radio Communication Analyzer	Anritsu	MT8821C	6262025353	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 13, 2022	Sep. 29, 2023~ Oct. 06, 2023	Oct. 12, 2023	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 06, 2023	Sep. 29, 2023~ Oct. 06, 2023	Jan. 05, 2024	Conducted (TH03-HY)
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Oct. 05, 2023~ Oct. 06, 2023	Sep. 11, 2024	Radiation (03CH21-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802N 1D01N-06	55606 & 08	30MHz~1GHz	Oct. 22, 2022	Oct. 05, 2023~ Oct. 06, 2023	Oct. 21, 2023	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18EN	1GHz~18GHz	Jul. 12, 2023	Oct. 05, 2023~ Oct. 06, 2023	Jul. 11, 2024	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jul. 10, 2023	Oct. 05, 2023~ Oct. 06, 2023	Jul. 09, 2024	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 15, 2023	Oct. 05, 2023~ Oct. 06, 2023	Jul. 14, 2024	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 28, 2023	Oct. 05, 2023~ Oct. 06, 2023	Sep. 27, 2024	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 30, 2023	Oct. 05, 2023~ Oct. 06, 2023	Aug. 29, 2024	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Aug. 28, 2023	Oct. 05, 2023~ Oct. 06, 2023	Aug. 27, 2024	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 07, 2023	Oct. 05, 2023~ Oct. 06, 2023	Mar. 06, 2024	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,8046 12/2,804614/2	30MHz~40GHz	Oct. 25, 2022	Oct. 05, 2023~ Oct. 06, 2023	Oct. 24, 2023	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Nov. 17, 2022	Oct. 05, 2023~ Oct. 06, 2023	Nov. 16, 2023	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Oct. 05, 2023~ Oct. 06, 2023	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Oct. 05, 2023~ Oct. 06, 2023	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Oct. 05, 2023~ Oct. 06, 2023	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Oct. 05, 2023~ Oct. 06, 2023	N/A	Radiation (03CH21-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.06 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30 dB
---	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power & EIRP)

LTE Band 30 Maximum Average Power [dBm] (GT - LC = 0.88 dB)									
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)	
10	1	0	QPSK	-	19.56	-	20.44	0.1107	
10	1	25			19.42				
10	1	49			19.50				
10	25	0			19.48				
10	25	12			19.28				
10	25	25			19.29				
10	50	0			19.45				
10	1	0	16-QAM		19.52		-	20.40	0.1096
10	1	25			19.47				
10	1	49			19.45				
10	25	0			19.36				
10	25	12			19.29				
10	25	25			19.28				
10	50	0			19.33				
Limit	EIRP < 250mW/5MHz			Result			Pass		

Total EIRP power is less than partial EIRP limit 250 mW/5MHz.

LTE Band 30 Maximum Average Power [dBm] (GT - LC = 0.88 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	EIRP (dBm)	EIRP (W)
5	1	0	QPSK	19.53	19.55	19.54	20.43	0.1104
5	1	12		19.40	19.45	19.40		
5	1	24		19.51	19.54	19.54		
5	12	0		19.50	19.48	19.50		
5	12	7		19.33	19.32	19.34		
5	12	13		19.32	19.34	19.27		
5	25	0		19.44	19.46	19.40		
5	1	0	16-QAM	19.47	19.51	19.52	20.42	0.1102
5	1	12		19.50	19.54	19.45		
5	1	24		19.51	19.53	19.51		
5	12	0		19.34	19.38	19.39		
5	12	7		19.32	19.36	19.36		
5	12	13		19.30	19.26	19.30		
5	25	0		19.30	19.35	19.35		
Limit	EIRP < 250mW/5MHz			Result			Pass	

Total EIRP power is less than partial EIRP limit 250 mW/5MHz.



Appendix B. Test Results of Radiated Test

B1. Summary of each worse mode

Part	Mode	Ch	Freq (MHz)	Level (dBm)	Detector	Ant Factor (dB/m)	Amp\Cbl (dB)	Filter (dB)	EIRP CF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
Part 27D	1	H	9241.000	-53.22	RMS	37.02	-20.04	0.44	-95.23	24.59	-40.00	-13.22	H	Tx0Rx0
Part 27D	2	M	9222.000	-53.53	RMS	37.06	-19.99	0.45	-95.23	24.18	-40.00	-13.53	H	Tx0Rx0




Tx0Rx0

Part 27D Mode 1

LTE B30 5M LTE B30 5M Ch27685 1RB0 QPSK

L

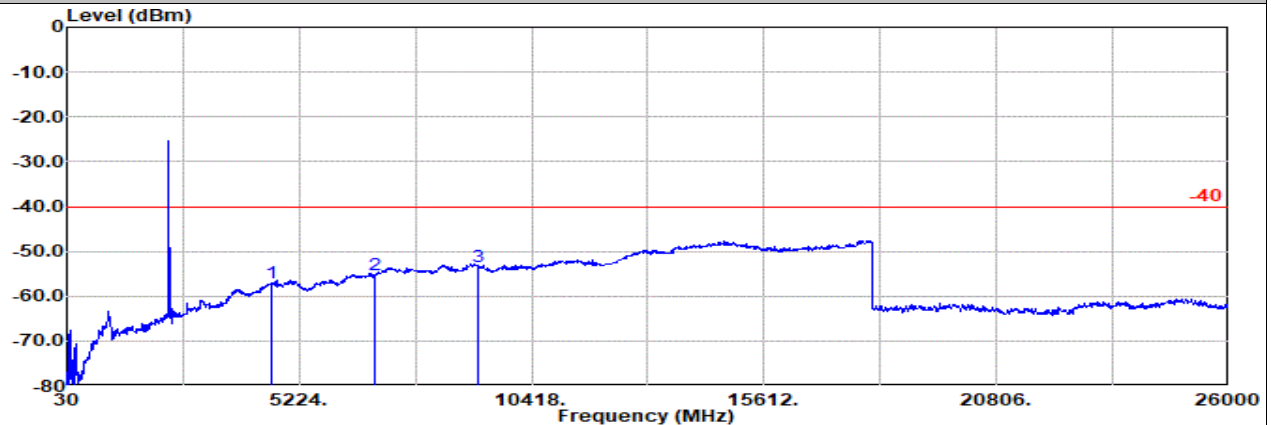


Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Horizontal

: LTE Band 30 5M Ch27685 1RB0 QPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Readin g	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	4611.00	-57.18	RMS	31.84	-19.75	0.64	-95.23	25.32	-40.00	-17.18	Horizontal
2	6916.00	-55.38	RMS	36.33	-20.44	0.45	-95.23	23.51	-40.00	-15.38	Horizontal
3	9221.00	-53.31	RMS	37.06	-19.98	0.45	-95.23	24.39	-40.00	-13.31	Horizontal

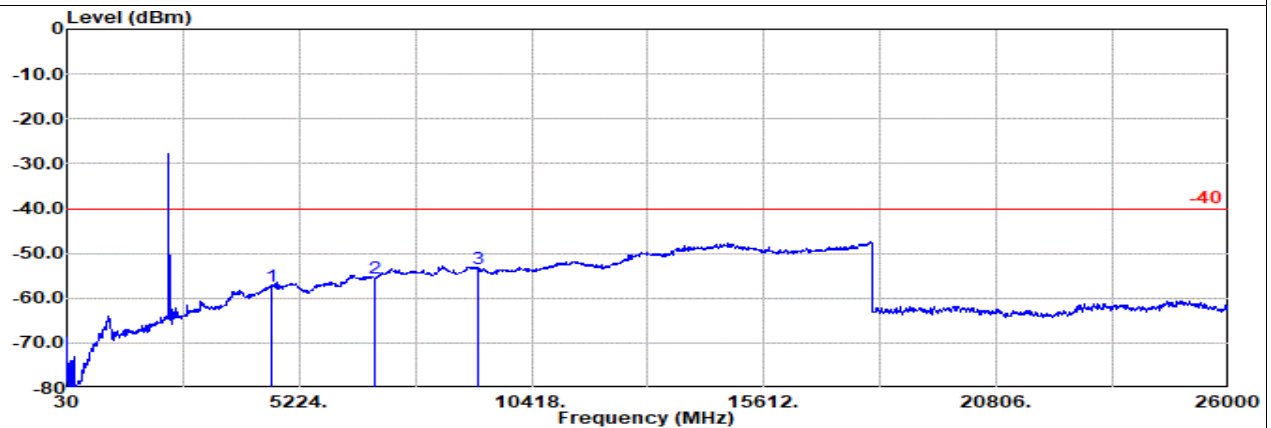

Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Vertical

: LTE Band 30 5M Ch27685 1RB0 QPSK

	Freq	Level	Detector	Ant Factor	Amp\Cb 1	Filter	EIRPCF	Reading	Limit	Margin	Pol
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB	
1	4611.00	-57.24	RMS	31.84	-19.75	0.64	-95.23	25.26	-40.00	-17.24	Vertical
2	6916.00	-55.58	RMS	36.33	-20.44	0.45	-95.23	23.31	-40.00	-15.58	Vertical
3	9221.00	-53.30	RMS	37.06	-19.98	0.45	-95.23	24.40	-40.00	-13.30	Vertical




Tx0Rx0

Part 27D Mode 1

LTE B30 5M LTE B30 5M Ch27710 1RB0 QPSK

M

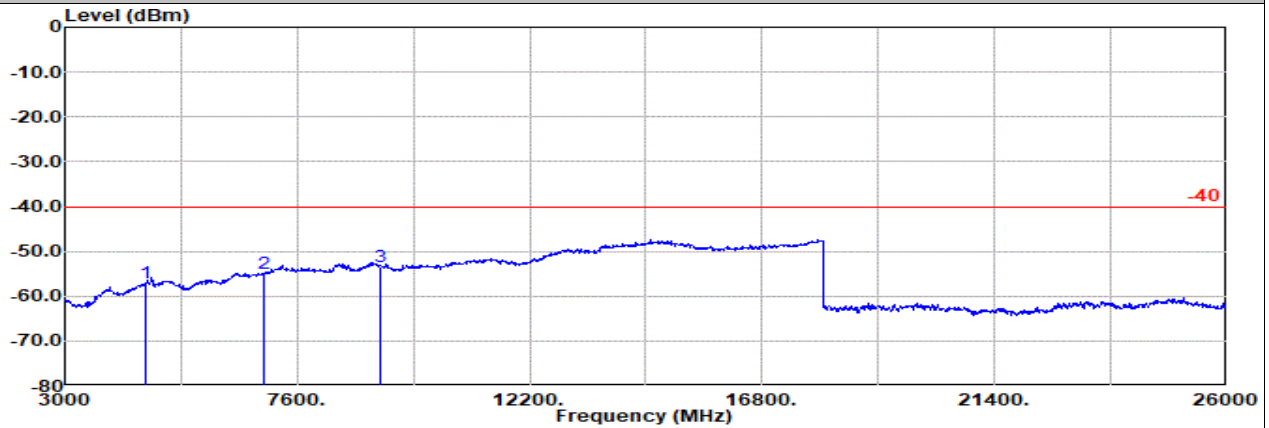


Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Horizontal

: LTE Band 30 5M Ch27710 1RB0 QPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	4616.00	-56.93	RMS	31.86	-19.75	0.64	-95.23	25.55	-40.00	-16.93
2	6924.00	-54.89	RMS	36.35	-20.44	0.45	-95.23	23.98	-40.00	-14.89
3	9231.00	-53.32	RMS	37.04	-20.01	0.45	-95.23	24.43	-40.00	-13.32

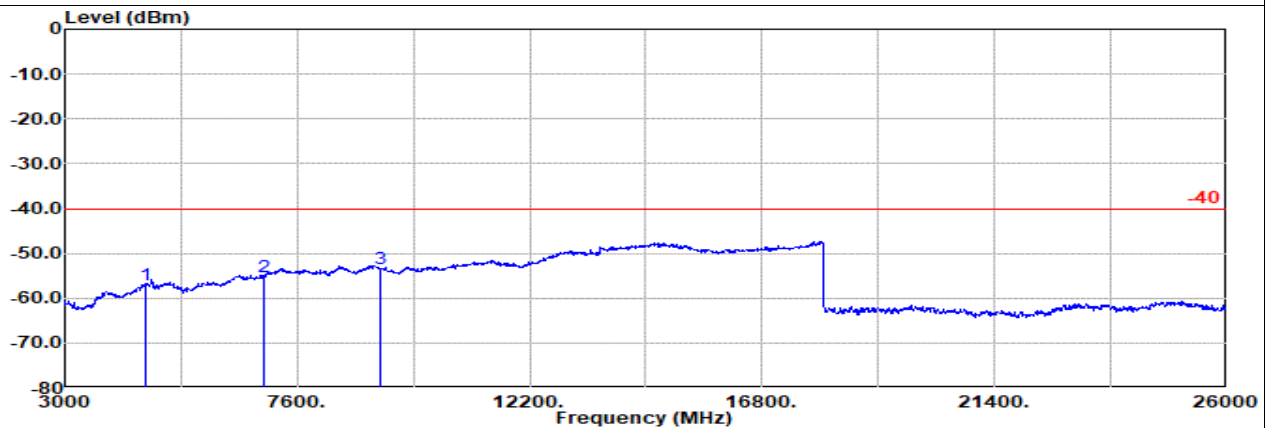

Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Vertical

: LTE Band 30 5M Ch27710 1RB0 QPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	4616.00	-57.05	RMS	31.86	-19.75	0.64	-95.23	25.43	-40.00	-17.05
2	6924.00	-55.27	RMS	36.35	-20.44	0.45	-95.23	23.60	-40.00	-15.27
3	9231.00	-53.39	RMS	37.04	-20.01	0.45	-95.23	24.36	-40.00	-13.39




Tx0Rx0

Part 27D Mode 1

LTE B30 5M LTE B30 5M Ch27735 1RB0 QPSK

H

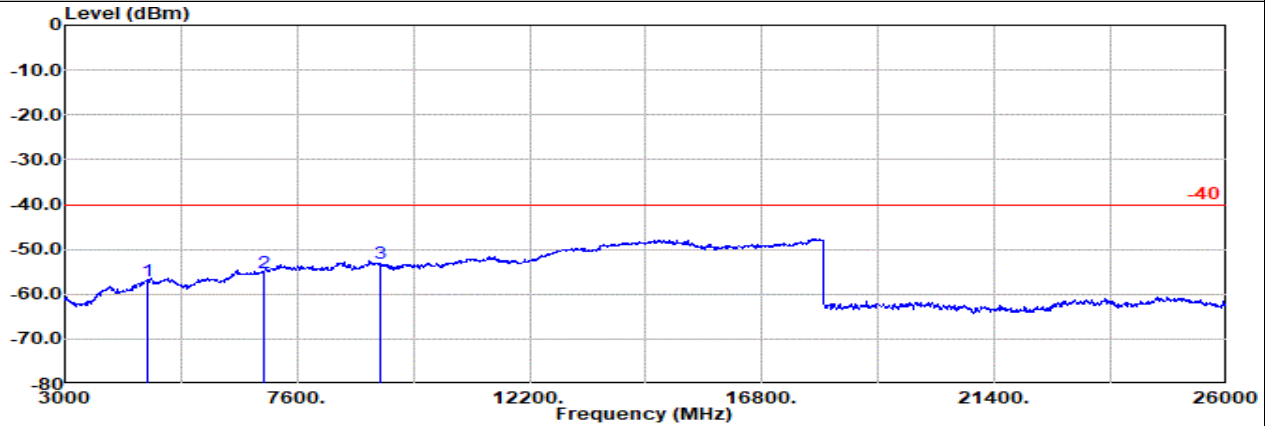


Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Horizontal

: LTE Band 30 5M Ch27735 1RB0 QPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	4621.00	-57.05	RMS	31.88	-19.75	0.64	-95.23	25.41	-40.00	-17.05 Horizontal
2	6931.00	-55.24	RMS	36.36	-20.44	0.45	-95.23	23.62	-40.00	-15.24 Horizontal
3	9241.00	-53.22	RMS	37.02	-20.04	0.44	-95.23	24.59	-40.00	-13.22 Horizontal

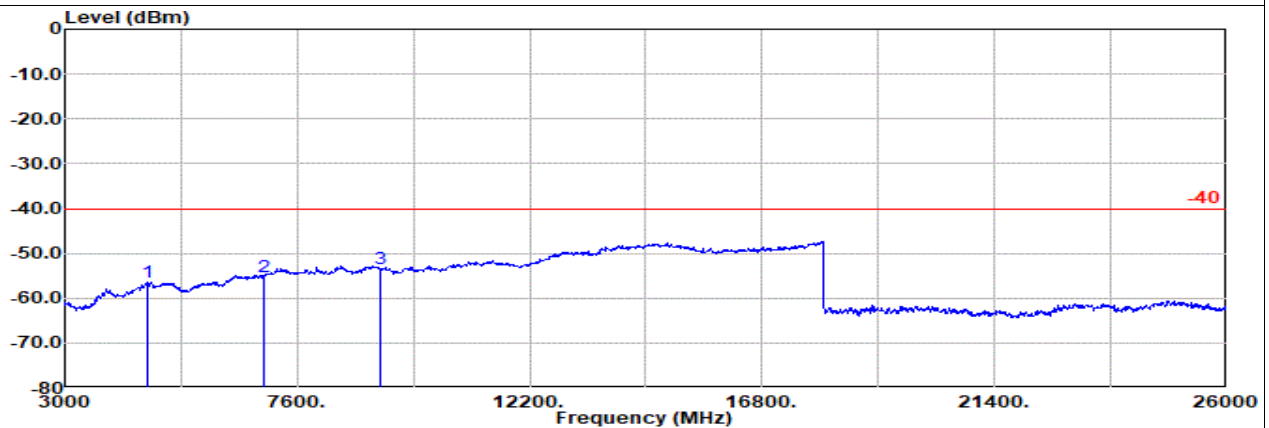

Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Vertical

: LTE Band 30 5M Ch27735 1RB0 QPSK

	Freq	Level	Detector	Ant Amp\Cb Filter		EIRPCF	Readin	Limit	Margin	Pol
				Factor	1					
	MHz	dBm		dB/m	dB	dB	dB	dBuV	dBm	dB
1	4621.00	-56.60	RMS	31.88	-19.75	0.64	-95.23	25.86	-40.00	-16.60 Vertical
2	6931.00	-55.12	RMS	36.36	-20.44	0.45	-95.23	23.74	-40.00	-15.12 Vertical
3	9241.00	-53.48	RMS	37.02	-20.04	0.44	-95.23	24.33	-40.00	-13.48 Vertical




Tx0Rx0

Part 27D Mode 2

LTE B30 10M LTE B30 10M Ch27710 1RB0 QPSK

M

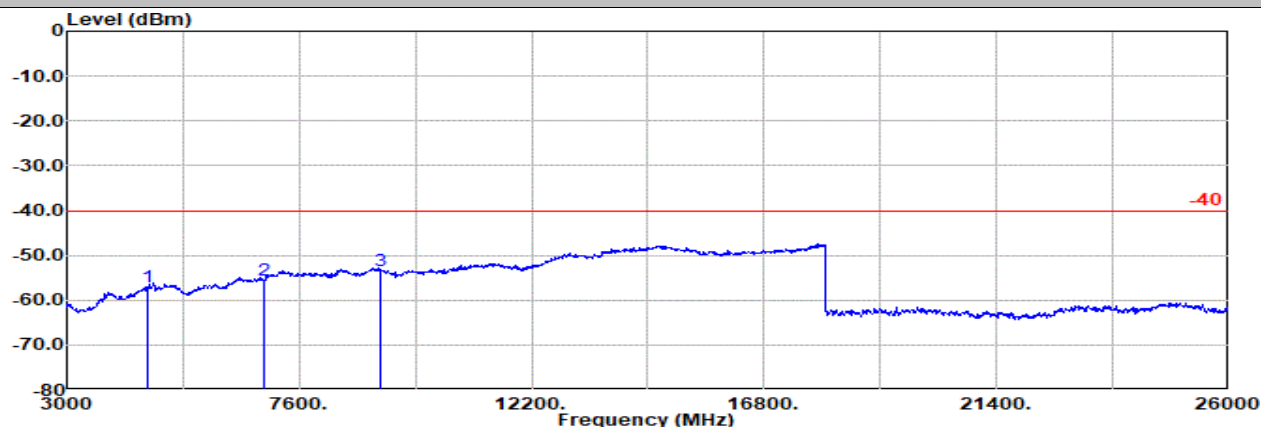


Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Horizontal

: LTE Band 30 10M Ch27710 1RB0 QPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	1			dBuV	dBm		
1	4611.00	-57.05	RMS	31.84	-19.75	0.64	-95.23	25.45	-40.00	-17.05	Horizontal
2	6917.00	-55.45	RMS	36.33	-20.44	0.45	-95.23	23.44	-40.00	-15.45	Horizontal
3	9222.00	-53.53	RMS	37.06	-19.99	0.45	-95.23	24.18	-40.00	-13.53	Horizontal

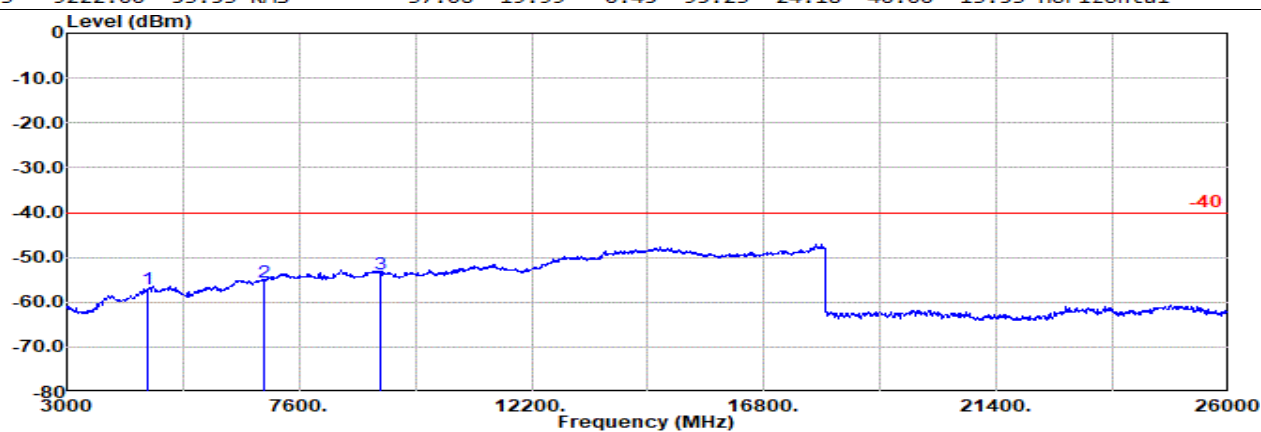

Site : 03CH21-HY

Condition: -40 3m DRH18-E_LE2C03A18EN_230712 Vertical

: LTE Band 30 10M Ch27710 1RB0 QPSK

	Freq Level		Detector	Ant Amp\Cb Filter		EIRPCF	Readin g	Limit		Margin	Pol
	MHz	dBm		Factor	1			dBuV	dBm		
1	4611.00	-56.97	RMS	31.84	-19.75	0.64	-95.23	25.53	-40.00	-16.97	Vertical
2	6917.00	-55.47	RMS	36.33	-20.44	0.45	-95.23	23.42	-40.00	-15.47	Vertical
3	9222.00	-53.66	RMS	37.06	-19.99	0.45	-95.23	24.05	-40.00	-13.66	Vertical