



REPORT No.: SZ23080047S02

Annex C Plots of System Performance Check

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.10.19

System Check_835MHz_HAC_RF_E

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C;

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 2023.2.17
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1643; Calibrated: 2023.2.22
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Hearing Aid Compatibility Test (81x401x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Maximum value of Total (interpolated) = 121.34 V/m

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 58.44 V/m; Power Drift = -0.11 dB



Applied MIF = 0.00 dB

RF audio interference level = 41.68 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M3 41.14 dBV/m	Grid 2 M3 41.66 dBV/m	Grid 3 M3 40.63 dBV/m
Grid 4 M4 36.94 dBV/m	Grid 5 M4 37.95 dBV/m	Grid 6 M4 36.45 dBV/m
Grid 7 M3 41.33 dBV/m	Grid 8 M3 41.68 dBV/m	Grid 9 M3 40.56 dBV/m

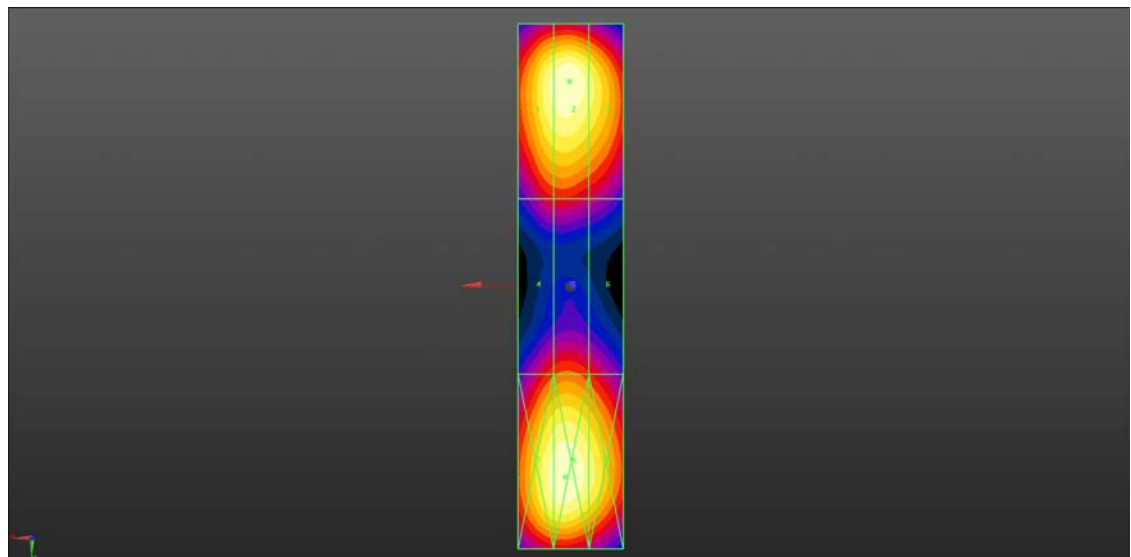

0 dB = 121.34 V/m = 41.68 dBV/m

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.11.24

System Check_1880MHz_HAC_RF_E

Communication System: UID 0, CW (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C;

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2023.2.17
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2023.9.19
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Hearing Aid Compatibility Test (81x321x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Maximum value of Total (interpolated) = 97.27 V/m

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 73.56 V/m; Power Drift = -0.08 dB



Applied MIF = 0.00 dB

RF audio interference level = 39.76 dBV/m

Emission category: M2

MIF scaled E-field

Grid 1 M2 39.35 dBV/m	Grid 2 M2 39.68 dBV/m	Grid 3 M2 38.46 dBV/m
Grid 4 M2 39.12 dBV/m	Grid 5 M2 39.57 dBV/m	Grid 6 M2 38.78 dBV/m
Grid 7 M2 39.38 dBV/m	Grid 8 M2 39.76 dBV/m	Grid 9 M2 38.83 dBV/m

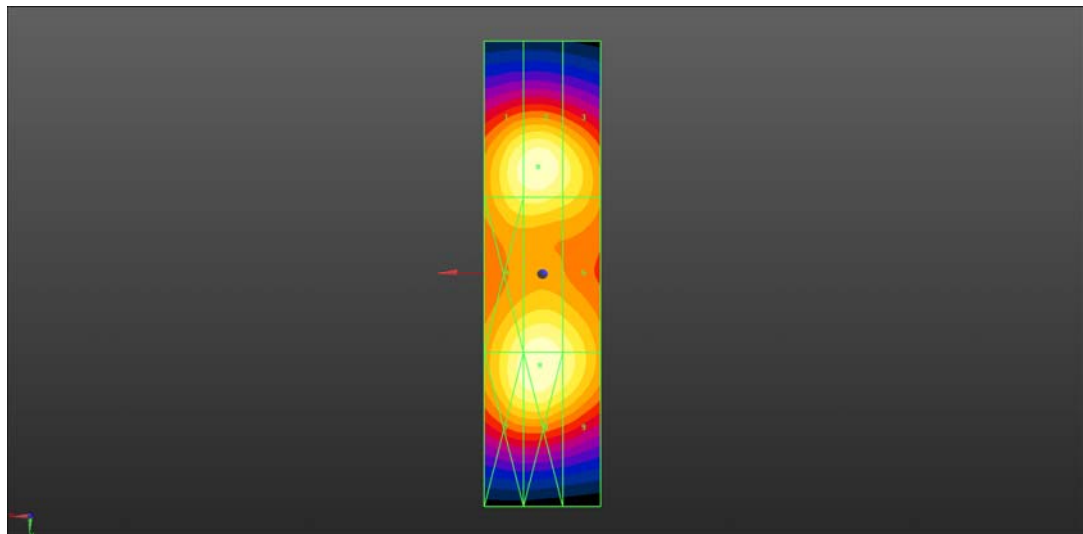

0 dB = 97.27 V/m = 39.76 dBV/m

Test Laboratory: SAR Lab. of Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.11.24

System Check_2450MHz_HAC_RF_E

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C;

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1); Calibrated: 2023.2.17
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2023.9.19
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Hearing Aid Compatibility Test (81x321x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Maximum value of Total (interpolated) = 96.72 V/m

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 81.55 V/m; Power Drift = -0.02 dB



Applied MIF = 0.00 dB

RF audio interference level = 39.71 dBV/m

Emission category: M2

MIF scaled E-field

Grid 1 M2 38.89 dBV/m	Grid 2 M2 39.38 dBV/m	Grid 3 M2 38.13 dBV/m
Grid 4 M2 39.24 dBV/m	Grid 5 M2 39.71 dBV/m	Grid 6 M2 38.71 dBV/m
Grid 7 M2 39.11 dBV/m	Grid 8 M2 39.57 dBV/m	Grid 9 M2 38.35 dBV/m

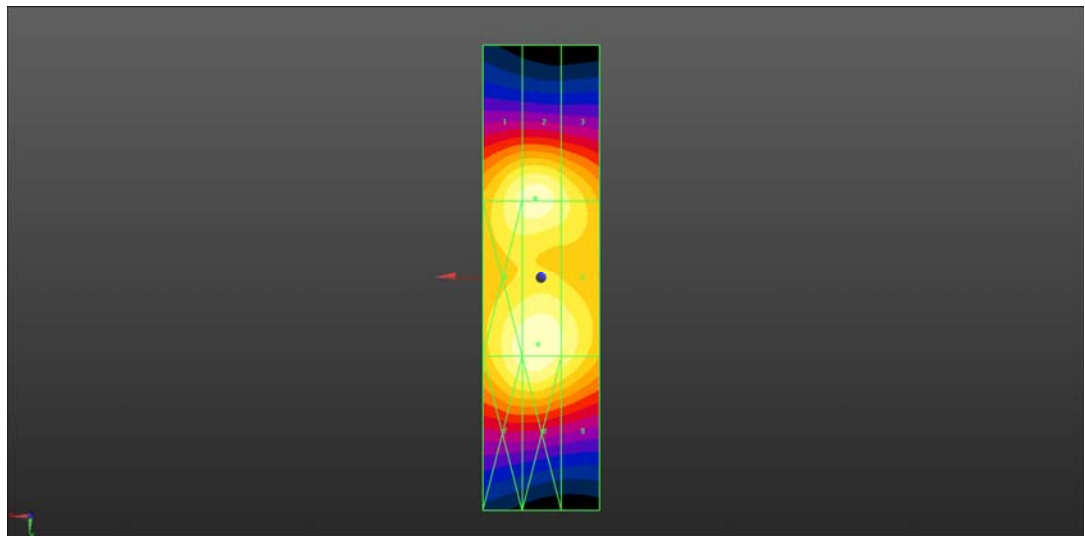

0 dB = 96.72 V/m = 39.71 dBV/m

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.11.24

System Check_2600MHz_HAC_RF_E

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.2 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2434; ConvF(1, 1, 1) @ 2600 MHz; Calibrated: 2023.2.17
- Sensor-Surface: (Fix Surface), Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn480; Calibrated: 2023.9.19
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch2600/Hearing Aid Compatibility Test (81x321x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Maximum value of Total (interpolated) = 97.39 V/m

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 80.91 V/m; Power Drift = -0.01 dB



Applied MIF = 0.00 dB

RF audio interference level = 39.77 dBV/m

Emission category: M2

MIF scaled E-field

Grid 1 M2 38.93 dBV/m	Grid 2 M2 39.28 dBV/m	Grid 3 M2 38.11 dBV/m
Grid 4 M2 39.16 dBV/m	Grid 5 M2 39.77 dBV/m	Grid 6 M2 38.75 dBV/m
Grid 7 M2 39.13 dBV/m	Grid 8 M2 39.45 dBV/m	Grid 9 M2 38.43 dBV/m

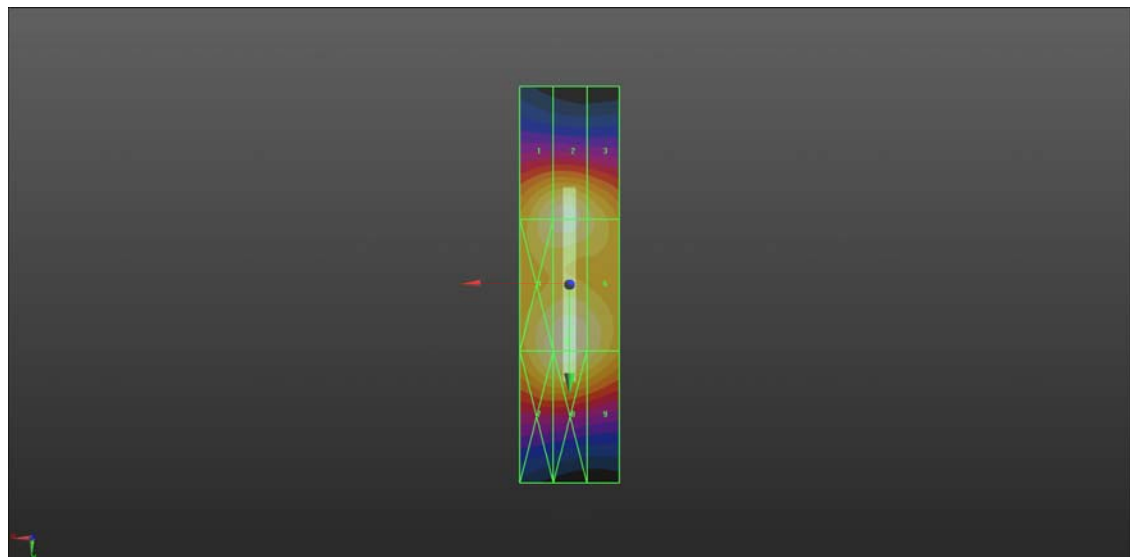

0 dB = 97.39 V/m = 39.77 dBV/m