

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #769	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/21/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2452MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT40	

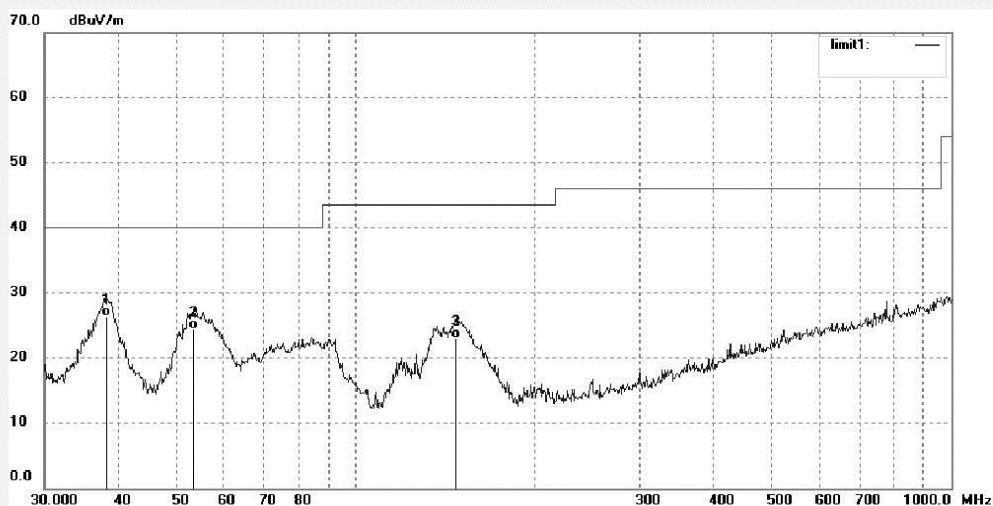

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	38.2120	37.47	-11.14	26.33	40.00	-13.67	QP			
2	53.5052	37.35	-12.87	24.48	40.00	-15.52	QP			
3	147.4036	38.16	-15.20	22.96	43.50	-20.54	QP			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #770	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/21/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2452MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT40	

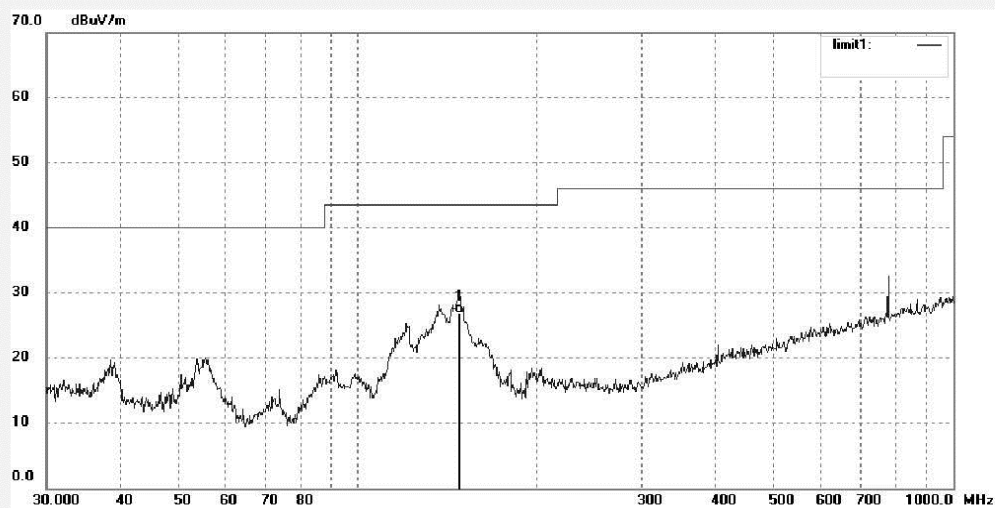

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	147.9214	42.07	-15.19	26.88	43.50	-16.62	QP			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #257

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ThinkPad Stack Wireless Access Point

Mode: TX 2422MHz

Model: R123

Manufacturer: Lenovo

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2015/02/08

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n HT40

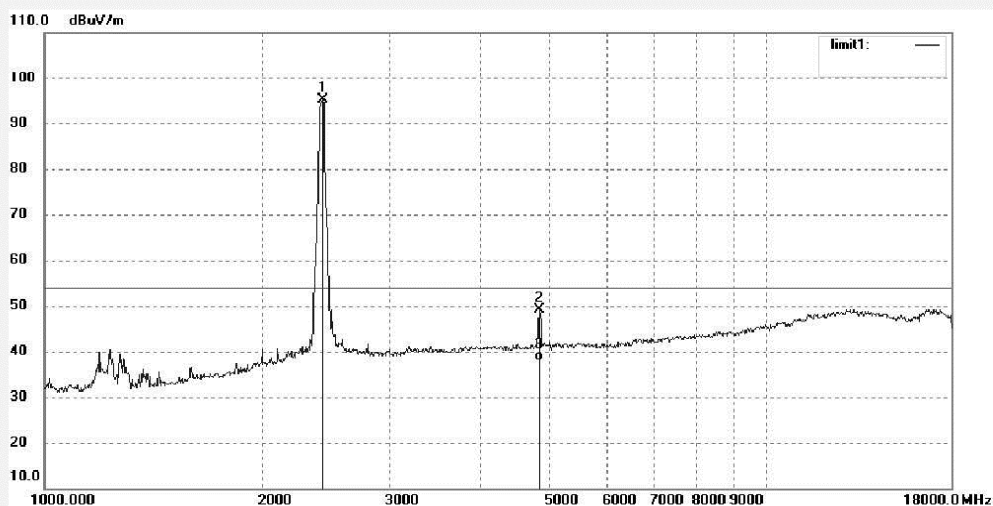

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2422.000	102.53	-7.40	95.13	/	/	peak			
2	4844.228	49.16	-0.08	49.08	74.00	-24.92	peak			
3	4844.228	38.01	-0.08	37.93	54.00	-16.07	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #258

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ThinkPad Stack Wireless Access Point

Mode: TX 2422MHz

Model: R123

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2015/02/08

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n HT40

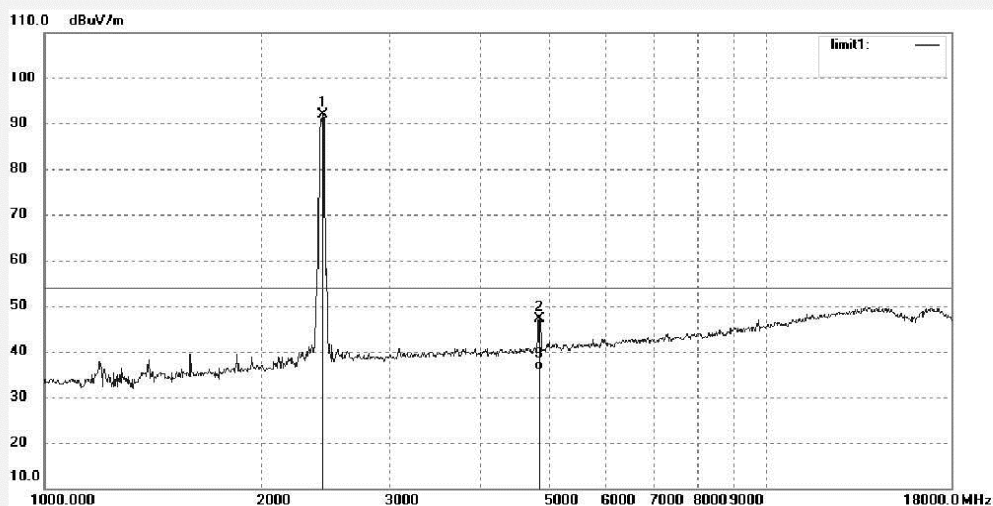

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2422.000	99.33	-7.40	91.93	/	/	peak			
2	4844.276	47.32	-0.08	47.24	74.00	-26.76	peak			
3	4844.276	36.08	-0.08	36.00	54.00	-18.00	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #259	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2437MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT40	

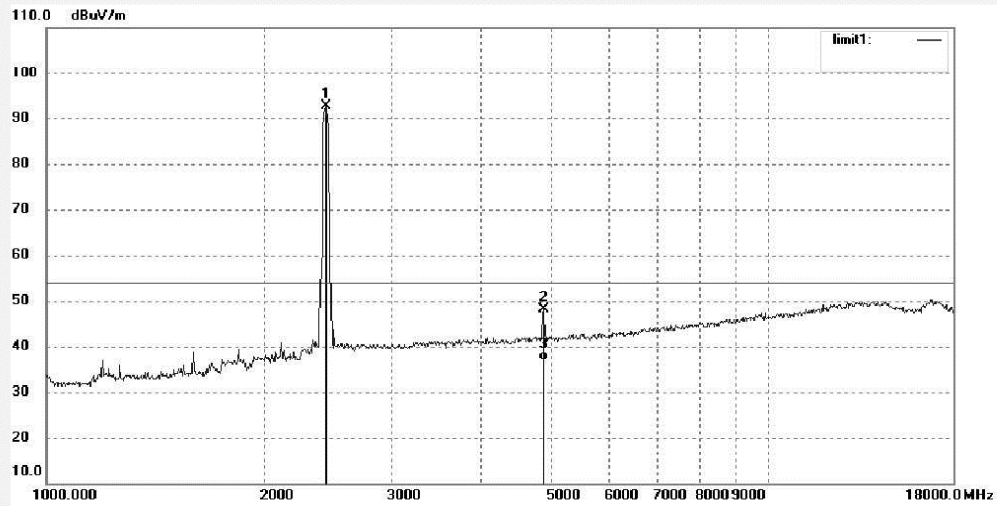

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.000	99.95	-7.36	92.59	/	/	peak			
2	4874.313	48.13	0.09	48.22	74.00	-25.78	peak			
3	4874.313	36.87	0.09	36.96	54.00	-17.04	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #260	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2437MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT40	

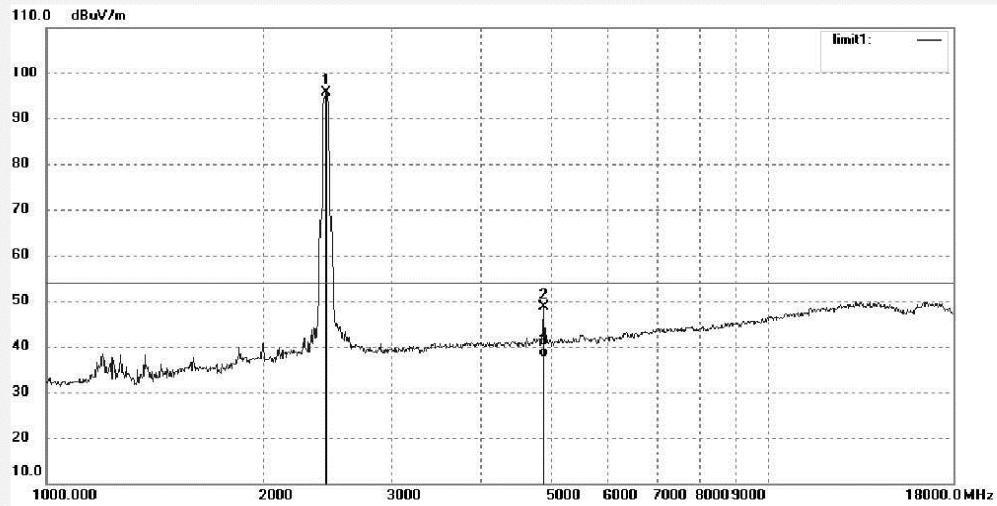

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.000	102.94	-7.36	95.58	/	/	peak			
2	4874.322	48.53	0.09	48.62	74.00	-25.38	peak			
3	4874.322	37.43	0.09	37.52	54.00	-16.48	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #261

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ThinkPad Stack Wireless Access Point

Mode: TX 2452MHz

Model: R123

Manufacturer: Lenovo

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2015/02/08

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n HT40

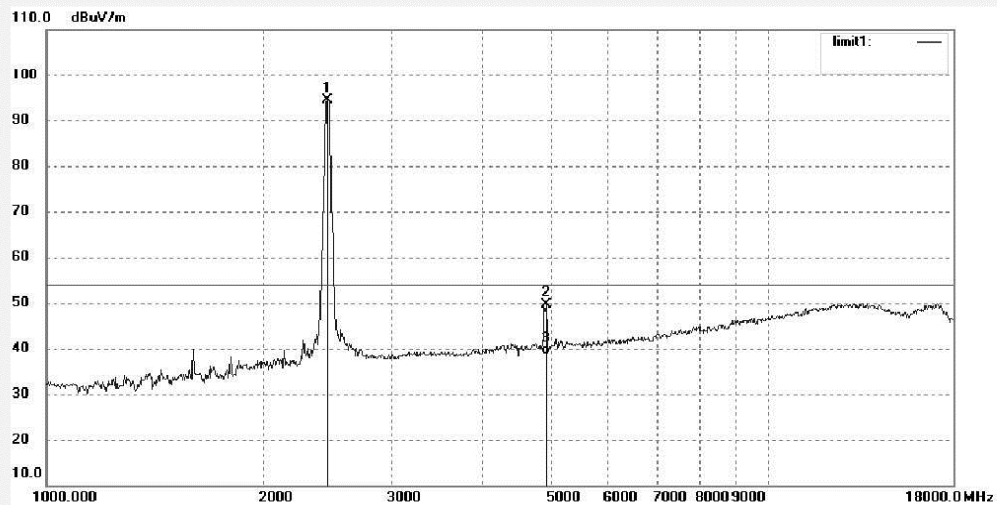

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2452.000	101.77	-7.33	94.44	/	/	peak			
2	4904.319	49.45	0.25	49.70	74.00	-24.30	peak			
3	4904.319	38.27	0.25	38.52	54.00	-15.48	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #262

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ThinkPad Stack Wireless Access Point

Mode: TX 2452MHz

Model: R123

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2015/02/08

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n HT40

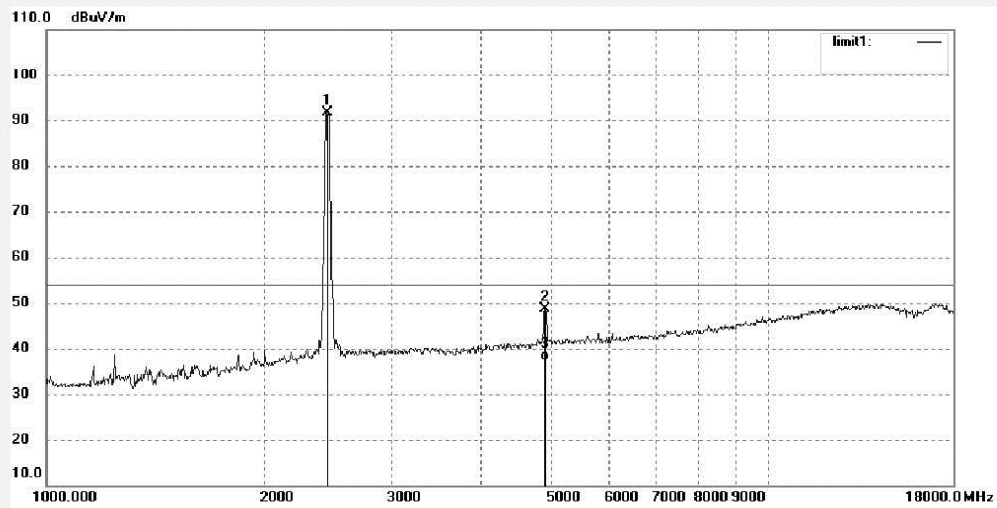

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2452.000	98.86	-7.33	91.53	/	/	peak			
2	4904.303	48.30	0.25	48.55	74.00	-25.45	peak			
3	4904.303	37.21	0.25	37.46	54.00	-16.54	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #998	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2422MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT40	

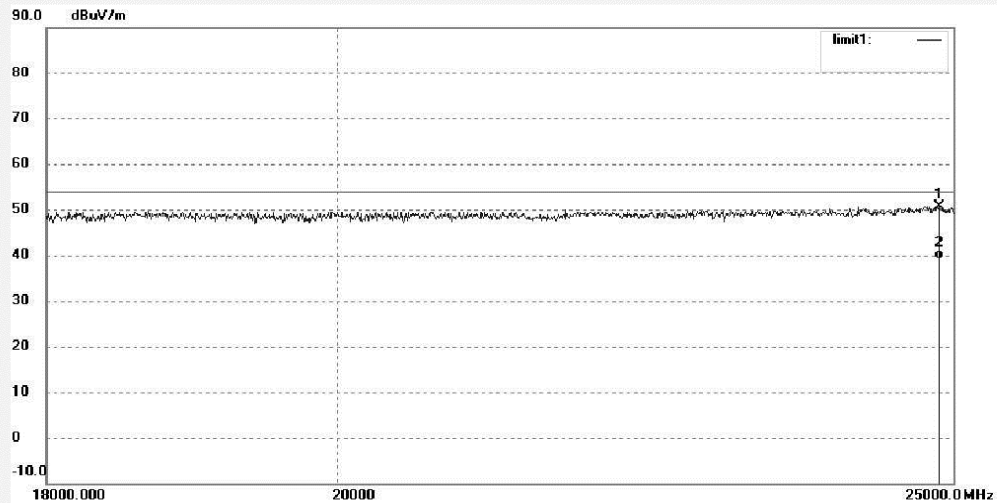

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24876.868	34.10	16.58	50.68	74.00	-23.32	peak			
2	24876.868	22.45	16.58	39.03	54.00	-14.97	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #999	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2422MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT40	

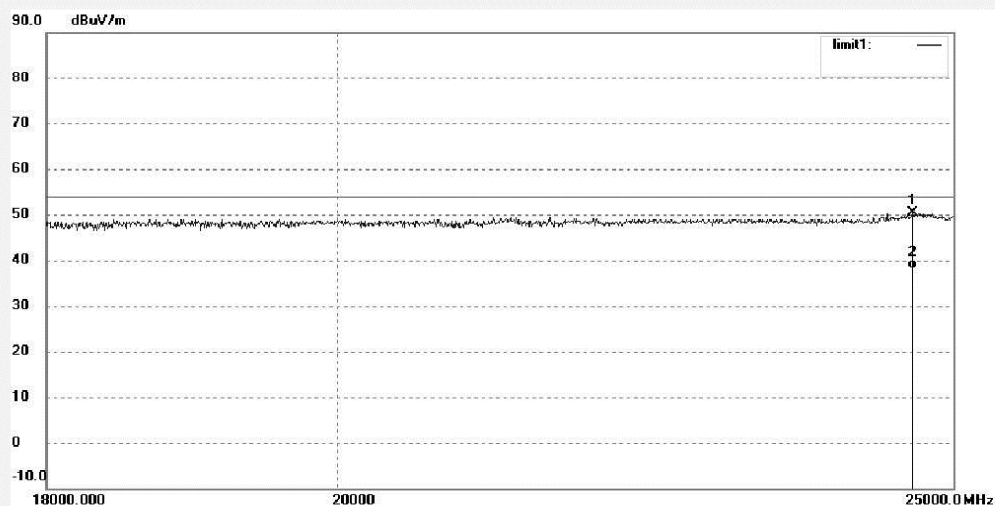

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24632.421	33.60	16.74	50.34	74.00	-23.66	peak			
2	24632.421	21.43	16.74	38.17	54.00	-15.83	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1000	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2437MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT40	

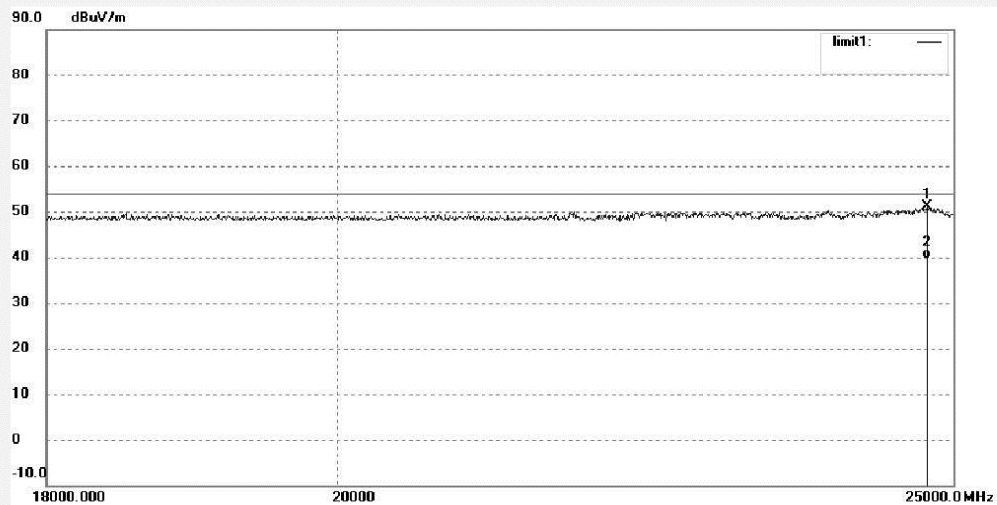

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24770.645	34.59	16.65	51.24	74.00	-22.76	peak			
2	24770.645	23.04	16.65	39.69	54.00	-14.31	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1001	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2437MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11n HT40

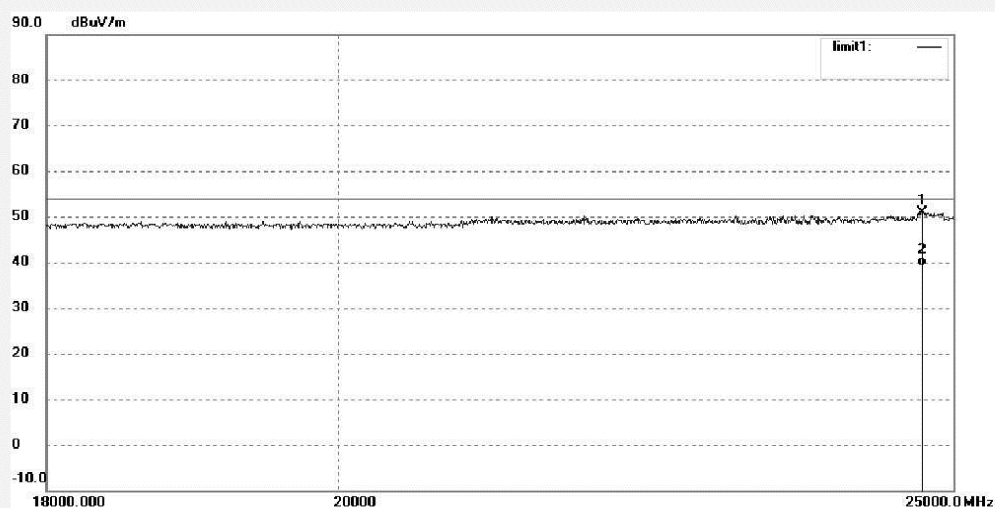

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24721.772	34.23	16.68	50.91	74.00	-23.09	peak			
2	24721.772	22.54	16.68	39.22	54.00	-14.78	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1002	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2452MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11n HT40

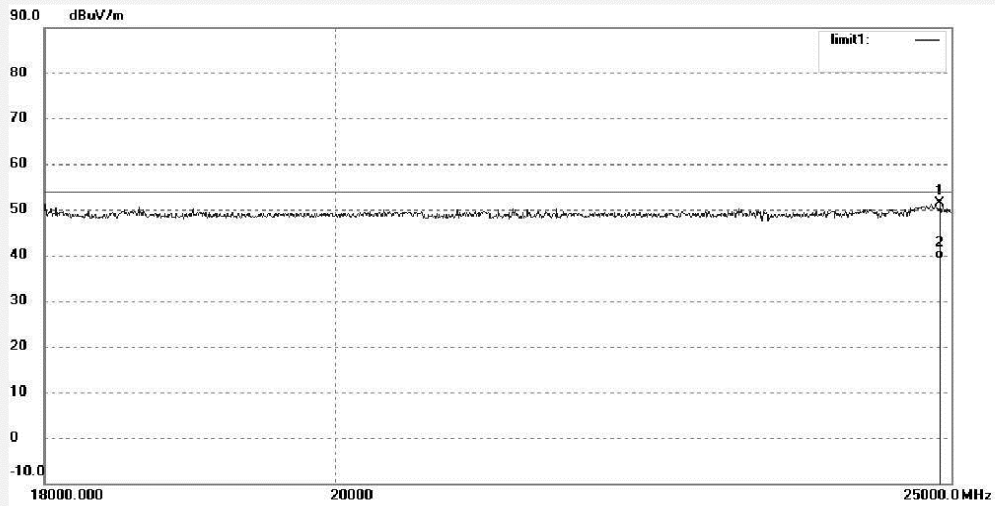

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24901.446	34.70	16.56	51.26	74.00	-22.74	peak			
2	24901.446	22.65	16.56	39.21	54.00	-14.79	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #1003	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/28/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2452MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT40	

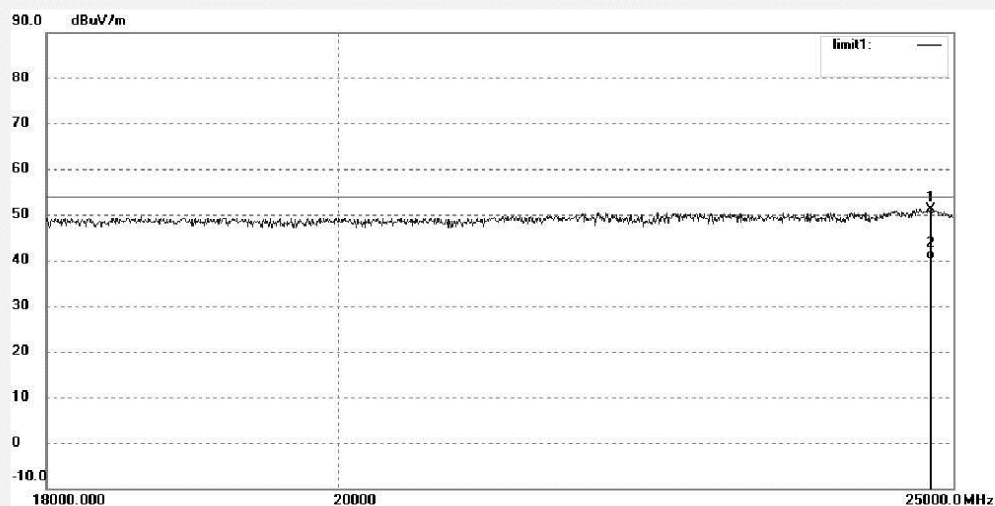

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24795.118	34.57	16.63	51.20	74.00	-22.80	peak			
2	24795.118	23.38	16.63	40.01	54.00	-13.99	AVG			

Appendix B.5: Radiated emission in restrictd band, 802.11b_1TX




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #263	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2412MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11b

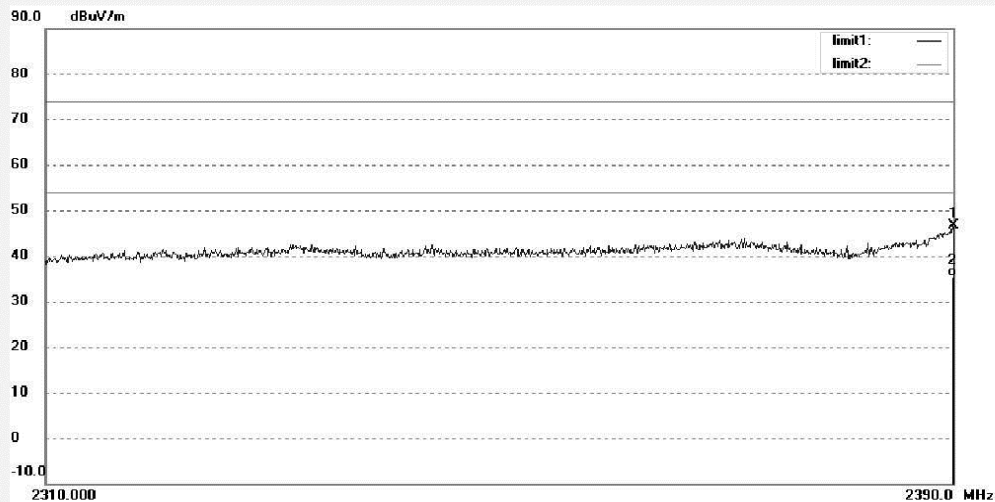

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	54.27	-7.53	46.74	74.00	-27.26	peak			
2	2390.000	42.87	-7.53	35.34	54.00	-18.66	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #264	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2412MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11b

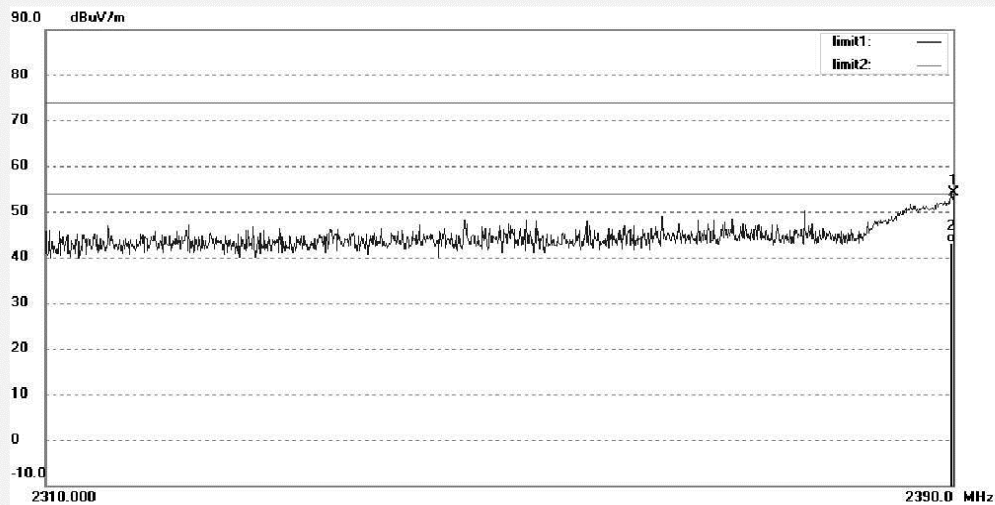

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	61.68	-7.53	54.15	74.00	-19.85	peak			
2	2390.000	50.54	-7.53	43.01	54.00	-10.99	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #265
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 2462MHz
Model: R123
Manufacturer: Lenovo

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2015/02/08
Time:
Engineer Signature:
Distance: 3m

Note: 802.11b

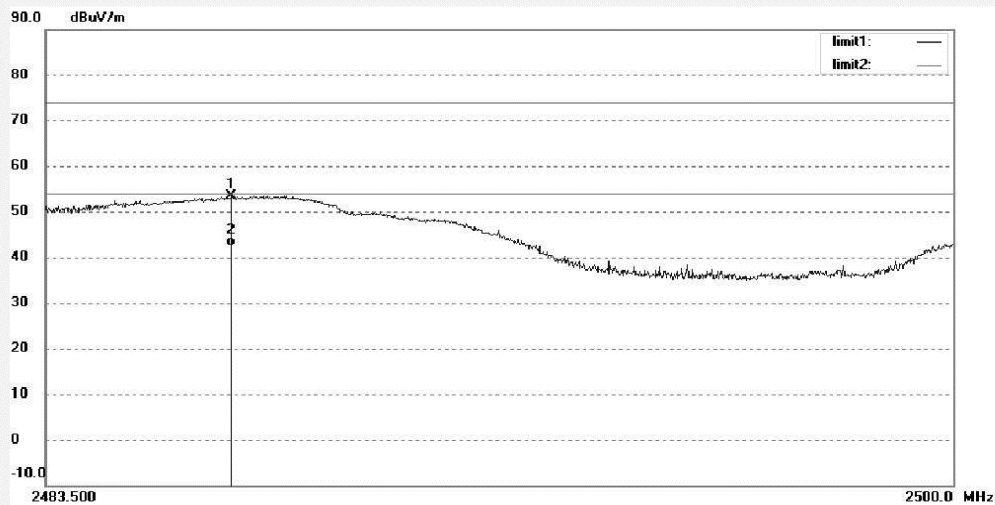

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2486.883	60.79	-7.38	53.41	74.00	-20.59	peak			
2	2486.883	49.67	-7.38	42.29	54.00	-11.71	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #266

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ThinkPad Stack Wireless Access Point

Mode: TX 2462MHz

Model: R123

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2015/02/08

Time:

Engineer Signature:

Distance: 3m

Note: 802.11b

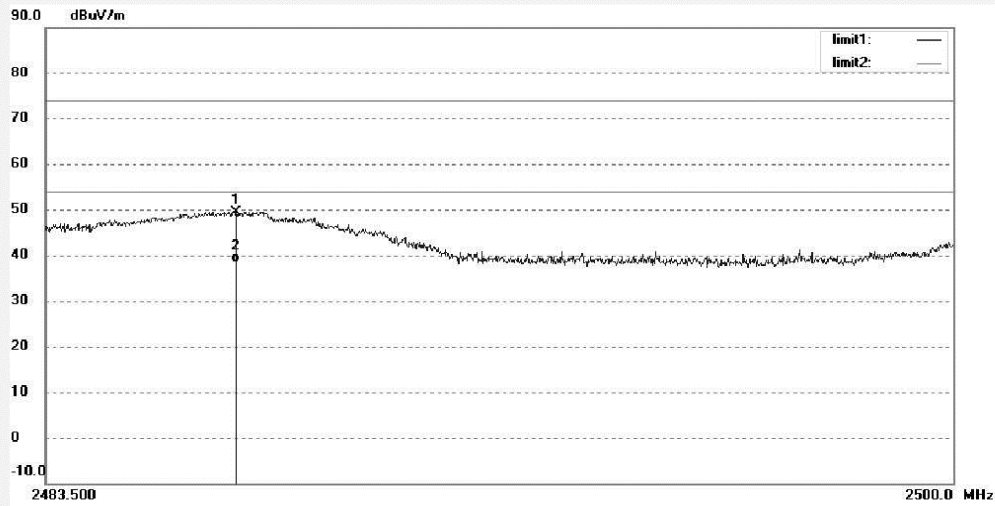

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2486.965	56.88	-7.38	49.50	74.00	-24.50	peak			
2	2486.965	45.73	-7.38	38.35	54.00	-15.65	AVG			

Produkte
Products

Appendix B.6: Radiated emission in restrictd band, 802.11g_1TX




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #267	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2412MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11g

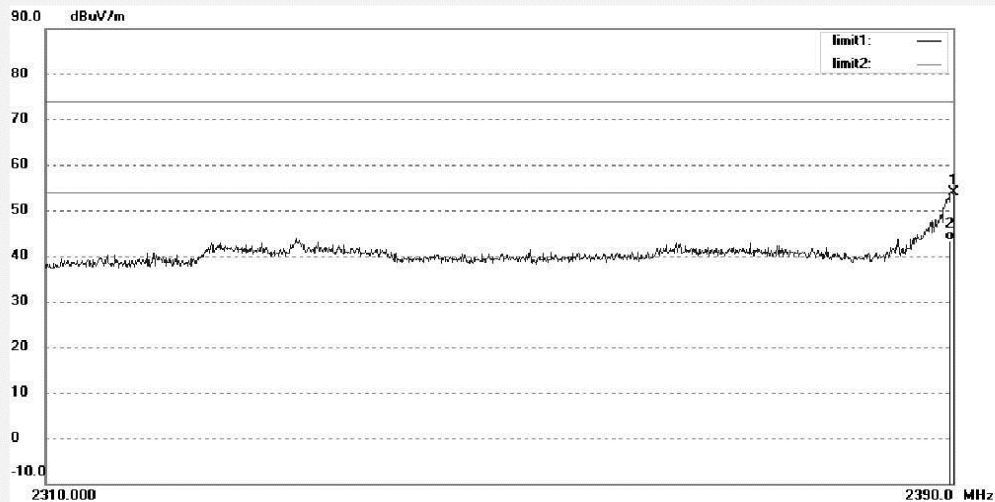

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	61.46	-7.53	53.93	74.00	-20.07	peak			
2	2390.000	50.95	-7.53	43.42	54.00	-10.58	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #268	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2412MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11g

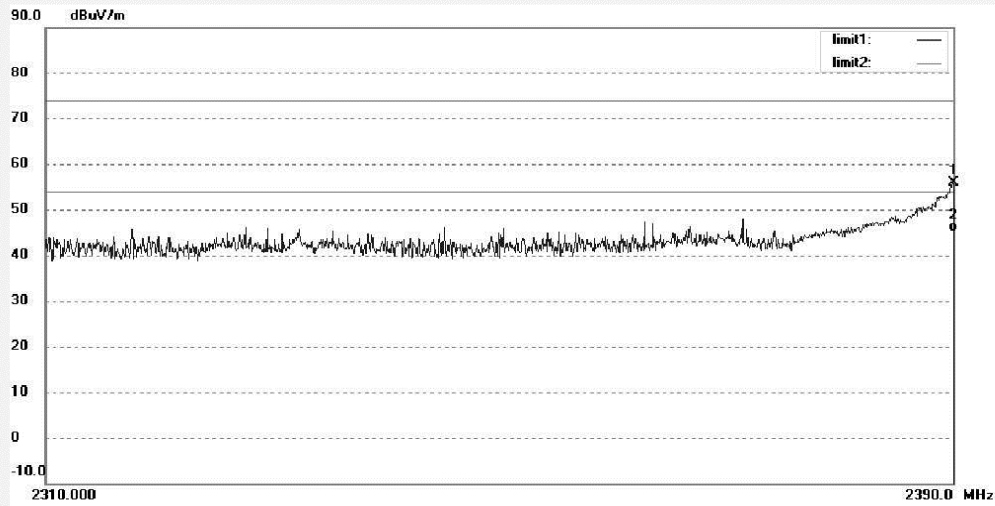

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	63.36	-7.53	55.83	74.00	-18.17	peak			
2	2390.000	52.75	-7.53	45.22	54.00	-8.78	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #269	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2462MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11g

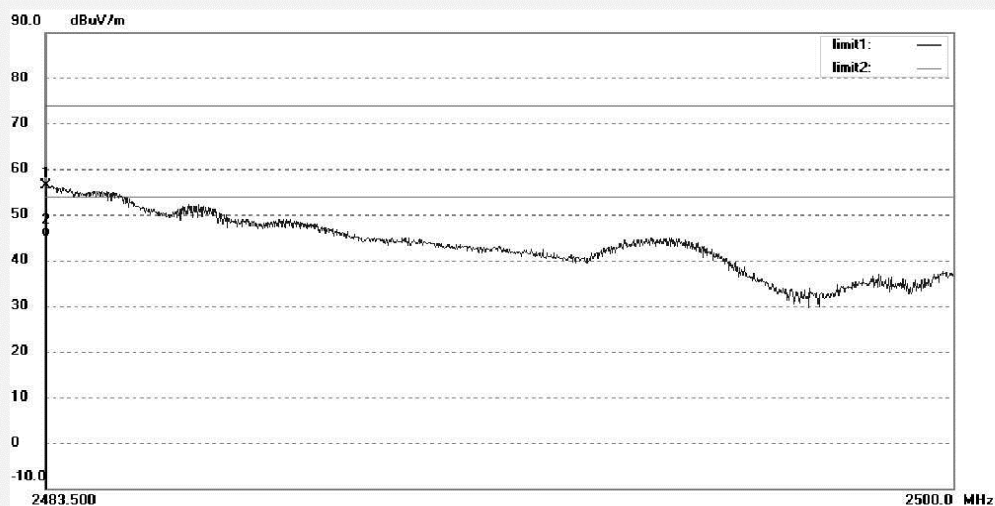

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	63.70	-7.37	56.33	74.00	-17.67	peak			
2	2483.500	52.38	-7.37	45.01	54.00	-8.99	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #270	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2462MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11g

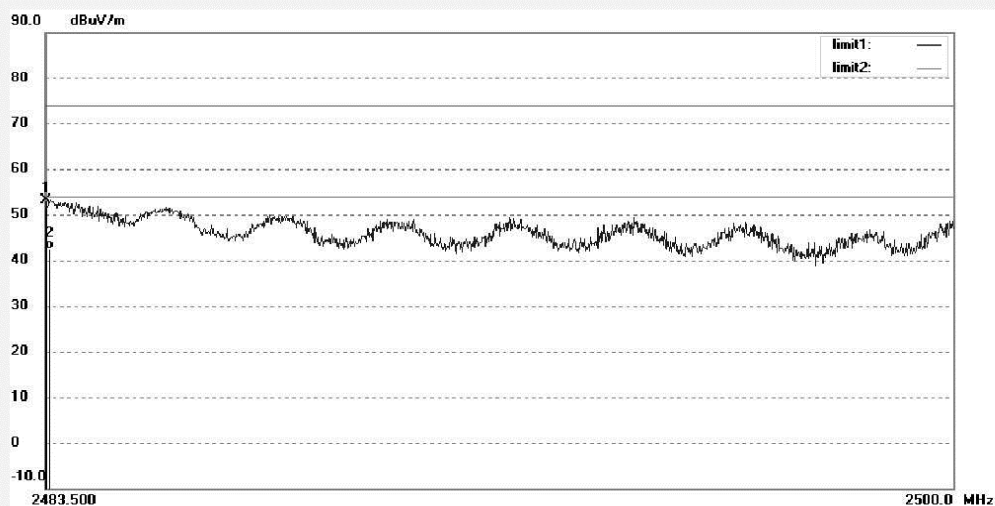

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	60.42	-7.37	53.05	74.00	-20.95	peak			
2	2483.500	49.79	-7.37	42.42	54.00	-11.58	AVG			

Produkte
Products

Appendix B.7: Radiated emission in restricted band, 802.11n HT20_1TX




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #271	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2412MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11n HT20

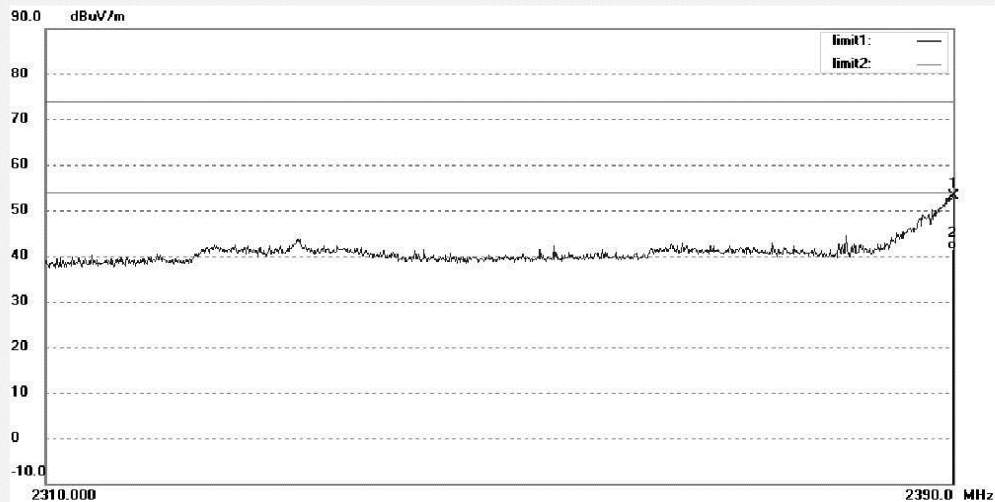

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	60.60	-7.53	53.07	74.00	-20.93	peak			
2	2390.000	48.99	-7.53	41.46	54.00	-12.54	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #272	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2412MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT20	

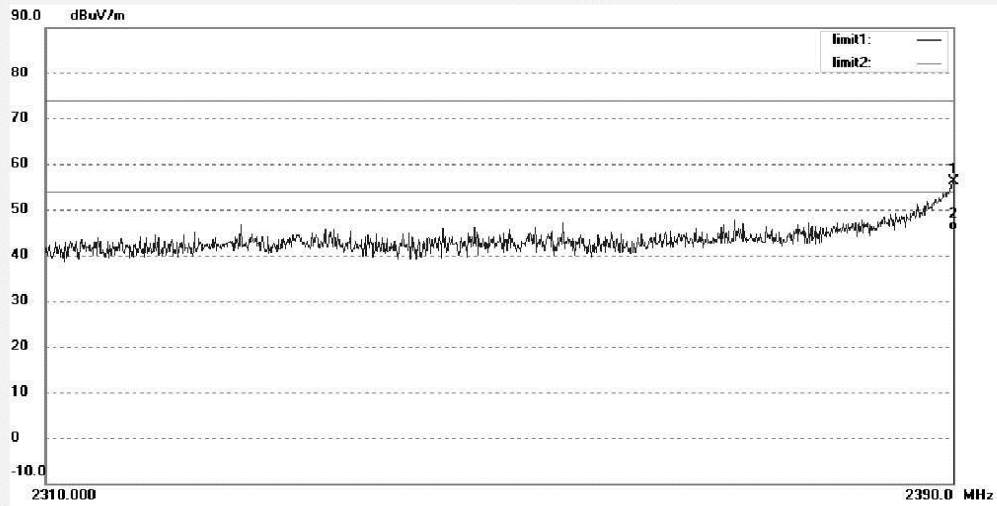

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	63.67	-7.53	56.14	74.00	-17.86	peak			
2	2390.000	52.88	-7.53	45.35	54.00	-8.65	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #273	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2462MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT20	

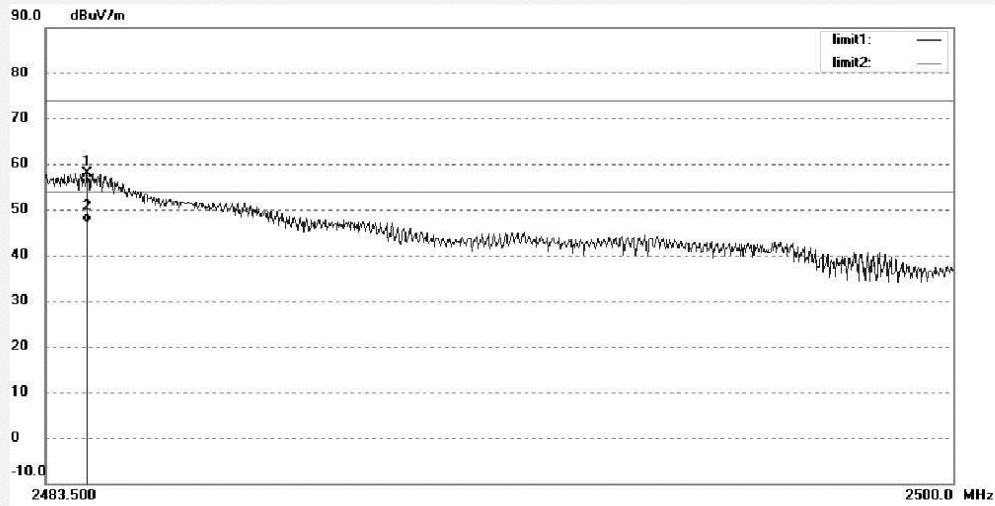

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2484.259	65.23	-7.38	57.85	74.00	-16.15	peak			
2	2484.259	54.56	-7.38	47.18	54.00	-6.82	AVG			

**ACCURATE TECHNOLOGY CO., LTD.**
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: lenovo #274

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ThinkPad Stack Wireless Access Point

Mode: TX 2462MHz

Model: R123

Manufacturer: Lenovo

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2015/02/08

Time:

Engineer Signature:

Distance: 3m

Note: 802.11n HT20

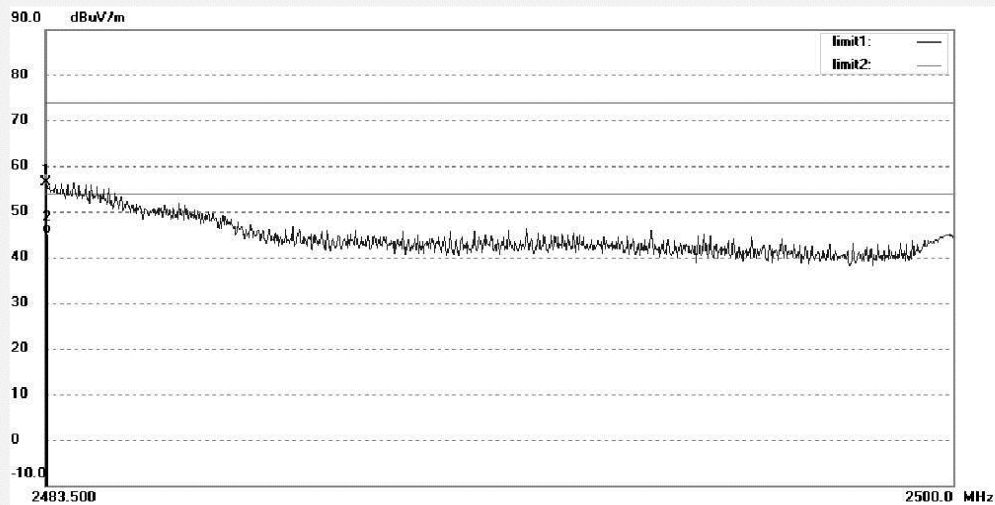

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	63.82	-7.37	56.45	74.00	-17.55	peak			
2	2483.500	52.53	-7.37	45.16	54.00	-8.84	AVG			

Appendix B.8: Radiated emission in restrictd band, 802.11n HT40_1TX




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #275	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2422MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note: 802.11n HT40

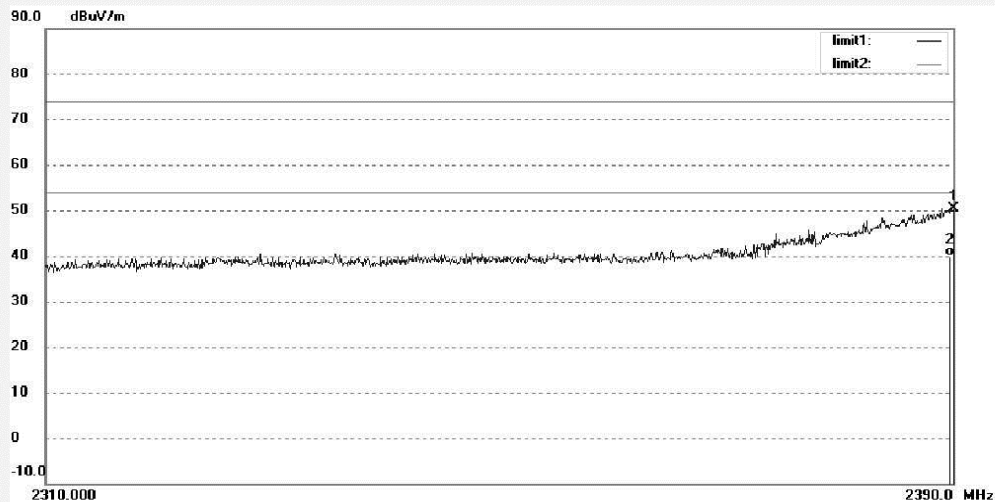

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	58.00	-7.53	50.47	74.00	-23.53	peak			
2	2390.000	47.32	-7.53	39.79	54.00	-14.21	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #276	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2422MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT40	

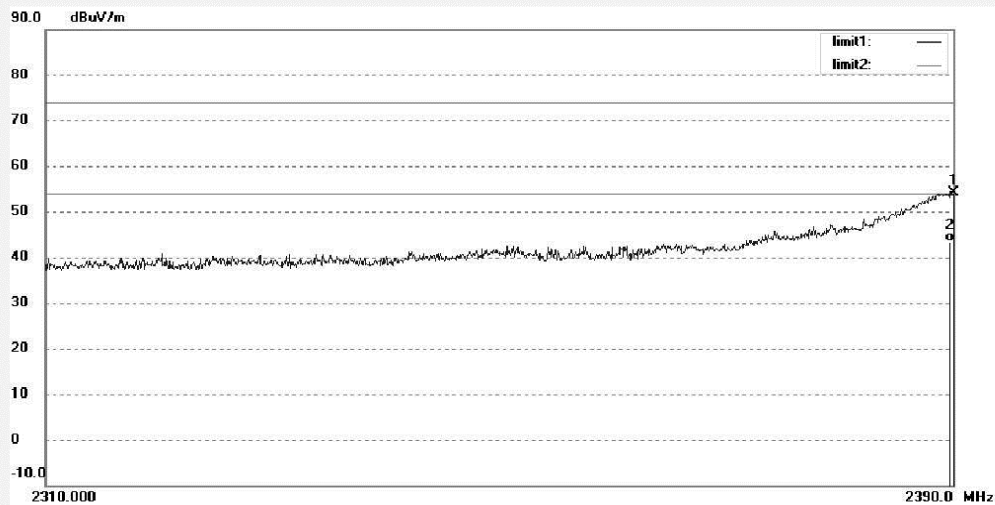

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	61.78	-7.53	54.25	74.00	-19.75	peak			
2	2390.000	50.85	-7.53	43.32	54.00	-10.68	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #277	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2015/02/08
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: TX 2452MHz	Distance: 3m
Model: R123	
Manufacturer: Lenovo	
Note: 802.11n HT40	

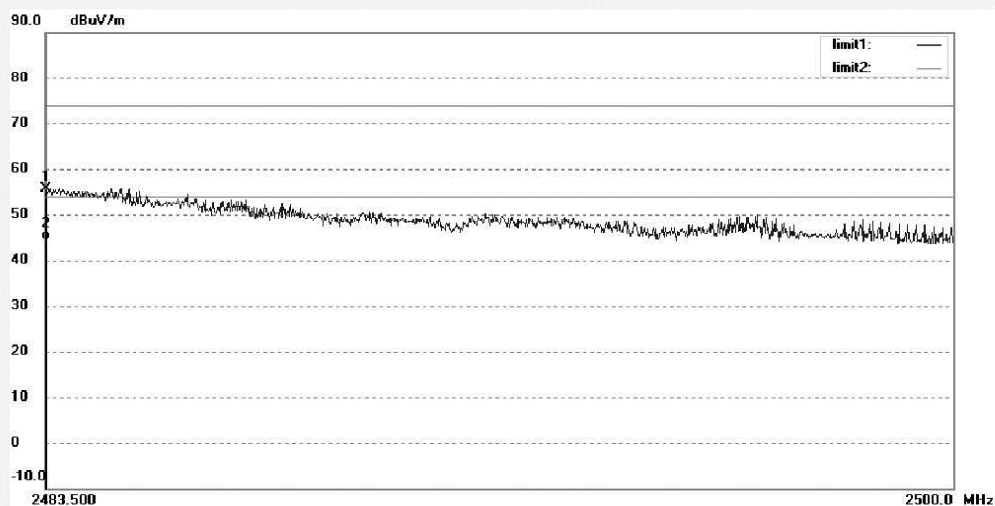

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	63.06	-7.37	55.69	74.00	-18.31	peak			
2	2483.500	51.79	-7.37	44.42	54.00	-9.58	AVG			

Produkte
Products



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #278
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ThinkPad Stack Wireless Access Point
Mode: TX 2452MHz
Model: R123
Manufacturer: Lenovo

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2015/02/08
Time:
Engineer Signature:
Distance: 3m

Note: 802.11n HT40

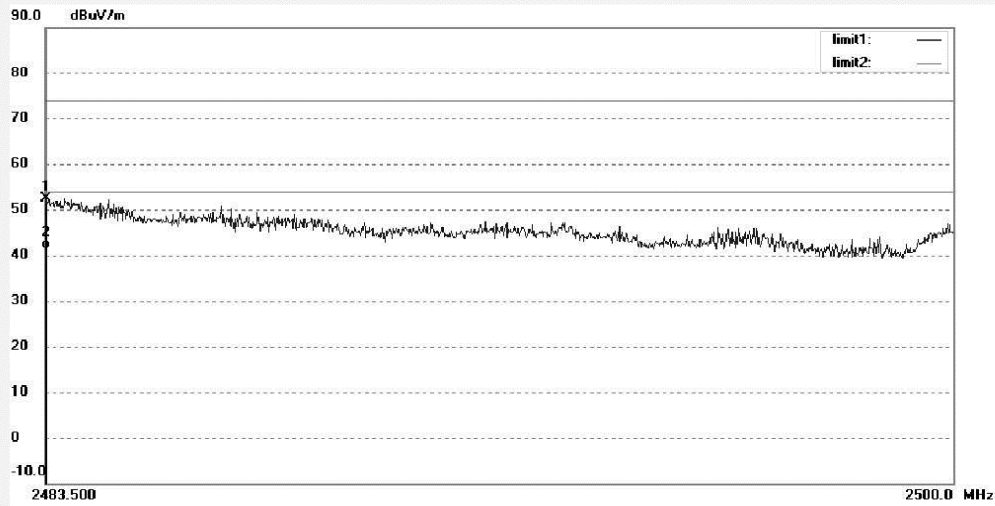

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	59.67	-7.37	52.30	74.00	-21.70	peak			
2	2483.500	48.76	-7.37	41.39	54.00	-12.61	AVG			

Appendix C

Test Results of Radiated Emissions and Conducted Emissions

APPENDIX C.1: TEST RESULTS OF RADIATED EMISSIONS 2

ACCESS TO USB DISK VIA WI-FI 2

ACCESS TO HDD DISK VIA WI-FI 6

APPENDIX C.2: TEST RESULTS OF CONDUCTED EMISSIONS..... 10

ACCESS TO HDD DISK VIA WI-FI 10

ACCESS TO USB DISK VIA WI-FI 12

Produkte
Products

Appendix C.1: Test Results of Radiated Emissions

Access to USB disk via Wi-Fi



ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #847

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ThinkPad Stack Wireless Access Point

Mode: Access to USB disk via WiFi

Model: R123

Manufacturer: Lenovo

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 15/04/27/

Time:

Engineer Signature:

Distance: 3m

Note:

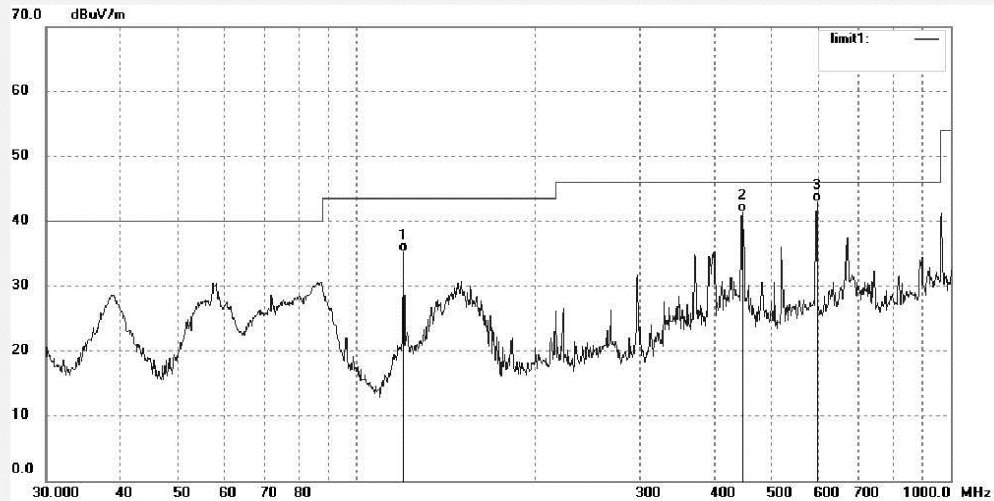

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	119.8555	48.34	-13.15	35.19	43.50	-8.31	QP			
2	446.4141	47.18	-5.84	41.34	46.00	-4.66	QP			
3	595.1327	45.99	-3.02	42.97	46.00	-3.03	QP			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #848	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: Access to USB disk via WiFi	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note:

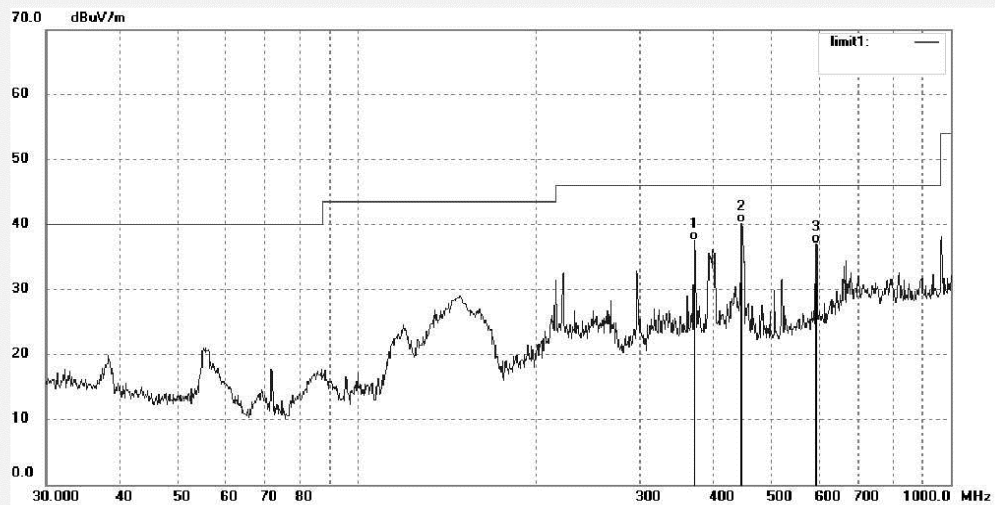

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	369.4045	44.98	-7.51	37.47	46.00	-8.53	QP			
2	444.8514	46.02	-5.86	40.16	46.00	-5.84	QP			
3	593.0497	39.96	-3.03	36.93	46.00	-9.07	QP			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #873	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: Access to USB disk via WiFi	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note:

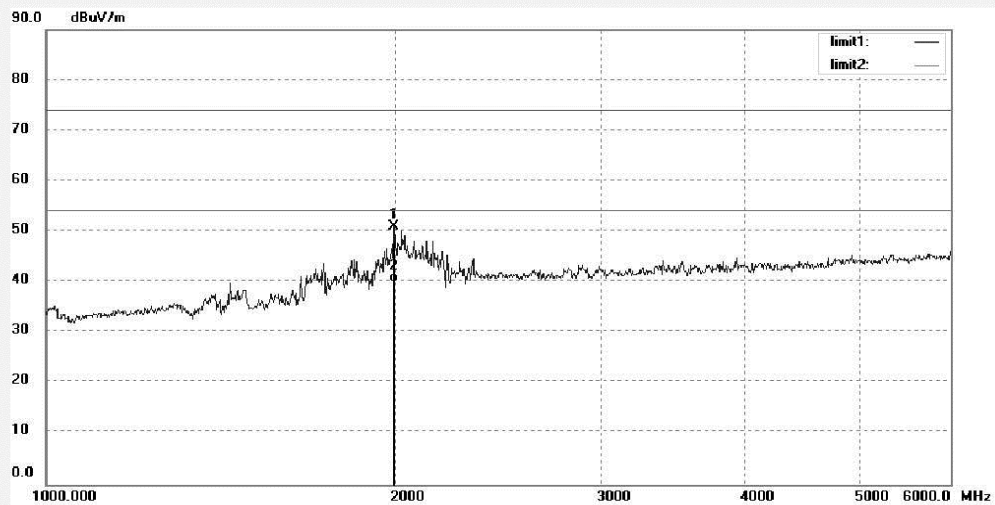

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1993.371	59.92	-9.04	50.88	74.00	-23.12	peak			
2	1993.371	48.98	-9.04	39.94	54.00	-14.06	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #874	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: Access to USB disk via WiFi	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note:

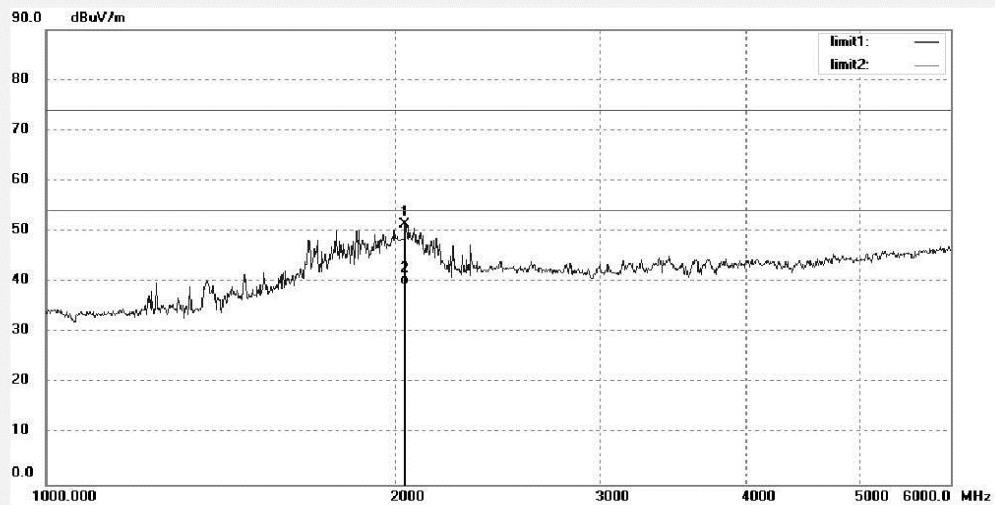

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2036.695	60.31	-8.97	51.34	74.00	-22.66	peak			
2	2036.695	48.53	-8.97	39.56	54.00	-14.44	AVG			

Produkte
Products

Access to HDD disk via Wi-Fi




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #849	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: Access to USB HDD via WiFi	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note:

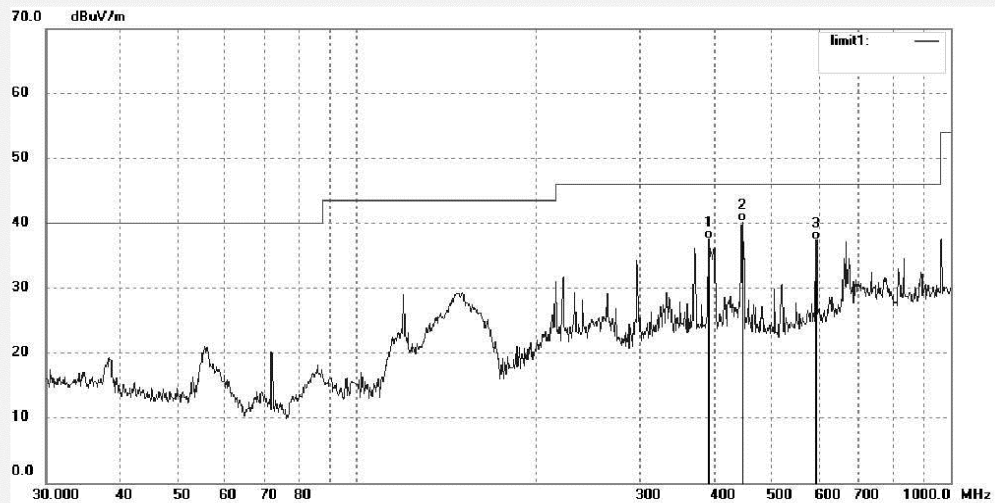

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	392.0951	44.66	-7.14	37.52	46.00	-8.48	QP			
2	446.4141	45.96	-5.84	40.12	46.00	-5.88	QP			
3	593.0497	40.45	-3.03	37.42	46.00	-8.58	QP			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #850	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: Access to USB HDD via WiFi	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note:

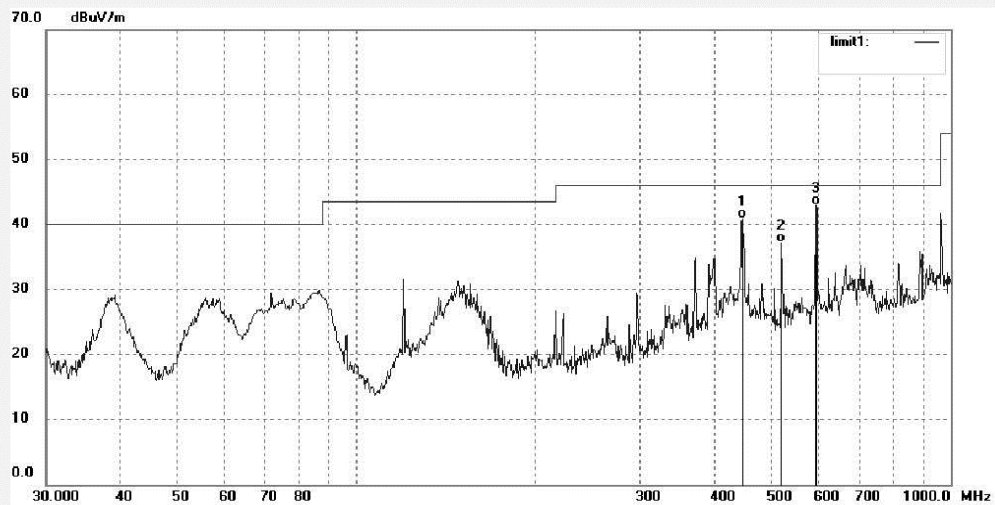

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	446.4141	46.71	-5.84	40.87	46.00	-5.13	QP			
2	519.0647	41.55	-4.36	37.19	46.00	-8.81	QP			
3	593.0497	45.97	-3.03	42.94	46.00	-3.06	QP			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #875	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: Access to USB HDD via WiFi	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note:

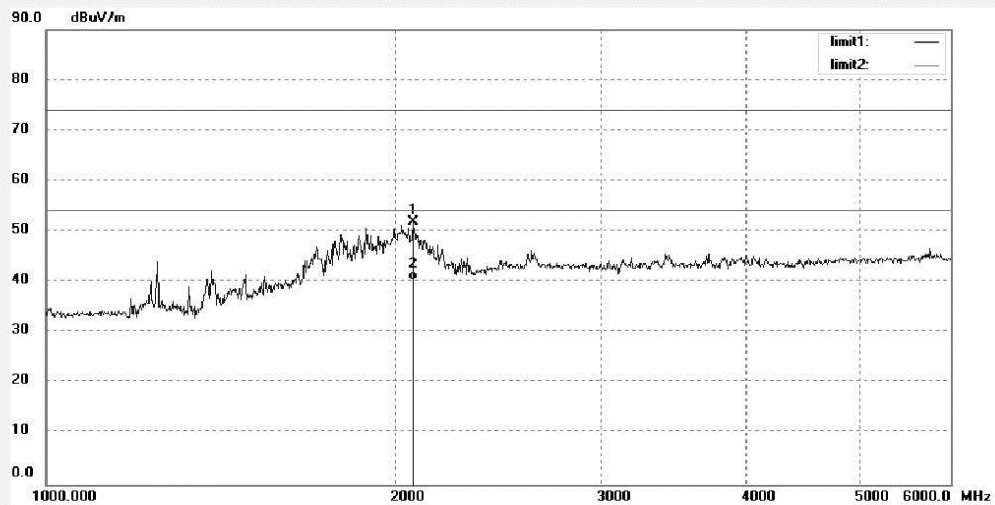

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2069.805	60.61	-8.76	51.85	74.00	-22.15	peak			
2	2069.805	49.08	-8.76	40.32	54.00	-13.68	AVG			

Produkte
Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: lenovo #876	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 15/04/27/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ThinkPad Stack Wireless Access Point	Engineer Signature:
Mode: Access to USB HDD via WiFi	Distance: 3m
Model: R123	
Manufacturer: Lenovo	

Note:

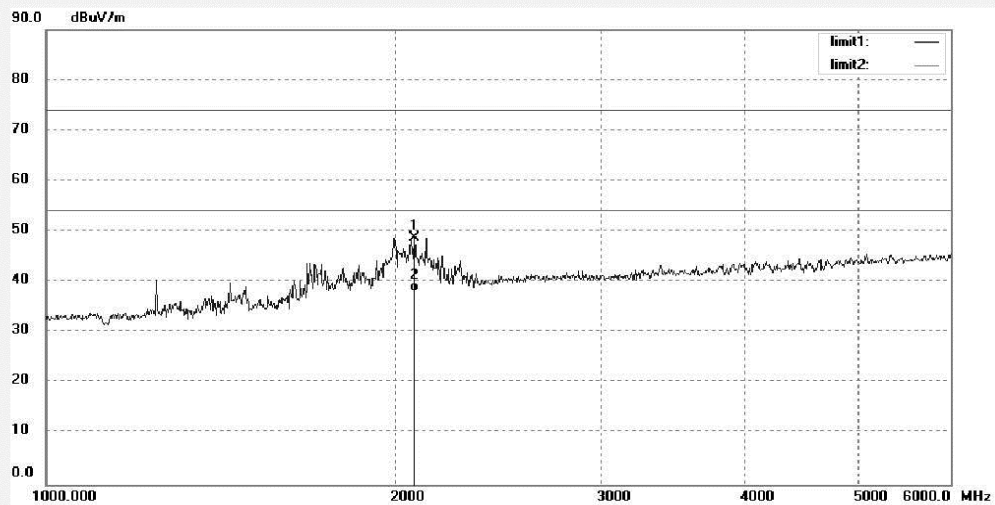

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2073.517	57.49	-8.72	48.77	74.00	-25.23	peak			
2	2073.517	46.78	-8.72	38.06	54.00	-15.94	AVG			

Appendix C.2: Test Results of Conducted Emissions

Access to HDD disk via Wi-Fi


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: Access to USB HDD via WiFi
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: L 120V/60Hz
 Comment: Mains Port
 Start of Test: 2015-4-28 /

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

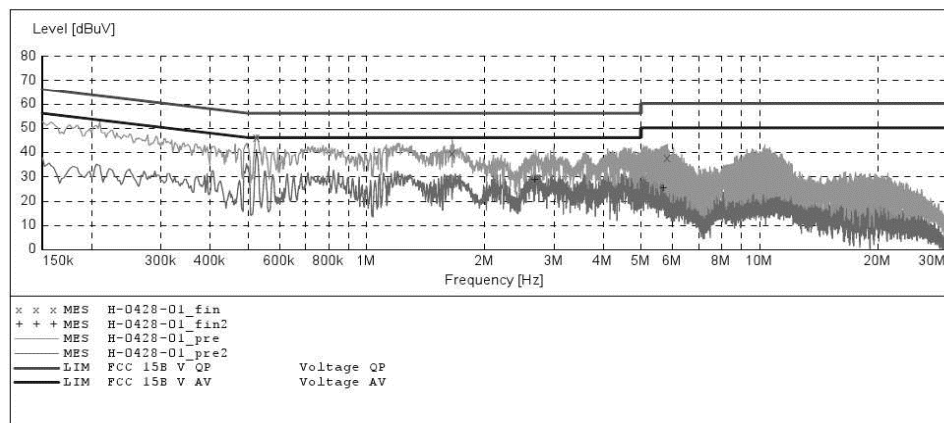

MEASUREMENT RESULT: "H-0428-01_fin"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.526000	46.00	11.5	56	10.0	QP	L1	GND
1.656000	39.30	11.6	56	16.7	QP	L1	GND
5.838500	37.40	11.8	60	22.6	QP	L1	GND

MEASUREMENT RESULT: "H-0428-01_fin2"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.526000	39.60	11.5	46	6.4	AV	L1	GND
2.688500	28.50	11.7	46	17.5	AV	L1	GND
5.694500	24.90	11.8	50	25.1	AV	L1	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ThinkPad Stack Wireless Access Point M/N:R123
Manufacturer: Lenovo
Operating Condition: Access to USB HDD via WiFi
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 2015-4-28 /

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

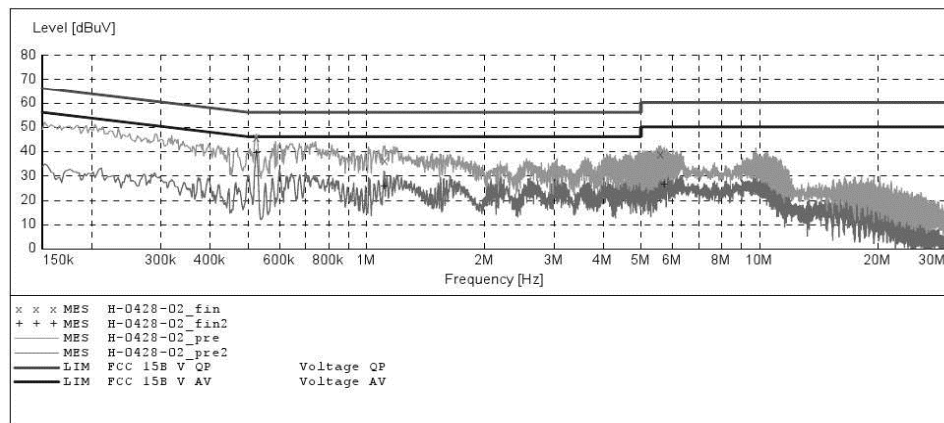

MEASUREMENT RESULT: "H-0428-02_fin"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.526000	45.40	11.5	56	10.6	QP	N	GND
1.116000	36.00	11.6	56	20.0	QP	N	GND
5.613500	38.60	11.8	60	21.4	QP	N	GND

MEASUREMENT RESULT: "H-0428-02_fin2"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.526000	39.10	11.5	46	6.9	AV	N	GND
1.112000	25.40	11.6	46	20.6	AV	N	GND
5.730500	26.00	11.8	50	24.0	AV	N	GND

Access to USB disk via Wi-Fi


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ThinkPad Stack Wireless Access Point M/N:R123
Manufacturer: Lenovo
Operating Condition: Access to USB disk via WiFi
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 2015-4-28 /

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

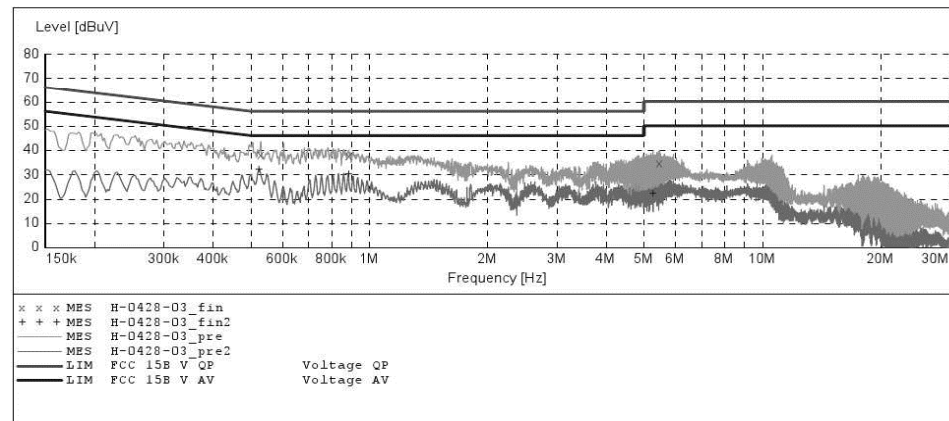

MEASUREMENT RESULT: "H-0428-03_fin"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.530000	37.90	11.5	56	18.1	QP	N	GND
0.888000	37.50	11.6	56	18.5	QP	N	GND
5.474000	34.50	11.8	60	25.5	QP	N	GND

MEASUREMENT RESULT: "H-0428-03_fin2"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.524000	31.80	11.5	46	14.2	AV	N	GND
0.886000	29.70	11.6	46	16.3	AV	N	GND
5.271500	21.90	11.8	50	28.1	AV	N	GND


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ThinkPad Stack Wireless Access Point M/N:R123
 Manufacturer: Lenovo
 Operating Condition: Access to USB disk via WiFi
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: L 120V/60Hz
 Comment: Mains Port
 Start of Test: 2015-4-28 /

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

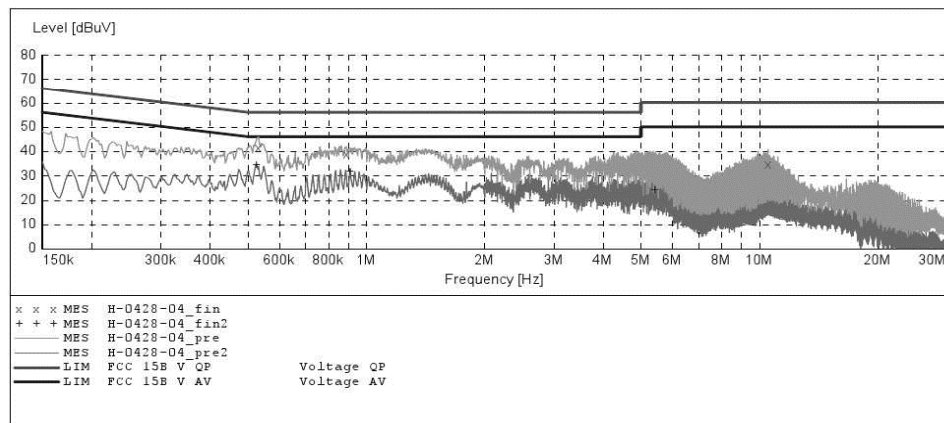

MEASUREMENT RESULT: "H-0428-04_fin"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.532000	41.30	11.5	56	14.7	QP	L1	GND
0.890000	38.70	11.6	56	17.3	QP	L1	GND
10.527500	34.40	11.9	60	25.6	QP	L1	GND

MEASUREMENT RESULT: "H-0428-04_fin2"

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.526000	34.10	11.5	46	11.9	AV	L1	GND
0.910000	31.40	11.6	46	14.6	AV	L1	GND
5.420000	23.80	11.8	50	26.2	AV	L1	GND

Appendix D

Test Results of RF Exposure

APPENDIX D.1: RF EXPOSURE COMPLIANCE	2
--	---

Appendix D.1: RF Exposure Compliance

Radio Frequency Exposure Compliance

RESULT:

Passed

Test standard : FCC 1.1310
RSS-102 Issue 5
FCC KDB publication 447498 D01 v05

This device is mobile device, and the applicant declares that the minimum separation distance is greater than 20cm. Therefore MPE measurement or computational modeling should be used to determine compliance.

MPE Calculation
According to the formula

$$Pd = \frac{P_{out} * G}{4R^2\pi}$$

Where

Pd = power density in mW/cm² or W/m²

Pout = output power to antenna in mW or W

G = Antenna gain in numeric

π = 3.14159

R = Distance between observation point and the center of radiator in cm or m

In here

Pout = 16.50dBm = 44.67mW

G = 1.2dBi = 1.32 (numeric)

R = 20cm

For Bluetooth operation:

$$Pd = \frac{P_{out} * G}{4R^2\pi} = \frac{44.67 * 1.32}{4 * 20^2 * 3.14159} = 0.0117mW / cm^2 < 1mW/cm^2 \text{ for FCC limit}$$

$$Pd = \frac{P_{out} * G}{4R^2\pi} = \frac{0.04467 * 1.32}{4 * 0.2^2 * 3.14159} = 0.117W / m^2 < 5.4W/m^2 \text{ for IC limit}$$

The summed maximum permissible exposure (MPE) level is 0.0117mW/cm² and 0.117W/m². It is less than MPE limit 1mW/cm² for FCC and 5.4W/m² for IC, therefore the device compliance with MPE limit.