# **FCC RF Test Report**

Report No.: FR570164-35

APPLICANT : Getac Technology Corporation.

**EQUIPMENT**: RFID Module

BRAND NAME : Infothink

MODEL NAME : 179-90010390A0-9 RX10+PN7462

FCC ID : QYLPN7462R

STANDARD : FCC Part 15 Subpart C §15.225

**CLASSIFICATION**: (DXX) Low Power Communication Device Transmitter

The testing was completed on Sep. 09, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

#### SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC. Page Number : 1 of 19
TEL: 886-3-327-3456 Report Issued Date : Sep. 22, 2017

FAX: 886-3-328-4978 Report Version : Rev. 02
FCC ID: QYLPN7462R Report Template No.: BU5-FR15CNFC Version 2.0

## **TABLE OF CONTENTS**

SUMM	SUMMARY OF THE TEST RESULT4				
1 GFN	ERAL INFORMATION				
1.1	Applicant				
1.2	Product Feature of Equipment Under Test				
1.3	Modification of EUT				
1.4	Testing Location				
1.5	Applicable Standards				
2 TFS	T CONFIGURATION OF EQUIPMENT UNDER TEST				
2.1	Descriptions of Test Mode				
2.2	Connection Diagram of Test System				
2.3	Table for Supporting Units				
2.4	EUT Operation Test Setup				
	T RESULTS				
3.1	AC Power Line Conducted Emissions Measurement				
3.2	20dB and 99% OBW Spectrum Bandwidth Measurement				
3.3	Frequency Stability Measurement				
3.4	Field Strength of Fundamental Emissions and Mask Measurement				
3.5	Radiated Emissions Measurement15				
3.6	Antenna Requirements18				
4. LIST	OF MEASURING EQUIPMENT19				
APPEN	IDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST				

### APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS

- B1. Test Result of 20dB Spectrum Bandwidth
- B2. Test Result of Frequency Stability

#### APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS

- C1. Test Result of Field Strength of Fundamental Emissions
- C2. Results of Radiated Emissions (9 kHz~30MHz)
- C3. Results of Radiated Emissions (30MHz~1GHz)

#### **APPEDNIX D. SETUP PHOTOGRAPHS**

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: QYLPN7462R Page Number : 2 of 19
Report Issued Date : Sep. 22, 2017
Report Version : Rev. 02

Report No.: FR570164-35

## **REVISION HISTORY**

Report No. : FR570164-35

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR570164-35	Rev. 01	Initial issue of report	Sep. 21, 2017
FR570164-35	Rev. 02	Revising EUT information in section 1.2.	Sep. 22, 2017

 SPORTON INTERNATIONAL INC.
 Page Number
 : 3 of 19

 TEL: 886-3-327-3456
 Report Issued Date
 : Sep. 22, 2017

 FAX: 886-3-328-4978
 Report Version
 : Rev. 02

## **SUMMARY OF THE TEST RESULT**

Applied Standard: 47 CFR FCC Part 15 Subpart C					
Part	FCC Rule	Description of Test	Result	Remark	
		AC Power Line Conducted		Under limit	
3.1	15.207	Emissions	Complies	1.50 dB at	
		EIIIISSIOIIS		13.558MHz	
	15.215(c)	20dB Spectrum Bandwidth	Complies	-	
3.2	-	99% OBW Spectrum	Complies		
		Bandwidth		•	
3.3	15.225(e)	Frequency Stability	Complies	-	
3.4	15 225(a)(b)(a)	Field Strength of	Complies	Max level	
3.4	15.225(a)(b)(c)	Fundamental Emissions	Complies	65.57 dBµV/m at 13.560 MHz	
	15.225(d) 15.209	Padiated Spurious		Under limit	
3.5		, ,	Complies	3.22 dB at	
				40.800MHz	
3.6	15.203	Antenna Requirements	Complies	-	

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.26dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±5.20dB	Confidence levels of 95%

 ${\it SPORTON\ INTERNATIONAL\ INC.}$ 

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: QYLPN7462R Page Number : 4 of 19
Report Issued Date : Sep. 22, 2017
Report Version : Rev. 02

Report No. : FR570164-35

#### 1. GENERAL INFORMATION

## 1.1 Applicant

**Getac Technology Corporation.** 

5F., Building A, No. 209, Sec.1, Nangang Rd., Nangang Dist., Taipei City 11568, Taiwan, R.O.C.

Report No.: FR570164-35

## 1.2 Product Feature of Equipment Under Test

NFC

Product Specification subjective to this standard			
EUT Installed into tablet	Host: Brand Name: Getac Model Name: RX10		
Antenna Type NFC: Loop Antenna			

#### 1.3 Modification of EUT

No modifications are made to the EUT during all test items.

 SPORTON INTERNATIONAL INC.
 Page Number
 : 5 of 19

 TEL: 886-3-327-3456
 Report Issued Date
 : Sep. 22, 2017

 FAX: 886-3-328-4978
 Report Version
 : Rev. 02

## 1.4 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Report No.: FR570164-35

Test Site	SPORTON INTERNATIONAL INC.		
	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Techn	ology Park,	
Test Site Location	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.		
	TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		
rest site No.	TH03-HY	CO05-HY	
Test Engineer	Tim Li, Tommy Lee	Kai-Chun Chu	
Temperature	Temperature         22-24°C         26~		
Relative Humidity	53~55%	48~49%	

**Note:** The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.		
	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist,		
Test Site Location	Taoyuan City, Taiwan (R.O.C.)		
	TEL: +886-3-327-0868 / FAX: +886-3-327-0855		
Test Site No.	Sporton Site No.		
rest site No.	03CH11-HY		
Test Engineer	Jacky Hung, Hao Hsu		
Temperature	21-24℃		
Relative Humidity	51~54%		

Note: The test site complies with ANSI C63.4 2014 requirement.

## 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.225
- ANSI C63.10-2013

 SPORTON INTERNATIONAL INC.
 Page Number
 : 6 of 19

 TEL: 886-3-327-3456
 Report Issued Date
 : Sep. 22, 2017

 FAX: 886-3-328-4978
 Report Version
 : Rev. 02

### 2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST

### 2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations for searching the worst cases.

The following table is a list of the test modes shown in this test report.

Test Items			
AC Power Line Conducted Emissions Field Strength of Fundamental Emissions			
20dB Spectrum Bandwidth	Frequency Stability		
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz		

Report No.: FR570164-35

The EUT pre-scanned in four NFC type, A, B, F, V. The worst type (type F) was recorded in this report. Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.

	Test Cases				
AC Conducted Emission	Mode 1:	GSM850 (GPRS Class 8) Idle + Bluetooth Idle + WLAN (2.4GHz) Idle + RFID Tx + TF + TC			

#### Remark:


- TC stands for Test Configuration, and consists of Earphone with Mic, LCD Monitor(HDMI out), USB 2.0 HD, USB 3.0 HD, Battery, and AC Adapter.
- 2. TF stands for Test Function, and consists of H-Pattern, MPEG4, Camera, Barcode scan, GPS Rx and Digitizer.

 SPORTON INTERNATIONAL INC.
 Page Number
 : 7 of 19

 TEL: 886-3-327-3456
 Report Issued Date
 : Sep. 22, 2017

 FAX: 886-3-328-4978
 Report Version
 : Rev. 02

## 2.2 Connection Diagram of Test System

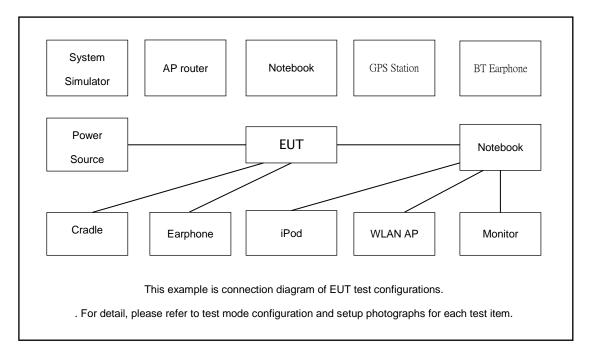

## 2.3 Table for Supporting Units

Support Unit	Manufacturer	Model	FCC ID
Base Station	Anritsu	MT8820C	N/A
GPS Station	Pendulum	GSG-54	N/A
Bluetooth Earphone	SonyErricsson	MW600	PY700A2029
WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U
IPhone Earphone	Apple	A1387	FCC DoC
IPod Earphone	Apple	Verification	NA
LCD MONITOR	DELL	U2410	FCC DoC
USB HD	PQI	H568V	FCC DoC
USB HD	PQI	H568V	FCC DoC
NFC Card	Metro Taipei	Easy Card	N/A

## 2.4 EUT Operation Test Setup

The EUT was programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 1 cm gap to the EUT.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: QYLPN7462R Page Number : 8 of 19
Report Issued Date : Sep. 22, 2017
Report Version : Rev. 02

Report No.: FR570164-35

#### 3. TEST RESULTS

#### 3.1 AC Power Line Conducted Emissions Measurement

#### 3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Report No.: FR570164-35

Frequency of Emission	Conducted Limit (dBμV)		
(MHz)	Quasi-Peak	Average	
0.15-0.5	66 to 56*	56 to 46*	
0.5-5	56	46	
5-30	60	50	

<sup>\*</sup>Decreases with the logarithm of the frequency.

#### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.1.3 Test Procedures


- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
- 2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3. All the support units are connecting to the other LISN.
- 4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6. Both sides of AC line were checked for maximum conducted interference.
- 7. The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

 SPORTON INTERNATIONAL INC.
 Page Number
 : 9 of 19

 TEL: 886-3-327-3456
 Report Issued Date
 : Sep. 22, 2017

 FAX: 886-3-328-4978
 Report Version
 : Rev. 02

#### 3.1.4 Test setup

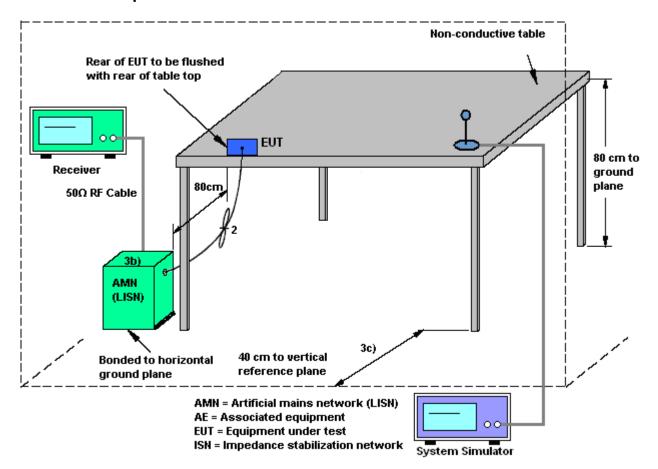

#### 3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

#### Note:

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.

(2) with dummy load

Remark: Only the fundamental NFC signal needs to be retested per C63.4.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: QYLPN7462R Page Number : 10 of 19
Report Issued Date : Sep. 22, 2017
Report Version : Rev. 02

Report No.: FR570164-35

## 3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

#### 3.2.1 Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz.


#### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.2.3 Test Procedures

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
- 2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.
- 4. Measured the 99% OBW.

#### 3.2.4 Test Setup



#### 3.2.5 Test Result of Conducted Test Items

Please refer to Appendix B.

FAX: 886-3-328-4978 FCC ID: QYLPN7462R Page Number : 11 of 19
Report Issued Date : Sep. 22, 2017
Report Version : Rev. 02

Report No.: FR570164-35

### 3.3 Frequency Stability Measurement

#### 3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT.
- 2. EUT have transmitted signal and fixed channelize.
- 3. Set the spectrum analyzer span to view the entire emissions bandwidth.
- 4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
- 5. The fc is declaring of channel frequency. Then the frequency error formula is  $(fc-f)/fc \times 10^6$  ppm and the limit is less than  $\pm 100$ ppm.
- 6. Extreme temperature rule is -20°C~50°C.

#### 3.3.4 Test Setup

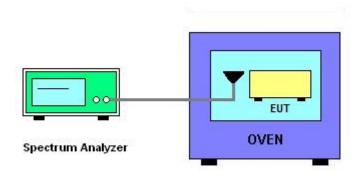

#### 3.3.5 Test Result of Conducted Test Items

Please refer to Appendix B.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: QYLPN7462R Page Number : 12 of 19
Report Issued Date : Sep. 22, 2017
Report Version : Rev. 02

Report No.: FR570164-35

### 3.4 Field Strength of Fundamental Emissions and Mask Measurement

Report No.: FR570164-35

#### 3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225 IC RSS-210 B.6			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
From of Fraincian (NALL-)	Field Strength	Field Strength	Field Strength	Field Strength
Freq. of Emission (MHz)	(µV/m) at 30m	(dBµV/m) at 30m	(dBµV/m) at 10m	(dBµV/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

- Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
- 4. For Fundamental emissions, use the receiver to measure QP reading.

 SPORTON INTERNATIONAL INC.
 Page Number
 : 13 of 19


 TEL: 886-3-327-3456
 Report Issued Date
 : Sep. 22, 2017

 FAX: 886-3-328-4978
 Report Version
 : Rev. 02

- 5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 6. Compliance with the spectrum mask is tested with RBW set to 9kHz. Note: Emission level ( $dB\mu V/m$ ) = 20 log Emission level ( $\mu V/m$ ).

#### 3.4.4 Test Setup

For radiated emissions below 30MHz

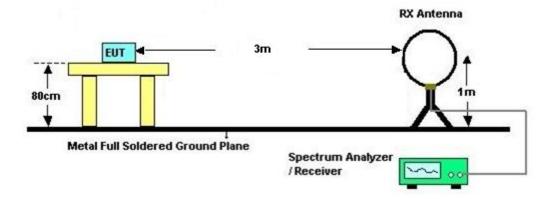

#### 3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.

SPORTON INTERNATIONAL INC.
TEL: 886-3-327-3456

FAX: 886-3-328-4978 FCC ID: QYLPN7462R Page Number : 14 of 19
Report Issued Date : Sep. 22, 2017
Report Version : Rev. 02

Report No.: FR570164-35

#### 3.5 Radiated Emissions Measurement

#### 3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Report No.: FR570164-35

Frequencies	Field Strength	Measurement Distance
(MHz)	(μV/m)	(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

**Note:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

 SPORTON INTERNATIONAL INC.
 Page Number
 : 15 of 19

 TEL: 886-3-327-3456
 Report Issued Date
 : Sep. 22, 2017

 FAX: 886-3-328-4978
 Report Version
 : Rev. 02

#### 3.5.4 Test Procedures

 Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

Report No.: FR570164-35

- 1. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 3. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements


 SPORTON INTERNATIONAL INC.
 Page Number
 : 16 of 19

 TEL: 886-3-327-3456
 Report Issued Date
 : Sep. 22, 2017


 FAX: 886-3-328-4978
 Report Version
 : Rev. 02

#### 3.5.5 Test Setup

For radiated emissions below 30MHz

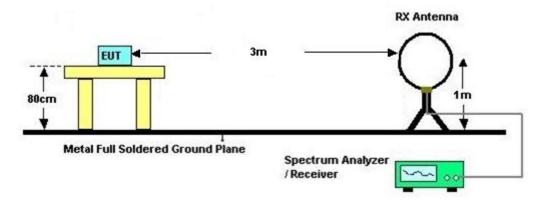

For radiated emissions above 30MHz

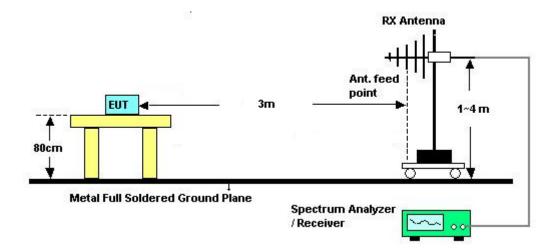

#### 3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: QYLPN7462R Page Number : 17 of 19
Report Issued Date : Sep. 22, 2017
Report Version : Rev. 02

Report No.: FR570164-35

### 3.6 Antenna Requirements

#### 3.6.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: FR570164-35

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### 3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

## 4. LIST OF MEASURING EQUIPMENT

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	AC POWER	AFC-500W	F104070011	50Hz~60Hz	Dec. 01, 2016	Aug. 17, 2017 ~ Sep. 08, 2017	Nov. 30, 2017	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 29, 2017	Aug. 17, 2017 ~ Sep. 08, 2017	Jun. 28, 2018	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Nov. 16, 2016	Aug. 17, 2017 ~ Sep. 08, 2017	Nov. 15, 2017	Conducted (TH03-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Aug. 15, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Aug. 15, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Aug. 15, 2017	Nov. 28, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Dec. 06, 2016	Aug. 15, 2017	Dec. 05, 2017	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Oct. 20, 2016	Sep. 08, 2017 ~ Sep. 09, 2017	Oct. 19, 2018	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6- 06	35414&AT-N 0602	30MHz~1GHz	Oct. 15, 2016	Sep. 08, 2017 ~ Sep. 09, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Sep. 08, 2017 ~ Sep. 09, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY5329005 3	20Hz to 26.5GHz	Jan. 12, 2017	Sep. 08, 2017 ~ Sep. 09, 2017	Jan. 11, 2018	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY5420048 6	10Hz ~ 44GHz	Oct. 12, 2016	Sep. 08, 2017 ~ Sep. 09, 2017	Oct. 11, 2017	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500 -B	N/A	1~4m	N/A	Sep. 08, 2017 ~ Sep. 09, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Sep. 08, 2017 ~ Sep. 09, 2017	N/A	Radiation (03CH11-HY)

Report No. : FR570164-35

 SPORTON INTERNATIONAL INC.
 Page Number
 : 19 of 19

 TEL: 886-3-327-3456
 Report Issued Date
 : Sep. 22, 2017

 FAX: 886-3-328-4978
 Report Version
 : Rev. 02

# **Appendix A. Test Results of Conducted Emission Test**

Test Engineer : Kai-Chun Chu	Koi Chun Chu	Temperature :	<b>26~27</b> ℃
rest Engineer.	Rai-Chun Chu	Relative Humidity :	48~49%

Report No. : FR570164-35

: A1 of A1

SPORTON INTERNATIONAL INC. Page Number

TEL: 886-3-327-3456 FAX: 886-3-328-4978

### **EUT Information**


 Report NO :
 570164-35

 Test Mode :
 Mode 1

 Test Voltage :
 120Vac/60Hz

Phase: Line

#### ENV216 Auto Test-L

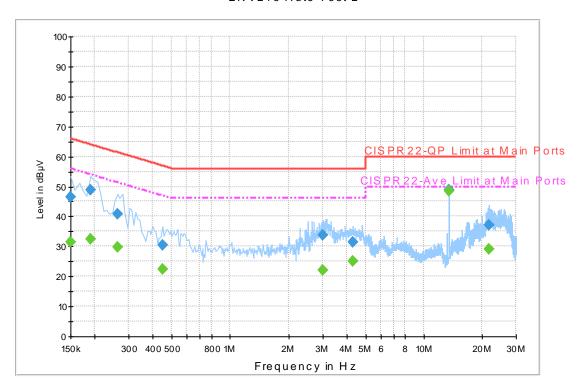

## Final Result 1

Frequency	QuasiPeak	Filter	Line	Corr.	Margin	Limit
(MHz)	(dBµV)			(dB)	(dB)	(dBµV)
0.150000	46.4	Off	L1	19.6	19.6	66.0
0.190000	48.7	Off	L1	19.5	15.3	64.0
0.262000	40.7	Off	L1	19.5	20.7	61.4
0.446000	30.5	Off	L1	19.5	26.4	56.9
3.030000	33.7	Off	L1	19.5	22.3	56.0
4.294000	31.3	Off	L1	19.6	24.7	56.0
13.558000	48.8	Off	L1	19.7	11.2	60.0
21.654000	37.3	Off	L1	19.8	22.7	60.0


## Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	31.5	Off	L1	19.6	24.5	56.0
0.190000	32.4	Off	L1	19.5	21.6	54.0
0.262000	29.6	Off	L1	19.5	21.8	51.4
0.446000	22.5	Off	L1	19.5	24.4	46.9
3.030000	22.2	Off	L1	19.5	23.8	46.0
4.294000	25.1	Off	L1	19.6	20.9	46.0
13.558000	48.5	Off	L1	19.7	1.5	50.0
21.654000	29.1	Off	L1	19.8	20.9	50.0

## **EUT Information**

Report NO: 570164-35
Test Mode: Mode 1
Test Voltage: 120Vac/60Hz
Phase: Neutral

#### ENV216 Auto Test-N

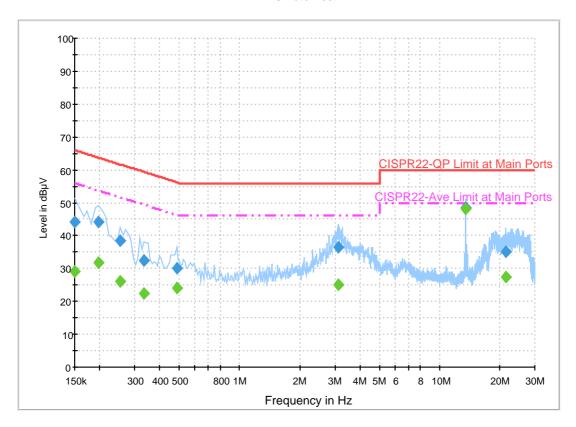

## Final Result 1


Frequency	QuasiPeak	Filter	Line	Corr.	Margin	Limit
(MHz)	(dBµV)			(dB)	(dB)	(dBµV)
0.150000	44.2	Off	N	19.5	21.8	66.0
0.198000	44.1	Off	N	19.5	19.6	63.7
0.254000	38.4	Off	N	19.5	23.2	61.6
0.334000	32.4	Off	N	19.5	27.0	59.4
0.486000	30.0	Off	N	19.5	26.2	56.2
3.110000	36.6	Off	N	19.5	19.4	56.0
13.558000	48.6	Off	N	19.8	11.4	60.0
21.590000	35.2	Off	N	19.9	24.8	60.0

## **Final Result 2**

Frequency	Average	Filter	Line	Corr.	Margin	Limit
(MHz)	(dBµV)			(dB)	(dB)	(dBµV)
0.150000	29.1	Off	N	19.5	26.9	56.0
0.198000	31.6	Off	N	19.5	22.1	53.7
0.254000	26.3	Off	N	19.5	25.3	51.6
0.334000	22.5	Off	N	19.5	26.9	49.4
0.486000	24.0	Off	N	19.5	22.2	46.2
3.110000	25.2	Off	N	19.5	20.8	46.0
13.558000	48.3	Off	N	19.8	1.7	50.0
21.590000	27.6	Off	N	19.9	22.4	50.0

# **Appendix B. Test Results of Conducted Test Items**

#### B1. Test Result of 20dB Spectrum Bandwidth

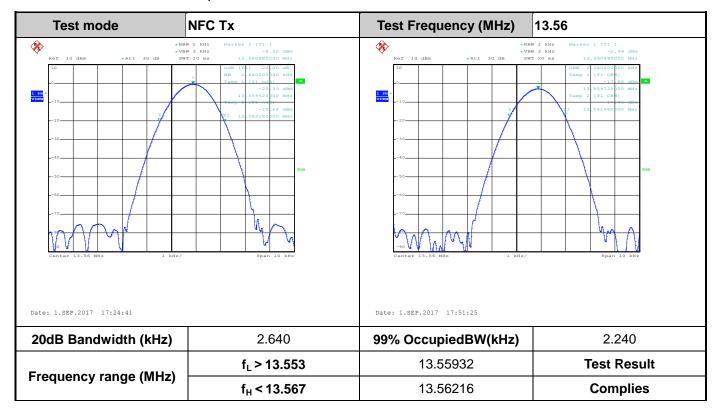

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Report No.: FR570164-35



## B2. Test Result of Frequency Stability

B3. Voltage vs. F	requency Stability	Tempera	Temperature vs. Frequency Stability				
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (℃)	Time	Measurement Frequency (MHz)			
120	13.560840	-20	0	13.560900			
102	13.560840		2	13.560900			
138	13.560830		5	13.560900			
			10	13.560900			
		-10	0	13.560900			
			2	13.560900			
			5	13.560900			
			10	13.560900			
		0	0	13.560900			
			2	13.560900			
			5	13.560900			
			10	13.560880			
		10	0	13.560890			
			2	13.560890			
			5	13.560880			
			10	13.560870			
		20	0	13.560880			
			2	13.560860			
			5	13.560860			
			10	13.560850			
		30	0	13.560840			
			2	13.560840			
			5	13.560840			
			10	13.560840			
		40	0	13.560830			
			2	13.560820			
			5	13.560820			
			10	13.560830			

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Report No. : FR570164-35


Voltage vs. Frequ	ency Stability	Tempe	rature vs. Freque	ency Stability
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
		50	0	13.560830
			2	
			5	13.560840
			10	13.560840
Max.Deviation (MHz)	0.000840	Max.Deviati	on (MHz)	0.000900
Max.Deviation (ppm)	61.9469	Max.Deviati	on (ppm)	66.3717
Limit	FS < ±100 ppm	Limit		FS < ±100 ppm
Test Result	PASS	Test Re	PASS	

TEL: 886-3-327-3456 FAX: 886-3-328-4978 : B3 of B3

Report No.: FR570164-35

## **Appendix C. Test Results of Radiated Test Items**

#### C1. Test Result of Field Strength of Fundamental Emissions

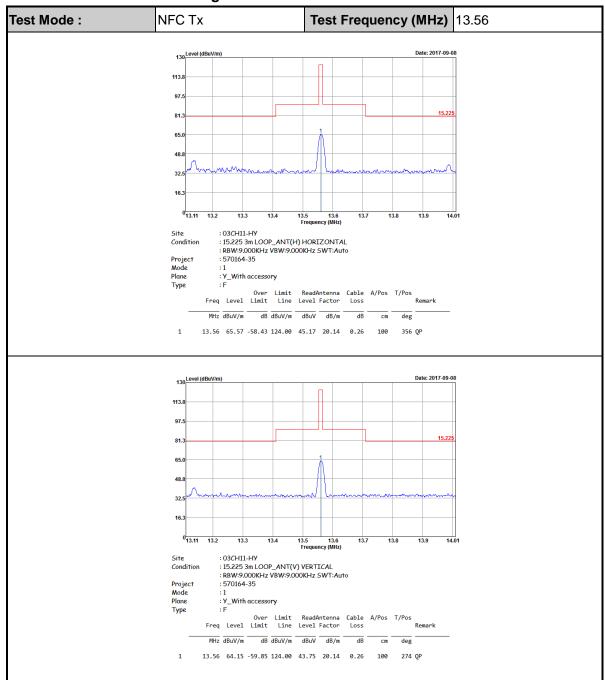

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Report No.: FR570164-35

#### C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)

Test Mode :	NFC	Tx		Polariz	ation :	Hori	izontal		
Frequency ( MHz )	Level	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level (dBµV)	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.0192	49.96	-71.98	121.94	29.9	20.05	0.01	-	-	Average
0.06726	41.85	-69.2	111.05	21.78	20.06	0.01	-	-	Average
0.09434	40.19	-67.92	108.11	20.17	20.01	0.01	-	-	QP
0.14064	38.99	-65.65	104.64	18.98	20	0.01	-	-	Average
0.4033	60.36	-35.13	95.49	40.37	19.97	0.02	-	-	Average
0.67024	56.59	-14.49	71.08	36.56	19.98	0.05	100	0	QP
13.136	43.59	-25.91	69.5	23.2	20.14	0.25	-	-	QP
13.56	65.5	-4	69.5	45.1	20.14	0.26	-	-	QP
21.895	37.1	-32.4	69.5	16.33	20.5	0.27	-	-	QP
27.04	36.6	-32.9	69.5	15.97	20.38	0.25	-	-	QP

Report No.: FR570164-35

Test Mode :	: NFC	Tx		Polariz	zation :	Vert	ical		
Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Ant Pos	Table Pos	Remark
(MHz)	$(dB\mu V/m)$	( dB )	( dBµV/m )	(dBµV)	( dB )	( dB )	(cm)	(deg)	
0.0192	40.24	-81.7	121.94	20.18	20.05	0.01	-	-	Average
0.0672	38.26	-72.8	111.06	18.19	20.06	0.01	-	-	Average
0.10246	35.83	-71.56	107.39	15.81	20.01	0.01	-	-	QP
0.11428	35.29	-71.15	106.44	15.28	20	0.01	-	-	Average
0.39922	55.79	-39.79	95.58	35.8	19.97	0.02	-	-	Average
1.609	45.44	-18.03	63.47	25.29	20.02	0.13	100	0	QP
8.48	39.52	-29.98	69.5	19.25	20.11	0.16	-	-	QP
13.56	63.9	-5.6	69.5	43.5	20.14	0.26	-	-	QP
21.166	45.94	-23.56	69.5	25.21	20.46	0.27	-	-	QP
25.34	36.77	-32.73	69.5	15.99	20.51	0.27	-	-	QP

#### Note:

- 1. 13.56 MHz is fundamental signal which can be ignored.
- 2. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
- 4. Limit line = specific limits  $(dB\mu V)$  + distance extrapolation factor.

SPORTON INTERNATIONAL INC. Page Number : C2 of C3

TEL: 886-3-327-3456 FAX: 886-3-328-4978 386.8

419

35.72

35.09

-10.28

-10.91

#### C3. Results of Radiated Spurious Emissions (30MHz~1GHz)

46

46

Test Mode	Ро	larization	Horizontal							
Frequency ( MHz )	Level Over Limit		Limit Line ( dBuV/m )	Line Level		Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
40.8	29.73	-10.27	40	42.56	( <b>dB</b> ) 18.83	0.82	32.49	100	0	Peak
139.08	27.58	-15.92	43.5	41	17.45	1.51	32.44	-	-	Peak
244.11	35.05	-10.95	46	47.61	17.8	1.95	32.38	-	-	Peak

Report No. : FR570164-35

Peak

Peak

	759.9	34.47	/	-11.53	46	34.9	97 28	.22	3.44	32.3	-	 •	Peak
Ī	Test Mode :		NFC	Tx			Polariza	tion :		Vertica	l		

21.31

22.72

32.34

32.34

2.56

2.63

44.14

42.03

Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
		Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
(MHz)	( dBµV/m )	(dB)	( dBµV/m )	(dBµV)	( dB )	( dB )	( dB )	(cm)	(deg)	
40.8	36.78	-3.22	40	49.61	18.83	0.82	32.49	100	0	Peak
67.8	32.42	-7.58	40	51.75	12.12	1.02	32.49	-	-	Peak
257.61	29.7	-16.3	46	40.37	19.55	2.09	32.38	-	-	Peak
419.7	34.62	-11.38	46	41.52	22.76	2.63	32.34	-	-	Peak
451.9	31.77	-14.23	46	38.15	23.24	2.7	32.36	-	-	Peak
957.3	33.6	-12.4	46	29.57	31.1	3.9	31.14	-	-	Peak

#### Note:

- 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- 2. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).
- 3. Corrected Reading: Antenna Factor + Cable Loss + Read Level Preamp Factor= Level.

SPORTON INTERNATIONAL INC. Page Number : C3 of C3

TEL: 886-3-327-3456 FAX: 886-3-328-4978