


FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

HONG KONG IPRO TECHNOLOGY CO.,LIMITED

FLAT/RM A3, 9/F SILVERCORP INT TOWER 707-713 NATHAN RD MONGKOK, HONGKONG

FCC ID: PQ4IPROACROA58

Report Type: Original Report	Product Type: Smart Mobile Phone
Test Engineer:	<u>Lion Xiao</u> 
Report Number:	RDG150505007-00C
Report Date:	2015-05-22
Reviewed By:	Sula Huang RF Leader 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA	15
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA	19
FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	29
FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA	44
FCC §22.917(A) & §24.238(A) - BAND EDGES.....	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST EQUIPMENT LIST AND DETAILS.....	47
TEST DATA	47

FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY63
 APPLICABLE STANDARD63
 TEST PROCEDURE63
 TEST EQUIPMENT LIST AND DETAILS.....64
 TEST DATA64

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *HONG KONG IPRO TECHNOLOGY CO., LIMITED*'s product, model number: *ACRO A58* (FCC ID: *PQ4IPROACROA58*) (the "EUT") in this report was a *Smart Mobile Phone*, which was measured approximately: 143.5 mm (L) x 69.7 mm (W) x 5.85 mm (H), rated input voltage: DC3.8V rechargeable Li-ion battery or DC5.0V charging from adapter.

Adapter information: IPRO

Model: NTR-A58

Input: AC100-240V, 50/60Hz 150mA

Output: DC5.0V, 1000 mA

All measurement and test data in this report was gathered from production sample serial number: IPROACROA58000001 (Assigned by BACL, Dongguan). The EUT was received on 2015-05-06.

Objective

This report is prepared on behalf of *HONG KONG IPRO TECHNOLOGY CO., LIMITED* in accordance with Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: PQ4IPROACROA58

FCC Part 15C DSS submissions with FCC ID: PQ4IPROACROA58

FCC Part15C DTS submissions with FCC ID: PQ4IPROACROA58

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D-2010, ANSI C63.4-2009.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D-2010.

The test items were performed with the EUT operating at testing mode.


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	109038
Agilent	Wireless Communication Test Set	E5515C	MY50266471
N/A	ANTENNA	N/A	N/A

Configuration of Test Setup

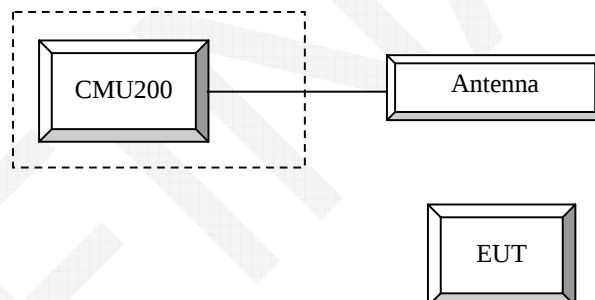

Block Diagram of Test Setup

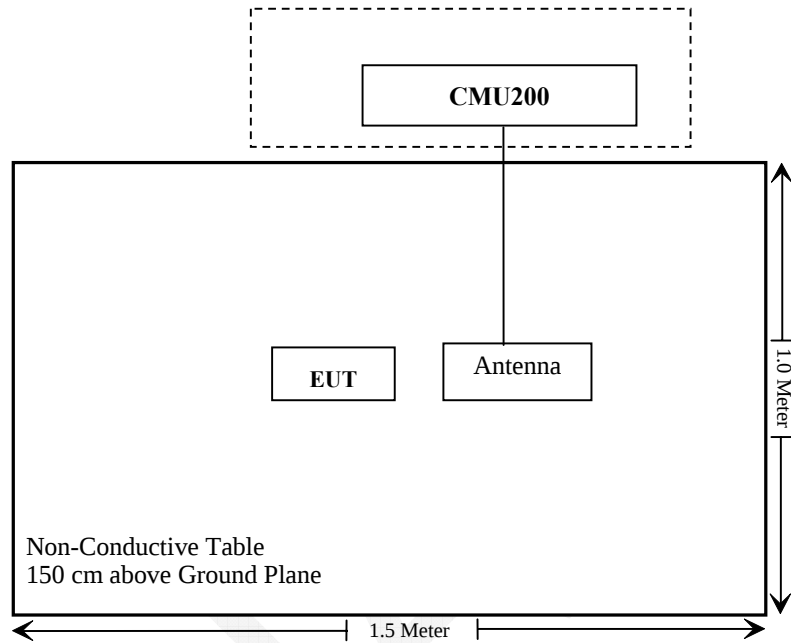

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310, §2.1093	RF Exposure	Compliance
§2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: RDG150505007-20.

FINAL

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FINAL

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER**Applicable Standard**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

Test Procedure**GSM**

Function: Menu select > GSM Mobile Station > GSM 850/1900
Press Connection control to choose the different menus
Press RESET > choose all the reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM + only
MS Signal
 > 33 dBm for GSM 850
 > 30 dBm for GSM 1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type > Off
P0 > 4 dB
TCH > choose desired test channel
Hopping > Off
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal on to turn on the signal and change settings

GPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900
Press Connection control to choose the different menus
Press RESET > choose all the reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM + GPRS or GSM + EGSM
Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850
 > 30 dBm for GPRS 1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off
 P0 > 4 dB
 Slot Config > Unchanged (if already set under MS signal)
 TCH > choose desired test channel
 Hopping > Off
 Main Timeslot > 3
 Network Coding Scheme > CS4 (GPRS)
 Bit Stream > 2E9-1 PSR Bit Stream
 AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
 Connection Press Signal on to turn on the signal and change settings

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β c	11/15	6/15	15/15	2/15	15/15
	β d	15/15	15/15	9/15	15/15	0
	β ec	209/225	12/15	30/15	2/15	5/15
	β c/ β d	11/15	6/15	15/9	2/15	-
	β hs	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
MPR(dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	Ahs= β hs/ β c	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCIs	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

DC-HSDPA

The following tests were conducted according to the test requirements in Table Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

Radiated method:

ANSI/TIA 603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-05-09	2016-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
Giga	Signal Generator	1026	320408	2015-05-09	2016-05-09
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2012-09-06	2015-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.3 °C
Relative Humidity:	52 %
ATM Pressure:	100.6 kPa

The testing was performed by Lion Xiao on 2015-05-12.

Conducted Power**Cellular Band (Part 22H) & PCS Band (Part 24E)**

Band	Channel No.	Conducted Output Power (dBm)								
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	32.17	32.44	31.70	30.01	28.83	28.40	27.10	24.82	23.66
	190	32.18	32.45	31.66	29.94	28.76	28.27	26.98	24.67	23.56
	251	32.15	32.42	31.63	29.93	28.65	28.22	26.91	24.60	23.50
PCS	512	29.17	29.17	28.40	26.62	25.87	26.32	25.45	23.94	21.53
	661	29.05	29.05	28.29	26.47	25.35	25.88	24.89	23.39	20.98
	810	28.97	28.96	28.15	26.34	25.12	25.24	24.37	22.90	20.41

WCDMA Band

Mode	3GPP Sub Test	Average Output Power (dBm)					
		Low Channel (Ave. Power)	Low Channel (PAR)	Middle Channel (Ave. Power)	Middle Channel (PAR)	High Channel (Ave. Power)	High Channel (PAR)
Rel 99	1	22.17	2.96	22.40	2.28	22.35	2.64
HSDPA	1	21.24	2.83	21.45	1.92	21.40	2.50
	2	21.14	2.73	21.04	2.31	21.48	2.78
	3	21.29	2.57	21.64	2.40	21.47	2.75
	4	21.27	3.19	21.49	2.06	21.63	2.97
DC-HSDPA	1	21.17	3.24	21.39	3.12	21.38	2.80
	2	20.92	3.28	21.08	3.24	21.35	2.92
	3	20.76	3.33	20.88	3.10	21.33	2.63
	4	20.14	3.31	20.48	2.93	21.10	2.94
HSUPA	1	21.22	2.84	21.16	2.06	21.45	2.28
	2	21.74	3.31	21.72	2.49	21.83	2.69
	3	21.87	3.02	20.99	2.31	21.22	2.82
	4	21.03	3.25	21.88	2.30	21.32	2.67
	5	21.36	3.24	21.77	2.48	21.37	2.80
HSPA+	1	20.67	3.21	20.52	3.17	20.81	2.66

WCDMA Band

Mode	3GPP Sub Test	Average Output Power (dBm)					
		Low Channel (Ave. Power)	Low Channel (PAR)	Middle Channel (Ave. Power)	Middle Channel (PAR)	High Channel (Ave. Power)	High Channel (PAR)
Rel 99	1	22.49	2.26	21.47	2.82	21.98	2.41
HSDPA	1	21.35	2.4	20.56	3.09	21.18	2.83
	2	21.79	2.78	20.41	2.60	20.81	2.74
	3	21.16	2.45	20.24	2.74	20.98	2.88
	4	21.55	2.45	20.40	3.01	21.38	2.83
DC-HSDPA	1	21.96	2.65	21.67	3.28	21.81	3.27
	2	21.83	2.75	21.71	3.31	21.79	3.24
	3	21.66	2.66	21.63	3.23	21.36	3.24
	4	21.29	2.81	21.14	3.22	21.51	2.92
HSUPA	1	21.36	2.94	20.48	2.32	21.12	2.3
	2	21.26	2.61	21.45	2.50	21.26	2.83
	3	21.42	3.07	21.27	2.95	21.17	2.87
	4	21.58	2.50	21.46	3.05	21.41	2.41
	5	21.58	2.75	21.10	2.32	21.50	2.39
HSPA+	1	21.41	2.65	21.31	3.15	21.41	3.06

Note: peak-to-average ratio (PAR) <13 dB

ERP & EIRP

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850_Low Channel								
824.200	H	90.06	15	0.0	1.0	14.0	38.5	24.5
824.200	V	103.22	31.3	0.0	1.0	30.3	38.5	8.2
EDGE 850_Middle Channel								
836.600	H	84.70	9.8	0.0	1.0	8.8	38.5	29.7
836.600	V	98.60	26.8	0.0	1.0	25.8	38.5	12.7
WCDMA Band _Low Channel								
826.400	H	83.45	8.4	0.0	1.0	7.4	38.5	31.1
826.400	V	92.15	20.2	0.0	1.0	19.2	38.5	19.3
PCS 1900_Low Channel								
1850.200	H	88.63	16.8	11.4	1.4	26.8	33.0	6.2
1850.200	V	90.17	18.2	11.4	1.4	28.2	33.0	4.8
EDGE 1900_Low Channel								
1850.200	H	84.60	12.7	11.4	1.4	22.7	33.0	10.3
1850.200	V	87.50	15.8	11.4	1.4	25.6	33.0	7.4
WCDMA Band _Middle Channel								
1880.000	H	77.57	6	11.7	1.4	16.3	33.0	16.7
1880.000	V	80.97	9.5	11.7	1.4	19.8	33.0	13.2

FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH


Applicable Standard

FCC §2.1049, §22.917, §22.905 and §24.238.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

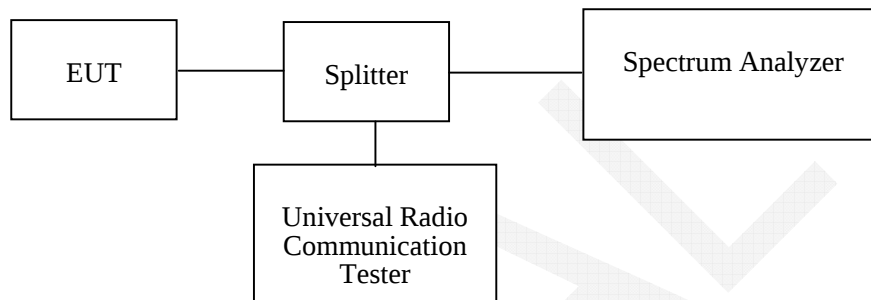

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.3 °C
Relative Humidity:	56 %
ATM Pressure:	100.4 kPa


The testing was performed by Lion Xiao on 2015-05-09 & 2015-05-13&2015-05-22.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

	Channel No.	Mode	99% Occupied Bandwidth (kHz)	26 dB Occupied Bandwidth (kHz)
Cellular	190	GSM	242	314
		EGPRS	256	318
PCS	661	PCS	242	312
		EGPRS	248	302
WCDMA Band	9400	Rel 99	4180	4700
	9400	HSDPA	4180	4740
	9400	HSUPA	4180	4740
	9400	DC-HSDPA	4180	4740
	9400	HSPA+	4180	4740
WCDMA Band V	4183	Rel 99	4160	4700
	4183	HSDPA	4180	4680
	4183	HSUPA	4160	4700
	4183	DC-HSDPA	4180	4720
	4183	HSPA+	4180	4700

GMSK 850 Cellular Band

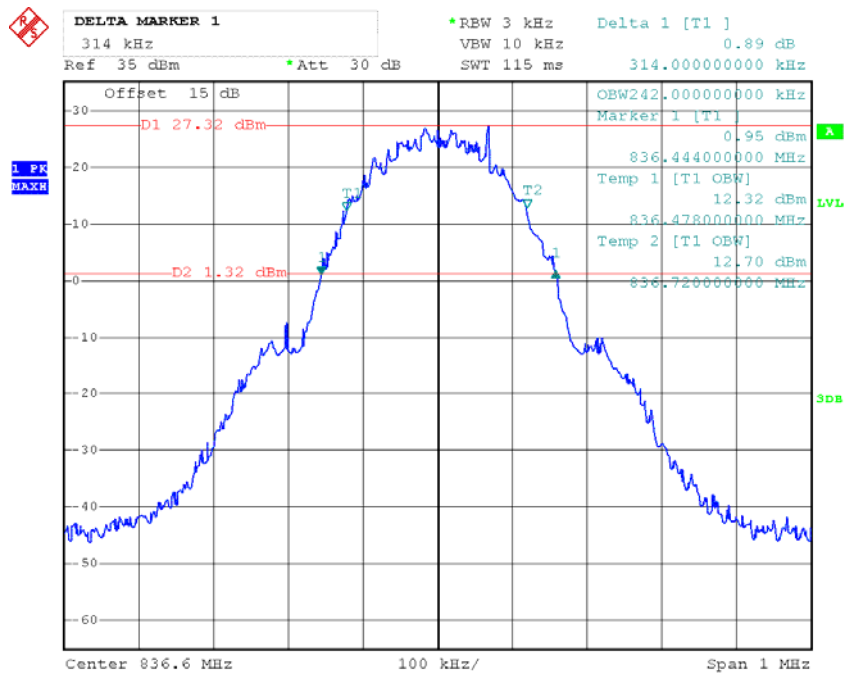

Date: 9.MAY.2015 11:49:46

1 RM MAXH

Offset 15 dB

Att 30 dB

RBW 3 kHz

VBW 10 kHz

SWT 115 ms

Delta 1 [T1] 0.77 dB

318.000000000 kHz

OBW256.000000000 kHz

Marker 1 [T1] -9.23 dBm

836.444000000 MHz

Temp 1 [T1 OBW] 1.58 dBm

836.472000000 MHz

Temp 2 [T1 OBW] 2.18 dBm

836.728000000 MHz

D1 17.02 dBm

D2 -8.98 dBm

Center 836.6 MHz


100 kHz/

Span 1 MHz

GMSK PCS Band




EGPRS PCS Band

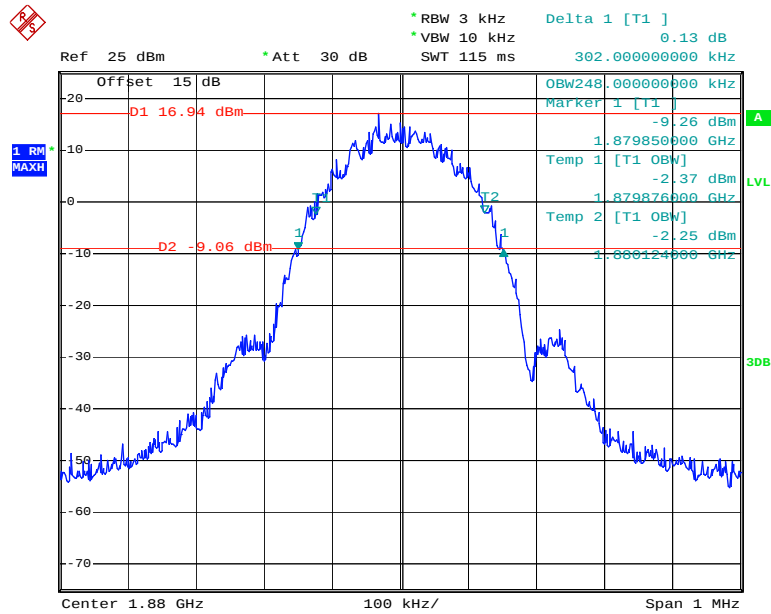


Date: 13.MAY.2015 16:53:13

REL 99 Band

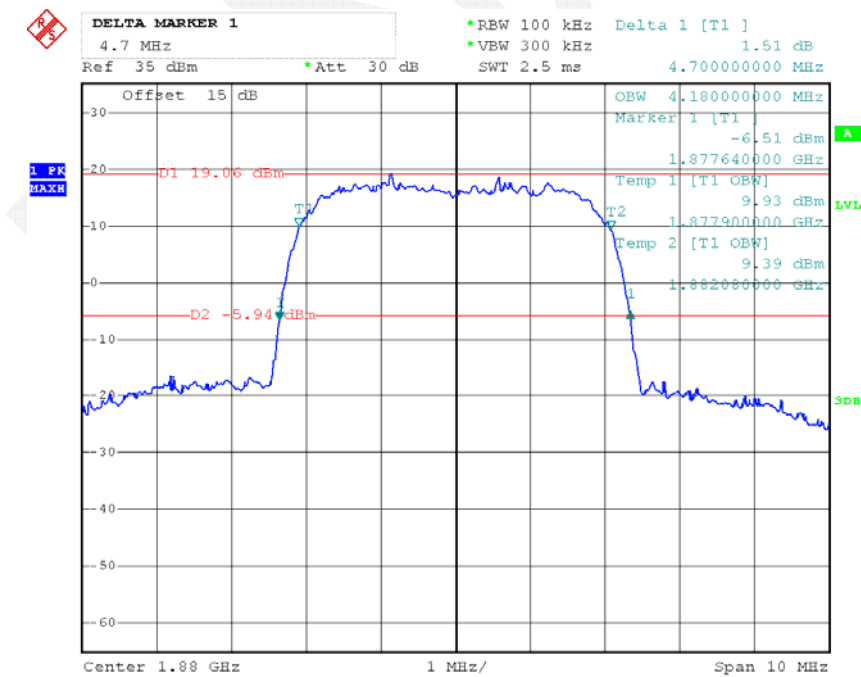


Date: 9.MAY.2015 11:54:22

HSDPA Band

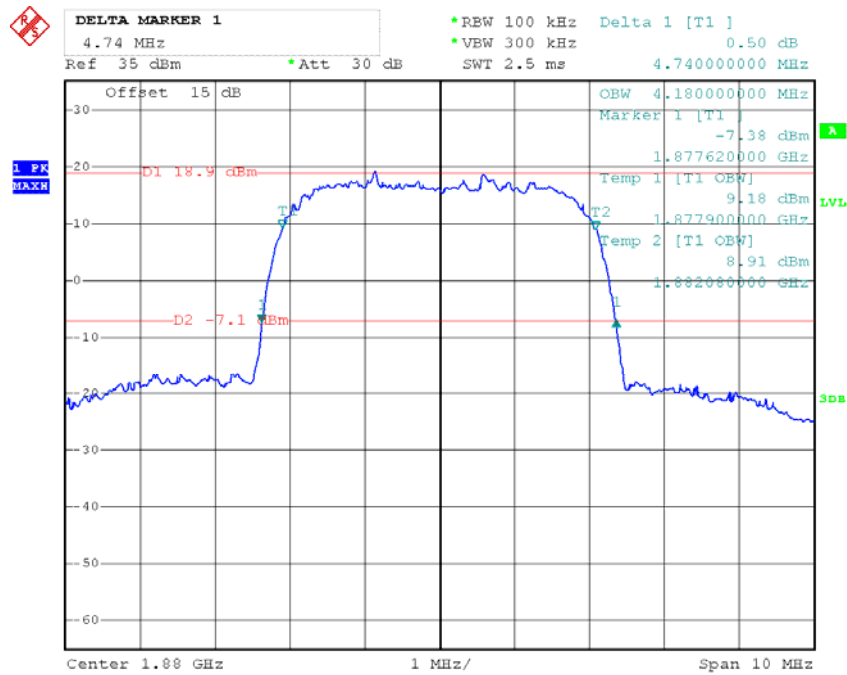


Date: 9.MAY.2015 11:57:07

HSUPA Band

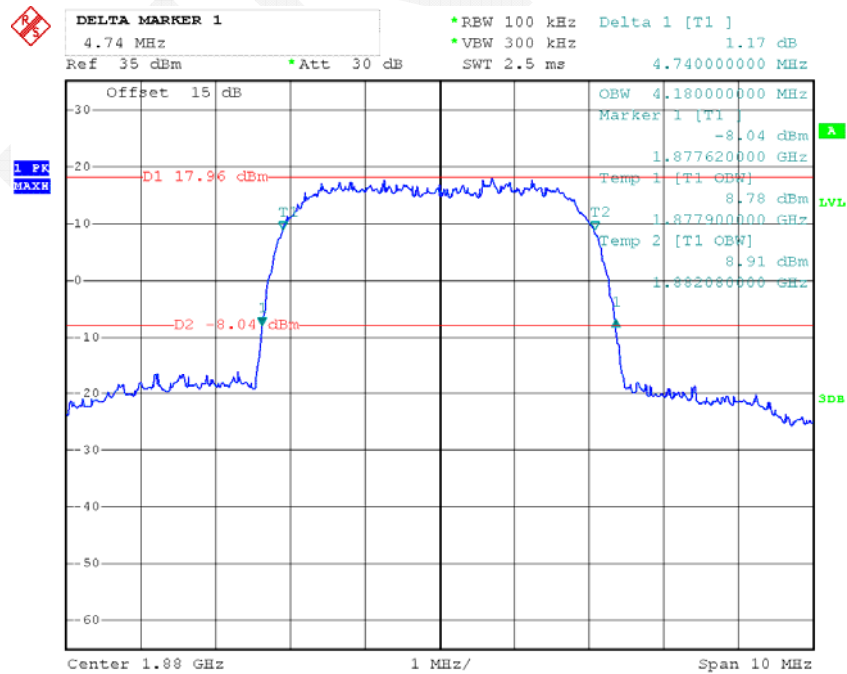


Date: 9.MAY.2015 11:58:38

DC-HSDPA Band

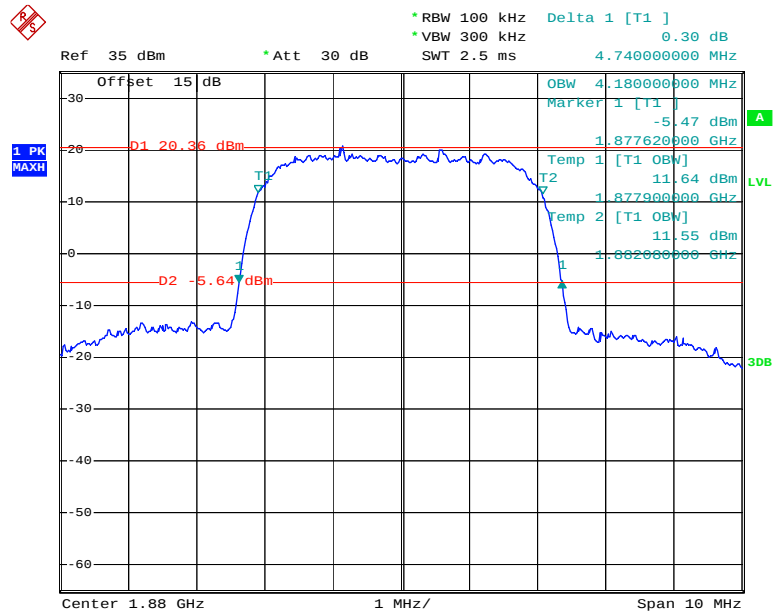


Date: 22.MAY.2015 18:03:28

HSPA+ Band

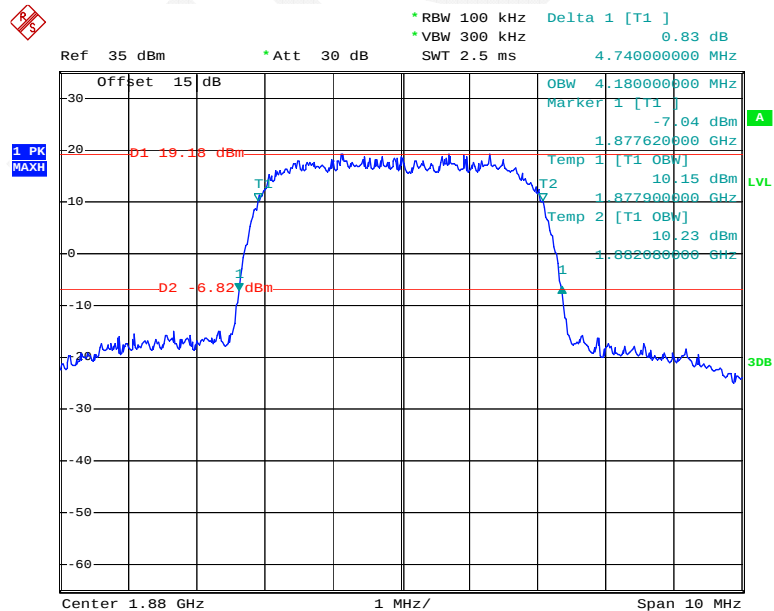


Date: 22.MAY.2015 18:16:01

REL 99 Band V

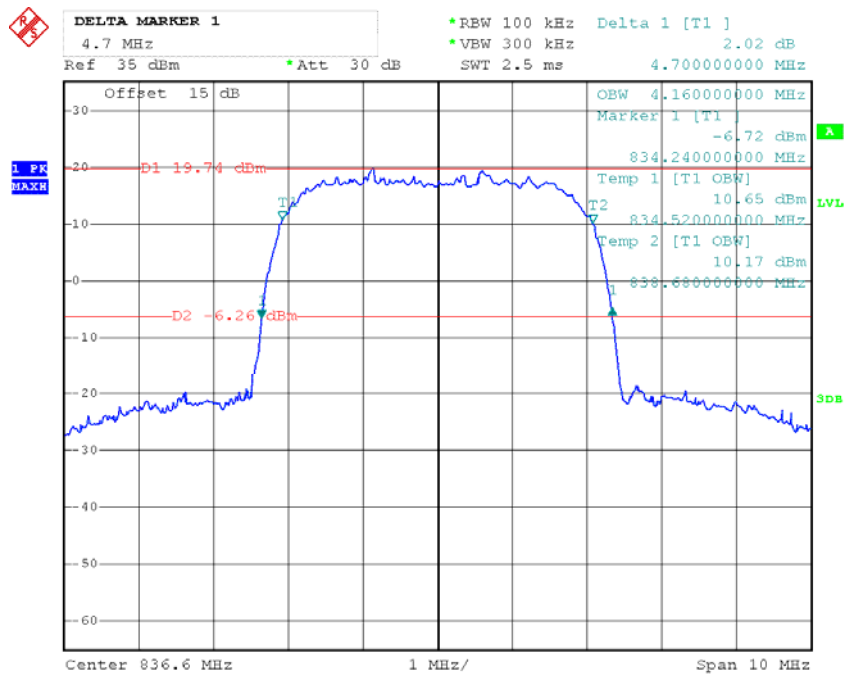


Date: 9.MAY.2015 12:03:22

HSDPA Band V

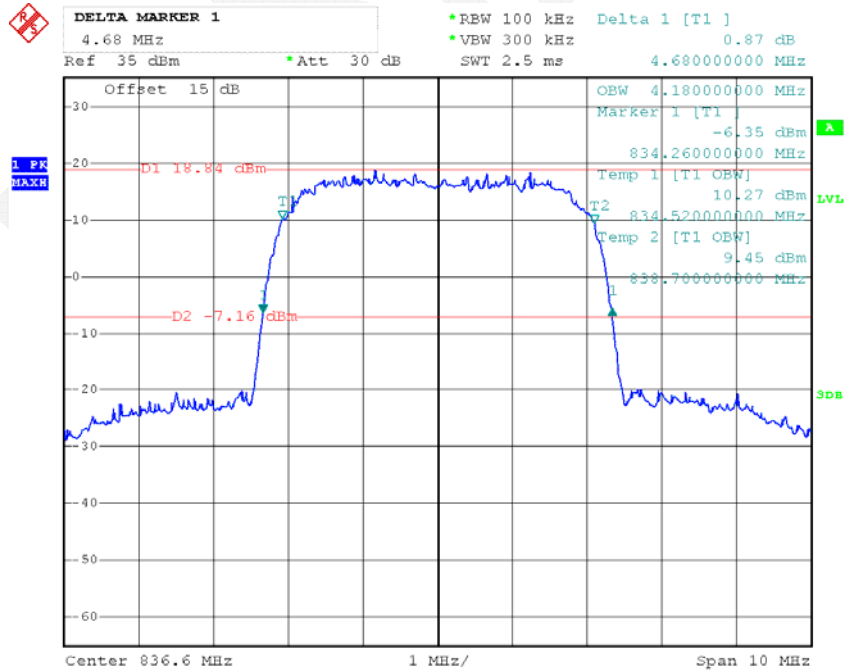


Date: 9.MAY.2015 12:04:50

HSUPA Band V

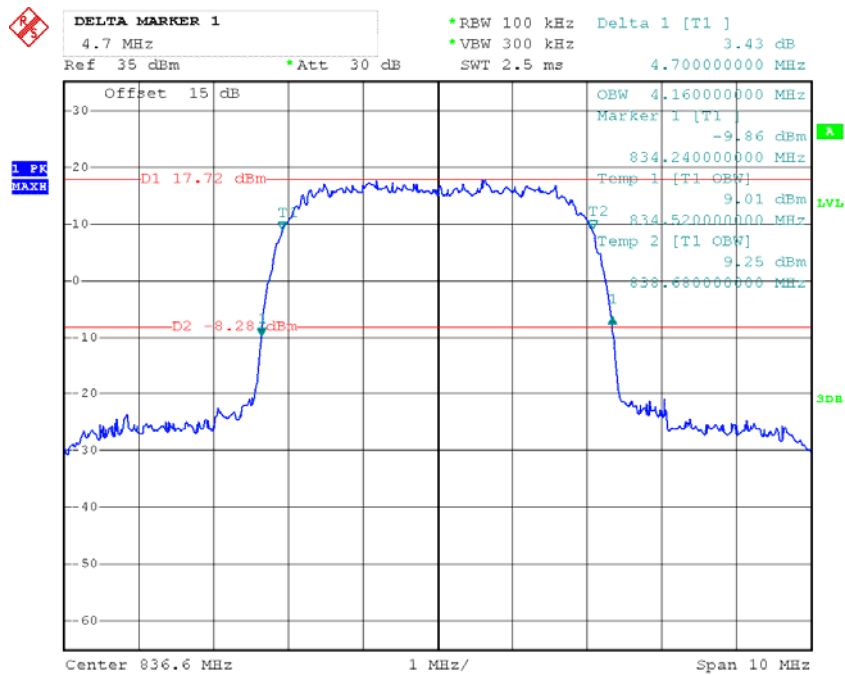


Date: 9.MAY.2015 12:07:23

DC-HSDPA Band V

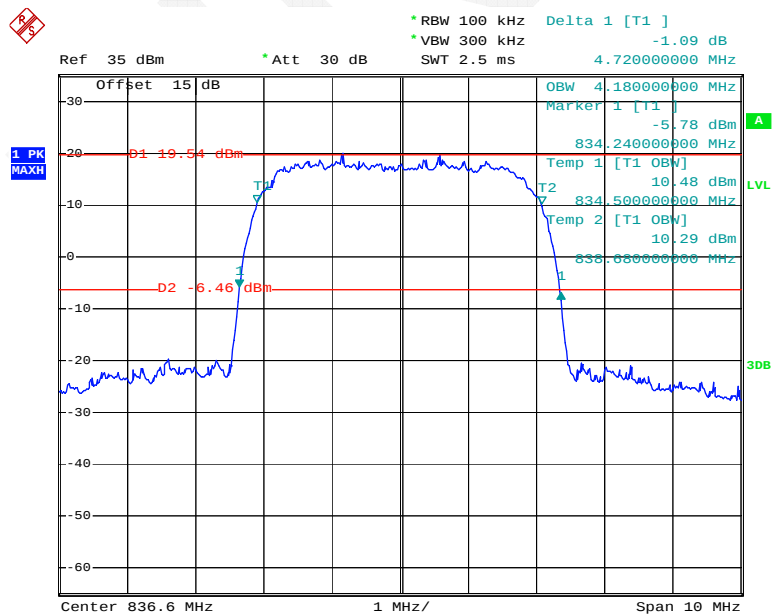

Date: 22.MAY.2015 18:26:14

HPA+ Band V

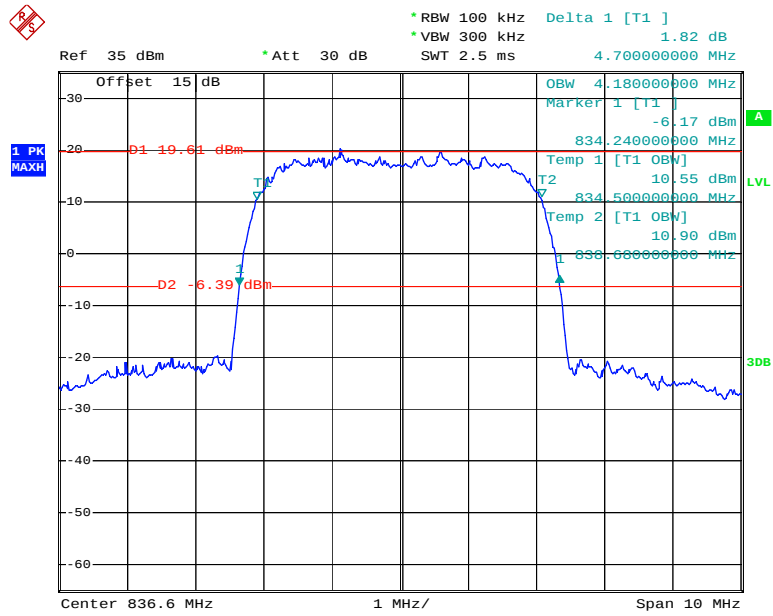

Date: 22.MAY.2015 18:32:33

FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

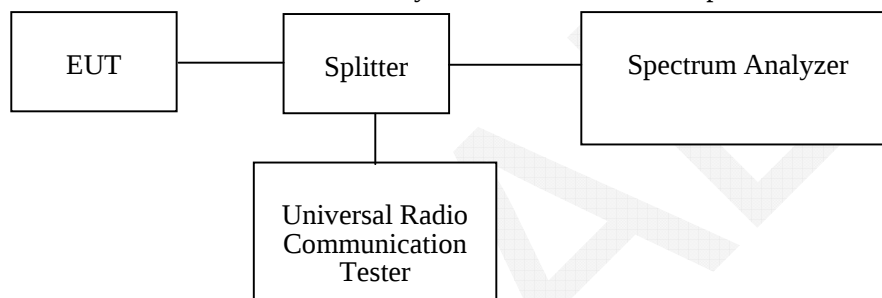

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	26.3~27.2 °C
Relative Humidity:	50~53 %
ATM Pressure:	100.2~100.6 kPa


The testing was performed by Lion Xiao on 2015-05-09 & 2015-05-13.

Please refer to the following plots.

GSM850_Low Channel

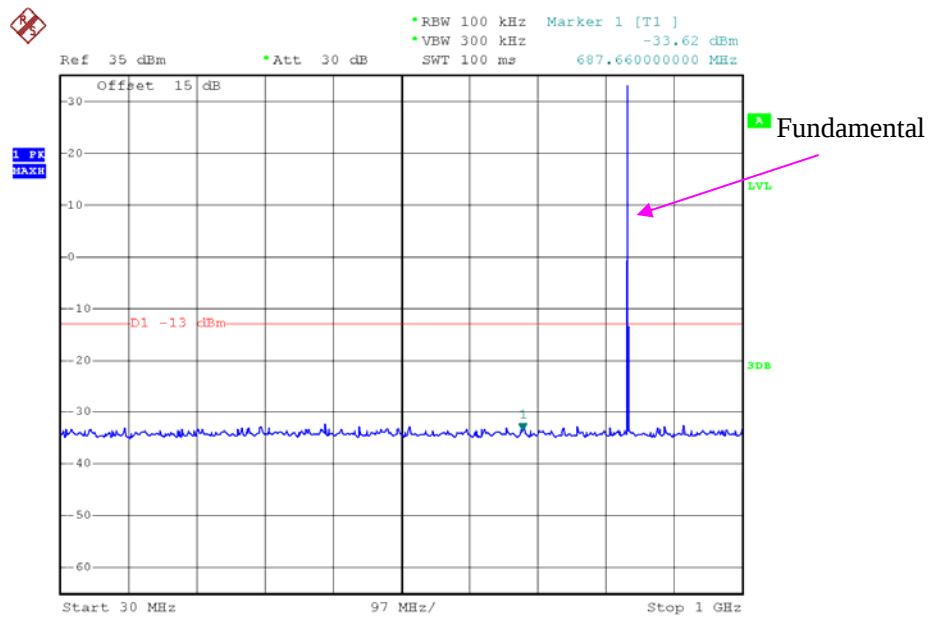


Date: 9.MAY.2015 13:00:19

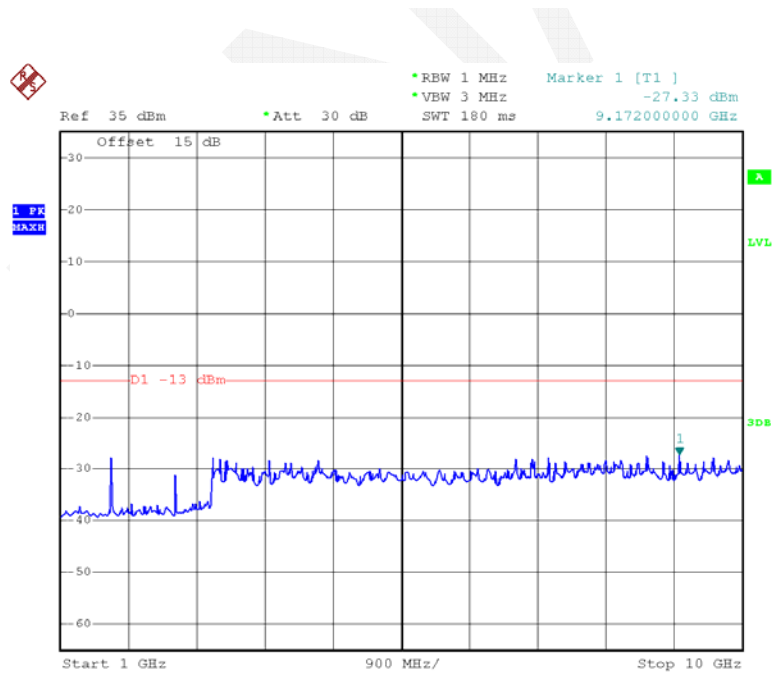


Date: 9.MAY.2015 13:01:07

EGPRS 850_Middle Channel

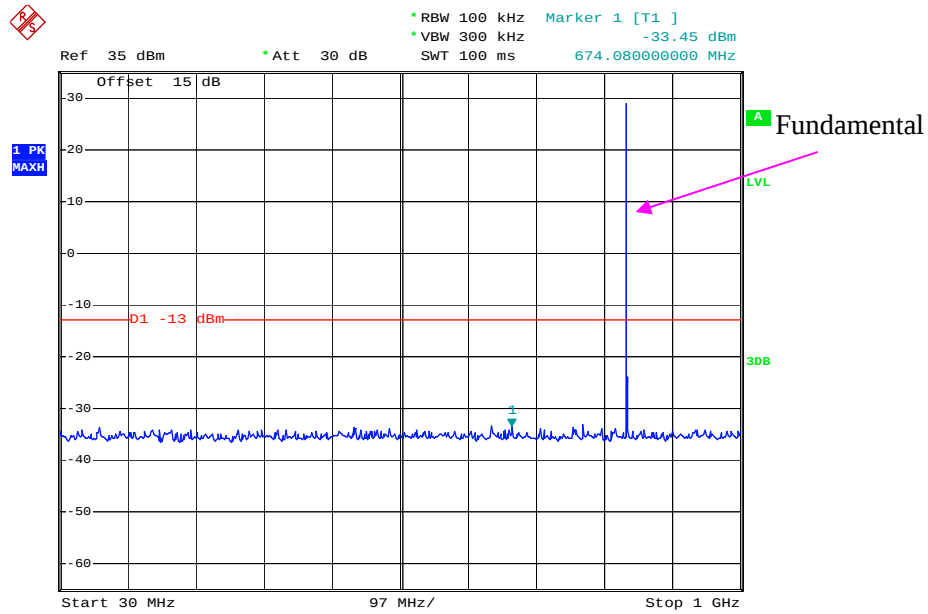


Date: 13.MAY.2015 17:13:07

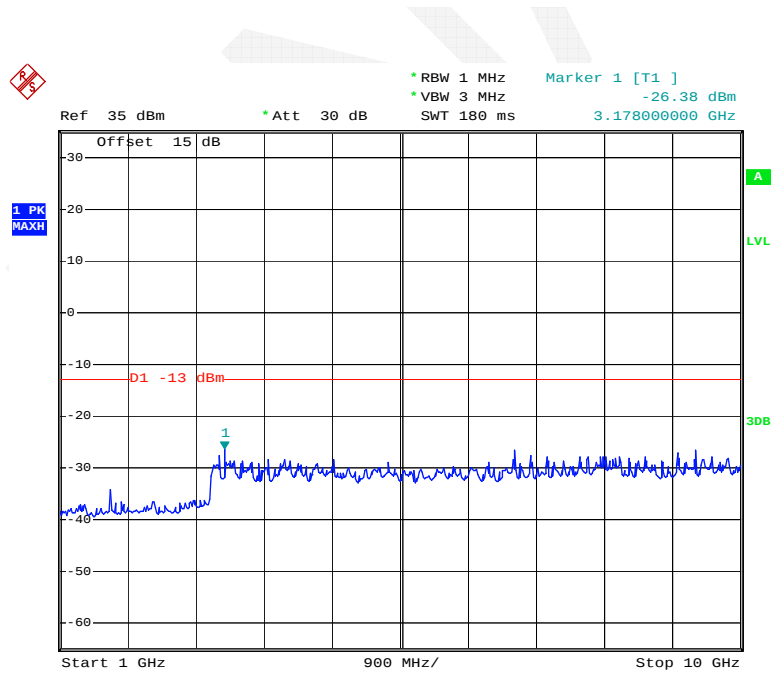


Date: 13.MAY.2015 17:14:06


PCS 1900_Low Channel

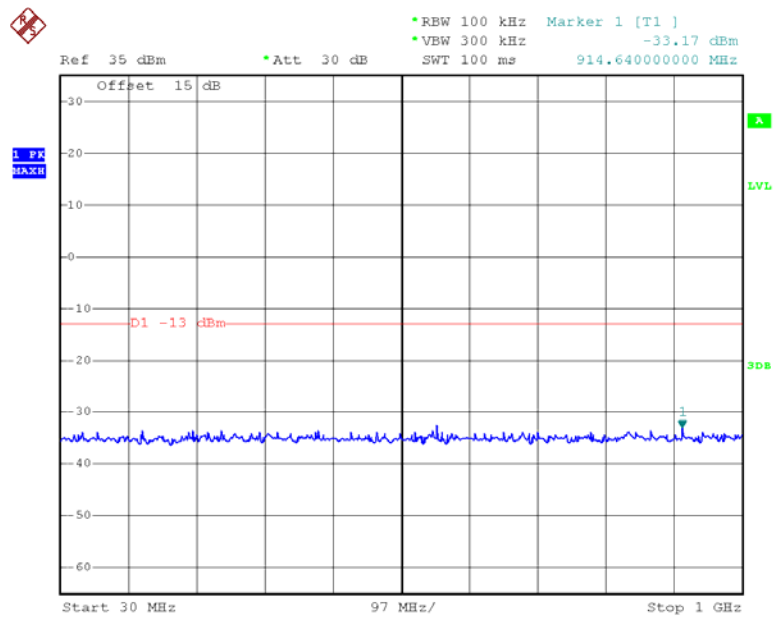

Date: 9.MAY.2015 13:04:17

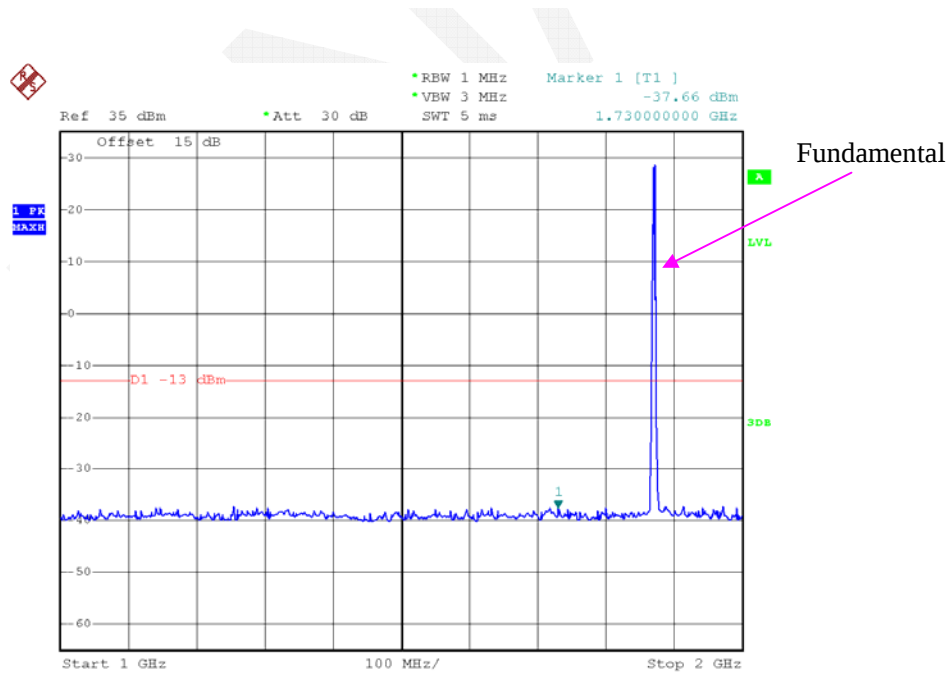


Date: 9.MAY.2015 13:05:15

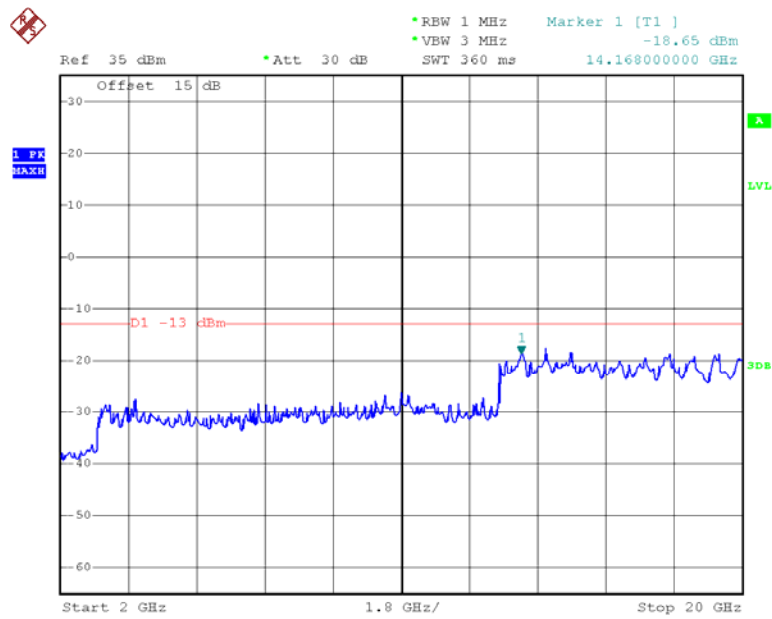


Date: 9.MAY.2015 13:05:35


EGPRS 1900_Low Channel

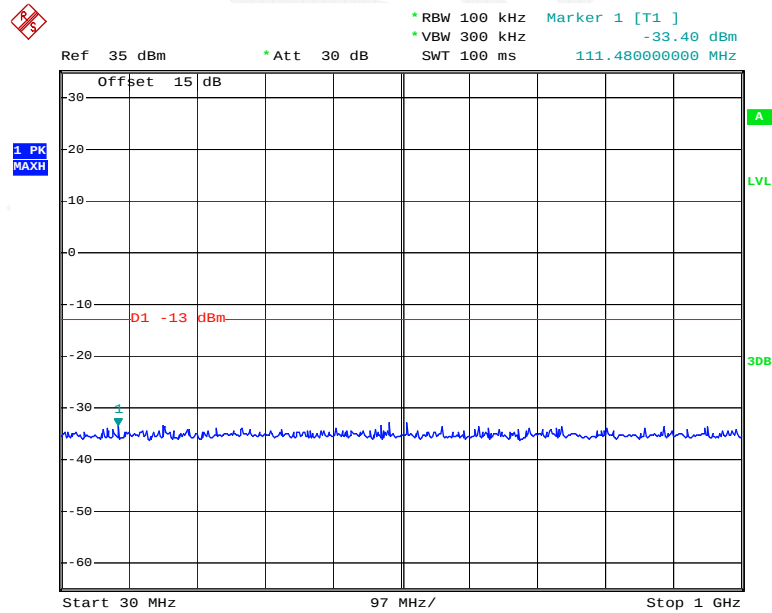

Date: 13.MAY.2015 17:19:43

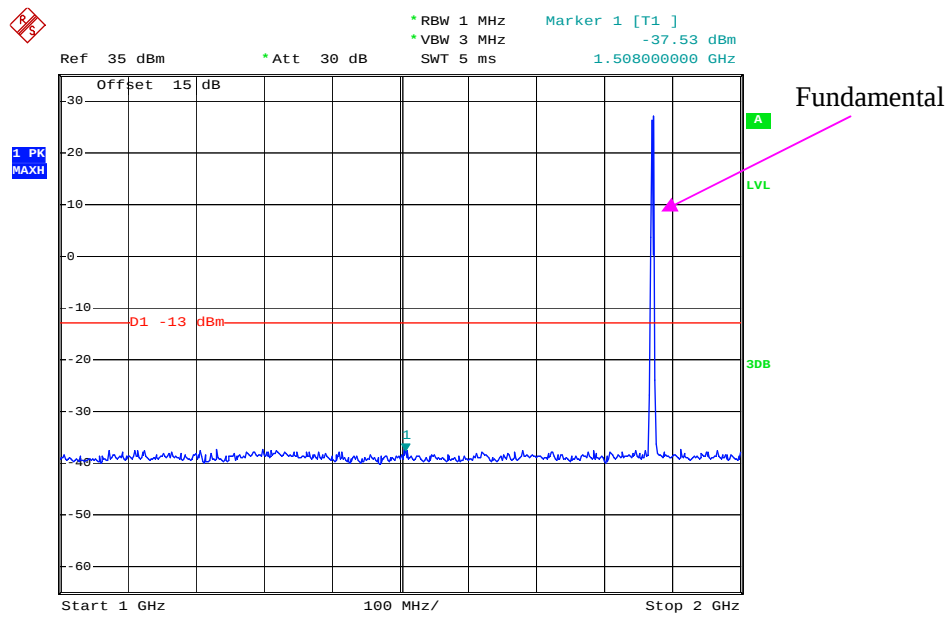


Date: 13.MAY.2015 17:17:09

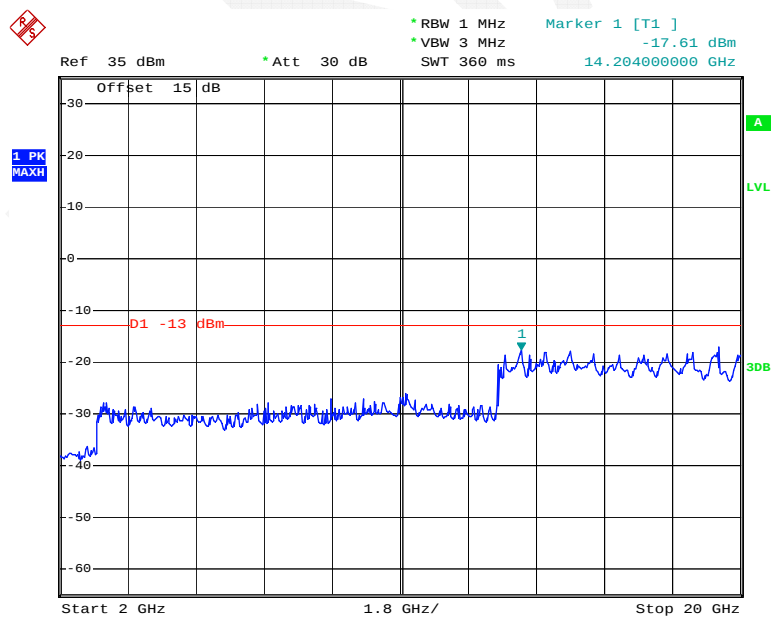


Date: 13.MAY.2015 17:16:27


REL 99 Band Middle Channel

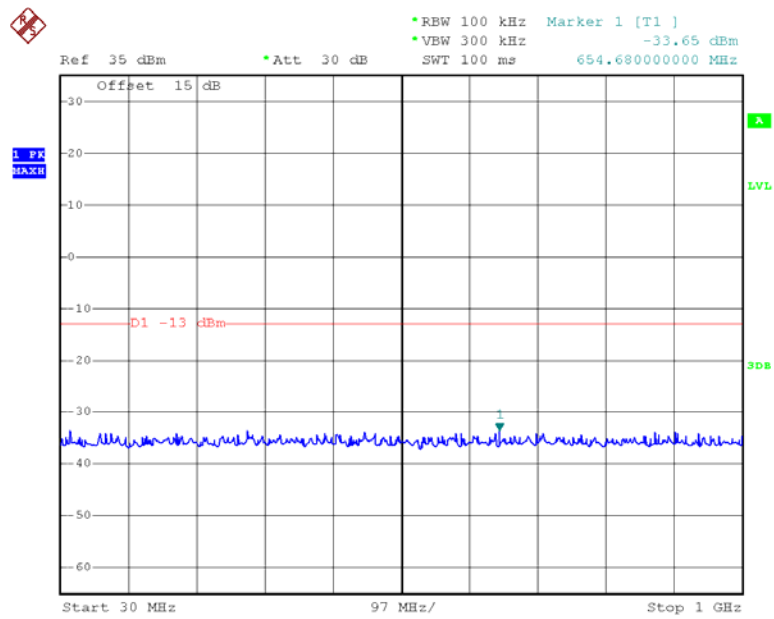

Date: 9.MAY.2015 13:09:42

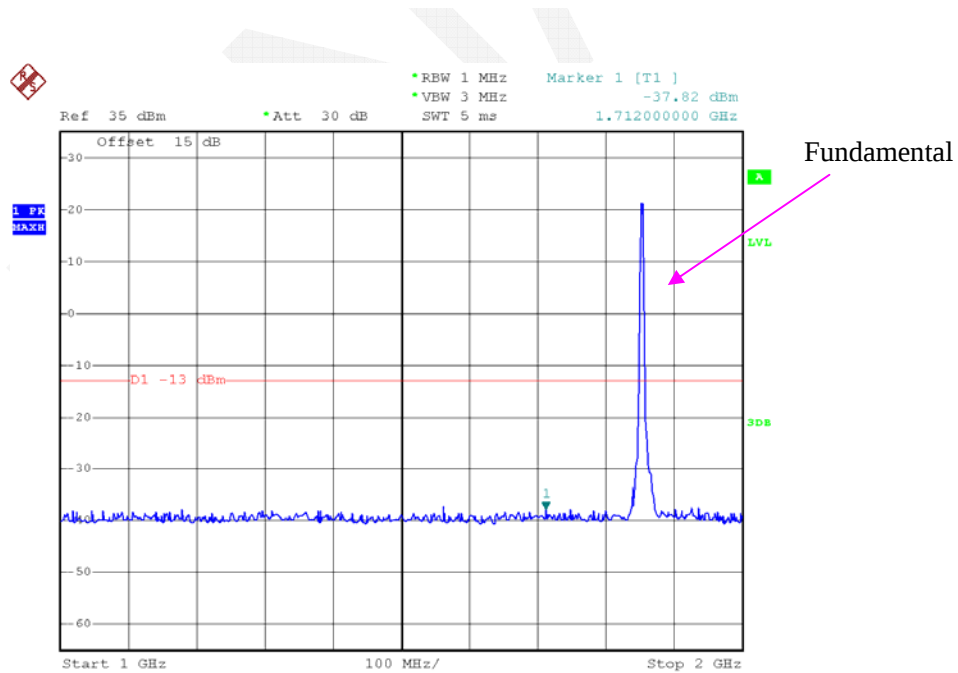


Date: 9.MAY.2015 13:08:42

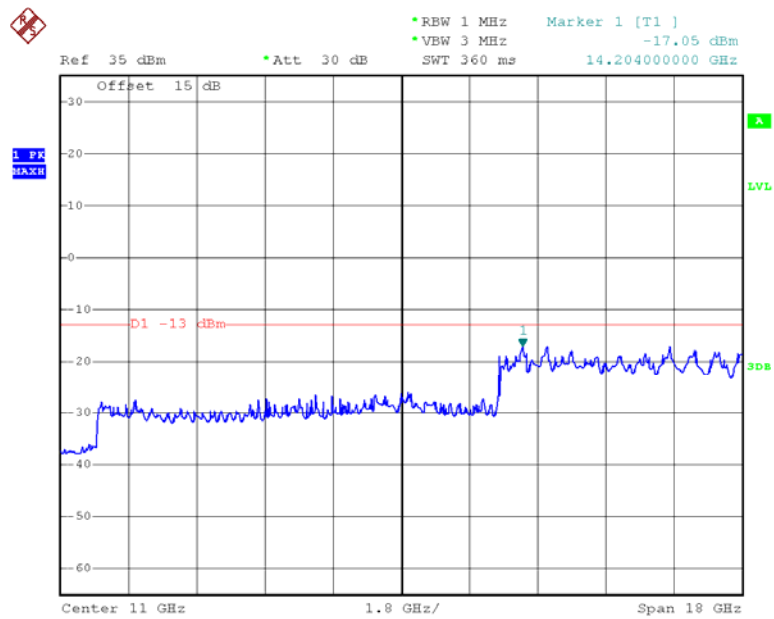


Date: 9.MAY.2015 13:07:38


HSDPA Band _Middle Channel

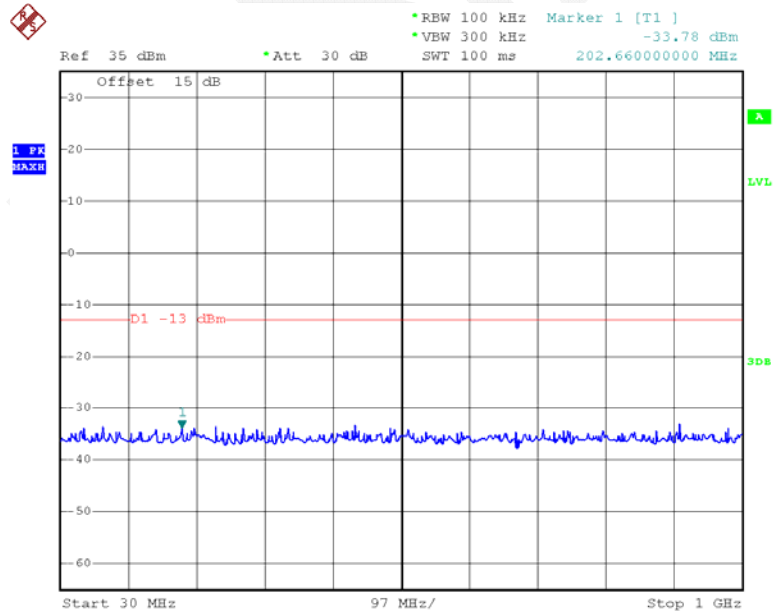

Date: 9.MAY.2015 13:09:55

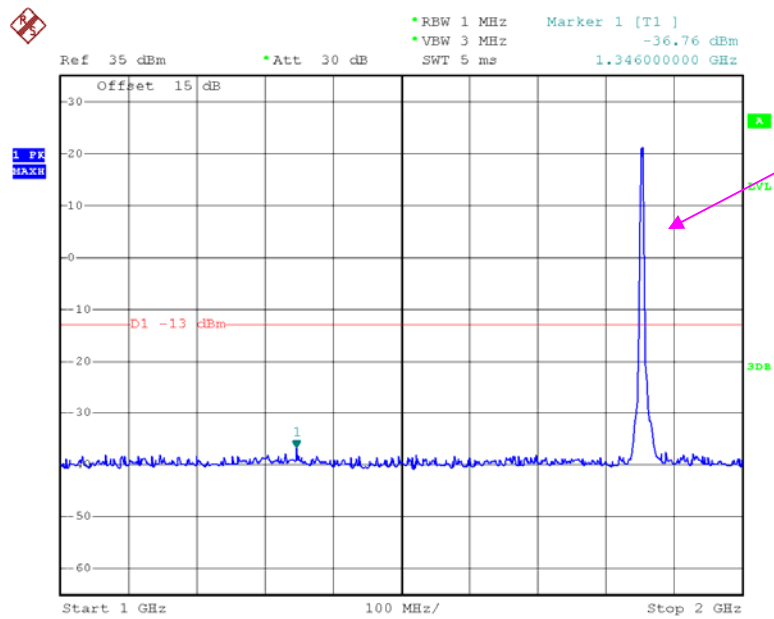


Date: 9.MAY.2015 13:08:57

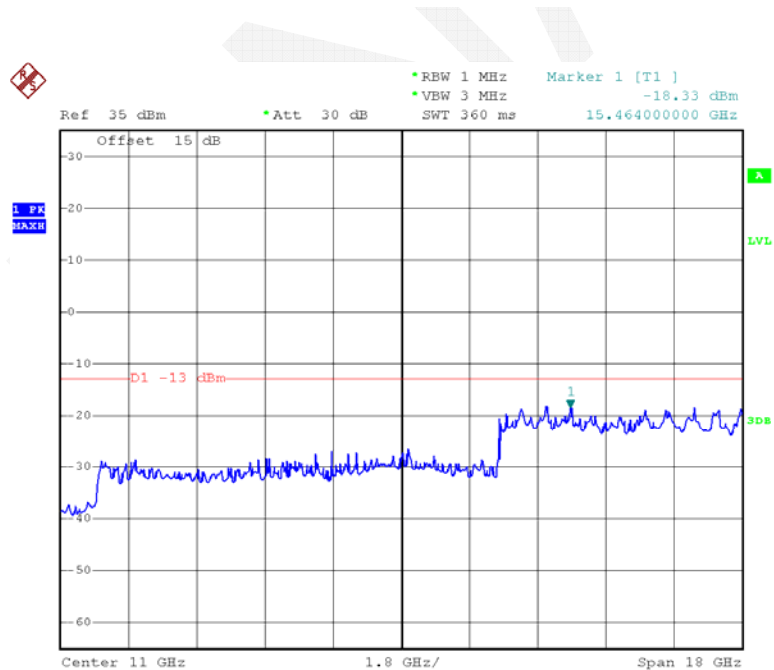


Date: 9.MAY.2015 13:08:01


HSUPA Band _Middle Channel

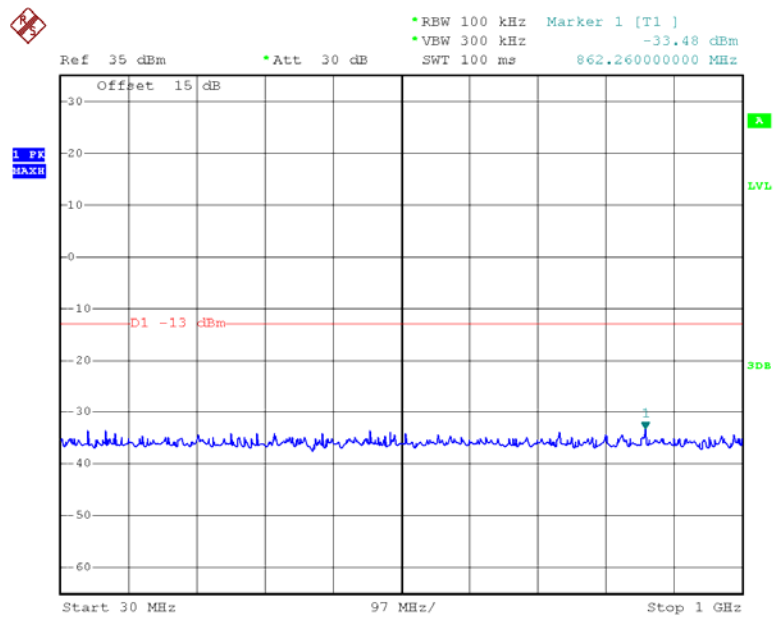

Date: 9.MAY.2015 13:10:08

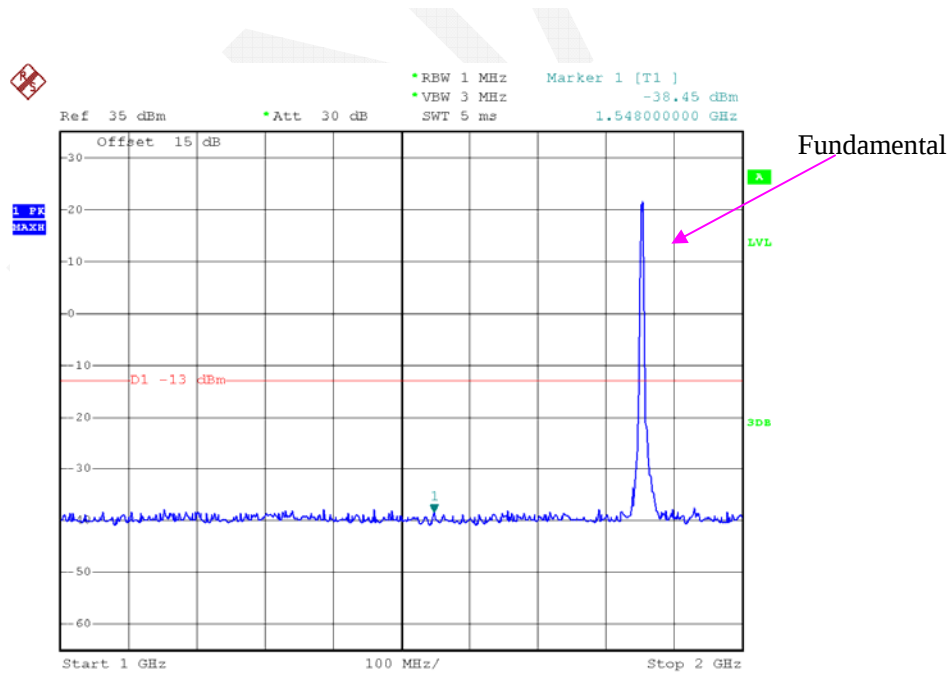


Date: 9.MAY.2015 13:09:10

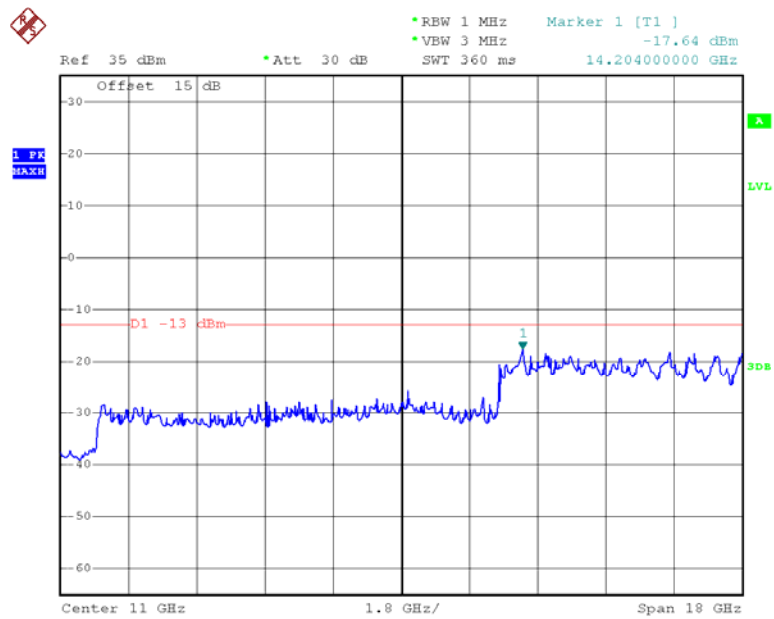


Date: 9.MAY.2015 13:08:23

REL 99 Band V_ Low Channel

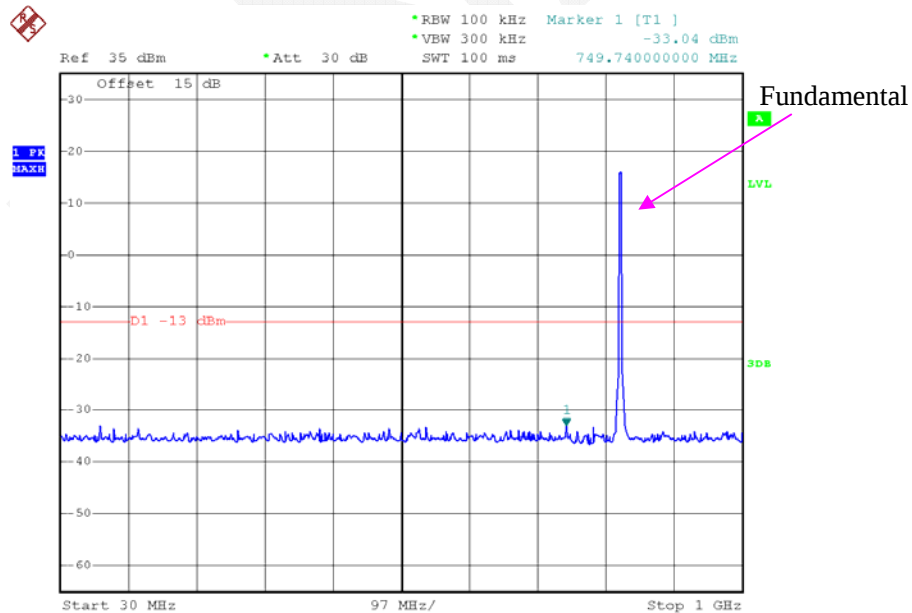


Date: 9.MAY.2015 13:10:58

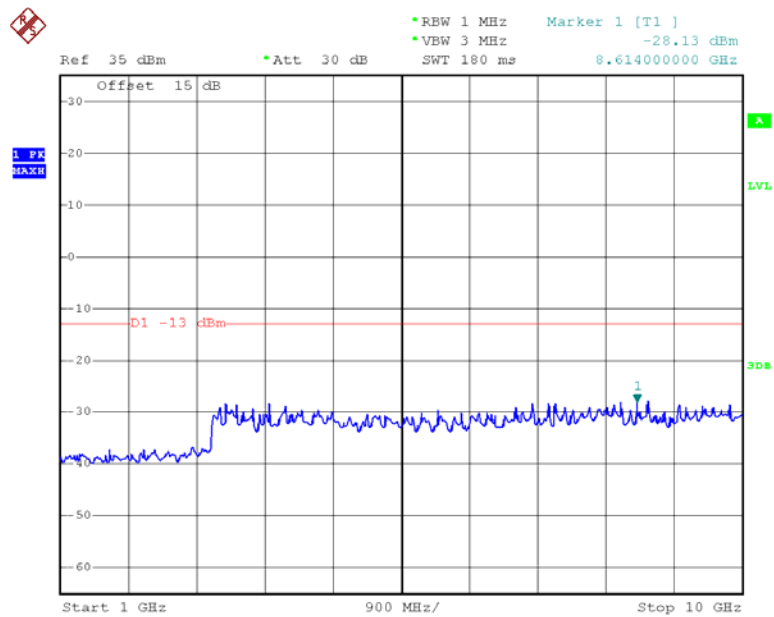


Date: 9.MAY.2015 13:12:06

HSDPA Band V_Low Channel

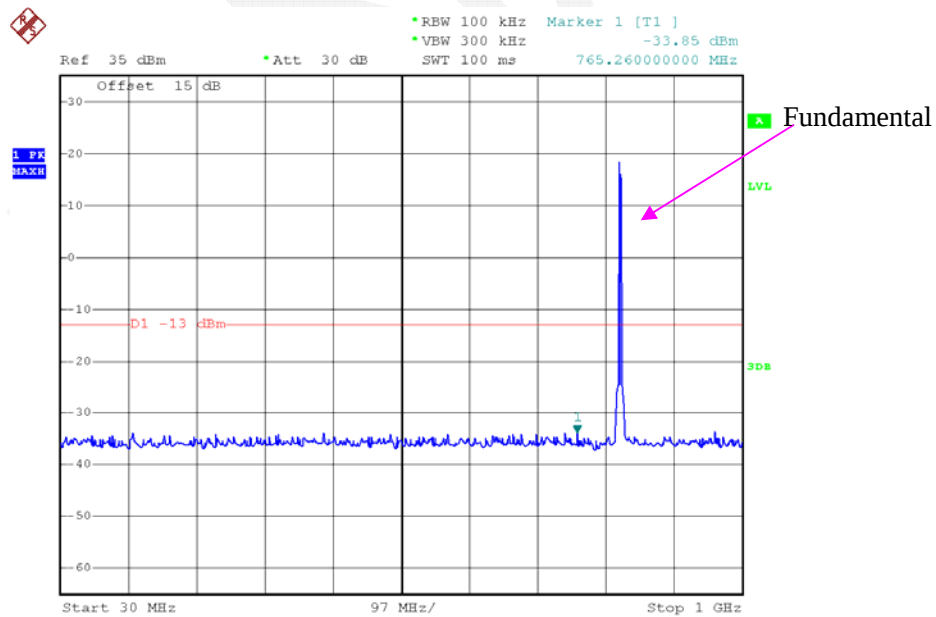


Date: 9.MAY.2015 13:11:20

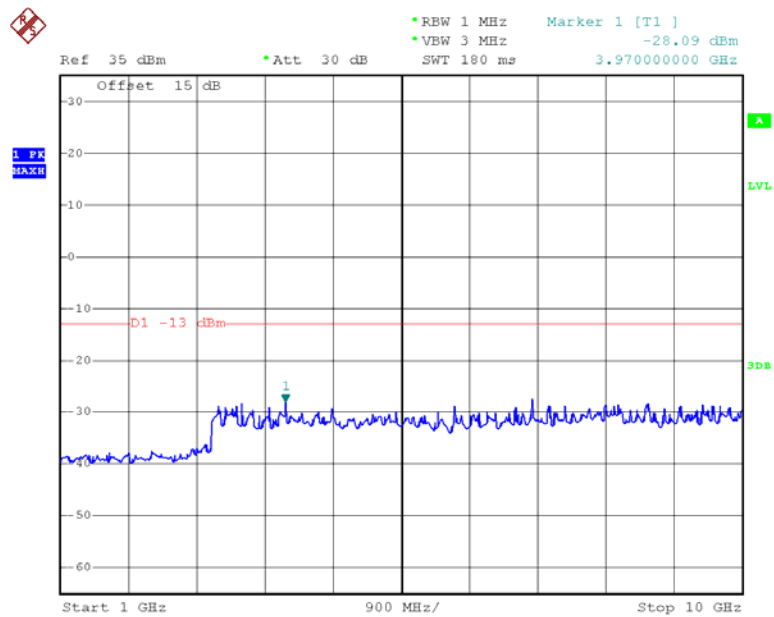


Date: 9.MAY.2015 13:12:20

HSUPA Band V_Low Channel

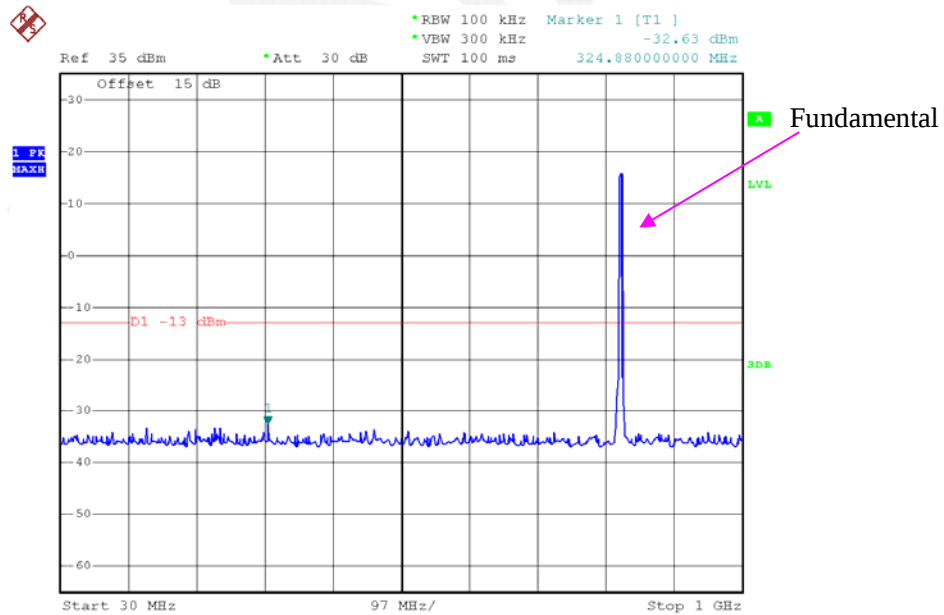

Date: 9.MAY.2015 13:11:37

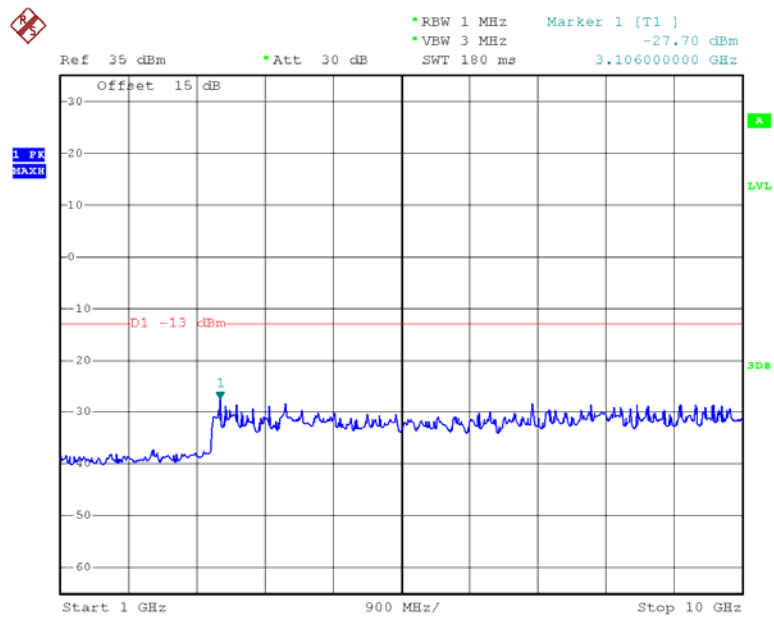

Date: 9.MAY.2015 13:12:29

FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS**Applicable Standard**

FCC § 2.1053, §22.917 and § 24.238.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-05-09	2016-05-09
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2014-09-01	2015-09-01
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
Giga	Signal Generator	1026	320408	2015-05-09	2016-05-09
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2012-09-06	2015-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.8 °C
Relative Humidity:	53 %
ATM Pressure:	100.2 kPa

The testing was performed by Lion Xiao on 2015-05-11.

EUT Operation Mode: Transmitting

Cellular Band

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency:824.200 MHz								
1648.400	H	46.86	-54.3	10.5	1.5	-45.3	-13.0	32.3
1648.400	V	47.47	-54.1	10.5	1.5	-45.1	-13.0	32.1
2472.600	H	52.54	-45.5	12.9	2.6	-35.2	-13.0	22.2
2472.600	V	53.71	-43	12.9	2.6	-32.7	-13.0	19.7
Frequency:836.600 MHz								
1673.200	H	47.42	-53.7	10.6	1.5	-44.6	-13.0	31.6
1673.200	V	47.98	-53.4	10.6	1.5	-44.3	-13.0	31.3
2509.800	H	52.96	-45.1	13.1	2.8	-34.8	-13.0	21.8
2509.800	V	54.12	-43	13.1	2.8	-32.7	-13.0	19.7
Frequency:848.800 MHz								
1697.600	H	47.78	-53.3	10.8	1.5	-44.0	-13.0	31.0
1697.600	V	48.30	-52.9	10.8	1.5	-43.6	-13.0	30.6
2546.400	H	53.34	-43.2	13.1	2.8	-32.9	-13.0	19.9
2546.400	V	54.61	-42.5	13.1	2.8	-32.2	-13.0	19.2

For below 1GHz, all spurious emissions are 20dB below the limit or are on the system noise floor level.

WCDMA Band V

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency:826.400 MHz								
1652.800	H	37.69	-63.4	10.5	1.5	-54.4	-13.0	41.4
1652.800	V	39.68	-61.9	10.5	1.5	-52.9	-13.0	39.9
Frequency:836.600 MHz								
1673.200	H	38.42	-62.7	10.6	1.5	-53.6	-13.0	40.6
1673.200	V	39.26	-62.1	10.6	1.5	-53.0	-13.0	40.0
Frequency:846.600 MHz								
1693.200	H	39.13	-61.9	10.7	1.5	-52.7	-13.0	39.7
1693.200	V	40.52	-60.7	10.7	1.5	-51.5	-13.0	38.5

For below 1GHz, all spurious emissions are 20dB below the limit or are on the system noise floor level.

PCS Band

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency:1850.200 MHz								
3700.400	H	38.27	-56.5	14.0	2.5	-45.0	-13.0	32.0
3700.400	V	42.07	-52.3	14.0	2.5	-40.8	-13.0	27.8
Frequency:1880.000 MHz								
3760.000	H	39.24	-55.1	13.8	2.9	-44.2	-13.0	31.2
3760.000	V	43.28	-49.8	13.8	2.9	-38.9	-13.0	25.9
Frequency:1909.800 MHz								
3819.600	H	40.53	-53.3	13.6	3.3	-43.0	-13.0	30.0
3819.600	V	43.68	-48.5	13.6	3.3	-38.2	-13.0	25.2

For below 1GHz, all spurious emissions are 20dB below the limit or are on the system noise floor level.

WCDMA Band

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Frequency:1852.400 MHz								
3704.800	H	41.36	-53.4	13.9	2.5	-42.0	-13.0	29.0
3704.800	V	40.23	-54	13.9	2.5	-42.6	-13.0	29.6
Frequency:1880.000 MHz								
3760.000	H	40.56	-53.7	13.8	2.9	-42.8	-13.0	29.8
3760.000	V	39.46	-53.6	13.8	2.9	-42.7	-13.0	29.7
Frequency:1907.600 MHz								
3815.200	H	39.64	-54.2	13.6	3.3	-43.9	-13.0	30.9
3815.200	V	38.17	-54	13.6	3.3	-43.7	-13.0	30.7

For below 1GHz, all spurious emissions are 20dB below the limit or are on the system noise floor level.

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §22.917(a) & §24.238(a) - BAND EDGES

Applicable Standard


According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

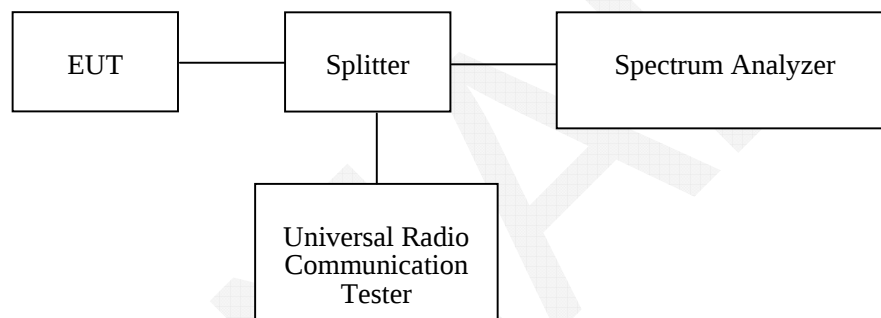

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.6~25.8 °C
Relative Humidity:	51~53 %
ATM Pressure:	100~100.2 kPa


The testing was performed by Lion Xiao on 2015-05-09 & 2015-05-11.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.


Band	Mode	Band Edge	Reading	Limit
			dBm	dBm
Cellular	GSM	Left	-15.37	≤ -13
		Right	-15.66	≤ -13
	EGPRS	Left	-25.55	≤ -13
		Right	-26.11	≤ -13
PCS	PCS	Left	-16.41	≤ -13
		Right	-17.73	≤ -13
	EGPRS	Left	-25.85	≤ -13
		Right	-28.21	≤ -13
WCDMA Band	Rel 99	Left	-15.12	≤ -13
		Right	-18.33	≤ -13
	HSDPA	Left	-16.40	≤ -13
		Right	-18.48	≤ -13
	HSUPA	Left	-14.92	≤ -13
		Right	-15.50	≤ -13
	DC-HSDPA	Left	-16.26	≤ -13
		Right	-16.79	≤ -13
	HSPA+	Left	-15.97	≤ -13
		Right	-18.28	≤ -13
WCDMA Band V	Rel 99	Left	-14.54	≤ -13
		Right	-16.03	≤ -13
	HSDPA	Left	-15.50	≤ -13
		Right	-16.52	≤ -13
	HSUPA	Left	-16.80	≤ -13
		Right	-16.80	≤ -13
	DC-HSDPA	Left	-16.78	≤ -13
		Right	-17.85	≤ -13
	HSPA+	Left	-17.93	≤ -13
		Right	-20.20	≤ -13

GSM 850, Left Band Edge

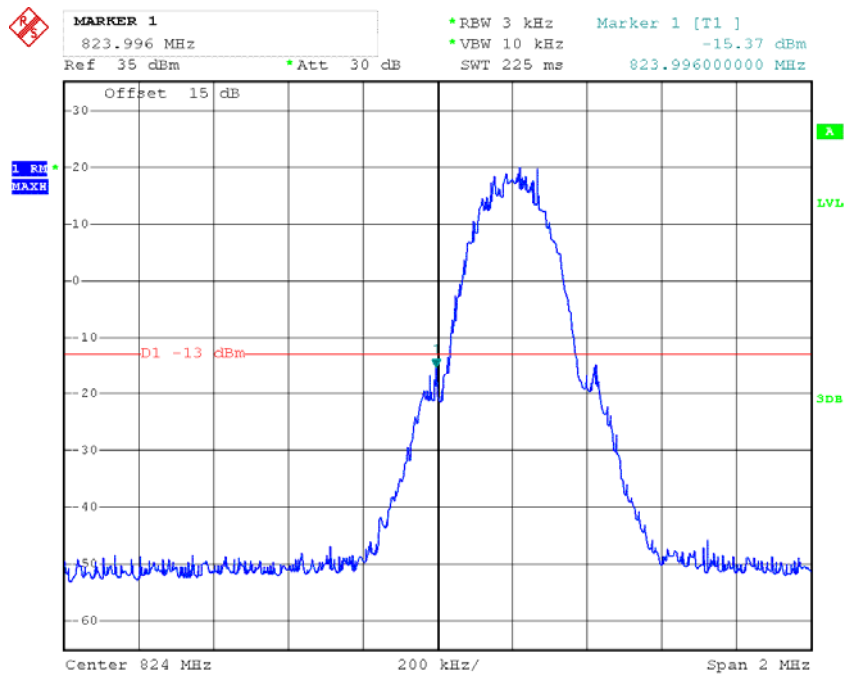


Date: 9.MAY.2015 12:27:15

GSM 850, Right Band Edge

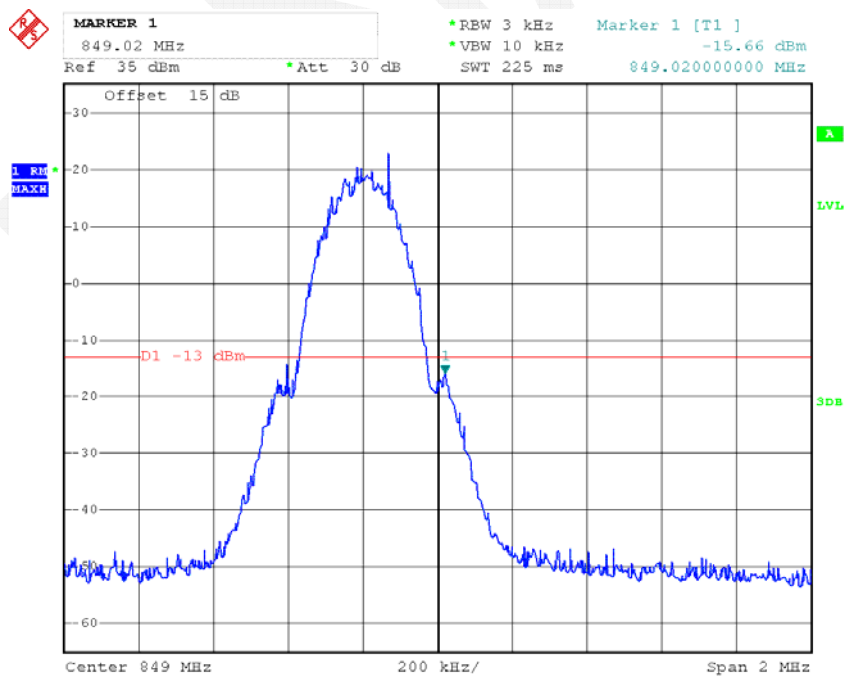


Date: 9.MAY.2015 12:29:18

EGPRS 850, Left Band Edge

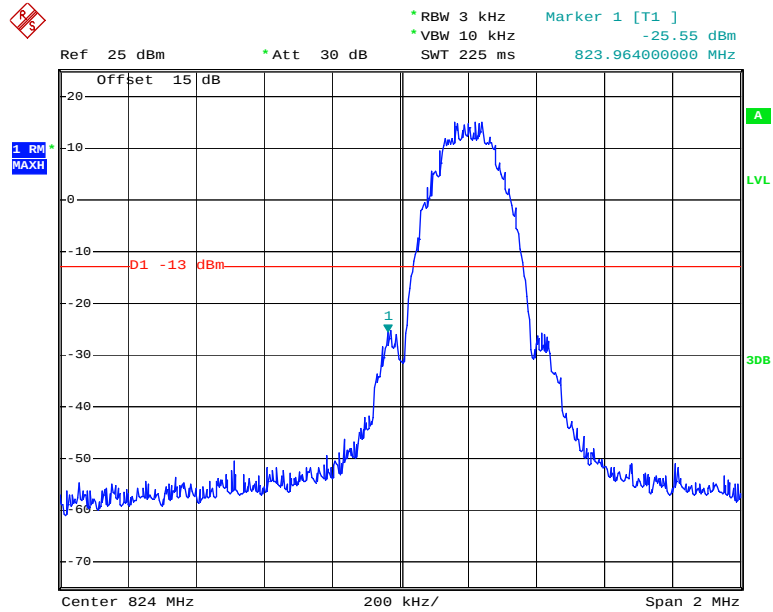


Date: 13.MAY.2015 17:02:39

EGPRS 850, Right Band Edge

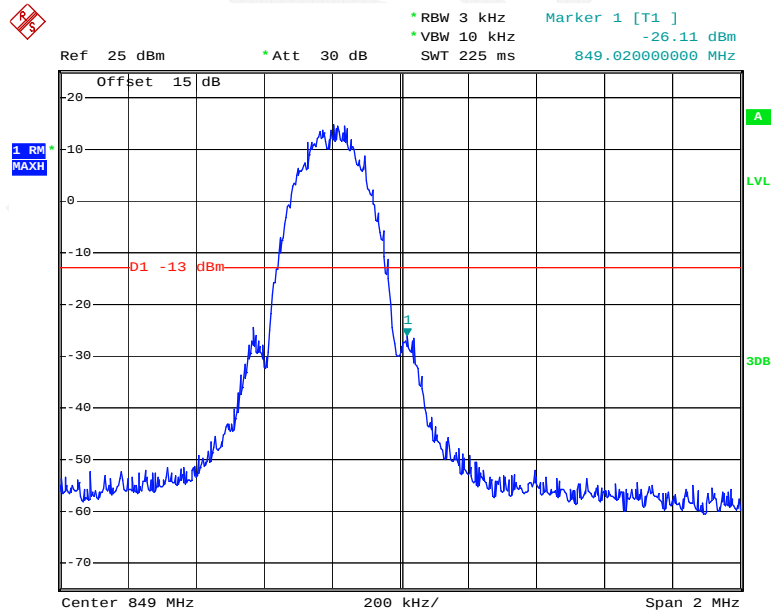


Date: 13.MAY.2015 17:03:45

GSM 1900, Left Band Edge

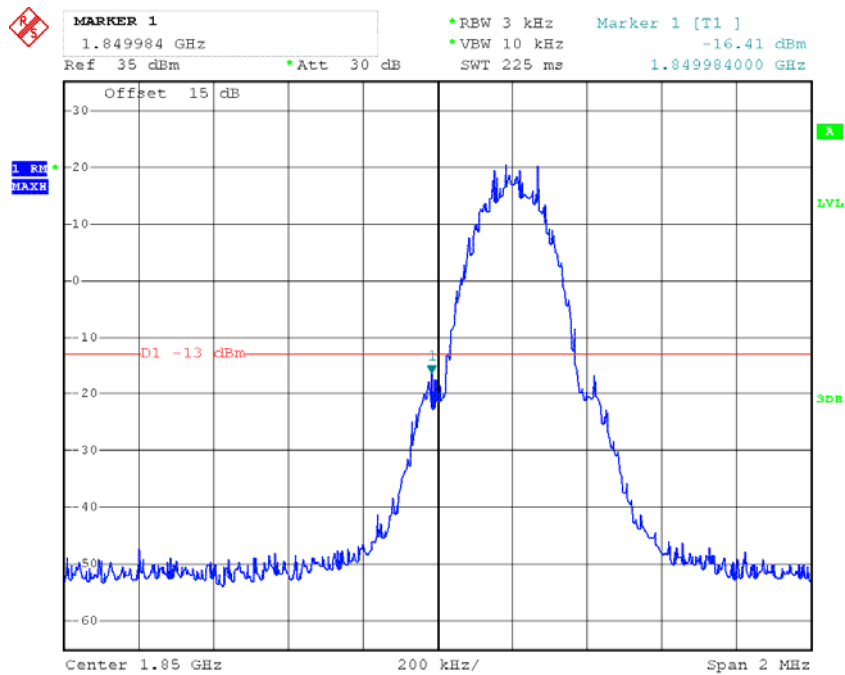


Date: 9.MAY.2015 12:30:58

GSM 1900, Right Band Edge

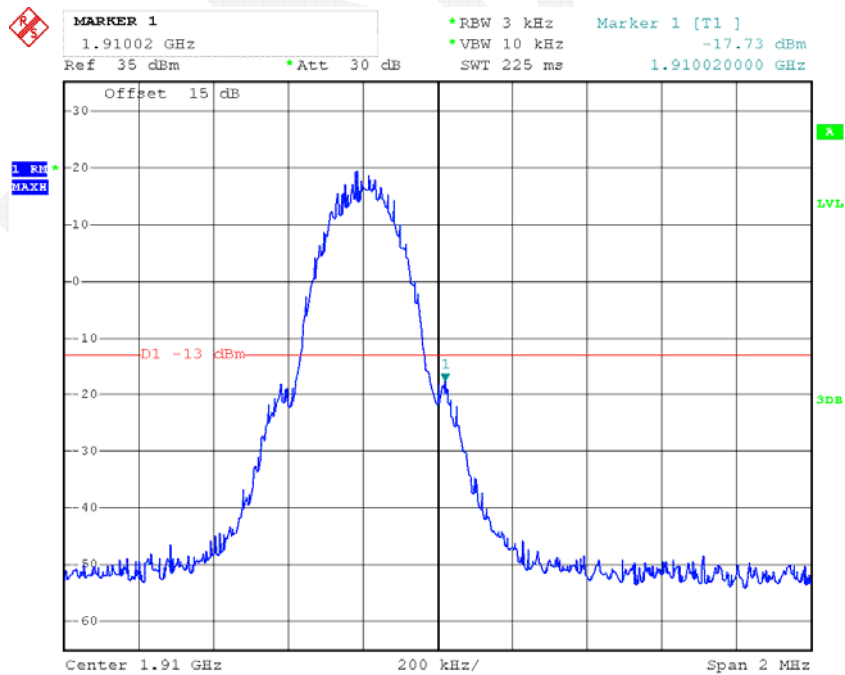


Date: 9.MAY.2015 12:32:19

EGPRS 1900, Left Band Edge

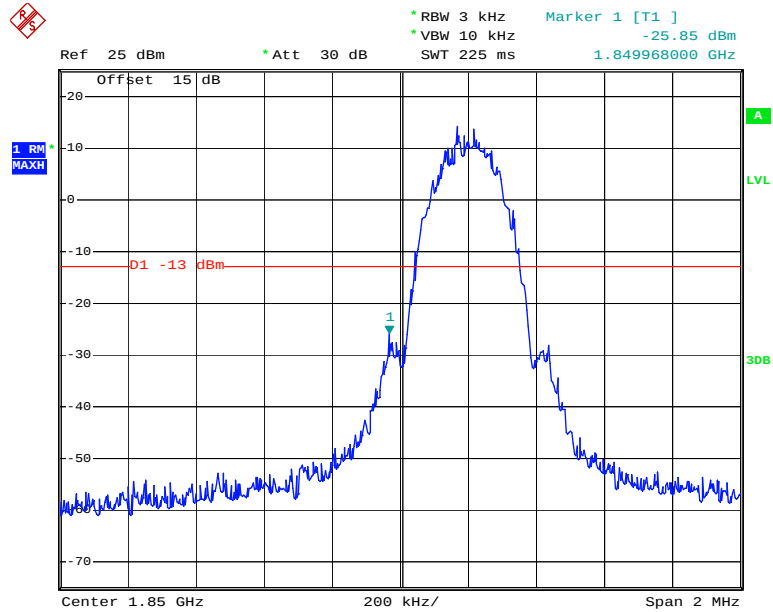


Date: 13.MAY.2015 16:55:54

EGPRS 1900, Right Band Edge

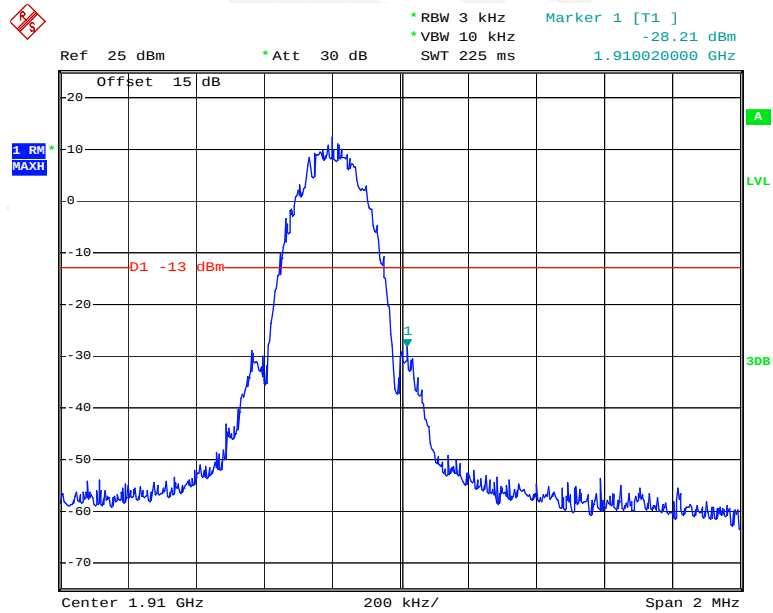


Date: 13.MAY.2015 16:56:58

REL99 Band , Left Band Edge

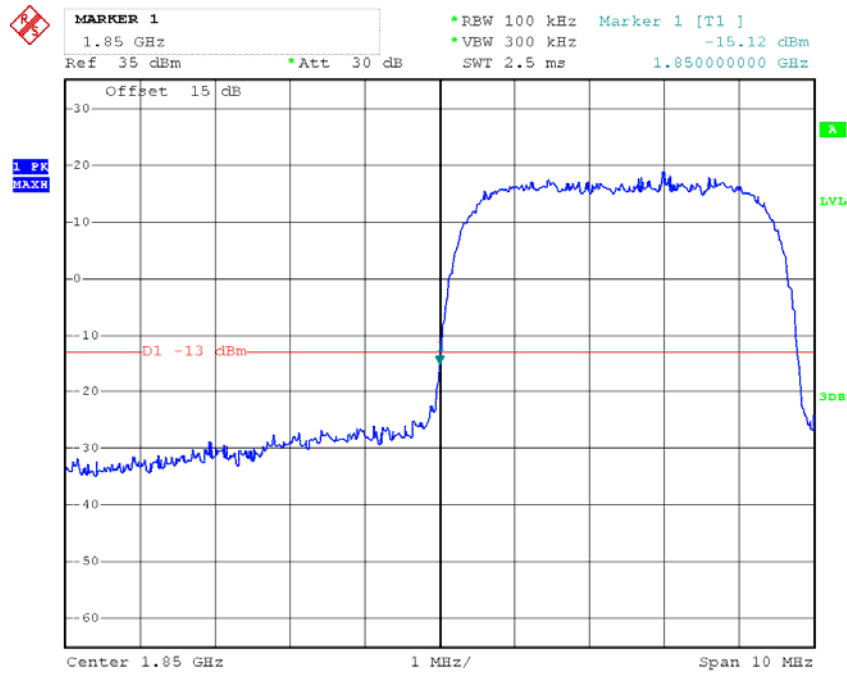


Date: 9.MAY.2015 12:16:44

REL 99 Band , Right Band Edge

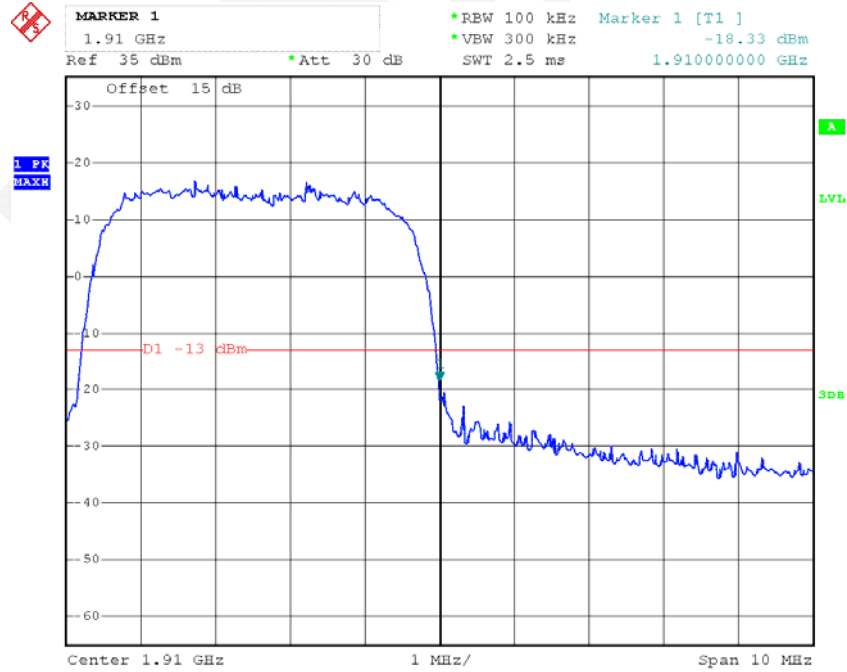


Date: 9.MAY.2015 12:18:40

HSDPA Band , Left Band Edge

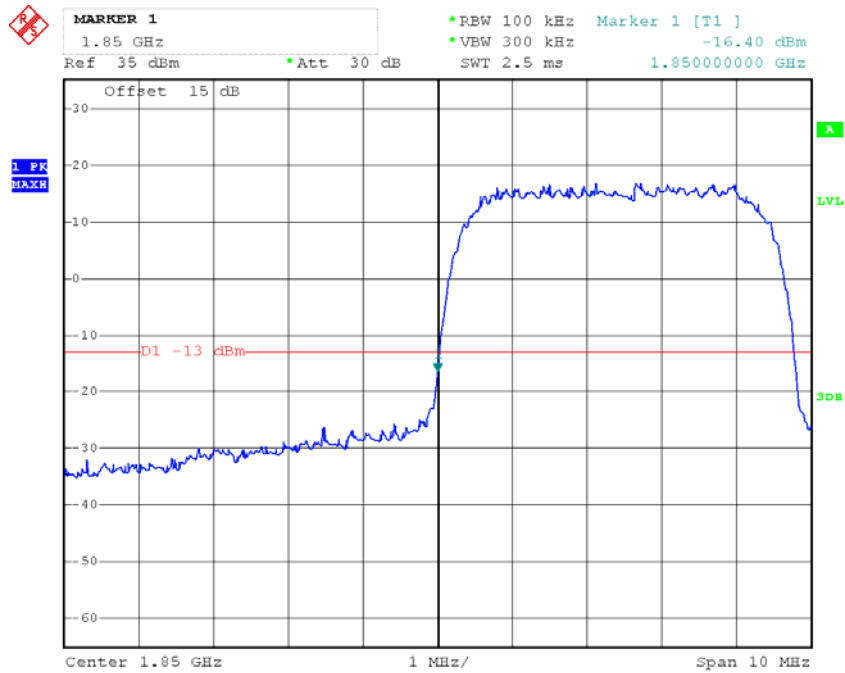


Date: 9.MAY.2015 12:17:23

HSDPA Band , Right Band Edge

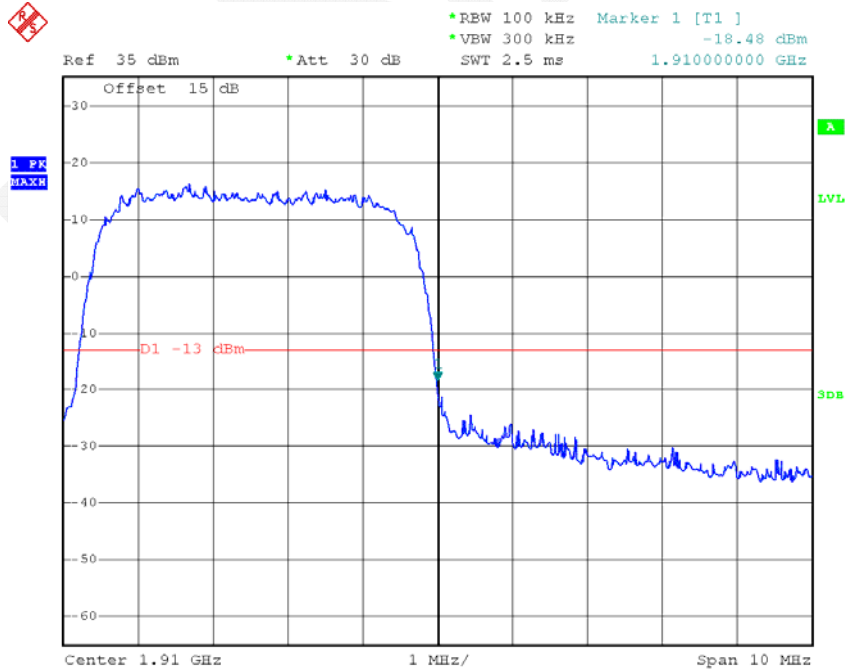


Date: 9.MAY.2015 12:18:58

HSUPA Band , Left Band Edge

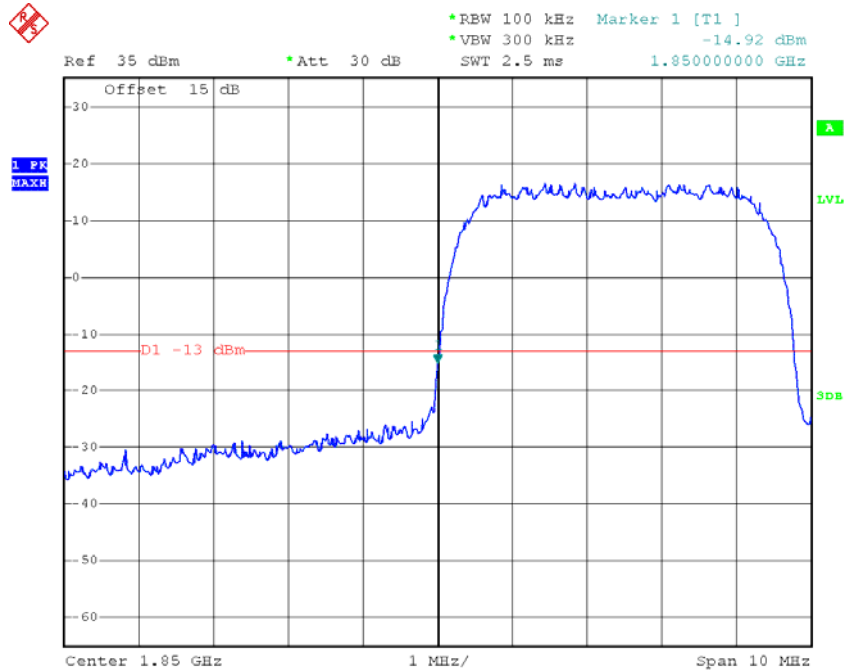


Date: 9.MAY.2015 12:17:48

HSUPA Band , Right Band Edge

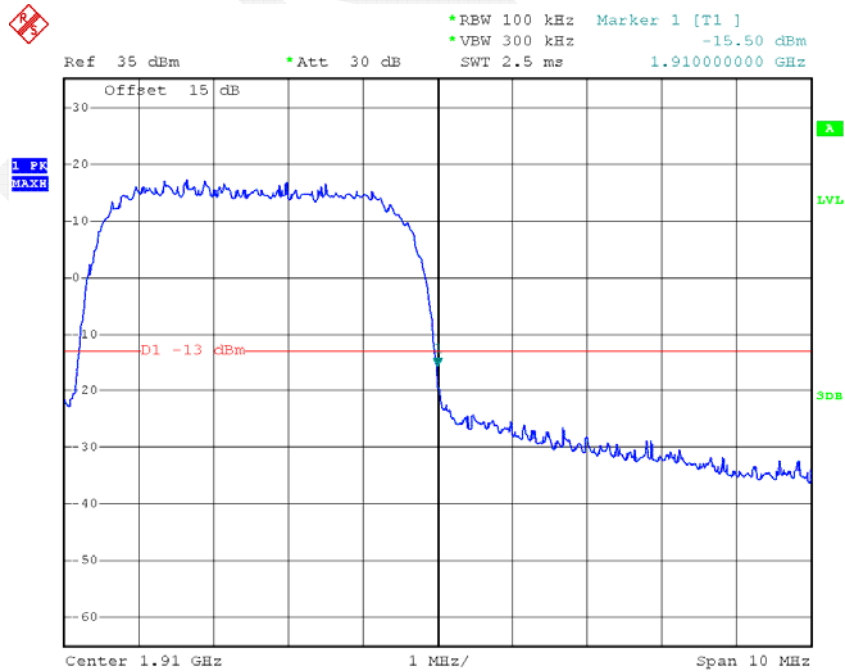


Date: 9.MAY.2015 12:19:29

DC-HSDPA Band , Left Band Edge

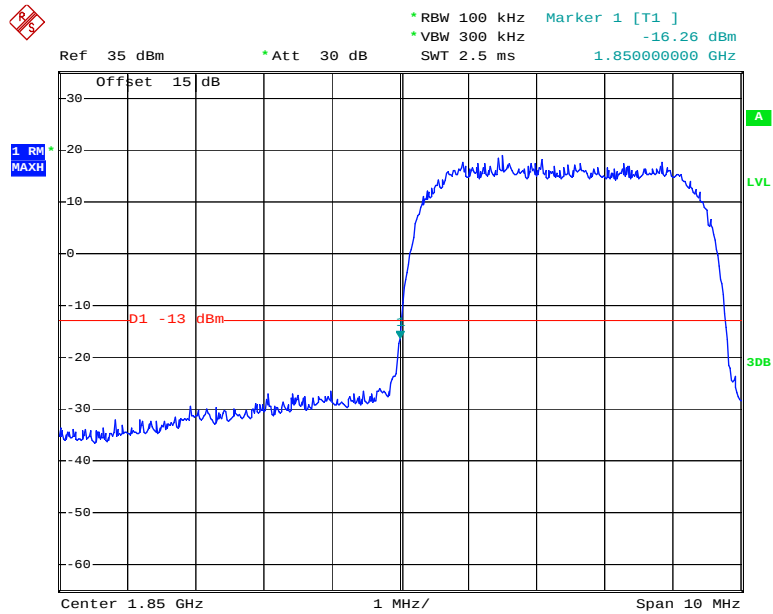


Date: 22.MAY.2015 18:22:06

DC-HSDPA Band , Right Band Edge

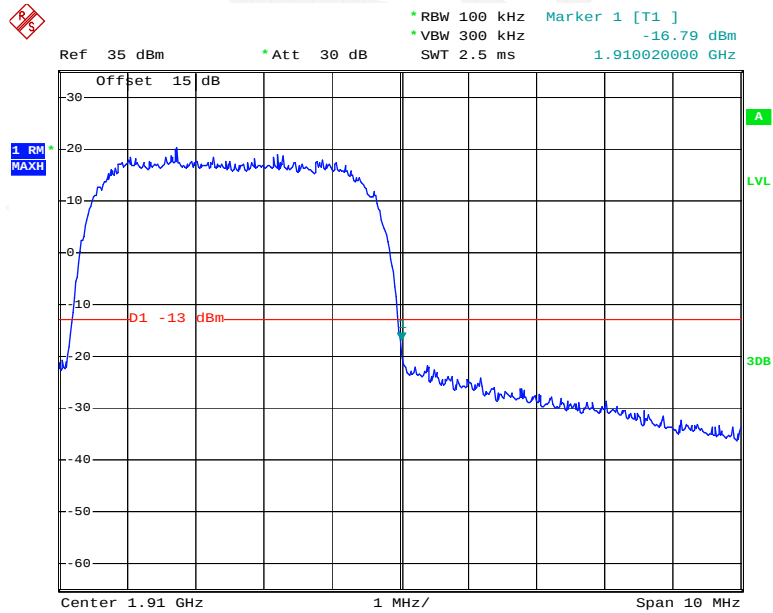


Date: 22.MAY.2015 18:21:07

HSPA+ Band , Left Band Edge

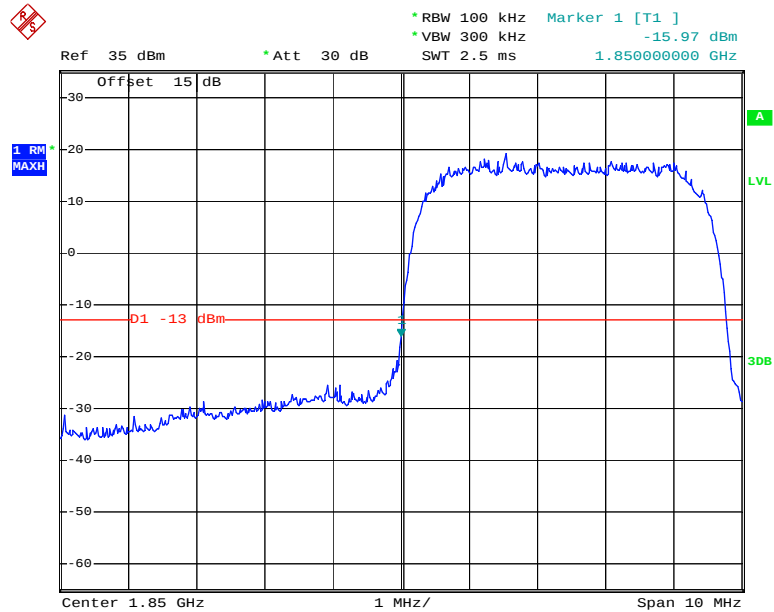


Date: 22.MAY.2015 18:21:49

HSPA+ Band , Right Band Edge

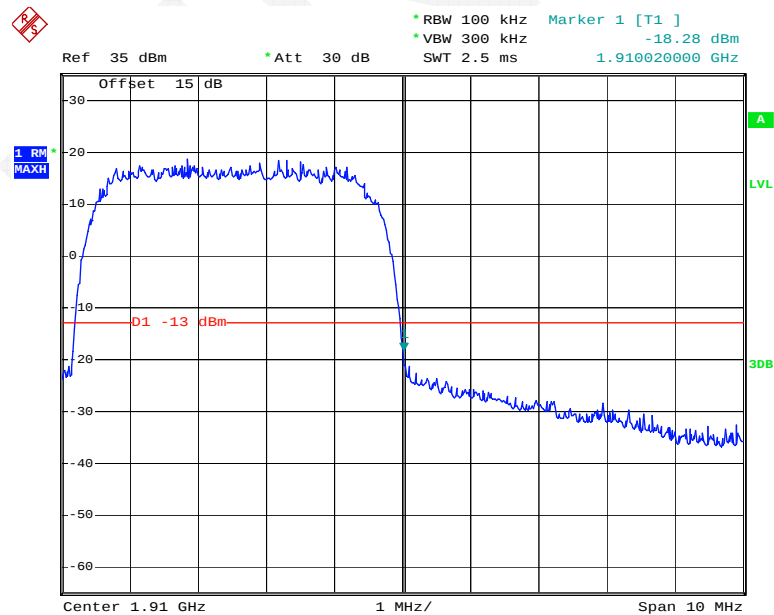


Date: 22.MAY.2015 18:21:18

REL99 Band V, Left Band Edge

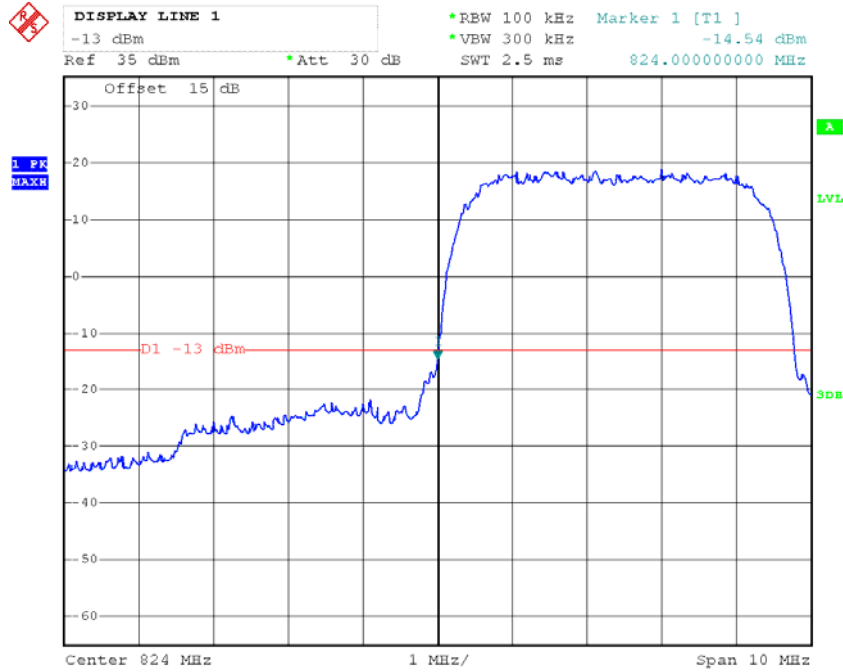


Date: 9.MAY.2015 12:11:36

REL 99 Band V, Right Band Edge

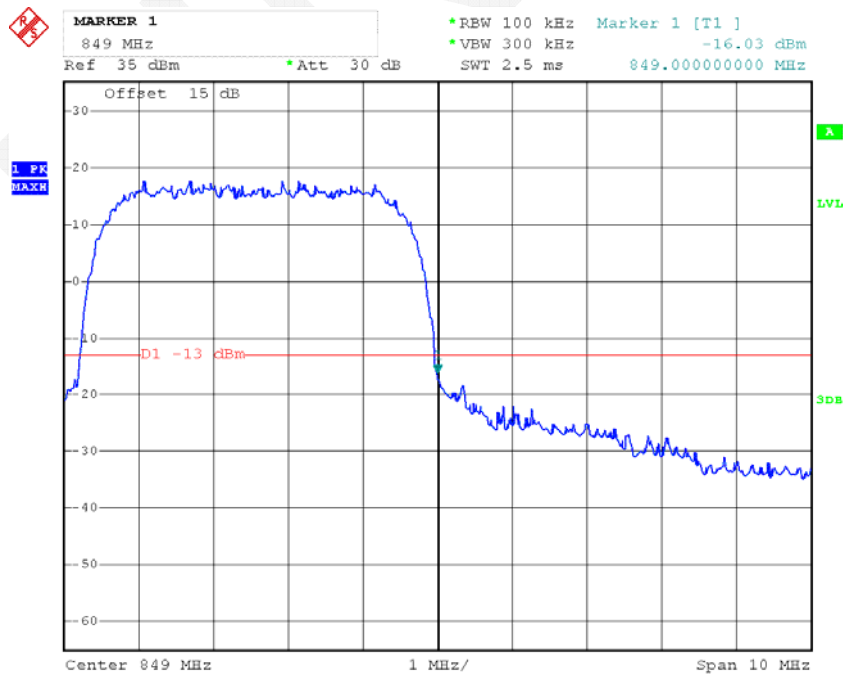


Date: 9.MAY.2015 12:13:09

HSDPA Band V , Left Band Edge

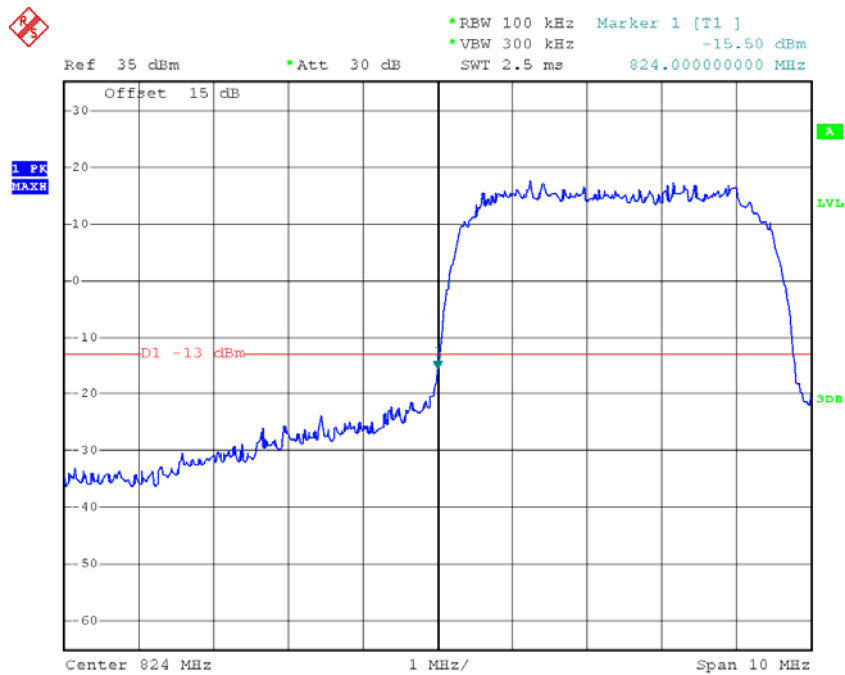


Date: 9.MAY.2015 12:12:19

HSDPA Band V , Right Band Edge

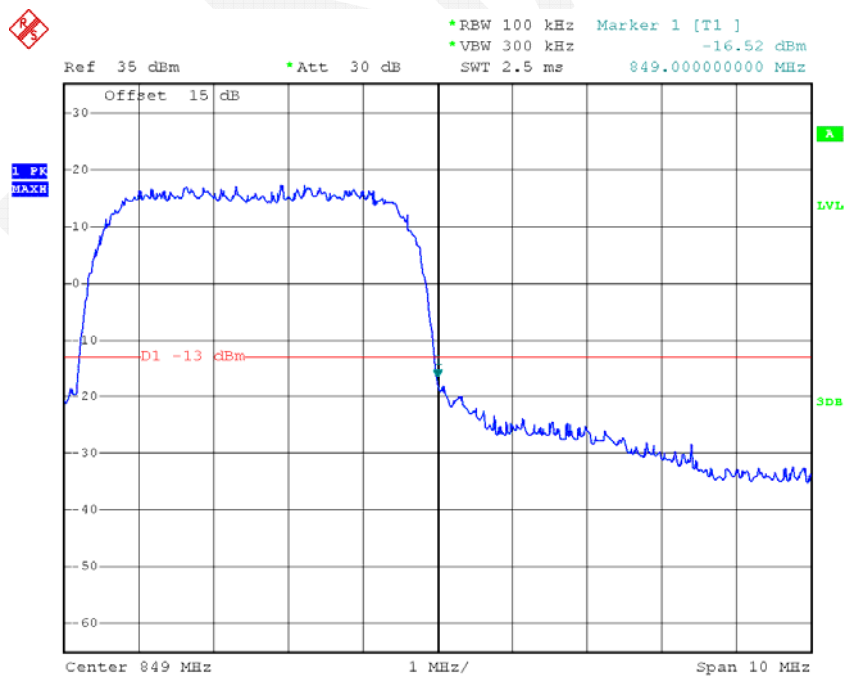


Date: 9.MAY.2015 12:13:24

HSUPA Band V , Left Band Edge

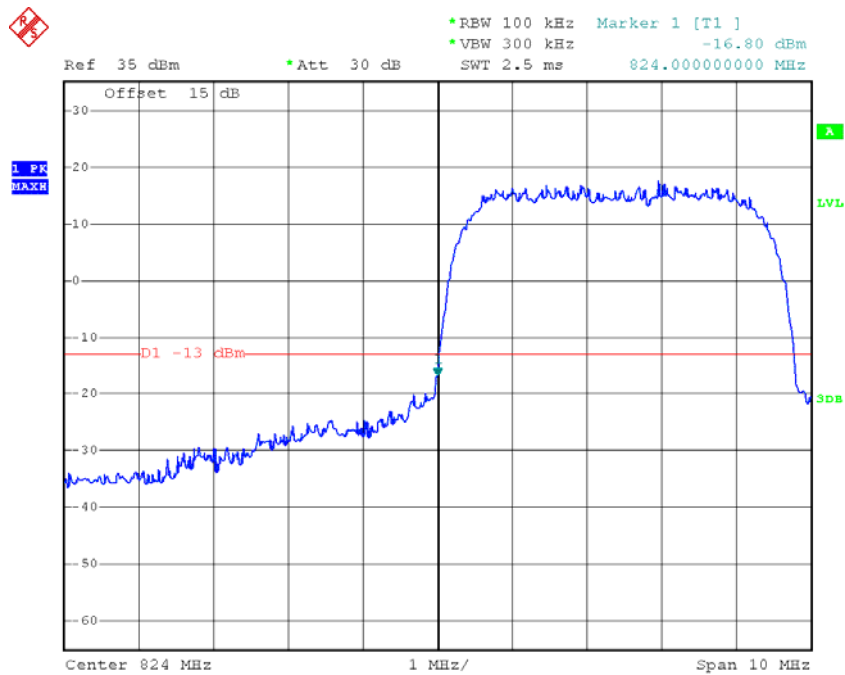


Date: 9.MAY.2015 12:12:32

HSUPA Band V , Right Band Edge

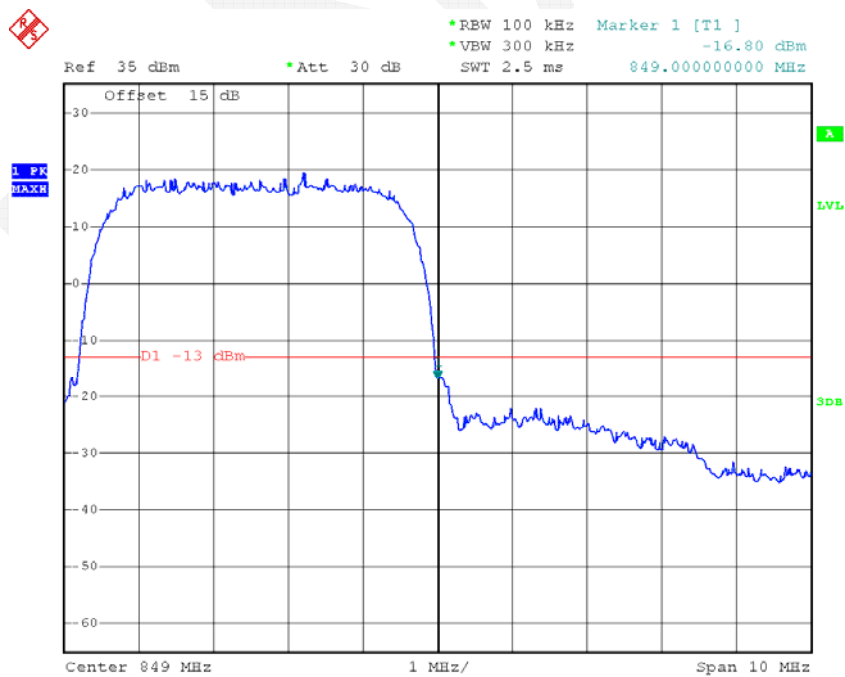


Date: 9.MAY.2015 12:13:48

DC-HSDPA Band V, Left Band Edge

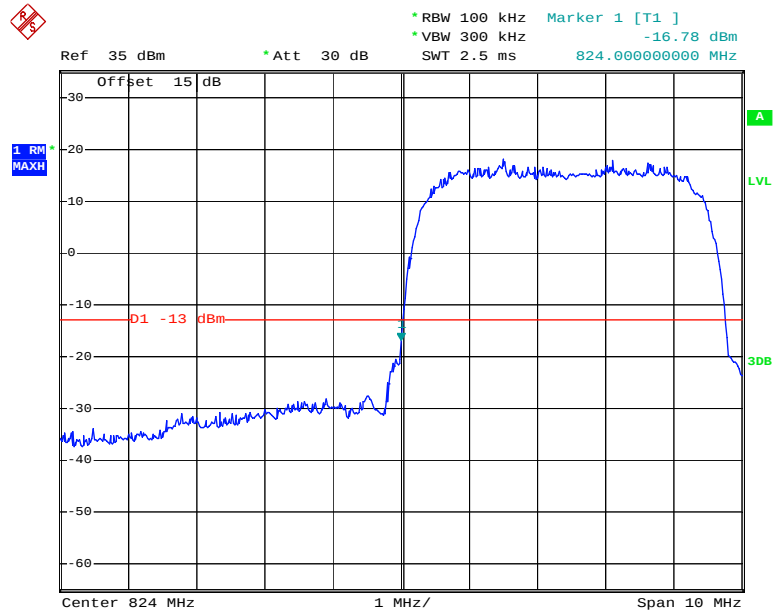


Date: 22.MAY.2015 18:34:52

DC-HSDPA Band V, Right Band Edge

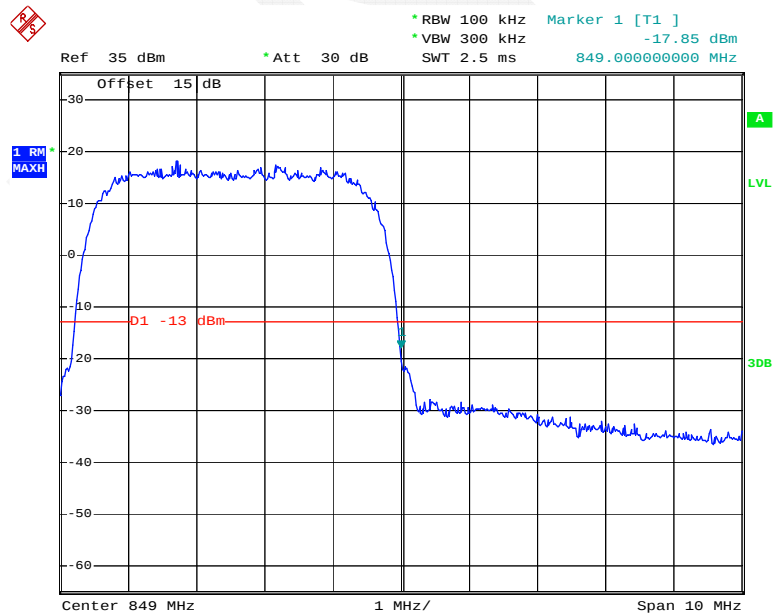


Date: 22.MAY.2015 18:37:37

HSPA+ Band V, Left Band Edge

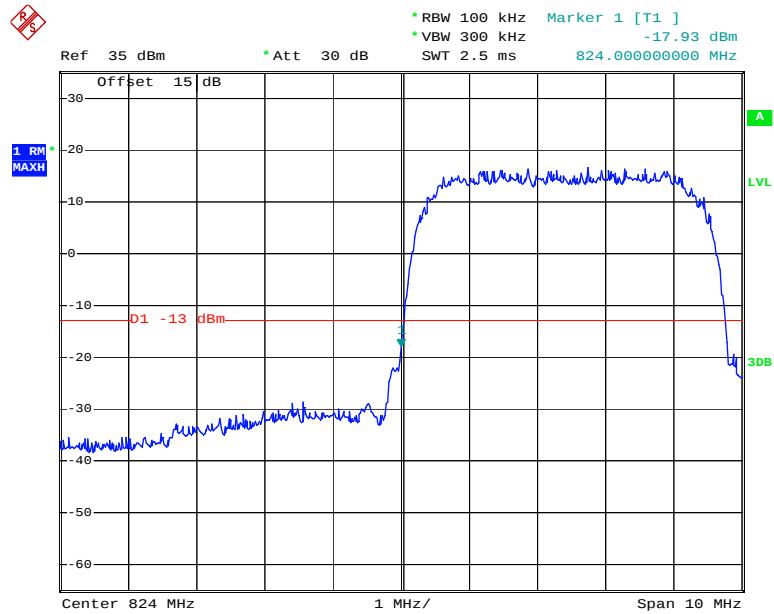

Date: 22.MAY.2015 18:35:11

HSPA+ Band V, Right Band Edge

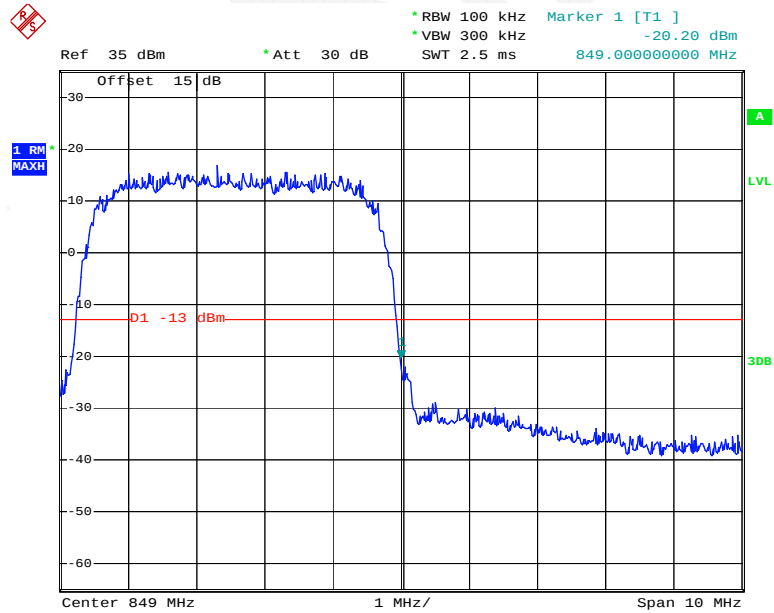

Date: 22.MAY.2015 18:37:46

FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

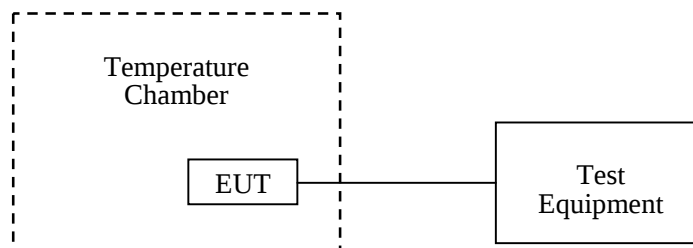

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-3	2014-08-01	2015-08-01
R&S	Universal Radio Communication Tester	CMU200	109 038	2015-05-09	2016-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.8 °C
Relative Humidity:	53 %
ATM Pressure:	100.2kPa

The testing was performed by Lion Xiao on 2015-05-11.

Cellular Band (Part 22H)

GMSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
	V_{DC}	Hz	ppm	ppm
-30	3.7	-9	-0.011	2.5
-20	3.7	-12	-0.014	2.5
-10	3.7	-9	-0.011	2.5
0	3.7	-10	-0.012	2.5
10	3.7	-11	-0.013	2.5
20	3.7	-9	-0.011	2.5
30	3.7	-13	-0.016	2.5
40	3.7	-10	-0.012	2.5
50	3.7	-12	-0.014	2.5
25	3.6	-8	-0.010	2.5
25	4.2	-11	-0.013	2.5

8PSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
	V_{DC}	Hz	ppm	ppm
-30	3.7	-12	-0.014	2.5
-20	3.7	-8	-0.010	2.5
-10	3.7	-15	-0.018	2.5
0	3.7	-7	-0.008	2.5
10	3.7	-9	-0.011	2.5
20	3.7	-15	-0.018	2.5
30	3.7	-11	-0.013	2.5
40	3.7	-8	-0.010	2.5
50	3.7	-11	-0.013	2.5
25	3.6	-13	-0.016	2.5
25	4.2	-8	-0.010	2.5

Band V:

Rel 99, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
	V_{DC}	Hz	ppm	ppm
-30	3.7	-8	-0.010	2.5
-20	3.7	-12	-0.014	2.5
-10	3.7	-15	-0.018	2.5
0	3.7	-11	-0.013	2.5
10	3.7	-10	-0.012	2.5
20	3.7	-9	-0.011	2.5
30	3.7	-14	-0.017	2.5
40	3.7	-13	-0.016	2.5
50	3.7	-7	-0.008	2.5
25	3.6	-7	-0.008	2.5
25	4.2	-9	-0.011	2.5

HSDPA, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
	V_{DC}	Hz	ppm	ppm
-30	3.7	-9	-0.011	2.5
-20	3.7	-8	-0.010	2.5
-10	3.7	-11	-0.013	2.5
0	3.7	-8	-0.010	2.5
10	3.7	-12	-0.014	2.5
20	3.7	-13	-0.016	2.5
30	3.7	-12	-0.014	2.5
40	3.7	-14	-0.017	2.5
50	3.7	-9	-0.011	2.5
25	3.6	-9	-0.011	2.5
25	4.2	-13	-0.016	2.5

HSUPA, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
	V_{DC}	Hz	ppm	ppm
-30	3.7	-13	-0.016	2.5
-20	3.7	-11	-0.013	2.5
-10	3.7	-13	-0.016	2.5
0	3.7	-9	-0.011	2.5
10	3.7	-15	-0.018	2.5
20	3.7	-7	-0.008	2.5
30	3.7	-9	-0.011	2.5
40	3.7	-11	-0.013	2.5
50	3.7	-14	-0.017	2.5
25	3.6	-12	-0.014	2.5
25	4.2	-12	-0.014	2.5

DC-HSDPA, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
	V_{DC}	Hz	ppm	ppm
-30	3.7	-17	-0.020	2.5
-20	3.7	-13	-0.016	2.5
-10	3.7	-12	-0.014	2.5
0	3.7	-10	-0.012	2.5
10	3.7	-15	-0.018	2.5
20	3.7	-13	-0.016	2.5
30	3.7	-9	-0.011	2.5
40	3.7	-15	-0.018	2.5
50	3.7	-13	-0.016	2.5
25	3.6	-16	-0.019	2.5
25	4.2	-14	-0.017	2.5

HSPA+, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
	V_{DC}	Hz	ppm	ppm
-30	3.7	-12	-0.014	2.5
-20	3.7	-13	-0.016	2.5
-10	3.7	-9	-0.011	2.5
0	3.7	-11	-0.013	2.5
10	3.7	-17	-0.020	2.5
20	3.7	-16	-0.019	2.5
30	3.7	-17	-0.020	2.5
40	3.7	-12	-0.014	2.5
50	3.7	-10	-0.012	2.5
25	3.6	-11	-0.013	2.5
25	4.2	-17	-0.020	2.5

PCS Band (Part 24E)

GMSK, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
	V_{DC}	Hz	ppm	
-30	3.7	-11	-0.006	Pass
-20	3.7	-7	-0.004	Pass
-10	3.7	-14	-0.007	Pass
0	3.7	-14	-0.007	Pass
10	3.7	-8	-0.004	Pass
20	3.7	-5	-0.003	Pass
30	3.7	-9	-0.005	Pass
40	3.7	-15	-0.008	Pass
50	3.7	-13	-0.007	Pass
25	3.6	-7	-0.004	Pass
25	4.2	-14	-0.007	Pass

EGPRS, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
	V_{DC}	Hz	ppm	
-30	3.7	-12	-0.006	Pass
-20	3.7	-7	-0.004	Pass
-10	3.7	-12	-0.006	Pass
0	3.7	-14	-0.007	Pass
10	3.7	-14	-0.007	Pass
20	3.7	-15	-0.008	Pass
30	3.7	-6	-0.003	Pass
40	3.7	-7	-0.004	Pass
50	3.7	-9	-0.005	Pass
25	3.6	-15	-0.008	Pass
25	4.2	-12	-0.006	Pass

Band :

Rel 99, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
	V_{DC}	Hz	ppm	ppm
-30	3.7	-7	-0.004	Pass
-20	3.7	-13	-0.007	Pass
-10	3.7	-8	-0.004	Pass
0	3.7	-14	-0.007	Pass
10	3.7	-11	-0.006	Pass
20	3.7	-7	-0.004	Pass
30	3.7	-15	-0.008	Pass
40	3.7	-12	-0.006	Pass
50	3.7	-11	-0.006	Pass
25	3.6	-9	-0.005	Pass
25	4.2	-15	-0.008	Pass

HSDPA, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
	V_{DC}	Hz	ppm	ppm
-30	3.7	-9	-0.005	Pass
-20	3.7	-8	-0.004	Pass
-10	3.7	-11	-0.006	Pass
0	3.7	-8	-0.004	Pass
10	3.7	-12	-0.006	Pass
20	3.7	-13	-0.007	Pass
30	3.7	-12	-0.006	Pass
40	3.7	-14	-0.007	Pass
50	3.7	-9	-0.005	Pass
25	3.6	-9	-0.005	Pass
25	4.2	-13	-0.007	Pass

HSUPA, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
	V_{DC}	Hz	ppm	ppm
-30	3.7	-8	-0.004	Pass
-20	3.7	-14	-0.007	Pass
-10	3.7	-10	-0.005	Pass
0	3.7	-7	-0.004	Pass
10	3.7	-11	-0.006	Pass
20	3.7	-8	-0.004	Pass
30	3.7	-8	-0.004	Pass
40	3.7	-6	-0.003	Pass
50	3.7	-13	-0.007	Pass
25	3.6	-11	-0.006	Pass
25	4.2	-8	-0.004	Pass

DC-HSDPA, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
	V_{DC}	Hz	ppm	ppm
-30	3.7	-13	-0.007	Pass
-20	3.7	-17	-0.009	Pass
-10	3.7	-15	-0.008	Pass
0	3.7	-18	-0.010	Pass
10	3.7	-11	-0.006	Pass
20	3.7	-8	-0.004	Pass
30	3.7	-16	-0.009	Pass
40	3.7	-14	-0.007	Pass
50	3.7	-12	-0.006	Pass
25	3.6	-11	-0.006	Pass
25	4.2	-13	-0.007	Pass

HSPA+, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
	V_{DC}	Hz	ppm	ppm
-30	3.7	-12	-0.006	Pass
-20	3.7	-8	-0.004	Pass
-10	3.7	-13	-0.007	Pass
0	3.7	-16	-0.009	Pass
10	3.7	-10	-0.005	Pass
20	3.7	-12	-0.006	Pass
30	3.7	-11	-0.006	Pass
40	3.7	-18	-0.010	Pass
50	3.7	-16	-0.009	Pass
25	3.6	-9	-0.005	Pass
25	4.2	-15	-0.008	Pass

*****END OF REPORT*****