


Power Spectral Density U-NII – 2C
Test Model 802.11ac(HT40) Frequency(MHz) 5670




Power Spectral Density U-NII – 2C
Test Model 802.11ac 80 Frequency(MHz) 5530

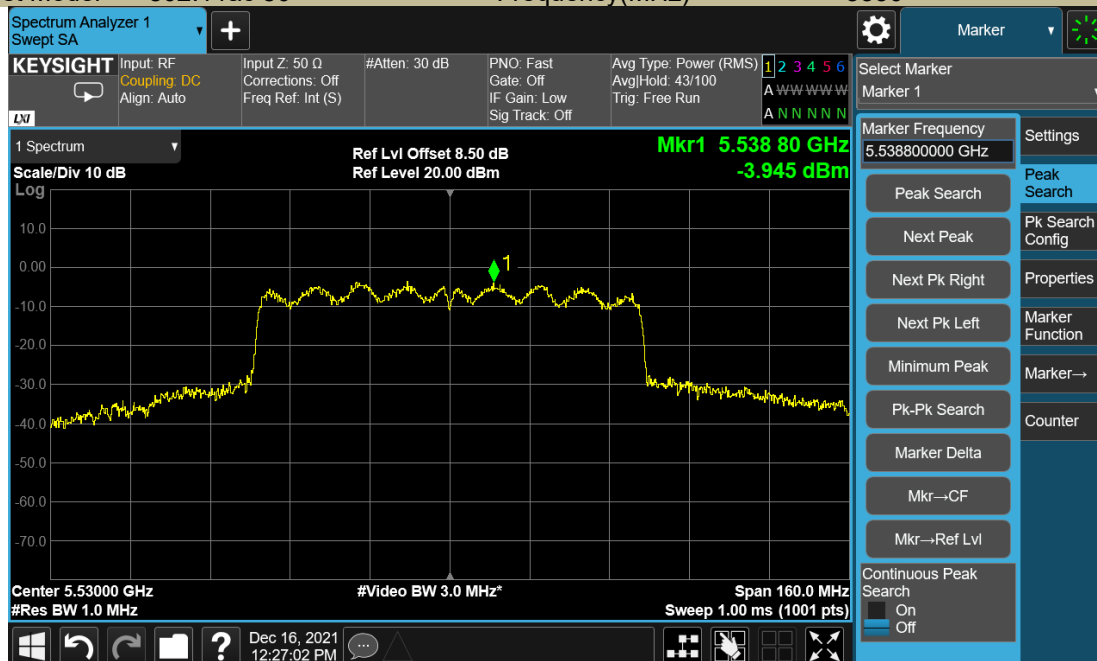


5725-5850MHz

Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5745	-3.325	30
	5785	-3.870	30
	5825	-3.894	30
802.11n-HT20	5745	-3.779	30
	5785	-3.981	30
	5825	-3.702	30
802.11ac(VHT20)	5745	-4.275	30
	5785	-4.623	30
	5825	-4.694	30
802.11n-HT40	5755	-5.133	30
	5795	-5.555	30
802.11ac(VHT40)	5755	-6.430	30
	5795	-7.336	30
802.11ac(VHT80)	5775	-9.101	30


Power Spectral Density U-NII - 3
Test Model 802.11a Frequency(MHz) 5745

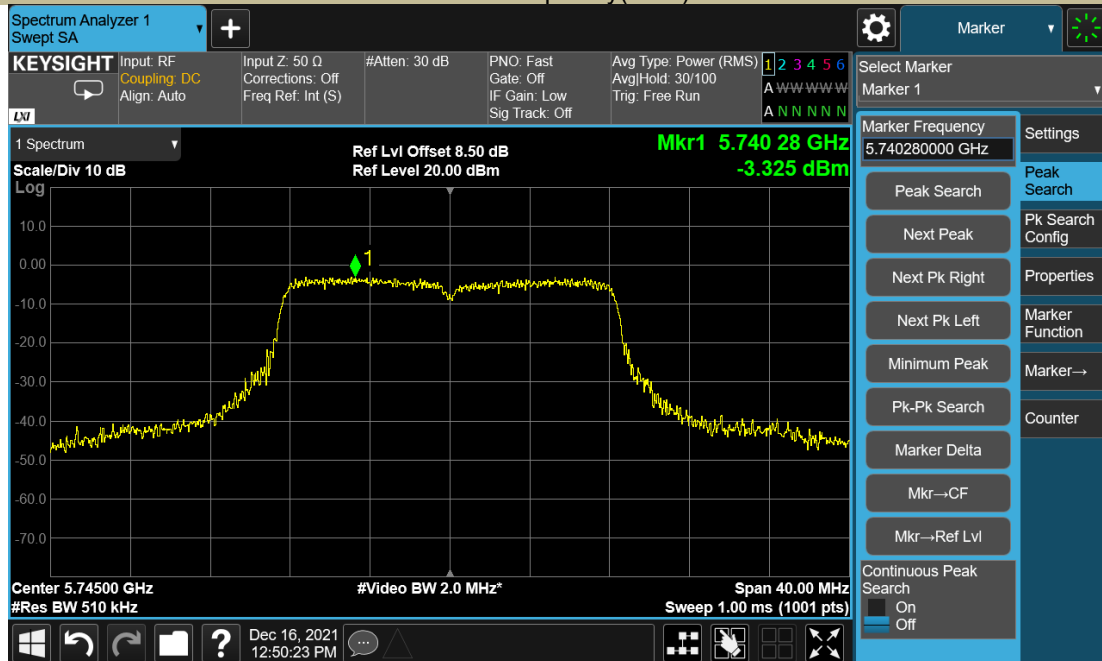


Power Spectral Density U-NII - 3
Test Model 802.11a Frequency(MHz) 5785

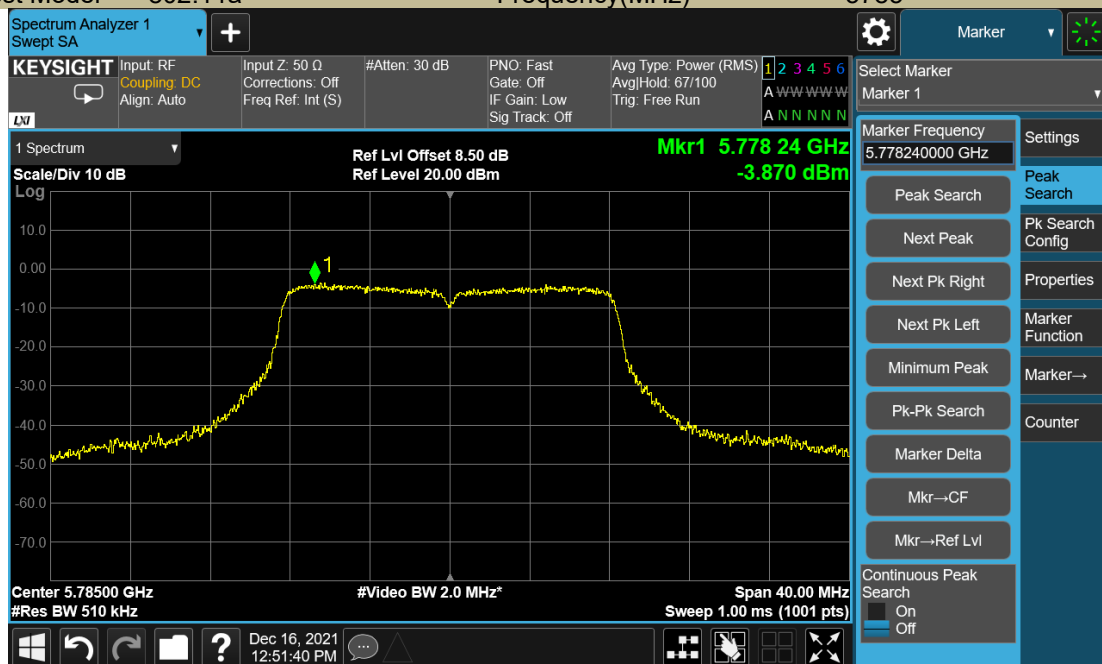


Power Spectral Density U-NII - 3
Test Model 802.11a Frequency(MHz) 5825

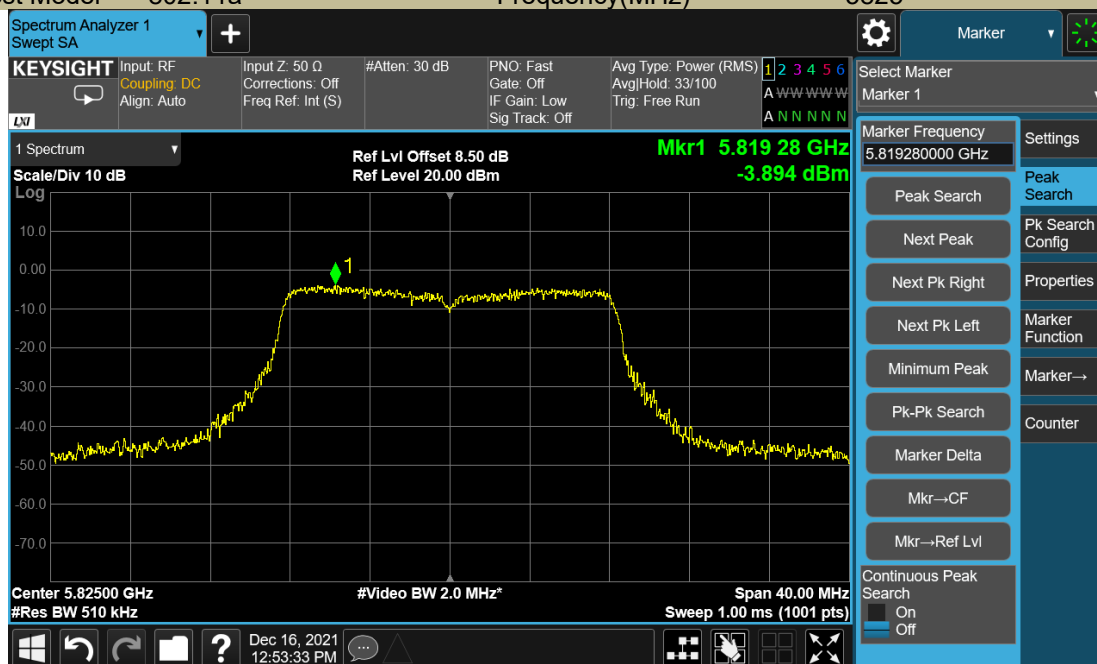


Power Spectral Density U-NII - 3
Test Model 802.11n-HT20 Frequency(MHz) 5745

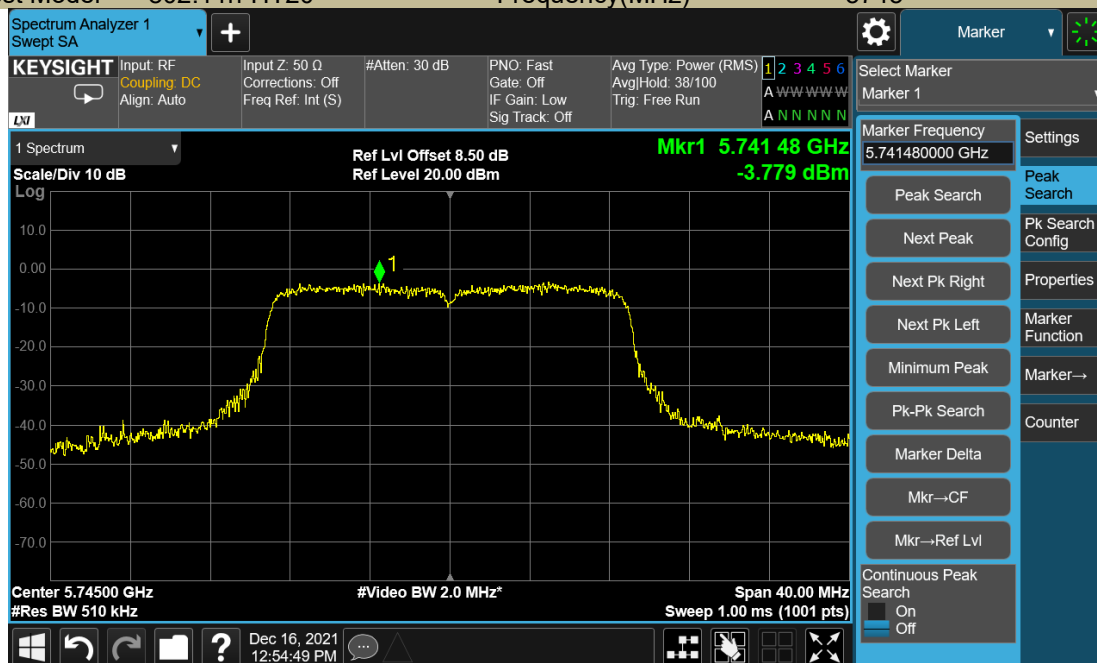


Power Spectral Density U-NII - 3
Test Model 802.11n-HT20 Frequency(MHz) 5785

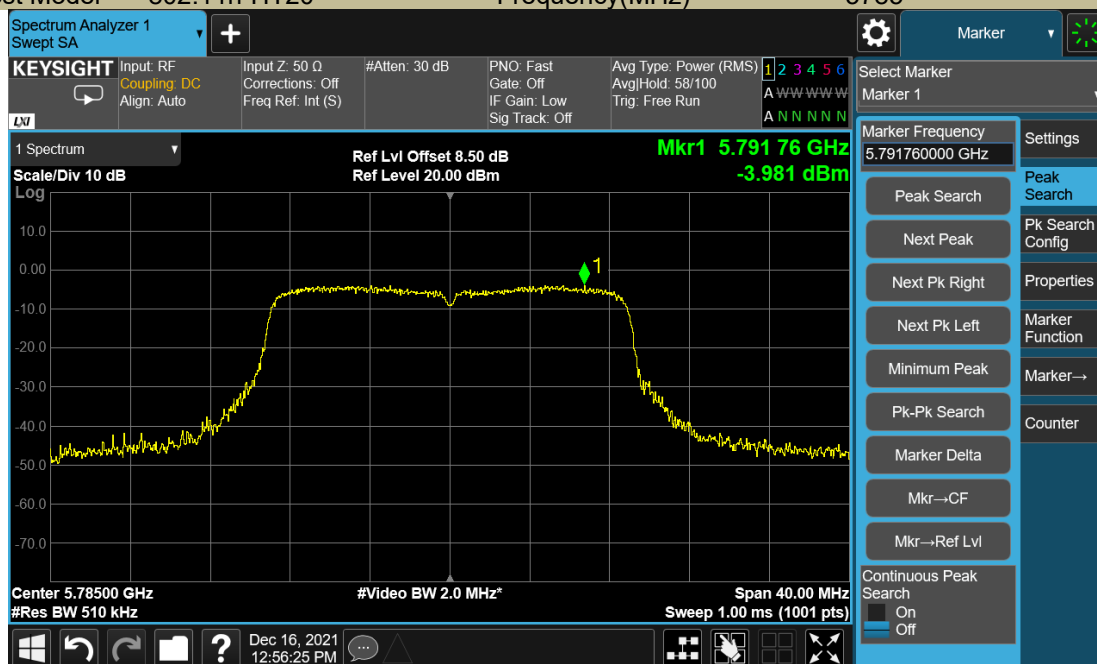


Power Spectral Density U-NII - 3
Test Model 802.11n-HT20 Frequency(MHz) 5825

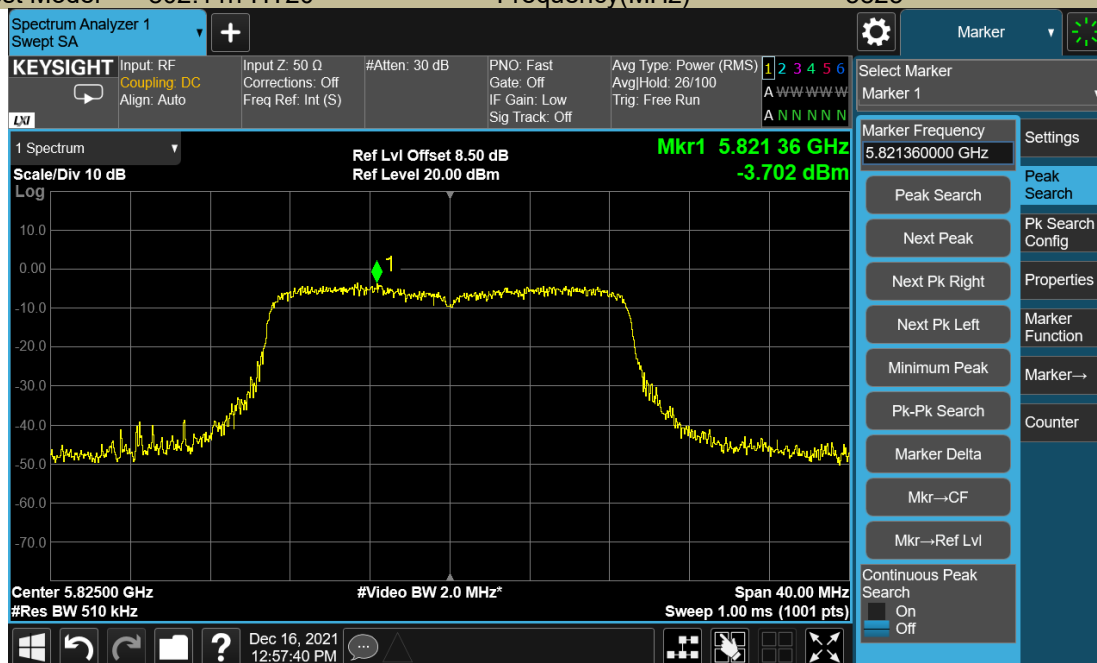


Power Spectral Density U-NII - 3
Test Model 802.11ac(HT20) Frequency(MHz) 5745

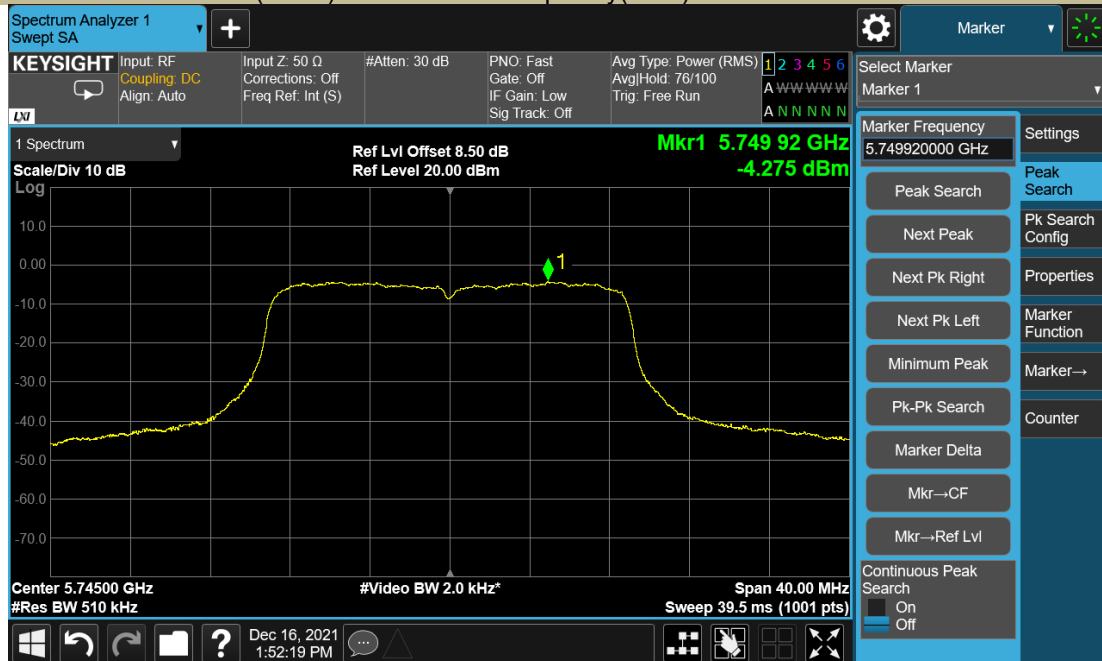


Power Spectral Density U-NII - 3
Test Model 802.11ac(HT20) Frequency(MHz) 5785

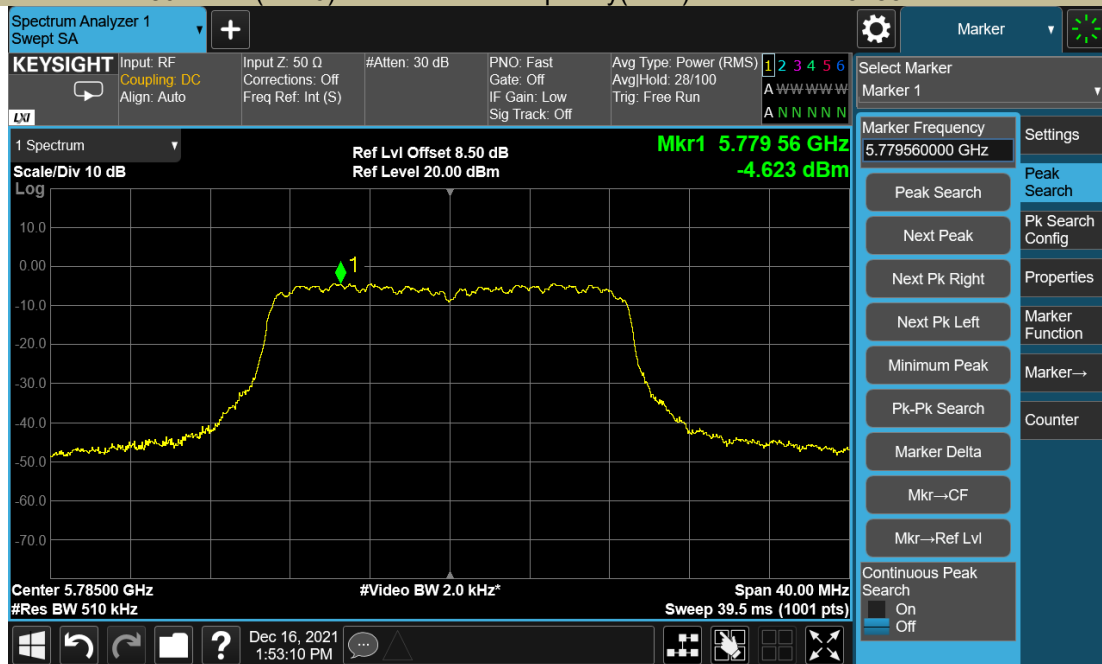


Power Spectral Density U-NII - 3
Test Model 802.11ac(HT20) Frequency(MHz) 5825

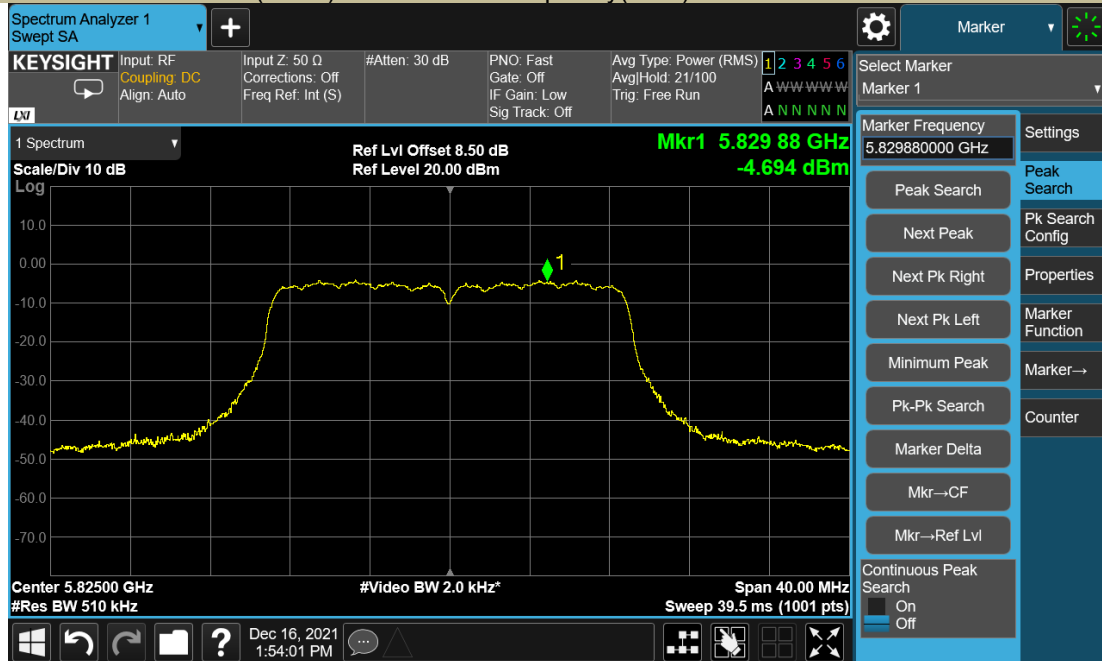


Power Spectral Density U-NII - 3
Test Model 802.11n-HT40 Frequency(MHz) 5755

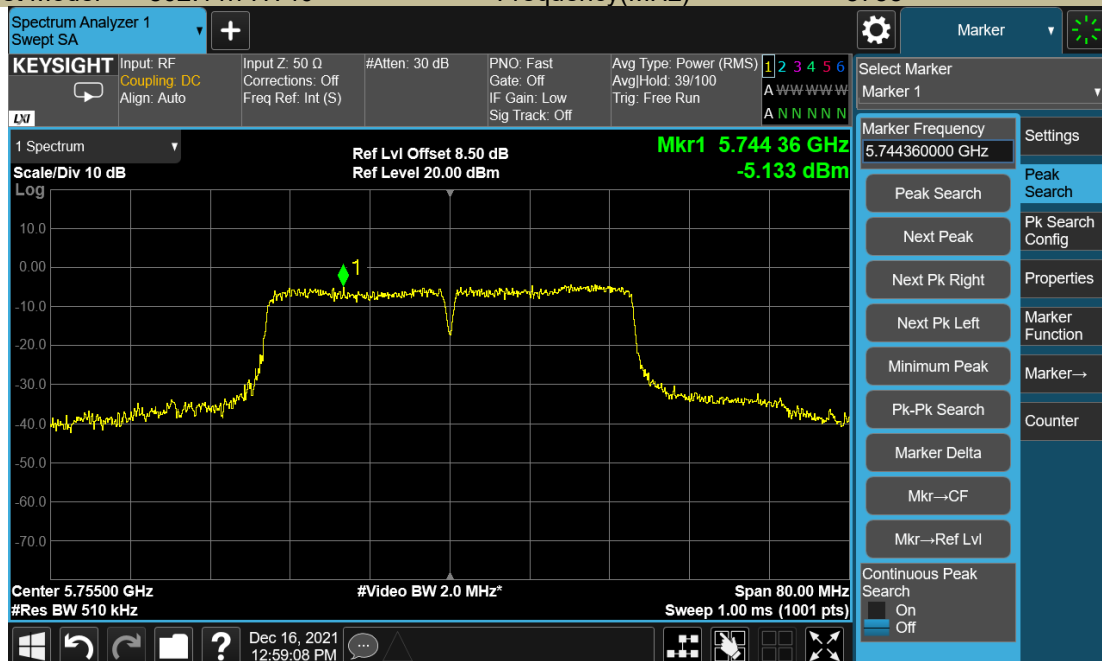


Power Spectral Density U-NII - 3
Test Model 802.11n-HT40 Frequency(MHz) 5795

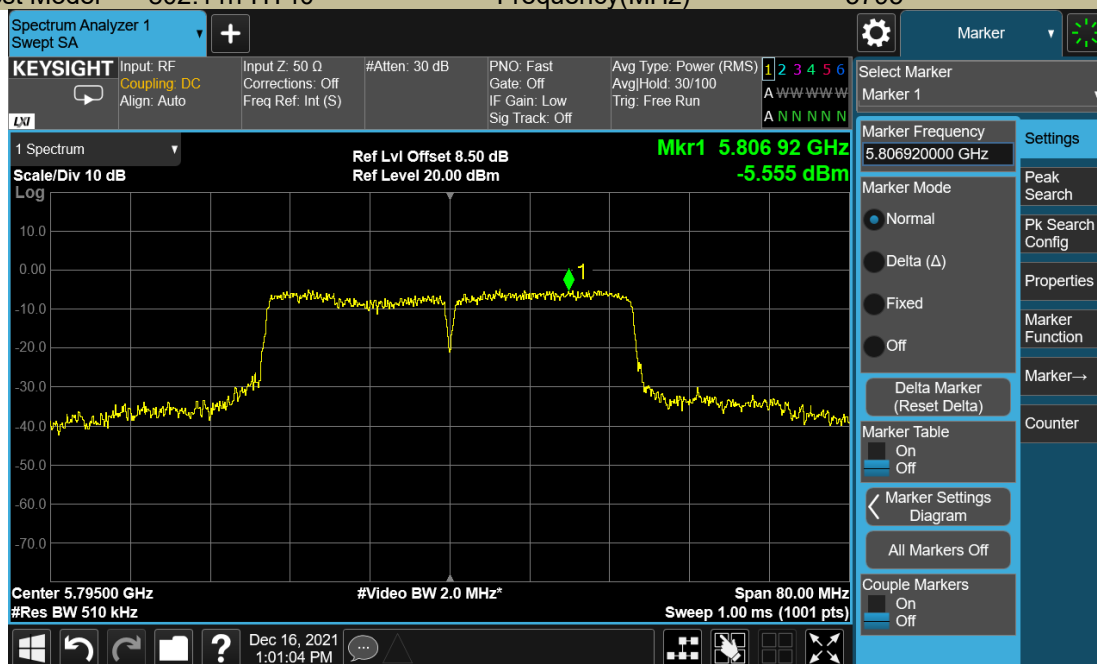


Power Spectral Density U-NII - 3
Test Model 802.11ac(HT40) Frequency(MHz) 5755

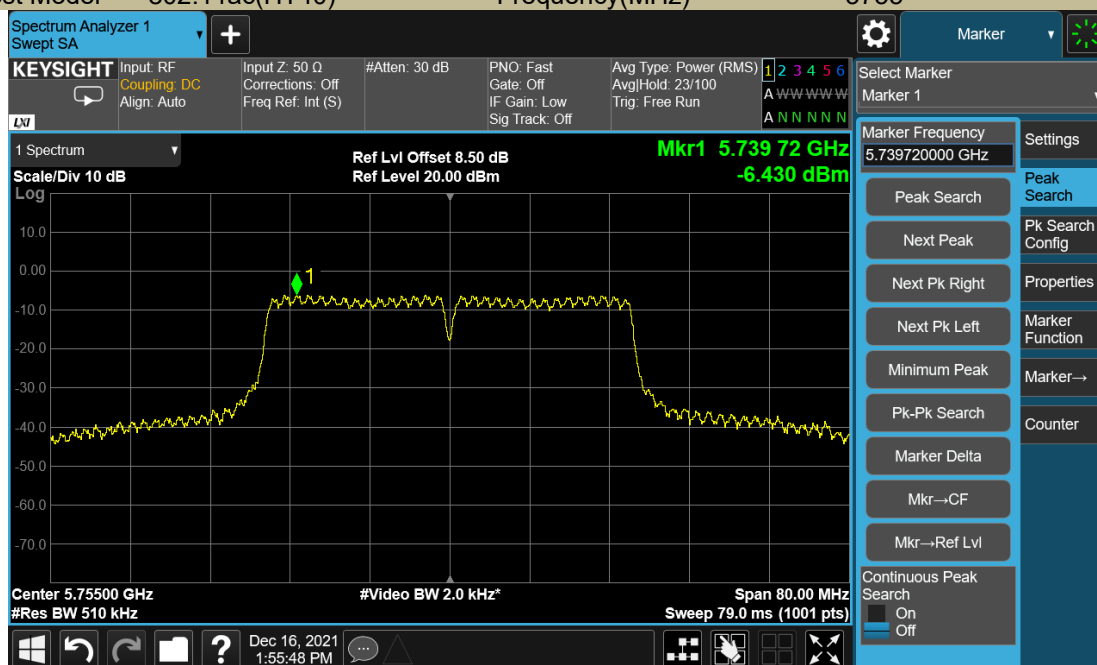

Power Spectral Density U-NII - 3
Test Model 802.11ac(HT40) Frequency(MHz) 5795

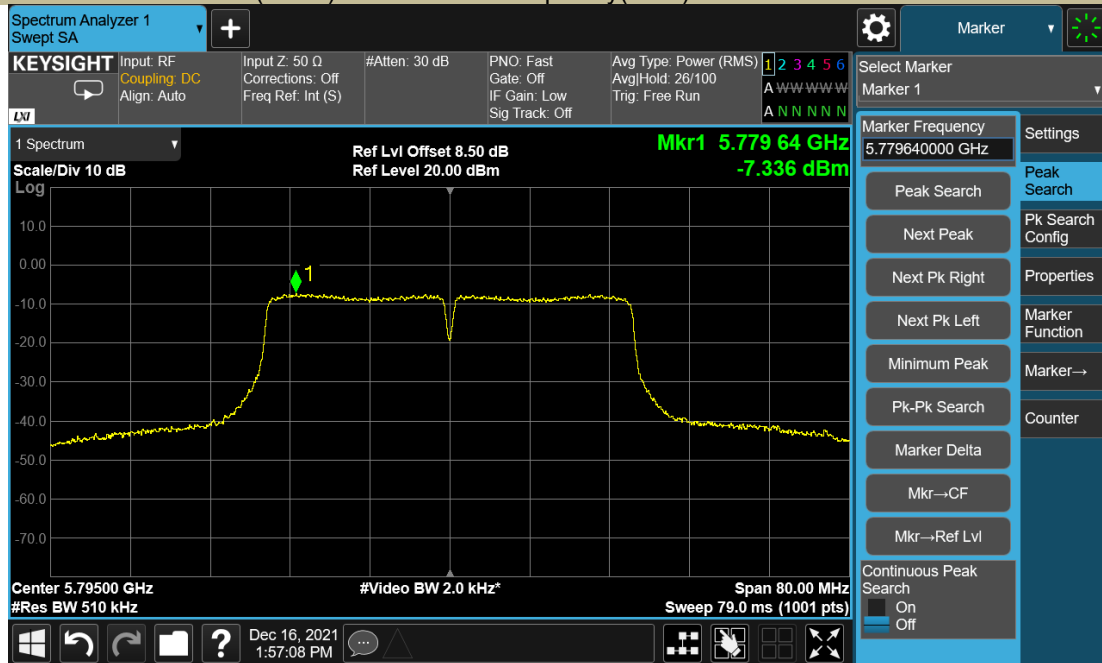

Power Spectral Density U-NII - 3
Test Model 802.11ac 80 Frequency(MHz) 5775

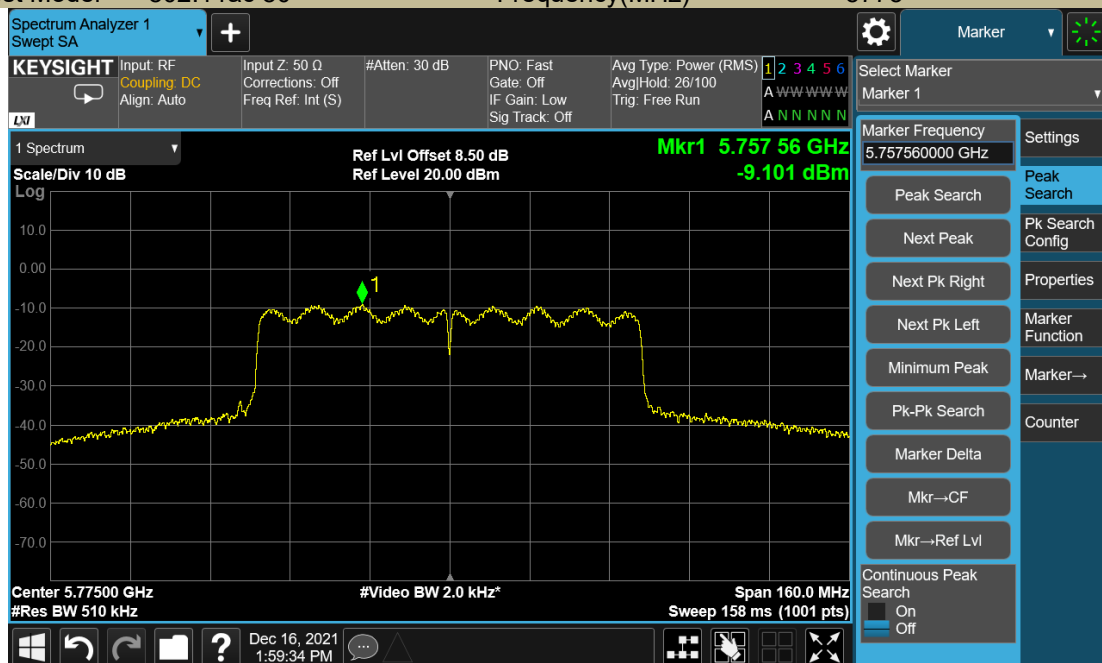

2T2R – Total

5150-5250MHz

Operating mode	Test Channel	Power Spectral Density dBm/MHz			Limit (dBm/MHz)
		Antenna 0	Antenna 1	Total	
802.11n-HT20	5180	1.003	0.559	3.797	11
	5200	1.326	0.054	3.747	11
	5240	1.200	0.221	3.748	11
802.11ac(VHT20)	5180	1.405	0.412	3.947	11
	5200	-0.067	0.714	3.351	11
	5240	0.222	-0.094	3.077	11
802.11n-HT40	5190	-0.055	-0.889	2.558	11
	5230	0.166	-0.908	2.672	11
802.11ac(VHT40)	5190	-2.388	-1.905	0.871	11
	5230	-2.178	-1.998	0.923	11
802.11ac(VHT80)	5210	-3.026	-3.357	-0.178	11

5250-5350MHz

Operating mode	Test Channel	Power Spectral Density dBm/MHz			Limit (dBm/MHz)
		Antenna 0	Antenna 1	Total	
802.11n-HT20	5260	0.012	0.153	3.093	11
	5280	0.924	0.551	3.752	11
	5320	0.252	-0.199	3.043	11
802.11ac(VHT20)	5260	-0.158	-0.077	2.893	11
	5280	1.252	-0.087	3.644	11
	5320	0.292	0.317	3.315	11
802.11n-HT40	5270	-3.049	-0.934	1.146	11
	5310	-0.991	-1.094	1.968	11
802.11ac(VHT40)	5270	-2.515	-2.391	0.558	11
	5310	-0.255	-2.874	1.640	11
802.11ac(VHT80)	5290	-5.095	-4.085	-1.550	11

5470-5725MHz

Operating mode	Test Channel	Power Spectral Density dBm/MHz			Limit (dBm/MHz)
		Antenna 0	Antenna 1	Total	
802.11n-HT20	5500	0.774	0.457	3.629	10.89
	5580	0.928	0.112	3.549	10.89
	5700	-0.847	-1.679	1.767	10.89
802.11ac(VHT20)	5500	1.212	0.019	3.667	10.89
	5580	1.414	0.557	4.017	10.89
	5700	0.026	-1.668	2.271	10.89
802.11n-HT40	5510	-1.065	-0.810	2.075	10.89
	5670	-2.053	-2.372	0.801	10.89
802.11ac(VHT40)	5510	-1.361	-2.398	1.162	10.89
	5670	-4.714	-3.074	-0.807	10.89
802.11ac(VHT80)	5530	-2.287	-3.945	-0.027	10.89

5725-5850MHz

Operating mode	Test Channel	Power Spectral Density dBm/MHz			Limit (dBm/MHz)
		Antenna 0	Antenna 1	Total	
802.11n-HT20	5745	-5.636	-3.779	-1.599	29.76
	5785	-4.943	-3.981	-1.425	29.76
	5825	-5.306	-3.702	-1.420	29.76
802.11ac(VHT20)	5745	-4.266	-4.275	-1.260	29.76
	5785	-4.867	-4.623	-1.733	29.76
	5825	-5.623	-4.694	-2.123	29.76
802.11n-HT40	5755	-8.695	-5.133	-3.548	29.76
	5795	-9.122	-5.555	-3.972	29.76
802.11ac(VHT40)	5755	-7.883	-6.430	-4.086	29.76
	5795	-8.945	-7.336	-5.056	29.76
802.11ac(VHT80)	5775	-12.084	-9.101	-7.331	29.76

8.4 FREQUENCY STABILITY

8.4.1 Applicable Standard

According to FCC Part 15.407(g)
ANSI C63.10 Section 6.8

8.4.2 Conformance Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

8.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.4.4 Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 10 kHz.

Set Span= Entire absence of modulation emissions band

Set the video bandwidth (VBW) =30 kHz. width

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

Beginning at each temperature level specified in user manual , the frequency shall be measured within one minute after application of primary power to the transmitter and at intervals of no more than one minute thereafter until ten minutes have elapsed or until sufficient measurements are obtained to indicate clearly that the frequency has stabilized within the applicable tolerance, whichever time period is greater. During each test, the ambient temperature shall not be allowed to rise more than 10° centigrade above the respective beginning ambient temperature level

Measure and record the results in the test report.

8.4.5 Test Results

802.11a 5180

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5179.989	-11.0	Pass
	-10	5179.990	-9.9	Pass
	0	5179.981	-19.0	Pass
	10	5180.009	8.9	Pass
	20	5179.984	-15.9	Pass
	30	5179.998	-2.5	Pass
	40	5179.981	-18.5	Pass
	55	5180.006	6.2	Pass
85% Vnom	25	5179.995	-4.7	Pass
115% Vnom	25	5180.020	19.8	Pass

5200

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5199.989	-11.0	Pass
	-10	5200.002	1.9	Pass
	0	5199.988	-12.3	Pass
	10	5200.007	6.5	Pass
	20	5199.985	-15.4	Pass
	30	5200.015	14.8	Pass
	40	5199.988	-11.7	Pass
	55	5200.013	13.0	Pass
85% Vnom	25	5199.990	-10.3	Pass
115% Vnom	25	5199.991	-9.5	Pass

5240

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5239.988	-12.0	Pass
	-10	5240.002	2.3	Pass
	0	5239.986	-14.2	Pass
	10	5239.998	-2.3	Pass
	20	5239.987	-13.2	Pass
	30	5240.008	8.1	Pass
	40	5239.988	-12.5	Pass
	55	5240.010	9.7	Pass
85% Vnom	25	5239.988	-11.8	Pass
115% Vnom	25	5240.005	4.9	Pass

5190

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5189.988	-12.0	Pass
	-10	5190.005	5.4	Pass
	0	5189.985	-15.0	Pass
	10	5190.002	2.0	Pass
	20	5189.987	-12.5	Pass
	30	5190.004	4.4	Pass
	40	5189.987	-12.8	Pass
	55	5189.992	-8.0	Pass
85% Vnom	25	5189.988	-11.8	Pass
115% Vnom	25	5190.004	4.3	Pass

5230

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5229.988	-12.0	Pass
	-10	5229.998	-1.6	Pass
	0	5229.987	-12.8	Pass
	10	5229.994	-6.2	Pass
	20	5229.985	-15.2	Pass
	30	5230.009	8.5	Pass
	40	5229.987	-12.6	Pass
	55	5229.998	-1.9	Pass
85% Vnom	25	5229.992	-7.6	Pass
115% Vnom	25	5229.989	-11.4	Pass

5210

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5209.988	-12.0	Pass
	-10	5210.003	3.4	Pass
	0	5209.985	-15.0	Pass
	10	5210.007	6.5	Pass
	20	5209.987	-12.9	Pass
	30	5210.013	13.2	Pass
	40	5209.986	-13.6	Pass
	55	5209.988	-11.8	Pass
85% Vnom	25	5209.992	-8.2	Pass
115% Vnom	25	5210.008	7.6	Pass

802.11a 5260

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5259.988	-12.0	Pass
	-10	5260.001	1.3	Pass
	0	5259.988	-12.5	Pass
	10	5259.989	-11.4	Pass
	20	5259.987	-12.6	Pass
	30	5259.996	-4.4	Pass
	40	5259.988	-12.2	Pass
	55	5260.000	0.4	Pass
85% Vnom	25	5259.992	-7.8	Pass
115% Vnom	25	5259.994	-6.4	Pass

5280

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5279.988	-12.0	Pass
	-10	5279.991	-8.6	Pass
	0	5279.988	-12.3	Pass
	10	5279.998	-1.9	Pass
	20	5279.986	-13.5	Pass
	30	5279.993	-6.5	Pass
	40	5279.988	-12.4	Pass
	55	5279.997	-3.1	Pass
85% Vnom	25	5279.988	-11.7	Pass
115% Vnom	25	5280.002	1.5	Pass

5320

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5319.988	-12.0	Pass
	-10	5319.993	-7.2	Pass
	0	5319.988	-12.1	Pass
	10	5319.989	-10.8	Pass
	20	5319.987	-12.7	Pass
	30	5319.998	-1.6	Pass
	40	5319.987	-12.8	Pass
	55	5319.997	-3.0	Pass
85% Vnom	25	5319.990	-10.0	Pass
115% Vnom	25	5320.006	5.7	Pass

5270

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5269.988	-12.0	Pass
	-10	5269.998	-1.7	Pass
	0	5269.986	-14.2	Pass
	10	5269.988	-11.8	Pass
	20	5269.985	-15.5	Pass
	30	5269.991	-9.2	Pass
	40	5269.985	-14.6	Pass
	55	5269.995	-4.6	Pass
85% Vnom	25	5269.992	-8.4	Pass
115% Vnom	25	5270.004	3.5	Pass

5310

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5309.988	-12.0	Pass
	-10	5310.006	5.9	Pass
	0	5309.985	-14.8	Pass
	10	5310.004	3.7	Pass
	20	5309.987	-12.8	Pass
	30	5309.992	-7.5	Pass
	40	5309.986	-14.3	Pass
	55	5309.995	-5.0	Pass
85% Vnom	25	5309.990	-10.3	Pass
115% Vnom	25	5309.993	-7.4	Pass

5290

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5289.988	-12.0	Pass
	-10	5290.007	6.7	Pass
	0	5289.986	-14.4	Pass
	10	5290.005	4.9	Pass
	20	5289.988	-12.1	Pass
	30	5289.988	-12.0	Pass
	40	5289.985	-14.7	Pass
	55	5290.001	0.9	Pass
85% Vnom	25	5289.990	-9.9	Pass
115% Vnom	25	5290.004	4.2	Pass

802.11a 5500

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5499.988	-12.0	Pass
	-10	5500.005	4.8	Pass
	0	5499.987	-13.4	Pass
	10	5500.001	1.2	Pass
	20	5499.984	-15.6	Pass
	30	5500.015	15.0	Pass
	40	5499.986	-13.7	Pass
	55	5499.999	-0.8	Pass
85% Vnom	25	5499.990	-9.5	Pass
115% Vnom	25	5500.010	9.9	Pass

5580

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5579.988	-12.0	Pass
	-10	5580.003	2.6	Pass
	0	5579.985	-14.9	Pass
	10	5579.991	-8.8	Pass
	20	5579.986	-14.0	Pass
	30	5580.010	9.7	Pass
	40	5579.987	-13.0	Pass
	55	5579.991	-8.7	Pass
85% Vnom	25	5579.992	-8.0	Pass
115% Vnom	25	5579.996	-3.9	Pass

5700

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5699.987	-13.0	Pass
	-10	5699.996	-3.7	Pass
	0	5699.985	-14.9	Pass
	10	5699.989	-10.8	Pass
	20	5699.985	-15.2	Pass
	30	5699.990	-9.5	Pass
	40	5699.986	-13.7	Pass
	55	5699.994	-6.2	Pass
85% Vnom	25	5699.989	-11.2	Pass
115% Vnom	25	5699.999	-1.4	Pass

5510

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5509.988	-12.0	Pass
	-10	5509.994	-6.2	Pass
	0	5509.985	-14.8	Pass
	10	5509.991	-8.7	Pass
	20	5509.987	-13.1	Pass
	30	5510.012	11.6	Pass
	40	5509.986	-14.2	Pass
	55	5510.002	1.6	Pass
85% Vnom	25	5509.992	-8.5	Pass
115% Vnom	25	5509.985	-14.8	Pass

5670

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5669.988	-12.0	Pass
	-10	5669.990	-10.0	Pass
	0	5669.988	-12.1	Pass
	10	5670.003	3.1	Pass
	20	5669.985	-15.1	Pass
	30	5670.005	4.6	Pass
	40	5669.985	-14.5	Pass
	55	5669.989	-11.3	Pass
85% Vnom	25	5669.990	-10.0	Pass
115% Vnom	25	5669.997	-3.5	Pass

5530

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5529.987	-13.0	Pass
	-10	5529.992	-7.5	Pass
	0	5529.985	-14.6	Pass
	10	5530.007	6.8	Pass
	20	5529.987	-13.3	Pass
	30	5530.001	1.4	Pass
	40	5529.985	-14.7	Pass
	55	5529.997	-3.3	Pass
85% Vnom	25	5529.988	-11.8	Pass
115% Vnom	25	5529.999	-1.1	Pass

802.11a

5745

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5744.987	-13.0	Pass
	-10	5744.996	-4.1	Pass
	0	5744.985	-15.0	Pass
	10	5745.005	4.7	Pass
	20	5744.987	-13.4	Pass
	30	5744.989	-10.8	Pass
	40	5744.987	-13.4	Pass
	55	5745.001	0.6	Pass
85% Vnom	25	5744.988	-11.6	Pass
115% Vnom	25	5745.007	7.0	Pass

5785

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5784.988	-12.0	Pass
	-10	5784.993	-7.3	Pass
	0	5784.986	-14.4	Pass
	10	5784.996	-3.9	Pass
	20	5784.985	-15.1	Pass
	30	5784.995	-4.8	Pass
	40	5784.987	-12.5	Pass
	55	5785.002	2.4	Pass
85% Vnom	25	5784.988	-11.7	Pass
115% Vnom	25	5785.004	4.4	Pass

5825

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5824.987	-13.0	Pass
	-10	5824.989	-11.4	Pass
	0	5824.986	-13.6	Pass
	10	5825.004	4.3	Pass
	20	5824.984	-15.6	Pass
	30	5824.989	-11.4	Pass
	40	5824.987	-13.0	Pass
	55	5824.988	-11.5	Pass
85% Vnom	25	5824.990	-10.1	Pass
115% Vnom	25	5825.004	4.3	Pass

5755

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5754.989	-11.0	Pass
	-10	5755.002	2.2	Pass
	0	5754.989	-11.4	Pass
	10	5755.003	2.6	Pass
	20	5754.988	-11.5	Pass
	30	5754.994	-5.9	Pass
	40	5754.987	-12.5	Pass
	55	5754.993	-6.5	Pass
85% Vnom	25	5754.990	-9.9	Pass
115% Vnom	25	5754.994	-5.8	Pass

5795

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5794.987	-13.0	Pass
	-10	5795.004	3.8	Pass
	0	5794.985	-15.2	Pass
	10	5794.995	-5.0	Pass
	20	5794.987	-13.2	Pass
	30	5795.010	10.4	Pass
	40	5794.987	-13.4	Pass
	55	5794.999	-0.7	Pass
85% Vnom	25	5794.988	-12.5	Pass
115% Vnom	25	5794.999	-0.8	Pass

5775

Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5774.987	-13.0	Pass
	-10	5775.004	4.1	Pass
	0	5774.987	-13.3	Pass
	10	5774.991	-8.8	Pass
	20	5774.985	-15.5	Pass
	30	5775.010	9.7	Pass
	40	5774.986	-14.1	Pass
	55	5774.993	-6.8	Pass
85% Vnom	25	5774.991	-9.1	Pass
115% Vnom	25	5774.992	-7.6	Pass

8.5 UNDESIRABLE RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.407 (b)

According to 789033 D02 Section II(G)

8.5.2 Conformance Limit

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	2400/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

- Remark:
1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

8.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

8.5.4 Test Procedure

■ Unwanted Emissions Measurements below 1000 MHz

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

The EUT was placed on a turn table which is 0.8m above ground plane.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until all frequency measured was complete.

We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes have been tested and the worst result was reported.

Use the following spectrum analyzer settings:

Set RBW=120kHz for $f < 1$ GHz(30MHz to 1GHz), 200Hz for $f < 150$ KHz(9KHz to 150KHz), 9KHz for < 30 MHz (150KHz to 30KHz).

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

■ Unwanted Maximum peak Emissions Measurements above 1000 MHz

Maximum emission levels are measured by setting the analyzer as follows:

RBW = 1 MHz.

VBW $\geq$ 3 MHz.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

■ Unwanted Average Emissions Measurements above 1000 MHz

Method VB (Averaging using reduced video bandwidth): Alternative method.

RBW = 1 MHz.

Video bandwidth. • If the EUT is configured to transmit with duty cycle $\geq$ 98 percent, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.

• If the EUT duty cycle is < 98 percent, set $VBW \geq 1/T$, where T is defined in section II.B.1.a).

Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).

• As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged.)

■ Band edge measurements.

Unwanted band-edge emissions may be measured using either of the special band-edge measurement techniques (the marker-delta or integration methods) described below. Note that the marker-delta method is primarily a radiated measurement technique that requires the 99% occupied bandwidth edge to be within 2 MHz of the authorized band edge, whereas the integration method can be used in either a radiated or conducted measurement without any special requirement with regards to the displacement of the unwanted emission(s) relative to the authorized bandwidth.

Marker-Delta Method.

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

8.5.5 Test Results

The voltage 120V & 240V and the modes 802.11a/n/ac has been tested and the worst result recorded as below

- ☒ For Undesirable radiated Spurious Emission in U-NII – 1
All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:
: ☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Test mode: 802.11a Frequency(MHz): 5180

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5738.683	V	46.44	-48.79	-27	-21.8
12079.38	V	55.29	-39.94	-27	-12.9
17979.20	V	64.19	-31.04	-27	-4.0
5520.667	H	46.32	-48.91	-27	-21.9
10926.64	H	53.45	-41.78	-27	-14.8
17942.86	H	64.77	-30.46	-27	-3.5

Test mode: 802.11a Frequency(MHz): 5200

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
6097.797	V	46.42	-48.81	-27	-21.8
12082.87	V	56.65	-38.58	-27	-11.6
17922.12	V	64.05	-31.18	-27	-4.2
4966.479	H	45.47	-49.76	-27	-22.8
10891.96	H	55.19	-40.04	-27	-13.0
18000.00	H	65.27	-29.96	-27	-3.0

Test mode: 802.11a Frequency(MHz): 5240

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5538.248	V	47.27	-47.96	-27	-21.0
9909.660	V	53.88	-41.35	-27	-14.4
17927.31	V	64.44	-30.79	-27	-3.8
5580.024	H	45.99	-49.24	-27	-22.2
9213.526	H	51.94	-43.29	-27	-16.3
17937.67	H	63.88	-31.35	-27	-4.4

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
d is the measurement distance in 3 meters

Frequency: 5180

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5738.683	V	46.44	30.01	74	54	-27.56	-23.99
12079.38	V	55.29	38.55	74	54	-18.71	-15.45
17979.20	V	64.19	47.43	74	54	-9.81	-6.57
5520.667	H	46.32	29.86	74	54	-27.68	-24.14
10926.64	H	53.45	35.22	74	54	-20.55	-18.78
17942.86	H	64.77	48.26	74	54	-9.23	-5.74

Frequency: 5200

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
6097.797	V	46.42	29.77	74	54	-27.58	-24.23
12082.87	V	56.65	39.55	74	54	-17.35	-14.45
17922.12	V	64.05	47.53	74	54	-9.95	-6.47
4966.479	H	45.47	28.25	74	54	-28.53	-25.75
10891.96	H	55.19	38.44	74	54	-18.81	-15.56
18000.00	H	65.27	47.59	74	54	-8.73	-6.41

Frequency: 5240

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5538.248	V	47.27	30.19	74	54	-26.73	-23.81
9909.660	V	53.88	35.71	74	54	-20.12	-18.29
17927.31	V	64.44	47.93	74	54	-9.56	-6.07
5580.024	H	45.99	29.34	74	54	-28.01	-24.66
9213.526	H	51.94	33.89	74	54	-22.06	-20.11
17937.67	H	63.88	45.33	74	54	-10.12	-8.67

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4)Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11a Frequency(MHz): 5180

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5141.453	H	58.12	-37.11	-27	Pass
5134.075	V	57.91	-37.32	-27	Pass

Test mode: 802.11a Frequency(MHz): 5240

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5358.734	H	59.07	-36.16	-27	Pass
5359.796	V	59.77	-35.46	-27	Pass

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 (3) Correct Factor= Ant_F + Cab_L - Preamp
 (4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters



Test mode: 802.11a Frequency(MHz): 5180

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
5141.453	H	58.12	74	-15.88	41.29	54	-12.71
5134.075	V	57.91	74	-16.09	40.53	54	-13.47

Test mode: 802.11a Frequency(MHz): 5240


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
5358.734	H	59.07	74	-14.93	42.69	54	-11.31
5359.796	V	59.77	74	-14.23	41.88	54	-12.12

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 (3) Correct Factor= Ant_F + Cab_L - Preamp
 (4) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

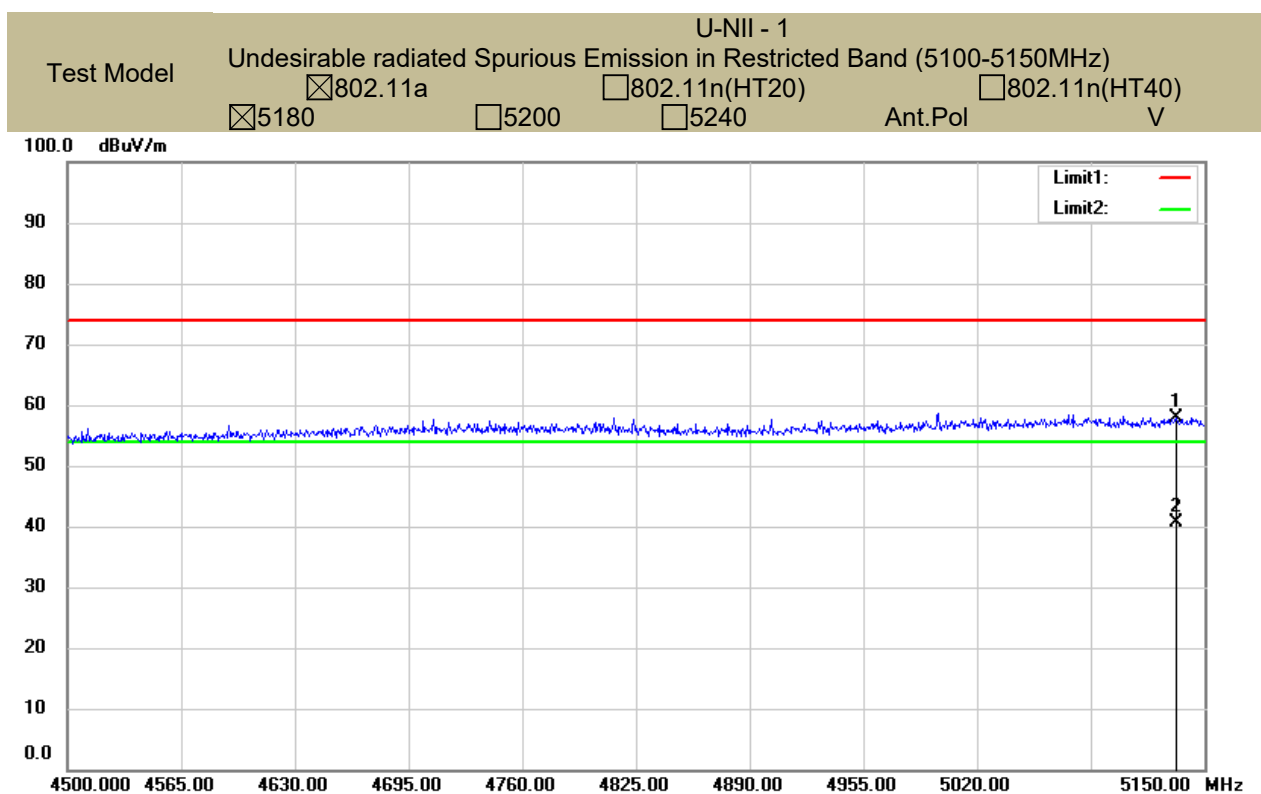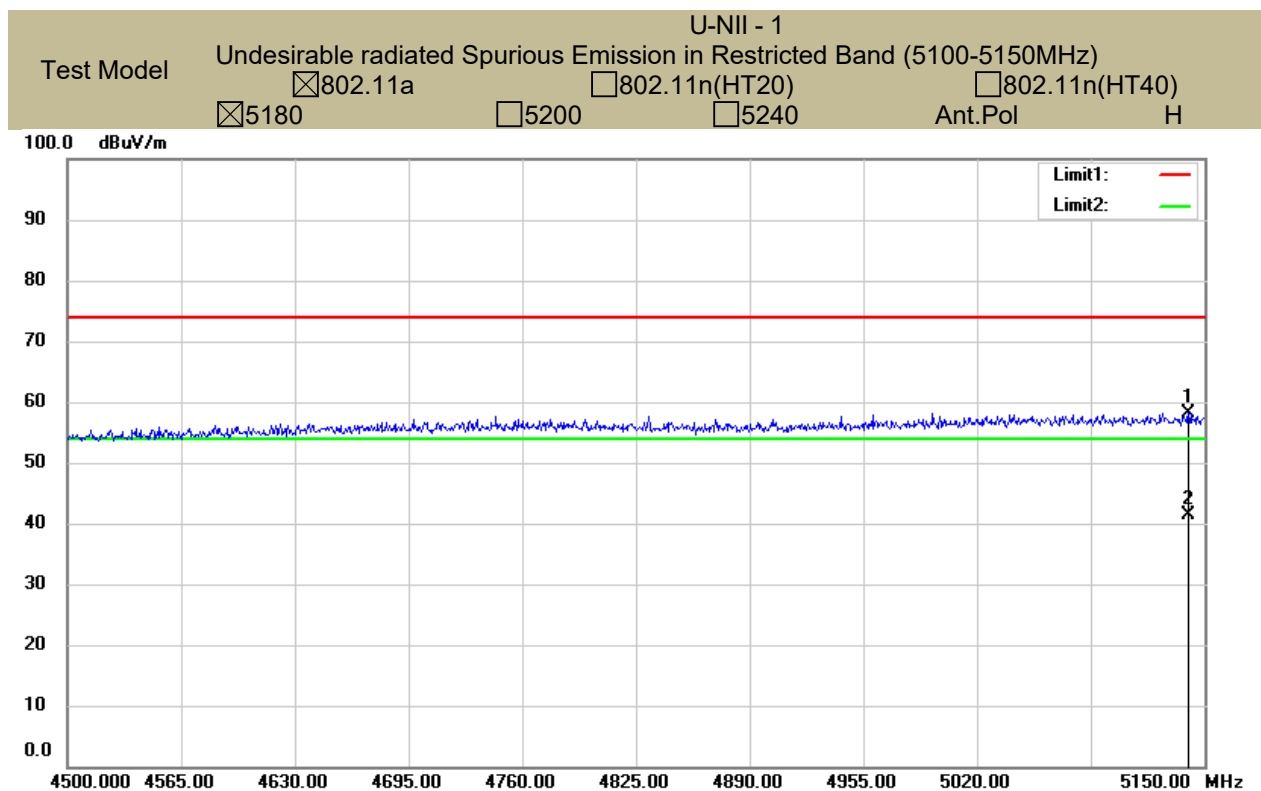


U-NII - 1

Test Model	Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)				
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)		
	☐ 5180	☐ 5200	☒ 5240	Ant.Pol	H

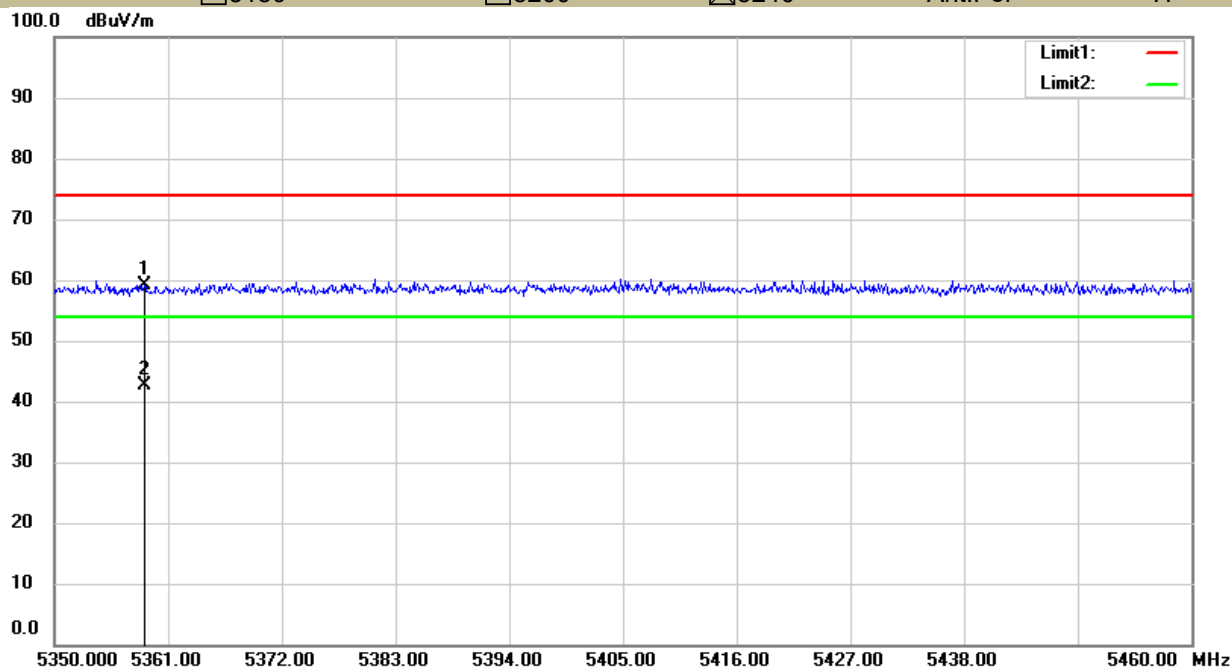

U-NII - 1

Test Model	Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)				
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)		
	☐ 5180	☐ 5200	☒ 5240	Ant.Pol	V

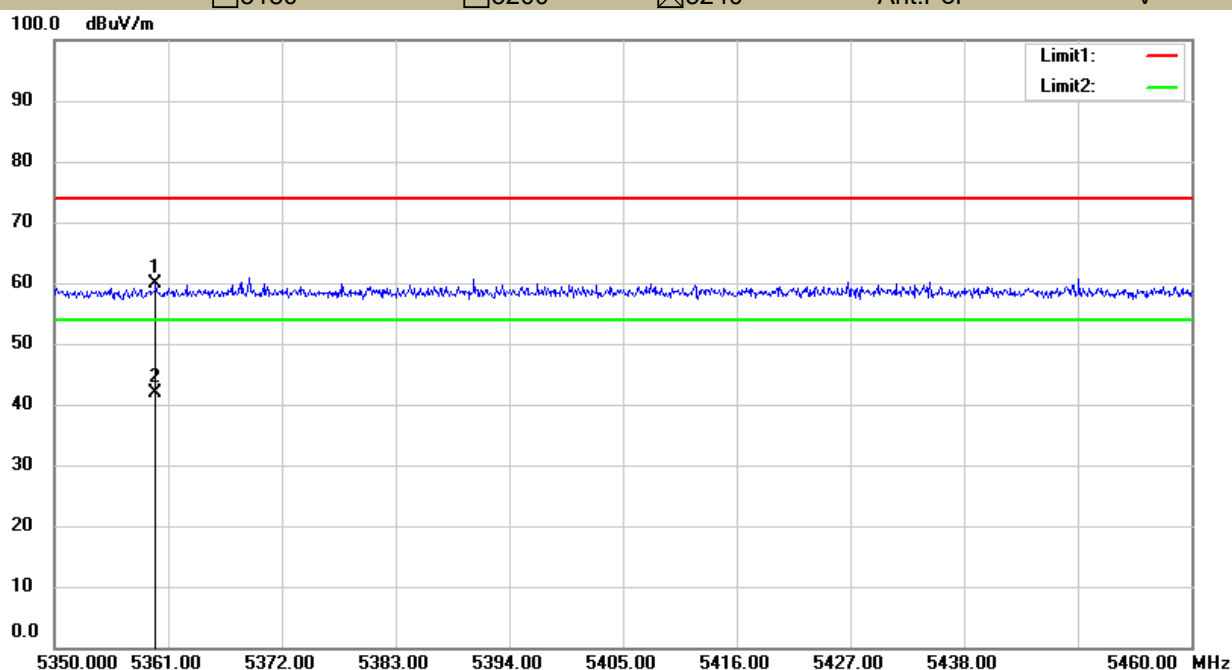

- ☒ For Undesirable radiated Spurious Emission in U-NII -2A
All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:
: ☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Test mode:		802.11a		Frequency(MHz):		5260	
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)		
5531.848	V	46.19	-49.04	-27	-22.0		
9192.246	V	51.95	-43.28	-27	-16.3		
18000.00	V	64.68	-30.55	-27	-3.6		
6541.481	H	46.99	-48.24	-27	-21.2		
11230.83	H	55.84	-39.39	-27	-12.4		
17984.39	H	64	-31.23	-27	-4.2		

Test mode:		802.11a		Frequency(MHz):		5280	
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)		
5539.849	V	47.14	-48.09	-27	-21.1		
9283.026	V	53.32	-41.91	-27	-14.9		
17922.12	V	63.86	-31.37	-27	-4.4		
5520.667	H	46.69	-48.54	-27	-21.5		
11617.12	H	55.81	-39.42	-27	-12.4		
17927.31	H	64.11	-31.12	-27	-4.1		

Test mode:		802.11a		Frequency(MHz):		5320	
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)		
7657.525	V	53.02	-42.21	-27	-15.2		
12079.38	V	56.41	-38.82	-27	-11.8		
18000.00	V	63.91	-31.32	-27	-4.3		
5530.250	H	46.04	-49.19	-27	-22.2		
12110.85	H	56.15	-39.08	-27	-12.1		
17916.94	H	63.99	-31.24	-27	-4.2		

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
d is the measurement distance in 3 meters

Frequency: 802.11a				Frequency(MHz): 5260			
Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5531.848	V	46.19	28.43	74	54	-27.81	-25.57
9192.246	V	51.95	33.85	74	54	-22.05	-20.15
18000.00	V	64.68	49.22	74	54	-9.32	-4.78
6541.481	H	46.99	28.66	74	54	-27.01	-25.34
11230.83	H	55.84	38.34	74	54	-18.16	-15.66
17984.39	H	64.00	48.69	74	54	-10.00	-5.31

Frequency: 802.11a				Frequency(MHz): 5280			
Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5539.849	V	47.14	30.05	74	54	-26.86	-23.95
9283.026	V	53.32	35.24	74	54	-20.68	-18.76
17922.12	V	63.86	45.13	74	54	-10.14	-8.87
5520.667	H	46.69	29.43	74	54	-27.31	-24.57
11617.12	H	55.81	38.54	74	54	-18.19	-15.46
17927.31	H	64.11	48.21	74	54	-9.89	-5.79

Frequency: 802.11a				Frequency(MHz): 5320			
Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
7657.525	V	53.02	35.66	74	54	-20.98	-18.34
12079.38	V	56.41	38.33	74	54	-17.59	-15.67
18000.00	V	63.91	45.29	74	54	-10.09	-8.71
5530.250	H	46.04	27.99	74	54	-27.96	-26.01
12110.85	H	56.15	38.13	74	54	-17.85	-15.87
17916.94	H	63.99	45.26	74	54	-10.01	-8.74

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

(3) Correct Factor= Ant_F + Cab_L - Preamp

(4)Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11a Frequency(MHz): 5260

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5137.455	H	58.49	-36.74	-27	Pass
5101.575	V	58.94	-36.29	-27	Pass

Test mode: 802.11a Frequency(MHz): 5320

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5358.641	H	61.19	-34.04	-27	Pass
5354.153	V	59.67	-35.56	-27	Pass

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
d is the measurement distance in 3 meters

Test mode: 802.11a Frequency(MHz): 5260


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
5137.455	H	58.49	74	-15.51	42.73	54	-11.27
5101.575	V	58.94	74	-15.06	41.26	54	-12.74

Test mode: 802.11a Frequency(MHz): 5320


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
5358.641	H	61.19	74	-12.81	43.29	54	-10.71
5354.153	V	59.67	74	-14.33	42.13	54	-11.87



Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

U-NII -2A					
Test Model	Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)				
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11 ac (VHT20)	Ant.Pol	
	☒ 5260	☐ 5300	☐ 5320	H	

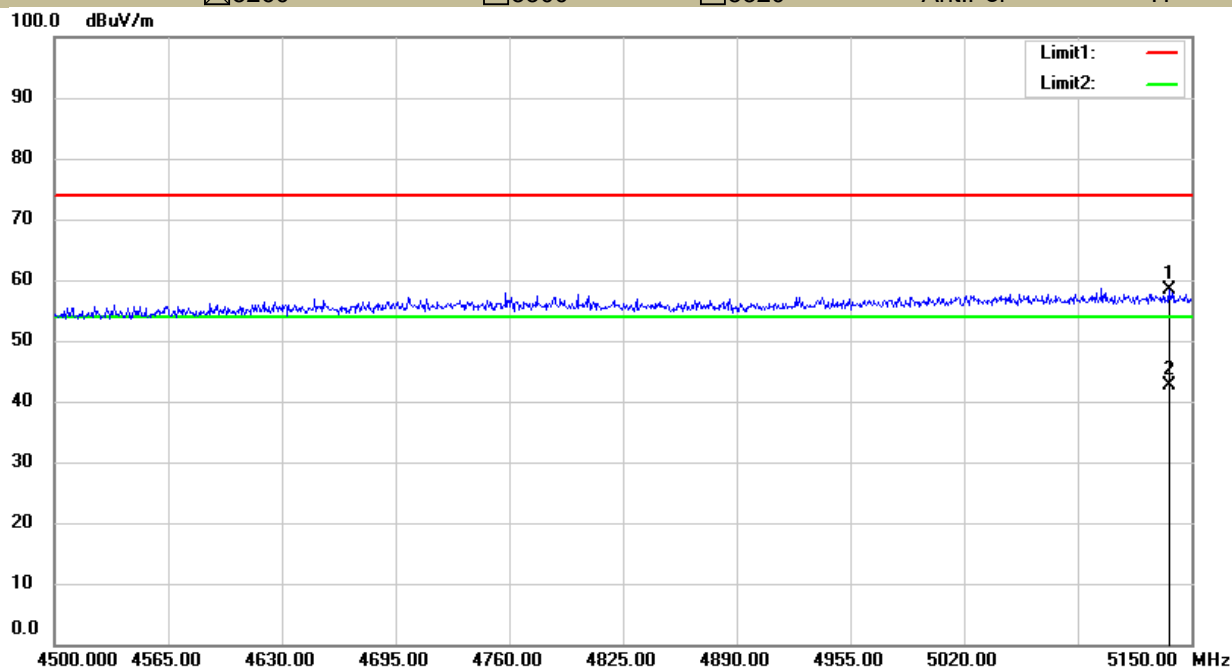

U-NII -2A					
Test Model	Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)				
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11 ac (VHT20)	Ant.Pol	
	☒ 5260	☐ 5300	☐ 5320	V	

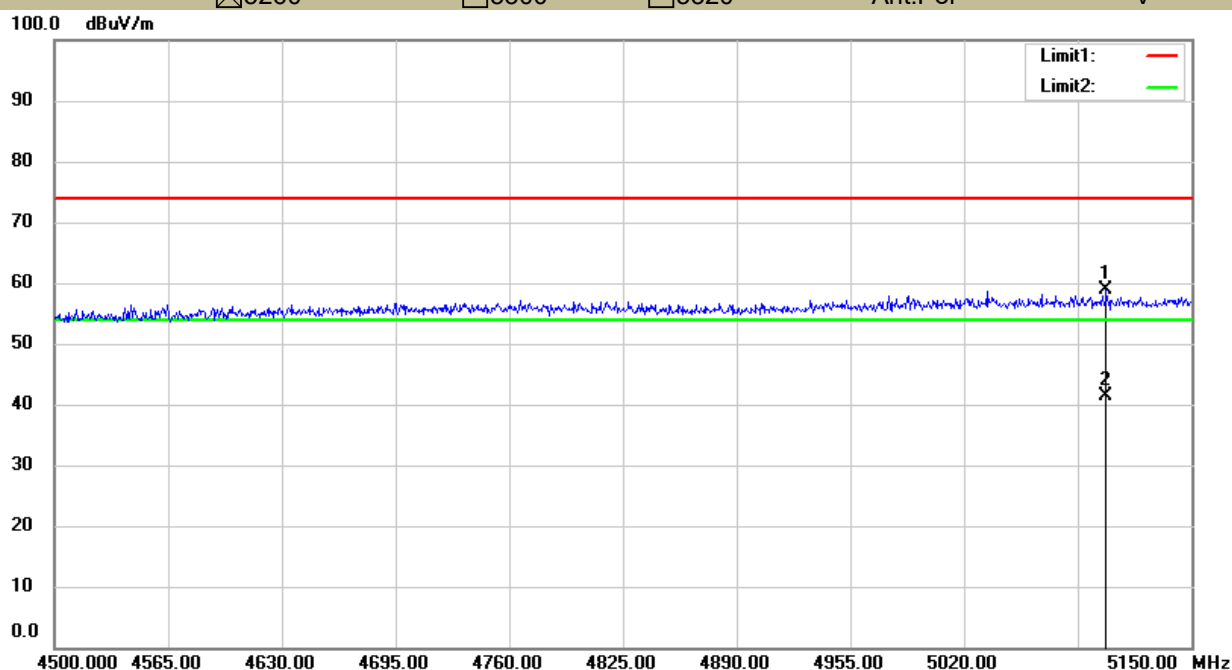

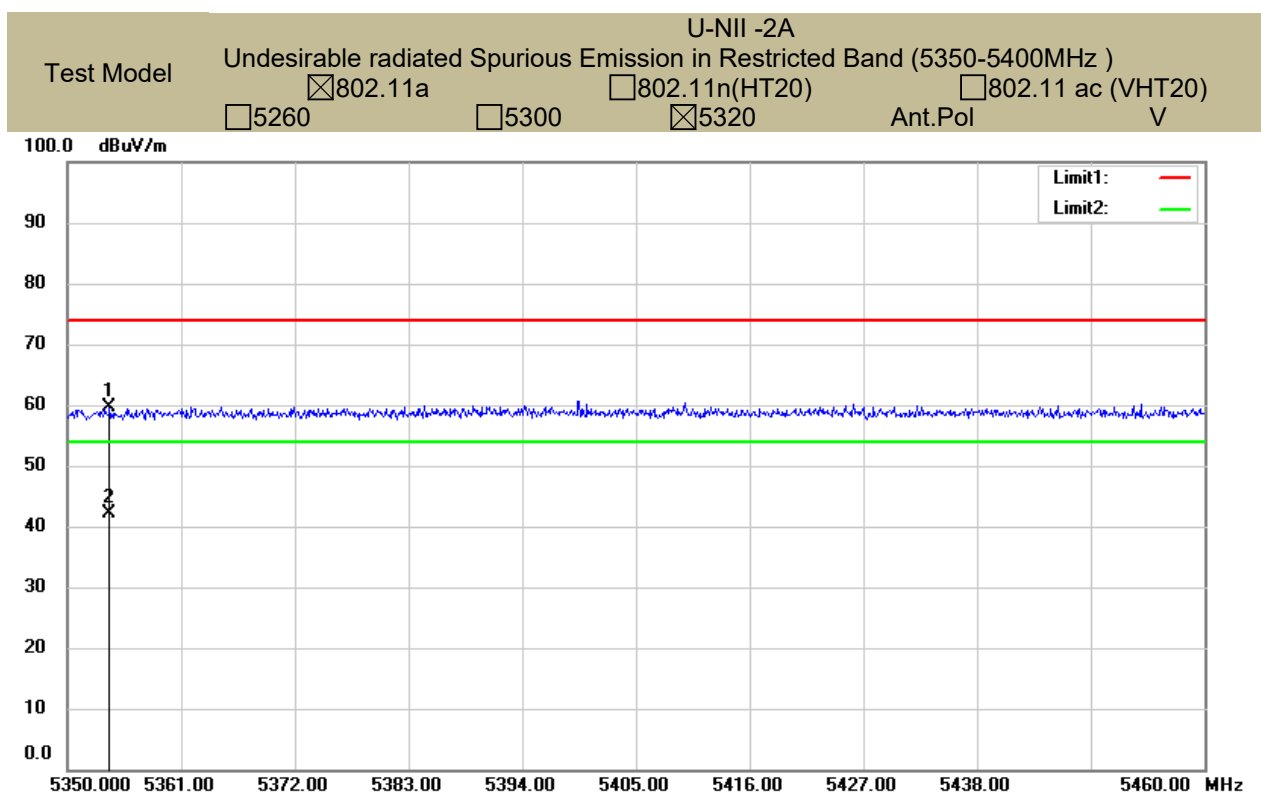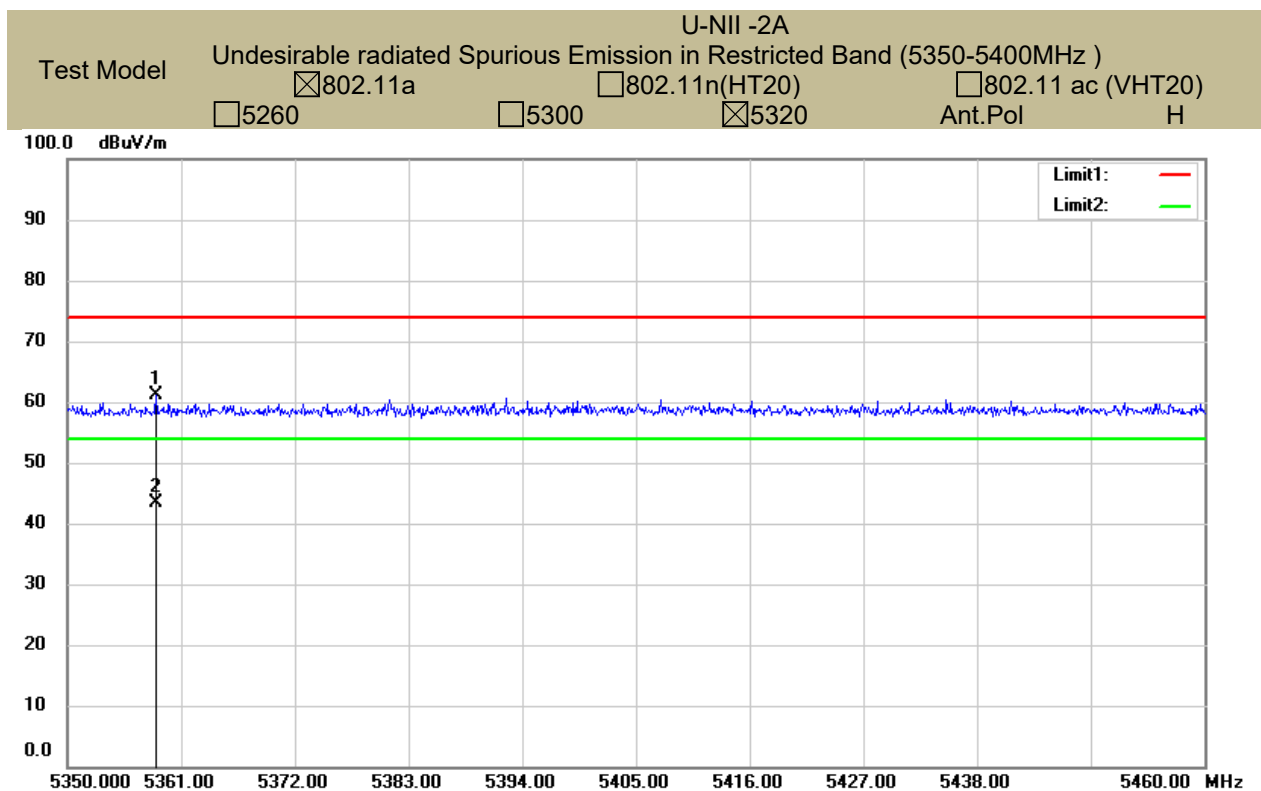

- ☒ For Undesirable radiated Spurious Emission in U-NII -2C
All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:
: ☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Test mode: 802.11a Frequency(MHz): 5500

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5535.047	V	46.39	-48.84	-27	-21.8
11536.81	V	55.70	-39.53	-27	-12.5
18000.00	V	64.06	-31.17	-27	-4.2
7611.186	H	52.81	-42.42	-27	-15.4
11500.19	H	56.35	-38.88	-27	-11.9
17911.77	H	63.56	-31.67	-27	-4.7

Test mode: 802.11a Frequency(MHz): 5580

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5538.248	V	46.53	-48.70	-27	-21.7
12163.47	V	55.75	-39.48	-27	-12.5
17922.12	V	63.99	-31.24	-27	-4.2
5091.479	H	46.43	-48.80	-27	-21.8
11600.35	H	55.44	-39.79	-27	-12.8
18000.00	H	64.32	-30.91	-27	-3.9

Test mode: 802.11a Frequency(MHz): 5700

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5103.266	V	45.20	-50.03	-27	-23.0
9152.479	V	52.41	-42.82	-27	-15.8
18000.00	V	64.19	-31.04	-27	-4.0
5766.950	H	46.79	-48.44	-27	-21.4
12163.47	H	57.42	-37.81	-27	-10.8
18000.00	H	64.52	-30.71	-27	-3.7

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
d is the measurement distance in 3 meters

Frequency: 802.11a				Frequency(MHz): 5500			
Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5535.047	V	46.39	29.78	74	54	-27.61	-24.22
11536.81	V	55.70	38.52	74	54	-18.30	-15.48
18000.00	V	64.06	48.23	74	54	-9.94	-5.77
7611.186	H	52.81	34.55	74	54	-21.19	-19.45
11500.19	H	56.35	38.41	74	54	-17.65	-15.59
17911.77	H	63.56	45.23	74	54	-10.44	-8.77

Frequency: 802.11a				Frequency(MHz): 5580			
Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5538.248	V	46.53	29.73	74	54	-27.47	-24.27
12163.47	V	55.75	38.64	74	54	-18.25	-15.36
17922.12	V	63.99	45.25	74	54	-10.01	-8.75
5091.479	H	46.43	29.92	74	54	-27.57	-24.08
11600.35	H	55.44	38.43	74	54	-18.56	-15.57
18000.00	H	64.32	48.33	74	54	-9.68	-5.67

Frequency: 802.11a				Frequency(MHz): 5700			
Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5103.266	V	45.20	29.08	74	54	-28.80	-24.92
9152.479	V	52.41	34.12	74	54	-21.59	-19.88
18000.00	V	64.19	47.26	74	54	-9.81	-6.74
5766.950	H	46.79	29.89	74	54	-27.21	-24.11
12163.47	H	57.42	40.16	74	54	-16.58	-13.84
18000.00	H	64.52	47.58	74	54	-9.48	-6.42

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11a Frequency(MHz): 5500

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5469.315	H	59.74	-35.49	-27	Pass
5469.898	V	59.64	-35.59	-27	Pass

Test mode: 802.11a Frequency(MHz): 5700

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5727.052	H	59.45	-35.78	-27	Pass
5725.730	V	58.75	-36.48	-27	Pass

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
d is the measurement distance in 3 meters



Test mode: 802.11a Frequency(MHz): 5500

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
5469.315	H	59.74	74	-14.26	43.80	54	-10.20
5469.898	V	59.64	74	-14.36	42.50	54	-11.50


Test mode: 802.11a Frequency(MHz): 5700

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
5727.052	H	59.45	74	-14.55	42.80	54	-11.20
5725.730	V	58.75	74	-15.25	43.60	54	-10.40


Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

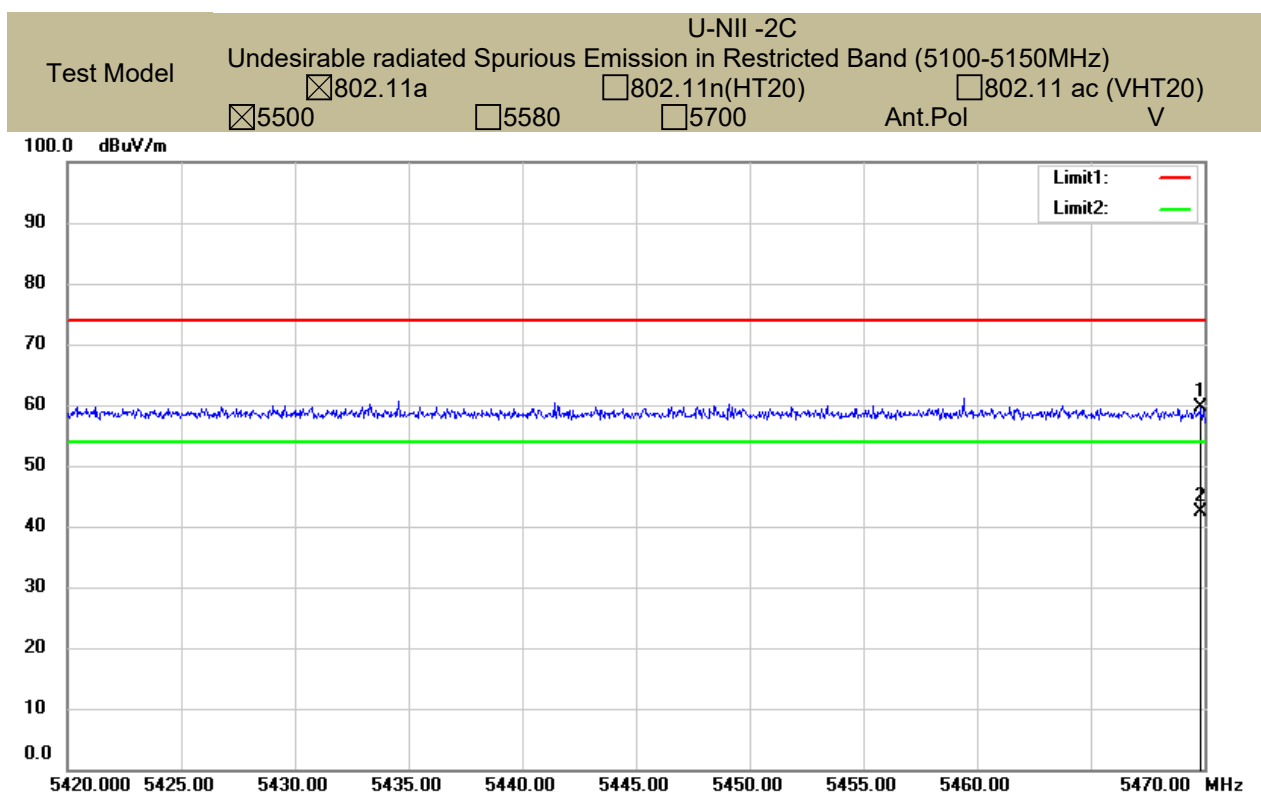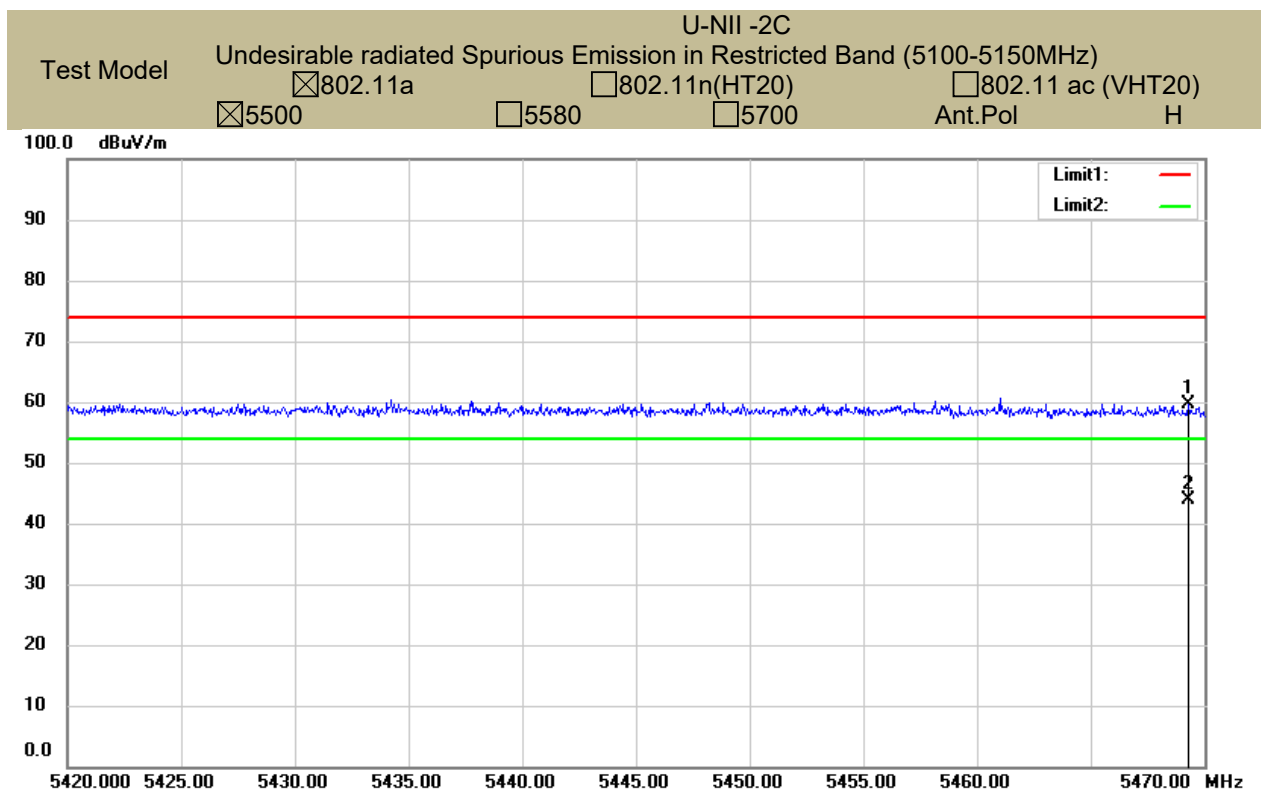

U-NII -2C				
Test Model	Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)			
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11 ac (VHT20)	Ant.Pol
	☐ 5500	☐ 5580	☒ 5700	H

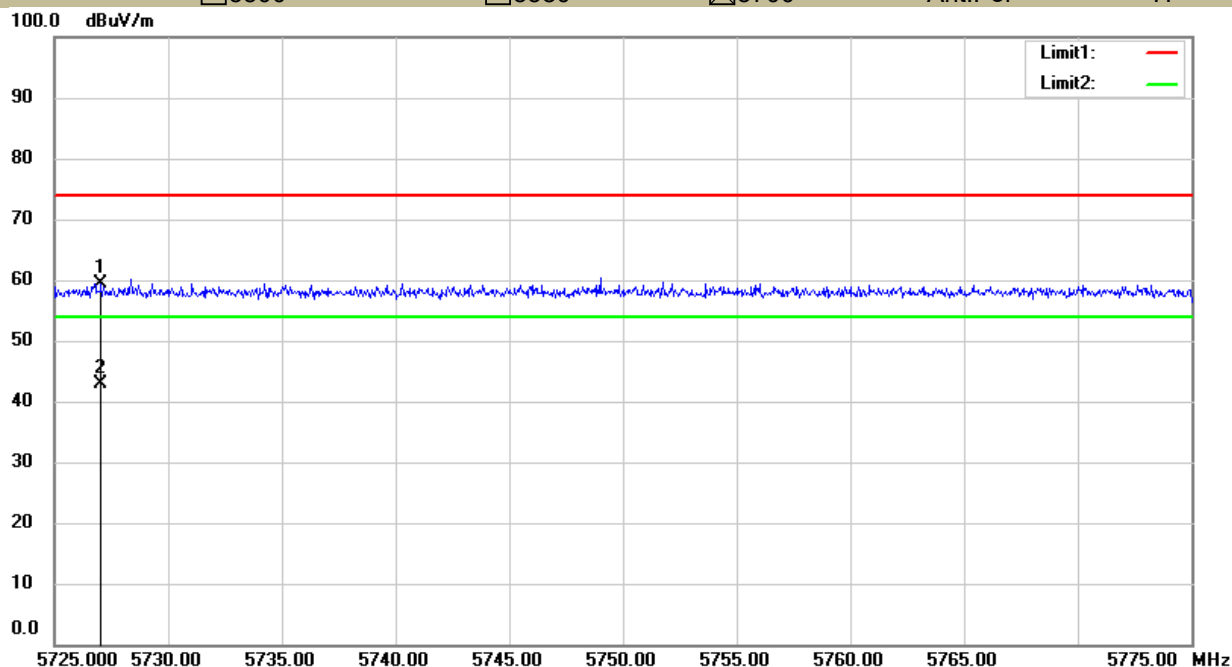

U-NII -2C				
Test Model	Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)			
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11 ac (VHT20)	Ant.Pol
	☐ 5500	☐ 5580	☒ 5700	V

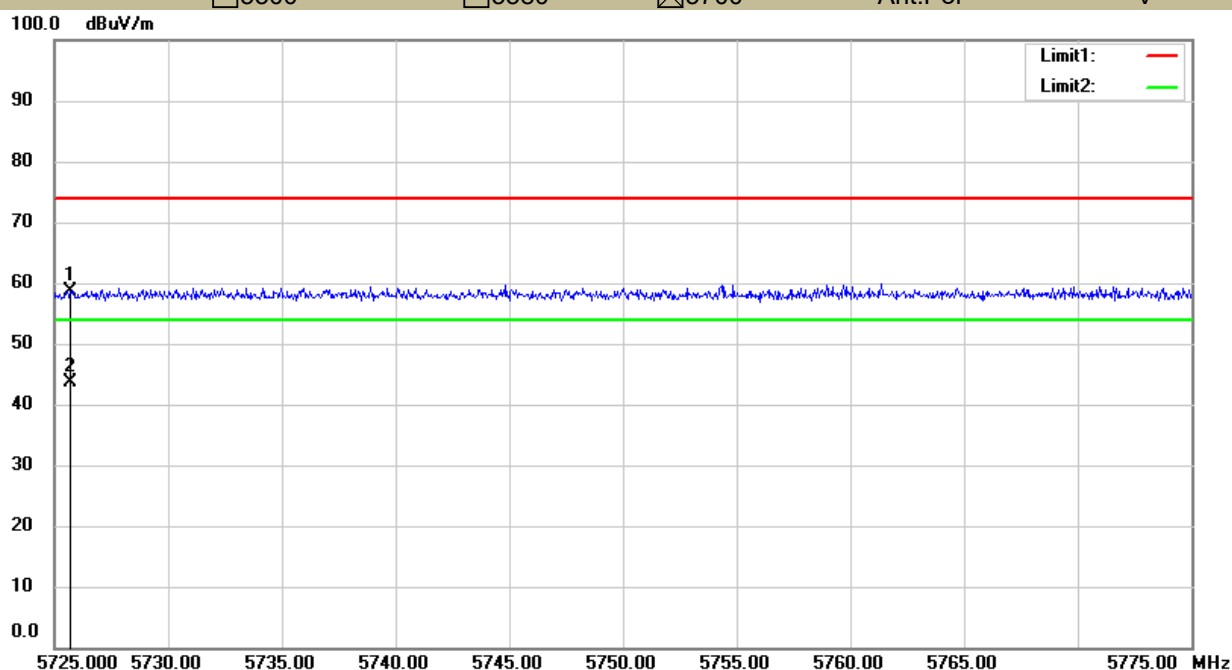

■ ☒ For Undesirable radiated Spurious Emission in U-NII -3

All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:

● ☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Test mode:		802.11a		Frequency(MHz):		5745	
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)		
5514.288	V	45.89	-49.34	-27	-22.3		
10891.96	V	54.15	-41.08	-27	-14.1		
18000.00	V	64.39	-30.84	-27	-3.8		
5536.647	H	46.85	-48.38	-27	-21.4		
12198.68	H	55.90	-39.33	-27	-12.3		
18000.00	H	63.71	-31.52	-27	-4.5		

Test mode:		802.11a		Frequency(MHz):		5785	
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)		
4985.176	V	44.99	-50.24	-27	-23.2		
11526.81	V	55.93	-39.30	-27	-12.3		
18000.00	V	65.11	-30.12	-27	-3.1		
5063.595	H	45.03	-50.20	-27	-23.2		
11050.51	H	54.46	-40.77	-27	-13.8		
17927.31	H	63.98	-31.25	-27	-4.3		

Test mode:		802.11a		Frequency(MHz):		5825	
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)		
4946.423	V	45.11	-50.12	-27	-23.1		
11640.65	V	56.75	-38.48	-27	-11.5		
18000.00	V	63.69	-31.54	-27	-4.5		
5511.102	H	45.78	-49.45	-27	-22.5		
12114.35	H	56.00	-39.23	-27	-12.2		
17932.49	H	64.57	-30.66	-27	-3.7		

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
d is the measurement distance in 3 meters

Frequency: 802.11a				Frequency(MHz): 5745			
Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5514.288	V	45.89	29.71	74	54	-28.11	-24.29
10891.96	V	54.15	38.44	74	54	-19.85	-15.56
18000.00	V	64.39	48.53	74	54	-9.61	-5.47
5536.647	H	46.85	29.43	74	54	-27.15	-24.57
12198.68	H	55.90	38.79	74	54	-18.10	-15.21
18000.00	H	63.71	45.26	74	54	-10.29	-8.74

Frequency: 802.11a				Frequency(MHz): 5785			
Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
4985.176	V	44.99	29.33	74	54	-29.01	-24.67
11526.81	V	55.93	38.41	74	54	-18.07	-15.59
18000.00	V	65.11	48.72	74	54	-8.89	-5.28
5063.595	H	45.03	27.88	74	54	-28.97	-26.12
11050.51	H	54.46	36.95	74	54	-19.54	-17.05
17927.31	H	63.98	45.83	74	54	-10.02	-8.17

Frequency: 802.11a				Frequency(MHz): 5825			
Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
4946.423	V	45.11	29.42	74	54	-28.89	-24.58
11640.65	V	56.75	39.77	74	54	-17.25	-14.23
18000.00	V	63.69	45.26	74	54	-10.31	-8.74
5511.102	H	45.78	29.42	74	54	-28.22	-24.58
12114.35	H	56.00	39.71	74	54	-18.00	-14.29
17932.49	H	64.57	47.02	74	54	-9.43	-6.98

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

- ☒ Undesirable radiated Spurious Emission in band edge

Test mode: 802.11a Frequency: 5745

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5720.806	H	58.88	-36.35	17.92	PASS
5722.694	V	59.09	-36.14	23.36	PASS

Test mode: 802.11a Frequency: 5825

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5851.750	V	59.25	-35.98	24.96	PASS
5850.600	H	59.32	-35.91	28.27	PASS

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).


(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

(3) Correct Factor= Ant_F + Cab_L - Preamp


(4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77

d is the measurement distance in 3 meters


U-NII -3				
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in	Band Edge
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)	
	☒ 5745		Ant. Pol	H

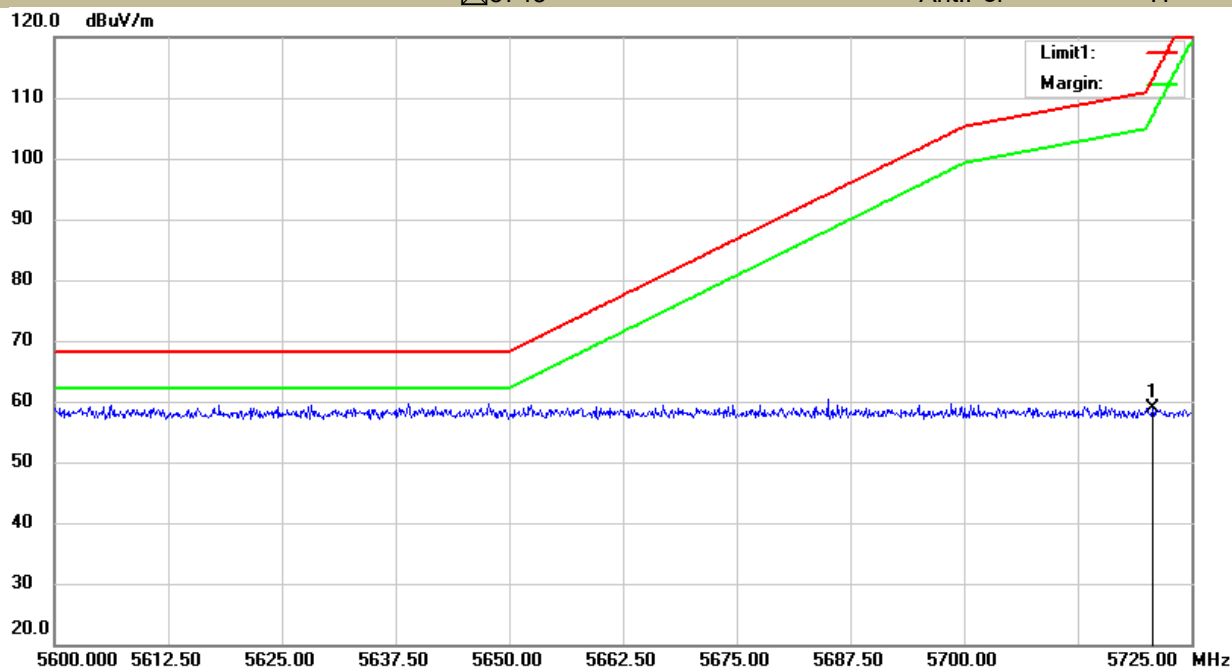


U-NII -3				
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in	Band Edge
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)	
	☒ 5745		Ant. Pol	V

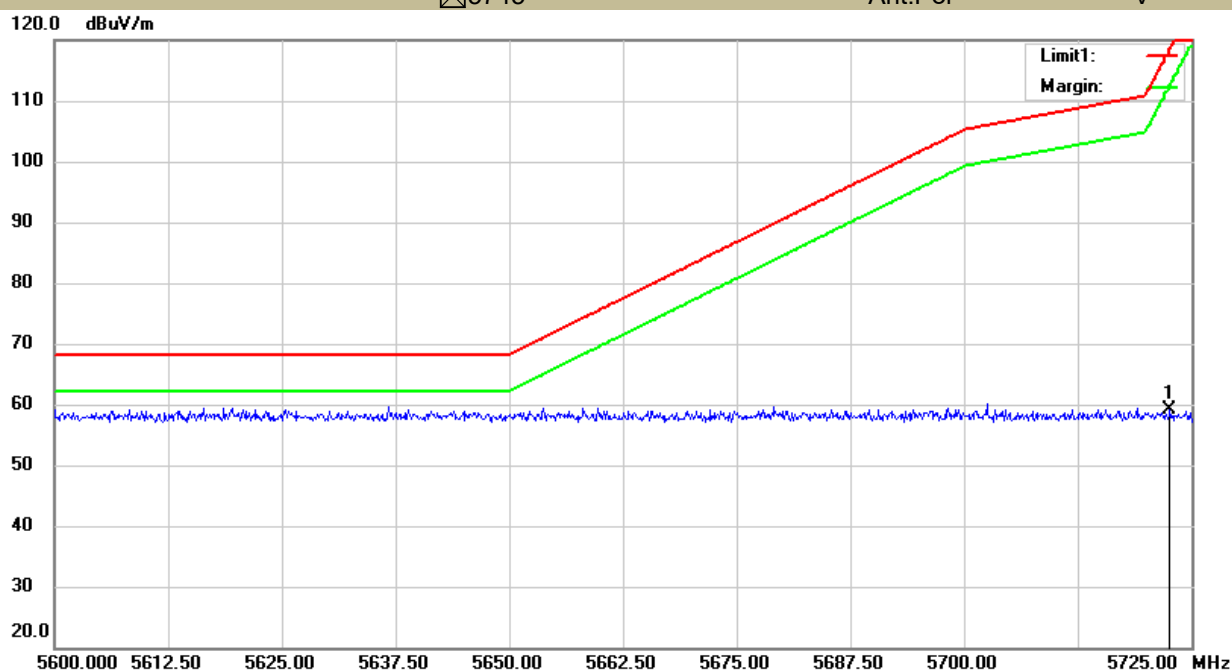


U-NII -3			
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ 5825		Ant.Pol
			H

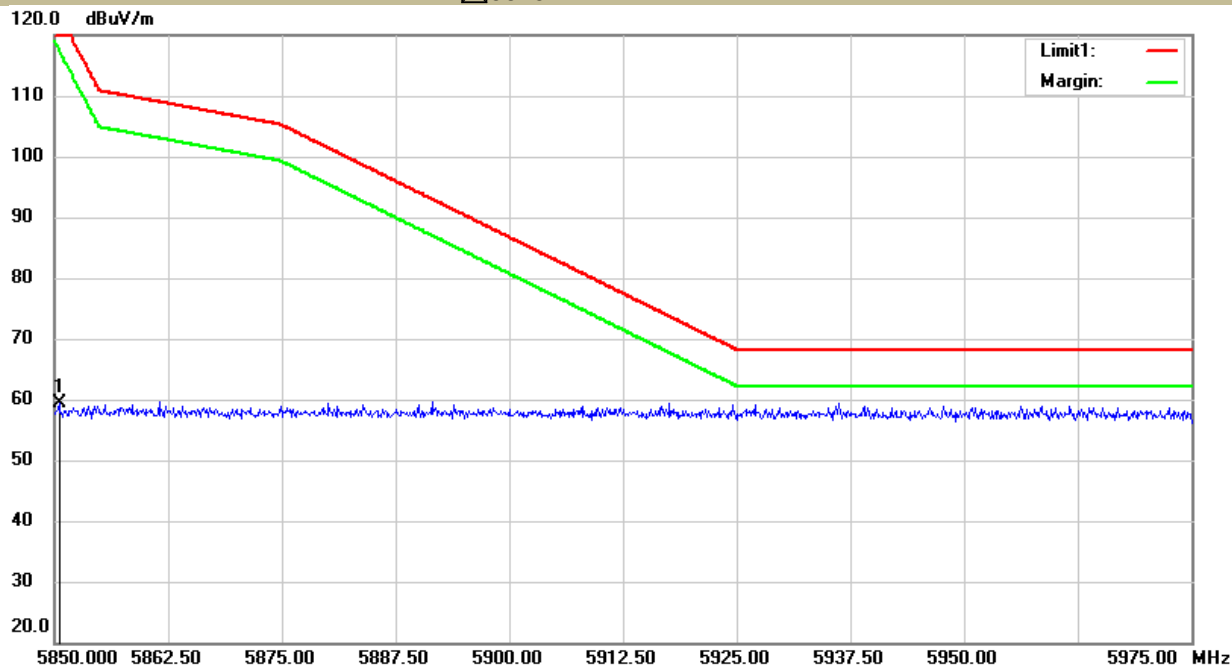


U-NII -3			
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ 5825		Ant.Pol
			V

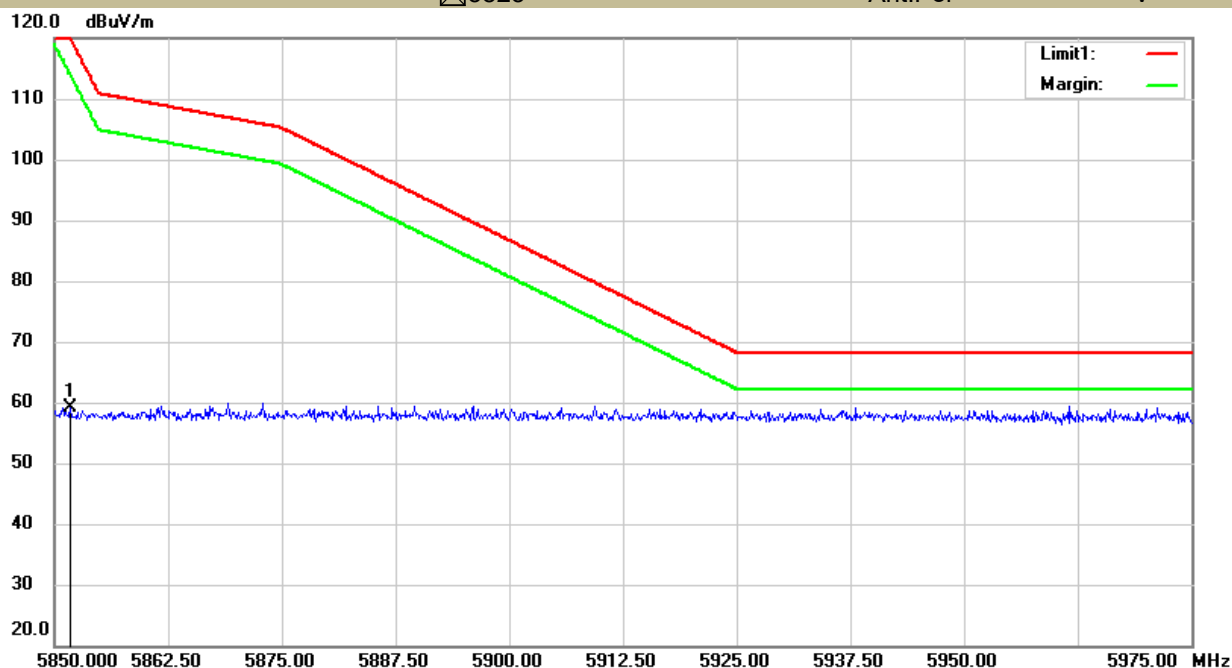


- Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)
All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:

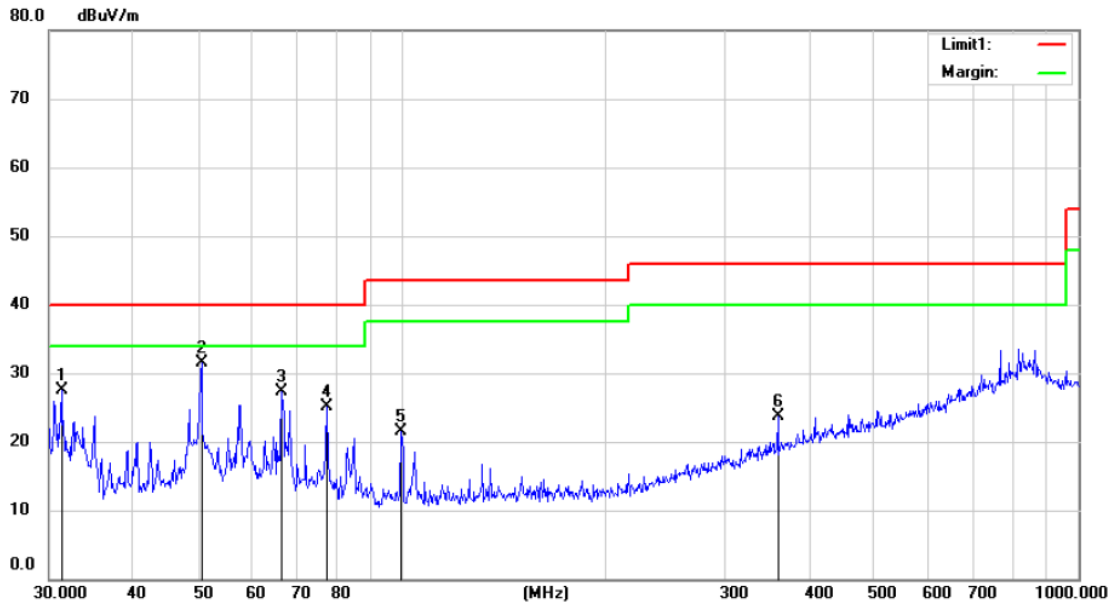


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		31.3305	41.96	-14.50	27.46	40.00	-12.54	QP			
2	*	50.4310	43.42	-11.96	31.46	40.00	-8.54	QP			
3		66.3534	39.65	-12.40	27.25	40.00	-12.75	QP			
4		77.4570	39.63	-14.55	25.08	40.00	-14.92	QP			
5		99.7902	36.21	-14.76	21.45	43.50	-22.05	QP			
6		360.1320	31.23	-7.44	23.79	46.00	-22.21	QP			

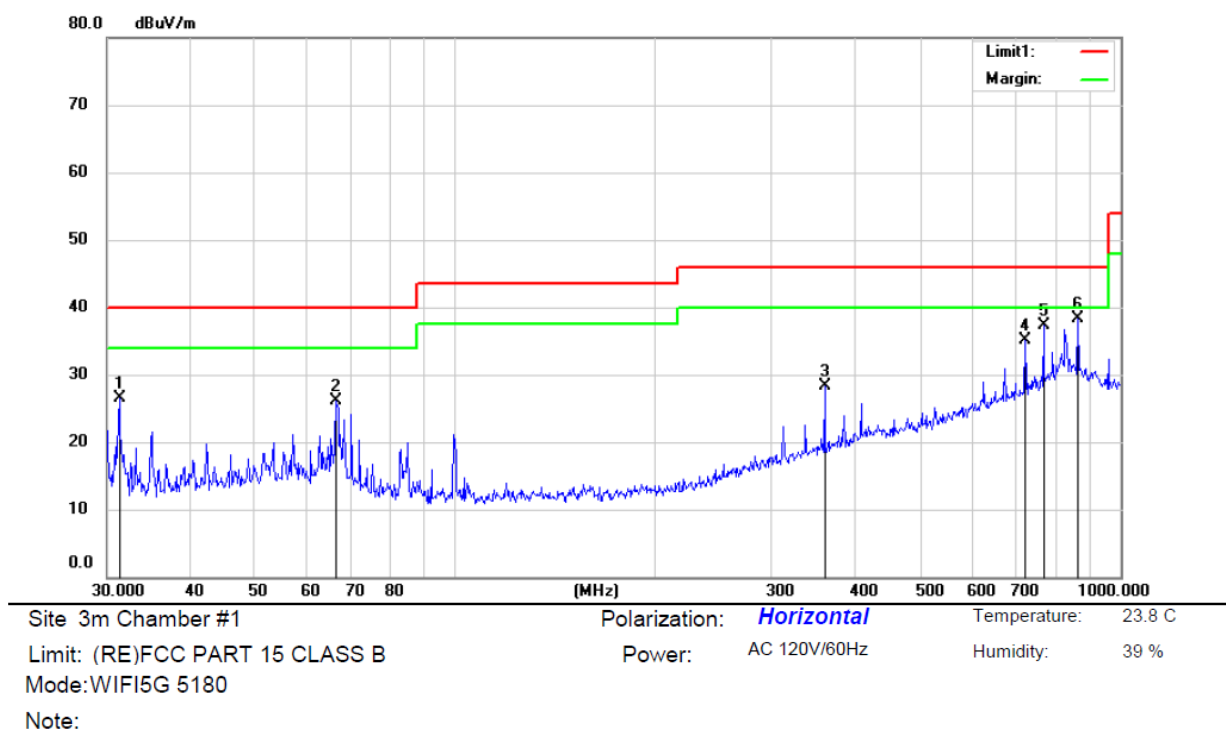


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		31.3442	41.00	-14.50	26.50	40.00	-13.50	QP		
2		66.3534	38.49	-12.40	26.09	40.00	-13.91	QP		
3		360.1320	35.70	-7.44	28.26	46.00	-17.74	QP		
4		720.1458	35.55	-0.43	35.12	46.00	-10.88	QP		
5		768.0745	36.59	0.81	37.40	46.00	-8.60	QP		
6	*	864.1920	36.21	2.08	38.29	46.00	-7.71	QP		

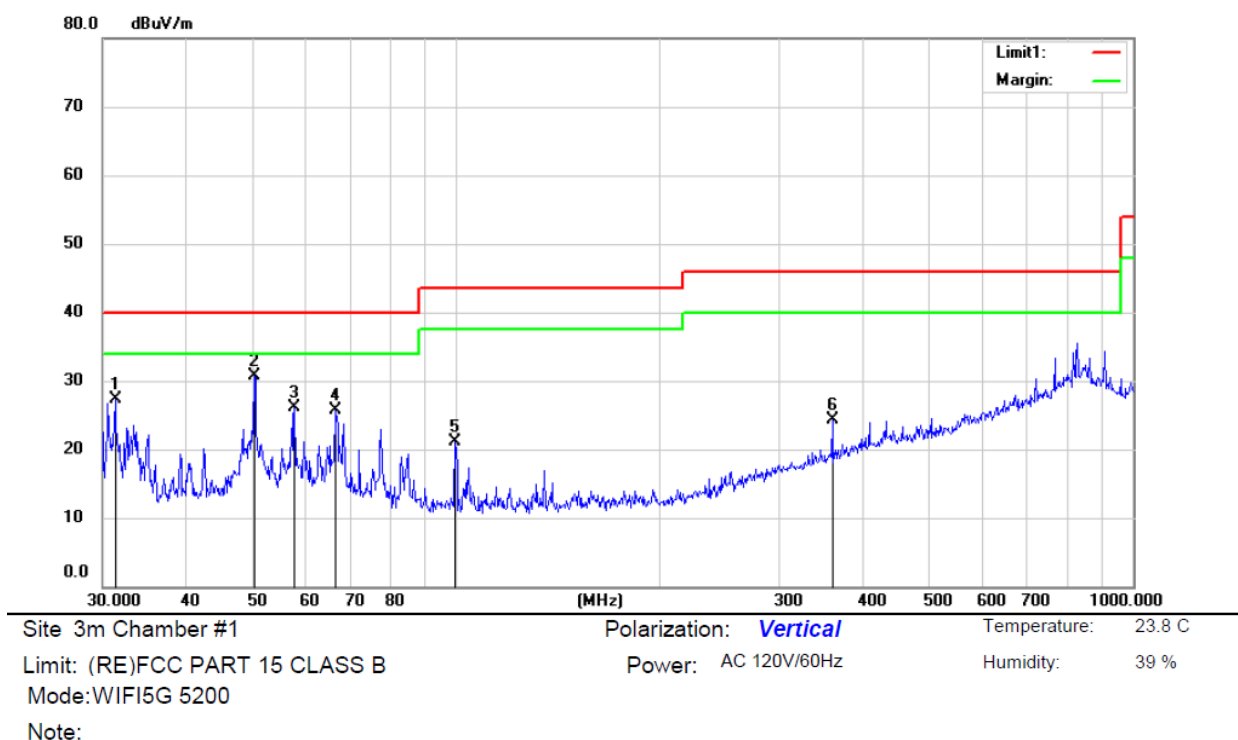

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		31.3442	41.81	-14.50	27.31	40.00	-12.69	QP		
2	*	50.3868	42.61	-11.96	30.65	40.00	-9.35	QP		
3		57.5940	38.11	-12.08	26.03	40.00	-13.97	QP		
4		66.3534	38.03	-12.40	25.63	40.00	-14.37	QP		
5		99.7902	35.85	-14.76	21.09	43.50	-22.41	QP		
6		360.1320	31.72	-7.44	24.28	46.00	-21.72	QP		

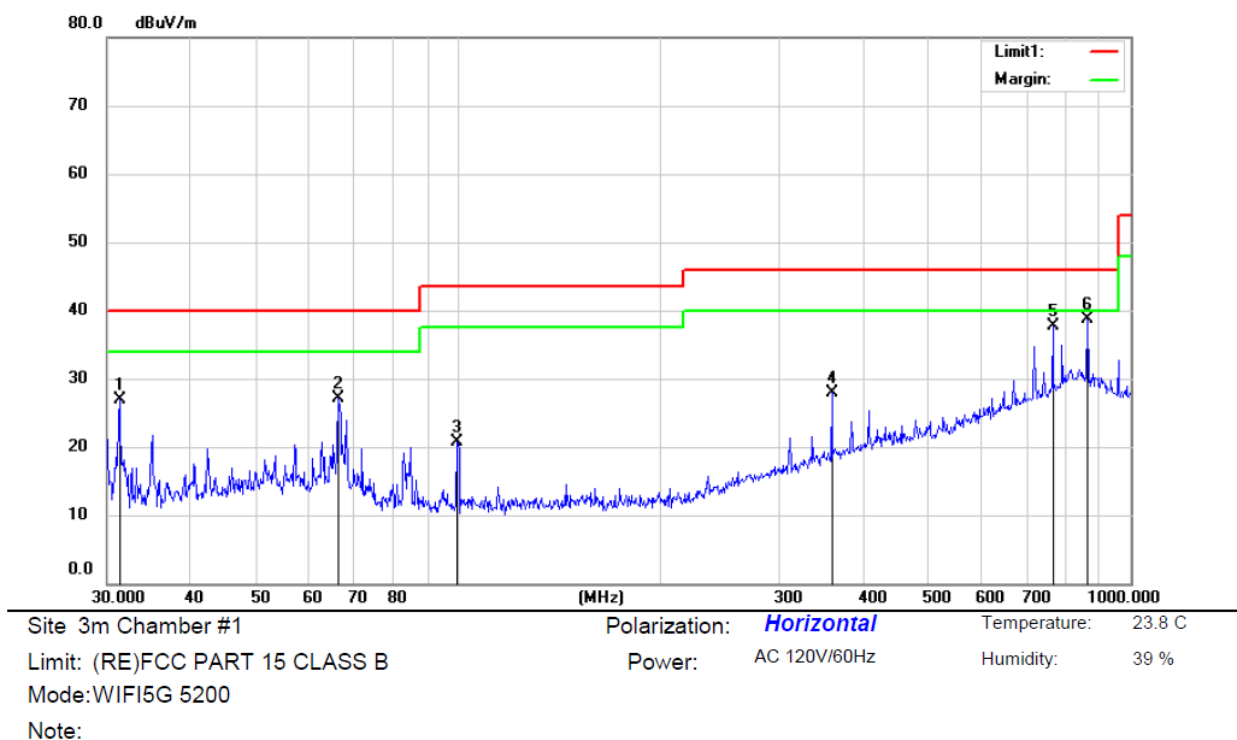

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		31.3442	41.32	-14.50	26.82	40.00	-13.18	QP		
2		66.3534	39.41	-12.40	27.01	40.00	-12.99	QP		
3		99.8340	35.46	-14.76	20.70	43.50	-22.80	QP		
4		360.1320	35.44	-7.44	28.00	46.00	-18.00	QP		
5		768.0745	36.84	0.81	37.65	46.00	-8.35	QP		
6	*	864.1920	36.56	2.08	38.64	46.00	-7.36	QP		

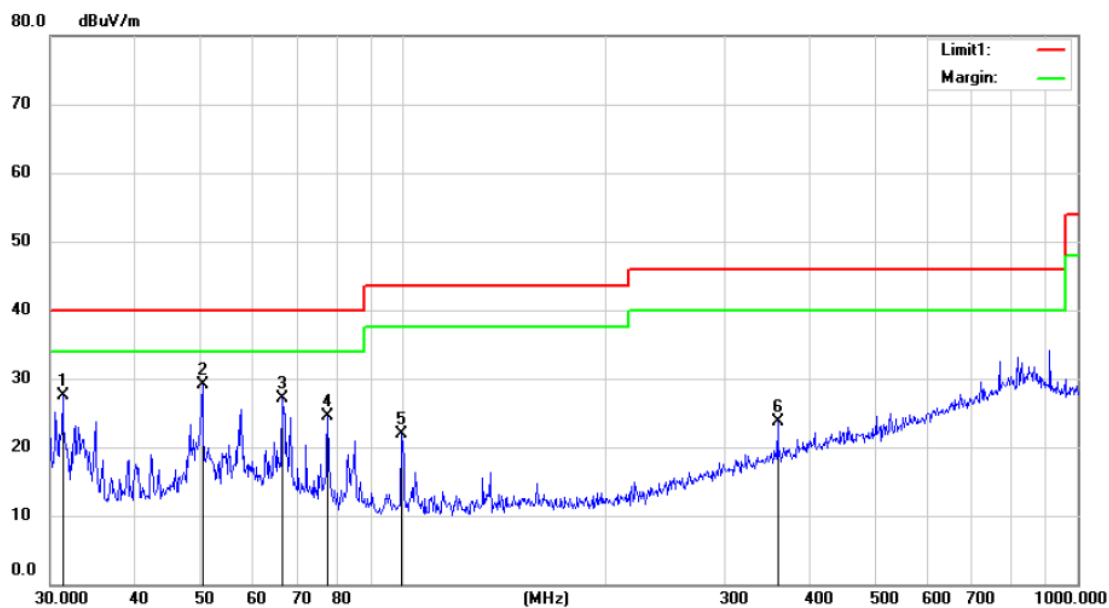

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 23.8 C

Limit: (RE)FCC PART 15 CLASS B


Power: AC 120V/60Hz

Humidity: 39 %

Mode:WIFI5G 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.3442	42.01	-14.50	27.51	40.00	-12.49	QP		
2	*	50.4090	41.00	-11.96	29.04	40.00	-10.96	QP		
3		66.3825	39.49	-12.40	27.09	40.00	-12.91	QP		
4		77.4230	39.09	-14.55	24.54	40.00	-15.46	QP		
5		99.7902	36.57	-14.76	21.81	43.50	-21.69	QP		
6		359.9741	31.16	-7.44	23.72	46.00	-22.28	QP		

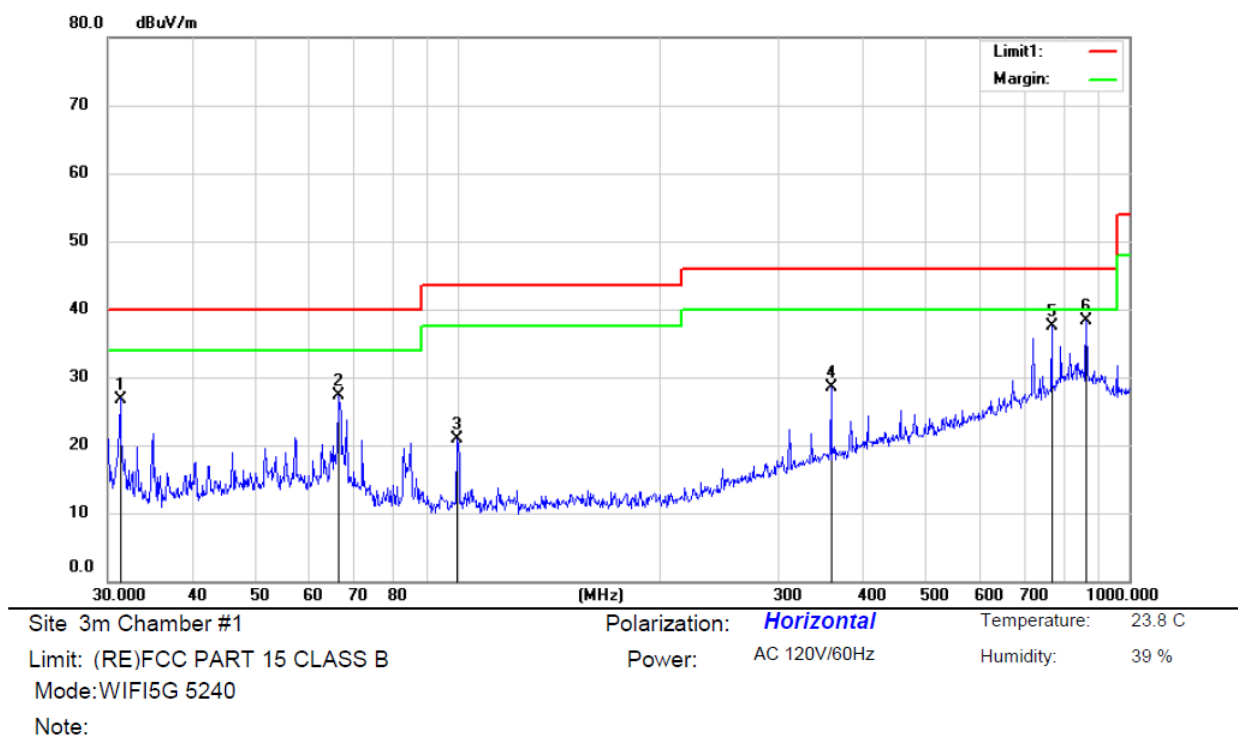

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		31.3442	41.30	-14.50	26.80	40.00	-13.20	QP		
2		66.4116	39.78	-12.41	27.37	40.00	-12.63	QP		
3		99.7902	35.66	-14.76	20.90	43.50	-22.60	QP		
4		360.1320	35.93	-7.44	28.49	46.00	-17.51	QP		
5		768.0745	36.66	0.81	37.47	46.00	-8.53	QP		
6	*	864.1920	36.21	2.08	38.29	46.00	-7.71	QP		

8.6 POWER LINE CONDUCTED EMISSIONS

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 6.3 conducted emission test setup

8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.


Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

Pass

The 120V & 240V voltage have been tested, and the worst result recorded was report as below:

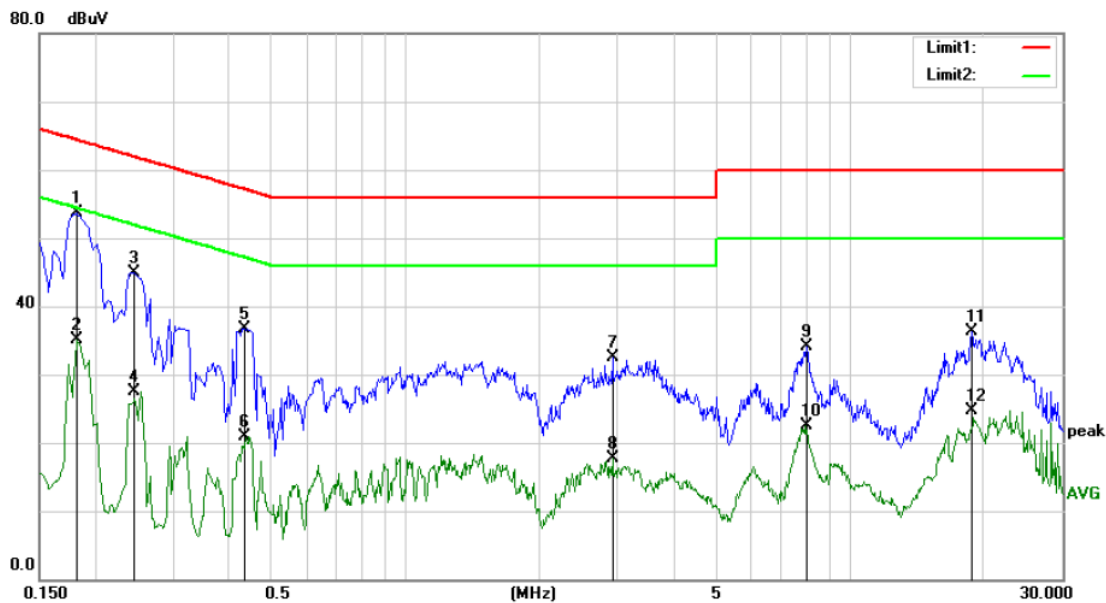

Site Conduction #1

Phase: **L1**

Temperature: 22.8

Limit: (CE)FCC PART 15 class B_QP


Power: AC 120V/60Hz

Humidity: 48 %

Mode: Wifi5G mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1820	44.20	9.44	53.64	64.39	-10.75	QP	
2		0.1820	25.67	9.44	35.11	54.39	-19.28	AVG	
3		0.2460	35.59	9.37	44.96	61.89	-16.93	QP	
4		0.2460	18.15	9.37	27.52	51.89	-24.37	AVG	
5		0.4340	27.41	9.30	36.71	57.18	-20.47	QP	
6		0.4340	11.68	9.30	20.98	47.18	-26.20	AVG	
7		2.9180	22.63	9.82	32.45	56.00	-23.55	QP	
8		2.9180	7.91	9.82	17.73	46.00	-28.27	AVG	
9		7.9860	24.13	9.97	34.10	60.00	-25.90	QP	
10		7.9860	12.48	9.97	22.45	50.00	-27.55	AVG	
11		18.8100	26.04	10.18	36.22	60.00	-23.78	QP	
12		18.8100	14.53	10.18	24.71	50.00	-25.29	AVG	

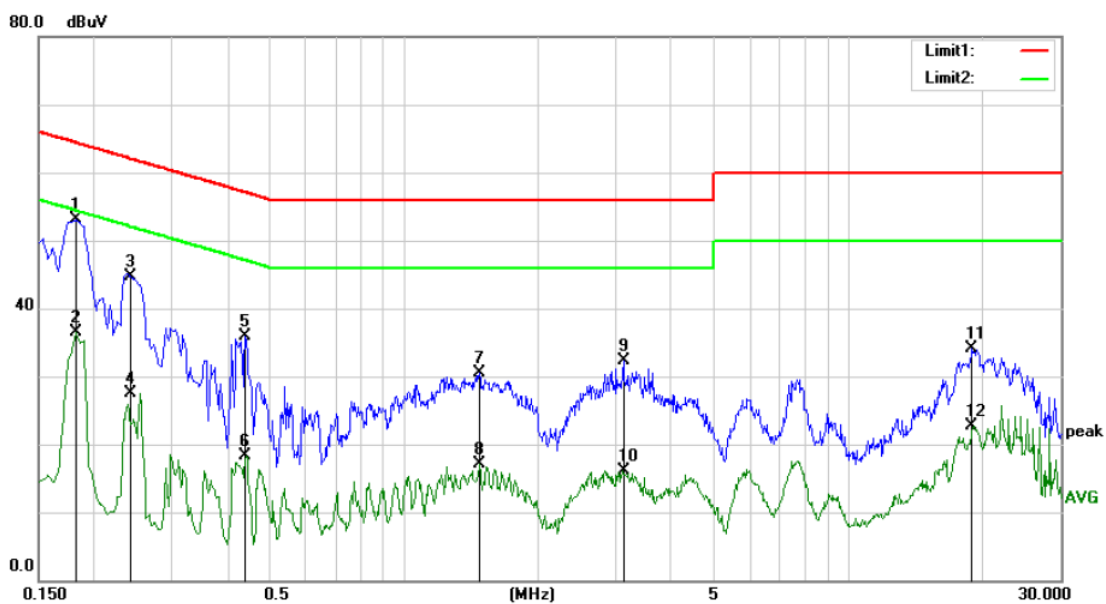

Site Conduction #1

Phase: **N**

Temperature: 22.8

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 48 %

Mode: Wifi5G mode

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1820	43.58	9.44	53.02	64.39	-11.37	QP	
2		0.1820	27.09	9.44	36.53	54.39	-17.86	AVG	
3		0.2420	35.24	9.37	44.61	62.03	-17.42	QP	
4		0.2420	18.13	9.37	27.50	52.03	-24.53	AVG	
5		0.4380	26.53	9.29	35.82	57.10	-21.28	QP	
6		0.4380	8.93	9.29	18.22	47.10	-28.88	AVG	
7		1.4740	20.67	9.78	30.45	56.00	-25.55	QP	
8		1.4740	7.24	9.78	17.02	46.00	-28.98	AVG	
9		3.1140	22.40	9.82	32.22	56.00	-23.78	QP	
10		3.1140	6.32	9.82	16.14	46.00	-29.86	AVG	
11		19.0060	23.97	10.18	34.15	60.00	-25.85	QP	
12		19.0060	12.53	10.18	22.71	50.00	-27.29	AVG	

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

PASS.

- The EUT has 2 FPC antennas; the Max Antenna Gain as follow:

Antenn0:

5150-5350: 2.86

5500-5700: 3.21

5725-5825: 3.34

Antenn1:

5150-5350: 2.65

5500-5700: 2.98

5725-5825: 3.12

- Note:
- ☒ Antennas use a permanently attached antenna which is not replaceable.
 - ☐ Not using a standard antenna jack or electrical connector for antenna replacement
 - ☐ The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos.

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5