

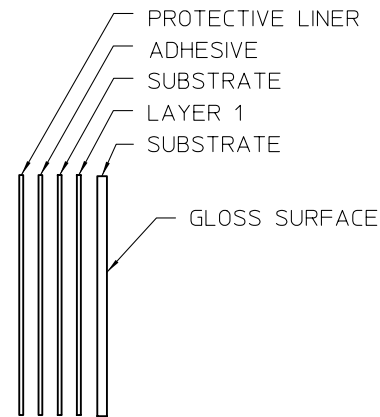


ALL DATA AND INFORMATION CONTAINED IN OR DISCLOSED BY THIS DOCUMENT IS CONFIDENTIAL AND PROPRIETARY INFORMATION OF QUALCOMM INCORPORATED AND ALL RIGHTS THEREIN ARE EXPRESSLY RESERVED BY ACCEPTING THIS MATERIAL. THE RECIPIENT AGREES THAT THIS MATERIAL AND THE INFORMATION CONTAINED THEREIN IS HELD IN CONFIDENCE AND IN TRUST AND WILL NOT BE USED, COPIED, REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF QUALCOMM INCORPORATED. EXPORT OF THIS TECHNOLOGY MAY BE CONTROLLED BY THE U.S. GOVERNMENT. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
X0	SEE DCR 34000	---	----

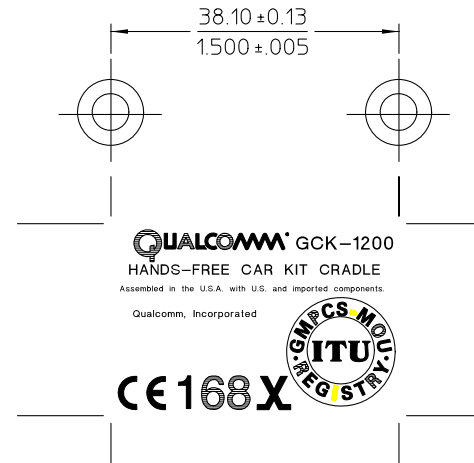

## LAYER CONFIGURATION

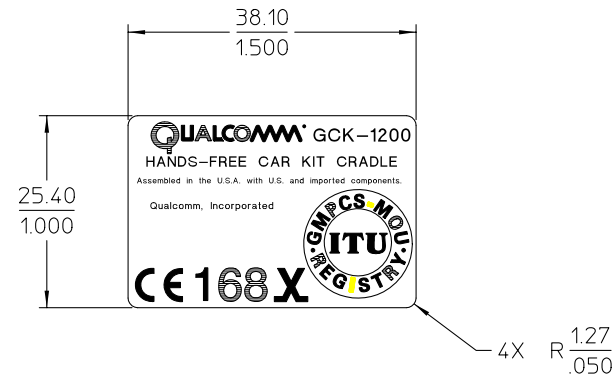

QUALCOMM INC.  
AW15-82114-1, REV X0, LAYER 1  
ARTWORK, MEDIA, LABEL,IDENT,  
CRECK CRADLE

14. DO NOT REMOVE MATRIX.
13. LABELS SHALL BE KISS CUT MULTIPLE UPON SHEET.
12. DURABILITY TEST TO COMPLY WITH UL 1950 STANDARD THIRD EDITION, PARAGRAPH 17.15.
11. PART TO BE MANUFACTURED IN ACCORDANCE WITH UL 969 STANDARD.
10. TEMPERATURE RATING: LABEL MATERIAL, ADHESIVE AND INK MUST BE SUITABLE FOR CONTINUOUS USE FROM -40°C (-40°F) TO +70°C (+158°F).
9. ARTWORK WAS CREATED IN CORELDRAW 8.0. DEVIATION FROM SPECIFIED FONT(S) NOT PERMITTED WITHOUT PRIOR APPROVAL BY QUALCOMM.
8. FOR ARTWORK USE ELECTRONIC DATA AW15-82114 AND APPROPRIATE DASH NUMBER AND REVISION PER TABLE 1.
7. BAG AND TAG ITEM IN ACCORDANCE WITH QUALCOMM PRODUCT IDENTIFICATION MARKING SPECIFICATION GS80-31042-1, MARKING CODE 101, CONTENT/FORMAT OPTION 1.

6. USE COLORS SPECIFIED IN TABLE 1. COLOR SAMPLES TO BE VISUALLY INSPECTED AND APPROVED BY QUALCOMM PRIOR TO MANUFACTURE.
5. MATERIAL:
  - a. 3M 7931, 0.05/0.002 THICK, WHITE, GLOSS POLYESTER FILM OR EQUIVALENT.
  - b. 3M 7831, 0.03/0.001 THICK, CLEAR, GLOSS, POLYESTER FILM WITH 0.03/0.001 THICK 3M #400 'HI-TACK' ACRYLIC ADHESIVE ON ONE SIDE
  - c. GLOSS LAM
4. WORKMANSHIP SHALL BE IN ACCORDANCE WITH QUALCOMM MECHANICAL WORKMANSHIP STANDARD 80-10767-1.
3. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
2. MILLIMETERS (MM) ARE THE CONTROLLING DIMENSIONS ON THIS DRAWING. INCH DIMENSIONS ARE FOR REFERENCE ONLY.
1. INTERPRET DRAWING PER MIL-STD-100.

NOTES: UNLESS OTHERWISE SPECIFIED


TABLE 1

LABEL DASH NO.	ARTWORK REVISION	ARTWORK LAYER NO.	COLOR
-1	X0	1	BLACK, SEMI-GLOSS, N0.27038 PER FED-STD-595

MM  
INCHES

QUALCOMM PROPRIETARY  
COPYRIGHT (C) 2000 QUALCOMM INCORPORATED  
ALL RIGHTS RESERVED

SEE SEPARATE PARTS LIST:  
NONE

THIRD ANGLE PROJECTION		SEE SEPARATE PARTS LIST:																					
		NONE																					
UNLESS OTHERWISE SPECIFIED		CONTRACT NO.																					
DIMENSION UNITS ARE AS NOTED/PER NOTE 2 AND APPLY AFTER SURFACE TREATMENT		NONE	DATE																				
TOLERANCES		DRW SCHWERSENSKY	3/15/00																				
<table><tr><th>MM</th><th>LINEAR</th><th>INCHES</th><th>ANGULAR</th></tr><tr><td>X ± .25</td><td>X ± .1</td><td>EXCL OF SHEET</td><td>CHK REQD SIG ON FILE</td></tr><tr><td>XX ± 0.76</td><td>XX ± .03</td><td>METAL FLANGES</td><td>ENG</td></tr><tr><td>X.XX ± 0.25</td><td>XXX ± .010</td><td>± 0°30'</td><td>P.E.</td></tr><tr><td></td><td></td><td></td><td>MFG</td></tr></table>		MM	LINEAR	INCHES	ANGULAR	X ± .25	X ± .1	EXCL OF SHEET	CHK REQD SIG ON FILE	XX ± 0.76	XX ± .03	METAL FLANGES	ENG	X.XX ± 0.25	XXX ± .010	± 0°30'	P.E.				MFG	5775 MOREHOUSE DRIVE	
MM	LINEAR	INCHES	ANGULAR																				
X ± .25	X ± .1	EXCL OF SHEET	CHK REQD SIG ON FILE																				
XX ± 0.76	XX ± .03	METAL FLANGES	ENG																				
X.XX ± 0.25	XXX ± .010	± 0°30'	P.E.																				
			MFG																				
		SAN DIEGO, CA 92121-1714																					
		TITLE																					
		LABEL, IDENT, CREEK CRADLE																					
<table><tr><th>MM</th><th>HOLE DIAMETERS</th><th>INCHES</th></tr><tr><td>0.34 - 6.35</td><td>+0.13 -0.03</td><td>013 - 250</td></tr><tr><td>6.37 - 12.70</td><td>+0.15 -0.03</td><td>251 - 500</td></tr><tr><td>12.72 - 25.40</td><td>+0.25 -0.03</td><td>501 - 1000</td></tr><tr><td></td><td></td><td>+0.10 -0.01</td></tr></table>		MM	HOLE DIAMETERS	INCHES	0.34 - 6.35	+0.13 -0.03	013 - 250	6.37 - 12.70	+0.15 -0.03	251 - 500	12.72 - 25.40	+0.25 -0.03	501 - 1000			+0.10 -0.01	SIZE	CAGE CODE					
MM	HOLE DIAMETERS	INCHES																					
0.34 - 6.35	+0.13 -0.03	013 - 250																					
6.37 - 12.70	+0.15 -0.03	251 - 500																					
12.72 - 25.40	+0.25 -0.03	501 - 1000																					
		+0.10 -0.01																					
		D	1DN14																				
		DRAWING NO	REV																				
		15-82114	X0																				
		SCALE	SHEET 1 OF 1																				
		2/1																					