

SAR TEST REPORT



The following samples were submitted and identified on behalf of the client as:

Equipment Under Test LTE module
Brand Name Fibocom
Model No. L850-GL
Company Name Fibocom Wireless Inc.
Company Address 5/F, Tower A, Technology Building II, 1057 Nanhai Blvd,
Navshanm Shenshen, China
Standards IEEE/ANSI C95.1-1992, IEEE 1528-2013
FCC ID ZMOL850GLD
Date of Receipt Aug. 30, 2021
Date of Test(s) Oct. 13, 2021 ~ Oct. 18, 2021
Date of Issue Oct. 22, 2021

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Signed on behalf of SGS

Clerk / Ruby Ou	Engineer / Tom Chiang	Asst. Manager / John Yeh
Ruby Ou	Tom Chiang	John Teh

Date: Oct. 22, 2021

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Revision History

Report Number	Revision	Description	Issue Date	Remark
E5/2021/80020	Rev.00	Initial creation of document	Oct. 22, 2021	

Note:

The mark " * " is the revised version of the report due to comments submitted by the certification.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Contents

0. Guidance applied	4
1. General Information.....	5
1.1 Testing Laboratory	5
1.2 Details of Applicant.....	5
1.3 Description of EUT	6
1.3.1 LTE Downlink CA specification.....	39
1.4 Test Environment	42
1.5 Operation Description	42
1.6 The SAR Measurement System.....	50
1.7 System Components.....	52
1.8 SAR System Verification	54
1.9 Tissue Simulant Fluid for the Frequency Band	56
1.10 Evaluation Procedures	59
1.11 Probe Calibration Procedures	60
1.12 Test Standards and Limits	63
2. Summary of Results	65
2.1 Decision rules.....	65
2.2 Summary of Results	65
2.3 Reporting statements of conformity	66
3. Simultaneous Transmission Analysis.....	67
3.1 Estimated SAR calculation.....	68
3.2 SPLSR evaluation and analysis	68
4. Instruments List.....	70
5. Measurements.....	72
6. SAR System Performance Verification	102
7. Uncertainty Budget.....	114
Appendixes	115
E5202180020 SAR_Appendix A Photographs	115
E5202180020 SAR_Appendix B DAE & Probe Cal. Certificate	115
E5202180020 SAR_Appendix C Phantom Description & Dipole Cal. Certificate	115

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

0. Guidance applied

The SAR testing method and procedure for this device is in accordance with the following standards:

IEEE/ANSI C95.1-1992

IEEE 1528-2013

KDB447498D01v06

KDB616217D04v01r02

KDB865664D01v01r04

KDB865664D02v01r02

KDB941225D01v03r01

KDB941225D05v02r05

KDB941225D05Av01r02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Central RF Lab	
No. 2, Keji 1st Rd., Guishan Township, Taoyuan County, 33383, Taiwan	
FCC Designation Number	TW0028
Tel	+886-2-2299-3279
Fax	+886-2-2298-0488
Internet	http://www.tw.sgs.com/

1.2 Details of Applicant

Company Name	Fibocom Wireless Inc.
Company Address	5/F, Tower A, Technology Building II, 1057 Nanhai Blvd, Navshanm Shenshen, China

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

1.3 Description of EUT

Host:

1000.

Equipment Under Test	Portable Computer			
Brand Name	DELL			
Model No.	P29T			
FCC ID	ZMOL850GLD			
Integrated Module	WLAN	Brand Name : Intel Model Name : AX201D2W		
	WWAN	Brand Name : Fibocom Model Name : L850-GL		
Mode of Operation	<input checked="" type="checkbox"/> WCDMA <input checked="" type="checkbox"/> HSDPA <input checked="" type="checkbox"/> HSUPA <input checked="" type="checkbox"/> HSPA+ <input checked="" type="checkbox"/> DC-HSDPA <input checked="" type="checkbox"/> LTE FDD <input checked="" type="checkbox"/> LTE TDD <input checked="" type="checkbox"/> WLAN802.11 a/b/g/n/ac/ax(20M/40M/80M/160M) <input checked="" type="checkbox"/> Bluetooth			
Duty Cycle	WCDMA	100%		
	LTE FDD	100%		
	LTE TDD	63.3%		
	WLAN802.11 a/b/g/n/ac/ax(20M/40M/80M/160M)	100%		
	Bluetooth	100%		
TX Frequency Range (MHz)	WCDMA Band II	1850	—	1910
	WCDMA Band IV	1710	—	1755
	WCDMA Band V	824	—	849
	LTE FDD Band 2	1850	—	1910
	LTE FDD Band 4	1710	—	1755
	LTE FDD Band 5	824	—	849
	LTE FDD Band 7	2500	—	2570

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

TX Frequency Range (MHz)	LTE FDD Band 12	699	—	716
	LTE FDD Band 13	777	—	787
	LTE FDD Band 17	704	—	716
	LTE FDD Band 26	814	—	849
	LTE FDD Band 30	2305	—	2315
	LTE TDD Band 38	2570	—	2620
	LTE TDD Band 41	2496	—	2690
	LTE FDD Band 66	1710	—	1780
	WLAN802.11 b/g/n/ax(20M)	2412	—	2472
	WLAN802.11 n/ax(40M)	2422	—	2462
	WLAN802.11 a/n/ac/ax(20M) 5.2G	5180	—	5240
	WLAN802.11 n/ac/ax(40M) 5.2G	5190	—	5230
	WLAN802.11 ac/ax(80M) 5.2G	5210		
	WLAN802.11 ac/ax(160M) 5.2G	5250		
	WLAN802.11 a/n/ac/ax(20M) 5.3G	5260	—	5320
	WLAN802.11 n/ac/ax(40M) 5.3G	5270	—	5310
	WLAN802.11 ac/ax(80M) 5.3G	5290		
	WLAN802.11 a/n/ac/ax(20M) 5.6G	5500	—	5720
	WLAN802.11 n/ac/ax(40M) 5.6G	5510	—	5710
	WLAN802.11 ac/ax(80M) 5.6G	5530	—	5690
	WLAN802.11 ac/ax(160M) 5.6G	5570		
	WLAN802.11 a/n/ac/ax(20M) 5.8G	5745	—	5825
	WLAN802.11 n/ac/ax(40M) 5.8G	5755	—	5795
	WLAN802.11 ac/ax(80M) 5.8G	5775		
	Bluetooth	2402	—	2480
Channel Number (ARFCN)	WCDMA Band II	9262	—	9538
	WCDMA Band IV	1312	—	1513
	WCDMA Band V	4132	—	4233

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Channel Number (ARFCN)	LTE FDD Band 2	18607	—	19193
	LTE FDD Band 4	19957	—	20393
	LTE FDD Band 5	20407	—	20643
	LTE FDD Band 7	20775	—	21425
	LTE FDD Band 12	23017	—	23173
	LTE FDD Band 13	23205	—	23255
	LTE FDD Band 17	23755	—	23825
	LTE FDD Band 26	26697	—	27033
	LTE FDD Band 30	27685	—	27735
	LTE TDD Band 38	37775	—	38225
	LTE TDD Band 41	39675	—	41565
	LTE FDD Band 66	131979	—	132665
	WLAN802.11 b/g/n/ax(20M)	1	—	13
	WLAN802.11 n/ax(40M)	3	—	11
	WLAN802.11 a/n/ac/ax(20M) 5.2G	36	—	48
	WLAN802.11 n/ac/ax(40M) 5.2G	38	—	46
	WLAN802.11 ac/ax(80M) 5.2G	42		
	WLAN802.11 ac/ax(160M) 5.2G	50		
	WLAN802.11 a/n/ac/ax(20M) 5.3G	52	—	64
	WLAN802.11 n/ac/ax(40M) 5.3G	54	—	62
	WLAN802.11 ac/ax(80M) 5.3G	58		
	WLAN802.11 a/n/ac/ax(20M) 5.6G	100	—	144
	WLAN802.11 n/ac/ax(40M) 5.6G	102	—	142
	WLAN802.11 ac/ax(80M) 5.6G	106	—	138
	WLAN802.11 ac/ax(160M) 5.6G	114		
	WLAN802.11 a/n/ac/ax(20M) 5.8G	149	—	165
	WLAN802.11 n/ac/ax(40M) 5.8G	151	—	159
	WLAN802.11 ac/ax(80M) 5.8G	155		
	Bluetooth	0	—	78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

HB

Max. SAR (1 g) (Unit: W/Kg)				
Band	Measured	Reported	Channel	Position
WCDMA Band II	0.00	0.00	9262	Bottom Surface
WCDMA Band IV	0.02	0.02	1513	Bottom Surface
WCDMA Band V	0.00	0.01	4183	Bottom Surface
LTE FDD Band 2	0.04	0.05	18700	Bottom Surface
LTE FDD Band 4	0.01	0.01	20175	Bottom Surface
LTE FDD Band 5	0.02	0.02	20600	Bottom Surface
LTE FDD Band 7	0.04	0.04	20850	Bottom Surface
LTE FDD Band 12	0.02	0.02	23095	Bottom Surface
LTE FDD Band 13	0.02	0.03	23230	Bottom Surface
LTE FDD Band 17	0.02	0.03	23800	Bottom Surface
LTE FDD Band 26	0.02	0.03	26865	Bottom Surface
LTE FDD Band 30	0.02	0.03	27710	Bottom Surface
LTE TDD Band 38	0.04	0.05	37850	Bottom Surface
LTE TDD Band 41	0.06	0.07	40620	Bottom Surface
LTE FDD Band 66	0.05	0.06	132072	Bottom Surface

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

SPEED

Max. SAR (1 g) (Unit: W/Kg)				
Band	Measured	Reported	Channel	Position
WCDMA Band II	0.03	0.04	9262	Bottom Surface
WCDMA Band IV	0.03	0.04	1513	Bottom Surface
WCDMA Band V	0.02	0.02	4183	Bottom Surface
LTE FDD Band 2	0.02	0.03	18700	Bottom Surface
LTE FDD Band 4	0.05	0.05	20175	Bottom Surface
LTE FDD Band 5	0.02	0.02	20600	Bottom Surface
LTE FDD Band 7	0.04	0.04	20850	Bottom Surface
LTE FDD Band 12	0.02	0.03	23095	Bottom Surface
LTE FDD Band 13	0.02	0.02	23230	Bottom Surface
LTE FDD Band 17	0.02	0.02	23800	Bottom Surface
LTE FDD Band 26	0.01	0.01	26865	Bottom Surface
LTE FDD Band 30	0.03	0.05	27710	Bottom Surface
LTE TDD Band 38	0.04	0.05	37850	Bottom Surface
LTE TDD Band 41	0.04	0.05	40620	Bottom Surface
LTE FDD Band 66	0.03	0.04	132072	Bottom Surface

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Antenna Information

HB

Gain table(dBi)	
Antenna	WWAN Main
Part Number	DC33002JE0L
Mode	NB
WCDMA BII (1852.4-1907.6)	1.93
WCDMA BIV (1712.4-1752.6)	2.94
WCDMA BV (826.4-846.6)	0.89
LTE Band 2 (1860-1900)	1.93
LTE Band 4 (1720-1745)	2.78
LTE Band 5 (829-844)	0.89
LTE Band 7 (2510-2535)	2.98
LTE Band 12 (704-711)	0.51
LTE Band 13 (782)	0.71
LTE Band 17 (709-711)	0.51
LTE Band 26 (821.5-841.5)	0.89
LTE Band 30 (2310)	2.61
LTE Band 38 (2580-2610)	2.73
LTE Band 41 (2506-2680)	2.98
LTE Band 66 (1720-1770)	2.94

SPEED

Gain table(dBi)	
Antenna	WWAN Main
Part Number	DC33002IR2L
Mode	NB
WCDMA BII (1852.4-1907.6)	2.72
WCDMA BIV (1712.4-1752.6)	1.42
WCDMA BV (826.4-846.6)	-1.58
LTE Band 2 (1860-1900)	2.72
LTE Band 4 (1720-1745)	1.07
LTE Band 5 (829-844)	-1.58
LTE Band 7 (2510-2535)	1.48
LTE Band 12 (704-711)	-1.94
LTE Band 13 (782)	1.18
LTE Band 17 (709-711)	-2.02
LTE Band 26 (821.5-841.5)	-0.87
LTE Band 30 (2310)	1.93
LTE Band 38 (2580-2610)	0.99
LTE Band 41 (2506-2680)	1.48
LTE Band 66 (1720-1770)	2.04

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

WCDMA Band II / Band IV / Band V - HSDPA / HSUPA / HSPA+ / DC-HSDPA conducted power table:

Unit: dBm

Band		WCDMA II		
TX Channel		9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
Max. Rated Avg. Power+Max. Tolerance (dBm)		24.50		
3GPP Rel 99	RMC 12.2Kbps	23.69	23.56	23.49
	HSDPA Subtest-1	22.64	22.55	22.46
3GPP Rel 5	HSDPA Subtest-2	22.62	22.53	22.39
	HSDPA Subtest-3	22.10	22.03	22.04
	HSDPA Subtest-4	22.05	22.02	22.08
	HSDPA Subtest-5	22.51	22.53	22.43
3GPP Rel 6	HSUPA Subtest-1	22.45	22.42	22.34
	HSUPA Subtest-2	20.87	20.89	20.80
	HSUPA Subtest-3	21.92	21.93	21.81
	HSUPA Subtest-4	20.83	20.86	20.89
3GPP Rel 7	HSPA+	20.11	19.97	19.89
3GPP Rel 8	DC-HSDPA Subtest-1	22.56	22.52	22.42
	DC-HSDPA Subtest-2	22.61	22.49	22.29
	DC-HSDPA Subtest-3	22.07	21.96	21.99
	DC-HSDPA Subtest-4	22.02	22.02	22.03
Band		WCDMA IV		
TX Channel		1312	1413	1513
Frequency (MHz)		1712.4	1732.6	1752.6
Max. Rated Avg. Power+Max. Tolerance (dBm)		24.50		
3GPP Rel 99	RMC 12.2Kbps	23.35	23.42	23.46
	HSDPA Subtest-1	22.26	22.29	22.41
3GPP Rel 5	HSDPA Subtest-2	22.24	22.33	22.38
	HSDPA Subtest-3	22.37	22.48	22.32
	HSDPA Subtest-4	22.13	22.20	22.25
	HSDPA Subtest-5	22.76	22.79	22.84
3GPP Rel 6	HSUPA Subtest-1	22.76	22.79	22.84
	HSUPA Subtest-2	20.95	20.98	20.92
	HSUPA Subtest-3	21.93	21.91	21.97
	HSUPA Subtest-4	20.86	20.84	20.82
3GPP Rel 7	HSPA+	19.85	19.83	19.92
3GPP Rel 8	DC-HSDPA Subtest-1	22.23	22.22	22.40
	DC-HSDPA Subtest-2	22.17	22.25	22.30
	DC-HSDPA Subtest-3	22.30	22.38	22.26
	DC-HSDPA Subtest-4	22.13	22.16	22.15
Band		WCDMA V		
TX Channel		4132	4183	4233
Frequency (MHz)		826.4	836.6	846.6
Max. Rated Avg. Power+Max. Tolerance (dBm)		24.50		
3GPP Rel 99	RMC 12.2Kbps	23.53	23.55	23.47
	HSDPA Subtest-1	22.51	22.50	22.43
3GPP Rel 5	HSDPA Subtest-2	22.50	22.47	22.41
	HSDPA Subtest-3	22.30	22.41	22.47
	HSDPA Subtest-4	22.22	22.41	22.24
	HSDPA Subtest-5	22.93	22.95	22.69
3GPP Rel 6	HSUPA Subtest-1	22.93	22.95	22.69
	HSUPA Subtest-2	20.73	20.83	20.63
	HSUPA Subtest-3	21.49	22.00	21.30
	HSUPA Subtest-4	20.97	20.97	20.99
3GPP Rel 7	HSPA+	20.00	19.98	19.87
3GPP Rel 8	DC-HSDPA Subtest-1	22.47	22.44	22.35
	DC-HSDPA Subtest-2	22.44	22.43	22.36
	DC-HSDPA Subtest-3	22.20	22.34	22.40
	DC-HSDPA Subtest-4	22.19	22.37	22.19

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Sub-Test for HSDPA

SUB-TEST	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15	15/15	64	12/15	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Sub-Test for HSUPA

SUB-TEST	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE FDD Band 2 / Band 4 / Band 5 / Band 7 / Band 12 / Band 13 / Band 14 / Band 17 / Band 25 / Band 26 / Band 30 / Band 66 power table:

LTE Band 2								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1860	1880	1900		
Channel				18700	18900	19100		
20	QPSK	1	0	22.99	22.66	22.58	24.00	0
		1	50	22.53	22.63	22.35	24.00	0
		1	99	22.60	22.33	22.42	24.00	0
		50	0	21.62	21.62	21.30	23.00	1
		50	25	21.59	21.63	21.40	23.00	1
		50	50	21.51	21.62	21.63	23.00	1
		100	0	21.71	21.74	21.57	23.00	1
	16-QAM	1	0	21.98	21.73	21.35	23.00	1
		1	50	21.73	21.80	21.56	23.00	1
		1	99	21.96	21.48	21.92	23.00	1
		50	0	20.59	20.68	20.32	22.00	2
		50	25	20.74	20.68	20.40	22.00	2
		50	50	20.55	20.70	20.52	22.00	2
		100	0	20.63	20.80	20.68	22.00	2
	64-QAM	1	0	20.98	20.99	20.97	22.00	2
		1	50	20.93	20.95	20.96	22.00	2
		1	99	20.31	20.42	20.51	22.00	2
		50	0	19.65	19.66	19.64	21.00	3
		50	25	19.60	19.62	19.63	21.00	3
		50	50	19.18	19.09	19.18	21.00	3
		100	0	19.13	19.12	19.01	21.00	3
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				1857.5	1880	1902.5		
Channel				18675	18900	19125		
15	QPSK	1	0	22.97	22.63	22.55	24.00	0
		1	36	22.45	22.58	22.31	24.00	0
		1	74	22.54	22.27	22.36	24.00	0
		36	0	21.56	21.55	21.23	23.00	1
		36	18	21.52	21.54	21.39	23.00	1
		36	37	21.51	21.54	21.58	23.00	1
		75	0	21.71	21.66	21.56	23.00	1
	16-QAM	1	0	21.94	21.66	21.34	23.00	1
		1	36	21.69	21.78	21.48	23.00	1
		1	74	21.91	21.40	21.91	23.00	1
		36	0	20.49	20.67	20.24	22.00	2
		36	18	20.65	20.67	20.33	22.00	2
		36	37	20.48	20.69	20.52	22.00	2
		75	0	20.54	20.73	20.67	22.00	2
	64-QAM	1	0	20.91	20.93	20.91	22.00	2
		1	36	20.83	20.93	20.91	22.00	2
		1	74	20.27	20.34	20.42	22.00	2
		36	0	19.65	19.57	19.55	21.00	3
		36	18	19.57	19.52	19.60	21.00	3
		36	37	19.06	19.03	19.16	21.00	3
		75	0	19.05	19.11	19.08	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 2								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			1855	1880	1905			
Channel			18650	18900	19150			
10	QPSK	1	0	22.92	22.57	22.52	24.00	0
		1	25	22.46	22.61	22.27	24.00	0
		1	49	22.54	22.23	22.39	24.00	0
		25	0	21.57	21.59	21.22	23.00	1
		25	12	21.50	21.53	21.40	23.00	1
		25	25	21.45	21.62	21.55	23.00	1
	16-QAM	50	0	21.69	21.68	21.51	23.00	1
		1	0	21.93	21.65	21.26	23.00	1
		1	25	21.70	21.77	21.48	23.00	1
		1	49	21.89	21.43	21.85	23.00	1
		25	0	20.56	20.67	20.31	22.00	2
		25	12	20.65	20.61	20.37	22.00	2
	64-QAM	25	25	20.50	20.64	20.49	22.00	2
		50	0	20.58	20.76	20.59	22.00	2
		1	0	20.91	20.97	20.93	22.00	2
		1	25	20.87	20.88	20.93	22.00	2
		1	49	20.23	20.39	20.50	22.00	2
		25	0	19.62	19.66	19.57	21.00	3
		25	12	19.57	19.56	19.62	21.00	3
		25	25	19.12	19.07	19.14	21.00	3
		50	0	19.05	19.06	19.02	21.00	3
Frequency (MHz)			1852.5	1880	1907.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			18625	18900	19175			
5	QPSK	1	0	22.89	22.59	22.49	24.00	0
		1	12	22.47	22.53	22.34	24.00	0
		1	24	22.56	22.26	22.34	24.00	0
		12	0	21.54	21.55	21.27	23.00	1
		12	6	21.50	21.61	21.36	23.00	1
		12	13	21.50	21.61	21.59	23.00	1
	16-QAM	25	0	21.62	21.73	21.52	23.00	1
		1	0	21.96	21.66	21.31	23.00	1
		1	12	21.72	21.72	21.51	23.00	1
		1	24	21.92	21.42	21.90	23.00	1
		12	0	20.53	20.64	20.25	22.00	2
		12	6	20.68	20.60	20.36	22.00	2
	64-QAM	12	13	20.51	20.69	20.48	22.00	2
		25	0	20.55	20.71	20.64	22.00	2
		1	0	20.93	20.96	20.93	22.00	2
		1	12	20.87	20.93	20.90	22.00	2
		1	24	20.29	20.35	20.48	22.00	2
		12	0	19.60	19.58	19.59	21.00	3
		12	6	19.50	19.52	19.59	21.00	3
		12	13	19.14	19.07	19.16	21.00	3
		25	0	19.07	19.02	19.05	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 2								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			1851.5	1880	1908.5			
Channel			18615	18900	19185			
3	QPSK	1	0	22.88	22.59	22.40	24.00	0
		1	7	22.40	22.51	22.26	24.00	0
		1	14	22.49	22.22	22.27	24.00	0
		8	0	21.48	21.48	21.27	23.00	1
		8	4	21.46	21.60	21.33	23.00	1
		8	7	21.41	21.56	21.54	23.00	1
	16-QAM	15	0	21.55	21.72	21.52	23.00	1
		1	0	21.87	21.58	21.26	23.00	1
		1	7	21.66	21.62	21.42	23.00	1
		1	14	21.89	21.41	21.83	23.00	1
		8	0	20.43	20.59	20.20	22.00	2
		8	4	20.67	20.54	20.32	22.00	2
	64-QAM	8	7	20.46	20.67	20.40	22.00	2
		15	0	20.45	20.66	20.58	22.00	2
		1	0	20.91	20.92	20.92	22.00	2
		1	7	20.78	20.83	20.83	22.00	2
		1	14	20.26	20.27	20.39	22.00	2
		8	0	19.52	19.55	19.57	21.00	3
		8	4	19.44	19.51	19.54	21.00	3
		8	7	19.13	19.19	19.07	21.00	3
		15	0	19.07	19.05	19.04	21.00	3
Frequency (MHz)			1850.7	1880	1909.3	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			18607	18900	19193			
1.4	QPSK	1	0	22.85	22.58	22.42	24.00	0
		1	2	22.44	22.43	22.28	24.00	0
		1	5	22.51	22.16	22.34	24.00	0
		3	0	22.84	22.56	22.38	24.00	0
		3	2	22.36	22.35	22.19	24.00	0
		3	3	22.42	22.11	22.31	24.00	0
		6	0	21.58	21.70	21.44	23.00	1
	16-QAM	1	0	21.93	21.56	21.21	23.00	1
		1	2	21.71	21.72	21.48	23.00	1
		1	5	21.86	21.41	21.88	23.00	1
		3	0	21.90	21.46	21.20	23.00	1
		3	2	21.68	21.68	21.40	23.00	1
		3	3	21.86	21.31	21.81	23.00	1
		6	0	20.51	20.64	20.55	22.00	2
	64-QAM	1	0	20.86	20.95	20.86	22.00	2
		1	2	20.84	20.91	20.81	22.00	2
		1	5	20.23	20.32	20.48	22.00	2
		3	0	20.83	20.92	20.82	22.00	2
		3	2	20.76	20.81	20.76	22.00	2
		3	3	20.13	20.23	20.40	22.00	2
		6	0	19.44	19.42	19.44	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 4								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			1720	1732.5	1745			
Channel			20050	20175	20300			
20	QPSK	1	0	23.12	23.48	23.04	24.00	0
		1	50	22.35	22.07	22.51	24.00	0
		1	99	22.33	22.47	22.63	24.00	0
		50	0	21.62	21.32	21.39	23.00	1
		50	25	21.56	21.23	21.45	23.00	1
		50	50	21.44	21.20	21.54	23.00	1
	16-QAM	100	0	21.62	21.42	21.69	23.00	1
		1	0	21.52	21.91	21.41	23.00	1
		1	50	21.81	21.52	21.81	23.00	1
		1	99	21.88	21.64	22.33	23.00	1
		50	0	20.64	20.39	20.40	22.00	2
		50	25	20.54	20.22	20.51	22.00	2
	64-QAM	50	50	20.46	20.33	20.58	22.00	2
		100	0	20.57	20.41	20.77	22.00	2
		1	0	20.44	20.91	20.35	22.00	2
		1	50	20.81	20.50	20.74	22.00	2
		1	99	20.83	20.60	21.32	22.00	2
		50	0	19.62	19.38	19.37	21.00	3
		50	25	19.53	19.16	19.51	21.00	3
		50	50	19.43	19.30	19.56	21.00	3
		100	0	19.50	19.37	19.73	21.00	3
Frequency (MHz)			1717.5	1732.5	1747.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			20025	20175	20325			
15	QPSK	1	0	23.10	23.39	22.93	24.00	0
		1	36	22.31	22.29	22.42	24.00	0
		1	74	22.27	22.38	22.53	24.00	0
		36	0	21.57	21.25	21.28	23.00	1
		36	18	21.50	21.19	21.39	23.00	1
		36	37	21.34	21.20	21.44	23.00	1
		75	0	21.62	21.38	21.63	23.00	1
	16-QAM	1	0	21.48	21.88	21.32	23.00	1
		1	36	21.78	21.51	21.75	23.00	1
		1	74	21.80	21.64	22.25	23.00	1
		36	0	20.54	20.28	20.37	22.00	2
		36	18	20.51	20.14	20.50	22.00	2
		36	37	20.39	20.30	20.58	22.00	2
		75	0	20.56	20.41	20.68	22.00	2
	64-QAM	1	0	20.36	20.89	20.34	22.00	2
		1	36	20.80	20.50	20.67	22.00	2
		1	74	20.73	20.57	21.31	22.00	2
		36	0	19.62	19.32	19.35	21.00	3
		36	18	19.47	19.10	19.48	21.00	3
		36	37	19.35	19.20	19.49	21.00	3
		75	0	19.41	19.31	19.72	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 4								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			1715	1732.5	1750			
Channel			20000	20175	20350			
10	QPSK	1	0	23.06	23.36	23.02	24.00	0
		1	25	22.26	22.27	22.49	24.00	0
		1	49	22.31	22.42	22.58	24.00	0
		25	0	21.52	21.29	21.30	23.00	1
		25	12	21.54	21.21	21.34	23.00	1
		25	25	21.40	21.18	21.54	23.00	1
	16-QAM	50	0	21.54	21.34	21.60	23.00	1
		1	0	21.43	21.86	21.35	23.00	1
		1	25	21.75	21.48	21.71	23.00	1
		1	49	21.77	21.61	22.26	23.00	1
		25	0	20.63	20.30	20.33	22.00	2
		25	12	20.44	20.18	20.47	22.00	2
	64-QAM	25	25	20.43	20.28	20.56	22.00	2
		50	0	20.47	20.34	20.74	22.00	2
		1	0	20.40	20.82	20.35	22.00	2
		1	25	20.73	20.44	20.72	22.00	2
		1	49	20.76	20.56	21.30	22.00	2
		25	0	19.58	19.36	19.26	21.00	3
		25	12	19.50	19.09	19.47	21.00	3
		25	25	19.34	19.23	19.51	21.00	3
	Frequency (MHz)			1712.5	1732.5	1752.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Channel			19975	20175	20375			
5	QPSK	1	0	23.10	23.29	22.94	24.00	0
		1	12	22.34	22.02	22.46	24.00	0
		1	24	22.24	22.42	22.58	24.00	0
		12	0	21.60	21.27	21.34	23.00	1
		12	6	21.47	21.14	21.44	23.00	1
		12	13	21.42	21.16	21.47	23.00	1
		25	0	21.53	21.32	21.69	23.00	1
	16-QAM	1	0	21.46	21.81	21.32	23.00	1
		1	12	21.75	21.48	21.80	23.00	1
		1	24	21.78	21.55	22.31	23.00	1
		12	0	20.64	20.37	20.31	22.00	2
		12	6	20.47	20.20	20.43	22.00	2
		12	13	20.37	20.25	20.53	22.00	2
		25	0	20.51	20.39	20.69	22.00	2
	64-QAM	1	0	20.41	20.84	20.26	22.00	2
		1	12	20.81	20.42	20.67	22.00	2
		1	24	20.79	20.55	21.22	22.00	2
		12	0	19.60	19.34	19.26	21.00	3
		12	6	19.43	19.07	19.47	21.00	3
		12	13	19.39	19.27	19.47	21.00	3
		25	0	19.47	19.36	19.67	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 4								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			1711.5	1732.5	1753.5			
Channel			19965	20175	20385			
3	QPSK	1	0	23.05	23.20	22.90	24.00	0
		1	7	22.28	22.25	22.42	24.00	0
		1	14	22.23	22.39	22.56	24.00	0
		8	0	21.53	21.26	21.30	23.00	1
		8	4	21.46	21.09	21.44	23.00	1
		8	7	21.39	21.07	21.37	23.00	1
	16-QAM	15	0	21.49	21.30	21.60	23.00	1
		1	0	21.43	21.76	21.31	23.00	1
		1	7	21.69	21.41	21.71	23.00	1
		1	14	21.71	21.50	22.25	23.00	1
		8	0	20.54	20.37	20.26	22.00	2
		8	4	20.43	20.14	20.35	22.00	2
	64-QAM	8	7	20.35	20.23	20.50	22.00	2
		15	0	20.41	20.39	20.68	22.00	2
		1	0	20.32	20.83	20.21	22.00	2
		1	7	20.78	20.41	20.62	22.00	2
		1	14	20.74	20.51	21.16	22.00	2
		8	0	19.57	19.24	19.18	21.00	3
		8	4	19.37	19.01	19.46	21.00	3
		8	7	19.31	19.20	19.38	21.00	3
		15	0	19.40	19.31	19.65	21.00	3
Frequency (MHz)			1710.7	1732.5	1754.3	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			19957	20175	20393			
1.4	QPSK	1	0	23.02	23.21	22.93	24.00	0
		1	2	22.29	22.01	22.40	24.00	0
		1	5	22.16	22.39	22.52	24.00	0
		3	0	22.98	23.11	22.87	24.00	0
		3	2	22.27	22.00	22.40	24.00	0
		3	3	22.09	22.39	22.44	24.00	0
	16-QAM	6	0	21.85	21.71	22.05	23.00	1
		1	0	21.78	22.17	21.68	23.00	1
		1	2	22.06	21.79	22.16	23.00	1
		1	5	21.98	21.91	22.06	23.00	1
		3	0	21.68	22.07	21.63	23.00	1
		3	2	22.00	21.76	22.07	23.00	1
	64-QAM	3	3	21.91	21.88	21.98	23.00	1
		6	0	20.89	20.75	21.03	22.00	2
		1	0	20.77	21.15	20.62	22.00	2
		1	2	21.21	20.79	20.98	22.00	2
		1	5	21.19	20.90	20.84	22.00	2
		3	0	20.72	21.14	20.54	22.00	2
		3	2	21.16	20.69	20.91	22.00	2
		3	3	21.11	20.85	20.76	22.00	2
		6	0	19.79	19.75	20.04	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 5								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			829	836.5	844			
Channel			20450	20525	20600			
10	QPSK	1	0	23.12	23.15	23.17	24.00	0
		1	25	23.03	23.07	23.03	24.00	0
		1	49	23.00	23.04	23.06	24.00	0
		25	0	22.08	22.02	22.08	23.00	1
		25	12	22.06	22.06	22.01	23.00	1
		25	25	22.00	22.06	22.05	23.00	1
	16-QAM	50	0	22.03	22.06	22.02	23.00	1
		1	0	22.00	22.04	22.00	23.00	1
		1	25	22.07	22.00	22.08	23.00	1
		1	49	22.02	22.05	22.03	23.00	1
		25	0	22.00	21.04	21.01	22.00	2
		25	12	21.01	21.00	21.00	22.00	2
	64-QAM	25	25	21.02	21.09	21.08	22.00	2
		50	0	21.02	21.04	21.02	22.00	2
		1	0	21.16	21.15	21.19	22.00	2
		1	25	21.22	21.10	21.27	22.00	2
		1	49	21.12	21.20	21.20	22.00	2
		25	0	20.16	20.14	20.12	21.00	3
		25	12	20.13	20.12	20.18	21.00	3
		25	25	20.17	20.20	20.23	21.00	3
	Frequency (MHz)			826.5	836.5	846.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Channel			20425	20525	20625			
5	QPSK	1	0	23.08	23.10	23.05	24.00	0
		1	12	23.03	23.08	23.05	24.00	0
		1	24	23.08	23.03	23.08	24.00	0
		12	0	22.04	22.01	22.04	23.00	1
		12	6	22.01	22.04	22.02	23.00	1
		12	13	22.02	22.00	22.04	23.00	1
	16-QAM	25	0	22.08	22.04	22.03	23.00	1
		1	0	22.00	22.01	22.05	23.00	1
		1	12	22.07	22.09	22.03	23.00	1
		1	24	22.03	22.06	22.00	23.00	1
		12	0	21.00	21.06	21.04	22.00	2
		12	6	21.05	21.06	21.03	22.00	2
		12	13	21.02	21.00	21.05	22.00	2
		25	0	21.05	21.01	21.02	22.00	2
	64-QAM	1	0	21.20	21.21	21.18	22.00	2
		1	12	21.25	21.20	21.13	22.00	2
		1	24	21.17	21.26	21.18	22.00	2
		12	0	20.15	20.20	20.22	21.00	3
		12	6	20.15	20.20	20.18	21.00	3
		12	13	20.12	20.13	20.22	21.00	3
		25	0	20.19	20.18	20.17	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 5								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			825.5	836.5	847.5			
Channel			20415	20525	20635			
3	QPSK	1	0	22.85	22.87	22.83	24.00	0
		1	7	22.78	22.74	22.71	24.00	0
		1	14	22.72	22.75	22.70	24.00	0
		8	0	21.71	21.76	21.71	23.00	1
		8	4	21.75	21.78	21.75	23.00	1
		8	7	21.72	21.70	21.75	23.00	1
	16-QAM	15	0	21.75	21.77	21.78	23.00	1
		1	0	21.75	21.76	21.70	23.00	1
		1	7	21.77	21.78	21.69	23.00	1
		1	14	21.72	21.77	21.76	23.00	1
		8	0	20.77	20.77	20.73	22.00	2
		8	4	20.78	20.69	20.71	22.00	2
	64-QAM	8	7	20.74	20.69	20.70	22.00	2
		15	0	20.77	20.70	20.77	22.00	2
		1	0	20.68	20.74	20.67	22.00	2
		1	7	20.68	20.68	20.63	22.00	2
		1	14	20.62	20.67	20.72	22.00	2
		8	0	19.70	19.75	19.71	21.00	3
		8	4	19.70	19.63	19.63	21.00	3
		8	7	19.65	19.60	19.60	21.00	3
		15	0	19.77	19.61	19.68	21.00	3
Frequency (MHz)			824.7	836.5	848.3	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			20407	20525	20643			
1.4	QPSK	1	0	22.65	22.67	22.62	24.00	0
		1	2	22.54	22.52	22.57	24.00	0
		1	5	22.52	22.53	22.55	24.00	0
		3	0	22.53	22.56	22.53	24.00	0
		3	2	22.57	22.49	22.51	24.00	0
		3	3	22.53	22.58	22.50	24.00	0
	16-QAM	6	0	21.52	21.55	21.50	23.00	1
		1	0	21.51	21.55	21.49	23.00	1
		1	2	21.53	21.49	21.52	23.00	1
		1	5	21.53	21.57	21.51	23.00	1
		3	0	21.56	21.52	21.52	23.00	1
		3	2	21.52	21.57	21.55	23.00	1
	64-QAM	3	3	21.57	21.58	21.53	23.00	1
		6	0	20.55	20.57	20.51	22.00	2
		1	0	20.48	20.46	20.44	22.00	2
		1	2	20.50	20.40	20.43	22.00	2
		1	5	20.46	20.47	20.49	22.00	2
		3	0	20.51	20.45	20.42	22.00	2
		3	2	20.44	20.48	20.53	22.00	2
		3	3	20.52	20.58	20.43	22.00	2
		6	0	19.49	19.57	19.44	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 7								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			2510	2535	2560			
Channel			20850	21100	21350			
20	QPSK	1	0	23.49	23.01	23.12	24.00	0
		1	50	22.47	22.21	22.20	24.00	0
		1	99	22.45	22.52	22.41	24.00	0
		50	0	21.47	21.15	21.26	23.00	1
		50	25	21.50	21.25	21.26	23.00	1
		50	50	21.53	21.34	21.43	23.00	1
	16-QAM	100	0	21.54	21.48	21.32	23.00	1
		1	0	21.31	21.52	21.40	23.00	1
		1	50	21.66	21.56	21.31	23.00	1
		1	99	22.01	21.82	21.66	23.00	1
		50	0	20.54	20.24	20.34	22.00	2
		50	25	20.56	20.26	20.27	22.00	2
	64-QAM	50	50	20.57	20.45	20.50	22.00	2
		100	0	20.57	20.47	20.37	22.00	2
		1	0	20.22	20.43	20.31	22.00	2
		1	50	20.57	20.47	20.22	22.00	2
		1	99	20.92	20.73	20.57	22.00	2
		50	0	19.45	19.15	19.25	21.00	3
		50	25	19.47	19.17	19.18	21.00	3
		50	50	19.48	19.36	19.41	21.00	3
	Frequency (MHz)			2507.5	2535	2562.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Channel			20825	21100	21375			
15	QPSK	1	0	23.30	22.80	22.88	24.00	0
		1	36	22.31	22.01	22.02	24.00	0
		1	74	22.26	22.29	22.24	24.00	0
		36	0	21.27	21.22	21.01	23.00	1
		36	18	21.34	21.01	21.04	23.00	1
		36	37	21.34	21.16	21.19	23.00	1
	16-QAM	75	0	21.34	21.25	21.16	23.00	1
		1	0	21.12	21.29	21.17	23.00	1
		1	36	21.43	21.39	21.15	23.00	1
		1	74	21.77	21.63	21.48	23.00	1
		36	0	20.31	20.08	20.09	22.00	2
		36	18	20.33	20.07	20.06	22.00	2
	64-QAM	36	37	20.36	20.23	20.28	22.00	2
		75	0	20.32	20.30	20.14	22.00	2
		1	0	20.06	20.19	20.09	22.00	2
		1	36	20.41	20.22	20.19	22.00	2
		1	74	20.70	20.56	20.38	22.00	2
		36	0	19.27	19.18	19.05	21.00	3
		36	18	19.24	19.23	19.02	21.00	3
		36	37	19.27	19.13	19.25	21.00	3
	Frequency (MHz)			2507.5	2535	2562.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Channel			20825	21100	21375			
15	QPSK	1	0	23.30	22.80	22.88	24.00	0
		1	36	22.31	22.01	22.02	24.00	0
		1	74	22.26	22.29	22.24	24.00	0
		36	0	21.27	21.22	21.01	23.00	1
		36	18	21.34	21.01	21.04	23.00	1
		36	37	21.34	21.16	21.19	23.00	1
	16-QAM	75	0	21.34	21.25	21.16	23.00	1
		1	0	21.12	21.29	21.17	23.00	1
		1	36	21.43	21.39	21.15	23.00	1
		1	74	21.77	21.63	21.48	23.00	1
		36	0	20.31	20.08	20.09	22.00	2
		36	18	20.33	20.07	20.06	22.00	2
	64-QAM	36	37	20.36	20.23	20.28	22.00	2
		75	0	20.32	20.30	20.14	22.00	2
		1	0	20.06	20.19	20.09	22.00	2
		1	36	20.41	20.22	20.19	22.00	2
		1	74	20.70	20.56	20.38	22.00	2
		36	0	19.27	19.18	19.05	21.00	3
		36	18	19.24	19.23	19.02	21.00	3
		36	37	19.27	19.13	19.25	21.00	3
	Frequency (MHz)			2507.5	2535	2562.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Channel			20825	21100	21375			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 7								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			2505	2535	2565			
Channel			20800	21100	21400			
10	QPSK	1	0	23.25	22.84	22.87	24.00	0
		1	25	22.27	22.01	22.18	24.00	0
		1	49	22.25	22.30	22.21	24.00	0
		25	0	21.29	21.13	21.10	23.00	1
		25	12	21.26	21.07	21.06	23.00	1
		25	25	21.32	21.12	21.22	23.00	1
	16-QAM	50	0	21.32	21.27	21.11	23.00	1
		1	0	21.08	21.34	21.17	23.00	1
		1	25	21.43	21.35	21.13	23.00	1
		1	49	21.82	21.67	21.46	23.00	1
		25	0	20.32	20.04	20.19	22.00	2
		25	12	20.36	20.03	20.11	22.00	2
	64-QAM	25	25	20.36	20.22	20.28	22.00	2
		50	0	20.37	20.30	20.15	22.00	2
		1	0	20.28	20.26	20.08	22.00	2
		1	25	20.37	20.25	20.00	22.00	2
		1	49	20.74	20.58	20.37	22.00	2
		25	0	19.22	19.15	19.03	21.00	3
		25	12	19.30	19.00	19.19	21.00	3
		25	25	19.29	19.12	19.20	21.00	3
		50	0	19.29	19.16	19.04	21.00	3
Frequency (MHz)			2502.5	2535	2567.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			20775	21100	21425			
5	QPSK	1	0	23.01	22.66	22.66	24.00	0
		1	12	22.06	22.28	22.26	24.00	0
		1	24	22.04	22.13	22.17	24.00	0
		12	0	21.09	21.06	21.10	23.00	1
		12	6	21.05	21.02	21.06	23.00	1
		12	13	21.13	21.10	21.07	23.00	1
	16-QAM	25	0	21.08	21.11	21.02	23.00	1
		1	0	21.15	21.09	21.02	23.00	1
		1	12	21.19	21.20	21.05	23.00	1
		1	24	21.58	21.49	21.25	23.00	1
		12	0	20.11	20.12	20.09	22.00	2
		12	6	20.20	20.05	20.11	22.00	2
	64-QAM	12	13	20.15	20.05	20.06	22.00	2
		25	0	20.15	20.08	20.09	22.00	2
		1	0	20.21	20.01	20.06	22.00	2
		1	12	20.13	20.01	20.05	22.00	2
		1	24	20.54	20.34	20.16	22.00	2
		12	0	19.19	19.14	19.10	21.00	3
		12	6	19.14	19.06	19.08	21.00	3
		12	13	19.05	19.00	19.04	21.00	3
		25	0	19.07	19.03	19.06	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 12								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			704	707.5	711			
Channel			23060	23095	23130			
10	QPSK	1	0	22.95	22.98	22.97	24.00	0
		1	25	22.28	22.34	22.40	24.00	0
		1	49	22.30	22.46	22.23	24.00	0
		25	0	21.17	21.06	21.22	23.00	1
		25	12	21.16	21.30	21.32	23.00	1
		25	25	21.22	21.46	21.21	23.00	1
	16-QAM	50	0	21.11	21.40	21.32	23.00	1
		1	0	21.74	21.60	21.34	23.00	1
		1	25	21.51	21.29	21.52	23.00	1
		1	49	21.92	21.91	21.47	23.00	1
		25	0	20.25	20.24	20.41	22.00	2
		25	12	20.16	20.33	20.47	22.00	2
	64-QAM	25	25	20.39	20.38	20.29	22.00	2
		50	0	20.28	20.56	20.41	22.00	2
		1	0	20.09	20.04	20.06	22.00	2
		1	25	20.04	20.02	20.03	22.00	2
		1	49	20.22	20.25	20.01	22.00	2
		25	0	19.17	19.23	19.22	21.00	3
		25	12	19.10	19.14	19.01	21.00	3
		25	25	19.03	19.09	19.01	21.00	3
		50	0	19.09	19.07	19.03	21.00	3
Frequency (MHz)			701.5	707.5	713.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			23035	23095	23155			
5	QPSK	1	0	22.76	22.82	22.87	24.00	0
		1	12	22.21	22.23	22.24	24.00	0
		1	24	22.19	22.33	22.09	24.00	0
		12	0	21.06	21.18	21.08	23.00	1
		12	6	21.04	21.17	21.17	23.00	1
		12	13	21.05	21.26	21.03	23.00	1
	16-QAM	25	0	21.26	21.25	21.14	23.00	1
		1	0	21.61	21.45	21.23	23.00	1
		1	12	21.31	21.10	21.33	23.00	1
		1	24	21.80	21.76	21.31	23.00	1
		12	0	20.15	20.12	20.26	22.00	2
		12	6	20.19	20.22	20.29	22.00	2
	64-QAM	12	13	20.24	20.20	20.12	22.00	2
		25	0	20.14	20.38	20.30	22.00	2
		1	0	20.17	20.20	20.17	22.00	2
		1	12	20.15	20.14	20.10	22.00	2
		1	24	20.05	20.12	20.11	22.00	2
		12	0	19.34	19.35	19.33	21.00	3
		12	6	19.32	19.23	19.38	21.00	3
		12	13	19.30	19.21	19.14	21.00	3
		25	0	19.14	19.40	19.27	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 12								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			700.5	707.5	714.5			
Channel			23025	23095	23165			
3	QPSK	1	0	22.81	22.85	22.75	24.00	0
		1	7	22.19	22.12	22.21	24.00	0
		1	14	22.13	22.25	22.06	24.00	0
		8	0	21.08	21.11	21.08	23.00	1
		8	4	21.13	21.16	21.11	23.00	1
		8	7	21.01	21.28	21.03	23.00	1
	16-QAM	15	0	21.11	21.19	21.12	23.00	1
		1	0	21.57	21.44	21.18	23.00	1
		1	7	21.33	21.13	21.34	23.00	1
		1	14	21.74	21.73	21.33	23.00	1
		8	0	20.03	20.08	20.24	22.00	2
		8	4	20.17	20.20	20.29	22.00	2
	64-QAM	8	7	20.21	20.21	20.13	22.00	2
		15	0	20.13	20.37	20.23	22.00	2
		1	0	20.43	20.29	20.24	22.00	2
		1	7	20.14	20.16	20.14	22.00	2
		1	14	20.52	20.54	20.11	22.00	2
		8	0	19.36	19.36	19.50	21.00	3
		8	4	19.31	19.47	19.61	21.00	3
		8	7	19.54	19.50	19.49	21.00	3
		15	0	19.41	19.69	19.54	21.00	3
Frequency (MHz)			699.7	707.5	715.3	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			23017	23095	23173			
1.4	QPSK	1	0	22.66	22.68	22.65	24.00	0
		1	2	22.62	22.57	22.54	24.00	0
		1	5	22.65	22.49	22.67	24.00	0
		3	0	22.48	22.59	22.65	24.00	0
		3	2	22.60	22.66	22.45	24.00	0
		3	3	22.61	22.68	22.63	24.00	0
		6	0	21.53	21.86	21.82	23.00	1
	16-QAM	1	0	21.39	21.25	21.02	23.00	1
		1	2	21.22	21.19	21.21	23.00	1
		1	5	21.62	21.58	21.21	23.00	1
		3	0	21.13	21.17	21.27	23.00	1
		3	2	21.19	21.25	21.32	23.00	1
		3	3	21.23	21.27	21.21	23.00	1
		6	0	20.07	20.17	20.05	22.00	2
	64-QAM	1	0	20.81	20.63	20.30	22.00	2
		1	2	20.54	20.31	20.53	22.00	2
		1	5	20.83	20.88	20.42	22.00	2
		3	0	20.45	20.46	20.56	22.00	2
		3	2	20.38	20.53	20.67	22.00	2
		3	3	20.58	20.60	20.56	22.00	2
		6	0	19.30	19.50	19.41	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE Band 13								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			782	782	782			
Channel			23230	23230	23230			
10	QPSK	1	0	23.38	23.49	23.44	24.00	0
		1	25	22.61	22.69	22.65	24.00	0
		1	49	22.59	22.65	22.54	24.00	0
		25	0	21.40	21.49	21.45	23.00	1
		25	12	21.54	21.63	21.59	23.00	1
		25	25	21.52	21.58	21.46	23.00	1
	16-QAM	50	0	21.75	21.82	21.74	23.00	1
		1	0	21.45	21.54	21.50	23.00	1
		1	25	22.15	22.20	22.10	23.00	1
		1	49	21.80	21.94	21.84	23.00	1
		25	0	20.41	20.47	20.44	22.00	2
		25	12	20.50	20.60	20.52	22.00	2
	64-QAM	25	25	20.50	20.59	20.46	22.00	2
		50	0	20.60	20.66	20.55	22.00	2
		1	0	21.43	21.49	21.38	22.00	2
		1	25	21.22	21.36	21.32	22.00	2
		1	49	20.98	21.13	21.02	22.00	2
		25	0	20.28	20.36	20.25	21.00	3
		25	12	20.21	20.32	20.24	21.00	3
		25	25	20.04	20.13	20.10	21.00	3
		50	0	20.24	20.35	20.28	21.00	3
Frequency (MHz)			779.5	782	784.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			23205	23230	23255			
5	QPSK	1	0	23.28	23.41	23.32	24.00	0
		1	12	22.55	22.64	22.59	24.00	0
		1	24	22.53	22.53	22.46	24.00	0
		12	0	21.36	21.42	21.40	23.00	1
		12	6	21.43	21.58	21.51	23.00	1
		12	13	21.42	21.49	21.34	23.00	1
	16-QAM	25	0	21.62	21.73	21.63	23.00	1
		1	0	21.36	21.42	21.42	23.00	1
		1	12	22.05	22.16	22.00	23.00	1
		1	24	21.75	21.83	21.77	23.00	1
		12	0	20.29	20.40	20.33	22.00	2
		12	6	20.45	20.52	20.40	22.00	2
	64-QAM	12	13	20.40	20.54	20.43	22.00	2
		25	0	20.52	20.63	20.47	22.00	2
		1	0	21.30	21.37	21.30	22.00	2
		1	12	21.16	21.32	21.24	22.00	2
		1	24	20.91	21.09	20.94	22.00	2
		12	0	20.17	20.25	20.12	21.00	3
		12	6	20.14	20.22	20.15	21.00	3
		12	13	19.95	20.07	20.01	21.00	3
		25	0	20.15	20.30	20.20	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 17								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			709	710	711			
Channel			23780	23790	23800			
10	QPSK	1	0	22.85	22.91	22.97	24.00	0
		1	25	22.53	22.52	22.39	24.00	0
		1	49	22.32	22.38	22.30	24.00	0
		25	0	21.33	21.34	21.35	23.00	1
		25	12	21.42	21.45	21.39	23.00	1
		25	25	21.48	21.44	21.24	23.00	1
	16-QAM	50	0	21.41	21.37	21.39	23.00	1
		1	0	21.38	21.92	21.67	23.00	1
		1	25	21.87	21.50	21.20	23.00	1
		1	49	21.55	21.58	21.13	23.00	1
		25	0	20.42	20.49	20.51	22.00	2
		25	12	20.59	20.30	20.64	22.00	2
	64-QAM	25	25	20.68	20.43	20.41	22.00	2
		50	0	20.55	20.56	20.52	22.00	2
		1	0	20.24	20.78	20.53	22.00	2
		1	25	20.73	20.36	20.06	22.00	2
		1	49	20.41	20.44	20.39	22.00	2
		25	0	19.28	19.35	19.37	21.00	3
		25	12	19.45	19.16	19.50	21.00	3
		25	25	19.54	19.29	19.27	21.00	3
		50	0	19.41	19.42	19.38	21.00	3
Frequency (MHz)			706.5	710	713.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			23755	23790	23825			
5	QPSK	1	0	22.80	22.87	22.85	24.00	0
		1	12	22.50	22.49	22.29	24.00	0
		1	24	22.21	22.31	22.23	24.00	0
		12	0	21.28	21.25	21.22	23.00	1
		12	6	21.35	21.36	21.34	23.00	1
		12	13	21.42	21.35	21.15	23.00	1
	16-QAM	25	0	21.30	21.25	21.28	23.00	1
		1	0	21.32	21.88	21.55	23.00	1
		1	12	21.75	21.45	21.10	23.00	1
		1	24	21.43	21.45	21.09	23.00	1
		12	0	20.34	20.38	20.44	22.00	2
		12	6	20.54	20.24	20.58	22.00	2
	64-QAM	12	13	20.65	20.36	20.37	22.00	2
		25	0	20.47	20.53	20.43	22.00	2
		1	0	20.18	20.68	20.47	22.00	2
		1	12	20.64	20.27	20.01	22.00	2
		1	24	20.32	20.34	20.22	22.00	2
		12	0	19.24	19.24	19.34	21.00	3
		12	6	19.36	19.06	19.43	21.00	3
		12	13	19.50	19.18	19.14	21.00	3
		25	0	19.29	19.34	19.31	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 26								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			821.5	831.5	841.5			
Channel			26765	26865	26965			
15	QPSK	1	0	22.84	22.99	22.91	24.00	0
		1	36	22.50	22.31	22.28	24.00	0
		1	74	22.46	22.35	22.31	24.00	0
		36	0	21.36	21.47	21.31	23.00	1
		36	18	21.40	21.33	21.43	23.00	1
		36	37	21.52	21.30	21.41	23.00	1
		75	0	21.63	21.40	21.63	23.00	1
	16-QAM	1	0	21.69	21.88	21.78	23.00	1
		1	36	21.83	21.20	21.83	23.00	1
		1	74	21.39	21.98	21.71	23.00	1
		36	0	20.40	20.55	20.28	22.00	2
		36	18	20.54	20.38	20.40	22.00	2
		36	37	20.67	20.35	20.45	22.00	2
		75	0	20.72	20.50	20.56	22.00	2
	64-QAM	1	0	20.48	20.70	20.50	22.00	2
		1	36	20.64	20.66	20.57	22.00	2
		1	74	20.19	20.79	20.47	22.00	2
		36	0	19.16	19.35	19.10	21.00	3
		36	18	19.31	19.20	19.12	21.00	3
		36	37	19.43	19.15	19.24	21.00	3
		75	0	19.49	19.22	19.35	21.00	3
Frequency (MHz)			819	831.5	844	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			26740	26865	26990			
10	QPSK	1	0	22.72	22.86	22.78	24.00	0
		1	25	22.39	22.19	22.19	24.00	0
		1	49	22.36	22.26	22.23	24.00	0
		25	0	21.22	21.38	21.23	23.00	1
		25	12	21.27	21.26	21.38	23.00	1
		25	25	21.42	21.17	21.28	23.00	1
		50	0	21.58	21.35	21.52	23.00	1
	16-QAM	1	0	21.55	21.76	21.65	23.00	1
		1	25	21.74	21.08	21.73	23.00	1
		1	49	21.34	21.94	21.63	23.00	1
		25	0	20.29	20.46	20.21	22.00	2
		25	12	20.48	20.25	20.35	22.00	2
		25	25	20.61	20.28	20.37	22.00	2
		50	0	20.65	20.44	20.44	22.00	2
	64-QAM	1	0	20.37	20.62	20.39	22.00	2
		1	25	20.52	20.42	20.44	22.00	2
		1	49	20.09	20.71	20.43	22.00	2
		25	0	19.06	19.27	19.28	21.00	3
		25	12	19.18	19.15	19.04	21.00	3
		25	25	19.31	19.03	19.19	21.00	3
		50	0	19.39	19.13	19.25	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 26								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			816.5	831.5	846.5			
Channel			26715	26865	27015			
5	QPSK	1	0	22.64	22.74	22.72	24.00	0
		1	12	22.32	22.05	22.10	24.00	0
		1	24	22.27	22.22	22.10	24.00	0
		12	0	21.10	21.32	21.11	23.00	1
		12	6	21.20	21.16	21.32	23.00	1
		12	13	21.38	21.11	21.15	23.00	1
	16-QAM	25	0	21.47	21.22	21.45	23.00	1
		1	0	21.42	21.67	21.53	23.00	1
		1	12	21.68	21.02	21.67	23.00	1
		1	24	21.25	21.87	21.54	23.00	1
		12	0	20.22	20.38	20.12	22.00	2
		12	6	20.42	20.13	20.21	22.00	2
	64-QAM	12	13	20.48	20.16	20.24	22.00	2
		25	0	20.60	20.38	20.31	22.00	2
		1	0	20.27	20.56	20.32	22.00	2
		1	12	20.40	20.38	20.39	22.00	2
		1	24	20.39	20.64	20.35	22.00	2
		12	0	19.01	19.16	19.10	21.00	3
		12	6	19.13	19.04	19.02	21.00	3
		12	13	19.23	19.11	19.08	21.00	3
		25	0	19.31	19.29	19.14	21.00	3
Frequency (MHz)			815.5	831.5	847.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			26705	26865	27025			
3	QPSK	1	0	22.61	22.72	22.66	24.00	0
		1	7	22.24	22.02	22.04	24.00	0
		1	14	22.23	22.14	22.03	24.00	0
		8	0	21.05	21.25	21.05	23.00	1
		8	4	21.17	21.09	21.30	23.00	1
		8	7	21.29	21.05	21.07	23.00	1
	16-QAM	15	0	21.35	21.16	21.38	23.00	1
		1	0	21.30	21.58	21.51	23.00	1
		1	7	21.57	21.58	21.64	23.00	1
		1	14	21.20	21.81	21.44	23.00	1
		8	0	20.18	20.27	20.06	22.00	2
		8	4	20.35	20.03	20.10	22.00	2
	64-QAM	8	7	20.39	20.12	20.21	22.00	2
		15	0	20.49	20.29	20.25	22.00	2
		1	0	20.21	20.53	20.24	22.00	2
		1	7	20.37	20.32	20.28	22.00	2
		1	14	20.55	20.58	20.30	22.00	2
		8	0	19.04	19.07	19.09	21.00	3
		8	4	19.03	19.08	19.04	21.00	3
		8	7	19.20	19.19	19.02	21.00	3
		15	0	19.22	19.11	19.07	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 26								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)				814.7	831.5	848.3		
Channel				26697	26865	27033		
1.4	QPSK	1	0	22.55	22.65	22.57	24.00	0
		1	2	22.22	22.12	22.01	24.00	0
		1	5	22.17	22.08	22.07	24.00	0
		3	0	22.01	22.17	22.00	24.00	0
		3	2	22.18	22.01	22.30	24.00	0
		3	3	22.23	22.04	22.05	24.00	0
		6	0	21.25	21.09	21.30	23.00	1
	16-QAM	1	0	21.19	21.48	21.42	23.00	1
		1	2	21.51	21.57	21.60	23.00	1
		1	5	21.10	21.22	21.00	23.00	1
		3	0	21.35	21.01	21.03	23.00	1
		3	2	21.33	21.10	21.19	23.00	1
		3	3	21.30	21.07	21.06	23.00	1
		6	0	20.46	20.18	20.15	22.00	2
	64-QAM	1	0	20.09	20.44	20.18	22.00	2
		1	2	20.28	20.23	20.21	22.00	2
		1	5	20.35	20.51	20.22	22.00	2
		3	0	20.28	20.05	20.26	22.00	2
		3	2	20.00	20.07	20.04	22.00	2
		3	3	20.20	20.05	20.06	22.00	2
		6	0	19.15	19.03	19.04	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 30								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			2310	2310	2310			
Channel			27710	27710	27710			
10	QPSK	1	0	22.66			24.00	0
		1	25	22.49			24.00	0
		1	49	22.48			24.00	0
		25	0	21.69			23.00	1
		25	12	21.56			23.00	1
		25	25	21.58			23.00	1
	16-QAM	50	0	21.51			23.00	1
		1	0	21.34			23.00	1
		1	25	21.49			23.00	1
		1	49	21.64			23.00	1
		25	0	20.59			22.00	2
		25	12	20.47			22.00	2
	64-QAM	25	25	20.64			22.00	2
		50	0	20.57			22.00	2
		1	0	20.93			22.00	2
		1	25	20.83			22.00	2
		1	49	20.73			22.00	2
		25	0	19.93			21.00	3
		25	12	19.88			21.00	3
		25	25	19.76			21.00	3
	50	0	19.91			21.00	3	
Frequency (MHz)			2307.5	2310	2312.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			27685	27710	27735			
5	QPSK	1	0	22.47	22.48	22.46	24.00	0
		1	12	22.39	22.48	22.40	24.00	0
		1	24	22.64	22.63	22.57	24.00	0
		12	0	21.64	21.60	21.64	23.00	1
		12	6	21.51	21.50	21.54	23.00	1
		12	13	21.56	21.58	21.57	23.00	1
	16-QAM	25	0	21.42	21.50	21.49	23.00	1
		1	0	21.34	21.27	21.26	23.00	1
		1	12	21.46	21.41	21.47	23.00	1
		1	24	21.54	21.54	21.57	23.00	1
		12	0	20.52	20.58	20.49	22.00	2
		12	6	20.39	20.39	20.44	22.00	2
	64-QAM	12	13	20.58	20.54	20.54	22.00	2
		25	0	20.50	20.51	20.47	22.00	2
		1	0	20.87	20.89	20.82	22.00	2
		1	12	20.73	20.83	20.76	22.00	2
		1	24	20.72	20.71	20.71	22.00	2
		12	0	19.94	19.96	19.93	21.00	3
		12	6	19.83	19.82	19.81	21.00	3
		12	13	19.75	19.70	19.66	21.00	3
	25	0	19.85	19.91	19.89	21.00	3	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 66								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			1720	1745	1770			
Channel			132072	132322	132572			
20	QPSK	1	0	22.98	22.87	22.93	24.00	0
		1	50	22.86	22.53	22.31	24.00	0
		1	99	22.45	22.76	22.66	24.00	0
		50	0	21.65	21.43	21.54	23.00	1
		50	25	21.69	21.49	21.31	23.00	1
		50	50	21.63	21.64	21.46	23.00	1
	16-QAM	100	0	21.83	21.70	21.64	23.00	1
		1	0	21.71	21.75	22.27	23.00	1
		1	50	21.90	21.62	21.24	23.00	1
		1	99	21.90	22.02	21.88	23.00	1
		50	0	20.61	20.46	20.59	22.00	2
		50	25	20.61	20.41	20.27	22.00	2
	64-QAM	50	50	20.56	20.53	20.38	22.00	2
		100	0	20.76	20.74	20.69	22.00	2
		1	0	20.66	20.75	21.20	22.00	2
		1	50	20.82	20.52	20.24	22.00	2
		1	99	20.90	20.94	20.82	22.00	2
		50	0	19.57	19.44	19.59	21.00	3
		50	25	19.54	19.39	19.25	21.00	3
		50	50	19.49	19.53	19.29	21.00	3
	Frequency (MHz)			1717.5	1745	1772.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Channel			132047	132322	132597			
15	QPSK	1	0	22.96	22.83	22.92	24.00	0
		1	36	22.86	22.43	22.30	24.00	0
		1	74	22.41	22.71	22.56	24.00	0
		36	0	21.57	21.43	21.48	23.00	1
		36	18	21.61	21.43	21.24	23.00	1
		36	37	21.56	21.54	21.45	23.00	1
		75	0	21.79	21.69	21.55	23.00	1
	16-QAM	1	0	21.61	21.73	22.25	23.00	1
		1	36	21.83	21.55	21.23	23.00	1
		1	74	21.81	21.97	21.85	23.00	1
		36	0	20.58	20.39	20.55	22.00	2
		36	18	20.57	20.38	20.23	22.00	2
		36	37	20.47	20.52	20.28	22.00	2
		75	0	20.69	20.66	20.67	22.00	2
	64-QAM	1	0	20.56	20.72	21.14	22.00	2
		1	36	20.82	20.50	20.22	22.00	2
		1	74	20.84	20.84	20.74	22.00	2
		36	0	19.51	19.43	19.50	21.00	3
		36	18	19.50	19.37	19.25	21.00	3
		36	37	19.47	19.53	19.25	21.00	3
		75	0	19.67	19.61	19.56	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 66								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			1715	1745	1775			
Channel			132022	132322	132622			
10	QPSK	1	0	22.88	22.80	22.89	24.00	0
		1	25	22.82	22.52	22.24	24.00	0
		1	49	22.45	22.67	22.62	24.00	0
		25	0	21.55	21.41	21.54	23.00	1
		25	12	21.64	21.49	21.30	23.00	1
		25	25	21.54	21.60	21.42	23.00	1
	16-QAM	50	0	21.74	21.69	21.62	23.00	1
		1	0	21.61	21.75	22.22	23.00	1
		1	25	21.80	21.57	21.15	23.00	1
		1	49	21.83	21.93	21.83	23.00	1
		25	0	20.55	20.38	20.59	22.00	2
		25	12	20.60	20.36	20.19	22.00	2
	64-QAM	25	25	20.50	20.45	20.38	22.00	2
		50	0	20.75	20.68	20.62	22.00	2
		1	0	20.58	20.71	21.11	22.00	2
		1	25	20.77	20.46	20.18	22.00	2
		1	49	20.90	20.86	20.75	22.00	2
		25	0	19.50	19.41	19.55	21.00	3
		25	12	19.46	19.34	19.20	21.00	3
		25	25	19.47	19.50	19.29	21.00	3
		50	0	19.69	19.70	19.58	21.00	3
Frequency (MHz)			1712.5	1745	1777.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			131997	132322	132647			
5	QPSK	1	0	22.92	22.82	22.83	24.00	0
		1	12	22.80	22.53	22.24	24.00	0
		1	24	22.35	22.76	22.60	24.00	0
		12	0	21.55	21.39	21.51	23.00	1
		12	6	21.67	21.41	21.23	23.00	1
		12	13	21.61	21.58	21.38	23.00	1
	16-QAM	25	0	21.76	21.70	21.62	23.00	1
		1	0	21.67	21.69	22.20	23.00	1
		1	12	21.81	21.55	21.21	23.00	1
		1	24	21.90	21.99	21.84	23.00	1
		12	0	20.55	20.37	20.57	22.00	2
		12	6	20.59	20.39	20.20	22.00	2
	64-QAM	12	13	20.55	20.44	20.33	22.00	2
		25	0	20.67	20.74	20.63	22.00	2
		1	0	20.58	20.72	21.13	22.00	2
		1	12	20.73	20.49	20.17	22.00	2
		1	24	20.80	20.90	20.80	22.00	2
		12	0	19.50	19.36	19.59	21.00	3
		12	6	19.54	19.35	19.15	21.00	3
		12	13	19.47	19.46	19.21	21.00	3
		25	0	19.63	19.71	19.56	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 66								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			1711.5	1745	1778.5			
Channel			131987	132322	132657			
3	QPSK	1	0	22.91	22.85	22.93	24.00	0
		1	7	22.81	22.44	22.26	24.00	0
		1	14	22.40	22.73	22.66	24.00	0
		8	0	21.61	21.41	21.51	23.00	1
		8	4	21.69	21.46	21.28	23.00	1
		8	7	21.53	21.54	21.45	23.00	1
		15	0	21.75	21.67	21.55	23.00	1
	16-QAM	1	0	21.65	21.69	22.27	23.00	1
		1	7	21.90	21.52	21.22	23.00	1
		1	14	21.85	22.00	21.78	23.00	1
		8	0	20.56	20.45	20.57	22.00	2
		8	4	20.52	20.36	20.22	22.00	2
		8	7	20.53	20.43	20.29	22.00	2
		15	0	20.66	20.64	20.63	22.00	2
	64-QAM	1	0	20.58	20.66	21.20	22.00	2
		1	7	20.78	20.43	20.22	22.00	2
		1	14	20.86	20.85	20.77	22.00	2
		8	0	19.48	19.42	19.58	21.00	3
		8	4	19.47	19.39	19.22	21.00	3
		8	7	19.49	19.43	19.29	21.00	3
		15	0	19.66	19.70	19.61	21.00	3
Frequency (MHz)			1710.7	1745	1779.3	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			131979	132322	132665			
1.4	QPSK	1	0	22.94	22.82	22.83	24.00	0
		1	2	22.84	22.53	22.25	24.00	0
		1	5	22.41	22.69	22.59	24.00	0
		3	0	22.93	22.85	22.93	24.00	0
		3	2	22.85	22.45	22.24	24.00	0
		3	3	22.41	22.66	22.64	24.00	0
		6	0	21.63	21.36	21.51	23.00	1
	16-QAM	1	0	21.63	21.45	21.27	23.00	1
		1	2	21.62	21.57	21.46	23.00	1
		1	5	21.80	21.68	21.63	23.00	1
		3	0	21.63	21.71	22.27	23.00	1
		3	2	21.86	21.56	21.24	23.00	1
		3	3	21.87	21.98	21.85	23.00	1
		6	0	20.55	20.36	20.49	22.00	2
	64-QAM	1	0	20.60	20.37	20.26	22.00	2
		1	2	20.46	20.44	20.36	22.00	2
		1	5	20.76	20.67	20.65	22.00	2
		3	0	20.60	20.66	21.20	22.00	2
		3	2	20.81	20.45	20.21	22.00	2
		3	3	20.80	20.91	20.78	22.00	2
		6	0	19.50	19.40	19.56	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE TDD Band 38 / Band 41 power table:

LTE Band 38								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			2580	2595	2610			
Channel			37850	38000	38150			
20	QPSK	1	0	22.99	22.87	22.88	24.00	0
		1	50	22.57	22.49	22.30	24.00	0
		1	99	22.62	22.43	22.28	24.00	0
		50	0	21.70	21.65	21.42	23.00	1
		50	25	21.70	21.58	21.37	23.00	1
		50	50	21.70	21.52	21.35	23.00	1
	16-QAM	100	0	21.67	21.63	21.37	23.00	1
		1	0	21.53	21.66	21.84	23.00	1
		1	50	21.41	21.89	21.68	23.00	1
		1	99	21.52	21.87	21.74	23.00	1
		50	0	20.79	20.76	20.53	22.00	2
		50	25	20.77	20.70	20.47	22.00	2
	64-QAM	50	50	20.75	20.64	20.46	22.00	2
		100	0	20.70	20.70	20.51	22.00	2
		1	0	20.36	20.51	20.71	22.00	2
		1	50	20.29	20.73	20.52	22.00	2
		1	99	20.35	20.72	20.56	22.00	2
		50	0	19.60	19.63	19.41	21.00	3
		50	25	19.60	19.57	19.29	21.00	3
		50	50	19.63	19.50	19.32	21.00	3
		100	0	19.49	19.51	19.36	21.00	3
Frequency (MHz)			2577.5	2595	2612.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			37825	38000	38175			
15	QPSK	1	0	22.94	22.84	22.82	24.00	0
		1	36	22.45	22.45	22.22	24.00	0
		1	74	22.53	22.33	22.20	24.00	0
		36	0	21.58	21.62	21.38	23.00	1
		36	18	21.59	21.49	21.30	23.00	1
		36	37	21.64	21.47	21.32	23.00	1
		75	0	21.63	21.54	21.33	23.00	1
	16-QAM	1	0	21.42	21.58	21.75	23.00	1
		1	36	21.33	21.83	21.56	23.00	1
		1	74	21.45	21.80	21.65	23.00	1
		36	0	20.70	20.74	20.50	22.00	2
		36	18	20.67	20.66	20.43	22.00	2
		36	37	20.65	20.58	20.43	22.00	2
		75	0	20.65	20.64	20.42	22.00	2
	64-QAM	1	0	20.33	20.46	20.69	22.00	2
		1	36	20.24	20.64	20.40	22.00	2
		1	74	20.31	20.66	20.47	22.00	2
		36	0	19.50	19.56	19.36	21.00	3
		36	18	19.55	19.49	19.26	21.00	3
		36	37	19.54	19.45	19.23	21.00	3
		75	0	19.46	19.43	19.28	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 38								
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)			Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
Frequency (MHz)			2575	2595	2615			
Channel			37800	38000	38200			
10	QPSK	1	0	22.87	22.73	22.70	24.00	0
		1	25	22.35	22.35	22.16	24.00	0
		1	49	22.41	22.27	22.14	24.00	0
		25	0	21.54	21.52	21.33	23.00	1
		25	12	21.57	21.41	21.19	23.00	1
		25	25	21.56	21.36	21.20	23.00	1
	16-QAM	50	0	21.51	21.42	21.28	23.00	1
		1	0	21.36	21.56	21.66	23.00	1
		1	25	21.27	21.80	21.47	23.00	1
		1	49	21.36	21.72	21.54	23.00	1
		25	0	20.61	20.64	20.43	22.00	2
		25	12	20.59	20.58	20.37	22.00	2
	64-QAM	25	25	20.60	20.56	20.32	22.00	2
		50	0	20.55	20.59	20.39	22.00	2
		1	0	20.21	20.36	20.61	22.00	2
		1	25	20.17	20.60	20.29	22.00	2
		1	49	20.23	20.55	20.37	22.00	2
		25	0	19.40	19.45	19.28	21.00	3
		25	12	19.43	19.40	19.23	21.00	3
		25	25	19.52	19.41	19.20	21.00	3
		50	0	19.34	19.34	19.23	21.00	3
Frequency (MHz)			2572.5	2595	2617.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)	
Channel			37775	38000	38225			
5	QPSK	1	0	22.82	22.68	22.60	24.00	0
		1	12	22.29	22.29	22.06	24.00	0
		1	24	22.30	22.16	22.10	24.00	0
		12	0	21.46	21.41	21.29	23.00	1
		12	6	21.51	21.30	21.14	23.00	1
		12	13	21.47	21.31	21.09	23.00	1
	16-QAM	25	0	21.44	21.31	21.26	23.00	1
		1	0	21.28	21.50	21.57	23.00	1
		1	12	21.20	21.73	21.38	23.00	1
		1	24	21.32	21.60	21.50	23.00	1
		12	0	20.52	20.57	20.34	22.00	2
		12	6	20.57	20.48	20.32	22.00	2
	64-QAM	12	13	20.54	20.48	20.29	22.00	2
		25	0	20.44	20.49	20.35	22.00	2
		1	0	20.10	20.26	20.52	22.00	2
		1	12	20.11	20.48	20.20	22.00	2
		1	24	20.14	20.46	20.32	22.00	2
		12	0	19.34	19.42	19.21	21.00	3
	12	6	19.39	19.32	19.17	21.00	3	
	12	13	19.46	19.34	19.14	21.00	3	
	25	0	19.31	19.26	19.20	21.00	3	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 41												
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)					Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680				
Channel				39750	40185	40620	41055	41490				
20	QPSK	1	0	22.73	22.87	22.99	22.94	22.97	24.00	0		
		1	50	22.43	22.26	22.48	22.50	22.41	24.00	0		
		1	99	22.35	22.39	22.35	22.56	22.55	24.00	0		
		50	0	21.54	21.28	21.61	21.59	21.51	23.00	1		
		50	25	21.53	21.34	21.55	21.62	21.50	23.00	1		
		50	50	21.48	21.39	21.50	21.66	21.56	23.00	1		
	16-QAM	100	0	21.57	21.39	21.60	21.62	21.65	23.00	1		
		1	0	21.77	21.71	21.73	21.52	21.13	23.00	1		
		1	50	21.41	21.42	21.22	21.32	21.31	23.00	1		
		1	99	21.72	21.69	21.71	21.13	21.53	23.00	1		
		50	0	20.59	20.38	20.71	20.72	20.58	22.00	2		
		50	25	20.57	20.44	20.64	20.74	20.60	22.00	2		
	64-QAM	50	50	20.54	20.49	20.63	20.78	20.61	22.00	2		
		100	0	20.60	20.42	20.64	20.76	20.72	22.00	2		
		1	0	20.57	20.51	20.52	20.31	20.01	22.00	2		
		1	50	20.21	20.20	20.03	20.10	20.10	22.00	2		
		1	99	20.51	20.48	20.54	20.03	20.36	22.00	2		
		50	0	19.41	19.18	19.53	19.51	19.39	21.00	3		
		50	25	19.36	19.27	19.44	19.54	19.40	21.00	3		
		50	50	19.36	19.31	19.42	19.60	19.40	21.00	3		
		100	0	19.39	19.23	19.45	19.57	19.51	21.00	3		
		Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
		Channel				39725	40173	40620	41068	41515		
15	QPSK	1	0	22.66	22.79	22.91	22.93	22.97	24.00	0		
		1	36	22.42	22.22	22.47	22.46	22.33	24.00	0		
		1	74	22.33	22.35	22.27	22.49	22.52	24.00	0		
		36	0	21.44	21.24	21.53	21.55	21.43	23.00	1		
		36	18	21.48	21.24	21.55	21.60	21.41	23.00	1		
		36	37	21.38	21.30	21.50	21.60	21.49	23.00	1		
	16-QAM	75	0	21.54	21.29	21.56	21.53	21.60	23.00	1		
		1	0	21.70	21.61	21.70	21.49	21.06	23.00	1		
		1	36	21.36	21.33	21.19	21.27	21.22	23.00	1		
		1	74	21.70	21.61	21.68	21.09	21.49	23.00	1		
		36	0	20.54	20.32	20.67	20.65	20.50	22.00	2		
		36	18	20.54	20.40	20.60	20.73	20.53	22.00	2		
	64-QAM	36	37	20.54	20.42	20.62	20.71	20.57	22.00	2		
		75	0	20.56	20.36	20.59	20.69	20.69	22.00	2		
		1	0	20.48	20.50	20.44	20.29	20.09	22.00	2		
		1	36	20.15	20.16	20.01	20.00	20.00	22.00	2		
		1	74	20.46	20.45	20.53	20.05	20.30	22.00	2		
		36	0	19.36	19.09	19.46	19.48	19.38	21.00	3		
		36	18	19.36	19.21	19.39	19.46	19.31	21.00	3		
		36	37	19.30	19.24	19.41	19.54	19.36	21.00	3		
		75	0	19.30	19.17	19.35	19.56	19.46	21.00	3		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

LTE Band 41												
BW(Mhz)	Modulation	RB Size	RB Offset	Conducted power (dBm)					Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)		
Frequency (MHz)				2501	2547	2593	2639	2685				
Channel				39700	40160	40620	41080	41540				
10	QPSK	1	0	22.71	22.78	22.91	22.87	22.92	24.00	0		
		1	25	22.33	22.19	22.43	22.40	22.33	24.00	0		
		1	49	22.34	22.31	22.26	22.49	22.54	24.00	0		
		25	0	21.46	21.22	21.57	21.57	21.51	23.00	1		
		25	12	21.47	21.30	21.46	21.58	21.43	23.00	1		
		25	25	21.45	21.29	21.40	21.63	21.49	23.00	1		
	16-QAM	50	0	21.54	21.35	21.59	21.60	21.58	23.00	1		
		1	0	21.70	21.70	21.69	21.47	21.12	23.00	1		
		1	25	21.40	21.32	21.20	21.31	21.29	23.00	1		
		1	49	21.68	21.66	21.70	21.06	21.51	23.00	1		
		25	0	20.52	20.36	20.63	20.67	20.53	22.00	2		
		25	12	20.52	20.40	20.63	20.65	20.59	22.00	2		
	64-QAM	25	25	20.46	20.46	20.61	20.70	20.56	22.00	2		
		50	0	20.57	20.40	20.59	20.68	20.66	22.00	2		
		1	0	20.48	20.48	20.49	20.31	20.04	22.00	2		
		1	25	20.20	20.11	20.09	20.04	20.08	22.00	2		
		1	49	20.44	20.46	20.52	20.06	20.35	22.00	2		
		25	0	19.34	19.10	19.50	19.41	19.35	21.00	3		
		25	12	19.35	19.21	19.37	19.49	19.38	21.00	3		
		25	25	19.27	19.22	19.37	19.52	19.30	21.00	3		
		50	0	19.36	19.15	19.43	19.49	19.48	21.00	3		
		Frequency (MHz)				2498.5	2547.8	2593	2640.3	2687.5	Target Power + Max. Tolerance (dBm)	MPR Allowed per 3GPP(dB)
		Channel				39675	40148	40620	41093	41565		
5	QPSK	1	0	22.64	22.73	22.91	22.87	22.90	24.00	0		
		1	12	22.28	22.11	22.38	22.38	22.32	24.00	0		
		1	24	22.26	22.23	22.19	22.48	22.47	24.00	0		
		12	0	21.43	21.21	21.48	21.49	21.44	23.00	1		
		12	6	21.45	21.21	21.45	21.58	21.43	23.00	1		
		12	13	21.37	21.19	21.32	21.59	21.40	23.00	1		
	16-QAM	25	0	21.50	21.34	21.52	21.55	21.57	23.00	1		
		1	0	21.68	21.67	21.60	21.44	21.07	23.00	1		
		1	12	21.31	21.31	21.13	21.22	21.21	23.00	1		
		1	24	21.59	21.63	21.68	21.06	21.47	23.00	1		
		12	0	20.47	20.35	20.62	20.58	20.45	22.00	2		
		12	6	20.43	20.39	20.55	20.58	20.51	22.00	2		
	64-QAM	12	13	20.39	20.36	20.57	20.66	20.48	22.00	2		
		25	0	20.52	20.37	20.56	20.64	20.63	22.00	2		
		1	0	20.42	20.42	20.42	20.25	20.09	22.00	2		
		1	12	20.19	20.08	20.03	20.00	20.06	22.00	2		
		1	24	20.40	20.40	20.42	20.09	20.26	22.00	2		
		12	0	19.26	19.01	19.48	19.41	19.33	21.00	3		
		12	6	19.28	19.15	19.31	19.45	19.37	21.00	3		
		12	13	19.19	19.14	19.31	19.49	19.23	21.00	3		
		25	0	19.29	19.09	19.35	19.48	19.48	21.00	3		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

1.3.1 LTE Downlink CA specification

LTE Downlink 2CA conducted power table

Two Component Carrier Maximum Conducted Power_NB															
PCC									SCC				Power		Configurations
PCC Band	PCC Bandwidth h	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC (UL) RB	PCC (UL) RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth h	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Tx.Power with DL CA active (dBm)	LTE Tx.Power with DL CA inactive (dBm)	
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B12	10	5095	737.5	22.98	22.99	CA 2A-12A
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B17	10	5790	740	22.86	22.91	CA 2A-17A
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B12	10	5095	737.5	23.38	23.41	CA 4A-12A
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B17	10	5790	740	23.33	23.38	CA 4A-17A
LTE B5	10	20600	844	QPSK	1	0	2600	889	LTE B7	20	3100	2655	23.08	23.11	CA 5A-7A
LTE B7	20	20850	2510	QPSK	1	0	2850	2630	LTE B12	10	5095	737.5	23.40	23.48	CA 7A-12A
LTE B7	20	20850	2510	QPSK	1	0	2850	2630	LTE B7	5	3425	2687.5	23.39	23.43	CA 7A-7A
LTE B7	20	20850	2510	QPSK	1	0	2850	2630	LTE B7	20	3048	2649.8	23.38	23.42	CA 7C
LTE B7	15	20825	2507.5	QPSK	1	0	2825	2627.5	LTE B7	5	2918	2636.8	23.17	23.20	CA 7B

LTE Downlink 3CA conducted power table

Three Component Carrier Maximum Conducted Power_NB																				
PCC									SCC 1				SCC 2				Power			Configurations
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC (UL) RB	PCC (UL) RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Tx.Power with DL CA active (dBm)	LTE Tx.Power with DL CA inactive (dBm)		
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B66	15	66886	2155	LTE B66	5	66979	2164.3	22.97	22.99	CA 2A-66B	
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B66	20	66886	2155	LTE B66	20	67084	2174.8	22.94	22.95	CA 2A-66C	
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B2	20	898	1959.8	LTE B5	10	2525	881.5	22.88	22.93	CA 2C-5A	
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B2	5	1175	1987.5	LTE B5	10	2525	881.5	22.91	22.95	CA 2A-2A-5A	
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B5	10	2525	881.5	LTE B66	20	66886	2155	22.85	22.89	CA 2A-5A-66A	
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B2	5	1175	1987.5	LTE B13	10	5230	751	22.84	22.90	CA 2A-2A-13A	
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B13	10	5230	751	LTE B66	20	66886	2155	22.89	22.98	CA 2A-13A-66A	
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B4	20	2175	2132.5	LTE B5	10	2525	881.5	22.85	22.91	CA 2A-4A-5A	
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B4	20	2175	2132.5	LTE B13	10	5230	751	22.82	22.89	CA 2A-4A-13A	
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B5	10	2525	881.5	LTE B30	10	9820	2355	22.92	22.97	CA 2A-5A-30A	
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B12	10	5095	737.5	LTE B30	10	9820	2355	22.95	22.97	CA 2A-12A-30A	
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B4	5	2375	2152.5	LTE B5	10	2525	881.5	23.37	23.38	CA 4A-4A-5A	
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B4	5	2375	2152.5	LTE B13	10	5230	751	23.42	23.44	CA 4A-4A-13A	
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B5	10	2525	881.5	LTE B30	10	9820	2355	23.33	23.42	CA 4A-5A-30A	
LTE B4	20	20175	1732.5	QPSK	1	0	2175	2132.5	LTE B12	10	5095	737.5	LTE B30	10	9820	2355	23.40	23.43	CA 4A-12A-30A	
LTE B5	10	20600	844	QPSK	1	0	2600	889	LTE B66	15	66886	2155	LTE B66	5	66979	2164.3	23.01	23.08	CA 5A-66B	
LTE B5	10	20600	844	QPSK	1	0	2600	889	LTE B66	20	66886	2155	LTE B66	20	67084	2174.8	23.05	23.11	CA 5A-66C	
LTE B5	10	20600	844	QPSK	1	0	2600	889	LTE B66	20	66886	2155	LTE B66	5	67311	2197.5	23.07	23.16	CA 5A-66A-66A	
LTE B13	10	23230	782	QPSK	1	0	5230	751	LTE B66	15	66886	2155	LTE B66	5	66979	2164.3	23.45	23.49	CA 13A-66B	
LTE B13	10	23230	782	QPSK	1	0	5230	751	LTE B66	20	66886	2155	LTE B66	20	67084	2174.8	23.39	23.39	CA 13A-66C	
LTE B13	10	23230	782	QPSK	1	0	5230	751	LTE B66	20	66886	2155	LTE B66	5	67311	2197.5	23.35	23.42	CA 13A-66A-66A	
LTE B66	20	132072	1720	QPSK	1	0	66536	2120	LTE B66	20	66734	2139.8	LTE B66	20	66932	2159.6	22.87	22.91	CA 66D	
LTE B66	20	132072	1720	QPSK	1	0	66536	2120	LTE B66	5	67311	2197.5	LTE B66	15	67404	2206.8	22.92	22.92	CA 66A-66B	
LTE B66	20	132072	1720	QPSK	1	0	66536	2120	LTE B66	5	67311	2197.5	LTE B66	20	67428	2209.2	22.91	22.96	CA 66A-66C	
LTE B41	20	40620	2593	QPSK	1	0	40620	2593	LTE B41	20	40818	2612.8	LTE B41	20	41016	2632.6	22.98	22.99	CA 41D	
LTE B41	20	40620	2593	QPSK	1	0	40620	2593	LTE B41	5	39675	2498.5	LTE B41	20	67428	2209.2	22.89	22.89	CA 41A-41C	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

LTE CA information

A)

The device supports downlink LTE Carrier Aggregation (CA) only. It supports a maximum of 3 carriers in the downlink. Other Release 10 features or higher features are not supported, including Uplink Carrier Aggregation, Enhanced SC-FDMA and Uplink MIMO or other antenna diversity configurations etc. All uplink communications are identical to the Release 8 Specifications.

The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.521-1 V16.5.0. The conducted power measurement results of downlink LTE CA are provided as above per 3GPP TS 36.521-1 V16.5.0. According to KDB 941225 D05A and RF exposure procedures in TCB workshop April 2018, the downlink LTE CA SAR test is not required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

CA combination table

Member of SGS Group

1.4 Test Environment

Ambient Temperature: 22±2° C

Tissue Simulating Liquid: 22±2° C

1.5 Operation Description

For WWAN, the EUT is controlled by using a Radio Communication Tester, and the communication between the EUT and the tester is established by air link. Also, the device is a laptop computer with notebook mode only, so SAR measurement for notebook mode is required.

Notebook mode

SAR is measured with display screen open at 90 degree and bottom side of keyboard touch against the flat phantom.

Note:

1. During the SAR testing, the DASY 5 system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
2. **UMTS:** The 3G SAR test reduction procedure is applied to HSDPA with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSDPA) is $\leq \frac{1}{4}$ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSDPA). The following 4 sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS 34.121. A summary of these setting are illustrated below:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.						

3. **UMTS:** The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSPA) is $\leq \frac{1}{4}$ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSPA). The following 5 sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS 34.121. A summary of these settings are illustrated below:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$. Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$. Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g. Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.													

4. **UMTS:** The 3G SAR test reduction procedure is applied to HSPA+ with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSPA+) is $\leq \frac{1}{4}$ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSPA+). The following 1 sub-test was completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_{cs} (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
<p>Note 1: Δ_{ACK}, Δ_{NACK} and Δ_{CQI} = 30/15 with $\beta_{hs} = 30/15 * \beta_c$</p> <p>Note 2: CM = 3.5 and the MPR is based on the relative CM difference, $MPR = \text{MAX}(CM-1, 0)$</p> <p>Note 3: DPDCH is not configured, therefore the β_o is set to 1 and $\beta_d = 0$ by default</p> <p>Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value</p> <p>Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm</p>											

5. **UMTS:** The 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable. Since the maximum output power in a secondary mode (DC-HSDPA) is $\leq 1/4$ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (DC-HSDPA). The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these setting are illustrated below:


The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Table C.8.1.12: Fixed Reference Channel H-Set 12¹

Parameter ²	Unit ²	Value ²
Nominal Avg. Inf. Bit Rate ²	kbps ²	60 ²
Inter-TTI Distance ²	TTI's ²	1 ²
Number of HARQ Processes ²	Processes ²	6 ²
Information Bit Payload (N_{INF}) ²	Bits ²	120 ²
Number Code Blocks ²	Blocks ²	1 ²
Binary Channel Bits Per TTI ²	Bits ²	960 ²
Total Available SML's in UE ²	SML's ²	19200 ²
Number of SML's per HARQ Proc. ²	SML's ²	3200 ²
Coding Rate ²		0.15 ²
Number of Physical Channel Codes ²	Codes ²	1 ²
Modulation ²		QPSK ²
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. ² Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used. ²		

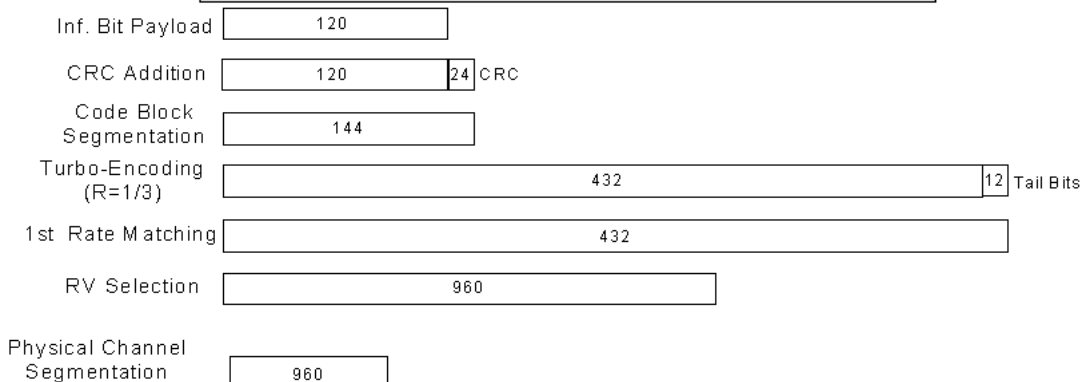Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)²

The following 4 sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5
Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

6. **LTE: LTE modes test according to KDB 941225D05v02r05.**

a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.

- Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.

- When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.

- When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation

- The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.

c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation

- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg.

- Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

d. Per Section 5.2.4, Higher order modulations

- For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

e. Per Section 5.3, other channel bandwidth standalone SAR test requirements

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

- For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.
- TDD LTE was tested at highest duty factor using UL-DL configuration 0 with 6 UL subframes and 2 special subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4.2, the duty factor for UL-DL configuration 0/special subframe configuration 6 using extended cyclic prefix is 0.633.

According to KDB 941225 D05, SAR testing for TDD LTE must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP TDD LTE configurations. The TDD-LTE of this device supports frame structure type 2 defined in 3GPP TS 36.211 section 4.2, and the frame structure configuration can be tabulated as below.

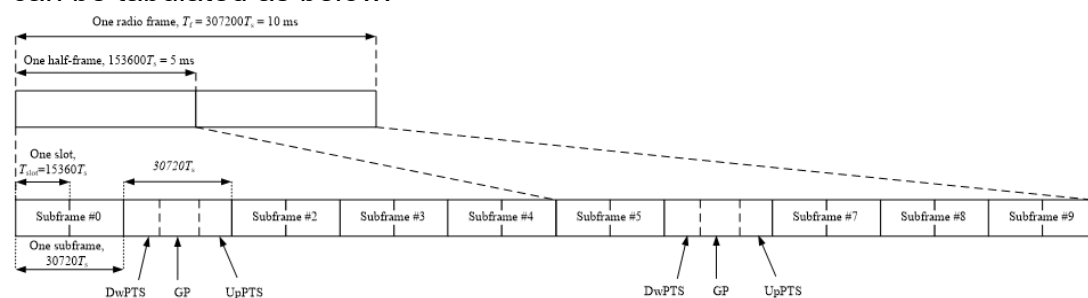


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration n	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	DwPTS	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$	$20480 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			—	—	—
9	$13168 \cdot T_s$			—	—	—

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Considering the highest transmission duty cycle, TDD LTE was tested using Uplink-Downlink configuration 0 with 6 uplink subframe and 2 special subframe. The special subframe was set to special subframe configuration 6 using extended cyclic prefix uplink. Therefore, SAR testing for TDD LTE was measured at the maximum output power with highest transmission duty cycle of 63.33%.

- LTE downlink CA:** The device supports a maximum of 3 carriers in the downlink. All uplink communications are identical to the Release 8 specifications. Uplink maximum output power is measured with downlink carrier aggregation active, only for the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

tune-up tolerance limits and not more than $\frac{1}{4}$ dB higher than the maximum output power measured when downlink carrier aggregation inactive. The downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements. The nominal channel spacing is determined by $[BW1 + BW2 - 0.1 \cdot |BW1 - BW2|]/2$ MHz, where BW1 and BW2 are the channel bandwidths of the CC in a 2-CC aggregation configuration. The downlink PCC channel should be paired with the uplink channel according to normal configurations, as if there is no carrier aggregation. The downlink SCC should be adjacent to the PCC and remain within the downlink transmission band for contiguous intra-band CA. For non-contiguous intra-band CA, the SCC should be selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band. For inter-band CA, the SCC should be near the middle of its transmission band. When downlink carrier aggregation is active uplink maximum output power remain within the specified tune-up tolerance limits and not more than $\frac{1}{4}$ dB higher than the maximum output power measured when downlink carrier aggregation inactive, so SAR evaluation is not required for downlink carrier aggregation.

8. **General:** According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz. According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
9. There are two antenna vendors for WWAN antenna, and they were measured fully and separately.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

1.6 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

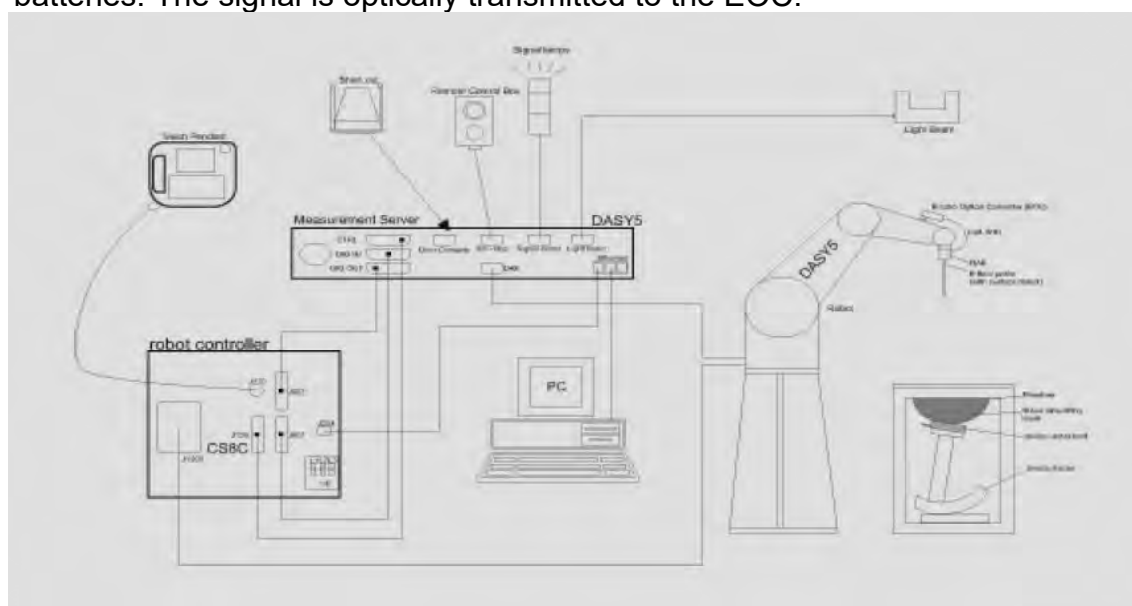


Fig. a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows 7.
8. DASY 5 software.
9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
10. Tissue simulating liquid mixed according to the given recipes.
11. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.7 System Components

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 750/835/1750/1900/2300/2600MHz Additional CF for other liquids and frequencies upon request	
Frequency	10 MHz to > 6 GHz	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 µW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 µW/g)	
Dimensions	Tip diameter: 2.5 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

PHANTOM

Model	ELI
Construction	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 30 liters
Dimensions	Major axis: 600 mm Minor axis: 400 mm



DEVICE HOLDER

Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin) , which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.
--------------	---



Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

1.8 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. These tests were done at 750/835/1750/1900/2300/2600 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the liquid depth above the ear reference points was $\geq 15 \text{ cm} \pm 5 \text{ mm}$ (frequency $\leq 3 \text{ GHz}$) or $\geq 10 \text{ cm} \pm 5 \text{ mm}$ (frequency $> 3 \text{ GHz}$) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

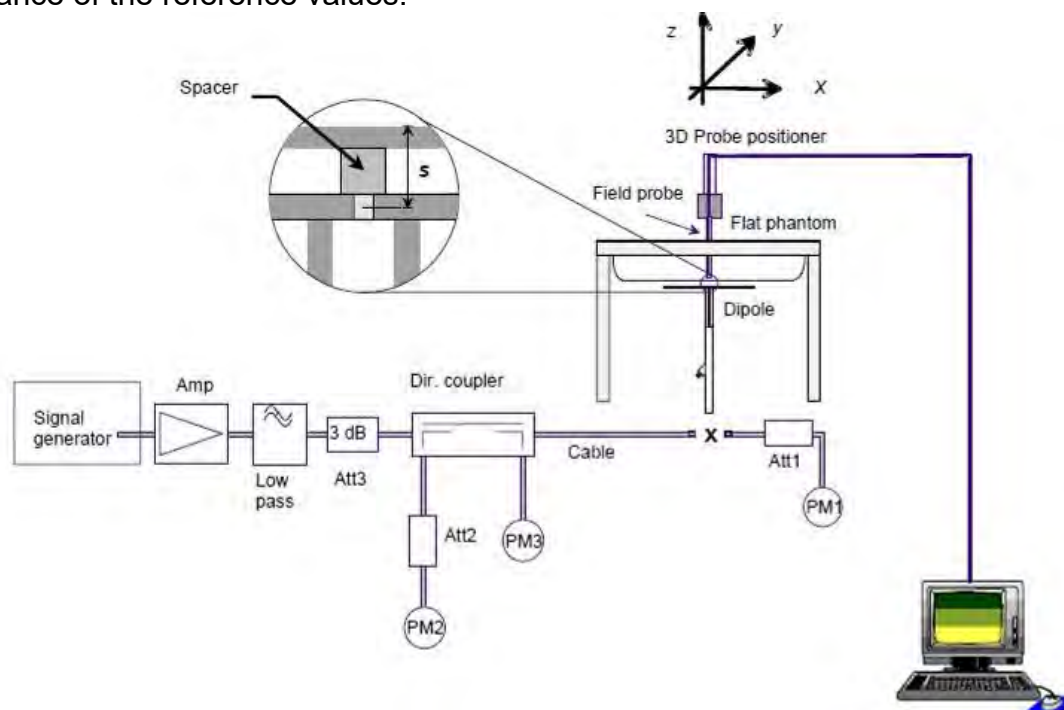


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	pin=250mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D750V3	1078	750	Head	8.58	2.15	8.60	0.23%	Oct. 13, 2021
D750V3	1078	750	Head	8.58	2.17	8.68	1.17%	Oct. 16, 2021
D835V2	4d166	835	Head	9.49	2.37	9.48	-0.11%	Oct. 13, 2021
D835V2	4d166	835	Head	9.49	2.35	9.40	-0.95%	Oct. 16, 2021
D1750V2	1111	1750	Head	36.40	9.32	37.28	2.42%	Oct. 14, 2021
D1750V2	1111	1750	Head	36.40	9.21	36.84	1.21%	Oct. 17, 2021
D1900V2	5d173	1900	Head	39.30	9.66	38.64	-1.68%	Oct. 14, 2021
D1900V2	5d173	1900	Head	39.30	9.63	38.52	-1.98%	Oct. 17, 2021
D2300V2	1092	2300	Head	48.00	12.19	48.76	1.58%	Oct. 15, 2021
D2300V2	1092	2300	Head	48.00	12.14	48.56	1.17%	Oct. 18, 2021
D2600V2	1005	2600	Head	56.90	13.70	54.80	-3.69%	Oct. 15, 2021
D2600V2	1005	2600	Head	56.90	13.80	55.20	-2.99%	Oct. 18, 2021

Table 1. Results of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

1.9 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the Agilent Model 85070E Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Network Analyzer.

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within $\pm 5\%$ of the target values.

The depth of the tissue simulant in the flat section of the phantom was $\geq 15 \text{ cm} \pm 5 \text{ mm}$ (Frequency $\leq 3\text{G}$) or $\geq 10 \text{ cm} \pm 5 \text{ mm}$ (Frequency $> 3\text{G}$) during all tests. (Fig. 2)

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	% dev ϵ_r	% dev σ
Head	Oct, 13, 2021	704	42.181	0.890	41.611	0.878	-1.35%	-1.33%
		707.5	42.162	0.890	41.590	0.878	-1.36%	-1.30%
		709	42.155	0.890	41.585	0.879	-1.35%	-1.30%
		710	42.149	0.890	41.579	0.879	-1.35%	-1.30%
		711	42.144	0.890	41.574	0.879	-1.35%	-1.30%
		750	41.942	0.893	41.372	0.880	-1.36%	-1.44%
		782	41.775	0.896	41.205	0.883	-1.36%	-1.41%
		821.5	41.533	0.897	41.032	0.892	-1.21%	-0.59%
		826.4	41.545	0.899	41.017	0.893	-1.27%	-0.65%
		829	41.531	0.900	41.006	0.895	-1.26%	-0.55%
		831.5	41.518	0.900	40.999	0.895	-1.25%	-0.50%
		835	41.500	0.900	40.985	0.897	-1.24%	-0.37%
		836.5	41.500	0.902	40.977	0.897	-1.26%	-0.48%
		836.6	41.500	0.902	40.977	0.897	-1.26%	-0.49%
		841.5	41.500	0.907	40.959	0.899	-1.30%	-0.88%
	Oct, 14, 2021	844	41.500	0.910	40.952	0.900	-1.32%	-1.10%
		846.6	41.500	0.912	40.941	0.901	-1.35%	-1.30%
		1712.4	40.138	1.349	39.569	1.330	-1.42%	-1.43%
		1720	40.126	1.354	39.556	1.335	-1.42%	-1.41%
		1732.4	40.107	1.361	39.537	1.341	-1.42%	-1.43%
		1732.5	40.107	1.361	39.536	1.342	-1.42%	-1.39%
		1745	40.087	1.368	39.517	1.349	-1.42%	-1.41%
		1750	40.079	1.371	39.509	1.352	-1.42%	-1.41%
		1752.6	40.075	1.373	39.504	1.353	-1.42%	-1.39%
		1770	40.447	1.383	39.477	1.363	-2.40%	-1.44%
		1852.4	40.000	1.400	39.430	1.382	-1.43%	-1.27%
		1860	40.000	1.400	39.430	1.382	-1.43%	-1.25%
		1880	40.000	1.400	39.430	1.383	-1.43%	-1.24%
		1900	40.000	1.400	39.430	1.383	-1.43%	-1.24%
		1907.6	40.000	1.400	39.430	1.382	-1.43%	-1.25%
	Oct, 15, 2021	2300	39.467	1.667	38.897	1.658	-1.44%	-0.53%
		2310	39.449	1.676	38.879	1.666	-1.44%	-0.55%
		2506	39.129	1.861	38.559	1.834	-1.46%	-1.48%
		2510	39.124	1.865	38.554	1.837	-1.46%	-1.52%
		2535	39.094	1.894	38.522	1.859	-1.46%	-1.82%
		2536.5	39.094	1.894	38.519	1.861	-1.47%	-1.74%
		2549.5	39.073	1.909	38.503	1.873	-1.46%	-1.89%
		2560	39.060	1.920	38.490	1.881	-1.46%	-2.01%
		2580	39.035	1.942	38.465	1.899	-1.46%	-2.19%
		2593	39.018	1.956	38.448	1.911	-1.46%	-2.31%
		2595	39.015	1.958	38.446	1.913	-1.46%	-2.33%
		2600	39.009	1.964	38.439	1.917	-1.46%	-2.37%
		2610	38.996	1.975	38.426	1.926	-1.46%	-2.46%
		2680	38.907	2.051	38.337	1.989	-1.46%	-3.01%

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	% dev ϵ_r	% dev σ
Head	Oct, 16. 2021	704	42.181	0.890	41.776	0.881	-0.96%	-0.93%
		707.5	42.162	0.890	41.755	0.882	-0.97%	-0.91%
		709	42.155	0.890	41.750	0.882	-0.96%	-0.91%
		710	42.149	0.890	41.744	0.882	-0.96%	-0.90%
		711	42.144	0.890	41.739	0.882	-0.96%	-0.90%
		750	41.942	0.893	41.537	0.884	-0.97%	-1.03%
		782	41.775	0.896	41.370	0.887	-0.97%	-0.98%
		821.5	41.533	0.897	41.197	0.896	-0.81%	-0.14%
		826.4	41.545	0.899	41.182	0.898	-0.87%	-0.19%
		829	41.531	0.900	41.171	0.899	-0.87%	-0.10%
		831.5	41.518	0.900	41.161	0.900	-0.86%	0.00%
		835	41.500	0.900	41.150	0.901	-0.84%	0.09%
		836.5	41.500	0.902	41.141	0.901	-0.86%	-0.01%
		836.6	41.500	0.902	41.142	0.901	-0.86%	-0.03%
		841.5	41.500	0.907	41.124	0.903	-0.91%	-0.42%
		844	41.500	0.910	41.117	0.904	-0.92%	-0.64%
		846.6	41.500	0.912	41.106	0.905	-0.95%	-0.84%
	Oct, 17. 2021	1712.4	40.138	1.349	39.734	1.336	-1.01%	-1.02%
		1720	40.126	1.354	39.721	1.340	-1.01%	-1.00%
		1732.4	40.107	1.361	39.702	1.347	-1.01%	-1.01%
		1732.5	40.107	1.361	39.701	1.348	-1.01%	-0.97%
		1745	40.087	1.368	39.682	1.355	-1.01%	-0.99%
		1750	40.079	1.371	39.674	1.357	-1.01%	-1.00%
		1752.6	40.075	1.373	39.669	1.359	-1.01%	-0.98%
		1770	40.447	1.383	39.642	1.369	-1.99%	-1.03%
		1852.4	40.000	1.400	39.595	1.388	-1.01%	-0.84%
		1860	40.000	1.400	39.595	1.388	-1.01%	-0.82%
		1880	40.000	1.400	39.595	1.389	-1.01%	-0.80%
		1900	40.000	1.400	39.595	1.389	-1.01%	-0.80%
		1907.6	40.000	1.400	39.595	1.389	-1.01%	-0.81%
	Oct, 18. 2021	2300	39.467	1.667	39.062	1.665	-1.03%	-0.10%
		2310	39.449	1.676	39.044	1.673	-1.03%	-0.13%
		2506	39.129	1.861	38.724	1.841	-1.04%	-1.07%
		2510	39.124	1.865	38.719	1.845	-1.04%	-1.11%
		2535	39.092	1.893	38.687	1.867	-1.04%	-1.36%
		2536.5	39.094	1.894	38.684	1.869	-1.05%	-1.34%
		2549.5	39.073	1.909	38.668	1.880	-1.04%	-1.48%
		2560	39.060	1.920	38.655	1.889	-1.04%	-1.60%
		2580	39.035	1.942	38.630	1.907	-1.04%	-1.79%
		2593	39.018	1.956	38.613	1.919	-1.04%	-1.90%
		2595	39.015	1.958	38.611	1.921	-1.04%	-1.92%
		2600	39.009	1.964	38.604	1.925	-1.04%	-1.96%
		2610	38.996	1.975	38.591	1.934	-1.04%	-2.05%
		2680	38.907	2.051	38.502	1.997	-1.04%	-2.61%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

The composition of the body tissue simulating liquid:

Frequency (MHz)	Mode	Ingredient						Total amount
		DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	
750	Head	—	532.98 g	18.3 g	2.4 g	3.2 g	766 g	1.3L(Kg)
850	Head	—	532.98 g	18.3 g	2.4 g	3.2 g	766 g	1.3L(Kg)
1750	Head	444.52 g	552.42 g	3.06 g	—	—	—	1.0L(Kg)
1900	Head	444.52 g	552.42 g	3.06 g	—	—	—	1.0L(Kg)
2300	Head	550ml	450ml	—	—	—	—	1.0L(Kg)
2600	Head	550ml	450ml	—	—	—	—	1.0L(Kg)

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.10 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm contains about 30g of tissue.

The first procedure is an extrapolation (incl. Boundary correction) to get the points

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.11 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.11.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($\delta T / \delta t$) in the liquid.

$$SAR = \frac{\sigma}{\rho} |E|^2 = c \frac{\delta T}{\delta t}$$

whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1. The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.
2. The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
3. The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures ($\sim 2\%$ for c ; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed $\pm 5\%$.
4. Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about $\pm 10\%$ (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is $\pm 5\%$ (RSS) when the same liquid is used for the calibration and for actual measurements and $\pm 7-9\%$ (RSS) when not, which is in good agreement with the estimates given in [2].

1.11.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

1. The setup must enable accurate determination of the incident power.
2. The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

3. Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

1. N. Kuster, Q. Balzano, and J.C. Lin, Eds., *Mobile Communications Safety*, Chapman & Hall, London, 1997.
2. K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, "Broadband calibration of E-field probes in lossy media", *IEEE Transactions on Microwave Theory and Techniques*, vol. 44, no. 10, pp. 1954-1962, Oct. 1996.
3. K. Jokela, P. Hyysalo, and L. Puranen, "Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", *IEEE Transactions on Instrumentation and Measurements*, vol. 47, no. 2, pp. 432-438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.12 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

1. Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
2. Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
3. Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/Kg	8.00 W/Kg
Spatial Average SAR (Whole Body)	0.08 W/Kg	0.40 W/Kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/Kg	20.00 W/Kg

Table 4. RF exposure limits

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

2. Summary of Results

2.1 Decision rules

Reported measurement data comply with IEEE 1528-2013:

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.2 Summary of Results

HB

WCDMA Band II / Band IV / Band V

Band	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		Plot page
								Measured	Reported	
WCDMA Band II	Bottom Surface	0	9262	1852.4	24.5	23.69	120.50%	0.001	0.001	72
	Bottom Surface	0	9400	1880	24.5	23.56	124.17%	0.001	0.001	-
	Bottom Surface	0	9538	1907.6	24.5	23.49	126.18%	0.001	0.001	-
WCDMA Band IV	Bottom Surface	0	1312	1712.4	24.5	23.35	130.32%	0.013	0.017	-
	Bottom Surface	0	1412	1732.4	24.5	23.42	128.23%	0.012	0.015	-
	Bottom Surface	0	1513	1752.6	24.5	23.46	127.06%	0.016	0.020	73
WCDMA Band V	Bottom Surface	0	4132	826.4	24.5	23.53	125.03%	0.003	0.004	-
	Bottom Surface	0	4183	836.6	24.5	23.55	124.45%	0.004	0.005	74
	Bottom Surface	0	4233	846.6	24.5	23.47	126.77%	0.003	0.004	-

LTE FDD Band 2 / Band 4 / Band 5 / Band 7 / Band 12 / Band 13 / Band 17 / Band 26 / Band 30 / Band 66 / LTE TDD Band 38 / Band 41

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		Plot page
												Measured	Reported	
LTE Band 2	20MHz	QPSK	1	0	Bottom Surface	0	18700	1860	24.00	22.99	126.18%	0.025	0.032	75
			1	0	Bottom Surface	0	18900	1880	24.00	22.66	136.14%	0.023	0.031	-
			1	0	Bottom Surface	0	19100	1900	24.00	22.58	138.68%	0.021	0.029	-
			50	25	Bottom Surface	0	18900	1860	23.00	21.63	137.09%	0.019	0.026	-
LTE Band 4	20MHz	QPSK	1	0	Bottom Surface	0	20050	1720	24.00	23.12	122.46%	0.011	0.013	-
			1	0	Bottom Surface	0	20175	1732.5	24.00	23.48	112.72%	0.012	0.014	76
			1	0	Bottom Surface	0	20300	1745	24.00	23.04	124.74%	0.008	0.010	-
			50	0	Bottom Surface	0	20050	1720	23.00	21.62	137.40%	0.005	0.007	-
LTE Band 5	10MHz	QPSK	1	0	Bottom Surface	0	20450	829	24.00	23.12	122.46%	0.015	0.018	-
			1	0	Bottom Surface	0	20525	836.5	24.00	23.15	121.62%	0.013	0.016	-
			1	0	Bottom Surface	0	20600	844	24.00	23.17	121.06%	0.020	0.024	77
			25	0	Bottom Surface	0	20450	829	23.00	22.08	123.58%	0.008	0.010	-
LTE Band 7	20MHz	QPSK	1	0	Bottom Surface	0	20850	2510	24.00	23.48	112.46%	0.023	0.026	78
			1	0	Bottom Surface	0	21100	2535	24.00	23.01	125.60%	0.023	0.029	-
			1	0	Bottom Surface	0	21350	2560	24.00	23.12	122.46%	0.021	0.026	-
			50	50	Bottom Surface	0	20850	2510	23.00	21.53	140.28%	0.021	0.029	-
LTE Band 12	10MHz	QPSK	1	0	Bottom Surface	0	23060	704	24.00	22.95	127.35%	0.017	0.022	-
			1	0	Bottom Surface	0	23095	707.5	24.00	22.98	126.47%	0.019	0.024	79
			1	0	Bottom Surface	0	23130	711	24.00	22.97	126.77%	0.014	0.018	-
			25	25	Bottom Surface	0	23095	707.5	23.00	21.46	142.56%	0.012	0.017	-
LTE Band 13	10MHz	QPSK	1	0	Bottom Surface	0	23230	782	24.00	23.49	112.46%	0.023	0.026	80
			25	12	Bottom Surface	0	23230	782	23.00	21.63	137.09%	0.017	0.023	-
			1	0	Bottom Surface	0	23780	709	24.00	22.85	130.32%	0.019	0.025	-
			1	0	Bottom Surface	0	23790	710	24.00	22.91	128.53%	0.014	0.018	-
LTE Band 17	10MHz	QPSK	1	0	Bottom Surface	0	23800	711	24.00	22.97	126.77%	0.021	0.027	81
			25	25	Bottom Surface	0	23780	709	23.00	21.48	141.91%	0.010	0.014	-
			1	0	Bottom Surface	0	26765	821.5	24.00	22.84	130.62%	0.022	0.029	-
			1	0	Bottom Surface	0	26865	831.5	24.00	22.99	126.18%	0.024	0.030	82
LTE Band 26	15MHz	QPSK	1	0	Bottom Surface	0	26965	841.5	24.00	22.91	128.53%	0.018	0.023	-
			36	37	Bottom Surface	0	26765	821.5	23.00	21.52	140.60%	0.015	0.021	-
			1	0	Bottom Surface	0	27710	2310	24.00	22.66	136.14%	0.020	0.027	83
			25	0	Bottom Surface	0	27710	2310	23.00	21.69	135.21%	0.011	0.015	-
LTE Band 30	10MHz	QPSK	1	0	Bottom Surface	0	132072	1720	24.00	22.98	126.47%	0.027	0.034	84
			1	0	Bottom Surface	0	132322	1745	24.00	22.87	129.72%	0.022	0.029	-
			1	0	Bottom Surface	0	132572	1770	24.00	22.93	127.64%	0.023	0.029	-
			50	25	Bottom Surface	0	132072	1720	23.00	21.69	135.21%	0.018	0.024	-
LTE Band 38	20MHz	QPSK	1	0	Bottom Surface	0	37850	2580	24.00	22.99	126.18%	0.023	0.029	85
			1	0	Bottom Surface	0	38000	2595	24.00	22.87	129.72%	0.021	0.027	-
			1	0	Bottom Surface	0	38150	2610	24.00	22.88	129.42%	0.020	0.026	-
			50	0	Bottom Surface	0	37850	2580	23.00	21.70	134.90%	0.019	0.026	-
LTE Band 41	20MHz	QPSK	1	0	Bottom Surface	0	39750	2506	24.00	22.73	133.97%	0.023	0.031	-
			1	0	Bottom Surface	0	40185	2549.5	24.00	22.87	129.72%	0.024	0.031	-
			1	0	Bottom Surface	0	40620	2593	24.00	22.99	126.18%	0.028	0.035	86
			1	0	Bottom Surface	0	41055	2636.5	24.00	22.94	127.64%	0.027	0.034	-
LTE Band 41	20MHz	QPSK	1	0	Bottom Surface	0	41490	2680	24.00	22.97	126.77%	0.024	0.030	-
			50	50	Bottom Surface	0	41055	2636.5	23.00	21.66	136.14%	0.016	0.022	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SPEED

WCDMA Band II / Band IV / Band V

Band	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		Plot page
								Measured	Reported	
WCDMA Band II	Bottom Surface	0	9262	1852.4	24.5	23.69	120.50%	0.028	0.034	87
	Bottom Surface	0	9400	1880	24.5	23.56	124.17%	0.024	0.030	-
	Bottom Surface	0	9538	1907.6	24.5	23.49	126.18%	0.026	0.033	-
WCDMA Band IV	Bottom Surface	0	1312	1712.4	24.5	23.35	130.32%	0.022	0.029	-
	Bottom Surface	0	1412	1732.4	24.5	23.42	128.23%	0.025	0.032	-
	Bottom Surface	0	1513	1752.6	24.5	23.46	127.06%	0.026	0.033	88
WCDMA Band V	Bottom Surface	0	4132	826.4	24.5	23.53	125.03%	0.015	0.019	-
	Bottom Surface	0	4183	836.6	24.5	23.55	124.45%	0.017	0.021	89
	Bottom Surface	0	4233	846.6	24.5	23.47	126.77%	0.016	0.020	-

LTE FDD Band 2 / Band 4 / Band 5 / Band 7 / Band 12 / Band 13 / Band 17

/ Band 26 / Band 30 / Band 66 / LTE TDD Band 38 / Band 41

Mode	Bandwidth (MHz)	Modulation	RB Size	RB start	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Scaling	Averaged SAR over 1g (W/kg)		Plot page
												Measured	Reported	
LTE Band 2	20MHz	QPSK	1	0	Bottom Surface	0	18700	1860	24.00	22.99	126.18%	0.022	0.028	90
			1	0	Bottom Surface	0	18900	1880	24.00	22.66	136.14%	0.020	0.027	-
			50	25	Bottom Surface	0	19100	1900	24.00	22.58	138.68%	0.019	0.026	-
LTE Band 4	20MHz	QPSK	1	0	Bottom Surface	0	18900	1860	23.00	21.63	137.09%	0.015	0.021	-
			1	0	Bottom Surface	0	20050	1720	24.00	23.12	122.46%	0.021	0.026	-
			1	0	Bottom Surface	0	20115	1732.5	24.00	23.48	112.72%	0.029	0.033	91
LTE Band 5	10MHz	QPSK	1	0	Bottom Surface	0	20300	1745	24.00	23.04	124.74%	0.025	0.031	-
			50	0	Bottom Surface	0	20050	1720	23.00	21.62	137.40%	0.018	0.025	-
			1	0	Bottom Surface	0	20450	829	24.00	23.12	122.46%	0.015	0.018	-
LTE Band 7	20MHz	QPSK	1	0	Bottom Surface	0	20525	836.5	24.00	23.15	121.62%	0.013	0.016	-
			1	0	Bottom Surface	0	20600	844	24.00	23.17	121.06%	0.017	0.021	92
			25	0	Bottom Surface	0	20450	829	23.00	22.08	123.59%	0.011	0.014	-
LTE Band 12	10MHz	QPSK	1	0	Bottom Surface	0	20850	2510	24.00	23.49	112.46%	0.031	0.035	93
			1	0	Bottom Surface	0	21100	2535	24.00	23.01	125.60%	0.026	0.033	-
			1	0	Bottom Surface	0	21350	2560	24.00	23.12	122.46%	0.021	0.026	-
LTE Band 13	10MHz	QPSK	50	50	Bottom Surface	0	20850	2510	23.00	21.53	140.28%	0.015	0.021	-
			1	0	Bottom Surface	0	23060	704	24.00	22.95	127.35%	0.014	0.018	-
			1	0	Bottom Surface	0	23095	707.5	24.00	22.98	126.47%	0.020	0.025	94
LTE Band 17	10MHz	QPSK	1	0	Bottom Surface	0	23130	711	24.00	22.97	126.77%	0.015	0.019	-
			25	25	Bottom Surface	0	23095	707.5	23.00	21.46	142.56%	0.013	0.019	-
			1	0	Bottom Surface	0	23230	782	24.00	23.49	112.46%	0.021	0.024	95
LTE Band 26	15MHz	QPSK	25	12	Bottom Surface	0	23230	782	23.00	21.63	137.09%	0.010	0.014	-
			1	0	Bottom Surface	0	23780	709	24.00	22.85	130.32%	0.009	0.012	-
			1	0	Bottom Surface	0	23790	710	24.00	22.91	128.53%	0.006	0.010	-
LTE Band 30	10MHz	QPSK	1	0	Bottom Surface	0	23800	711	24.00	22.97	128.77%	0.017	0.022	96
			25	25	Bottom Surface	0	23780	709	23.00	21.48	141.91%	0.012	0.017	-
			1	0	Bottom Surface	0	26765	821.5	24.00	22.84	130.62%	0.005	0.007	-
LTE Band 66	20MHz	QPSK	1	0	Bottom Surface	0	26865	831.5	24.00	22.99	126.18%	0.009	0.011	97
			1	0	Bottom Surface	0	26965	841.5	24.00	22.91	128.53%	0.006	0.008	-
			36	37	Bottom Surface	0	26765	821.5	23.00	21.52	140.60%	0.005	0.007	-
LTE Band 38	20MHz	QPSK	1	0	Bottom Surface	0	27710	2310	24.00	22.66	136.14%	0.024	0.033	98
			25	0	Bottom Surface	0	27072	1720	23.00	21.69	135.21%	0.019	0.026	-
			1	0	Bottom Surface	0	132072	1745	24.00	22.87	129.72%	0.020	0.026	99
LTE Band 41	20MHz	QPSK	1	0	Bottom Surface	0	132322	1745	24.00	22.87	129.72%	0.021	0.027	-
			1	0	Bottom Surface	0	132572	1770	24.00	22.93	127.94%	0.017	0.022	-
			50	25	Bottom Surface	0	132072	1720	23.00	21.69	135.21%	0.014	0.019	-
LTE Band 41	20MHz	QPSK	1	0	Bottom Surface	0	37850	2580	24.00	22.99	126.18%	0.027	0.034	100
			1	0	Bottom Surface	0	38000	2595	24.00	22.87	129.72%	0.020	0.026	-
			1	0	Bottom Surface	0	38150	2610	24.00	22.88	129.42%	0.021	0.027	-
LTE Band 41	20MHz	QPSK	50	0	Bottom Surface	0	37850	2580	23.00	21.70	134.90%	0.018	0.024	-
			1	0	Bottom Surface	0	39750	2506	24.00	22.73	133.97%	0.020	0.027	-
			1	0	Bottom Surface	0	40185	2549.5	24.00	22.87	129.72%	0.023	0.030	-
LTE Band 41	20MHz	QPSK	1	0	Bottom Surface	0	40620	2593	24.00	22.99	126.18%	0.026	0.033	101
			1	0	Bottom Surface	0	41055	2636.5	24.00	22.94	127.64%	0.021	0.027	-
			1	0	Bottom Surface	0	41490	2680	24.00	22.97	126.77%	0.024	0.030	-
			50	50	Bottom Surface	0	41055	2636.5	23.00	21.66	136.14%	0.016	0.022	-

Note:

$$\text{Scaling} = \frac{\text{reported SAR}}{\text{measured SAR}} = \frac{P2(\text{mW})}{P1(\text{mW})} = 10^{\frac{(P2-P1)}{10}}(\text{dBm})$$

Reported SAR = measured SAR * (scaling)

Where P2 is maximum specified power, P1 is measured conducted power

2.3 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

NO.	Simultaneous Transmit Configurations	Body
1	WWAN + 2.4GHz MIMO	YES
2	WWAN + 5GHz MIMO	YES
3	WWAN + BT + 5GHz MIMO	YES
4	WWAN + 2.4GHz WLAN Main + BT Aux	YES
5	WWAN + 5GHz WLAN Main + BT Aux	YES
<p>Note :</p> <p>1. The Intel AX201D2W WLAN/BT module is also integrated into this host, WLAN/BT power and WLAN SAR testing data, which can be referred to Intel SAR test report, Report No.:180717-03.TR07(FCC ID:PD9AX201D2) and these results are used for simultaneous transmission analysis.</p>		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$\text{Estimated SAR} = \frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance (mm)}} \times \frac{\sqrt{f(\text{GHz})}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by $(\text{SAR1} + \text{SAR2})^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and R_i is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

HB

			Reported SAR						Scenario 1	Scenario 2	Scenario 3	Scenario 4	Scenario 5
	Exposure Position		1	2	3	4	5	6	1+2+3	1+4+5	1+3+6	1+5+6	1+4+5+6
			WWAN	2.4GHz WLAN Aux	2.4GHz WLAN Main	5GHz WLAN Aux	5GHz WLAN Main	Bluetooth Aux	Summed	Summed	Summed	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
WCDMA Band II	Bottom Surface	0	0.001	0.590	0.530	0.730	0.790	0.040	1.121	1.521	0.571	0.831	1.561
WCDMA Band IV	Bottom Surface	0	0.020	0.590	0.530	0.730	0.790	0.040	1.140	1.540	0.590	0.850	1.580
WCDMA Band V	Bottom Surface	0	0.005	0.590	0.530	0.730	0.790	0.040	1.125	1.525	0.575	0.835	1.565
LTE Band 2	Bottom Surface	0	0.032	0.590	0.530	0.730	0.790	0.040	1.152	1.552	0.602	0.862	1.592
LTE Band 4	Bottom Surface	0	0.014	0.590	0.530	0.730	0.790	0.040	1.134	1.534	0.584	0.844	1.574
LTE Band 5	Bottom Surface	0	0.024	0.590	0.530	0.730	0.790	0.040	1.144	1.544	0.594	0.854	1.584
LTE Band 7	Bottom Surface	0	0.033	0.590	0.530	0.730	0.790	0.040	1.153	1.553	0.603	0.863	1.593
LTE Band 12	Bottom Surface	0	0.024	0.590	0.530	0.730	0.790	0.040	1.144	1.544	0.594	0.854	1.584
LTE Band 13	Bottom Surface	0	0.026	0.590	0.530	0.730	0.790	0.040	1.146	1.546	0.596	0.856	1.586
LTE Band 17	Bottom Surface	0	0.027	0.590	0.530	0.730	0.790	0.040	1.147	1.547	0.597	0.857	1.587
LTE Band 26	Bottom Surface	0	0.030	0.590	0.530	0.730	0.790	0.040	1.150	1.550	0.600	0.860	1.590
LTE Band 30	Bottom Surface	0	0.027	0.590	0.530	0.730	0.790	0.040	1.147	1.547	0.597	0.857	1.587
LTE Band 66	Bottom Surface	0	0.034	0.590	0.530	0.730	0.790	0.040	1.154	1.554	0.604	0.864	1.594
LTE Band 38	Bottom Surface	0	0.029	0.590	0.530	0.730	0.790	0.040	1.149	1.549	0.599	0.859	1.589
LTE Band 41	Bottom Surface	0	0.035	0.590	0.530	0.730	0.790	0.040	1.155	1.555	0.605	0.865	1.595

SPEED

			Reported SAR						Scenario 1	Scenario 2	Scenario 3	Scenario 4	Scenario 5
	Exposure Position		1	2	3	4	5	6	1+2+3	1+4+5	1+3+6	1+5+6	1+4+5+6
			WWAN	2.4GHz WLAN Aux	2.4GHz WLAN Main	5GHz WLAN Aux	5GHz WLAN Main	Bluetooth Aux	Summed	Summed	Summed	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
WCDMA Band II	Bottom Surface	0	0.034	0.590	0.530	0.730	0.790	0.040	1.154	1.554	0.604	0.864	1.594
WCDMA Band IV	Bottom Surface	0	0.033	0.590	0.530	0.730	0.790	0.040	1.153	1.553	0.603	0.863	1.593
WCDMA Band V	Bottom Surface	0	0.021	0.590	0.530	0.730	0.790	0.040	1.141	1.541	0.591	0.851	1.581
LTE Band 2	Bottom Surface	0	0.028	0.590	0.530	0.730	0.790	0.040	1.148	1.548	0.598	0.858	1.588
LTE Band 4	Bottom Surface	0	0.033	0.590	0.530	0.730	0.790	0.040	1.153	1.553	0.603	0.863	1.593
LTE Band 5	Bottom Surface	0	0.021	0.590	0.530	0.730	0.790	0.040	1.141	1.541	0.591	0.851	1.581
LTE Band 7	Bottom Surface	0	0.035	0.590	0.530	0.730	0.790	0.040	1.155	1.555	0.605	0.865	1.595
LTE Band 12	Bottom Surface	0	0.025	0.590	0.530	0.730	0.790	0.040	1.145	1.545	0.595	0.855	1.585
LTE Band 13	Bottom Surface	0	0.024	0.590	0.530	0.730	0.790	0.040	1.144	1.544	0.594	0.854	1.584
LTE Band 17	Bottom Surface	0	0.022	0.590	0.530	0.730	0.790	0.040	1.142	1.542	0.592	0.852	1.582
LTE Band 26_FCC	Bottom Surface	0	0.011	0.590	0.530	0.730	0.790	0.040	1.131	1.531	0.581	0.841	1.571
LTE Band 30	Bottom Surface	0	0.033	0.590	0.530	0.730	0.790	0.040	1.153	1.553	0.603	0.863	1.593
LTE Band 66	Bottom Surface	0	0.030	0.590	0.530	0.730	0.790	0.040	1.150	1.550	0.600	0.860	1.590
LTE Band 38	Bottom Surface	0	0.034	0.590	0.530	0.730	0.790	0.040	1.154	1.554	0.604	0.864	1.594
LTE Band 41	Bottom Surface	0	0.033	0.590	0.530	0.730	0.790	0.040	1.153	1.553	0.603	0.863	1.593

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is ≤ 0.04 for all circumstances that require SPLSR calculation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

4. Instruments List

Manufacturer	Device	Type	Serial number	Date of last calibration	Date of next calibration
SPEAG	Dosimetric E-Field Probe	EX3DV4	3938	Feb.22,2021	Feb.21,2022
SPEAG	System Validation Dipole	D750V3	1078	Jun.21,2021	Jun.20,2022
		D835V2	4d166	Apr.13,2021	Apr.12,2022
		D900V2	178	Apr.15,2021	Apr.14,2022
		D1750V2	1111	Apr.14,2021	Apr.13,2022
		D1900V2	5d173	Apr.15,2021	Apr.14,2022
		D2300V2	1092	Dec.16,2020	Dec.15,2021
		D2600V2	1005	Jan.22,2021	Jan.21,2022
SPEAG	Data acquisition Electronics	DAE4	547	Mar.22,2021	Mar.21,2022
SPEAG	Software	DASY52 4.7.80(0)	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration not required
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb.17,2021	Feb.16,2022
Agilent	Dual-directional coupler	772D	MY46151242	Aug.16,2021	Aug.15,2022
		778D	MY48220468	Aug.16,2021	Aug.15,2022
Agilent	Signal Generator	N5181A	MY50145142	Dec.27,2020	Dec.26,2021
Agilent	Power Meter	E4417A	MY51410006	Mar.23,2021	Mar.22,2022
Agilent	Power Sensor	E9301H	MY51470001	Mar.23,2021	Mar.22,2022
			MY51470002	Mar.23,2021	Mar.22,2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions>, and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Manufacturer	Device	Type	Serial number	Date of last calibration	Date of next calibration
TECPEL	Digital thermometer	DTM-303A	TP130074	Apr.26,2021	Apr.25,2022
Anritsu	Radio Communication Test	MT8820C	6201061049	May.14,2021	May.13,2022
R&S	Radio Communication Test	CMW 500	125470	May.03,2021	May.02,2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

5. Measurements

Date: 2021/10/14

Report No. : E5/2021/80020

WCDMA Band II_Body_Bottom Surface_CH 9262_0mm

Communication System: WCDMA ; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 39.43$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.96, 7.96, 7.96); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.00664 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.454 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 0.00395 W/kg

SAR(1 g) = 0.000661 W/kg; SAR(10 g) = 0.000121 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.00299 W/kg

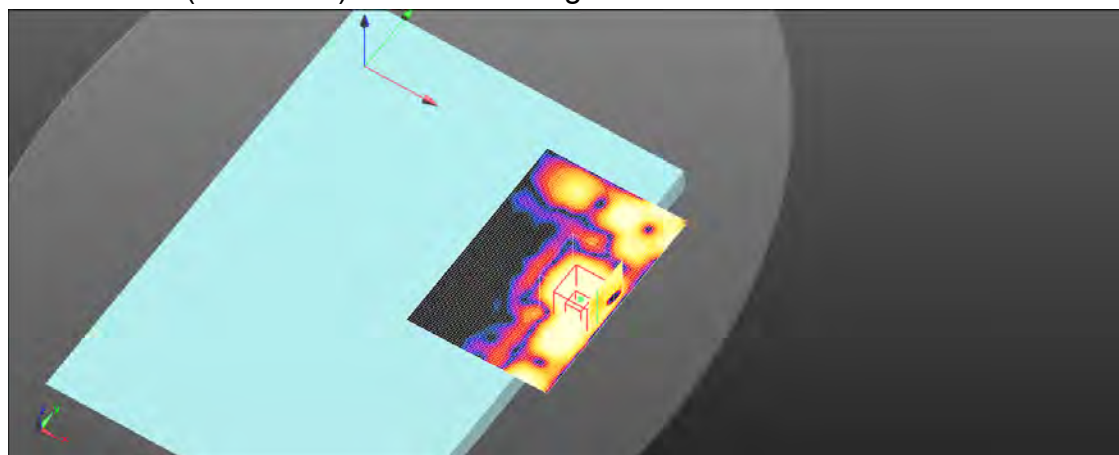

0 dB = 0.00299 W/kg = -25.24 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/14

Report No. : E5/2021/80020**WCDMA Band IV_Body_Bottom Surface_CH 1513_0mm**

Communication System: WCDMA ; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.353$ S/m; $\epsilon_r = 39.504$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(8.27, 8.27, 8.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0209 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.375 V/m; Power Drift = -0.06 dB



Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.6%

Maximum value of SAR (measured) = 0.0213 W/kg

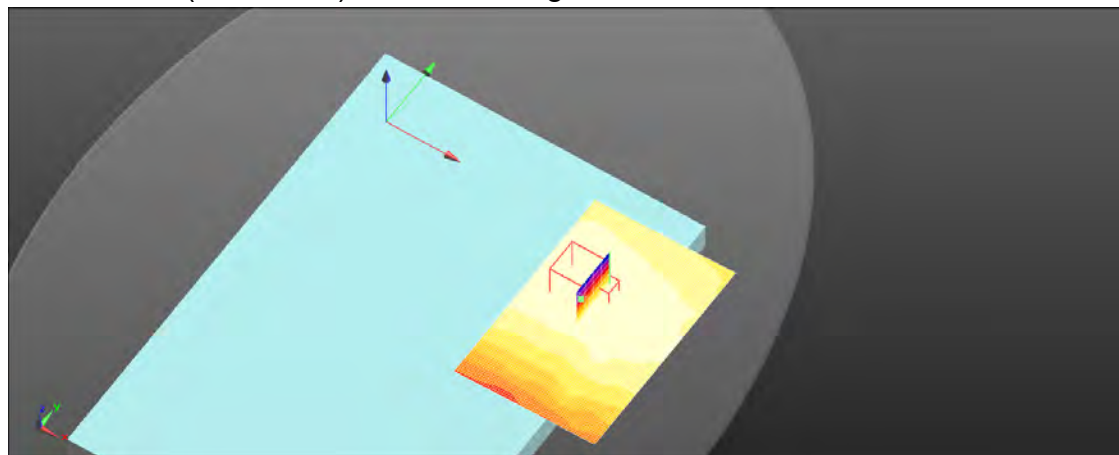

0 dB = 0.0213 W/kg = -16.71 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/13

Report No. : E5/2021/80020**WCDMA Band V_Body_Bottom Surface_CH 4183_0mm**

Communication System: WCDMA ; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 40.977$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(9.27, 9.27, 9.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.00608 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.986 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.00758 W/kg

SAR(1 g) = 0.00441 W/kg; SAR(10 g) = 0.00321 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 62%

Maximum value of SAR (measured) = 0.00588 W/kg

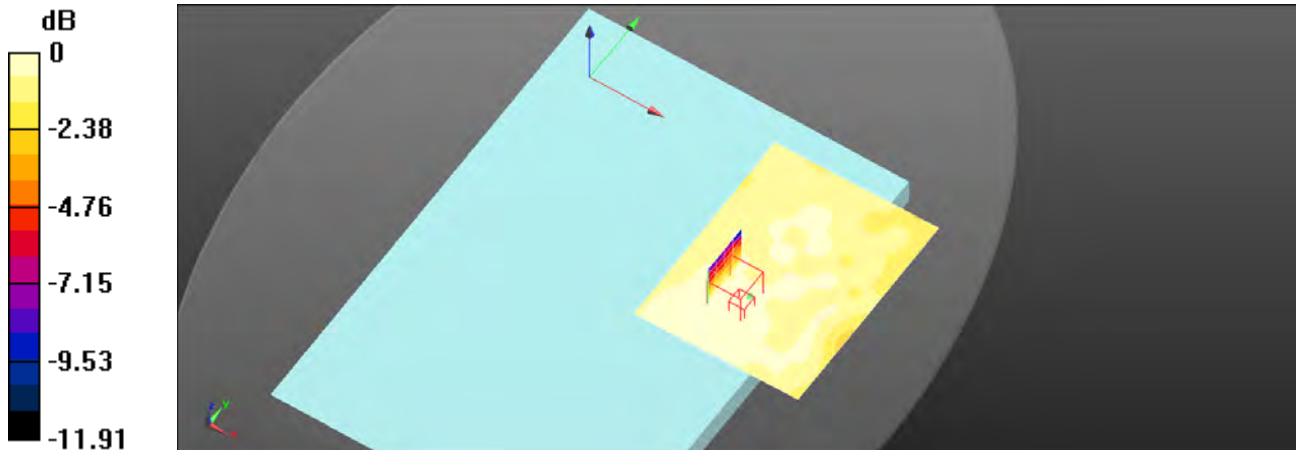

0 dB = 0.00588 W/kg = -22.31 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/14

Report No. : E5/2021/80020**LTE Band 2 (20MHz)_Body_Bottom Surface_CH 18700_QPSK_1-0_0mm_2**

Communication System: LTE ; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 39.43$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.96, 7.96, 7.96); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0528 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.741 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.8%

Maximum value of SAR (measured) = 0.0509 W/kg

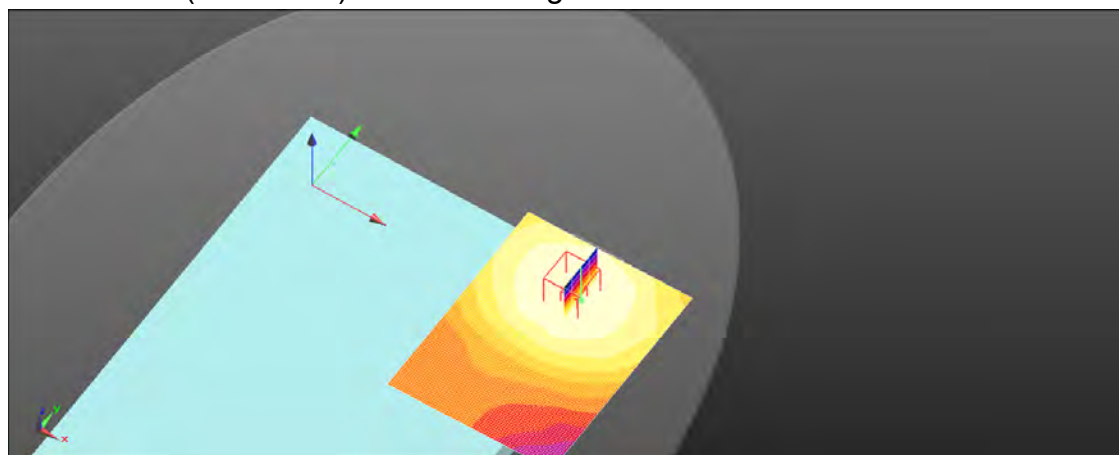

0 dB = 0.0509 W/kg = -12.94 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/14

Report No. : E5/2021/80020**LTE Band 4 (20MHz)_Body_Bottom Surface_CH 20175_QPSK_1-0_0mm**

Communication System: LTE ; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 39.536$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(8.27, 8.27, 8.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0151 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.704 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00648 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 63%

Maximum value of SAR (measured) = 0.0156 W/kg

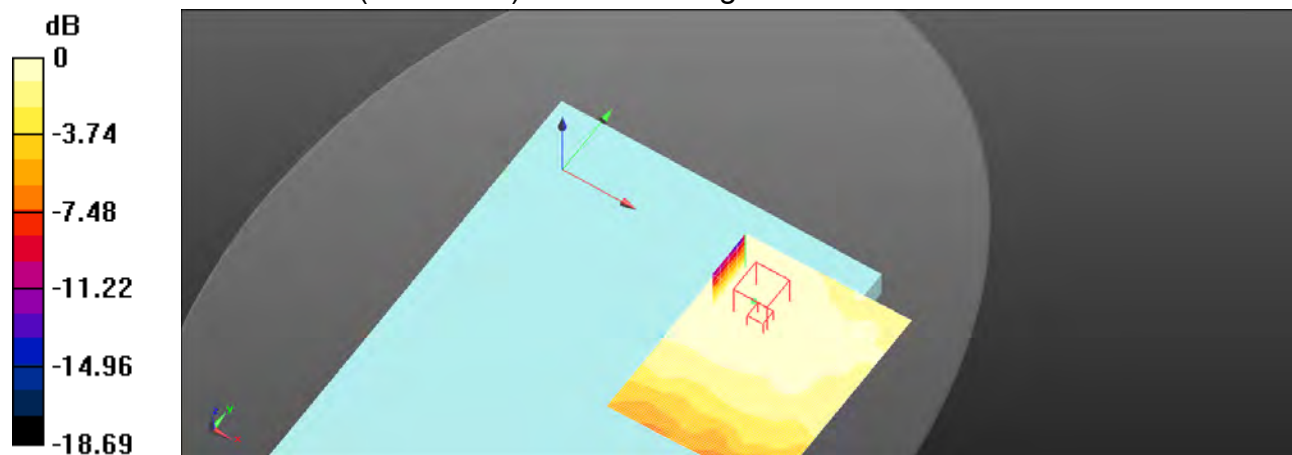

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/13

Report No. : E5/2021/80020**LTE Band 5 (10MHz)_Body_Bottom Surface_CH 20600_QPSK_1-0_0mm**



Communication System: LTE ; Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 40.952$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C ; Liquid temperature: 21.7°C **DASY5 Configuration:**

- Probe: EX3DV4 - SN3938; ConvF(9.27, 9.27, 9.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

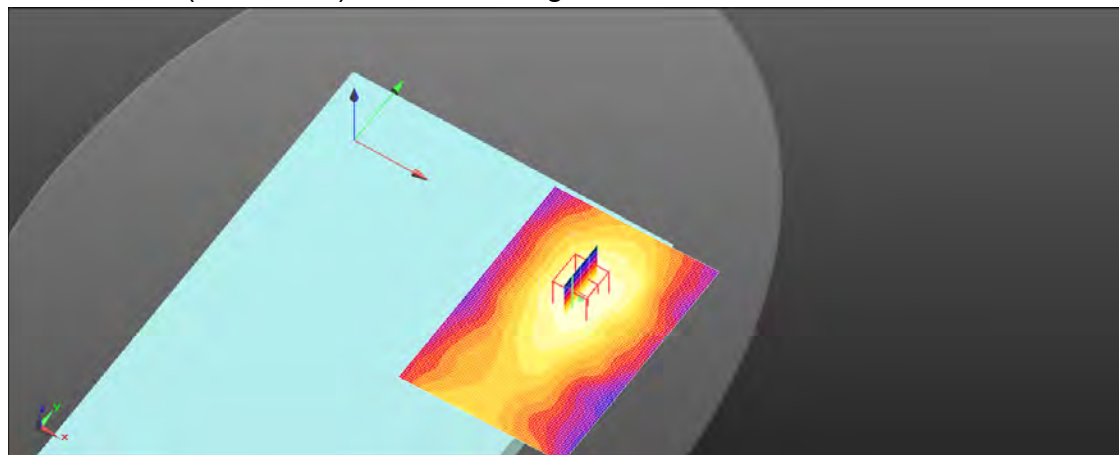Area Scan (71x101x1): Interpolated grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0257 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.275 V/m ; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.0260 W/kg **SAR(1 g) = 0.020 W/kg ; SAR(10 g) = 0.015 W/kg** Smallest distance from peaks to all points 3 dB below = 10.5 mm Ratio of SAR at M2 to SAR at M1 = 75.2% Maximum value of SAR (measured) = 0.0236 W/kg  $0 \text{ dB} = 0.0236 \text{ W/kg} = -16.26 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/15

Report No. : E5/2021/80020

LTE Band 7 (20MHz)_Body_Bottom Surface_CH 20850_QPSK_1-0_0mm

Communication System: LTE ; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510 \text{ MHz}$; $\sigma = 1.837 \text{ S/m}$; $\epsilon_r = 38.554$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.24, 7.24, 7.24); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (91x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0525 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.210 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 0.0549 W/kg

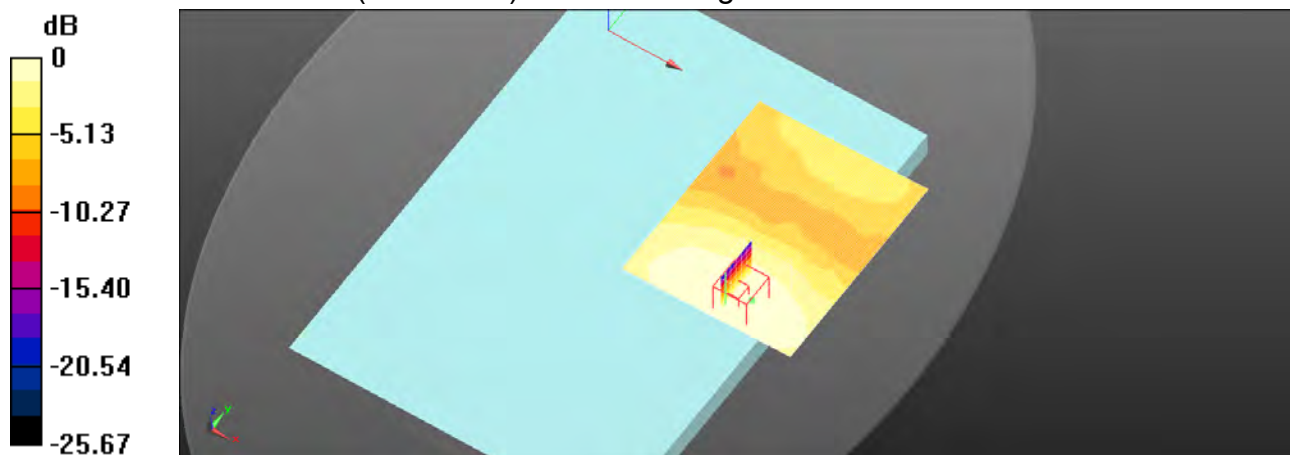

0 dB = 0.0549 W/kg = -12.61 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/13

Report No. : E5/2021/80020**LTE Band 12 (10MHz)_Body_Bottom Surface_CH 23095_QPSK_1-0_0mm**

Communication System: LTE ; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 41.590$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(9.61, 9.61, 9.61); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (71x101x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0244 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.291 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 70.9%

Maximum value of SAR (measured) = 0.0241 W/kg

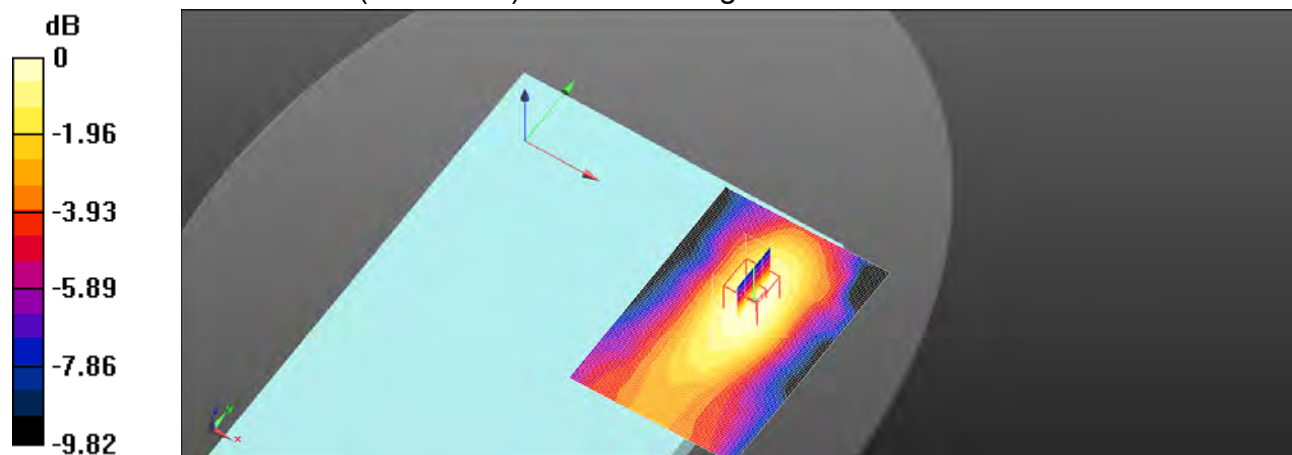

0 dB = 0.0241 W/kg = -16.18 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/13

Report No. : E5/2021/80020**LTE Band 13 (10MHz)_Body_Bottom Surface_CH 23230_QPSK_1-0_0mm**

Communication System: LTE ; Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.883 \text{ S/m}$; $\epsilon_r = 41.205$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(9.61, 9.61, 9.61); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (71x81x1): Interpolated grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0328 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.179 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.016 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 73.9%

Maximum value of SAR (measured) = 0.0270 W/kg

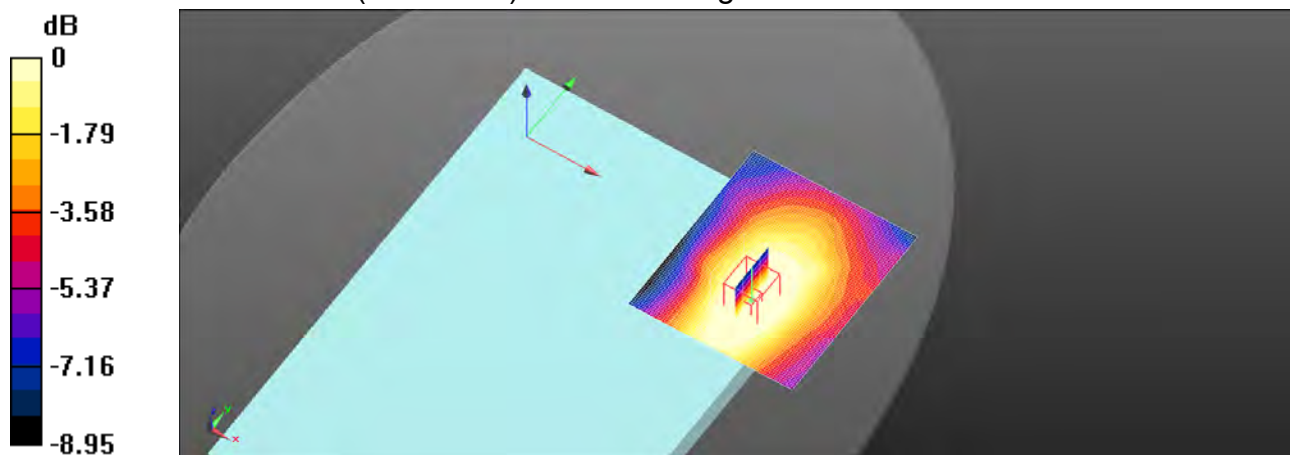

0 dB = 0.0270 W/kg = -15.68 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/13

Report No. : E5/2021/80020**LTE Band 17 (10MHz)_Body_Bottom Surface_CH 23800_QPSK_1-0_0mm**

Communication System: LTE ; Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.879 \text{ S/m}$; $\epsilon_r = 41.574$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(9.61, 9.61, 9.61); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (71x101x1): Interpolated grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0262 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.660 V/m; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.1%

Maximum value of SAR (measured) = 0.0242 W/kg

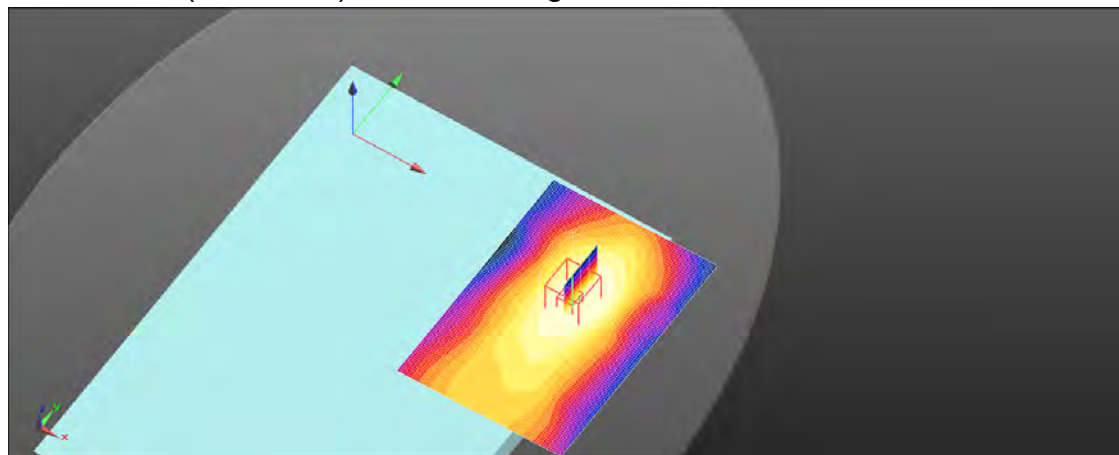

0 dB = 0.0242 W/kg = -16.15 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/13

Report No. : E5/2021/80020**LTE Band 26 (15MHz)_Body_Bottom Surface_CH 26865_QPSK_1-0_0mm**

Communication System: LTE ; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 40.999$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(9.27, 9.27, 9.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (71x101x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0292 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.129 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.017 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 74.8%

Maximum value of SAR (measured) = 0.0287 W/kg

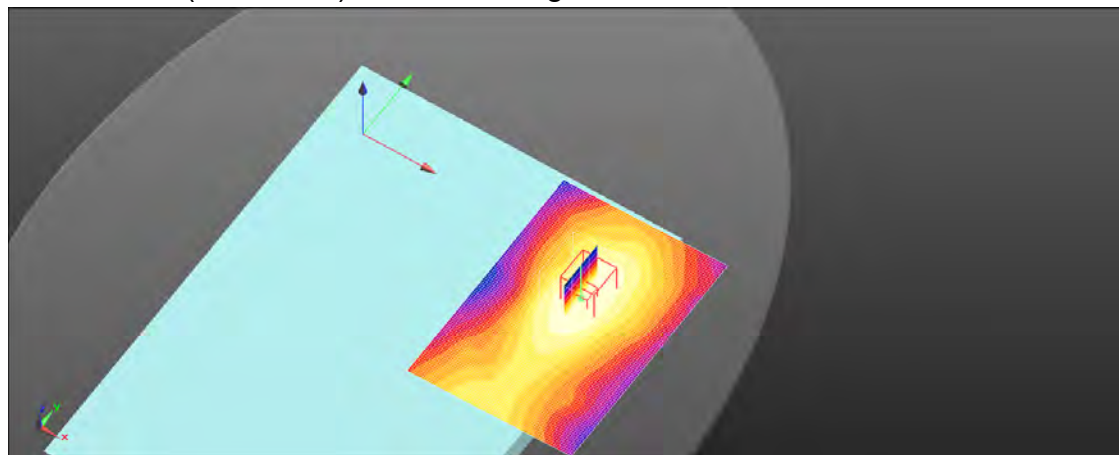

0 dB = 0.0287 W/kg = -15.42 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/15

Report No. : E5/2021/80020**LTE Band 30 (10MHz)_Body_Bottom Surface_CH 27710_QPSK_1-0_0mm**

Communication System: LTE ; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.666$ S/m; $\epsilon_r = 38.879$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.71, 7.71, 7.71); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (91x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0278 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.227 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 0.0266 W/kg

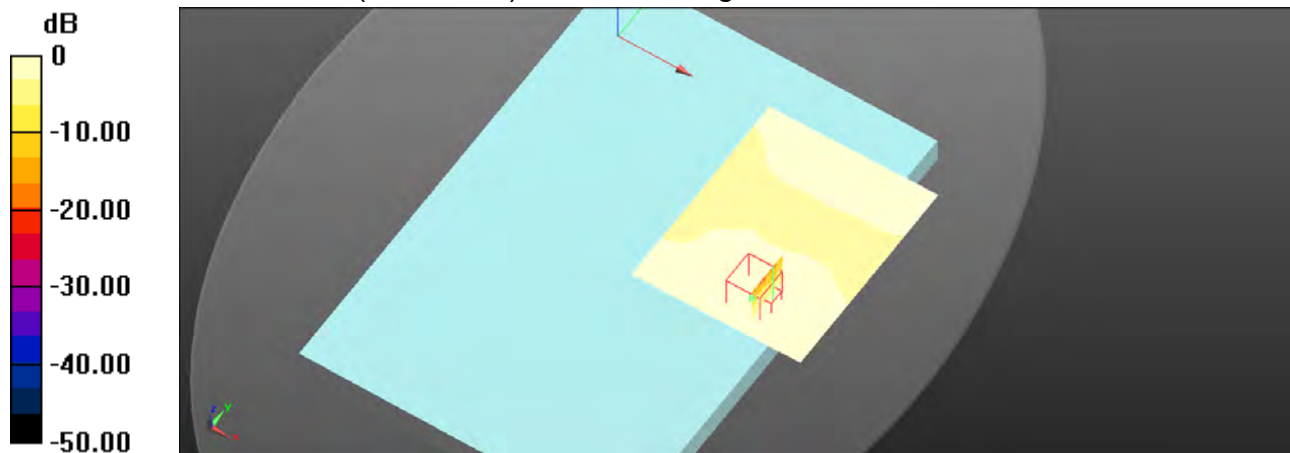

0 dB = 0.0266 W/kg = -15.74 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/14

Report No. : E5/2021/80020**LTE Band 66 (20MHz)_Body_Bottom Surface_CH 132072_QPSK_1-0_0mm**

Communication System: LTE ; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.335$ S/m; $\epsilon_r = 39.556$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(8.27, 8.27, 8.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0590 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.888 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 64%

Maximum value of SAR (measured) = 0.0601 W/kg

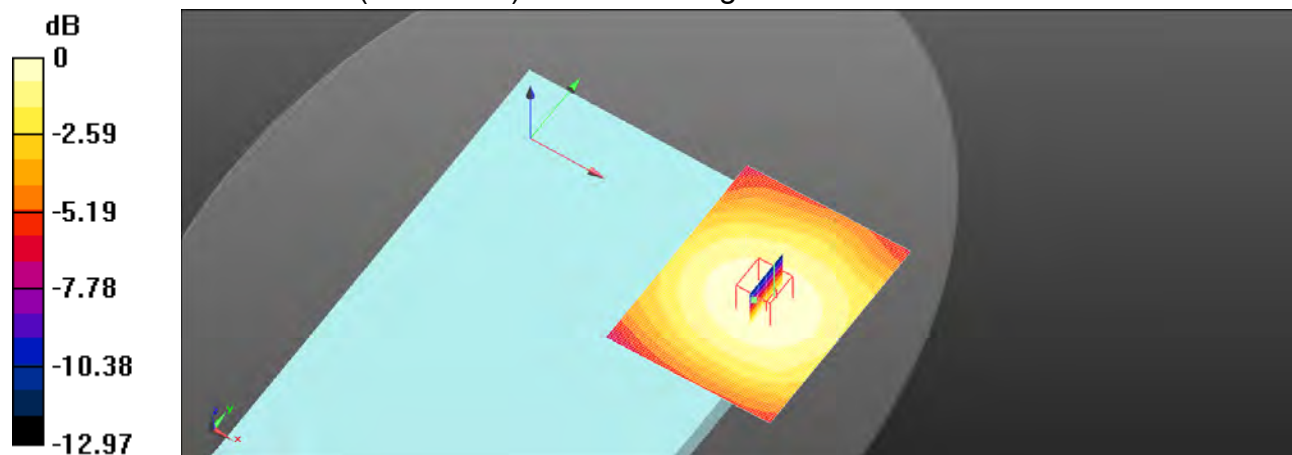

0 dB = 0.0601 W/kg = -12.21 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/15

Report No. : E5/2021/80020**LTE Band 38 (20MHz)_Body_Bottom Surface_CH 37850_QPSK_1-0_0mm**

Communication System: LTE ; Frequency: 2580 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 38.465$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.24, 7.24, 7.24); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (91x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0505 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.574 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.008 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 0.0510 W/kg

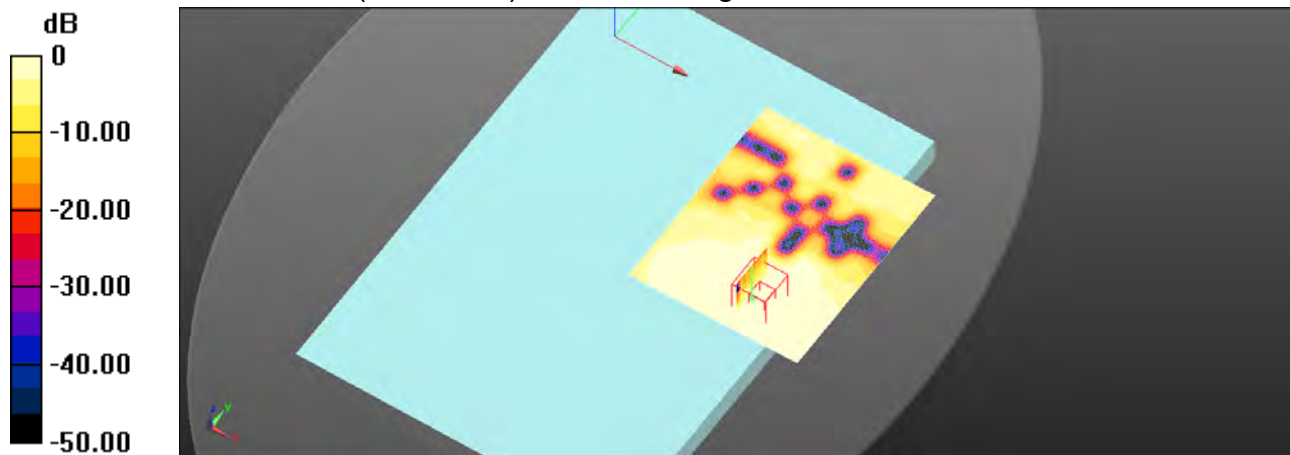

0 dB = 0.0510 W/kg = -12.92 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/15

Report No. : E5/2021/80020**LTE Band 41 (20MHz)_Body_Bottom Surface_CH 40620_QPSK_1-0_0mm**

Communication System: LTE ; Frequency: 2593 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 38.448$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.24, 7.24, 7.24); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (91x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0778 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.919 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.103 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 0.0778 W/kg

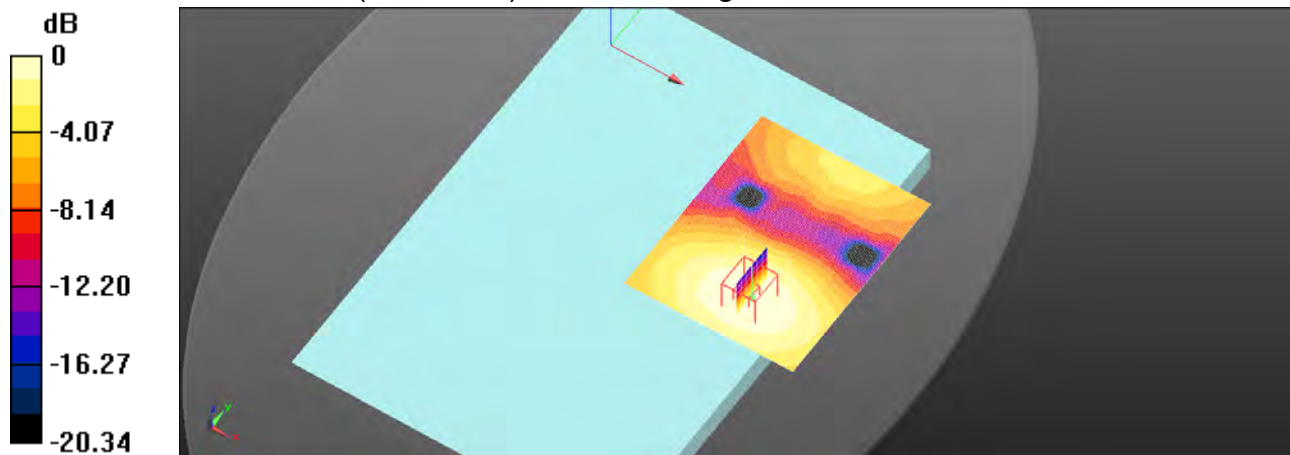

0 dB = 0.0778 W/kg = -11.09 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/17

Report No. : E5/2021/80020**WCDMA Band II_Body_Bottom Surface_CH 9262_0mm**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.595$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.96, 7.96, 7.96); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (101x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0423 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.864 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 66.6%

Maximum value of SAR (measured) = 0.0420 W/kg

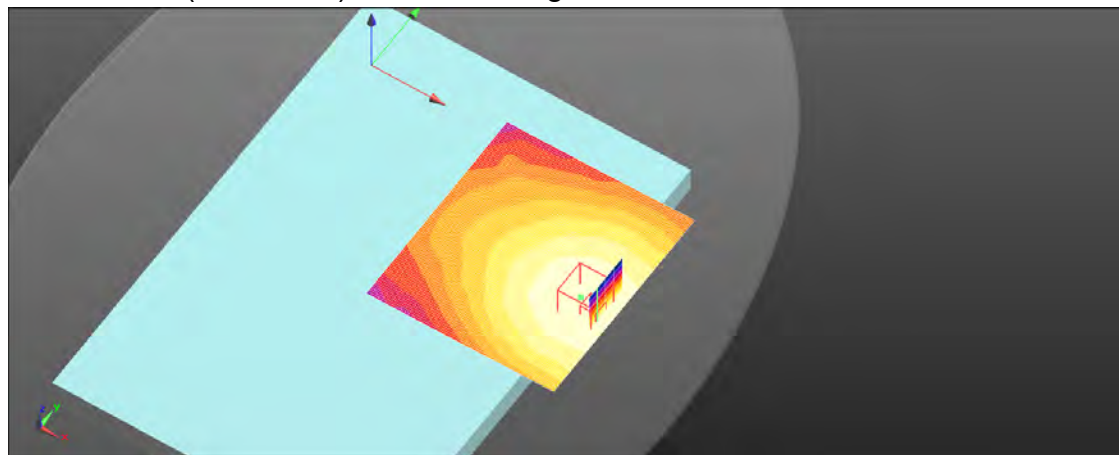

0 dB = 0.0420 W/kg = -13.77 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/17

Report No. : E5/2021/80020**WCDMA Band IV_Body_Bottom Surface_CH 1513_0mm**

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.359$ S/m; $\epsilon_r = 39.669$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(8.27, 8.27, 8.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (101x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0550 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.589 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.017 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.7%

Maximum value of SAR (measured) = 0.0349 W/kg

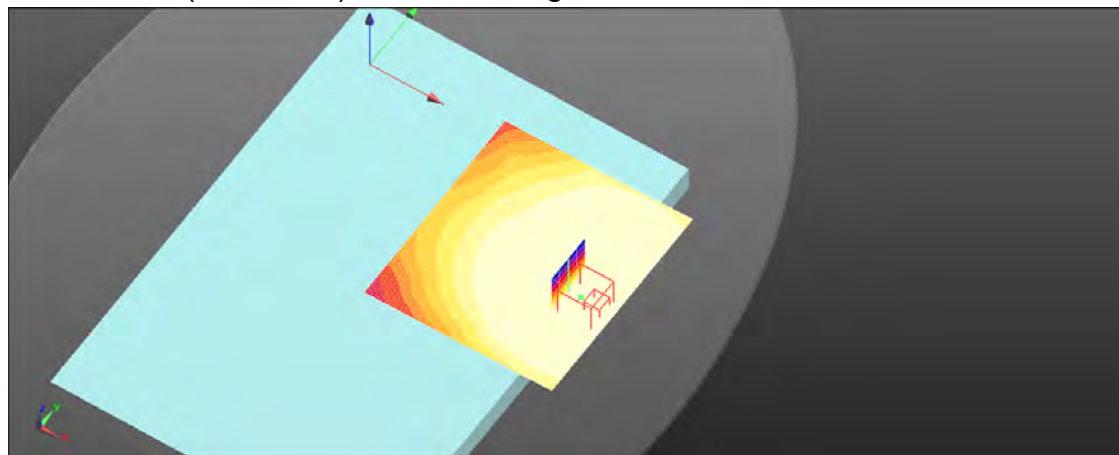

0 dB = 0.0349 W/kg = -14.57 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/16

Report No. : E5/2021/80020**WCDMA Band V_Body_Bottom Surface_CH 4183_0mm**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.142$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(9.27, 9.27, 9.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (81x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0176 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.547 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.012 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.5%

Maximum value of SAR (measured) = 0.0201 W/kg

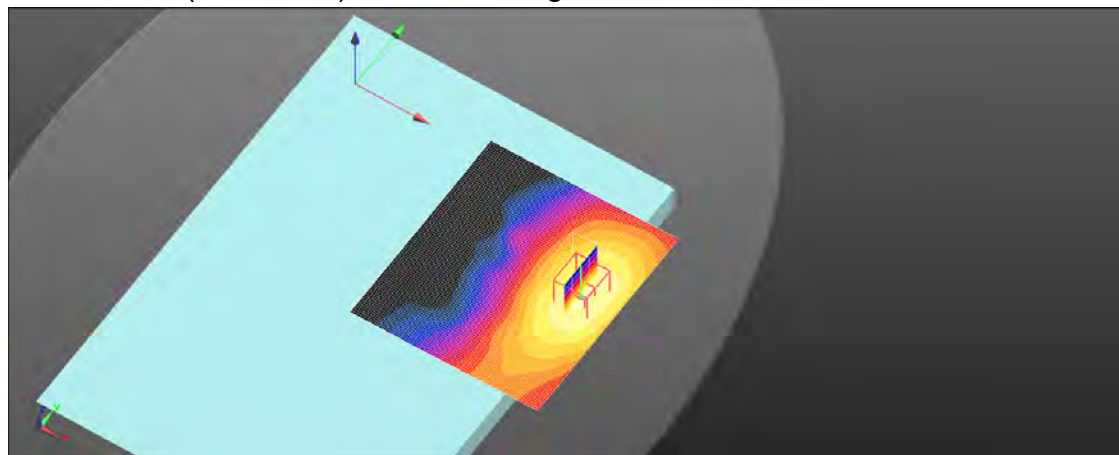

0 dB = 0.0201 W/kg = -16.97 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/17

Report No. : E5/2021/80020**LTE Band 2 (20MHz)_Body_Bottom Surface_CH 18700_QPSK_1-0_0mm**

Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 39.595$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.96, 7.96, 7.96); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (101x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0284 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.193 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 64.5%

Maximum value of SAR (measured) = 0.0284 W/kg

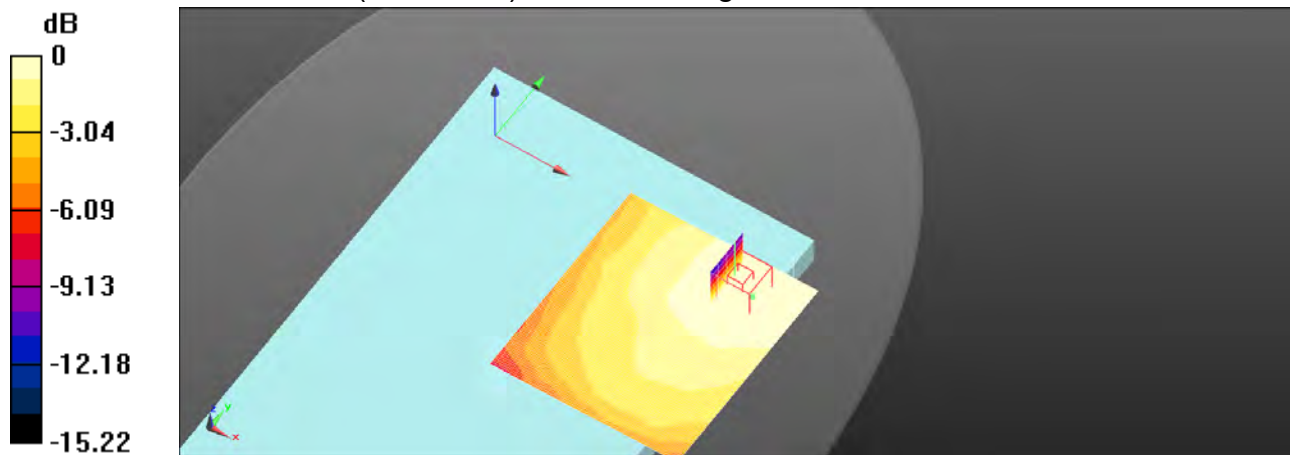

0 dB = 0.0284 W/kg = -15.46 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/17

Report No. : E5/2021/80020**LTE Band 4 (20MHz)_Body_Bottom Surface_CH 20175_QPSK_1-0_0mm**

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.348$ S/m; $\epsilon_r = 39.701$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(8.27, 8.27, 8.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (101x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0580 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.841 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.019 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 0.0583 W/kg

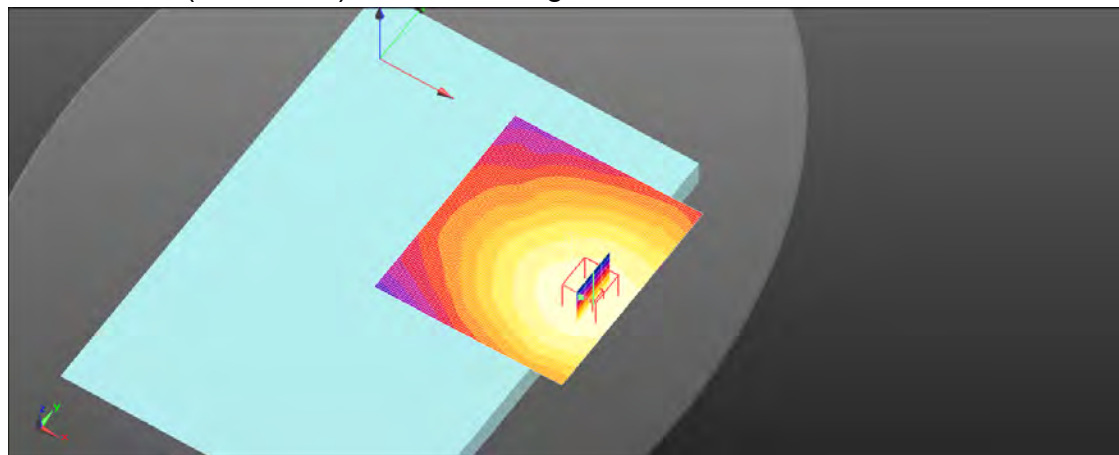

0 dB = 0.0583 W/kg = -12.35 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/16

Report No. : E5/2021/80020**LTE Band 5 (10MHz)_Body_Bottom Surface_CH 20600_QPSK_1-0_0mm**



Communication System: LTE; Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 41.117$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C ; Liquid temperature: 21.4°C **DASY5 Configuration:**

- Probe: EX3DV4 - SN3938; ConvF(9.27, 9.27, 9.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

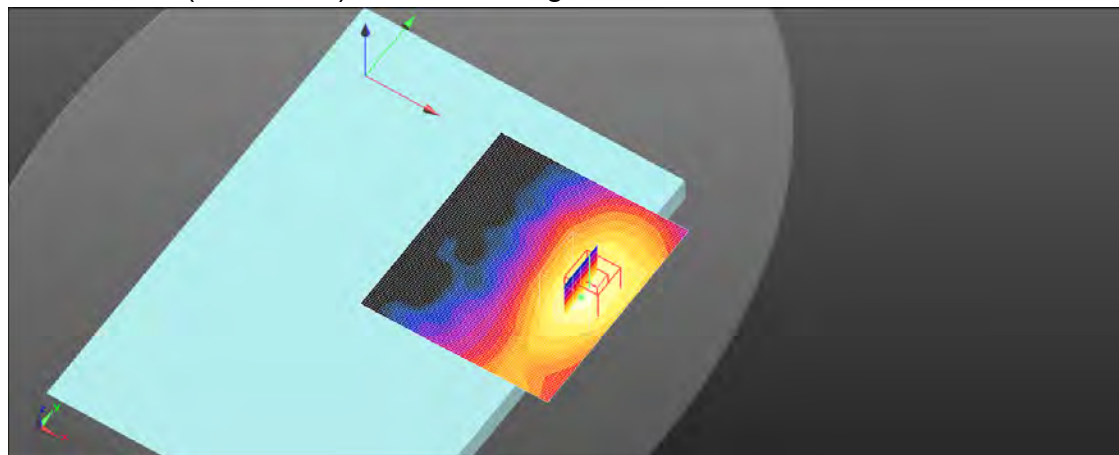Area Scan (81x91x1): Interpolated grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0183 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.025 V/m ; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.0230 W/kg **SAR(1 g) = 0.017 W/kg ; SAR(10 g) = 0.012 W/kg** Smallest distance from peaks to all points 3 dB below = 10.4 mm Ratio of SAR at M2 to SAR at M1 = 73.4% Maximum value of SAR (measured) = 0.0202 W/kg  $0 \text{ dB} = 0.0202 \text{ W/kg} = -16.95 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/18

Report No. : E5/2021/80020**LTE Band 7 (20MHz)_Body_Bottom Surface_CH 20850_QPSK_1-0_0mm**

Communication System: LTE; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2510$ MHz; $\sigma = 1.845$ S/m; $\epsilon_r = 38.719$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.24, 7.24, 7.24); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (101x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.132 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.195 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.019 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.0486 W/kg

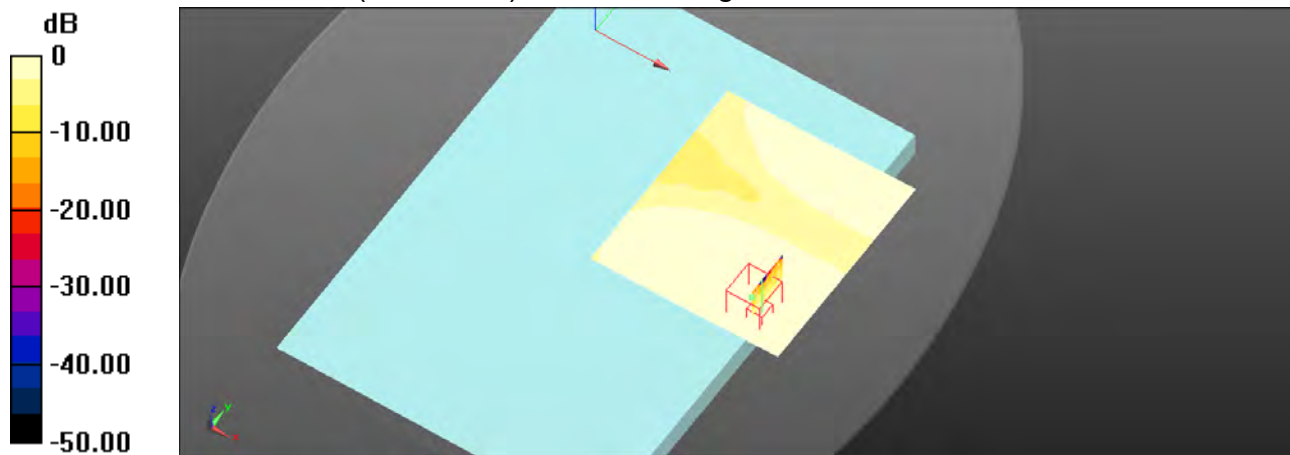

0 dB = 0.0486 W/kg = -13.13 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/16

Report No. : E5/2021/80020**LTE Band 12 (10MHz)_Body_Bottom Surface_CH 23095_QPSK_1-0_0mm**

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 41.755$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(9.61, 9.61, 9.61); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (81x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0233 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.453 V/m; Power Drift = -0.03 dB



Peak SAR (extrapolated) = 0.0280 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 74.1%

Maximum value of SAR (measured) = 0.0244 W/kg

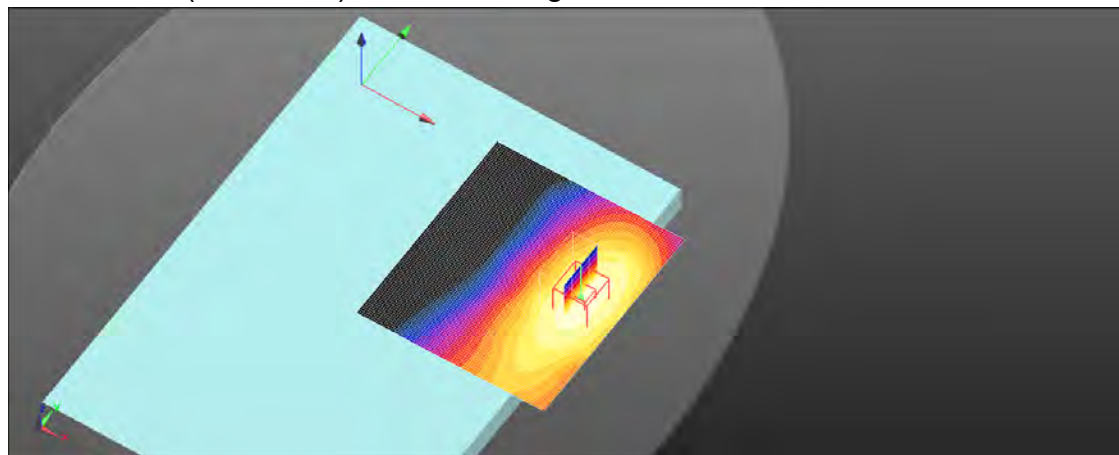

0 dB = 0.0244 W/kg = -16.12 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/16

Report No. : E5/2021/80020**LTE Band 13 (10MHz)_Body_Bottom Surface_CH 23230_QPSK_1-0_0mm**

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 41.37$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Flat Section

Ambient temperature: 22.3°C ; Liquid temperature: 21.4°C **DASY5 Configuration:**

- Probe: EX3DV4 - SN3938; ConvF(9.61, 9.61, 9.61); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (81x91x1): Interpolated grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$ Maximum value of SAR (interpolated) = 0.0342 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.549 V/m ; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.0270 W/kg **SAR(1 g) = 0.021 W/kg ; SAR(10 g) = 0.016 W/kg** Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 77%

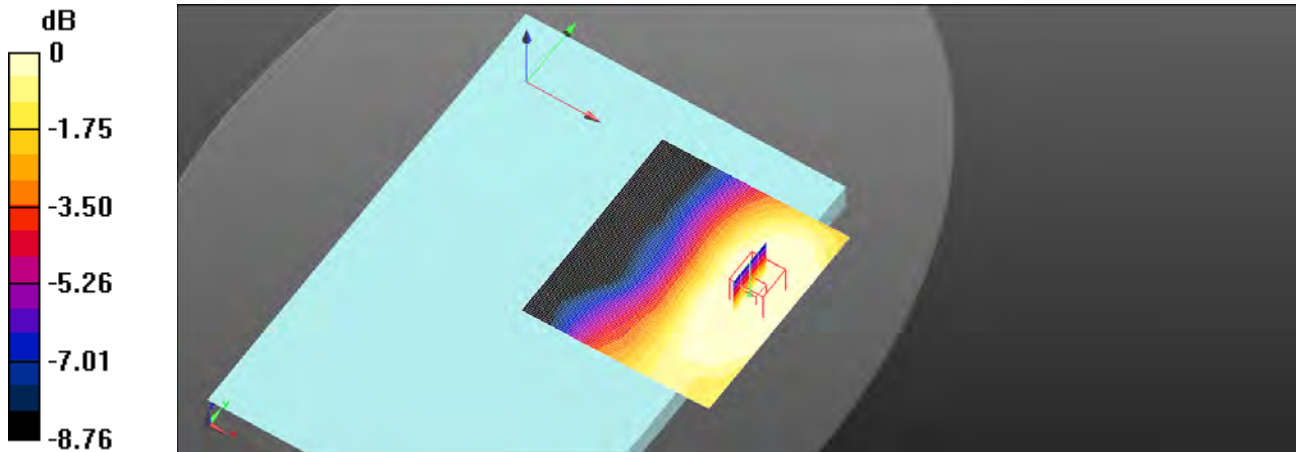Maximum value of SAR (measured) = 0.0249 W/kg  $0 \text{ dB} = 0.0249 \text{ W/kg} = -16.05 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/16

Report No. : E5/2021/80020**LTE Band 17 (10MHz)_Body_Bottom Surface_CH 23800_QPSK_1-0_0mm**

Communication System: LTE; Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.882 \text{ S/m}$; $\epsilon_r = 41.739$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(9.61, 9.61, 9.61); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (81x91x1): Interpolated grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0204 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.638 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below = 10.5 mm

Ratio of SAR at M2 to SAR at M1 = 77%

Maximum value of SAR (measured) = 0.0204 W/kg

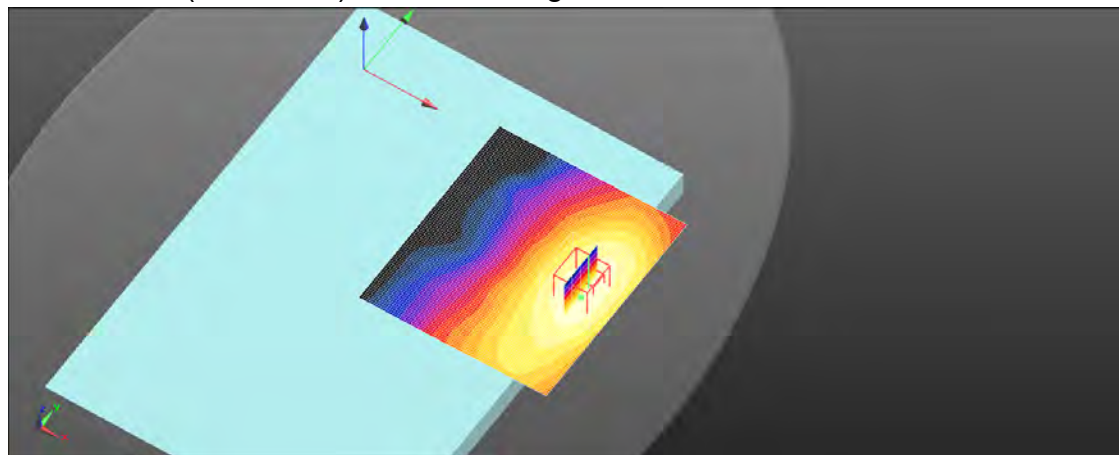

0 dB = 0.0204 W/kg = -16.91 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/16

Report No. : E5/2021/80020**LTE Band 26 (15MHz)_Body_Bottom Surface_CH 26865_QPSK_1-0_0mm**

Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 41.161$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(9.27, 9.27, 9.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (81x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0107 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.124 V/m; Power Drift = -0.05 dB



Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.00852 W/kg; SAR(10 g) = 0.0067 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 82.3%

Maximum value of SAR (measured) = 0.00986 W/kg

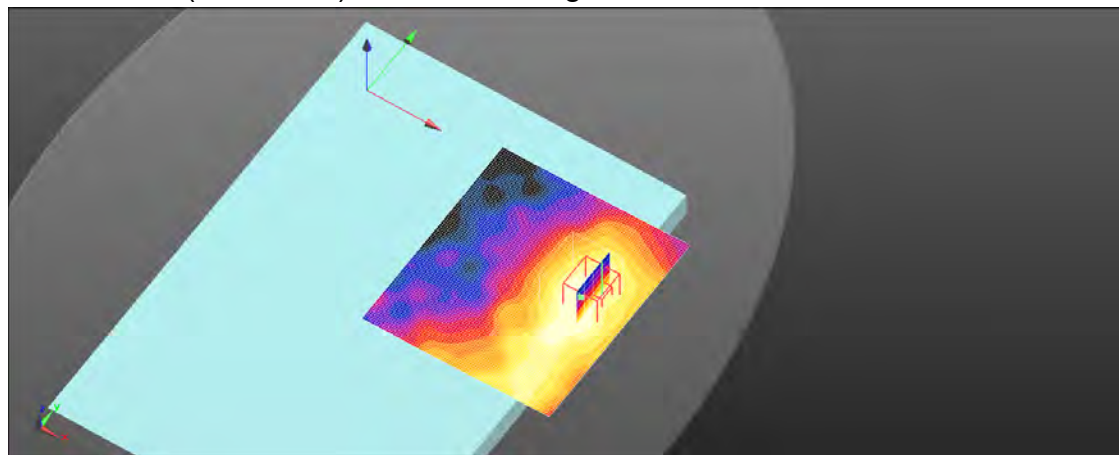

0 dB = 0.00986 W/kg = -20.06 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/18

Report No. : E5/2021/80020**LTE Band 30 (10MHz)_Body_Bottom Surface_CH 27710_QPSK_1-0_0mm**

Communication System: LTE; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.673$ S/m; $\epsilon_r = 39.044$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.71, 7.71, 7.71); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (101x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0460 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.897 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.0580 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 0.0460 W/kg

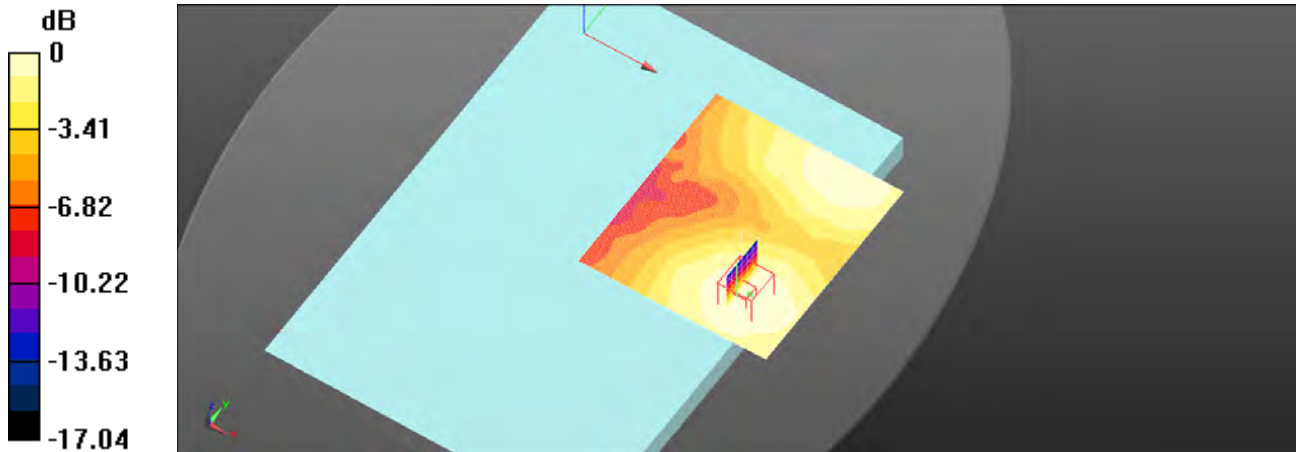

0 dB = 0.0460 W/kg = -13.38 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/17

Report No. : E5/2021/80020**LTE Band 66 (20MHz)_Body_Bottom Surface_CH 132072_QPSK_1-0_0mm**

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 39.721$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(8.27, 8.27, 8.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (101x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.0423 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.864 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.013 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 66.6%

Maximum value of SAR (measured) = 0.0420 W/kg

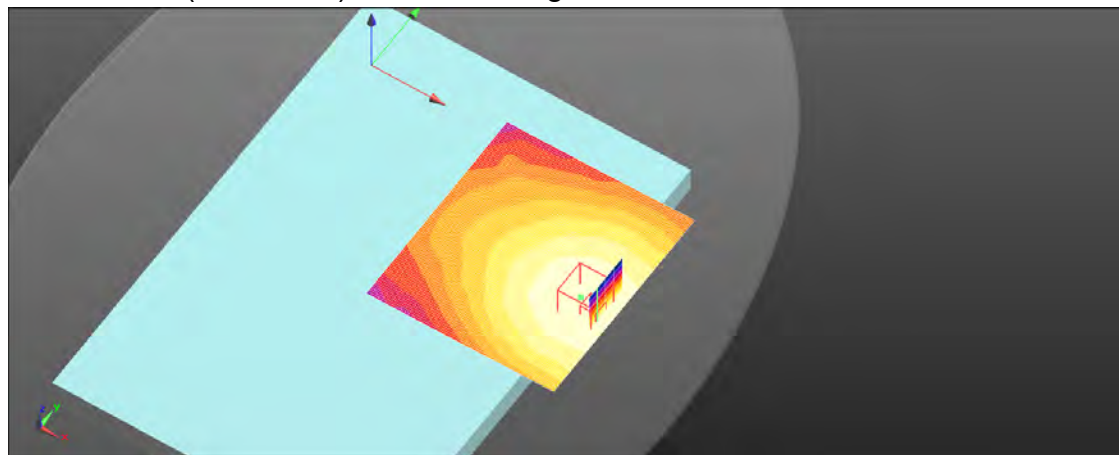

0 dB = 0.0420 W/kg = -13.77 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/18

Report No. : E5/2021/80020**LTE Band 38 (20MHz)_Body_Bottom Surface_CH 37850_QPSK_1-0_0mm**

Communication System: LTE; Frequency: 2580 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 38.63$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.24, 7.24, 7.24); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (91x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0521 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.328 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.012 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 0.0529 W/kg

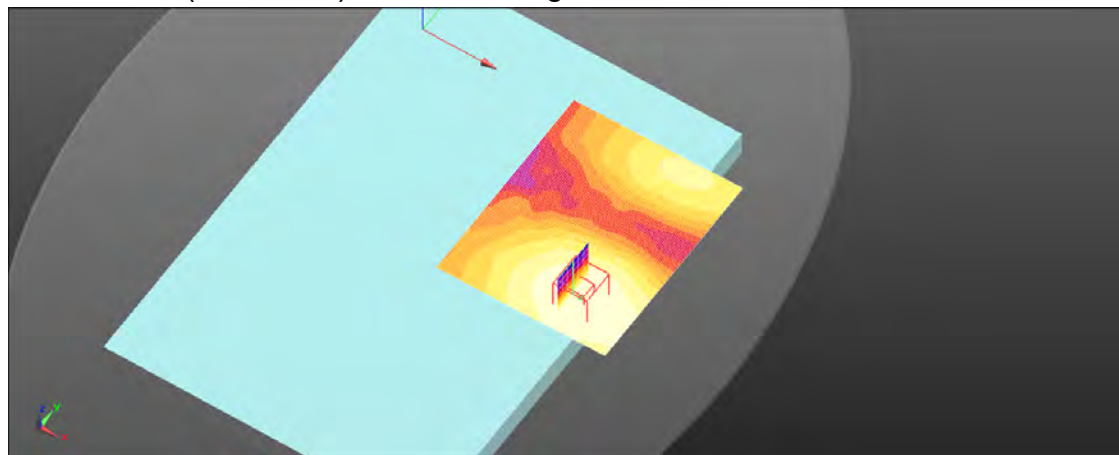

0 dB = 0.0529 W/kg = -12.77 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/18

Report No. : E5/2021/80020**LTE Band 41 (20MHz)_Body_Bottom Surface_CH 40620_QPSK_1-0_0mm**

Communication System: LTE; Frequency: 2593 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.919$ S/m; $\epsilon_r = 38.613$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.24, 7.24, 7.24); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (101x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0569 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.236 V/m; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 0.0750 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.014 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 0.0564 W/kg

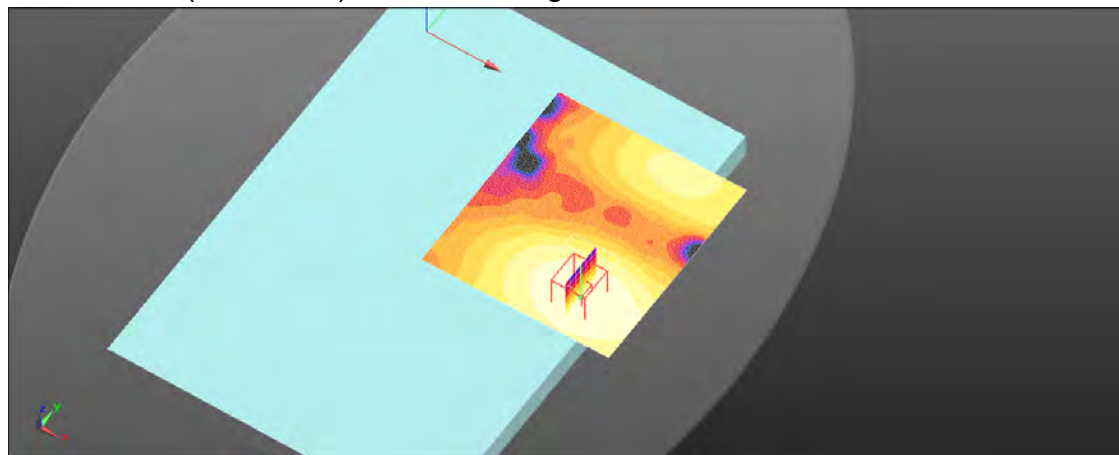

0 dB = 0.0564 W/kg = -12.49 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

6. SAR System Performance Verification

Date: 2021/10/13

Report No. : E5/2021/80020

Dipole 750 MHz_SN:1078

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.880 \text{ S/m}$; $\epsilon_r = 41.372$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Ambient temperature: 22.6°C ; Liquid temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(9.61, 9.61, 9.61); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (51x71x1): Interpolated grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$ Maximum value of SAR (interpolated) = 2.59 W/kg **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 60.42 V/m ; Power Drift = 0.04 dB Peak SAR (extrapolated) = 3.04 W/kg **SAR(1 g) = 2.15 W/kg ; SAR(10 g) = 1.38 W/kg** Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 69%

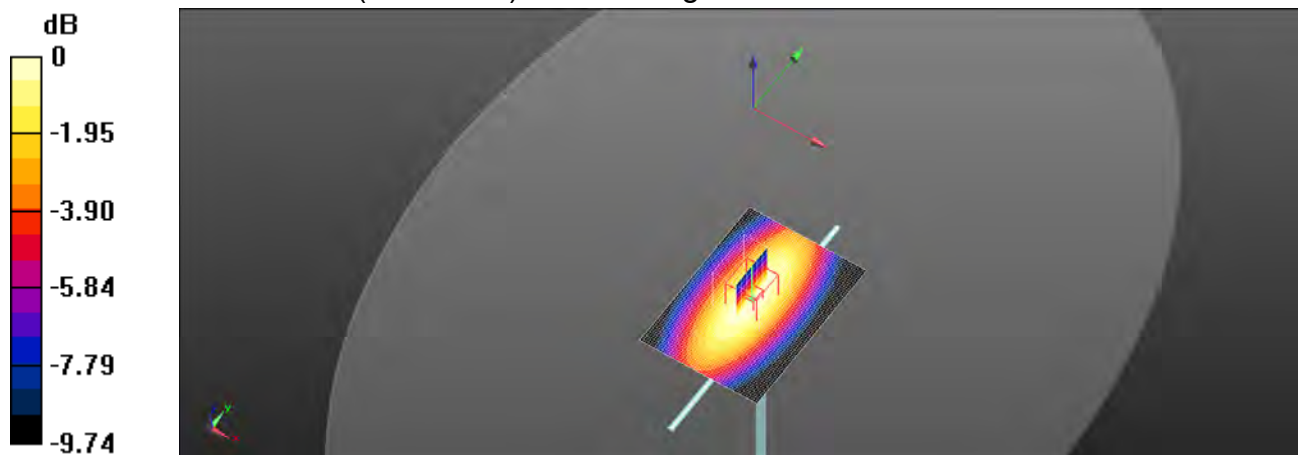Maximum value of SAR (measured) = 2.63 W/kg  $0 \text{ dB} = 2.63 \text{ W/kg} = 4.19 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/13

Report No. : E5/2021/80020**Dipole 835 MHz_SN:4d166**



Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 40.985$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C ; Liquid temperature: 21.7°C **DASY5 Configuration:**

- Probe: EX3DV4 - SN3938; ConvF(9.27, 9.27, 9.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

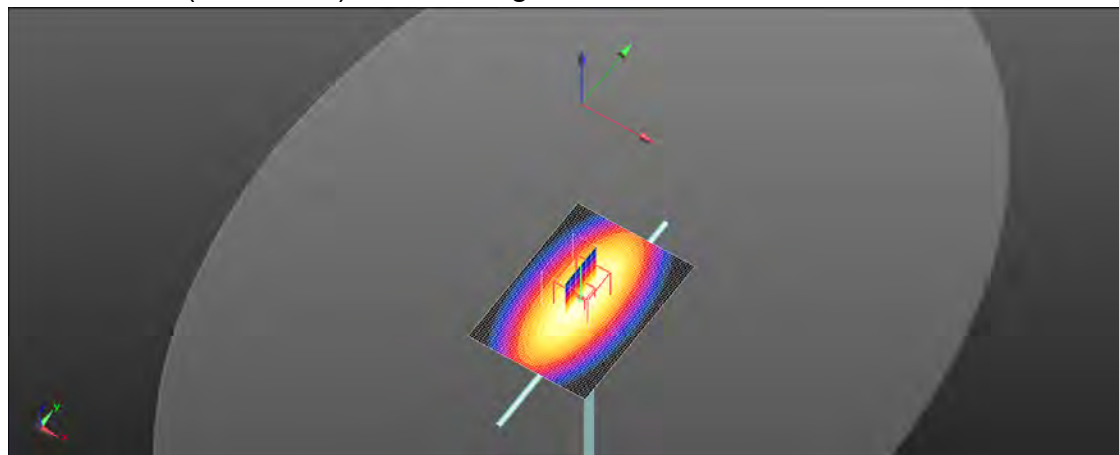Area Scan (51x71x1): Interpolated grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$ Maximum value of SAR (interpolated) = 3.34 W/kg **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 62.75 V/m ; Power Drift = 0.02 dB Peak SAR (extrapolated) = 3.95 W/kg **SAR(1 g) = 2.37 W/kg ; SAR(10 g) = 1.6 W/kg** Smallest distance from peaks to all points 3 dB below = 8.3 mm Ratio of SAR at M2 to SAR at M1 = 67.8% Maximum value of SAR (measured) = 3.39 W/kg  $0 \text{ dB} = 3.39 \text{ W/kg} = 5.30 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/14

Report No. : E5/2021/80020**Dipole 1750 MHz_SN:1111**

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 39.509$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(8.27, 8.27, 8.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (51x81x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 13.6 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.5 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.32 W/kg; SAR(10 g) = 4.92 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.7%

Maximum value of SAR (measured) = 13.2 W/kg

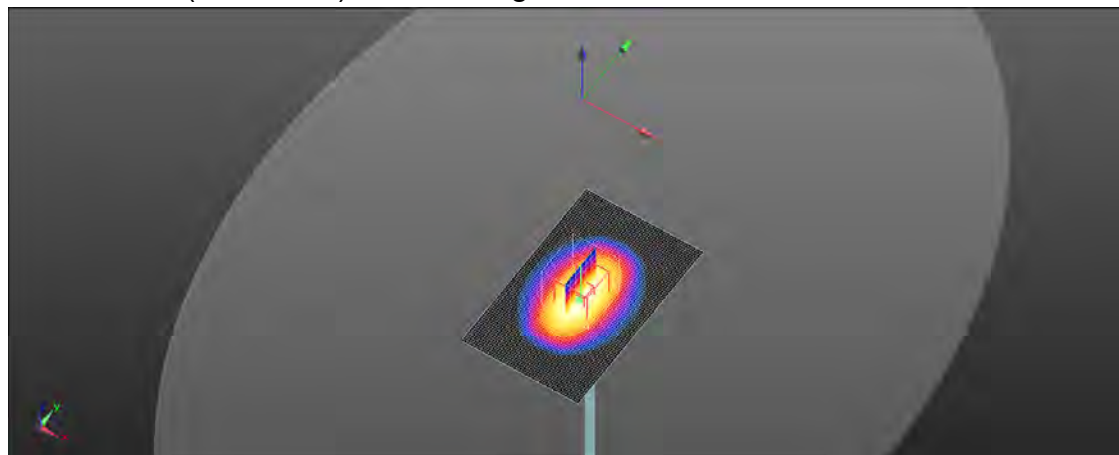

0 dB = 13.2 W/kg = 11.22 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/14

Report No. : E5/2021/80020**Dipole 1900 MHz_SN:5d173**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 39.43$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.96, 7.96, 7.96); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (61x71x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 13.6 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 79.34 V/m; Power Drift = 0.03 dB



Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 9.66 W/kg; SAR(10 g) = 4.98 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 12.8 W/kg

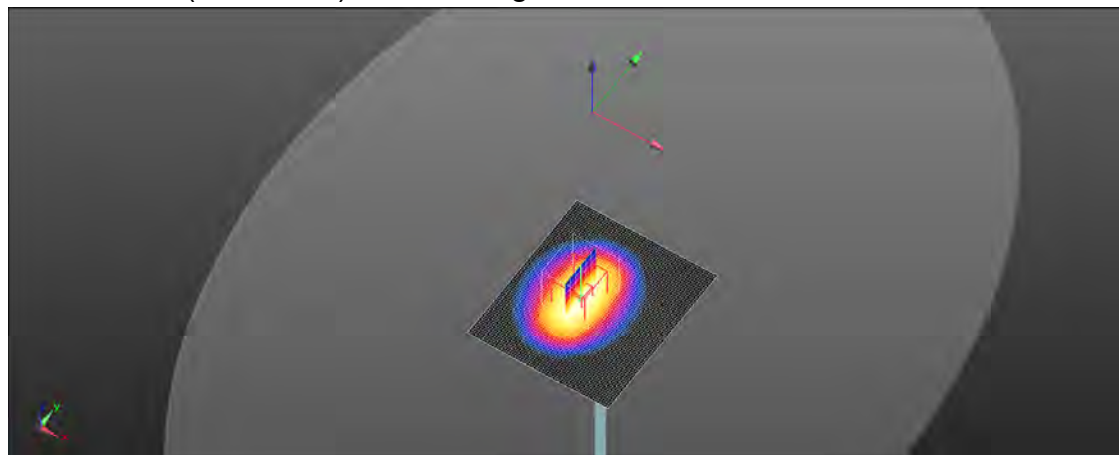

0 dB = 12.8 W/kg = 11.08 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/15

Report No. : E5/2021/80020**Dipole 2300 MHz_SN:1092**

Communication System: CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.658$ S/m; $\epsilon_r = 38.897$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.71, 7.71, 7.71); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 23.8 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.9 V/m; Power Drift = 0.05 dB



Peak SAR (extrapolated) = 31.5 W/kg

SAR(1 g) = 12.19 W/kg; SAR(10 g) = 5.96 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 58%

Maximum value of SAR (measured) = 22.9 W/kg

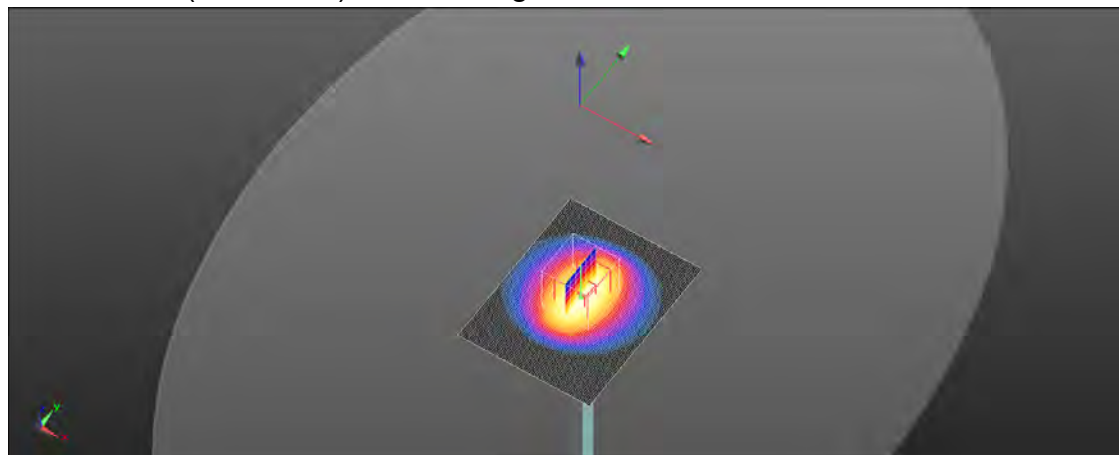

0 dB = 22.9 W/kg = 13.59 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/15

Report No. : E5/2021/80020**Dipole 2600 MHz_SN:1005**

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.917$ S/m; $\epsilon_r = 38.439$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.24, 7.24, 7.24); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (51x71x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 23.6 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.4 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 29.2 W/kg

SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.2 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 21.4 W/kg

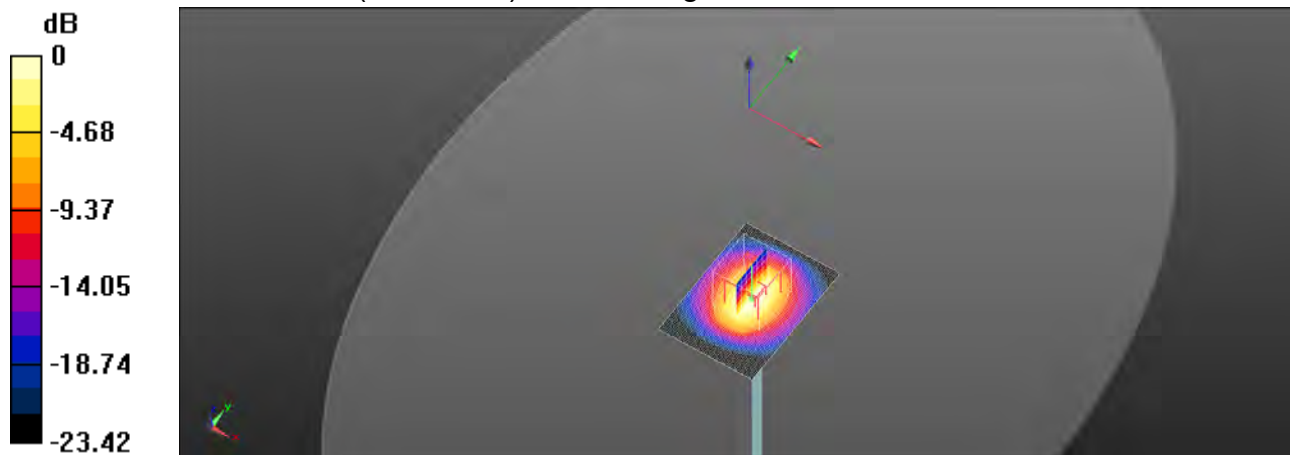

0 dB = 21.4 W/kg = 13.30 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/16

Report No. : E5/2021/80020**Dipole 750 MHz_SN:1078**



Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.884 \text{ S/m}$; $\epsilon_r = 41.537$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C ; Liquid temperature: 21.4°C **DASY5 Configuration:**

- Probe: EX3DV4 - SN3938; ConvF(9.61, 9.61, 9.61); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

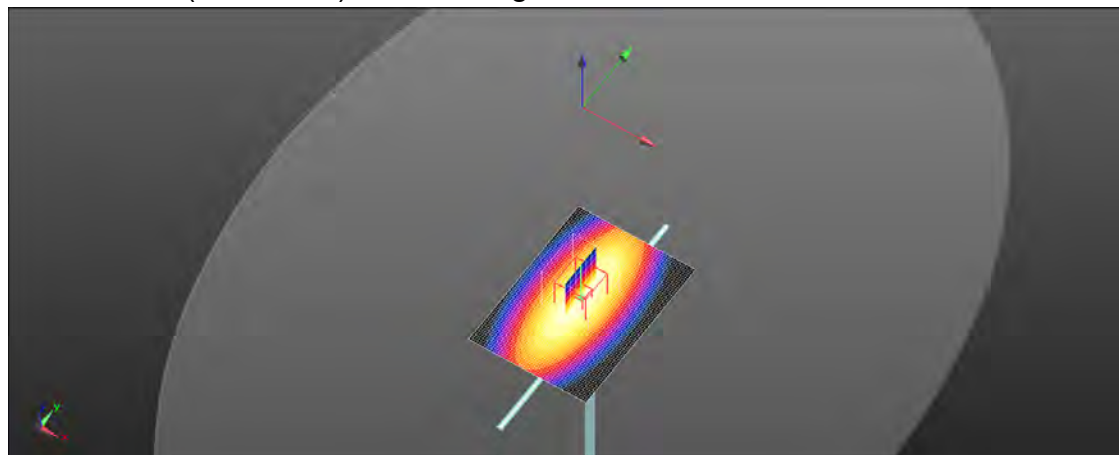Area Scan (51x71x1): Interpolated grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$ Maximum value of SAR (interpolated) = 2.61 W/kg **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 60.65 V/m ; Power Drift = 0.04 dB Peak SAR (extrapolated) = 3.07 W/kg **SAR(1 g) = 2.17 W/kg ; SAR(10 g) = 1.42 W/kg** Smallest distance from peaks to all points 3 dB below = 8.2 mm Ratio of SAR at M2 to SAR at M1 = 69.1% Maximum value of SAR (measured) = 2.65 W/kg  $0 \text{ dB} = 2.65 \text{ W/kg} = 4.23 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/16

Report No. : E5/2021/80020**Dipole 835 MHz_SN:4d166**



Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.901 \text{ S/m}$; $\epsilon_r = 41.15$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C ; Liquid temperature: 21.4°C **DASY5 Configuration:**

- Probe: EX3DV4 - SN3938; ConvF(9.27, 9.27, 9.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

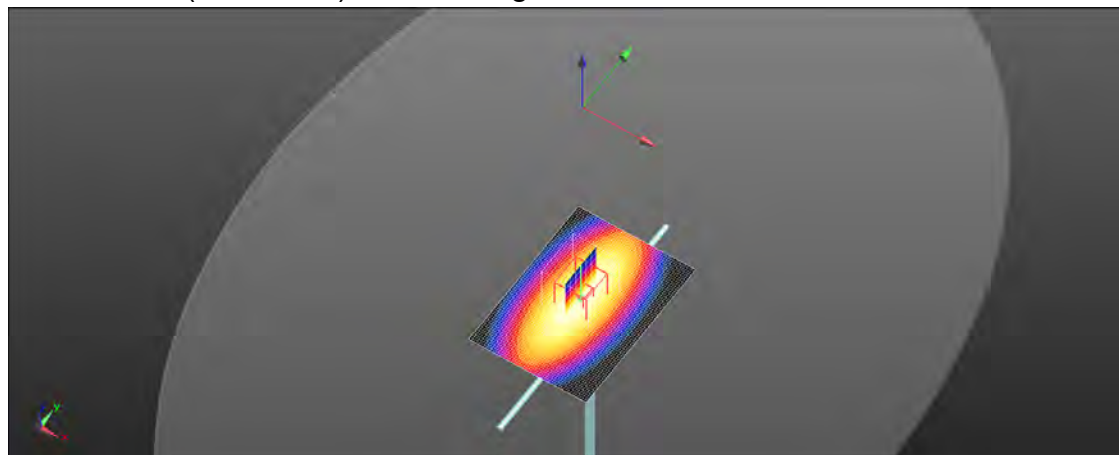Area Scan (51x71x1): Interpolated grid: $dx=15 \text{ mm}$, $dy=15 \text{ mm}$ Maximum value of SAR (interpolated) = 2.88 W/kg **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 62.37 V/m ; Power Drift = 0.05 dB Peak SAR (extrapolated) = 3.38 W/kg **SAR(1 g) = 2.35 W/kg ; SAR(10 g) = 1.58 W/kg** Smallest distance from peaks to all points 3 dB below = 9.6 mm Ratio of SAR at M2 to SAR at M1 = 67.7% Maximum value of SAR (measured) = 2.90 W/kg  $0 \text{ dB} = 2.90 \text{ W/kg} = 4.63 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/17

Report No. : E5/2021/80020**Dipole 1750 MHz_SN:1111**

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 39.674$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(8.27, 8.27, 8.27); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (51x81x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 13.5 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.4 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 9.21 W/kg; SAR(10 g) = 4.84 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 13.2 W/kg

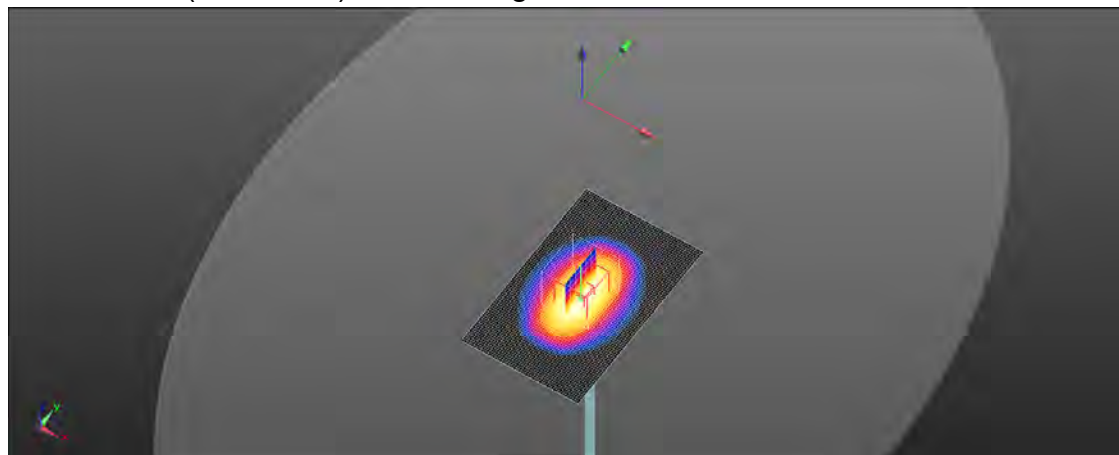

0 dB = 13.2 W/kg = 11.21 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/17

Report No. : E5/2021/80020**Dipole1900 MHz_SN:5d173**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.389$ S/m; $\epsilon_r = 39.595$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.2°C; Liquid temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.96, 7.96, 7.96); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (61x71x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 15.1 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 79.72 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 9.63 W/kg; SAR(10 g) = 4.91 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 14.3 W/kg

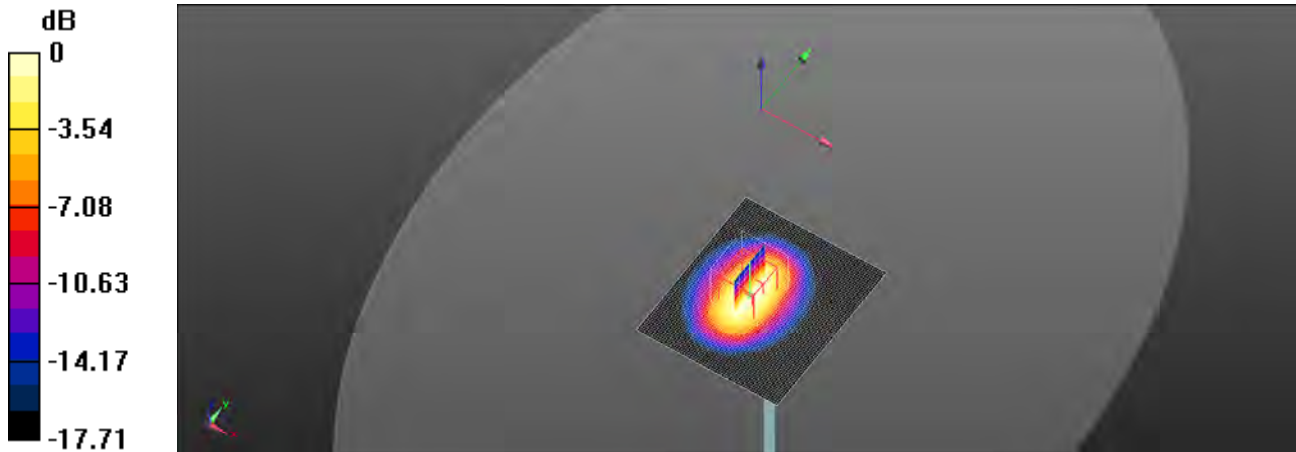

0 dB = 14.3 W/kg = 11.55 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/18

Report No. : E5/2021/80020**Dipole 2300 MHz_SN:1092**

Communication System: CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.665$ S/m; $\epsilon_r = 39.062$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.71, 7.71, 7.71); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 19.7 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 115.5 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 25.9 W/kg

SAR(1 g) = 12.14 W/kg; SAR(10 g) = 5.81 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 18.9 W/kg

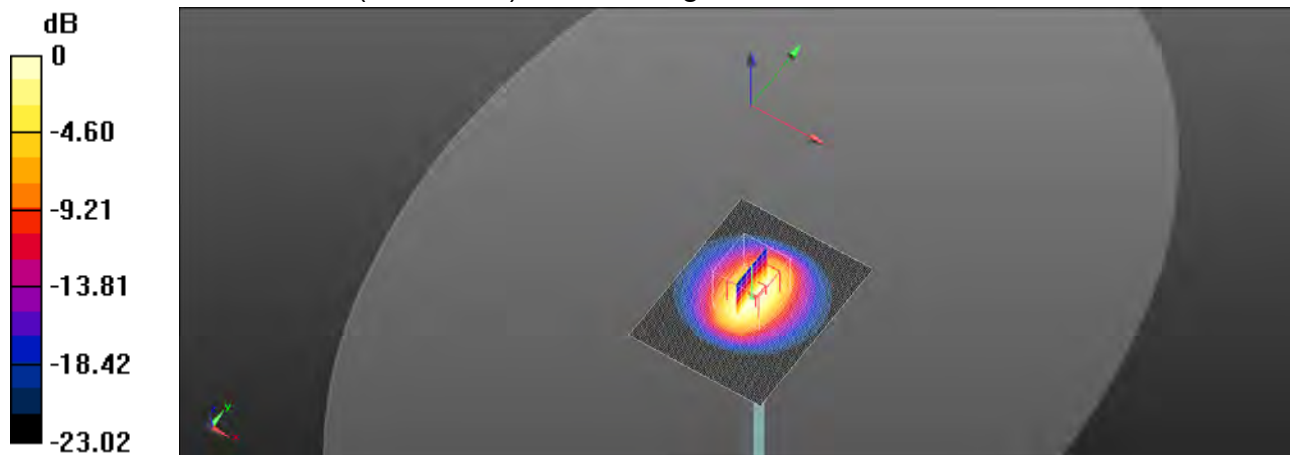

0 dB = 18.9 W/kg = 12.77 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Date: 2021/10/18

Report No. : E5/2021/80020**Dipole 2600 MHz_SN:1005**

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.925$ S/m; $\epsilon_r = 38.604$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3938; ConvF(7.24, 7.24, 7.24); Calibrated: 2021/2/22
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn547; Calibrated: 2021/3/22
- Phantom: ELI
- DASY52 4.7.80(0); SEMCAD X 14.6.14(7483)

Area Scan (51x71x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 23.8 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.5 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 29.5 W/kg

SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.23 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 21.6 W/kg

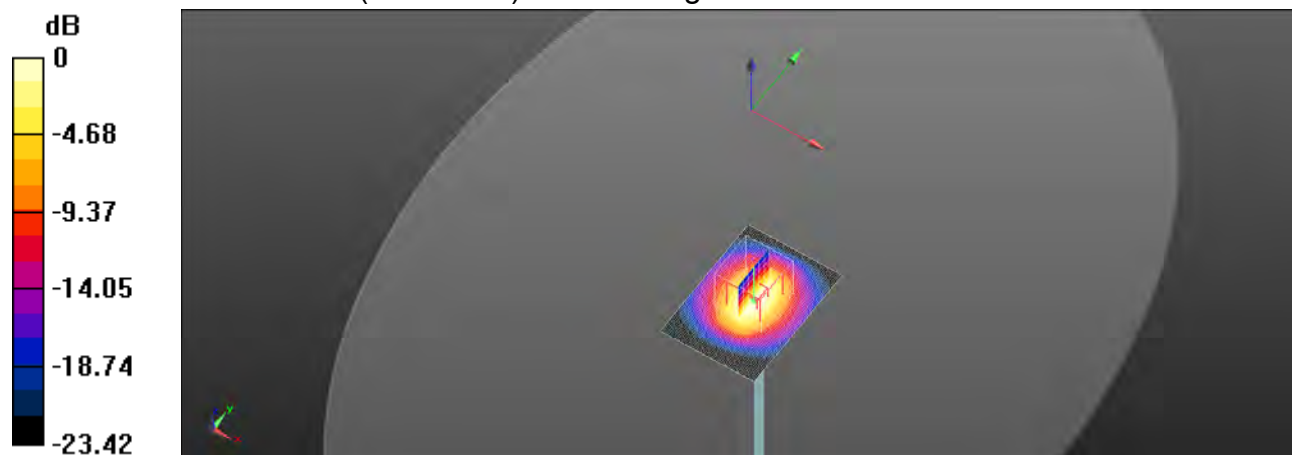

0 dB = 21.6 W/kg = 13.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

7. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	c	D	e		f	g	$h=c * f / e$	$i=c * g / e$	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabilit y	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
<i>Isotropy , Axial</i>	3.50%	R	$\sqrt{3}$	1.732	1	1	2.02%	2.02%	∞
<i>Isotropy, Hemispherical</i>	9.60%	R	$\sqrt{3}$	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	$\sqrt{3}$	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	$\sqrt{3}$	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	$\sqrt{3}$	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	$\sqrt{3}$	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	$\sqrt{3}$	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	$\sqrt{3}$	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	$\sqrt{3}$	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	$\sqrt{3}$	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom	2.90%	R	$\sqrt{3}$	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	$\sqrt{3}$	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	$\sqrt{3}$	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	2.40%	N	1	1	0.64	0.43	1.54%	1.03%	M
Liquid Conductivity (mea.)	3.01%	N	1	1	0.6	0.49	1.81%	1.47%	M
Combined standard uncertainty		RSS					11.66%	11.55%	
Expant uncertainty (95% confidence)							23.32%	23.10%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Appendixes

Refer to separated files for the following appendixes.

E5202180020 SAR_Appendix A Photographs

E5202180020 SAR_Appendix B DAE & Probe Cal. Certificate

E5202180020 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group