



CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-27521059 Fax: +86-755-27521011 <http://www.sz-ctc.org.cn>

TEST REPORT

Report No. : **CTC2024082011**

FCC ID : **2APN5SGC**

IC : **29127-SGC**

Applicant : **Shenzhen Sonoff Technologies Co.,Ltd.**

Address : 3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

Manufacturer : Shenzhen Sonoff Technologies Co.,Ltd.

Address : 3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

Product Name : **Smart Garage Door Controller**

Trade Mark :  **SONOFF**, Sonoff

Model/Type reference : SGC300

Listed Model(s) : SGC200, SGC100

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247
RSS-247 Issue 3**

Date of receipt of test sample : Apr. 15, 2024

Date of testing : Apr. 15, 2024 to May 30, 2024


Date of issue : Jul. 10, 2024

Result : **PASS**

Compiled by:

(Printed name+signature)


Jim Jiang



Supervised by:

(Printed name+signature)

Eric Zhang



Approved by:

(Printed name+signature)

Totti Zhao



This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample.



Table of Contents

Page

1. TEST SUMMARY	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION.....	3
1.4. TEST FACILITY	4
1.5. MEASUREMENT UNCERTAINTY	5
1.6. ENVIRONMENTAL CONDITIONS.....	5
2. GENERAL INFORMATION	6
2.1. CLIENT INFORMATION	6
2.2. GENERAL DESCRIPTION OF EUT	6
2.3. ACCESSORY EQUIPMENT INFORMATION	7
2.4. OPERATION STATE	8
2.5. MEASUREMENT INSTRUMENTS LIST	10
3. TEST ITEM AND RESULTS	12
3.1. CONDUCTED EMISSION.....	12
3.2. RADIATED EMISSION.....	15
3.3. BAND EDGE EMISSIONS (RADIATED)	32
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED)	49
3.5. DTS BANDWIDTH.....	66
3.6. PEAK OUTPUT POWER	76
3.7. POWER SPECTRAL DENSITY	78
3.8. DUTY CYCLE	84
3.9. ANTENNA REQUIREMENT.....	90



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

[RSS-247 Issue 3](#): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

[RSS-Gen Issue 5](#): General Requirements for Compliance of Radio Apparatus.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2024082010	Jul. 10, 2024	Original

1.3. Test Description

FCC Part 15 Subpart C (15.247) / RSS-247 Issue 3				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	RSS-Gen 6.8	Pass	Jim Jiang
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Jim Jiang
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS-247 5.5	Pass	Jim Jiang
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS-247 5.5	Pass	Jim Jiang
6dB Bandwidth	15.247(a)(2)	RSS-247 5.2 (a)	Pass	Jim Jiang
Conducted Max Output Power	15.247(b)(3)	RSS-247 5.4 (d)	Pass	Jim Jiang
Power Spectral Density	15.247(e)	RSS-247 5.2 (b)	Pass	Jim Jiang
Transmitter Radiated Spurious	15.209&15.247(d)	RSS-247 5.5&RSS-Gen 8.9	Pass	Jim Jiang

Note:

- The measurement uncertainty is not included in the test result.
- N/A: means this test item is not applicable for this device according to the technology characteristic of device.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: Room 101 Building B, Room 107, 108, 207, 208, 303 Building A, No. 7, Lanqing 1st Road, Luhuhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China (formerly 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, High-Tech Park, Guanlan Sub-District, Longhua New District, Shenzhen, Guangdong, China)

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
DTS Bandwidth	$\pm 0.0196\%$	(1)
Maximum Conducted Output Power	± 0.686 dB	(1)
Maximum Power Spectral Density Level	± 0.743 dB	(1)
Band-edge Compliance	± 1.328 dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-1GHz: ± 0.746 dB 1GHz-26GHz: ± 1.328 dB	(1)
Conducted Emissions 9kHz~30MHz	± 3.08 dB	(1)
Radiated Emissions 30~1000MHz	± 4.51 dB	(1)
Radiated Emissions 1~18GHz	± 5.84 dB	(1)
Radiated Emissions 18~40GHz	± 6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Shenzhen Sonoff Technologies Co.,Ltd.
Address:	3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Sonoff Technologies Co.,Ltd.
Address:	3F & 6F, Bldg A, No. 663, Bulong Rd, Shenzhen, Guangdong, China

2.2. General Description of EUT

Product Name:	Smart Garage Door Controller
Trade Mark:	 SONOFF , Sonoff
Model/Type reference:	SGC300
Listed Model(s):	SGC200, SGC100
Model Difference:	All these models are identical in the same PCB, layout, electrical circuit. The difference is controlling the number of channels. The SGC300 controls three channels. The SGC200 controls two channels. SGC100 controls one channel.
Power Supply:	Input: DC5V 1A
Hardware Version:	V1.0
Software Version:	V1.0.0
2.4G WiFi	
Modulation:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/ n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
Operation Frequency:	802.11b/ g/ n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Channel Number:	802.11b/ g/ n(HT20): 11 channels 802.11n(HT40): 7 channels
Channel Separation:	5MHz
Antenna Type:	PCB Antenna
Directional Gain:	2.82dBi



2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkPad T460s	/	Lenovo
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	100cm
Test Software Information			
Name	Version	/	/
EspRFTTestTool	v3.6	/	/



2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note: CH 01~CH 11 for 802.11b/g/n(HT20), CH 03~CH 09 for 802.11n(HT40).

Data Rated:

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Test Mode	Data Rate (worst mode)
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)/(HT40)	HT-MCS0



Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

The worse case configurations:

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band		
Test Software	EspRFTTestTool_v3.6	
Modulation Mode	Test Channel	Attenuation
802.11b	01	Default
	06	Default
	11	Default
802.11g	01	Default
	06	Default
	11	Default
802.11n(HT20)	01	Default
	06	Default
	11	Default
802.11n(HT40)	03	Default
	06	Default
	09	Default



2.5. Measurement Instruments List

Tonscend RF Test System					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 21, 2025
2	Spectrum Analyzer	R&S	FSV40-N	101654	Aug. 07, 2024
3	Spectrum Analyzer	R&S	FSU26	100105	Dec. 12, 2024
4	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 12, 2024
5	MXA Signal Analyzer	Keysight	N9020A	MY52091402	Aug. 22, 2024
6	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 12, 2024
7	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 12, 2024
8	EXG Analog Signal Generator	Keysight	N5173B	MY59100842	Dec. 12, 2024
9	MXG Vector Signal Generator	Keysight	N5182B	MY59100212	Dec. 12, 2024
10	USB Wideband Power Sensor	Keysight	U2021XA	MY55130004	Mar. 21, 2025
11	USB Wideband Power Sensor	Keysight	U2021XA	MY55130006	Mar. 21, 2025
12	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 12, 2024
13	RF Control Unit	Tonscend	JS0806-2	/	Aug. 22, 2024
14	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 21, 2025

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 18, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Sep. 25, 2025
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2024
4	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 12, 2024
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 12, 2024
6	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026
7	Test Software	FARA	EZ-EMC	FA-03A2	/



Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	LISN	R&S	ENV216	101112	Dec. 12, 2024
2	LISN	R&S	ENV216	101113	Dec. 12, 2024
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2024
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2024
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2024
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207 / RSS-Gen 8.8

Frequency (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

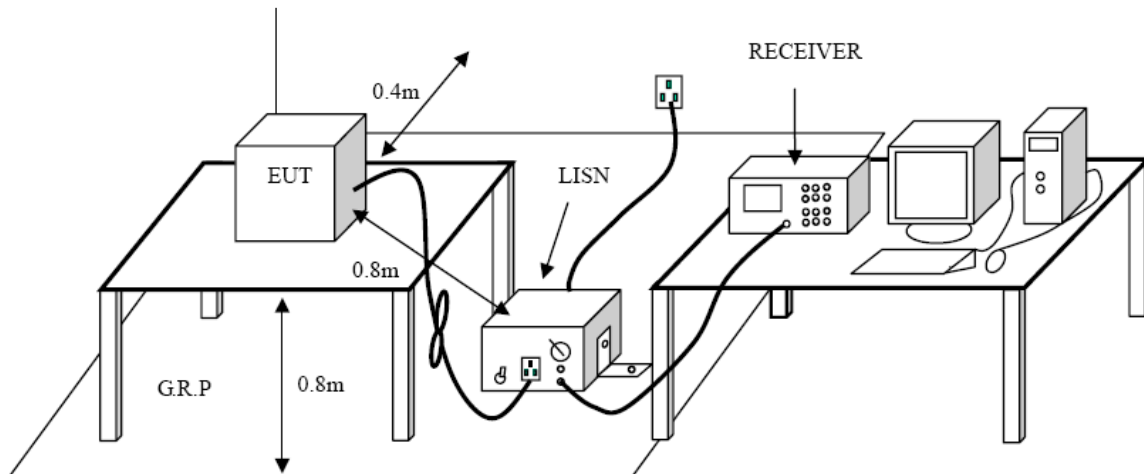

Test Procedure


1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

**Test Result**

Test Voltage:	AC 120V/60Hz
Terminal:	Line
Remark:	Only worse case is reported

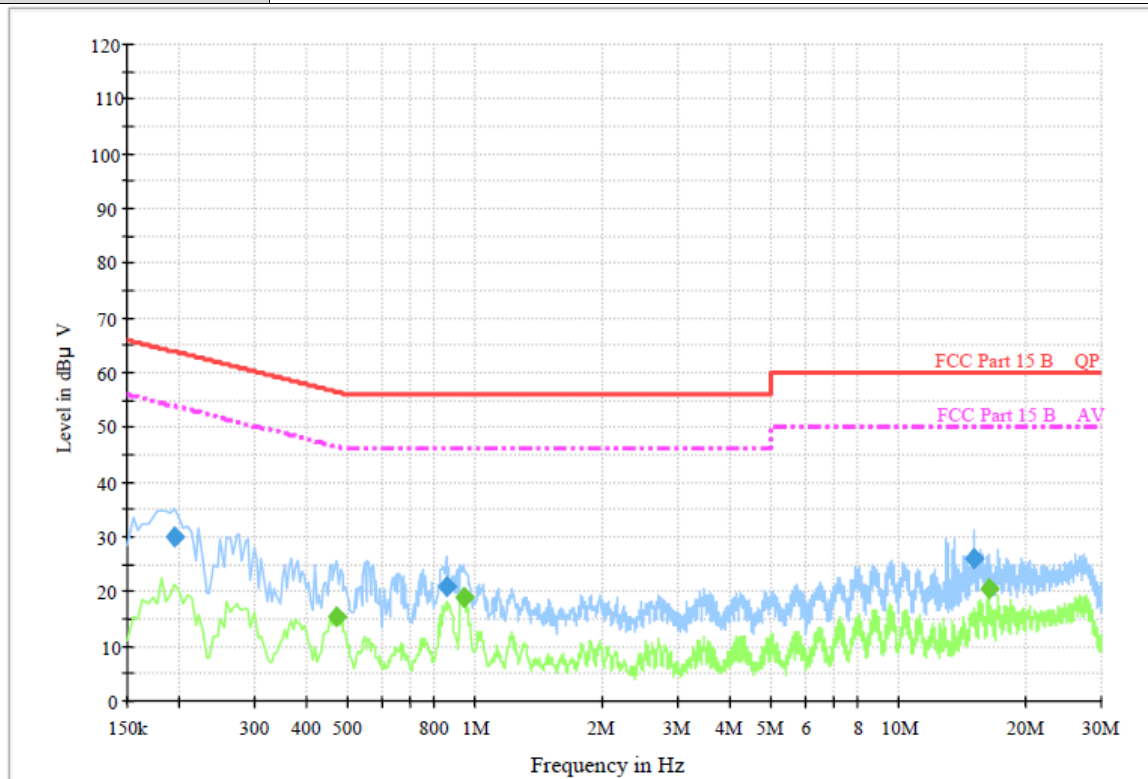**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.195000	29.9	1000.00	9.000	On	L1	9.5	33.9	63.8	
0.852000	21.0	1000.00	9.000	On	L1	9.5	35.0	56.0	
15.022500	26.1	1000.00	9.000	On	L1	9.7	33.9	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.469500	15.6	1000.00	9.000	On	L1	9.5	30.9	46.5	
0.942000	18.8	1000.00	9.000	On	L1	9.5	27.2	46.0	
16.228500	20.7	1000.00	9.000	On	L1	9.7	29.3	50.0	

Emission Level = Read Level + Correct Factor



Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Remark:	Only worse case is reported

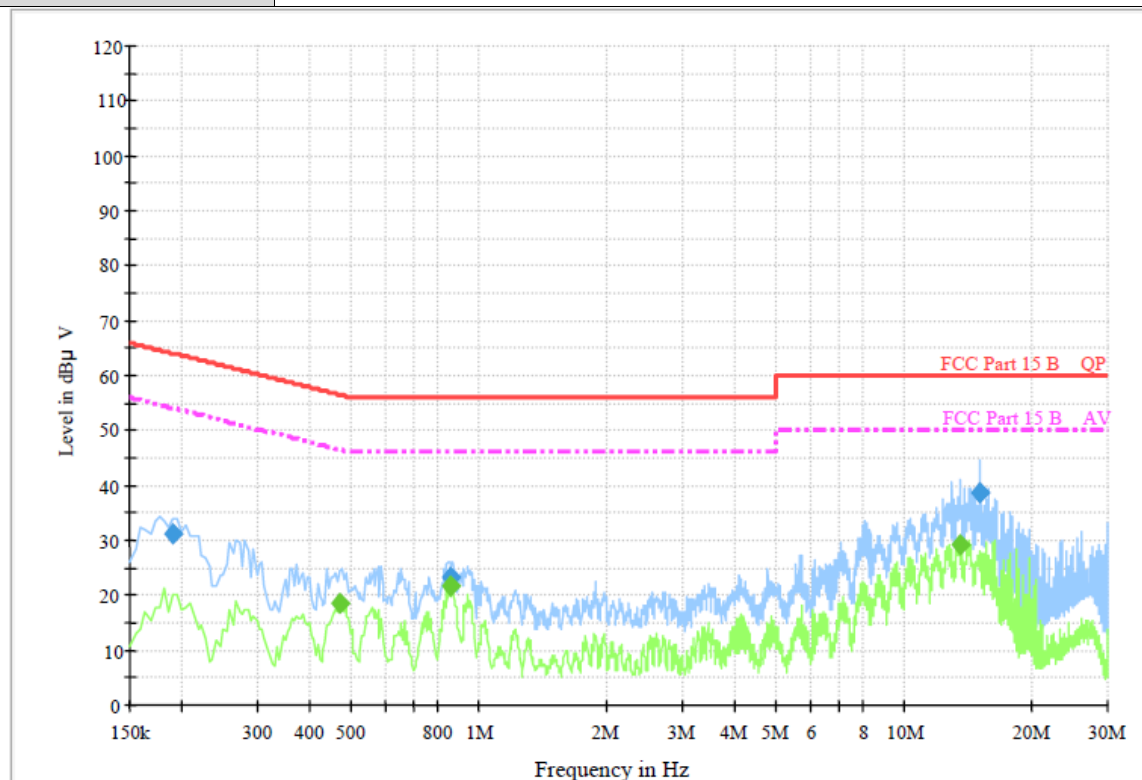

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.190500	31.0	1000.00	9.000	On	N	9.4	33.0	64.0	
0.852000	23.1	1000.00	9.000	On	N	9.4	32.9	56.0	
15.022500	38.5	1000.00	9.000	On	N	9.6	21.5	60.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.469500	18.7	1000.00	9.000	On	N	9.4	27.8	46.5	
0.852000	21.8	1000.00	9.000	On	N	9.4	24.2	46.0	
13.479000	29.1	1000.00	9.000	On	N	9.7	20.9	50.0	

Emission Level = Read Level + Correct Factor



3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209 / RSS-Gen 8.9


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dB μ V/m (at 3 meters)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dB μ V/m)=20log Emission Level (μ V/m).


Test Configuration

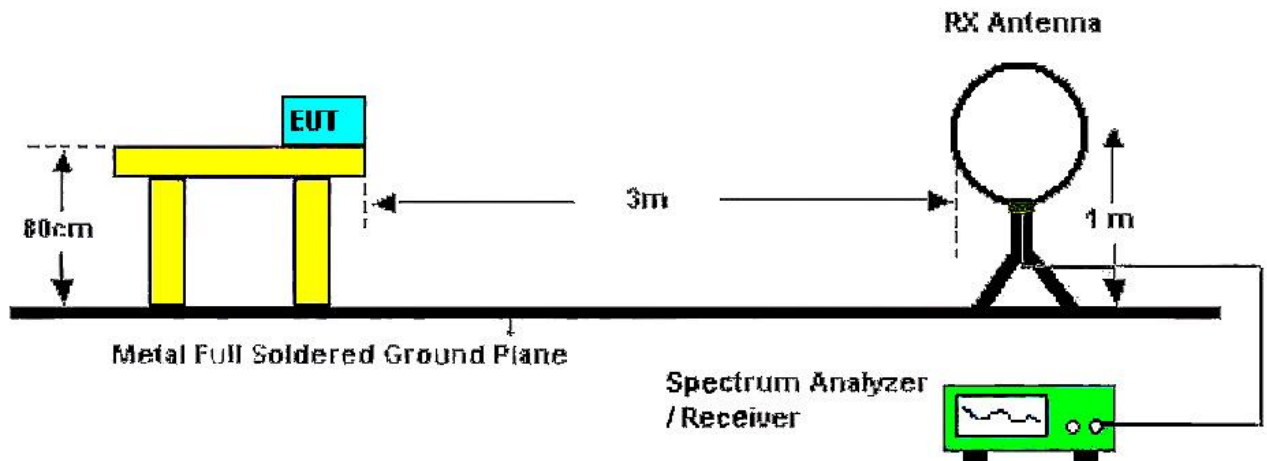

Below 30MHz Test Setup

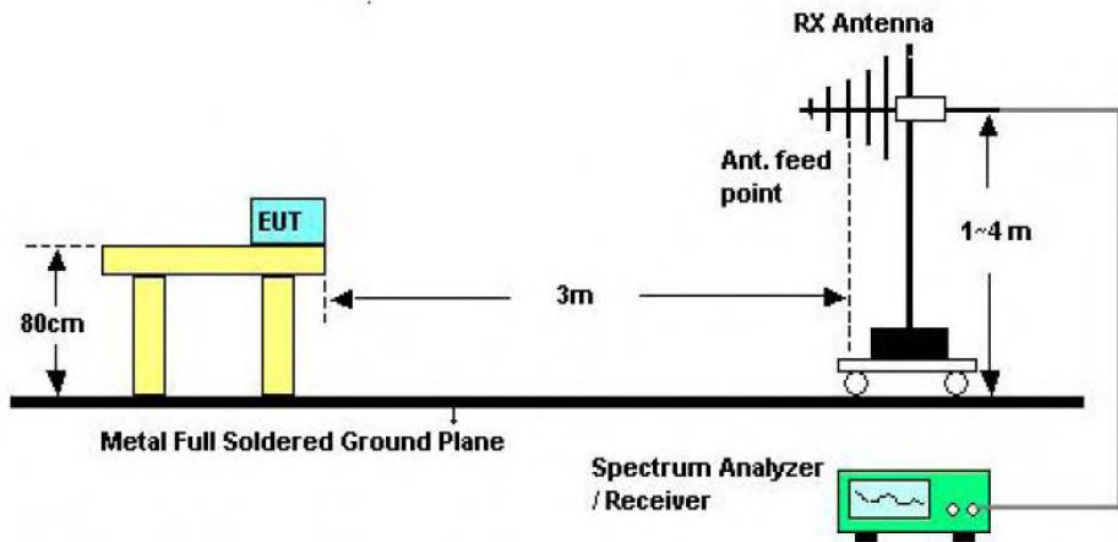

30-1000MHz Test Setup

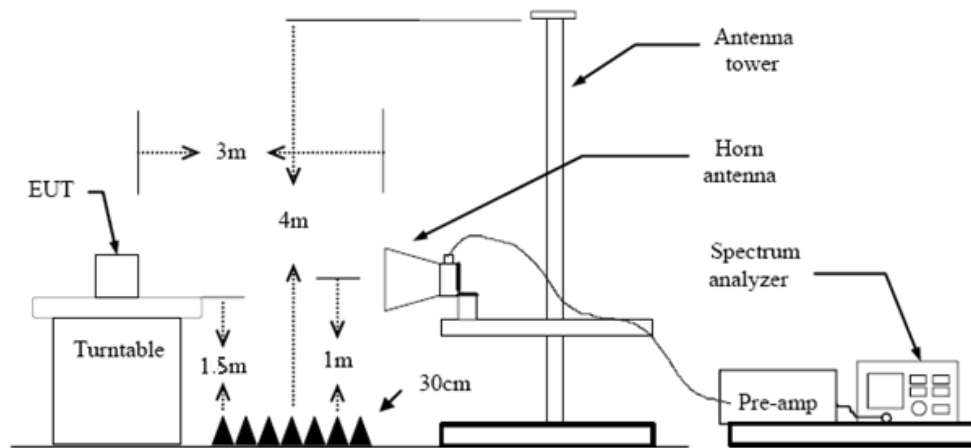

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;



(2) 9k – 150kHz:

RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold

(3) 0.15M – 30MHz:

RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold

(4) 30M - 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result


9 kHz~30 MHz

From 9 kHz to 30 MHz: The conclusion is PASS.

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.




30MHz-1GHz

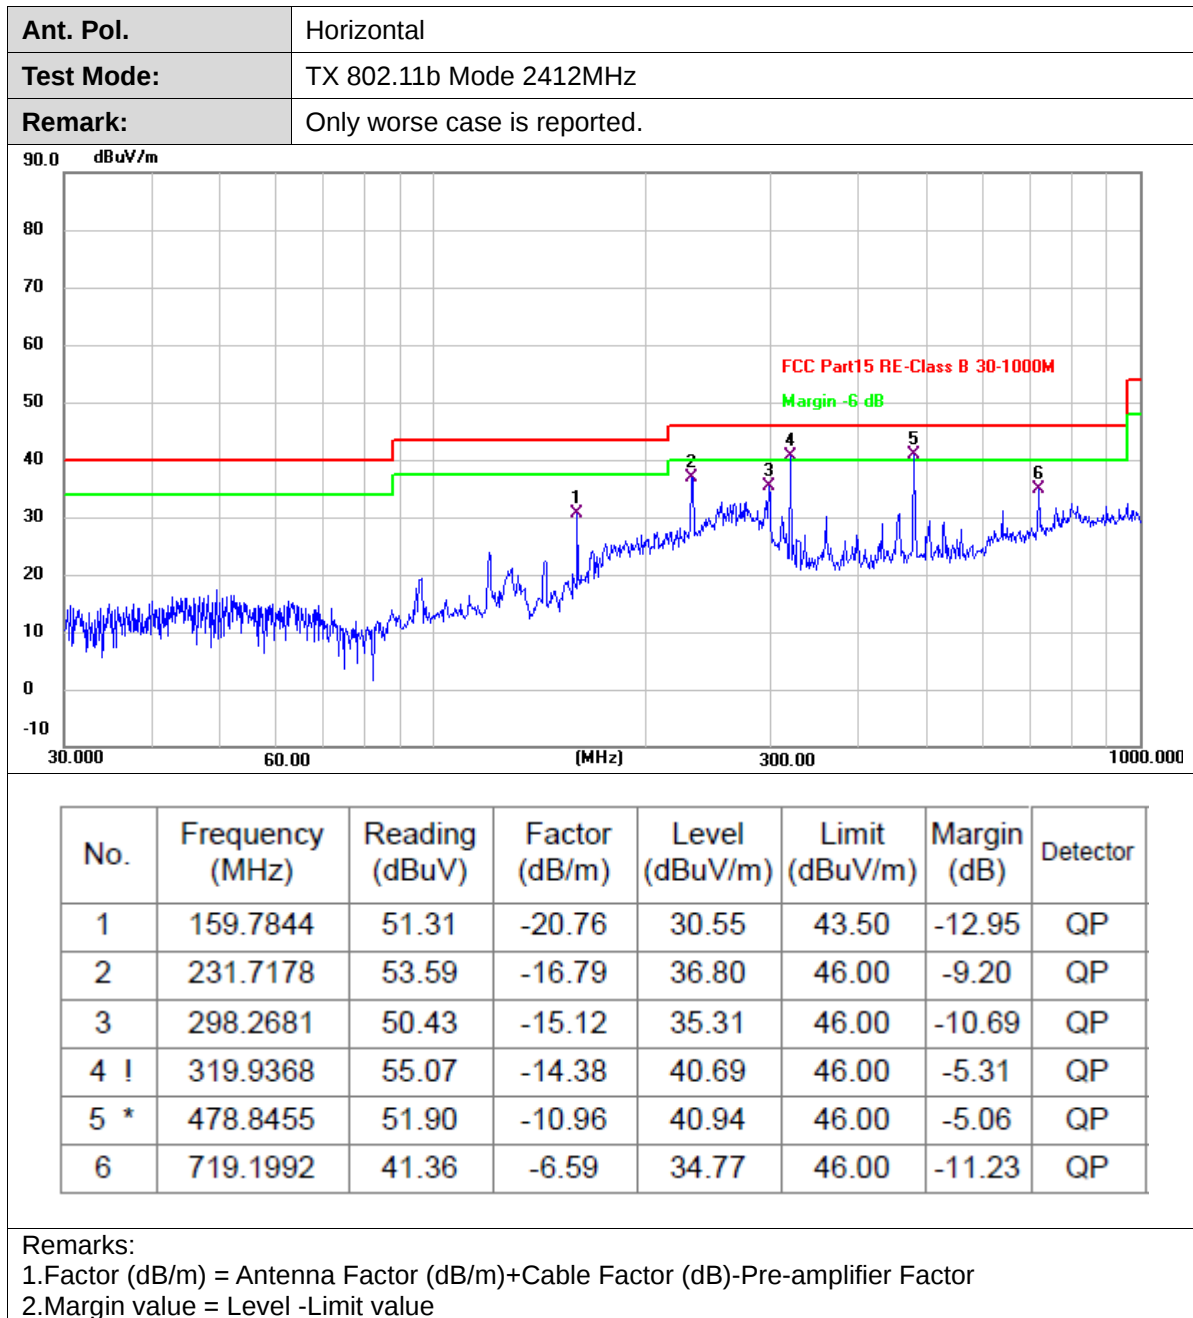



Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	Only worse case is reported.

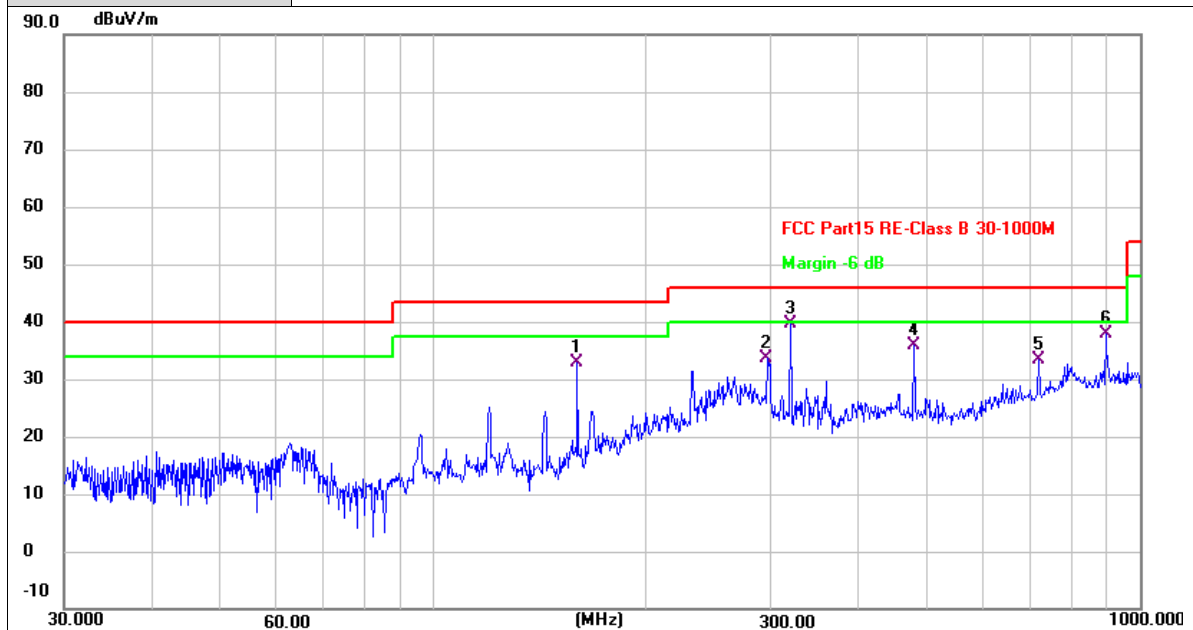

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	159.7844	53.75	-20.76	32.99	43.50	-10.51	QP
2	297.2238	48.78	-15.14	33.64	46.00	-12.36	QP
3 *	319.9368	54.07	-14.38	39.69	46.00	-6.31	QP
4	478.8455	46.94	-10.96	35.98	46.00	-10.02	QP
5	719.1992	39.88	-6.59	33.29	46.00	-12.71	QP
6	893.8564	42.10	-4.10	38.00	46.00	-8.00	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Above 1GHz

Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1497.417	54.78	-6.88	47.90	74.00	-26.10	peak
2	4822.667	46.61	2.01	48.62	74.00	-25.38	peak
3	7967.750	38.97	10.80	49.77	74.00	-24.23	peak
4	9193.667	40.31	12.34	52.65	74.00	-21.35	peak
5	11418.333	38.58	14.87	53.45	74.00	-20.55	peak
6 *	12397.500	37.96	15.50	53.46	74.00	-20.54	peak

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1501.333	53.76	-6.88	46.88	74.00	-27.12	peak
2	4822.667	47.30	2.01	49.31	74.00	-24.69	peak
3	7920.750	39.88	10.69	50.57	74.00	-23.43	peak
4	9115.333	39.98	12.08	52.06	74.00	-21.94	peak
5	10795.583	39.02	14.45	53.47	74.00	-20.53	peak
6 *	12632.500	37.35	16.15	53.50	74.00	-20.50	peak

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1497.417	54.18	-6.88	47.30	74.00	-26.70	peak
2	4873.583	43.24	2.09	45.33	74.00	-28.67	peak
3	6499.000	40.01	7.32	47.33	74.00	-26.67	peak
4	9538.333	39.26	12.59	51.85	74.00	-22.15	peak
5 *	10909.167	38.67	14.57	53.24	74.00	-20.76	peak
6	11770.833	38.12	15.10	53.22	74.00	-20.78	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1493.500	51.48	-6.88	44.60	74.00	-29.40	peak
2	4873.583	47.26	2.09	49.35	74.00	-24.65	peak
3	8042.167	39.31	10.76	50.07	74.00	-23.93	peak
4	9123.167	39.50	12.11	51.61	74.00	-22.39	peak
5	10834.750	38.75	14.50	53.25	74.00	-20.75	peak
6 *	11759.083	38.33	15.10	53.43	74.00	-20.57	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1195.833	54.54	-7.73	46.81	74.00	-27.19	peak
2	4924.500	46.89	2.16	49.05	74.00	-24.95	peak
3	7231.417	39.22	10.03	49.25	74.00	-24.75	peak
4	9217.167	39.36	12.38	51.74	74.00	-22.26	peak
5	10270.750	39.49	13.69	53.18	74.00	-20.82	peak
6 *	11563.250	38.61	15.06	53.67	74.00	-20.33	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1497.417	55.58	-6.88	48.70	74.00	-25.30	peak
2	4924.500	43.03	2.16	45.19	74.00	-28.81	peak
3	7352.833	39.25	10.08	49.33	74.00	-24.67	peak
4	9871.250	39.70	13.03	52.73	74.00	-21.27	peak
5	11269.500	38.47	14.79	53.26	74.00	-20.74	peak
6 *	12166.417	37.64	15.68	53.32	74.00	-20.68	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1497.417	56.56	-6.88	49.68	74.00	-24.32	peak
2	4826.583	40.36	2.02	42.38	74.00	-31.62	peak
3	7254.917	39.40	10.04	49.44	74.00	-24.56	peak
4	9111.417	39.24	12.07	51.31	74.00	-22.69	peak
5 *	10791.667	39.22	14.44	53.66	74.00	-20.34	peak
6	12624.667	37.30	16.13	53.43	74.00	-20.57	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1199.750	51.87	-7.71	44.16	74.00	-29.84	peak
2	4826.583	42.90	2.02	44.92	74.00	-29.08	peak
3	6428.500	40.24	7.14	47.38	74.00	-26.62	peak
4	8136.167	40.79	10.52	51.31	74.00	-22.69	peak
5 *	11253.833	38.69	14.79	53.48	74.00	-20.52	peak
6	12201.667	37.73	15.72	53.45	74.00	-20.55	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1195.833	48.88	-7.73	41.15	74.00	-32.85	peak
2	4877.500	42.19	2.10	44.29	74.00	-29.71	peak
3	7388.083	39.35	10.09	49.44	74.00	-24.56	peak
4	9679.333	39.00	12.74	51.74	74.00	-22.26	peak
5 *	10823.000	39.26	14.48	53.74	74.00	-20.26	peak
6	12342.667	37.73	15.56	53.29	74.00	-20.71	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1497.417	55.47	-6.88	48.59	74.00	-25.41	peak
2	4869.667	42.70	2.07	44.77	74.00	-29.23	peak
3	7932.500	40.04	10.71	50.75	74.00	-23.25	peak
4	9197.583	39.33	12.35	51.68	74.00	-22.32	peak
5 *	10760.333	39.10	14.37	53.47	74.00	-20.53	peak
6	12483.667	37.61	15.74	53.35	74.00	-20.65	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1195.833	50.47	-7.73	42.74	74.00	-31.26	peak
2	5218.250	42.11	2.92	45.03	74.00	-28.97	peak
3	7975.583	39.76	10.81	50.57	74.00	-23.43	peak
4	9914.333	39.09	13.08	52.17	74.00	-21.83	peak
5 *	10897.417	38.78	14.56	53.34	74.00	-20.66	peak
6	11817.833	38.06	15.12	53.18	74.00	-20.82	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4928.417	43.68	2.16	45.84	74.00	-28.16	peak
2	6424.583	39.66	7.13	46.79	74.00	-27.21	peak
3	7854.167	39.45	10.54	49.99	74.00	-24.01	peak
4	9816.417	38.77	12.96	51.73	74.00	-22.27	peak
5 *	11547.583	38.45	15.03	53.48	74.00	-20.52	peak
6	12229.083	37.58	15.70	53.28	74.00	-20.72	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1195.833	48.74	-7.73	41.01	74.00	-32.99	peak
2	3933.583	42.59	0.28	42.87	74.00	-31.13	peak
3	6322.750	39.79	6.75	46.54	74.00	-27.46	peak
4	8328.083	40.04	10.48	50.52	74.00	-23.48	peak
5 *	10611.500	39.34	14.07	53.41	74.00	-20.59	peak
6	12233.000	37.51	15.69	53.20	74.00	-20.80	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2412MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1497.417	52.12	-6.88	45.24	74.00	-28.76	peak
2	4826.583	42.62	2.02	44.64	74.00	-29.36	peak
3	7086.500	39.11	9.40	48.51	74.00	-25.49	peak
4	9181.917	39.31	12.30	51.61	74.00	-22.39	peak
5 *	10964.000	38.98	14.63	53.61	74.00	-20.39	peak
6	12174.250	37.65	15.69	53.34	74.00	-20.66	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1207.583	49.73	-7.69	42.04	74.00	-31.96	peak
2	5214.333	41.36	2.91	44.27	74.00	-29.73	peak
3	7799.333	39.17	10.42	49.59	74.00	-24.41	peak
4	9127.083	39.22	12.12	51.34	74.00	-22.66	peak
5	11061.917	38.64	14.70	53.34	74.00	-20.66	peak
6 *	11935.333	38.29	15.34	53.63	74.00	-20.37	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1497.417	49.60	-6.88	42.72	74.00	-31.28	peak
2	5186.917	42.17	2.84	45.01	74.00	-28.99	peak
3	7278.417	39.44	10.05	49.49	74.00	-24.51	peak
4	9969.167	40.06	13.14	53.20	74.00	-20.80	peak
5	10897.417	39.01	14.56	53.57	74.00	-20.43	peak
6 *	12413.167	38.22	15.53	53.75	74.00	-20.25	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1199.750	53.04	-7.71	45.33	74.00	-28.67	peak
2	5942.833	39.62	5.44	45.06	74.00	-28.94	peak
3	7192.250	39.03	9.98	49.01	74.00	-24.99	peak
4	8406.417	40.08	10.55	50.63	74.00	-23.37	peak
5	10415.667	39.22	13.90	53.12	74.00	-20.88	peak
6 *	12060.667	37.68	15.53	53.21	74.00	-20.79	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2462MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1195.833	52.58	-7.73	44.85	74.00	-29.15	peak
2	1493.500	53.29	-6.88	46.41	74.00	-27.59	peak
3	7932.500	39.39	10.71	50.10	74.00	-23.90	peak
4	9644.083	39.77	12.67	52.44	74.00	-21.56	peak
5 *	10396.083	39.65	13.88	53.53	74.00	-20.47	peak
6	12374.000	38.00	15.52	53.52	74.00	-20.48	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2422MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1199.750	57.43	-7.71	49.72	74.00	-24.28	peak
2	5171.250	44.28	2.78	47.06	74.00	-26.94	peak
3	7415.500	38.92	10.10	49.02	74.00	-24.98	peak
4	8755.000	40.15	11.31	51.46	74.00	-22.54	peak
5 *	10936.583	38.81	14.61	53.42	74.00	-20.58	peak
6	12280.000	37.78	15.63	53.41	74.00	-20.59	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2422MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4822.667	41.74	2.01	43.75	74.00	-30.25	peak
2	6440.250	38.84	7.17	46.01	74.00	-27.99	peak
3	7948.167	38.77	10.76	49.53	74.00	-24.47	peak
4	9209.333	38.12	12.37	50.49	74.00	-23.51	peak
5 *	11195.083	38.76	14.76	53.52	74.00	-20.48	peak
6	12428.833	37.78	15.58	53.36	74.00	-20.64	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1199.750	57.47	-7.71	49.76	74.00	-24.24	peak
2	4814.833	41.22	2.00	43.22	74.00	-30.78	peak
3	7677.917	40.09	10.20	50.29	74.00	-23.71	peak
4	8860.750	39.31	11.49	50.80	74.00	-23.20	peak
5	11093.250	38.73	14.71	53.44	74.00	-20.56	peak
6 *	12088.083	37.92	15.57	53.49	74.00	-20.51	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2437MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1497.417	54.71	-6.88	47.83	74.00	-26.17	peak
2	5206.500	41.89	2.89	44.78	74.00	-29.22	peak
3	6330.583	40.01	6.79	46.80	74.00	-27.20	peak
4	9017.417	40.04	11.75	51.79	74.00	-22.21	peak
5 *	10779.917	39.00	14.42	53.42	74.00	-20.58	peak
6	12041.083	37.81	15.51	53.32	74.00	-20.68	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2452MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1199.750	54.99	-7.71	47.28	74.00	-26.72	peak
2	1497.417	53.93	-6.88	47.05	74.00	-26.95	peak
3	5179.083	42.90	2.82	45.72	74.00	-28.28	peak
4	9252.417	40.34	12.41	52.75	74.00	-21.25	peak
5 *	11293.000	38.67	14.80	53.47	74.00	-20.53	peak
6	12562.000	37.39	15.96	53.35	74.00	-20.65	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2452MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1195.833	53.40	-7.73	45.67	74.00	-28.33	peak
2	4834.417	42.37	2.03	44.40	74.00	-29.60	peak
3	7262.750	39.29	10.05	49.34	74.00	-24.66	peak
4	8833.333	39.80	11.46	51.26	74.00	-22.74	peak
5	10787.750	38.54	14.43	52.97	74.00	-21.03	peak
6 *	12346.583	37.96	15.55	53.51	74.00	-20.49	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

Restricted Frequency Band (MHz)	(dBμV/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

Test Configuration

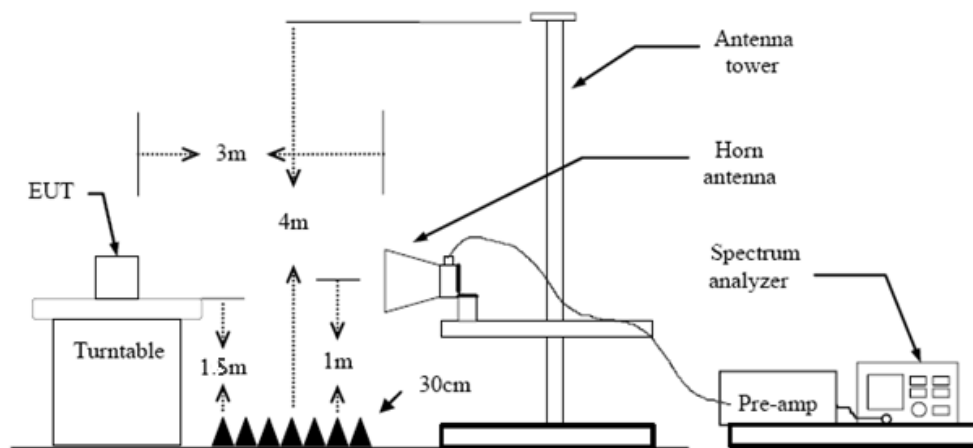

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:


RBW=1MHz, VBW=3MHz Peak detector for Peak value.


RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.


Test Mode


Please refer to the clause 2.4.

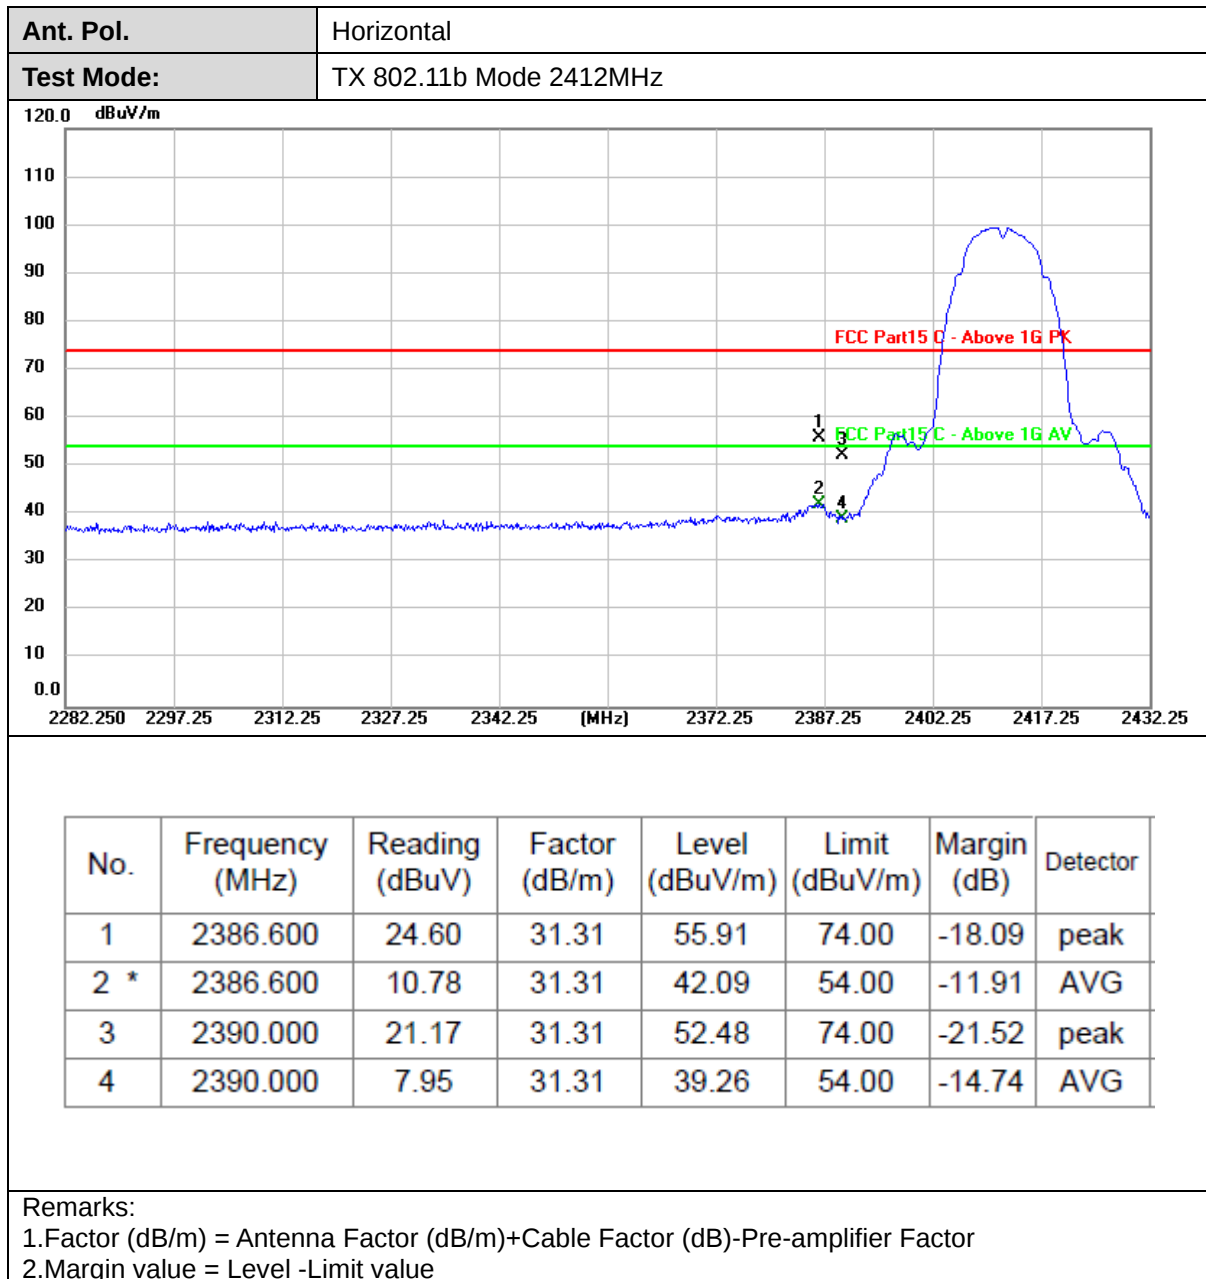
**Test Result**

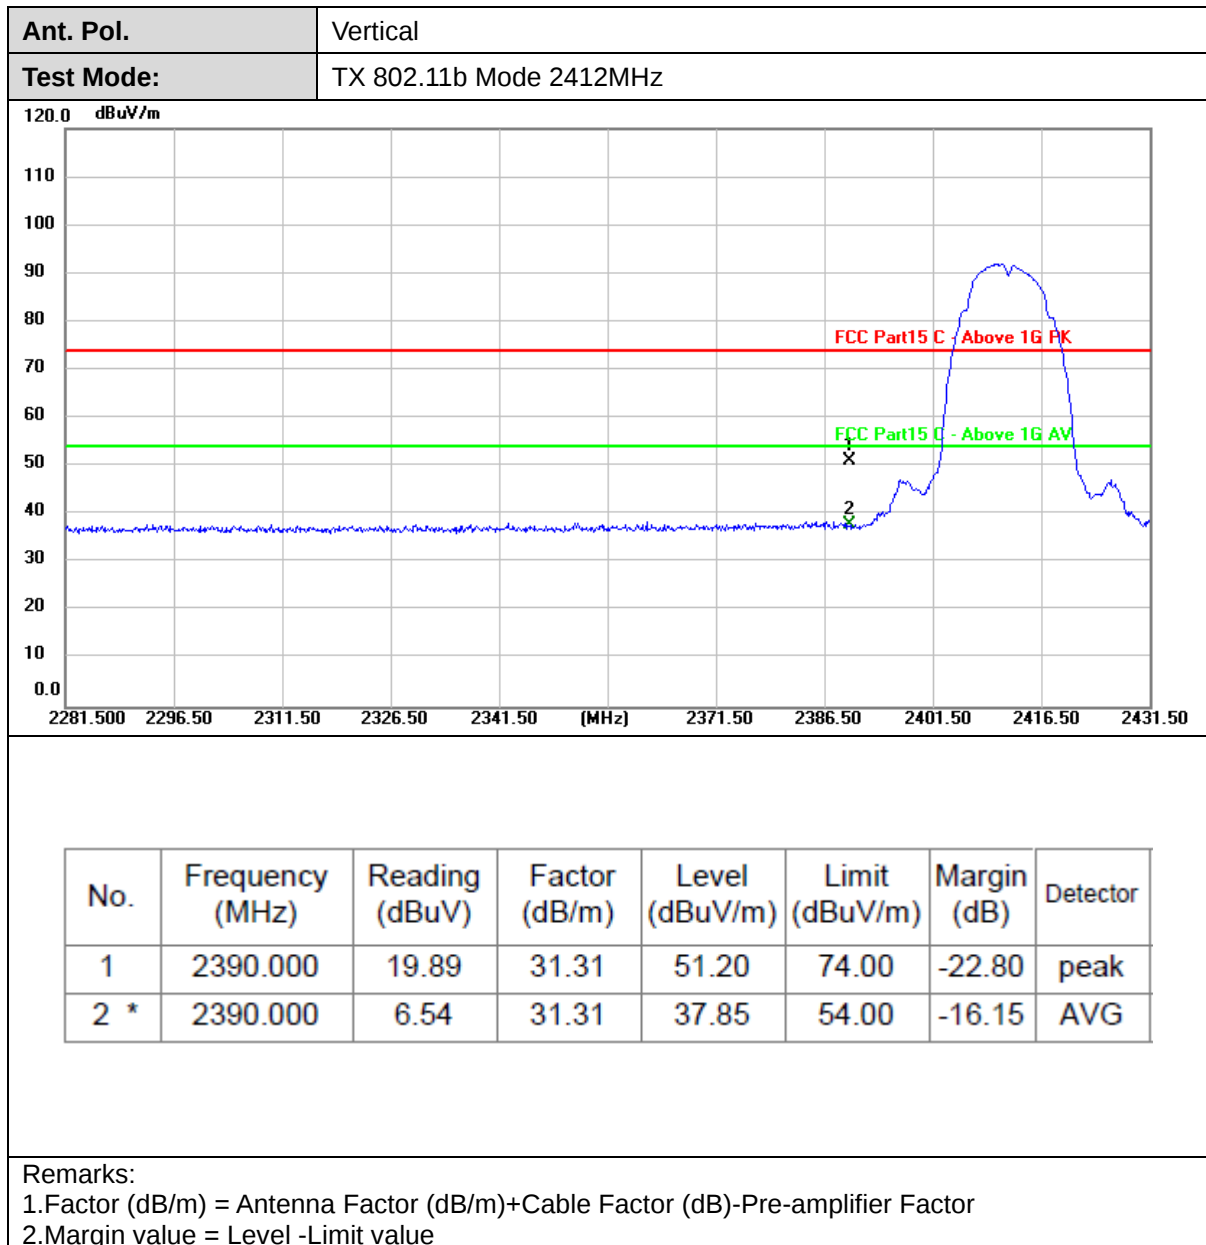


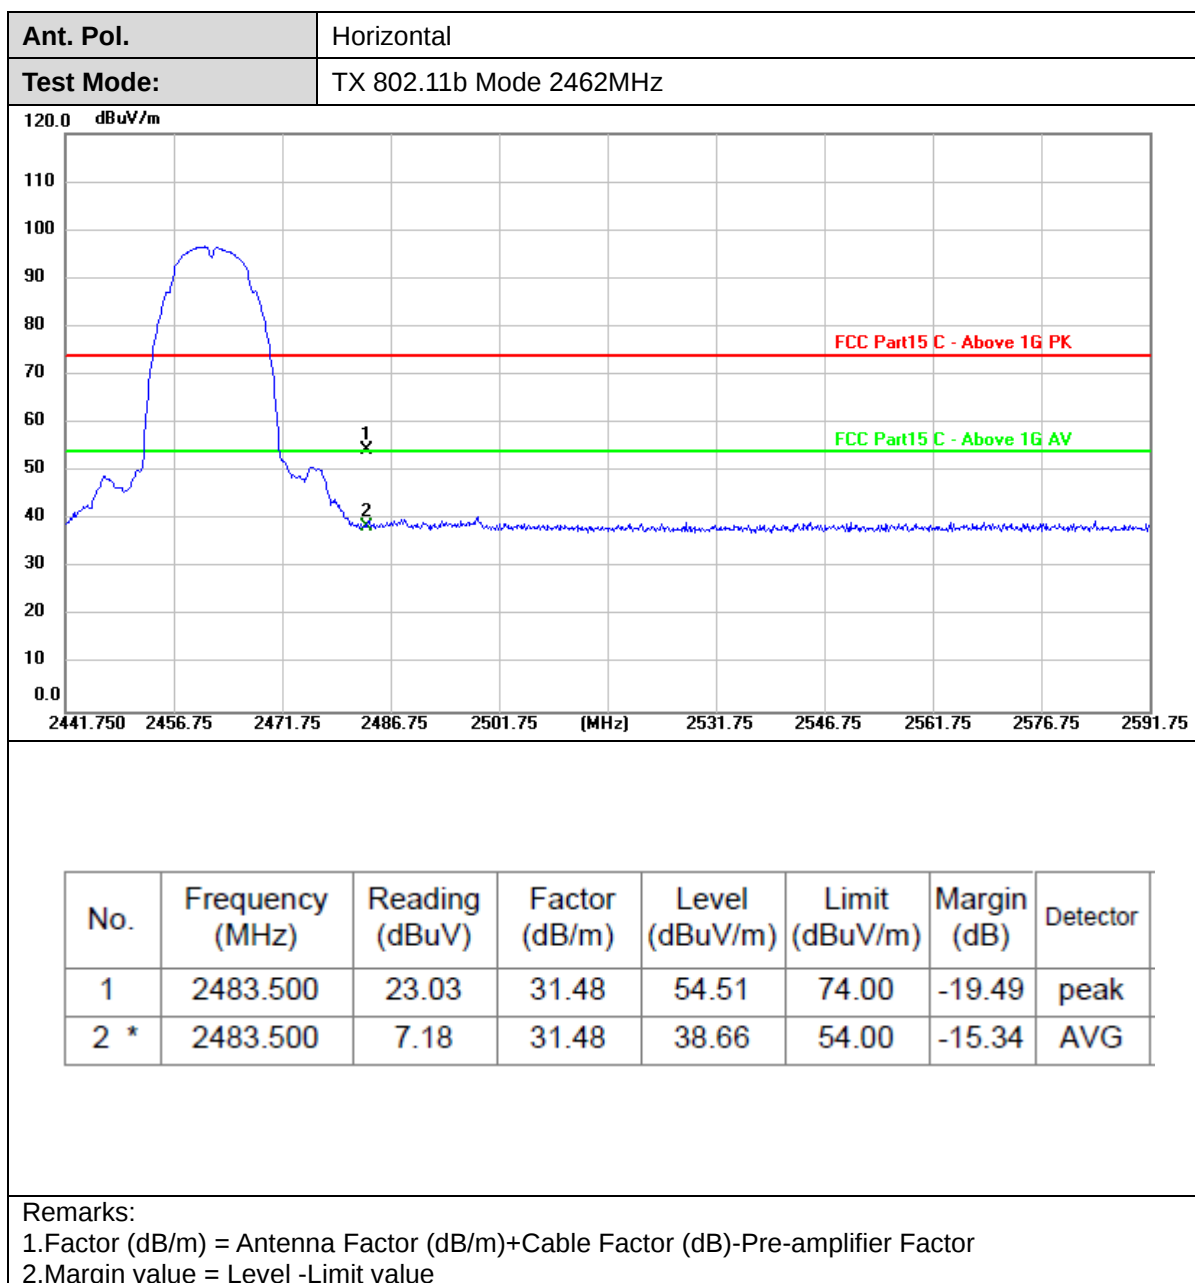


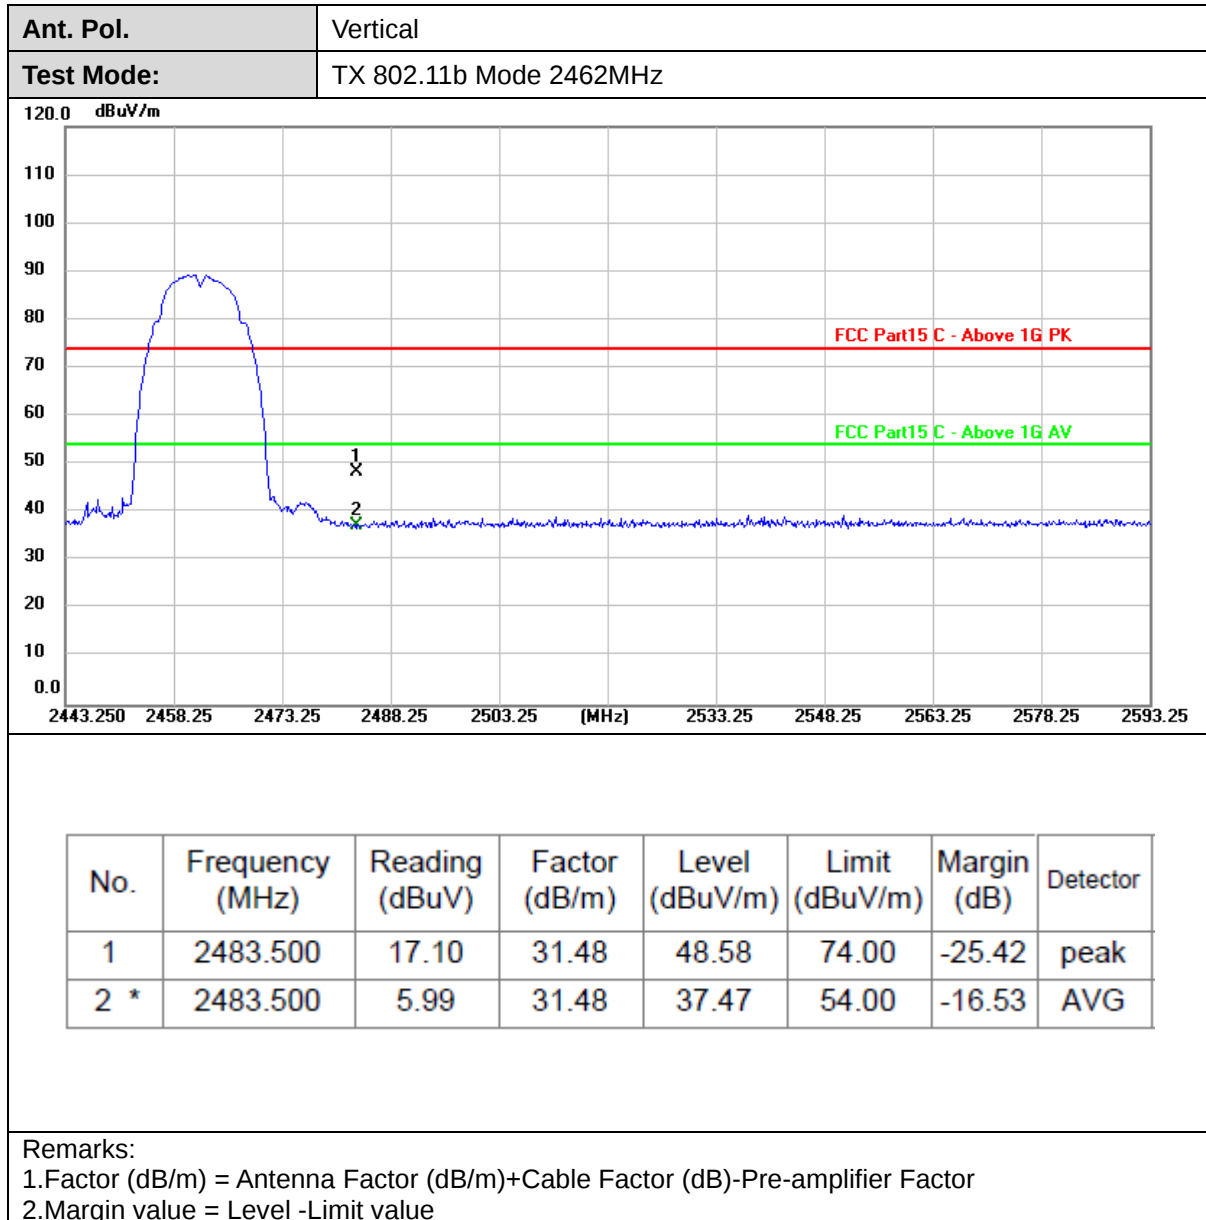


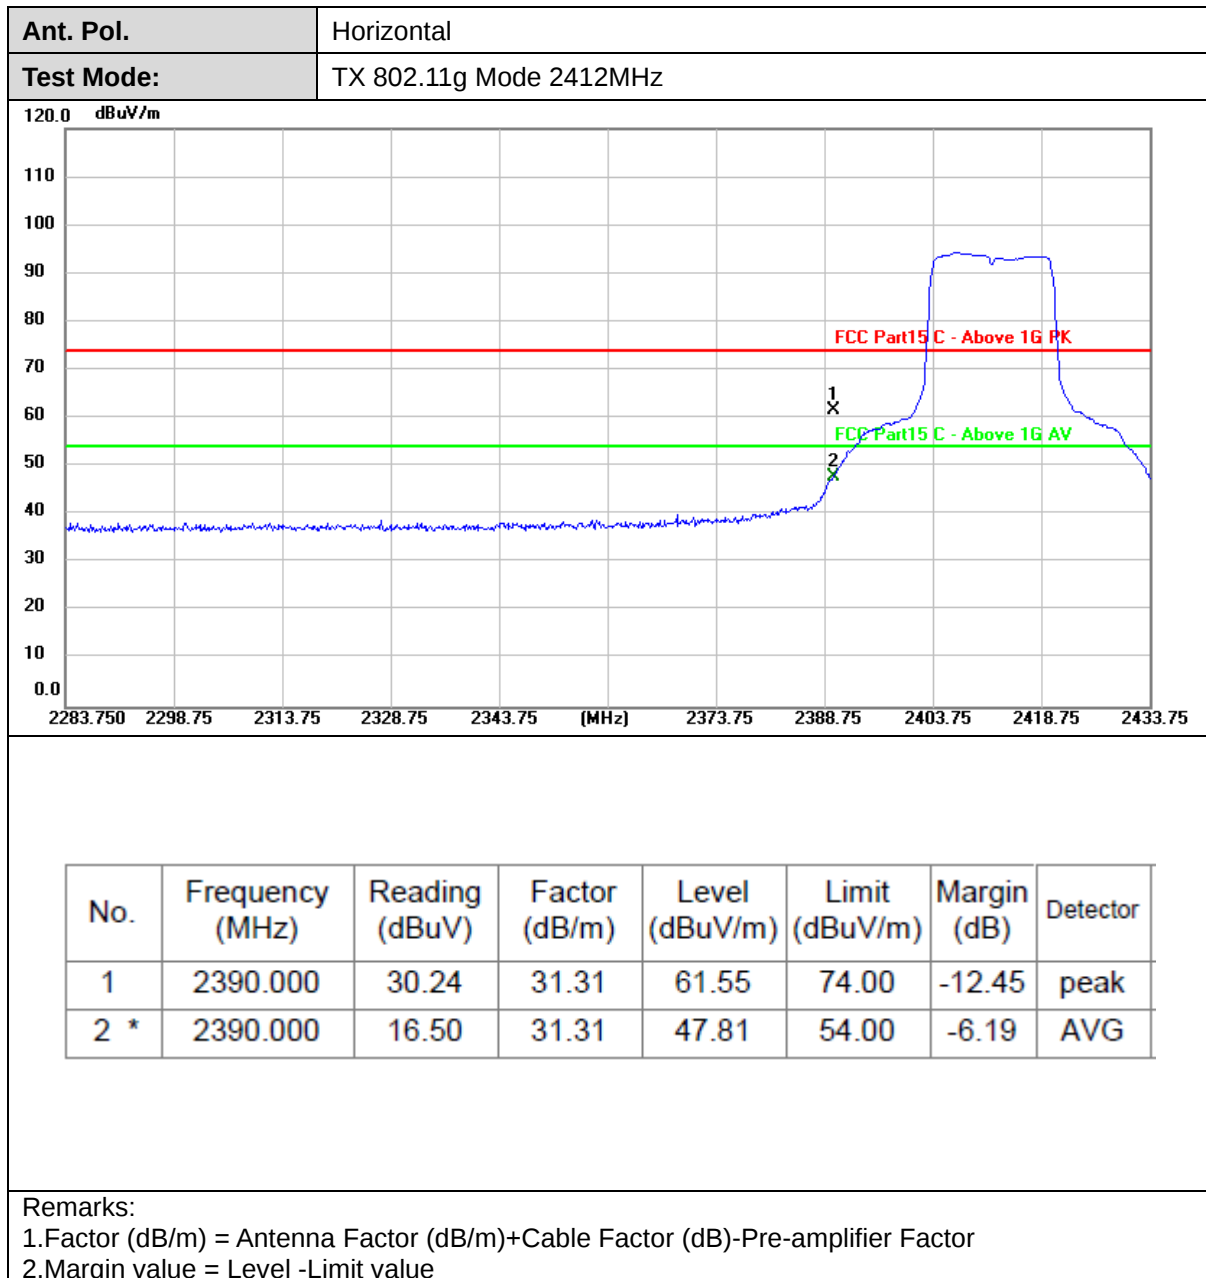


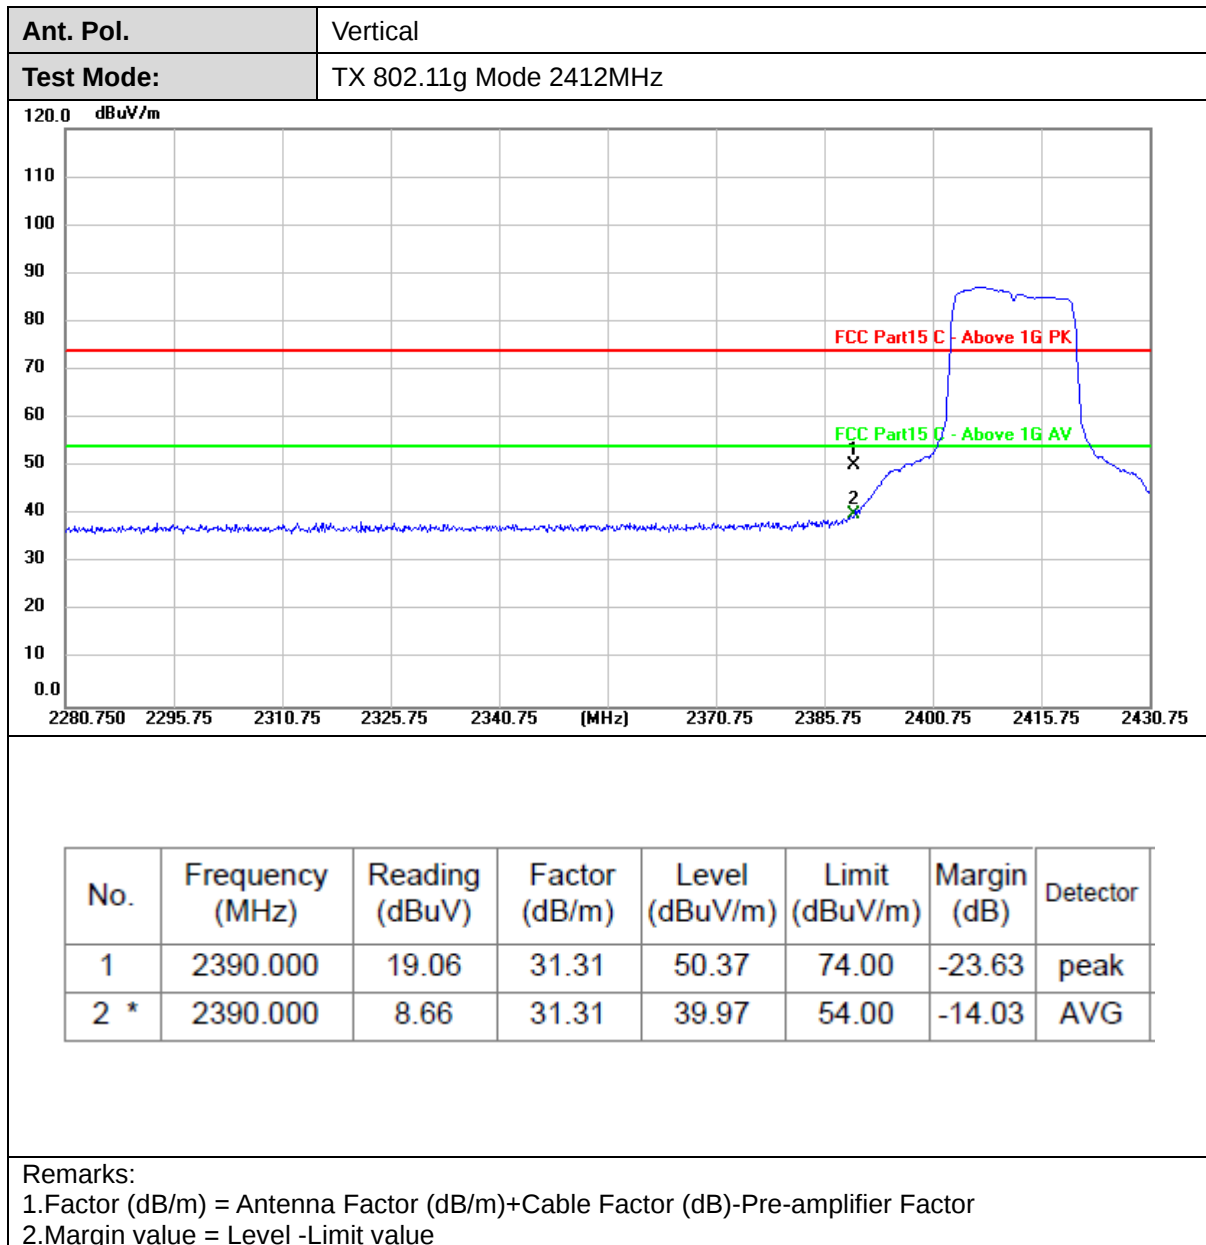


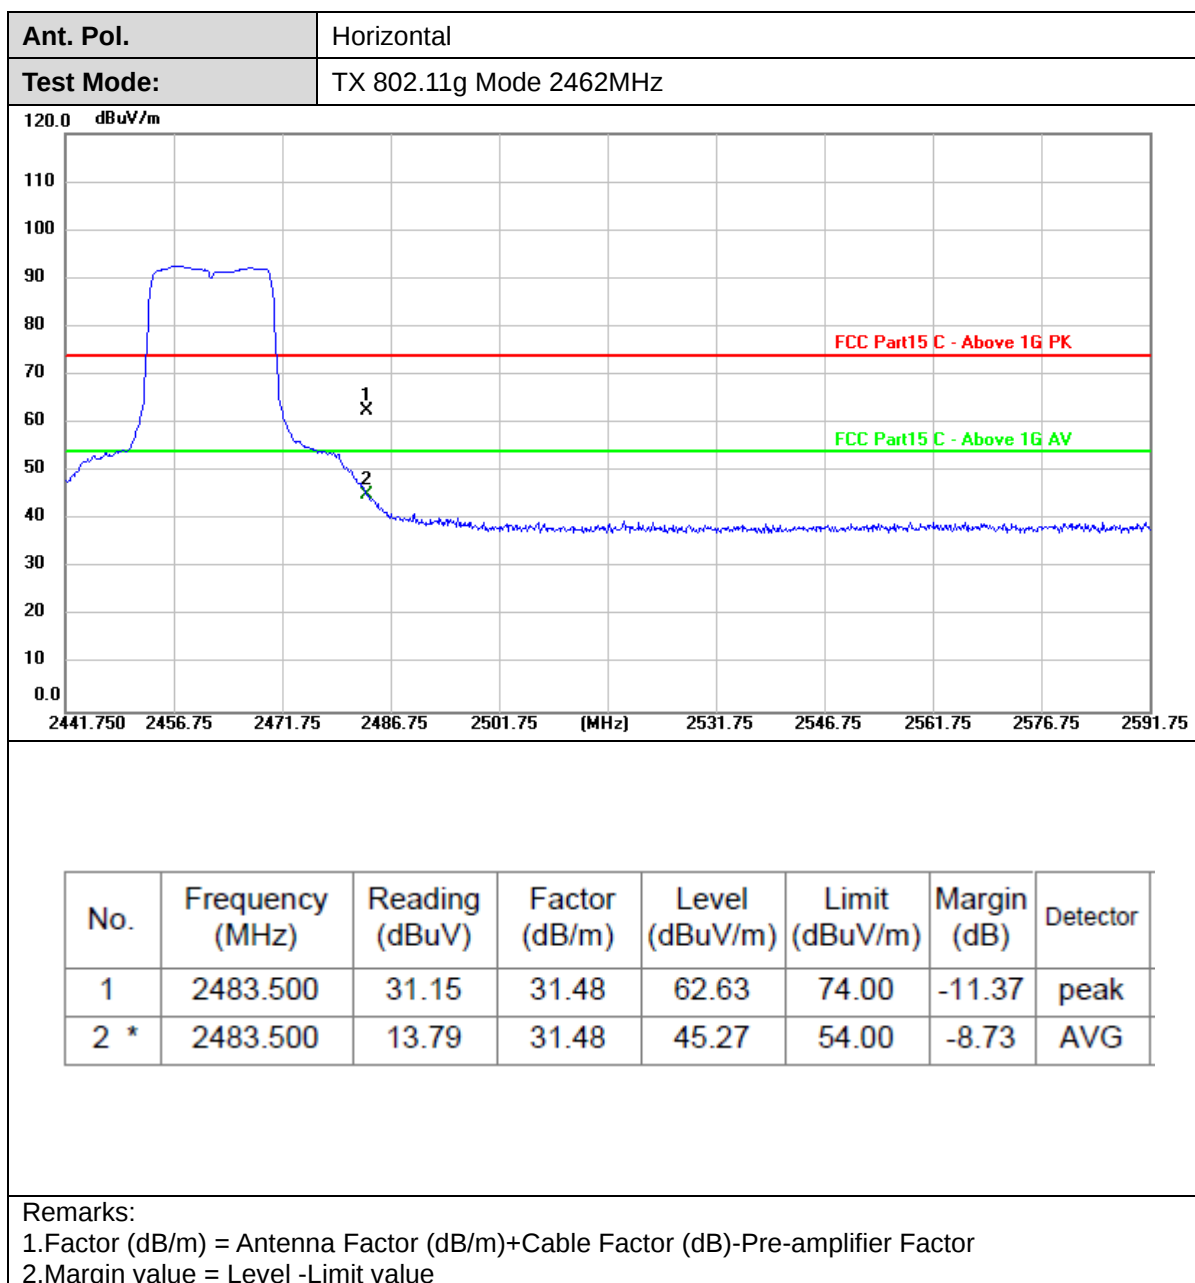


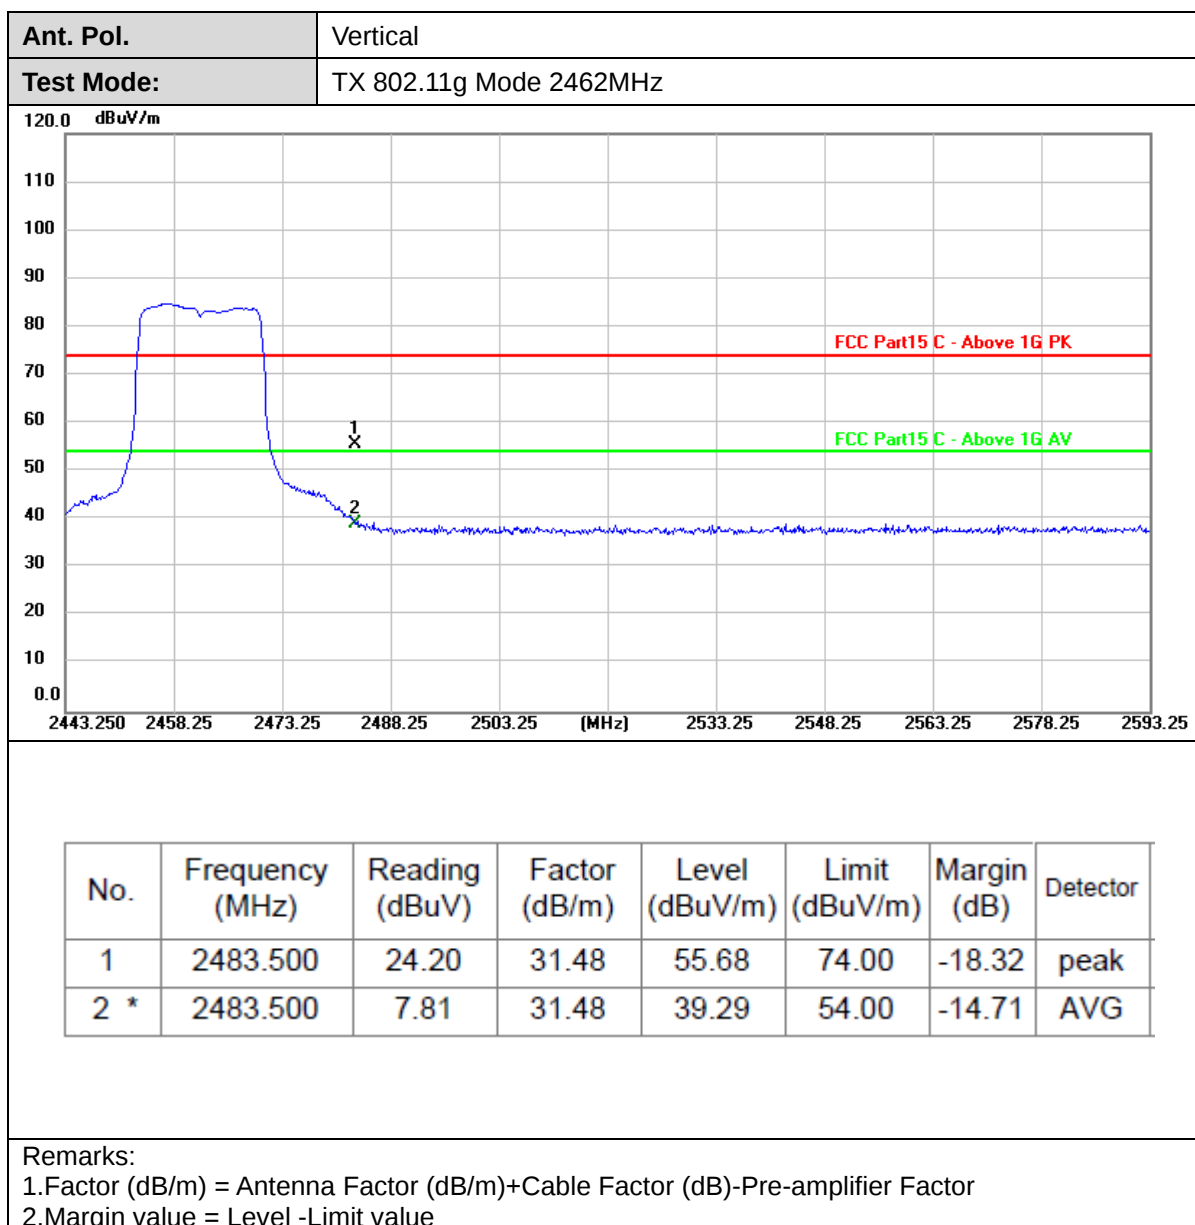


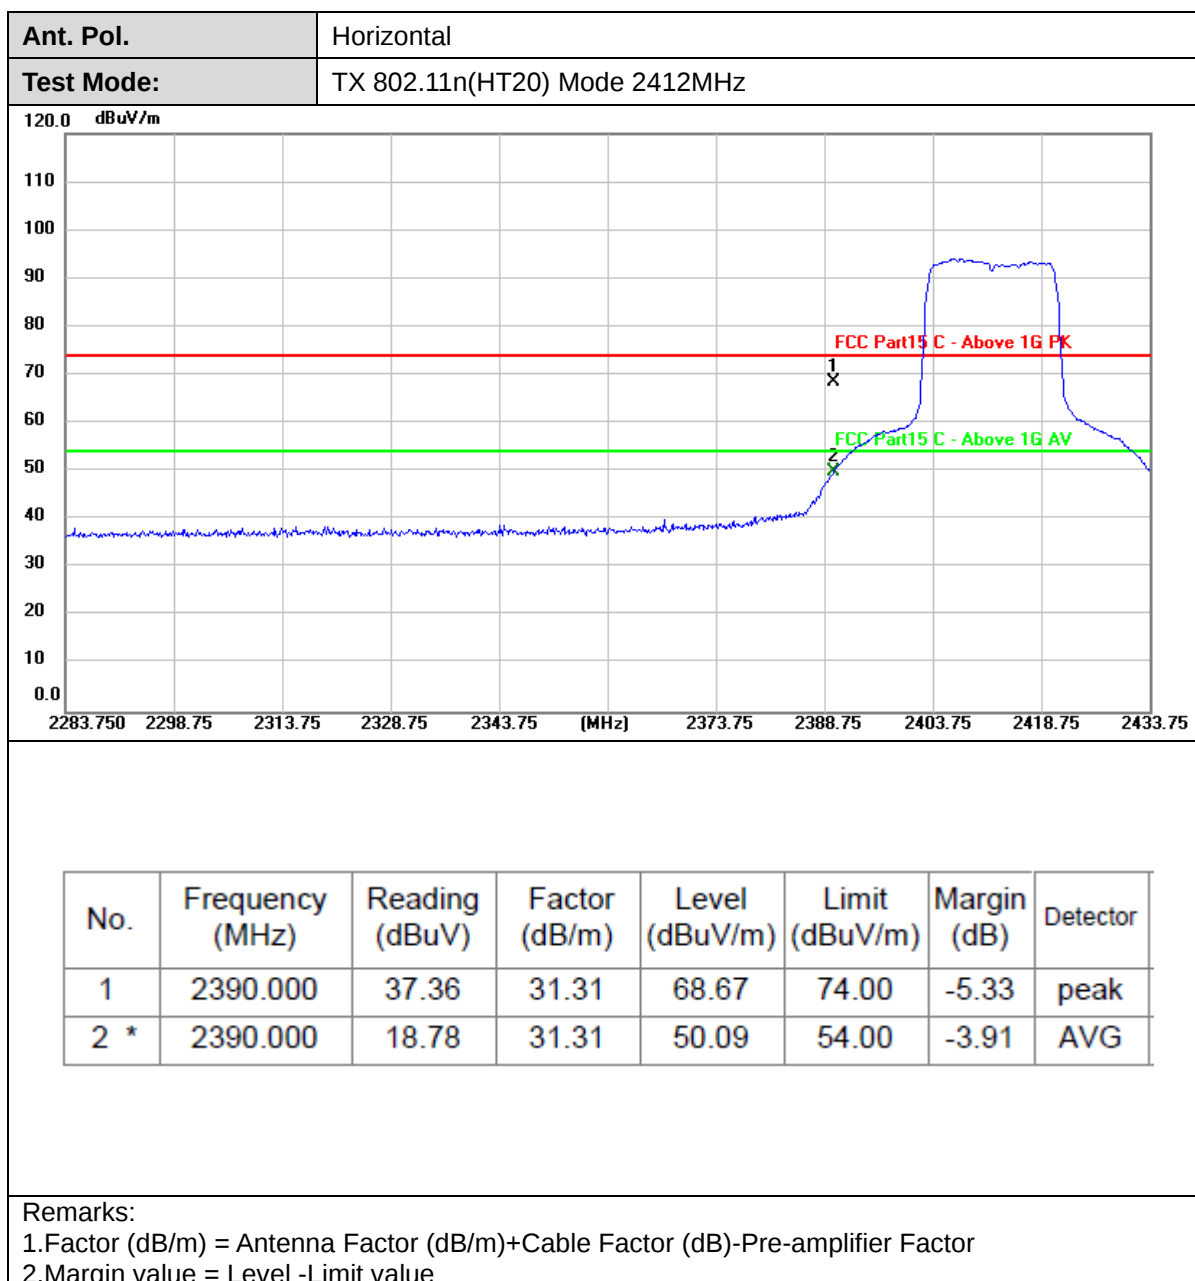


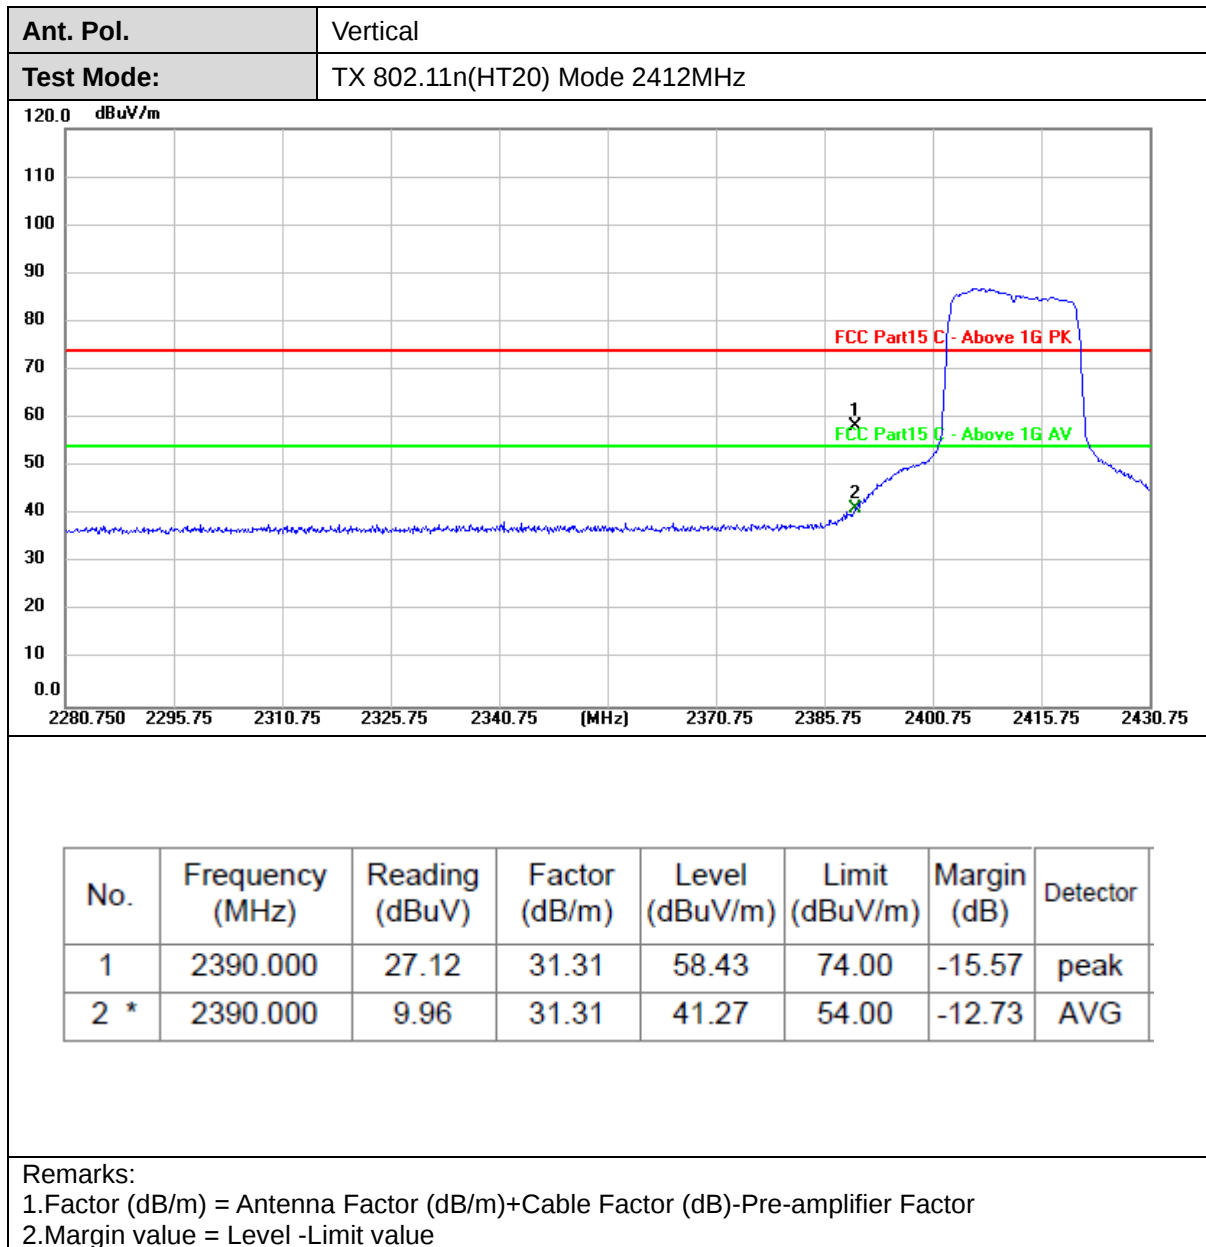


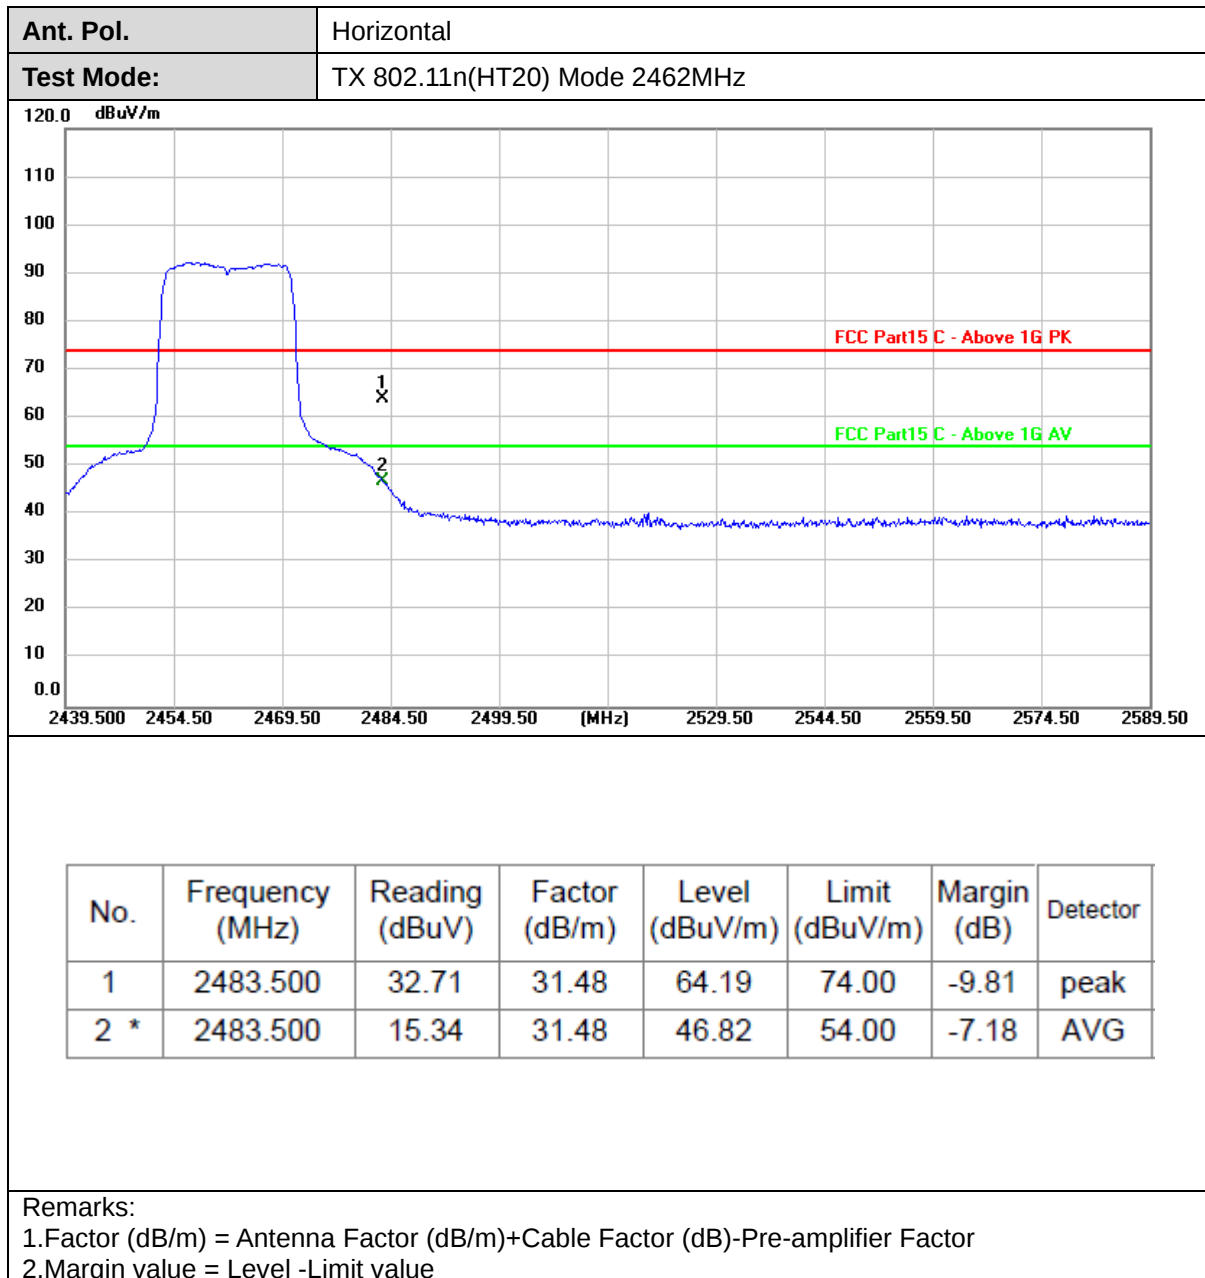


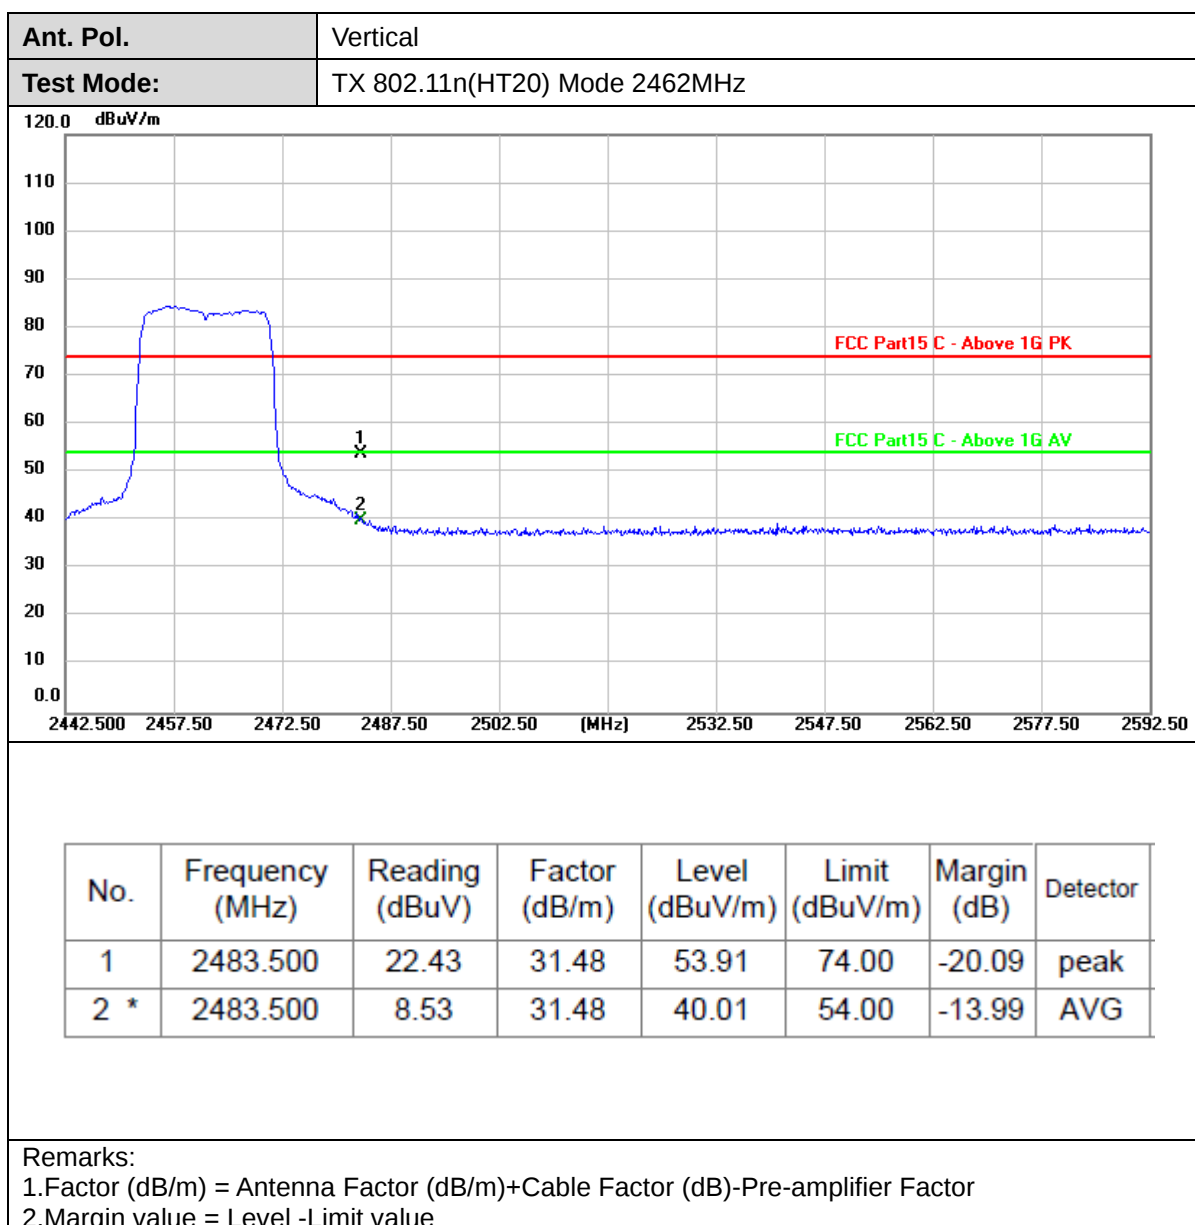

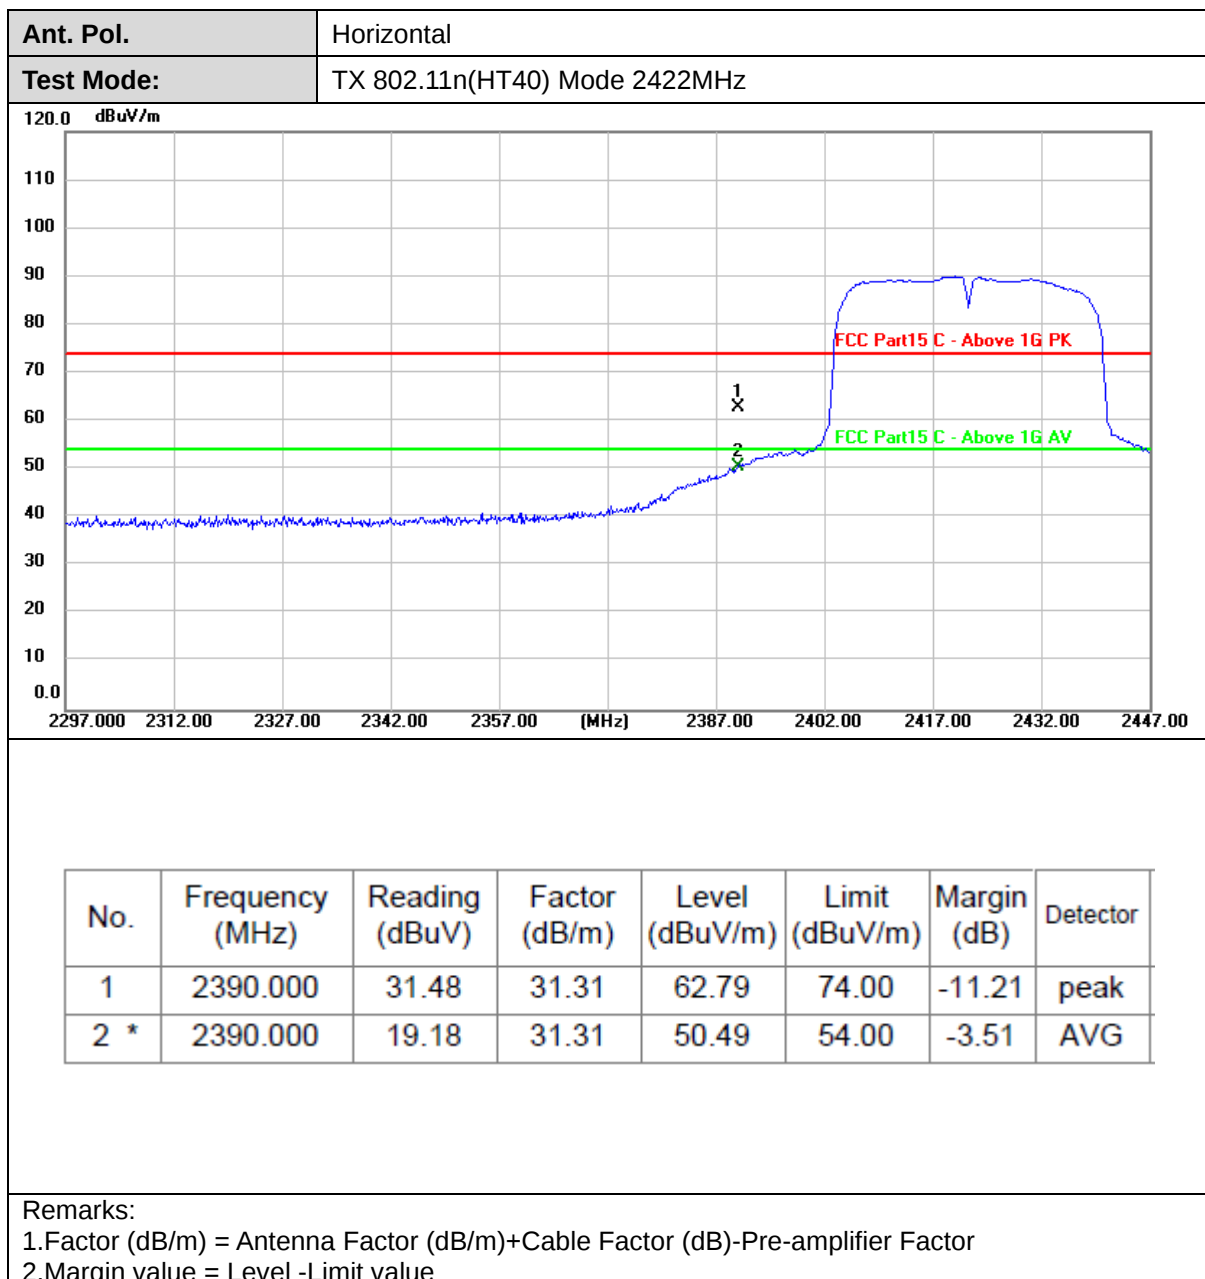

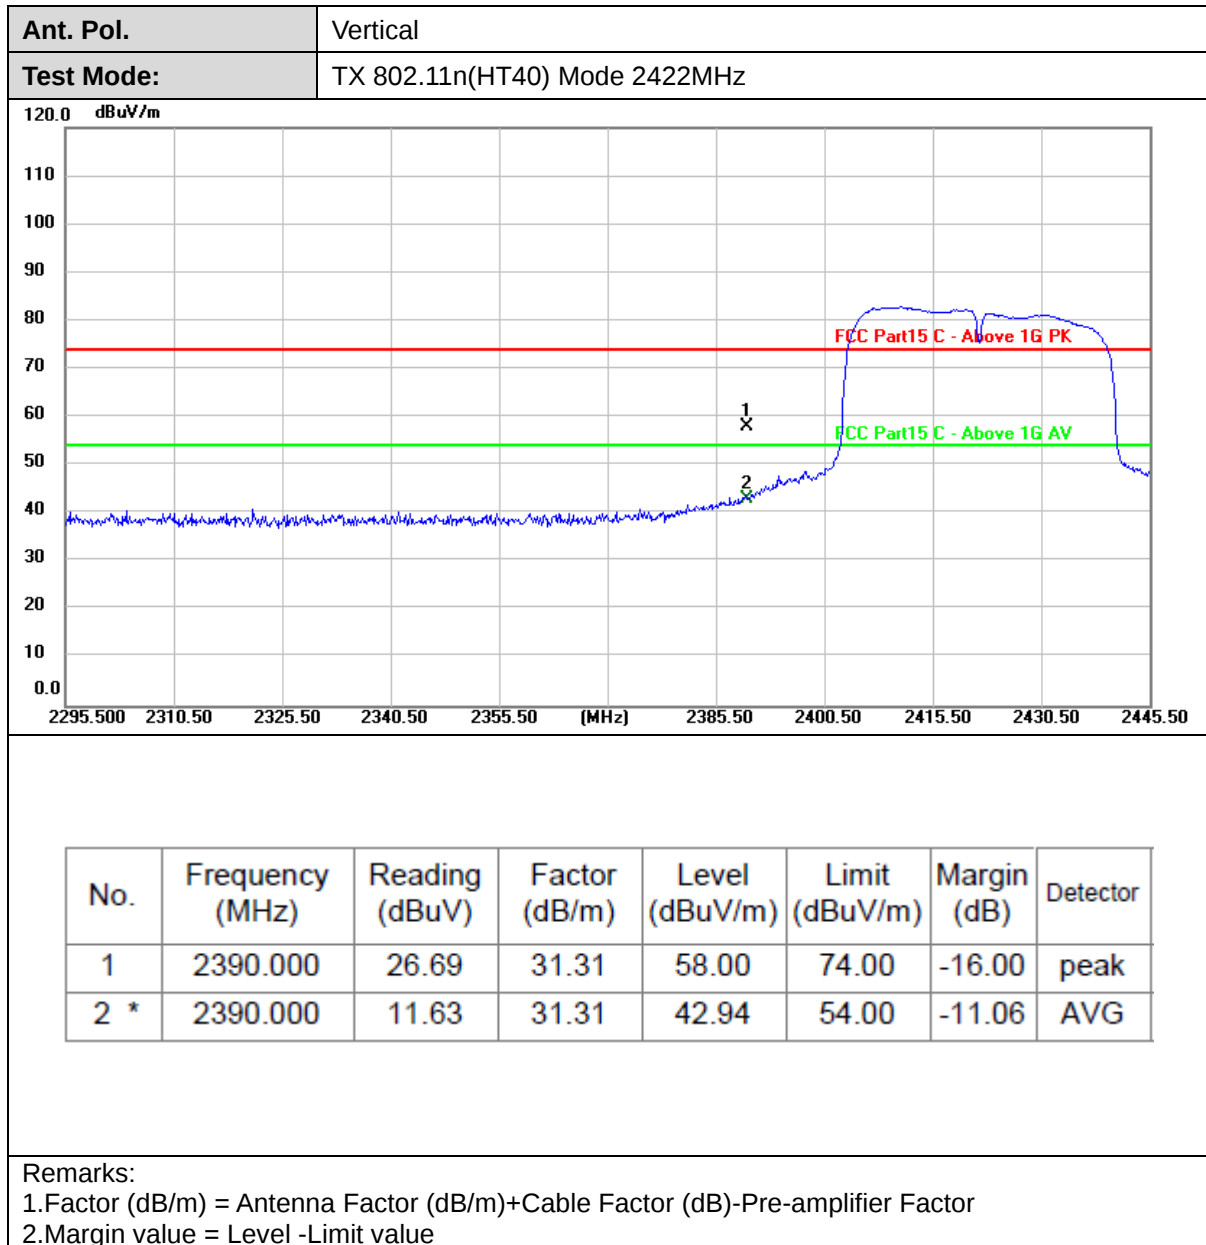

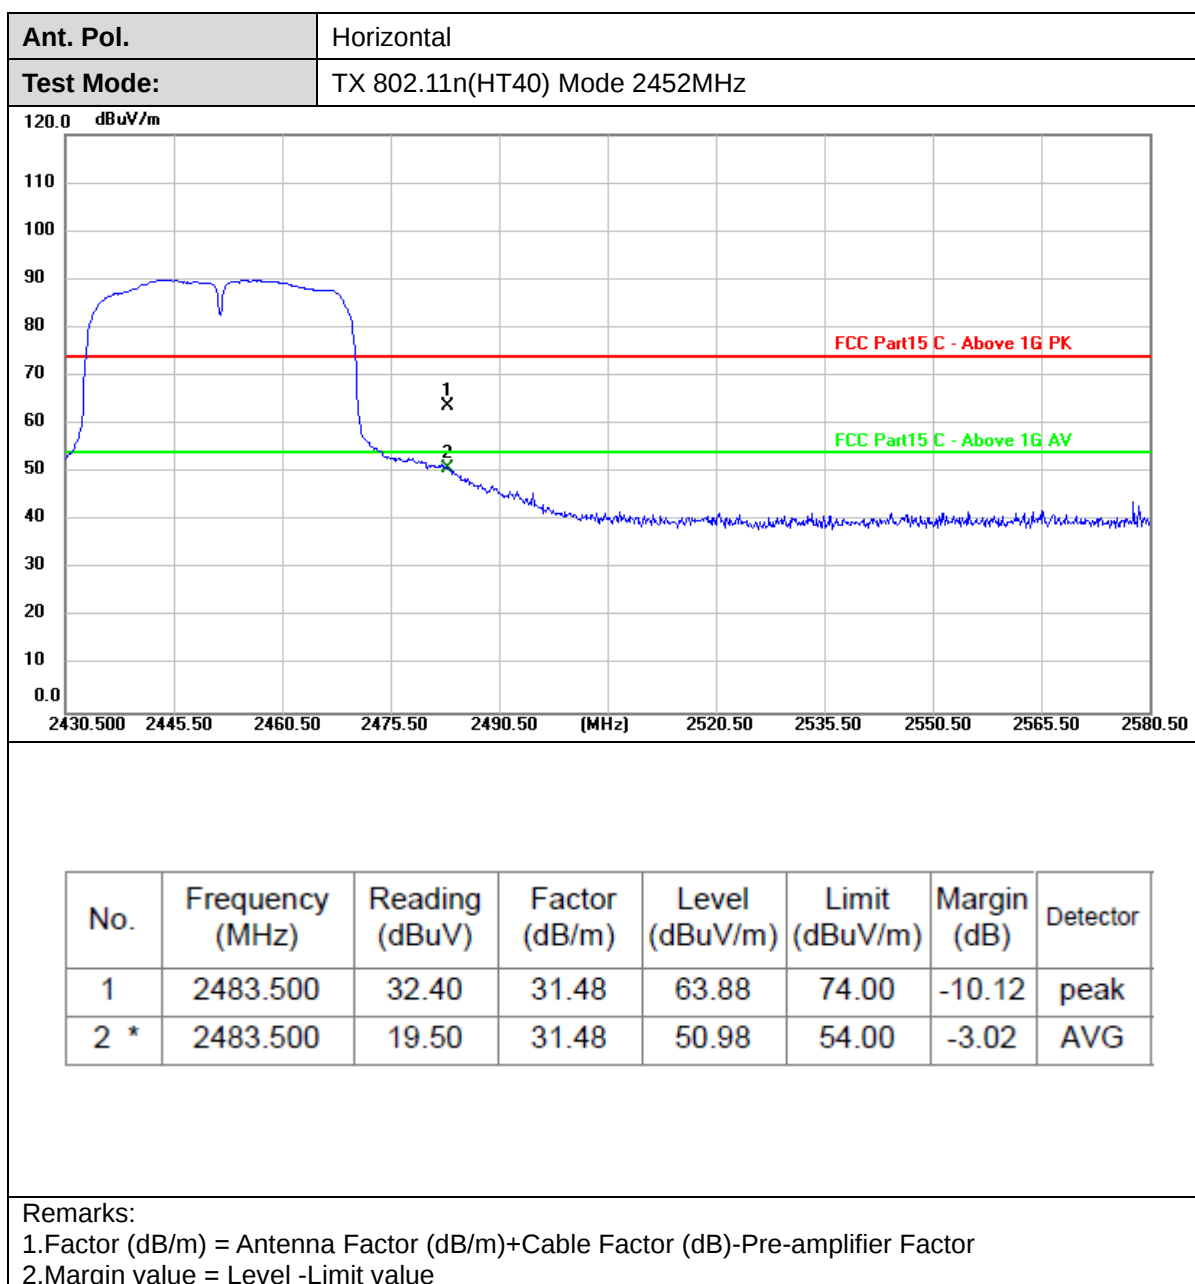

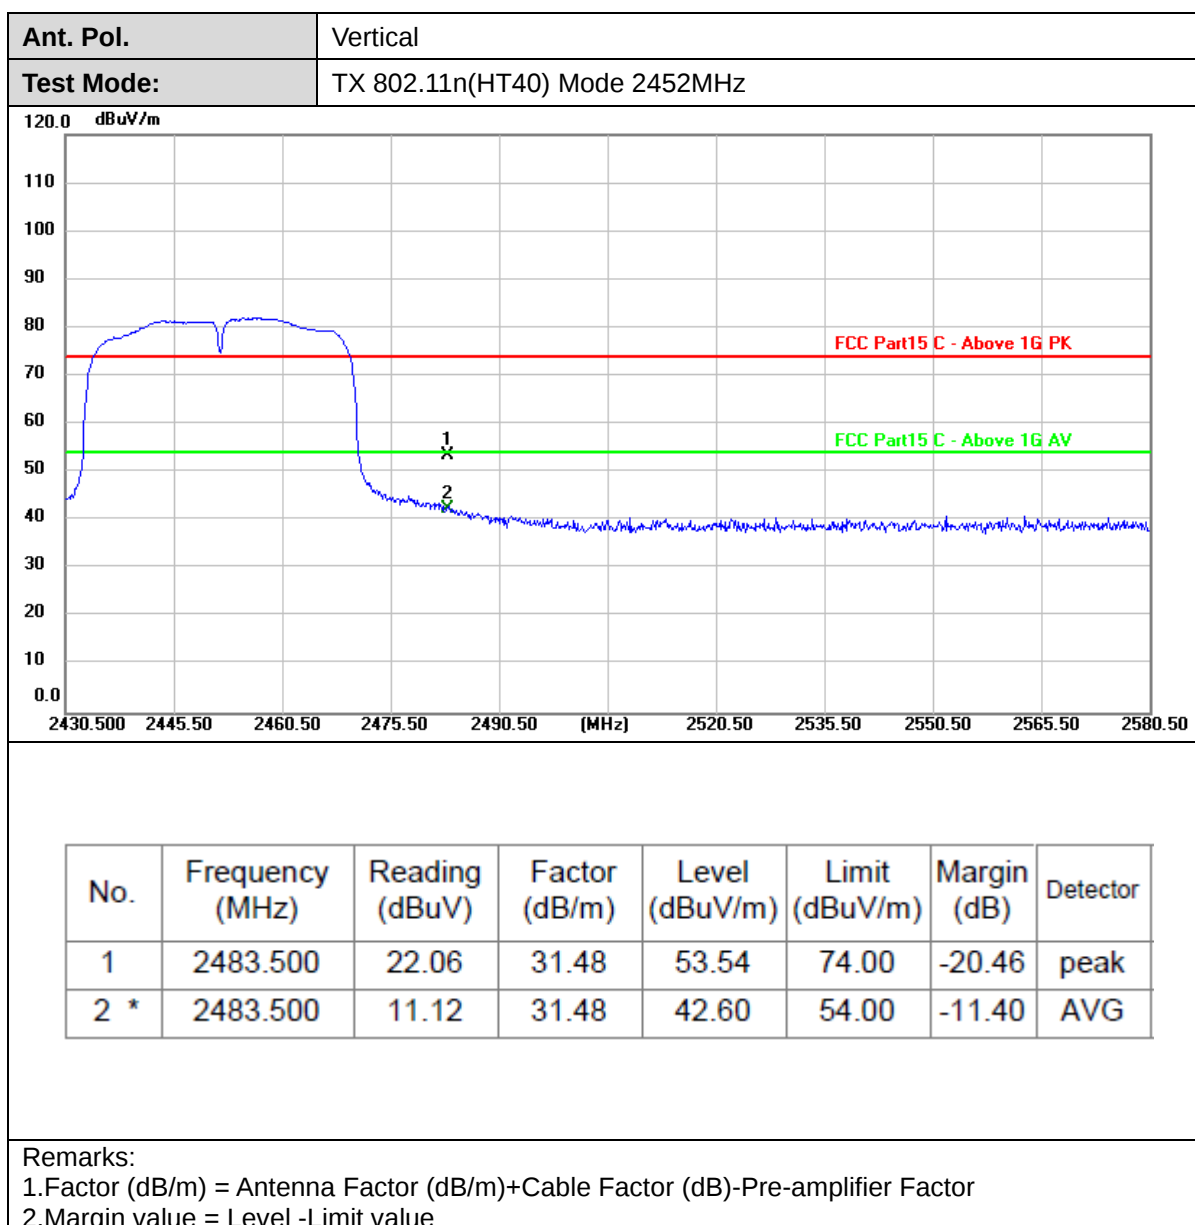




3.4. Band Edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Configuration



Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW $\geq$ RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

Test Mode


Please refer to the clause 2.4.

**Test Result****Conducted Spurious Emission**

Test Mode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	3.79	3.79	---	PASS
			30~1000	3.79	-54.87	≤-16.21	PASS
			1000~26500	3.79	-46.92	≤-16.21	PASS
		2437	Reference	3.15	3.15	---	PASS
			30~1000	3.15	-55.26	≤-16.85	PASS
			1000~26500	3.15	-45.89	≤-16.85	PASS
		2462	Reference	3.56	3.56	---	PASS
			30~1000	3.56	-55.55	≤-16.44	PASS
			1000~26500	3.56	-45.62	≤-16.44	PASS
11G	Ant1	2412	Reference	-0.93	-0.93	---	PASS
			30~1000	-0.93	-57.99	≤-20.93	PASS
			1000~26500	-0.93	-44.80	≤-20.93	PASS
		2437	Reference	-0.95	-0.95	---	PASS
			30~1000	-0.95	-58.26	≤-20.95	PASS
			1000~26500	-0.95	-46.46	≤-20.95	PASS
		2462	Reference	-0.54	-0.54	---	PASS
			30~1000	-0.54	-58.59	≤-20.54	PASS
			1000~26500	-0.54	-46.44	≤-20.54	PASS
11N20SISO	Ant1	2412	Reference	-1.14	-1.14	---	PASS
			30~1000	-1.14	-58.10	≤-21.14	PASS
			1000~26500	-1.14	-44.50	≤-21.14	PASS
		2437	Reference	-1.20	-1.20	---	PASS
			30~1000	-1.20	-58.63	≤-21.20	PASS
			1000~26500	-1.20	-46.26	≤-21.20	PASS
		2462	Reference	-0.54	-0.54	---	PASS
			30~1000	-0.54	-58.12	≤-20.54	PASS
			1000~26500	-0.54	-46.47	≤-20.54	PASS
11N40SISO	Ant1	2422	Reference	-3.19	-3.19	---	PASS
			30~1000	-3.19	-60.47	≤-23.19	PASS
			1000~26500	-3.19	-44.45	≤-23.19	PASS
		2437	Reference	-3.39	-3.39	---	PASS
			30~1000	-3.39	-60.91	≤-23.39	PASS
			1000~26500	-3.39	-46.30	≤-23.39	PASS
		2452	Reference	-3.50	-3.50	---	PASS
			30~1000	-3.50	-59.39	≤-23.50	PASS
			1000~26500	-3.50	-46.19	≤-23.50	PASS



Test Graphs:



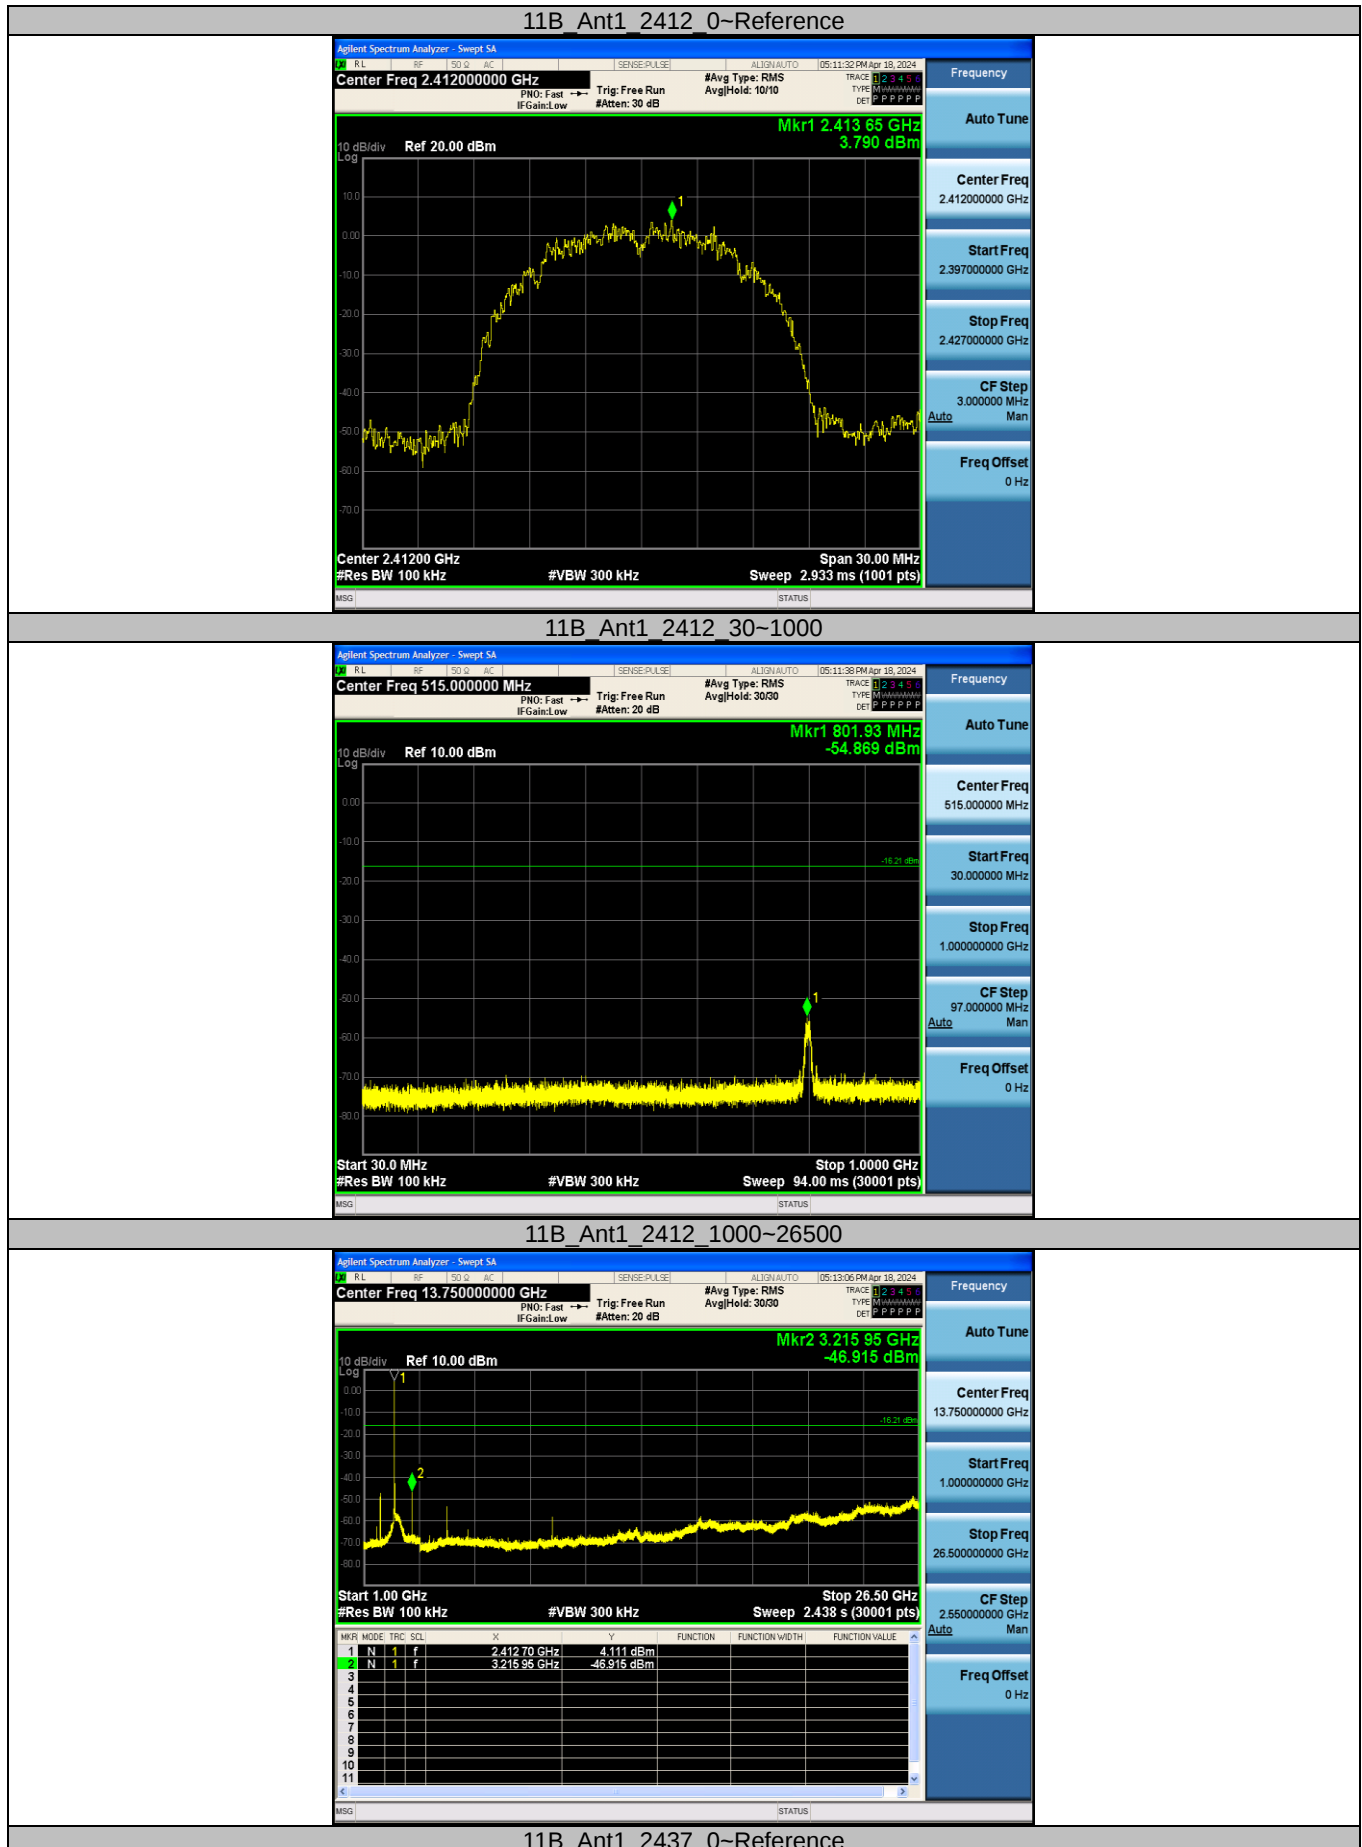


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059


Fax: (86)755-27521011 Http://www.sz-ctc.org.cn
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



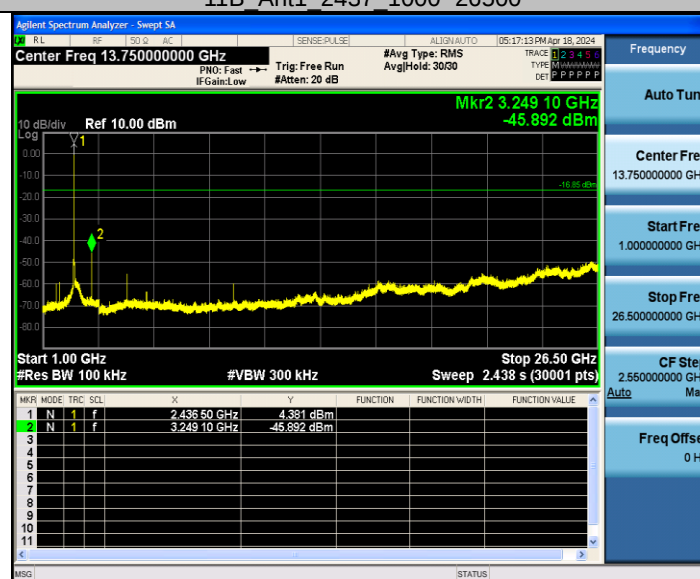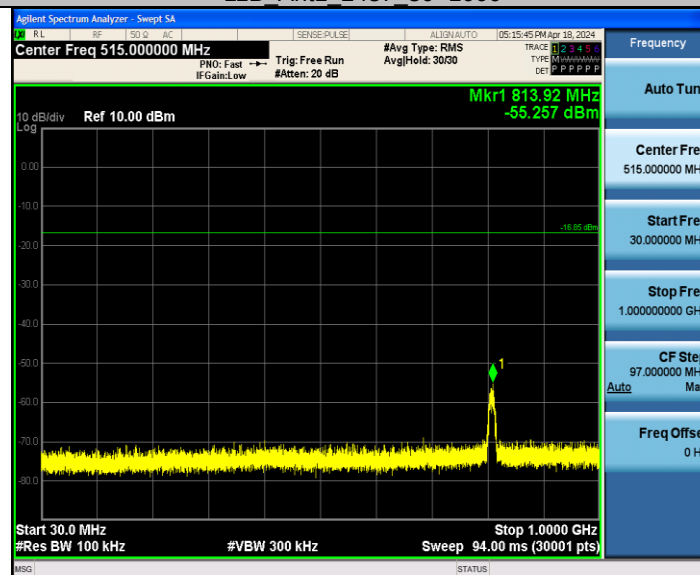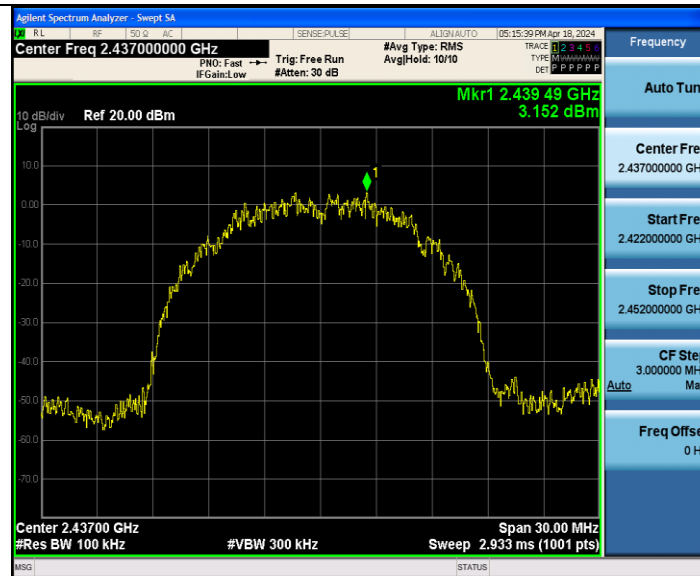




11B Ant1 2462 30-1000

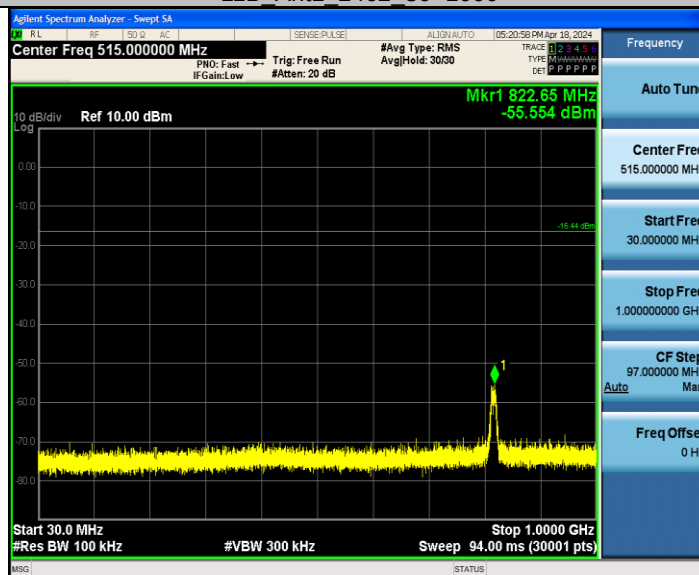


11B Ant1 2462 1000-26500

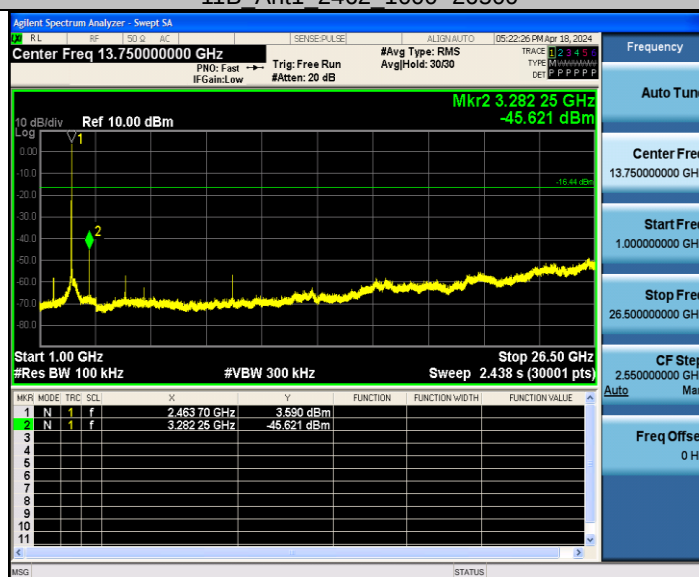


11G Ant1 2412 0-Reference



11G Ant1 2412 30~1000

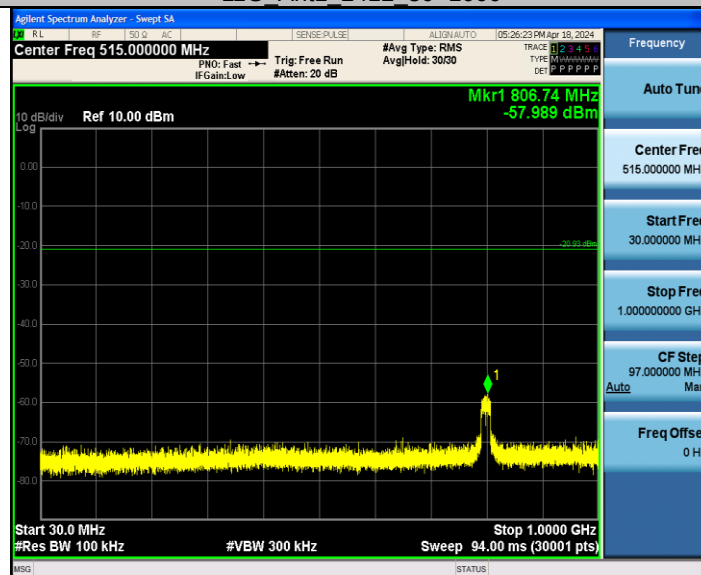


11G Ant1 2412 1000~26500

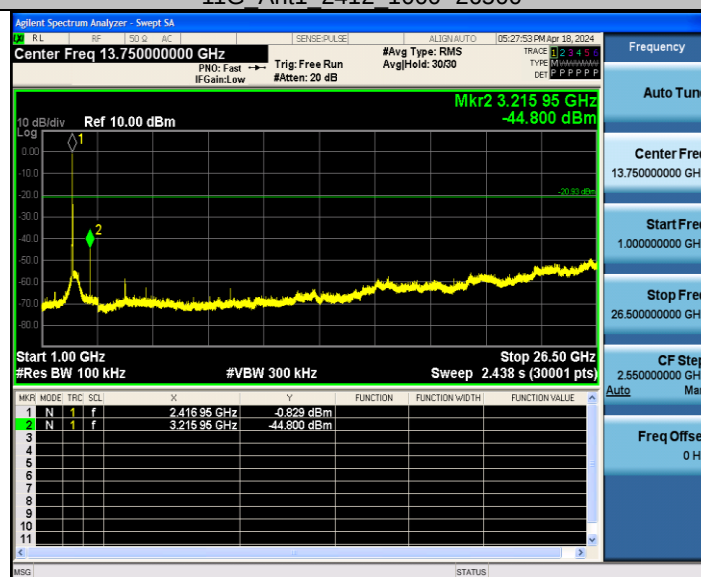


11G Ant1 2437 0~Reference



11G Ant1 2437 30~1000

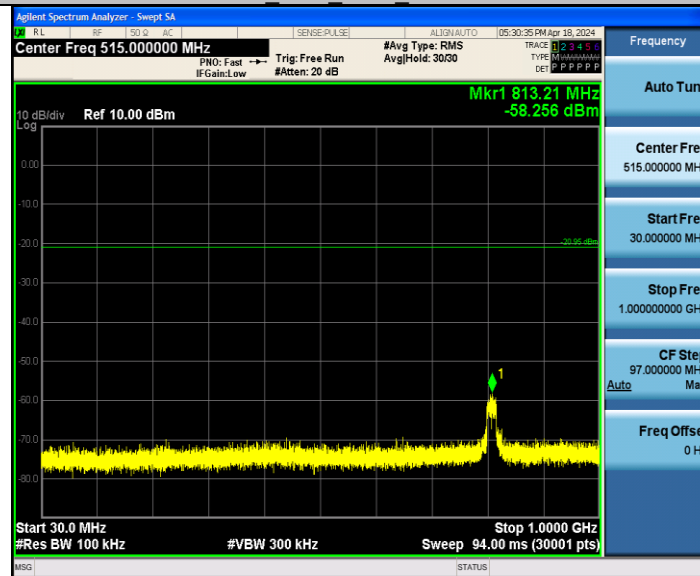


11G Ant1 2437 1000~26500

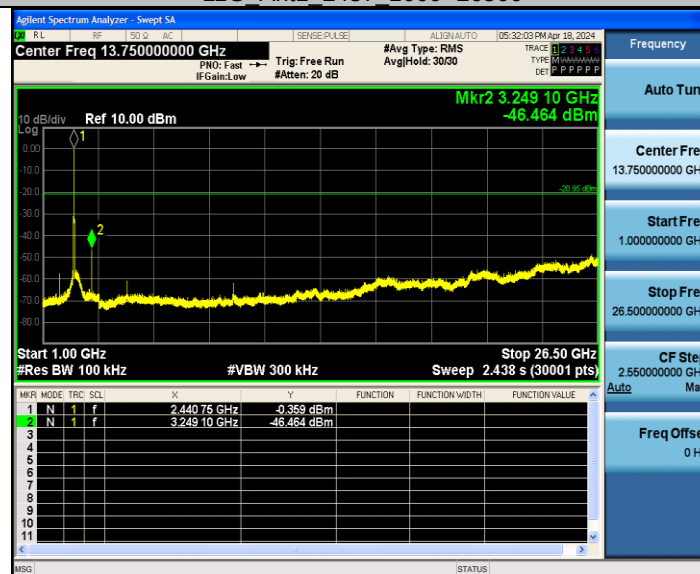


11G Ant1 2462 0-Reference



11G Ant1 2462 30~1000

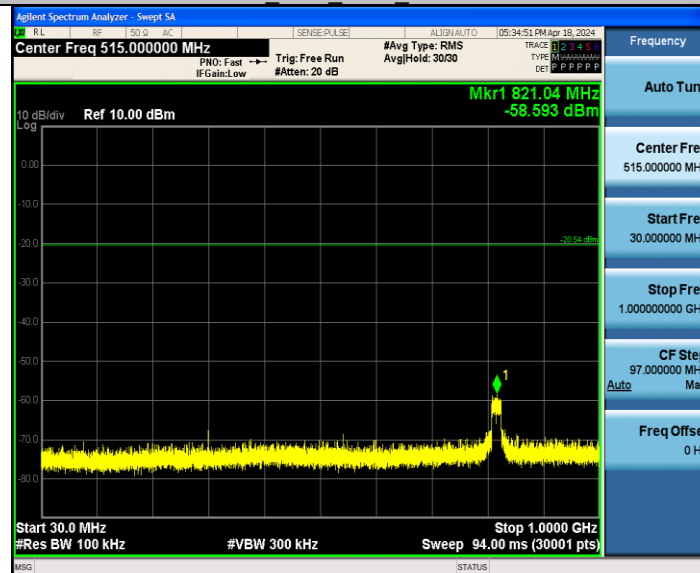

11G Ant1 2462 1000~26500

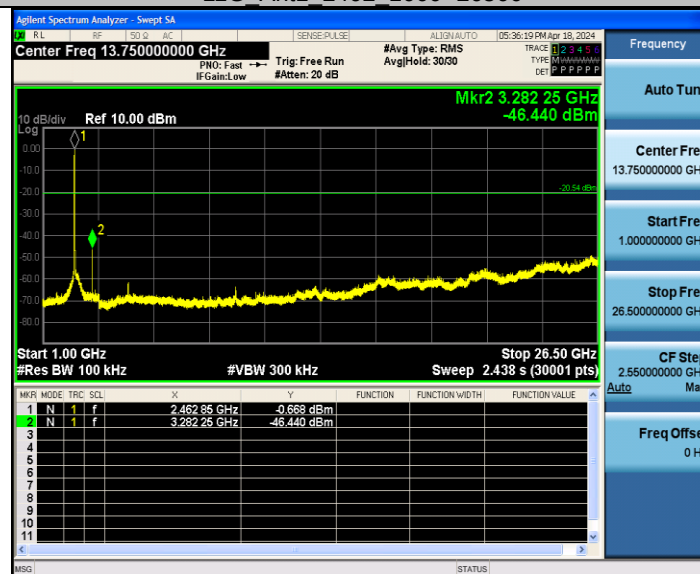

11N20SISO_Ant1_2412_0~Reference

CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>






11N20SISO_Ant1_2412_30~1000

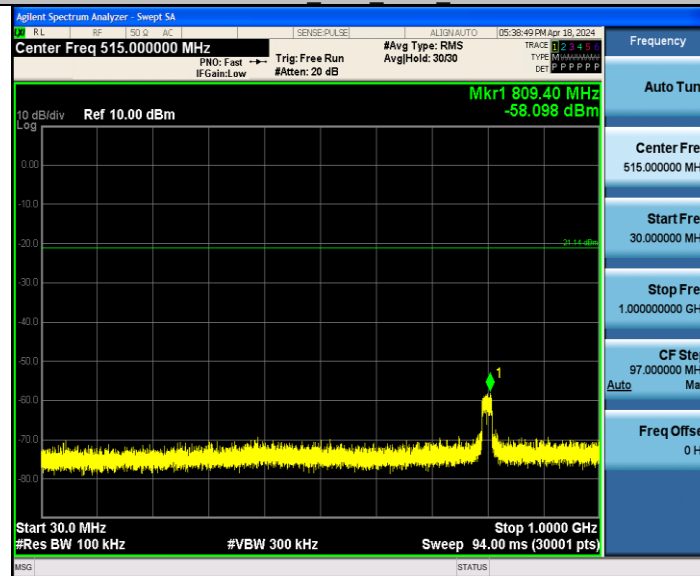


11N20SISO_Ant1_2412_1000~26500

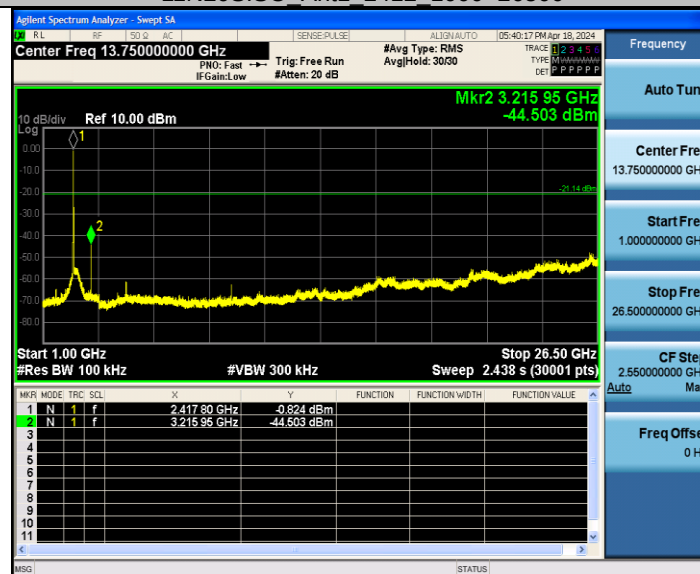


11N20SISO_Ant1_2437_0~Reference






11N20SISO_Ant1_2437_30~1000

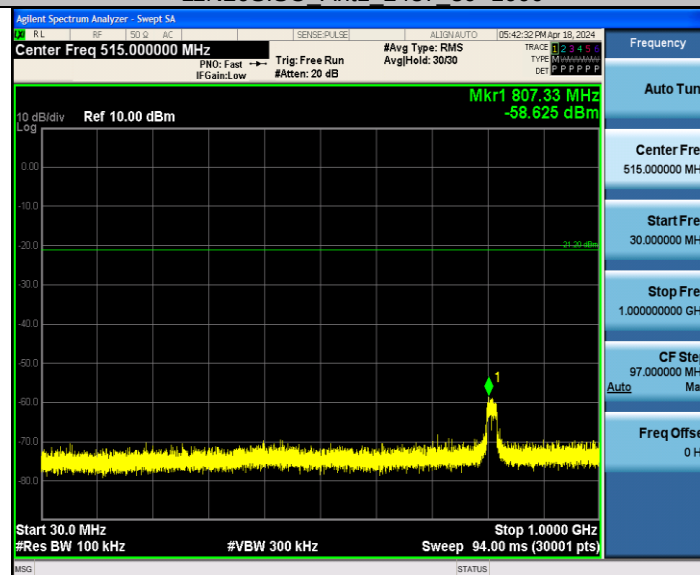

11N20SISO_Ant1_2437_1000~26500

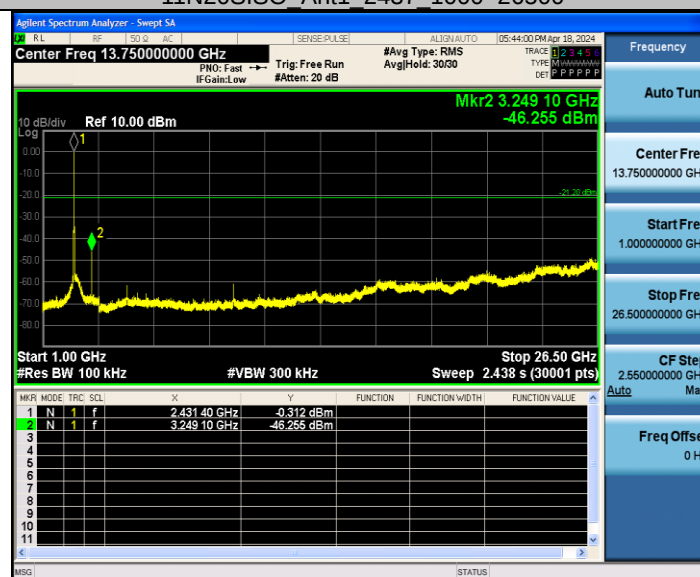


11N20SISO_Ant1_2462_0~Reference

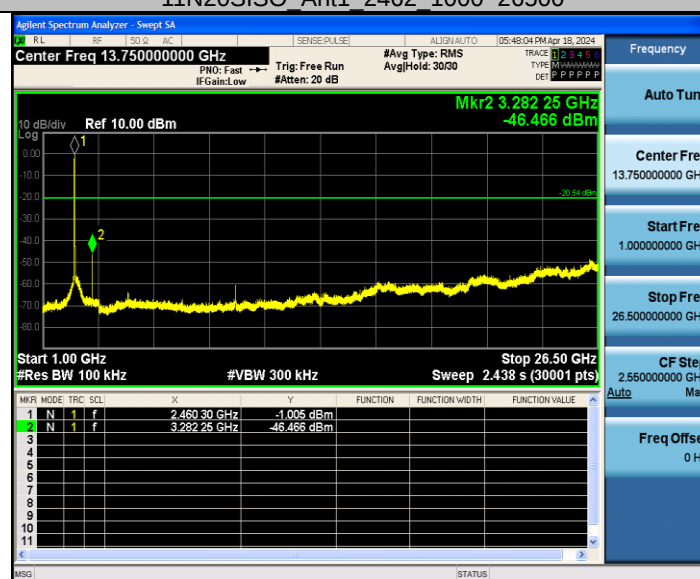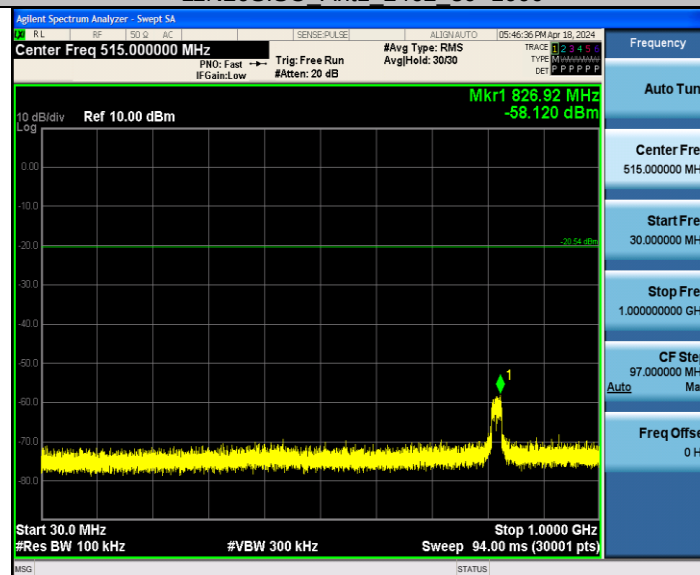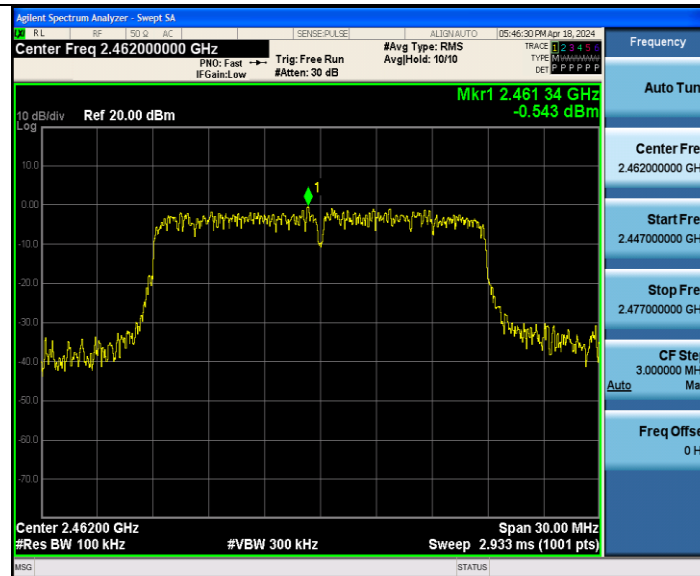




11N40SISO_Ant1_2422_30~1000

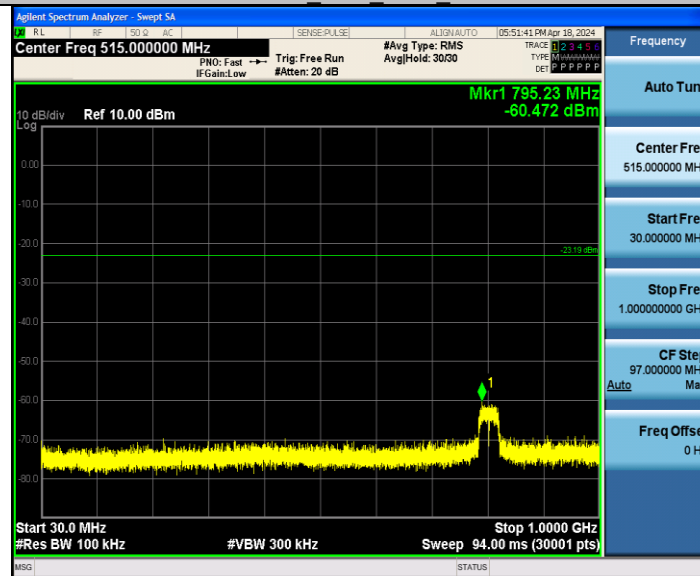

11N40SISO_Ant1_2422_1000~26500

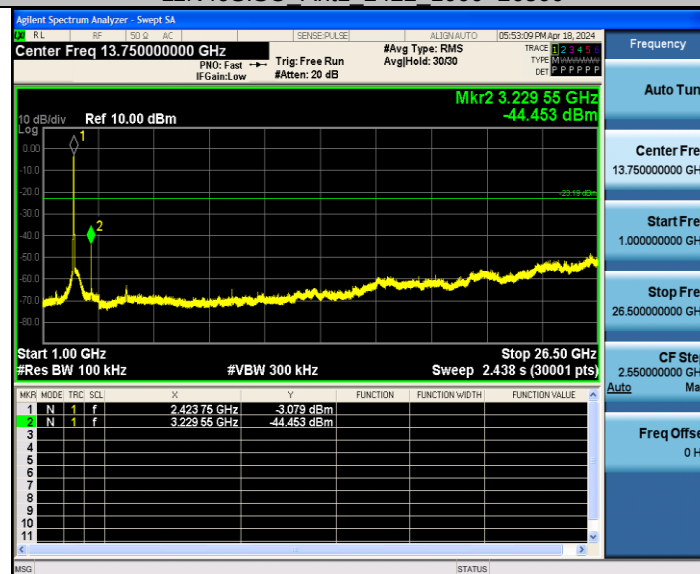

11N40SISO_Ant1_2437_0~Reference

CTC Laboratories, Inc.


Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059




Fax: (86)755-27521011 Http://www.sz-ctc.org.cn
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



11N40SISO_Ant1_2437_30~1000

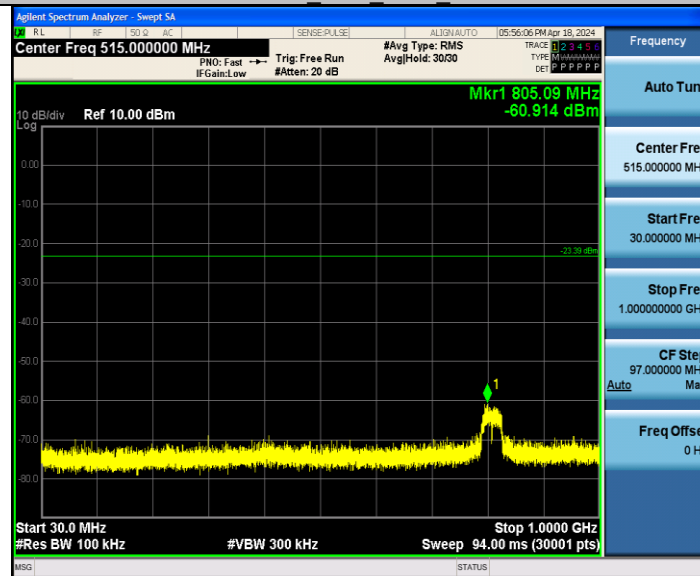


11N40SISO_Ant1_2437_1000~26500

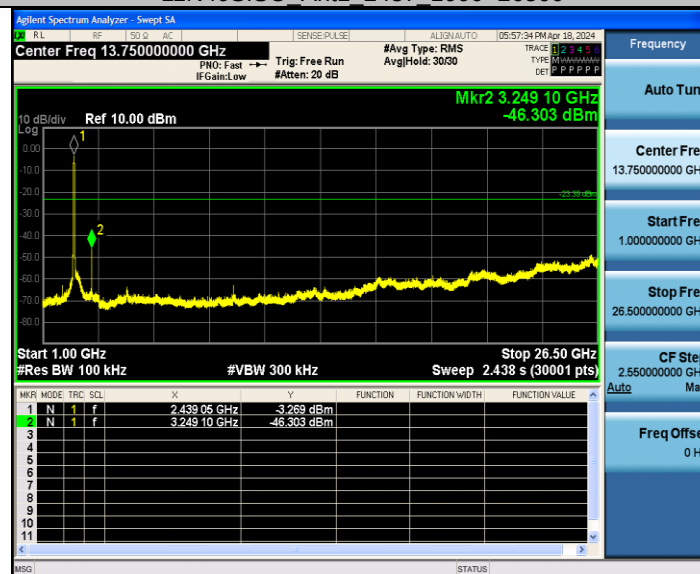

11N40SISO_Ant1_2452_0~Reference



11N40SISO Ant1 2452 30~1000

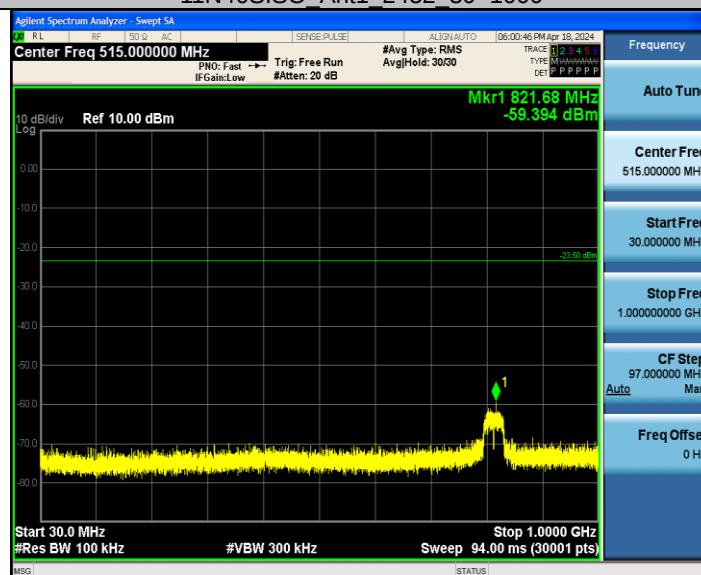

11N40SISO Ant1 2452 1000~26500

