



LCIE



Accreditation
N°1-1633
Scope available on
www.cofrac.fr

Template : May 28th, 2024

TEST REPORT

N°: 24029249-805926-A (FILE# 9449937)

Version: 01

Subject

Radio spectrum tests according to the standards:
FCC CFR 47 Part 15.247 & ANSI C63.10
RSS-247 & RSS-Gen

Issued to

MICHELIN NORTH AMERICA (US) INC.
One Parkway South
29615 –GREENVILLE

Apparatus under test

- Product
- Trade mark
- Manufacturer
- Model under test
- Serial number
- FCCID
- IC

Tire Mounted Sensor
Michelin
MANUFACTURE FRANCAISE DES PNEUMATIQUES MICHELIN
TMS AQ-01
60C0BFF5CEEE / 8
FI5TMSAP01
5056A-TMSAP01

Conclusion

See Test Program chapter

Test date	October 24, 2024 to October 30, 2024
Test location	LCIE Grenoble
FCC Test site	FR0008 - 918017 (MOI)
ISED Test site	6500A (MOI)
Sample receipt date	October 24, 2024
Composition of document	46 pages
Document issued on	December 04, 2024

Written by :

Akram HAKKARI
Tests operator

Approved by :

Majid MOURZAGH
Technical manager



Reproduction of this document is only authorized in its complete form. Any partial reproduction or any insertion of results in an accompanying text with a view to their distribution must receive prior and formal agreement from LCIE. This document results from tests carried out on a specimen, sample or test piece. It does not prejudice the conformity of all the products manufactured to the object tested. Unless otherwise indicated or rule specified by the test method, the decision of conformity does not take into account measurement uncertainty. It in no way prejudices a certification decision. The accreditation of the COFRAC Testing Section attests to the technical competence of the laboratories for the tests covered by the accreditation only. If certain tests mentioned in this report were carried out outside the framework of COFRAC accreditation, they are identified by the symbol

LCIE

Laboratoire Central des Industries Electriques
Une société Bureau Veritas

Z.I Centr'alp
170, Rue de Chatagnon
38430 Moirans
FRANCE

Tél. + 33 4 76 07 36 36
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

Version	Date	Author	Modification
01	October 28, 2024	Akram HAKKARI	Creation of the document

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.



SUMMARY

1.	TEST PROGRAM	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)	5
3.	OCCUPIED BANDWIDTH.....	10
4.	6DB BANDWIDTH	13
5.	MAXIMUM CONDUCTED OUTPUT POWER	16
6.	POWER SPECTRAL DENSITY	19
7.	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	23
8.	UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS	28
9.	UNCERTAINTIES CHART	46



1. TEST PROGRAM

References

- 47 CFR Part 15.247 (2023)
- RSS 247 Issue 3
- RSS Gen Issue 5
- KDB 558074 D01 DTS Meas Guidance v05r02 [Pb](#)
- KDB 662911 D01 Multiple Transmitter Output v02r01 [Pb](#)
- ANSI C63.10 (2013)

Radio requirement:

Clause - Test Description		Test result - Comments
Occupied Bandwidth	/	PASS
6dB Bandwidth	FCC	PASS
Maximum Conducted Output Power	FCC	PASS
Power Spectral Density	FCC	PASS
Unwanted Emissions in Non-Restricted Frequency Bands	FCC	PASS
Unwanted Emissions in Restricted Frequency Bands	FCC	PASS
Receiver Radiated Emissions	/	PASS(2)
This table is a summary of test report, see conclusion of each clause of this test report for detail.		

(1) Limited program

(2) Testing covered the receive mode, and receiver spurious emissions are considered to be the same as transmitter.

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable

NP: Test Not Performed

2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):

Model under test:	TMS AQ-01
Serial Number:	60C0BFF5CEEE
Dimensions:	2.8cm x 2.8cm x 1.5cm (Length x Width x Height)
Type:	Floor-Standing

Power supply:

During all the tests, EUT is supplied by V_{nom} : **3.0VDC**

For measurement with different voltage, it will be presented in test method.

Name	Type	Rating	Reference / Sn	Comments
Supply1	Battery	3.0VDC	Maxell CR2450HR-EX	/

NC: Not communicated by provider

Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
Supply1	Battery	/	/	/	/	Inside

NC: Not communicated by provider

Auxiliary equipment used during test:

Type	Reference	Sn	Comments
Automated programmer	CYCLONE FX	/	To set running mode configuration BLE

NC: Not communicated by provider



Equipment information (declaration of provider):

Bluetooth Low Energy:	V4.2
Chipset / RF Module	NCV-RSL10-101Q48-AVG
Frequency band:	[2400 – 2483.5] MHz
Spectrum Modulation:	DSSS (Tested like it – international agreements)
Number of Channel:	40
Spacing channel:	2MHz
Channel bandwidth:	1MHz
Antenna Type:	Internal
Antenna connector:	None
Antenna requirements §15.203	Conducted Method (welded connection, according to manufacturer's requirements)
Transmit chains:	1
Receiver chains	1

CHANNEL PLAN			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
Cmin: 0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
Cmid :12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	Cmax: 39	2480

DATA RATE			
Available	Data Rate (Mbps)	Modulation Type	Worst Case Modulation
☒	0.25	GFSK (1MHz)	☐
☒	1	GFSK (1MHz)	☒




Antenna Characteristic			
Antenna reference	Gain (dBi)	Frequency Band (MHz)	Impedance(Ω)
KOCYERA PN : 9001978	3	2400-2485	50

Hardware information				
Highest internal frequency (PLL, Quartz, Clock, Microprocessor...):		F _{Highest} :	2480	MHz
Firmware (if applicable):		V:	ABW-001	
Software (if applicable):		V:	None	
Equipment intended:	Mobile			
Type of equipment:	Stand-alone			
Equipment sample:	Production model			
Duty cycle:	Continuous duty			
Operating temperature range:	T _{min} :		-40 °C	
	T _{nom} :		20°C	
	T _{max} :		+125 °C	
Operating voltage:	V _{nom} :		3.0VDC	

NC: Not communicated by provider

2.2. RUNNING MODE

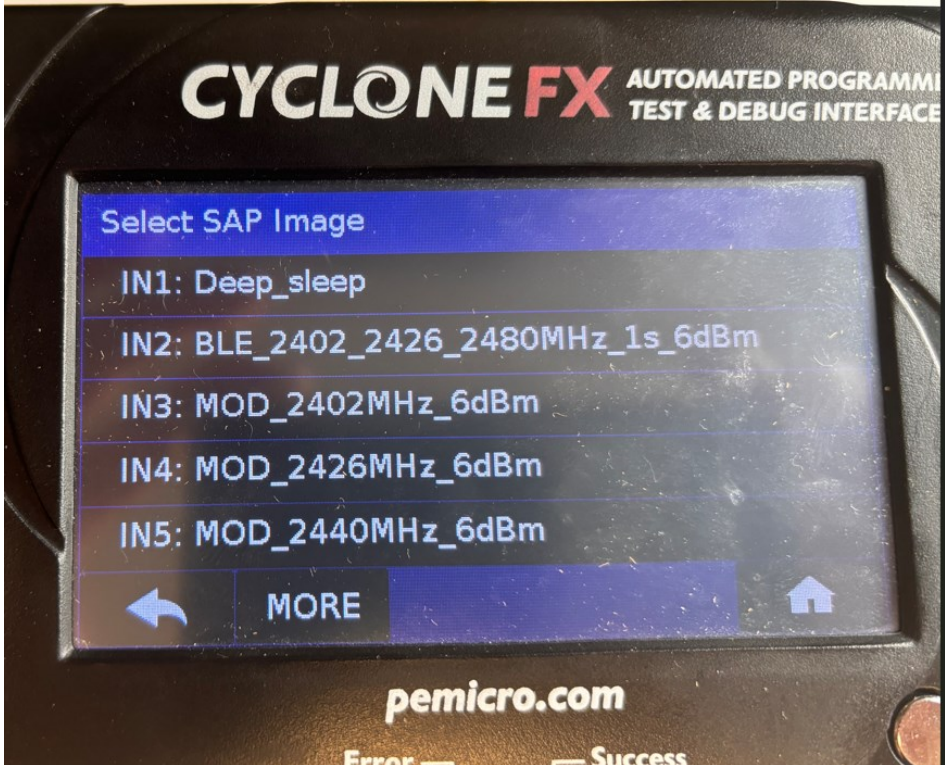Test mode	Description of test mode
Test mode 1	Permanent emission with modulation on a fixed channel in the data rate that produced the highest power <u>Power Setting at 6dBm.</u> 

Test	Running mode
Occupied Bandwidth	Test mode 1
6dB Bandwidth	Test mode 1
Maximum Conducted Output Power	Test mode 1
Power Spectral Density	Test mode 1
Conducted Spurious Emission at the Band Edge	Test mode 1
Unwanted Emissions in Non-Restricted Frequency Bands	Test mode 1
Unwanted Emissions in Restricted Frequency Bands	Test mode 1
Receiver Radiated Emissions	Not applicable

2.3. EQUIPMENT LABELLING

Label
None

2.4. EQUIPMENT MODIFICATIONS DURING THE TESTS

None



2.5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where:

FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Factor

AG = Amplifier Gain

Example:

Assume a receiver reading of 52.5dBμV is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dBμV/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dBμV/m value can be mathematically converted to its corresponding level in μV/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}.$$

2.6. TEST DISTANCE EXTRAPOLATION – FCC/ISED

The field strength is extrapolated to the new measurement distance using formula from FCC Part15.31 (f) and §6.5-6.6 RSS-GEN:

Below 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Above 30MHz,

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

Where:

FS_{limit} is the calculation of field strength at the limit distance, expressed in dBμV/m

FS_{max} is the measured field strength, expressed in dBμV/m

d_{measure} is the distance of the measurement point from the EUT

d_{limit} is the reference limit distance

2.7. CALIBRATION DATE

The calibration intervals are extended at 12+2 months. This extended interval is based on the fact that there is sufficient calibration data to statistically establish a trend or based on experience of use of the test equipment to assure good measurement results for a longer period.

2.8. METHOD TO DETERMINATE THE SPURIOUS RADIATED EMISSION

The Normalized Site Attenuation (NSA) is added to the maximum values observed during the azimuth search in order to obtain the spurious radiated emission. For spurious above -6dB from the limit found with the NSA, the Substitution Method is applied.

The substitution antenna replaces the equipment under test (EUT) for Effective Radiated Power (ERP) or Effective Isotropically Radiated Power (EIRP) measurement following the standard. Power is measured for a high level and calculated for the same level of radiated field strength obtained on the measuring antenna and EUT.

3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS

Date of test : October 25, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 37
Ambient temperature (°C) : 22

3.2. TEST SETUP


The Equipment Under Test is installed in a climatic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:

ANSI C63.10 § 6.9.2 and RSS-Gen Issue 5 § 6.7

- RBW used in the range of 1% to 5% of the anticipated emission bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = Max Hold.
- Sweep = Auto couple.
- Allow the trace to stabilize.
- OBW 99% function of spectrum analyzer used

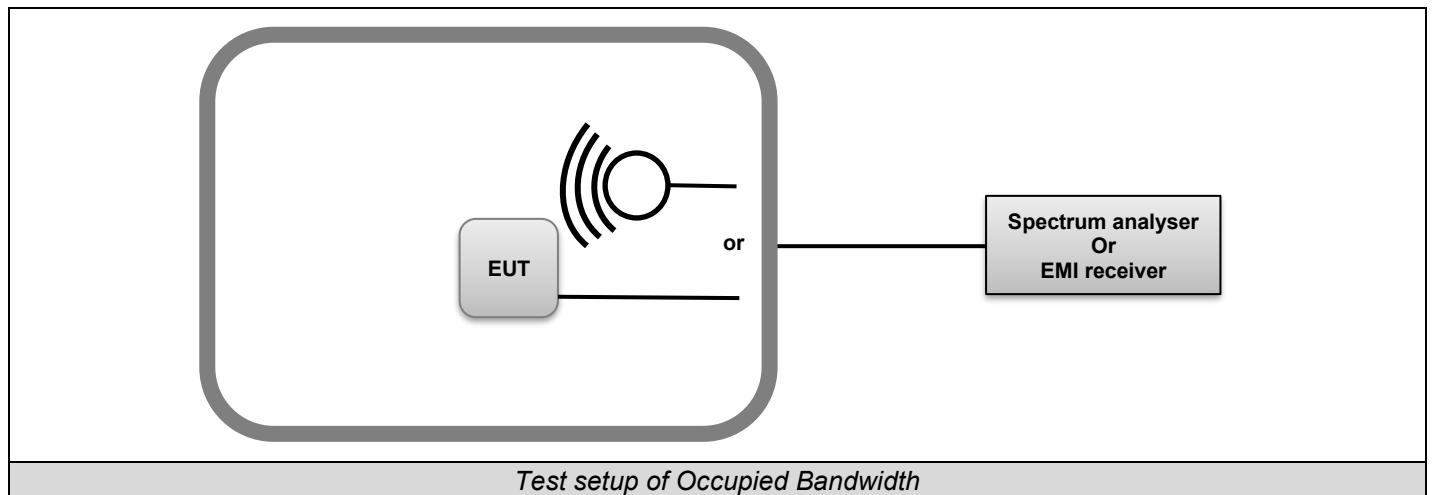

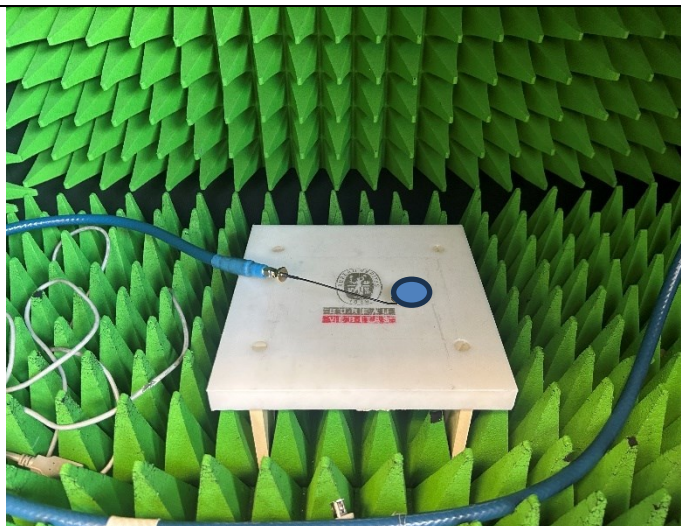


Photo of Occupied bandwidth

3.3. **LIMIT**

None


3.4. **TEST EQUIPMENT LIST**

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Full Anechoic Room	SIEPEL	—	D3044024	-/-	-/-
SMA 1.5m	SUCOFLEX	18GHz	A5329863	08/24	08/25
SMA 1.5m	SUCOFLEX	18GHz	A5329864	10/23	10/24
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25

3.5. **DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION**

None

3.6. RESULTS

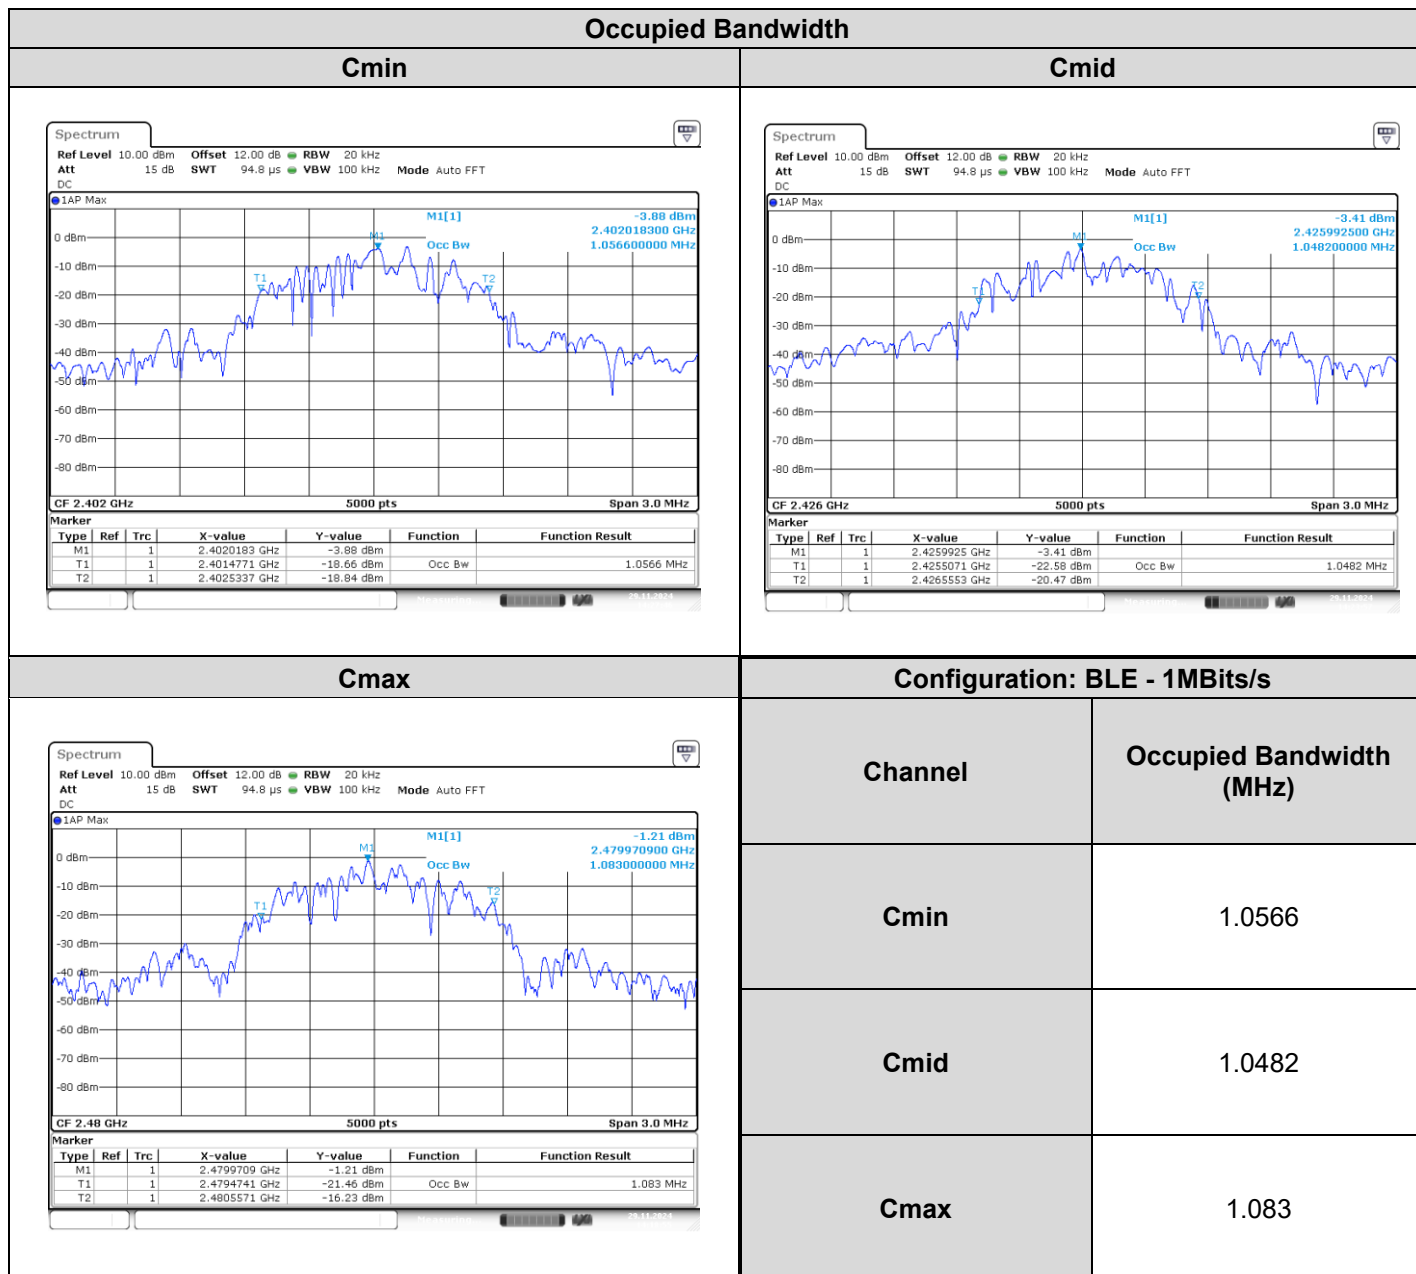

3.7. CONCLUSION

Occupied Channel Bandwidth measurement performed on the sample of the product **TMS AQ-01**, Sn: **8**, in configuration and description presented in this test report, show levels **compliant** to the **RSS-GEN** limits.

4. 6dB BANDWIDTH

4.1. TEST CONDITIONS

Date of test : October 29, 2024
Test performed by : Majid MOURZAGH
Relative humidity (%) : 37
Ambient temperature (°C) : 22

4.2. TEST SETUP


The Equipment Under Test is installed in a climatic chamber.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.2

- Set resolution bandwidth (RBW) = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer.

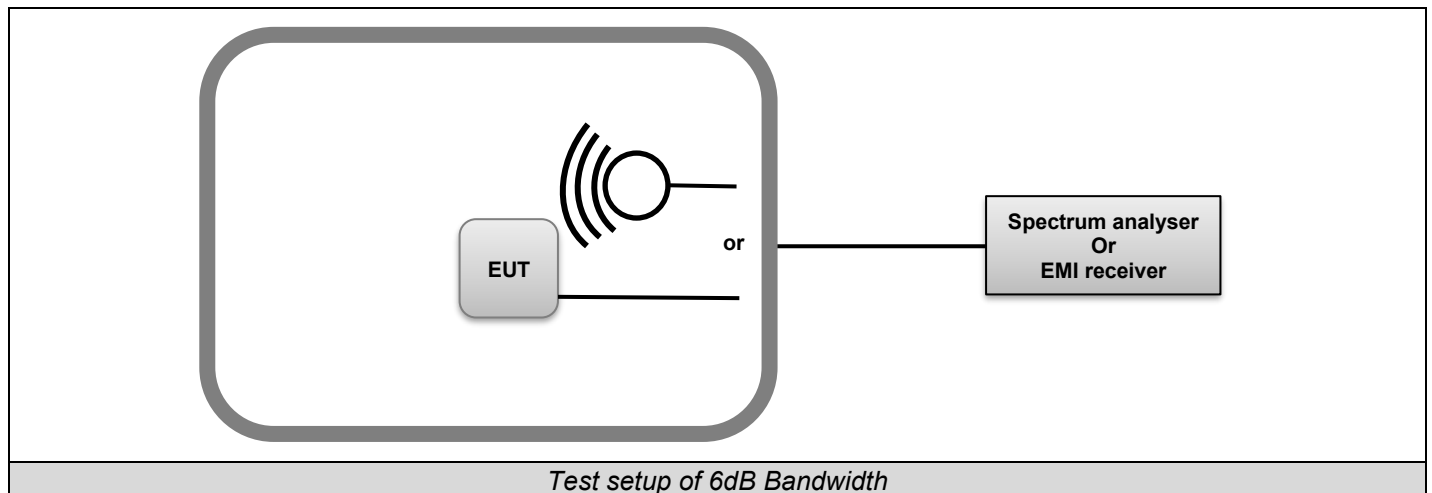

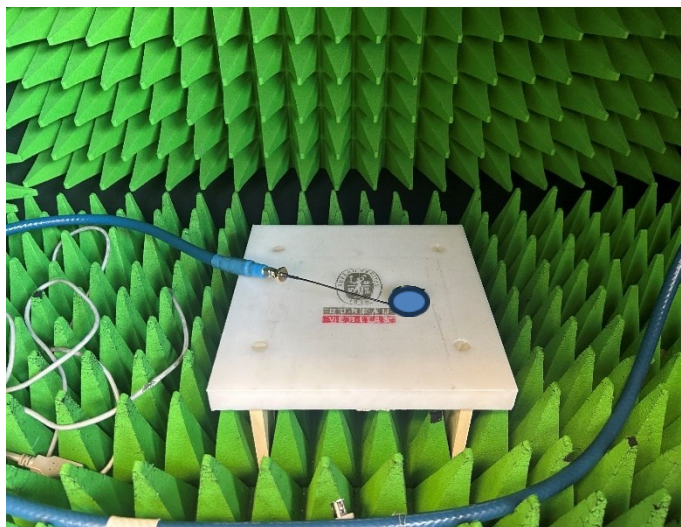


Photo of 6dB bandwidth

4.3. LIMIT

Frequency range	6dB bandwidth
902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz	≥500kHz


4.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Full Anechoic Room	SIEPEL	—	D3044024	-/-	-/-
SMA 1.5m	SUCOFLEX	18GHz	A5329863	08/24	08/25
SMA 1.5m	SUCOFLEX	18GHz	A5329864	10/23	10/24
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25

4.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

4.6. RESULTS

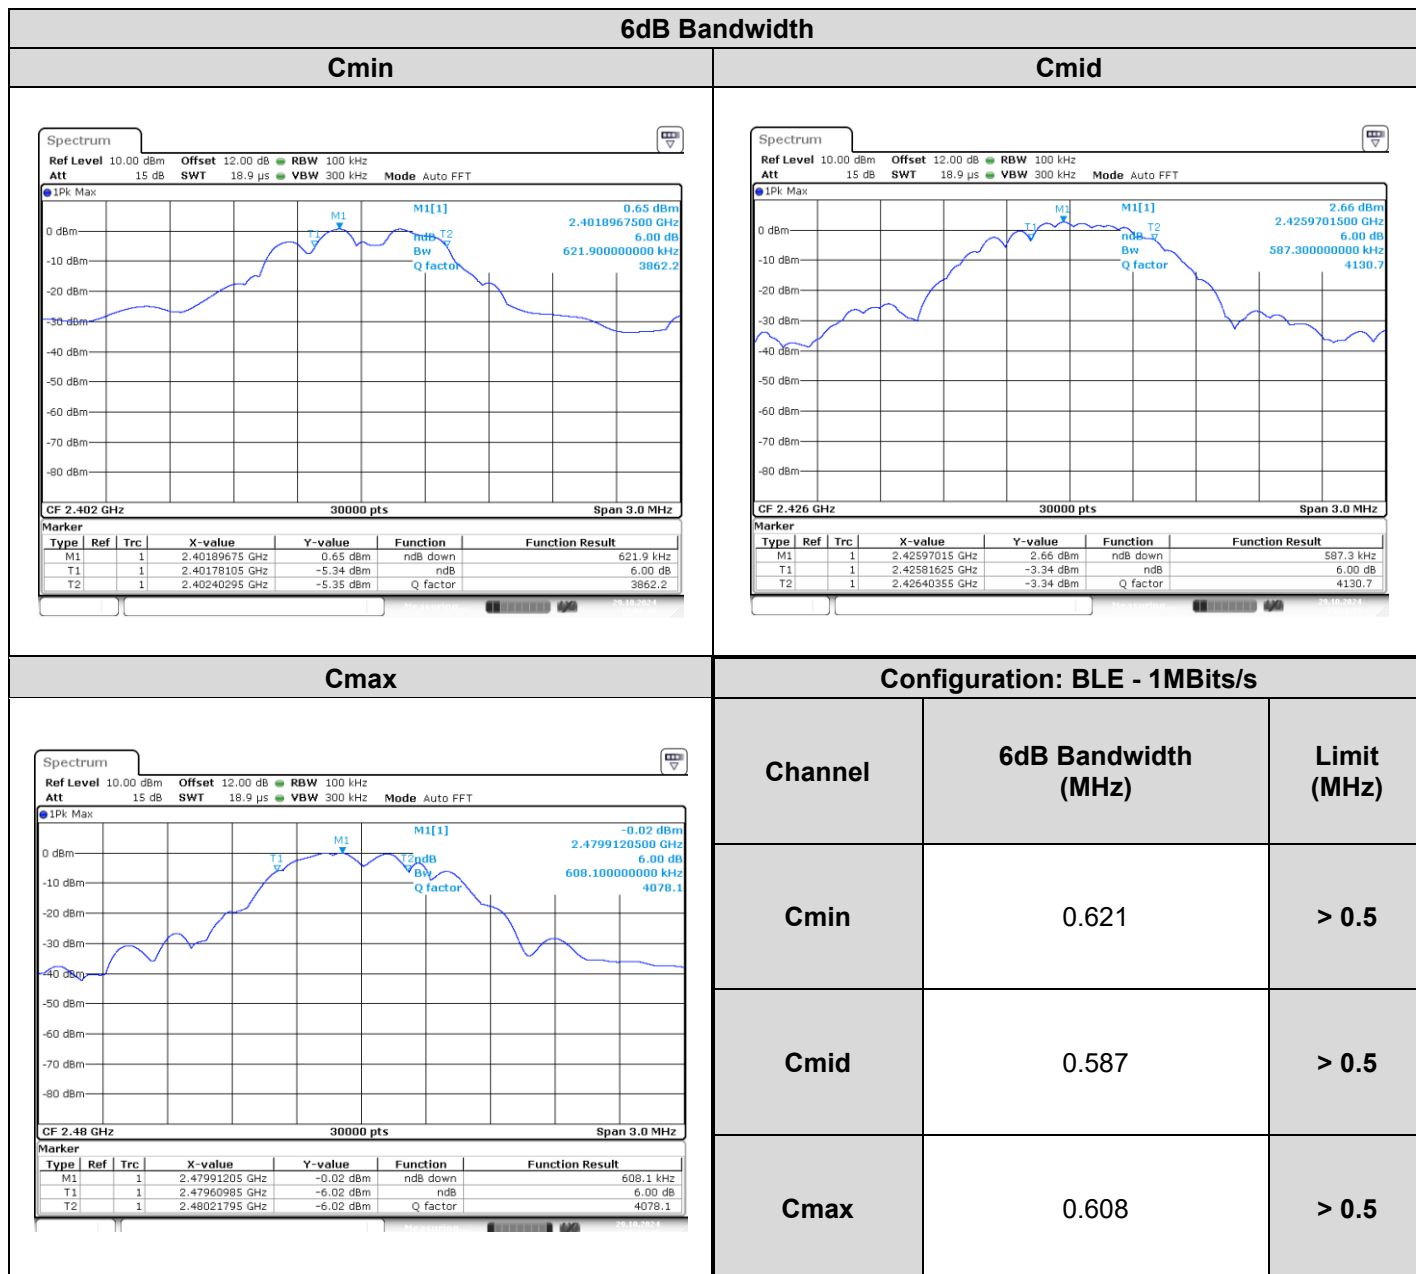

4.7. CONCLUSION

6dB Bandwidth measurement performed on the sample of the product **TMS AQ-01**, Sn: **8**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.

5. MAXIMUM CONDUCTED OUTPUT POWER

5.1. TEST CONDITIONS

Date of test : October 28, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 38
Ambient temperature (°C) : 23

5.2. TEST SETUP

The Equipment Under Test is installed in a climatic chamber.
Measurement is performed with a spectrum analyzer in conducted method.


The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure used: KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.1

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq 3 \times$ RBW.
- Set span $\geq 3 \times$ RBW
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

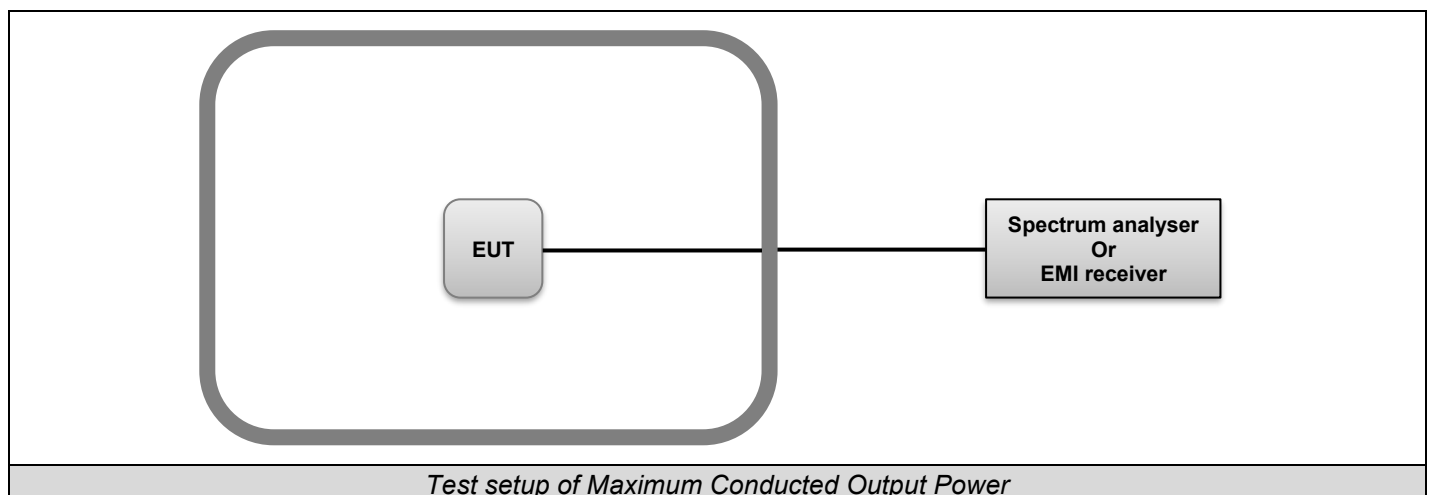

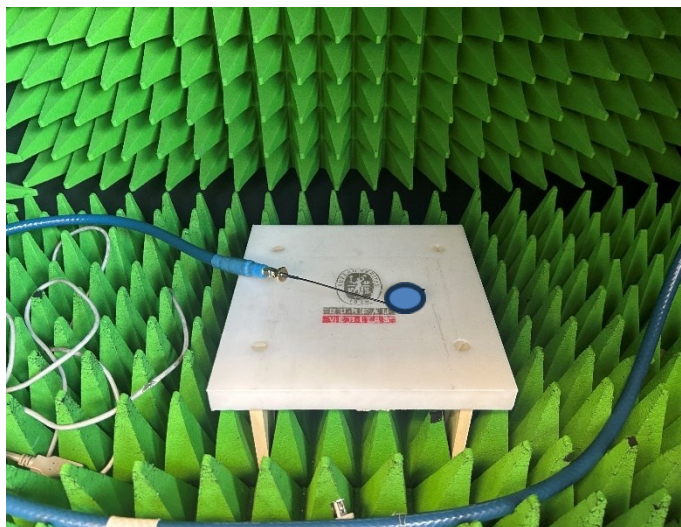


Photo of Maximum Conducted Output Power

5.3. LIMIT

Frequency range	Maximum Conducted Output Power
902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz	≤30dBm*

*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi


5.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Full Anechoic Room	SIEPEL	—	D3044024	-/-	-/-
SMA 1.5m	SUCOFLEX	18GHz	A5329863	08/24	08/25
SMA 1.5m	SUCOFLEX	18GHz	A5329864	10/23	10/24
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25

5.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

5.6. RESULTS

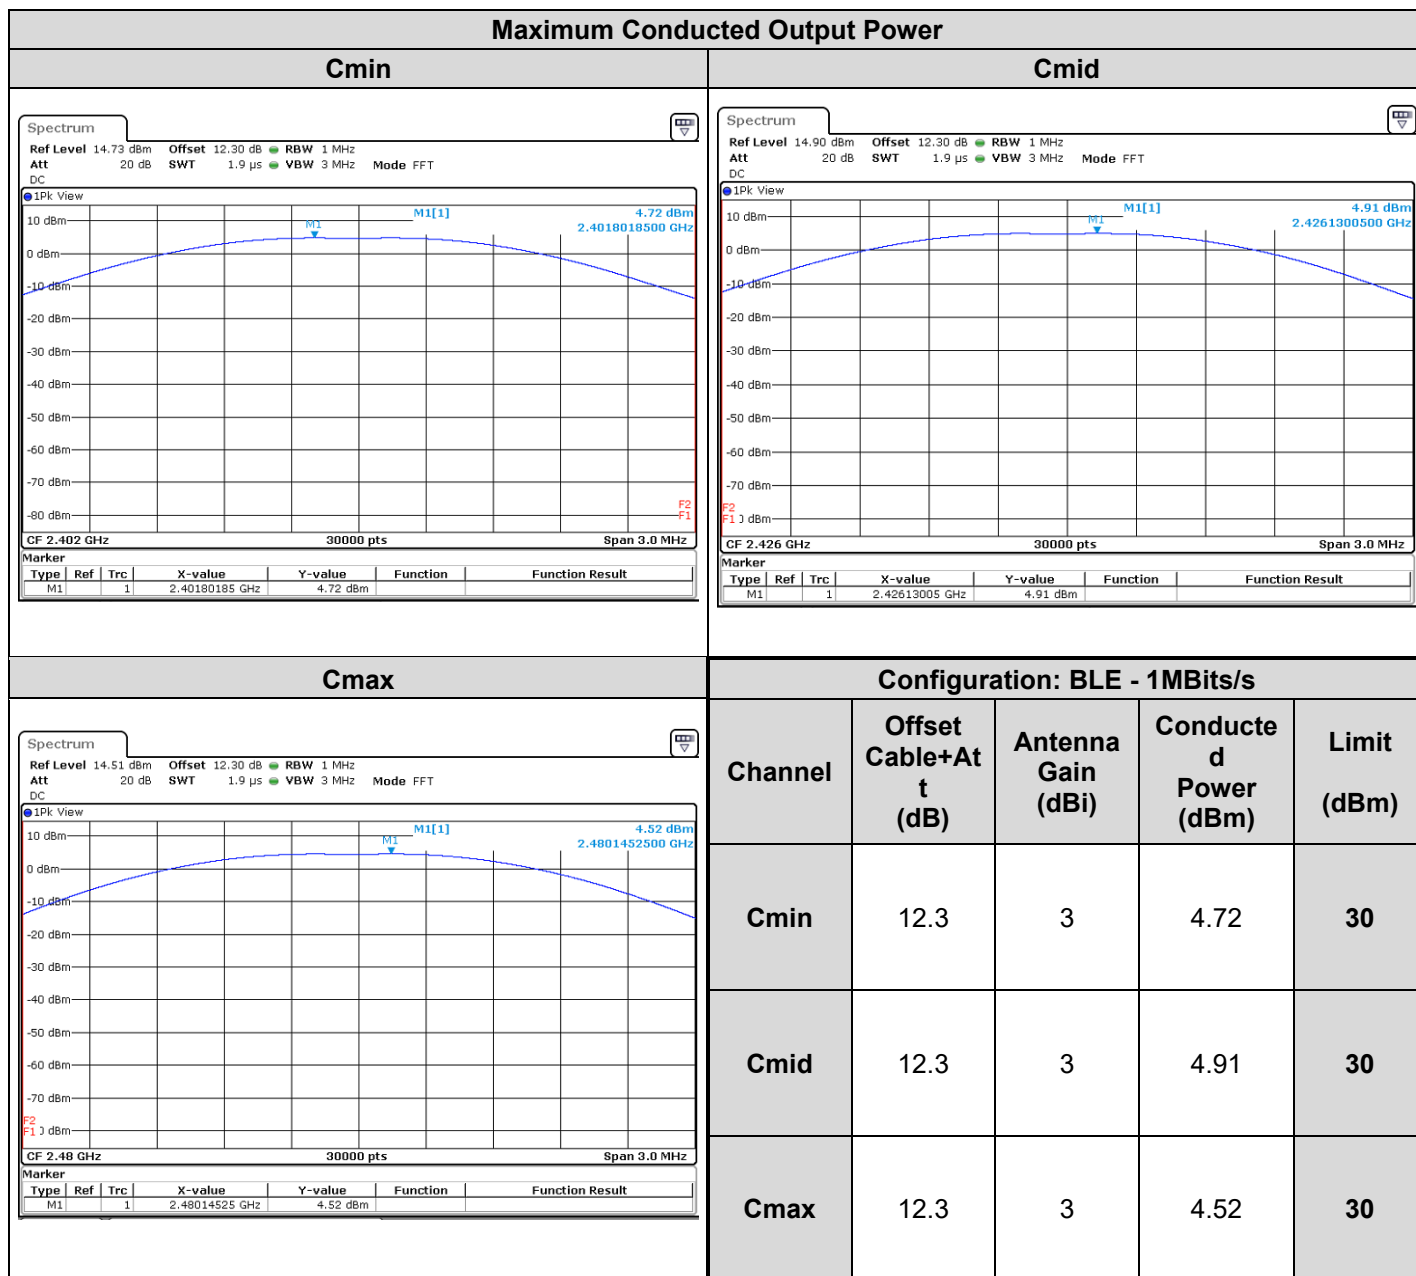

5.7. CONCLUSION

Maximum Output Conducted Power measurement performed on the sample of the product **TMS AQ-01**, Sn: 8, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.

6. POWER SPECTRAL DENSITY

6.1. TEST CONDITIONS

Date of test : October 29, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 37
Ambient temperature (°C) : 22

6.2. TEST SETUP

The Equipment Under Test is installed in a climatic chamber.
Measurement is performed with a spectrum analyzer in conducted method.


The EUT is turned ON, the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure used: KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method PKPSD)

KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method PKPSD)

Subclause 11.10 of ANSI C63.10 is applicable

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: 3 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

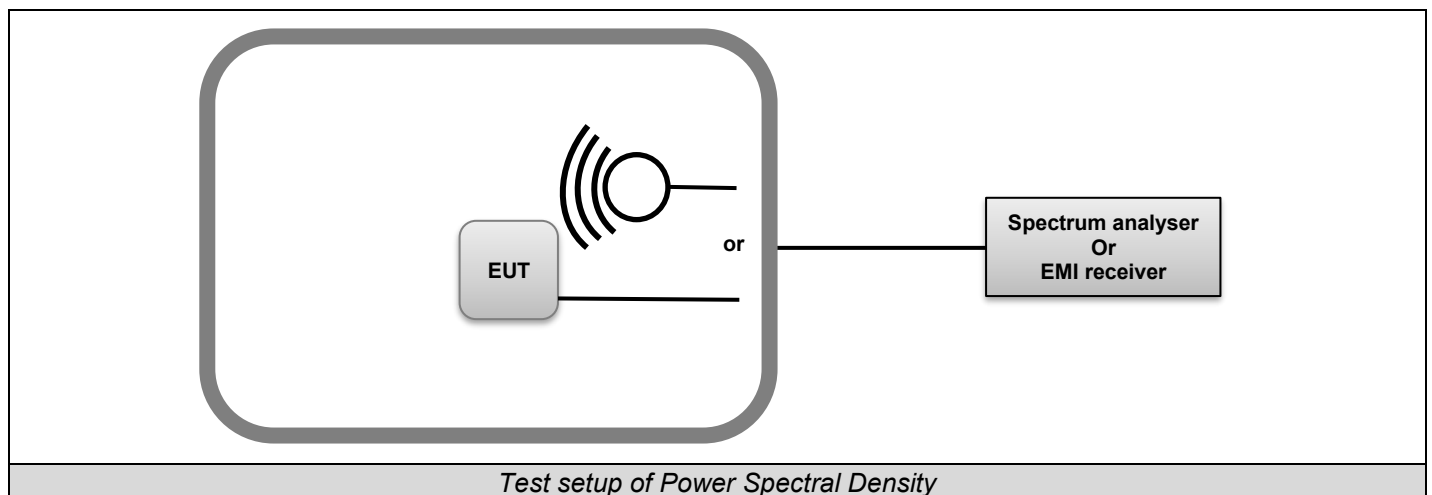

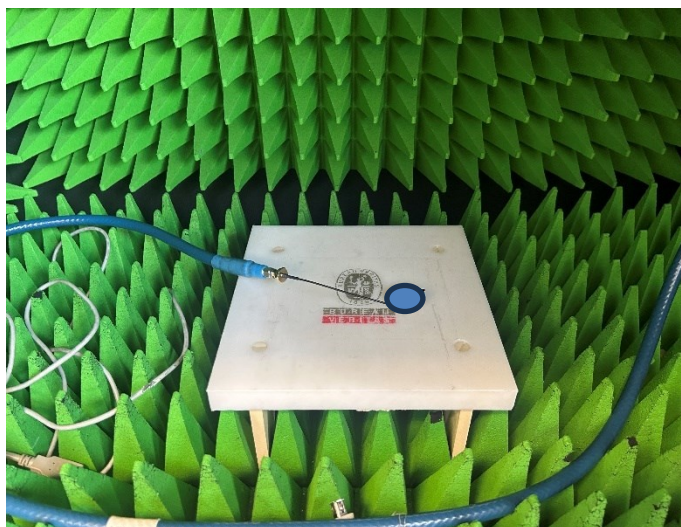


Photo of Power Spectral Density



6.3. LIMIT

Frequency range	Power Spectral Density
902-928MHz 2400MHz to 2483.5MHz 5725-5850 MHz	≤8dBm / 3kHz *

*Remark: Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi


6.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Full Anechoic Room	SIEPEL	—	D3044024	-/-	-/-
SMA 1.5m	SUCOFLEX	18GHz	A5329863	08/24	08/25
SMA 1.5m	SUCOFLEX	18GHz	A5329864	10/23	10/24
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25

6.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

6.6. RESULTS

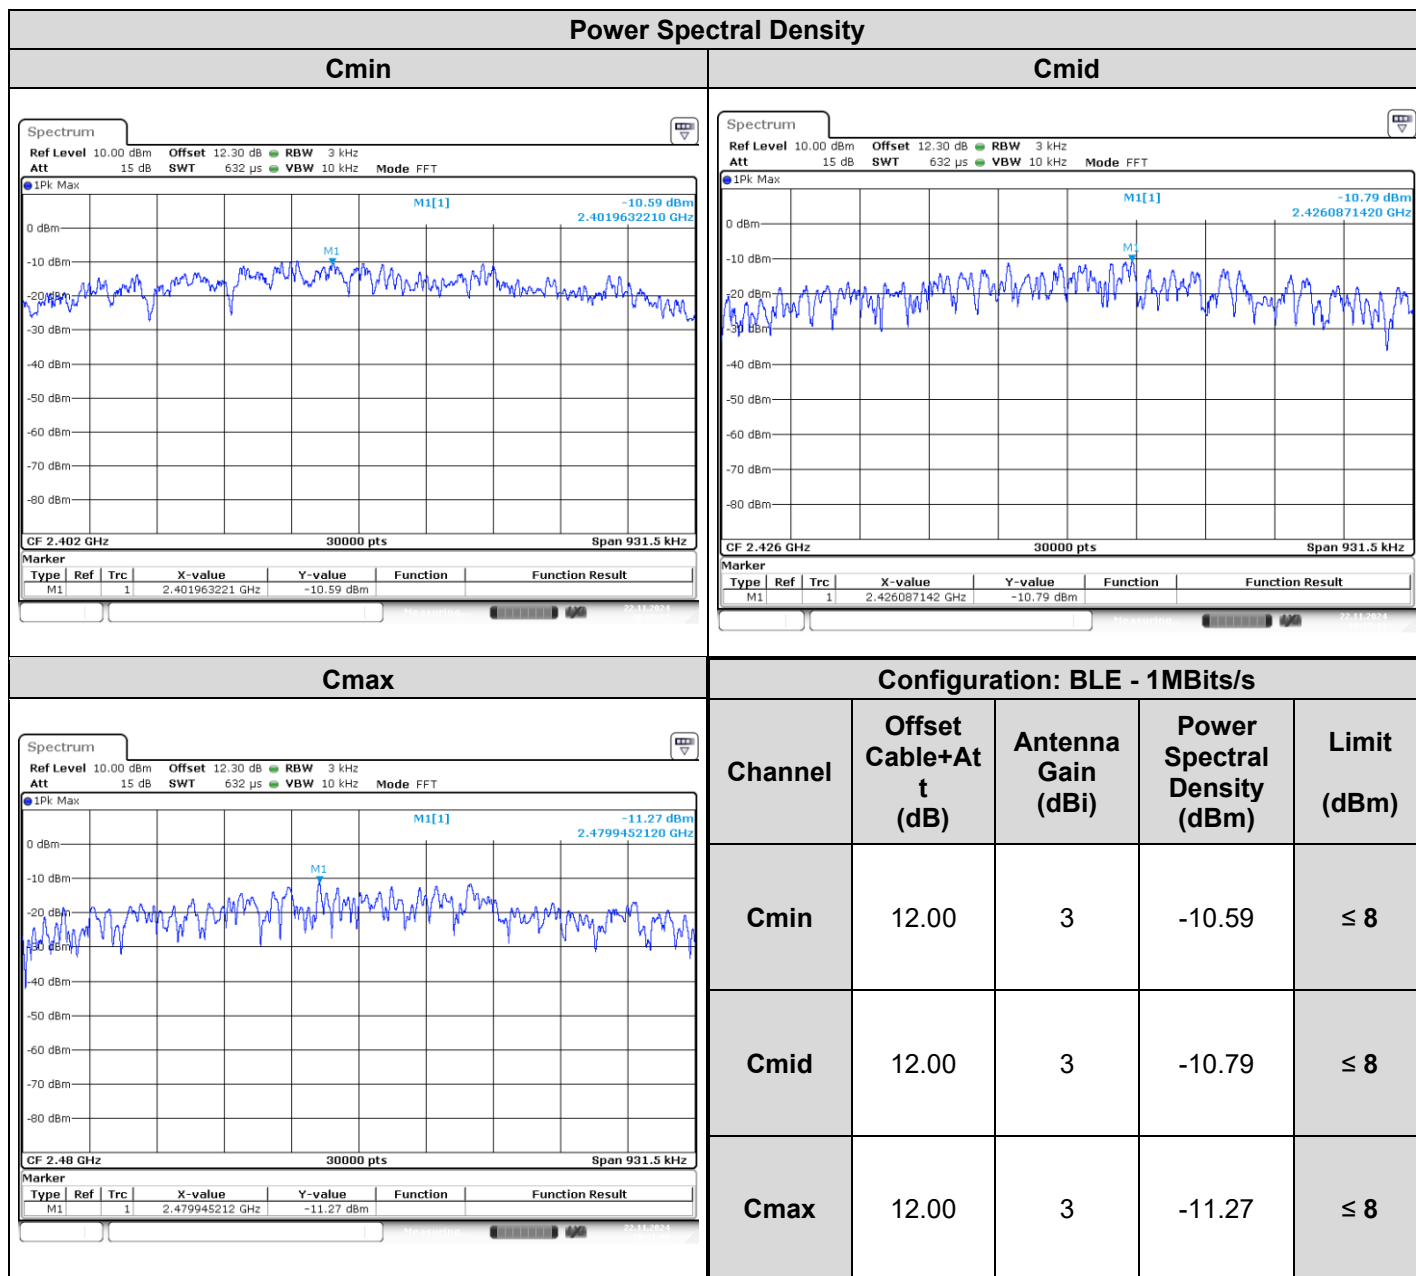

6.7. CONCLUSION

Power Spectral Density measurement performed on the sample of the product **TMS AQ-01**, Sn: 8 in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.

7. UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

7.1. TEST CONDITIONS


Date of test : October 28, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 38
Ambient temperature (°C) : 23

7.2. TEST SETUP

The Equipment Under Test is installed on a table.
Measurement is performed with a spectrum analyzer in conducted method.

The EUT is turned ON, the captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Test Procedure:
KDB 558074 D01 DTS Meas Guidance v05r02 § 8.5

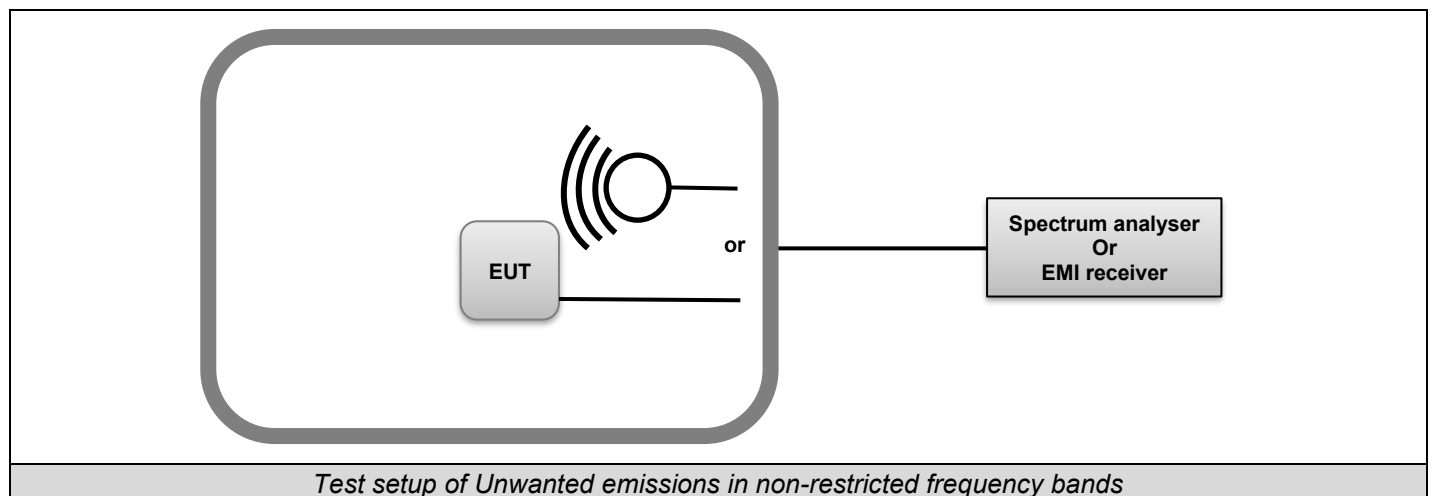

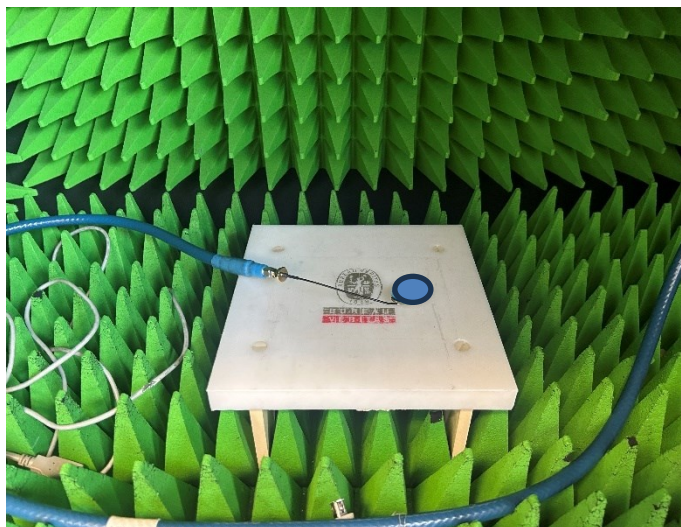


Photo of Unwanted emissions in non-restricted frequency bands



7.3. LIMIT

All Spurious Emissions must be at least 20dB below the Fundamental Radiator Level at the Band Edge of operating frequency band and in non-restricted bands.

7.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122268	07/23	07/25
Full Anechoic Room	SIEPEL	—	D3044024	-/-	-/-
SMA 1.5m	SUCOFLEX	18GHz	A5329863	08/24	08/25
SMA 1.5m	SUCOFLEX	18GHz	A5329864	10/23	10/24
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	04/24	04/26
Thermo-hygrometer	TESTO	608-H1	B4204120	03/23	03/25


7.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None


7.6. RESULTS

7.6.1. At the band edge

7.6.2. At the band edge

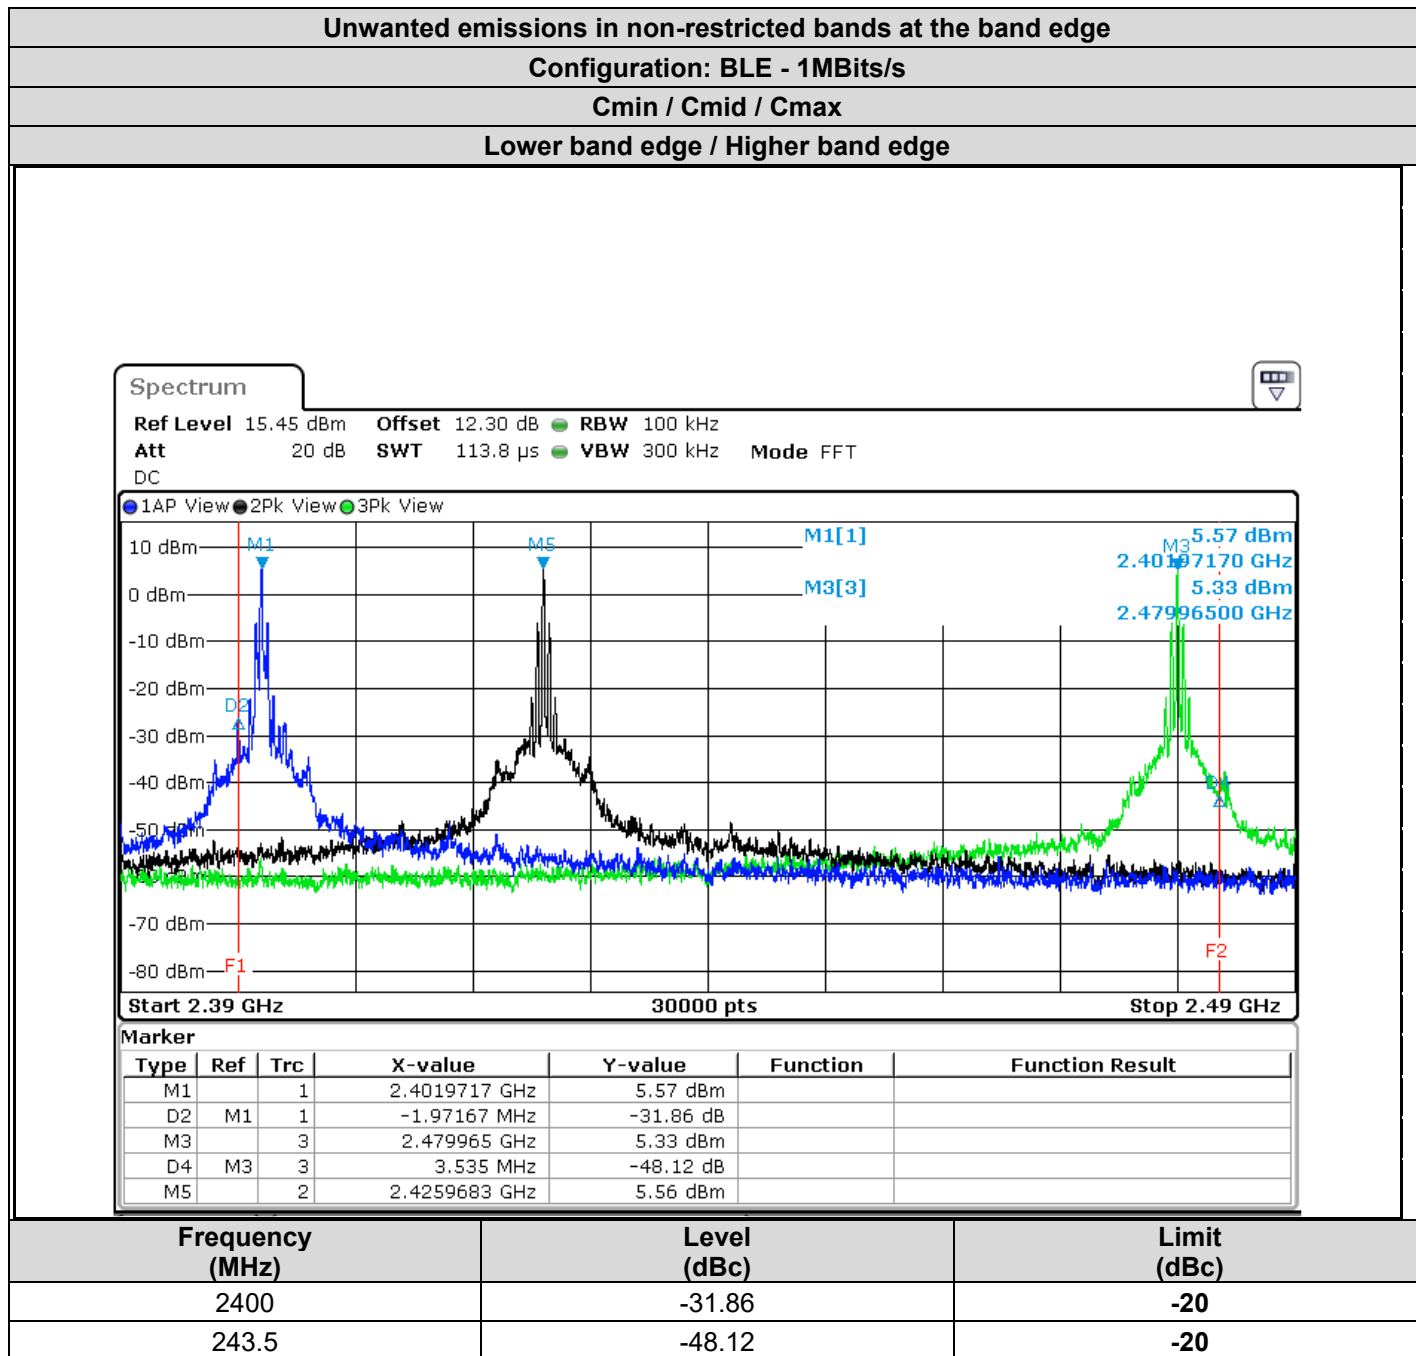

7.6.3. Non restricted frequency bands

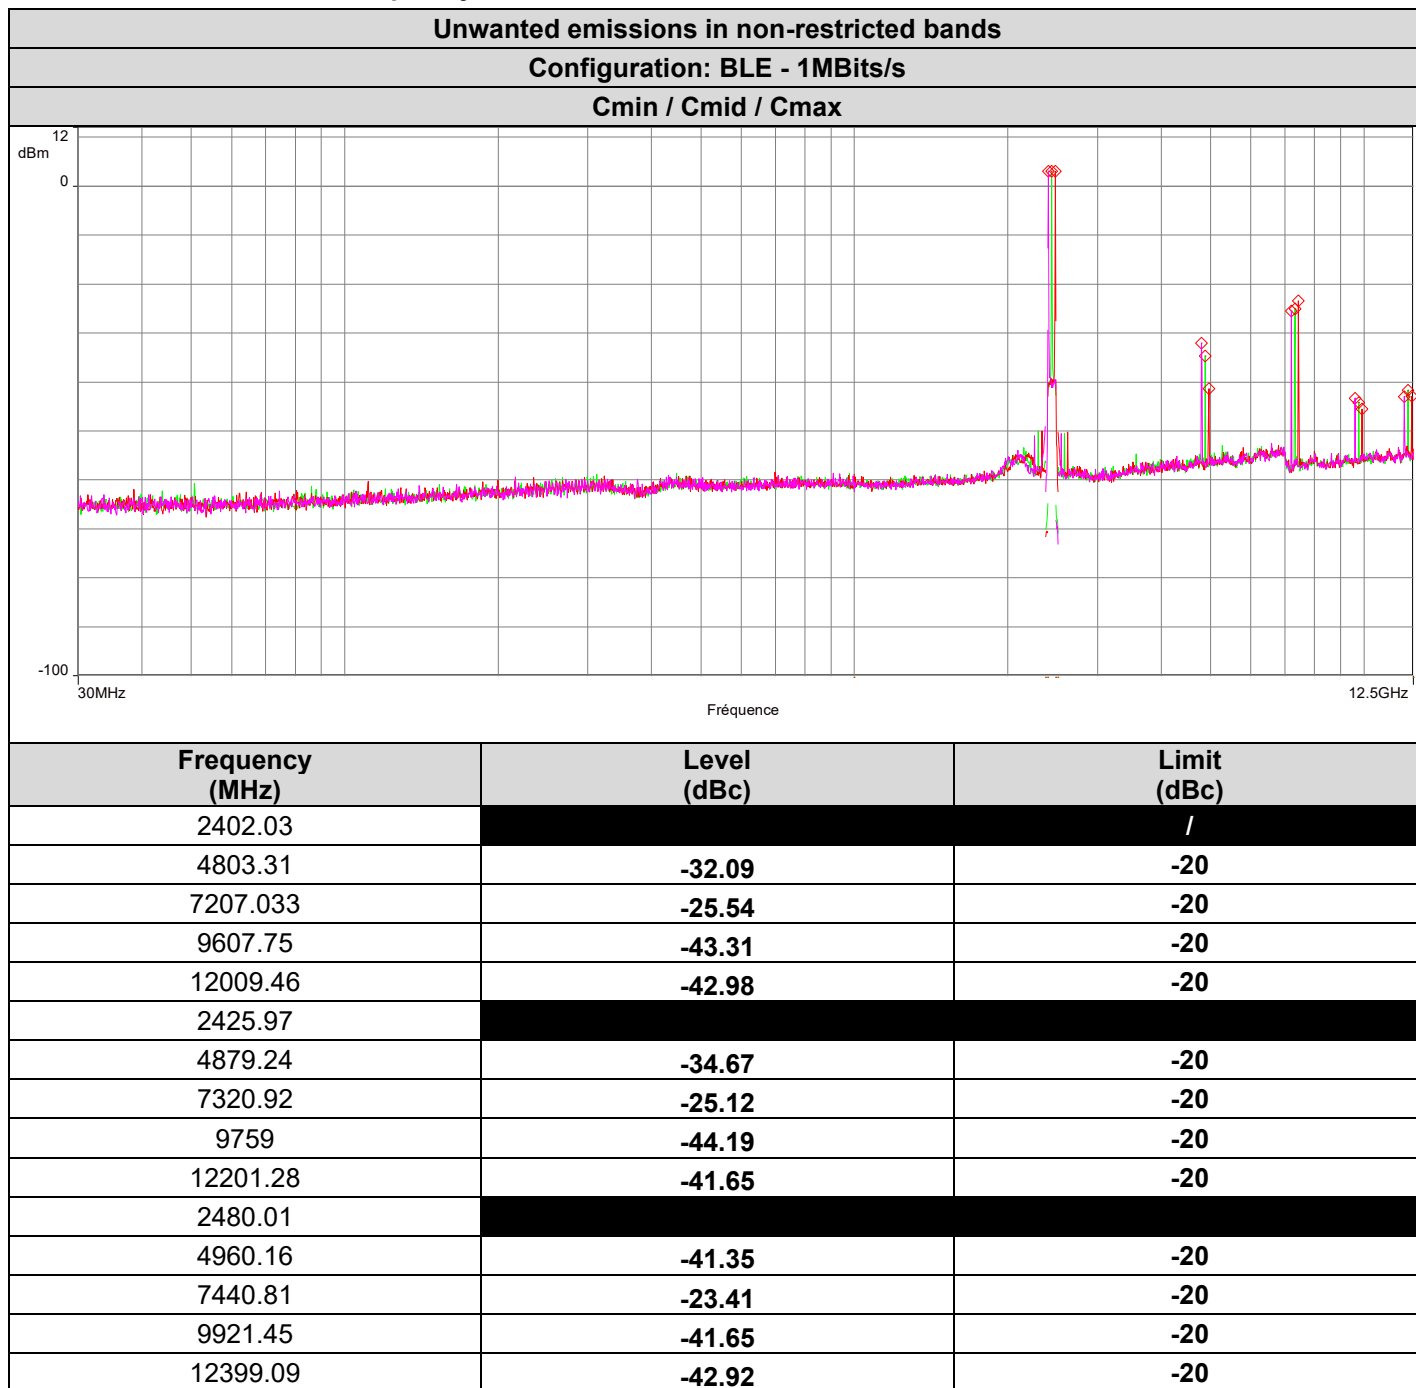

7.7. CONCLUSION

Unwanted emissions in non-restricted bands and at the band edge measurement performed on the sample of the product **TMS AQ-01**, Sn TMS AQ-01-xx, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.



8. UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS

8.1. TEST CONDITIONS

Date of test : October 25, 2024
Test performed by : Akram HAKKARI
Relative humidity (%) : 36
Ambient temperature (°C) : 23

8.2. TEST SETUP

Test procedure:
ANSI C63.10 & FCC Part 15 subpart C

Following frequency ranges, test setup parameters are different and specified in this table:


Frequency range:	9kHz to 30MHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Parallel, Perpendicular and Ground parallel	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Varied from 1m to 4m
Antenna Type:	Loop	
RBW Filter:	200Hz below 150kHz / 9kHz above 150kHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	1.5m
Test site:	Full Anechoic Chamber	Open Aera Test Site
Distance EUT - Antenna:	3m	3m
Detector:	Peak	QPeak

Frequency range:	30MHz to 1GHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Horizontal and Vertical	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Varied from 1m to 4m
Antenna Type:	Biconical & Bi-Log	
RBW Filter:	120kHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	0.8m
Test site:	Full Anechoic Chamber	Open Aera Test Site
Distance EUT - Antenna:	3m	10m
Detector:	Peak	QPeak



Frequency range:	1GHz to 14GHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Horizontal and Vertical	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Centered on EUT (§6.6.5 ANSI C63-10)
Antenna Type:	Horn	
RBW Filter:	1MHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	1.5m
Test site:	Full Anechoic Chamber	Full Anechoic Chamber
Distance EUT - Antenna:	3m	3m
Detector:	Peak & Average	Peak & Average

Frequency range:	14GHz to 25GHz	
Test:	Pre-Characterization	Qualification
Antenna Polarization:	Horizontal and Vertical	
Antenna Height:	Centered on EUT (§6.6.5 ANSI C63-10)	Centered on EUT (§6.6.5 ANSI C63-10)
Antenna Type:	Horn	
RBW Filter:	1MHz	
Maximization:	Turntable rotation of 360 degrees range and all axis of EUT used in normal configuration	
EUT height:	1.5m	1.5m
Test site:	Full Anechoic Chamber	Full Anechoic Chamber
Distance EUT - Antenna:	1m	1m
Detector:	Peak & Average	Peak & Average

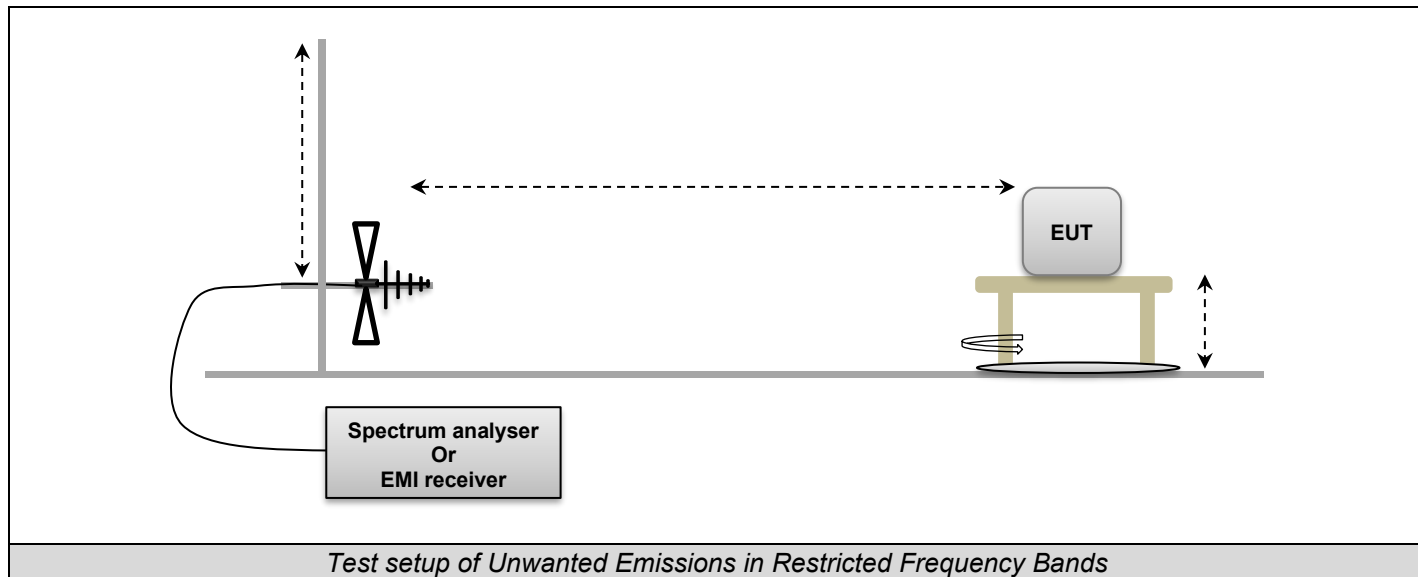




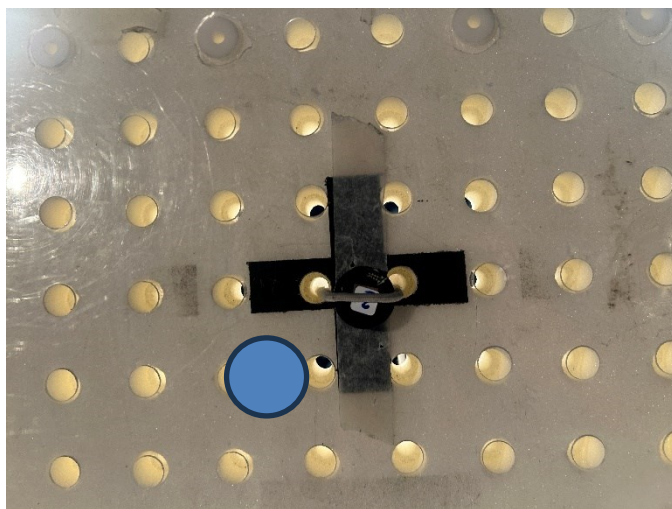


Photo of Unwanted Emissions in Restricted Frequency Bands

8.3. LIMIT

Measure at 300m		
Frequency range	Level	Detector
9kHz-490kHz	67.6dB μ V/m /F(kHz)	QPeak
Measure at 30m		
Frequency range	Level	Detector
490kHz-1.705MHz	87.6dB μ V/m /F(kHz)	QPeak
1.705MHz-30MHz	29.5dB μ V/m	QPeak
Measure at 10m		
Frequency range	Level	Detector
30MHz to 88MHz	29.5dB μ V/m	QPeak
88MHz to 216MHz	33dB μ V/m	QPeak
216MHz to 960MHz	35.5B μ V/m	QPeak
960MHz to 1000MHz	43.5dB μ V/m	QPeak
Above 1000MHz	63.5dB μ V/m	Peak
	43.5dB μ V/m	Average
Measure at 3m		
Frequency range	Level	Detector
30MHz to 88MHz	40dB μ V/m	QPeak
88MHz to 216MHz	43.5dB μ V/m	QPeak
216MHz to 960MHz	46B μ V/m	QPeak
960MHz to 1000MHz	54dB μ V/m	QPeak
Above 1000MHz	74dB μ V/m	Peak
	54dB μ V/m	Average

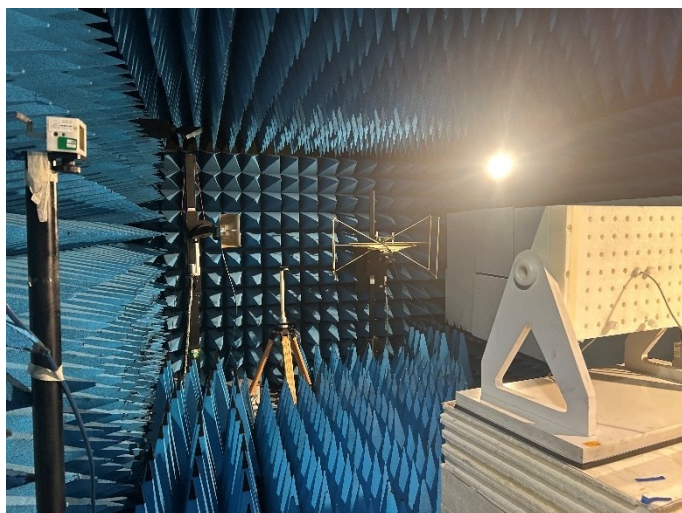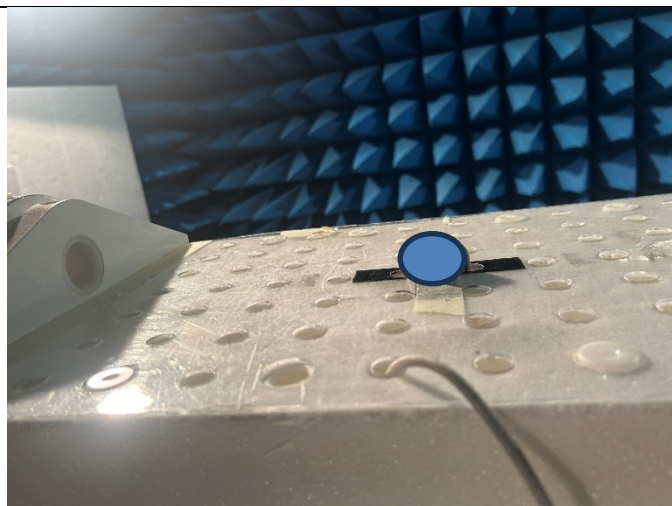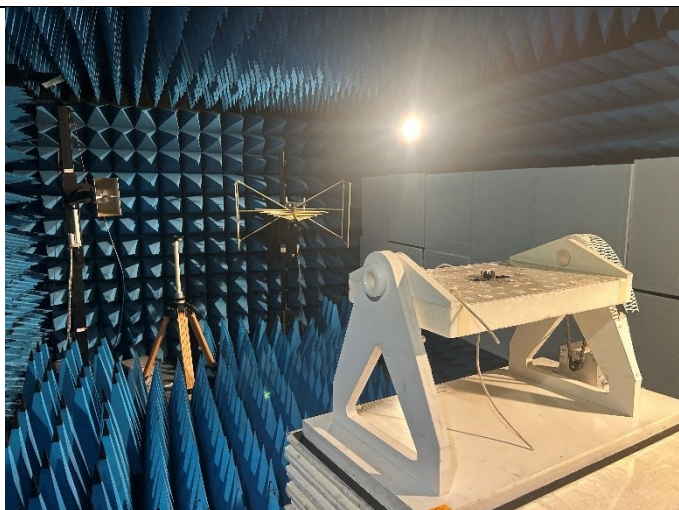

8.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Amplifier 10MHz - 18GHz	LCIE SUD EST	—	A7102082	05/22	05/24
Antenna Bi-log	AH System	SAS-521-7	C2040180	05/23	05/25
Antenna horn 18GHz	EMCO	3115	C2042029	03/22	03/25
BAT EMC	NEXIO	v3.21.0.32	L1000115		
CABLE	TELEDYNE	R82-0404-0.5M	A5330010	03/22	03/25
Cable 0.75m	-	18GHz	A5329900	08/22	08/24
Cable SMA 40cm	WITHWAVE	W101-SM1-0.4M	A5329979	10/23	10/26
Comb EMR HF	YORK	CGE01	A3169114		
CONTROLLER	INNCO	CO3000	D3044034		
Emission Cable (SMA 1m)	TELEDYNE	26GHz	A5329874	08/22	08/25
Emission Cable (SMA 3.3m)	TELEDYNE	26GHz	A5329875	08/22	08/25
Filter Matrice	LCIE SUD EST	Combined filters	A7484078	03/23	03/25
Rehausse Table C3	LCIE	—	F2000507		
Rehausse Table C3	LCIE	—	F2000511		
Semi-Anechoic chamber #3 (BF)	SIEPEL	—	D3044017_BF	04/22	04/25
Semi-Anechoic chamber #3 (VSWR)	SIEPEL	—	D3044017_VSWR	04/22	04/25
Spectrum analyzer	ROHDE & SCHWARZ	FSU 26	A4060058	09/23	09/25
Table C3	LCIE	—	F2000461		
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25
TILT	INNCO	TILT	D3044033		
Turntable chamber (Cage#3)	ETS Lingren	Model 2165	F2000371		
Turntable controller (Cage#3)	ETS Lingren	Model 2090	F2000444		
Antenna Mat (OATS)	ETS Lingren	2071-2	F2000392		
Cable (OATS)	—	1GHz	A5329623	09/23	09/24
Emission Cable	RADIALEX		A5329061	07/23	07/24
OATS	—	—	F2000409	08/23	08/24
Table C1/OATS	LCIE	—	F2000445		
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	05/23	05/25
Antenna Bi-log	CHASE	CBL6111A	C2040172	04/22	04/24
Antenna horn 40GHz	SCHWARZBECK	BBHA 9170	C2042028	06/22	06/25
Cable 1m 40GHz	INTELLICONNECT	C-KPKP-1503-1M	A5329987	04/21	04/24
Emission Cable 0.5m (Ampl <-> receptor)	INTELLICONNECT	C-KPKP-1503-500MM	A5329988	04/23	04/26
PRE-AMPLIFIER	LCIE SUD EST	PRE-AMPLIFIER (40GHz)	A7080078	09/22	09/24
SMA 1.5m	SUCOFLEX	18GHz	A5329864	10/23	10/24
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	11/21	11/23



8.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None


8.6. RESULTS

For all following measurements, worst case is presented with different configurations and modulations of EUT.

8.6.1. 9kHz to 30MHz

Graphs – Pre characterization: worst case presented

Graph identifier		Polarization	Mode	Channel	EUT position	Comments
Emr#	1	0°/90°	TX	Cmin	Axis XY/Z	See the following results
Emr#	2	180°	TX	Cmin	Axis XY/Z	See the following results

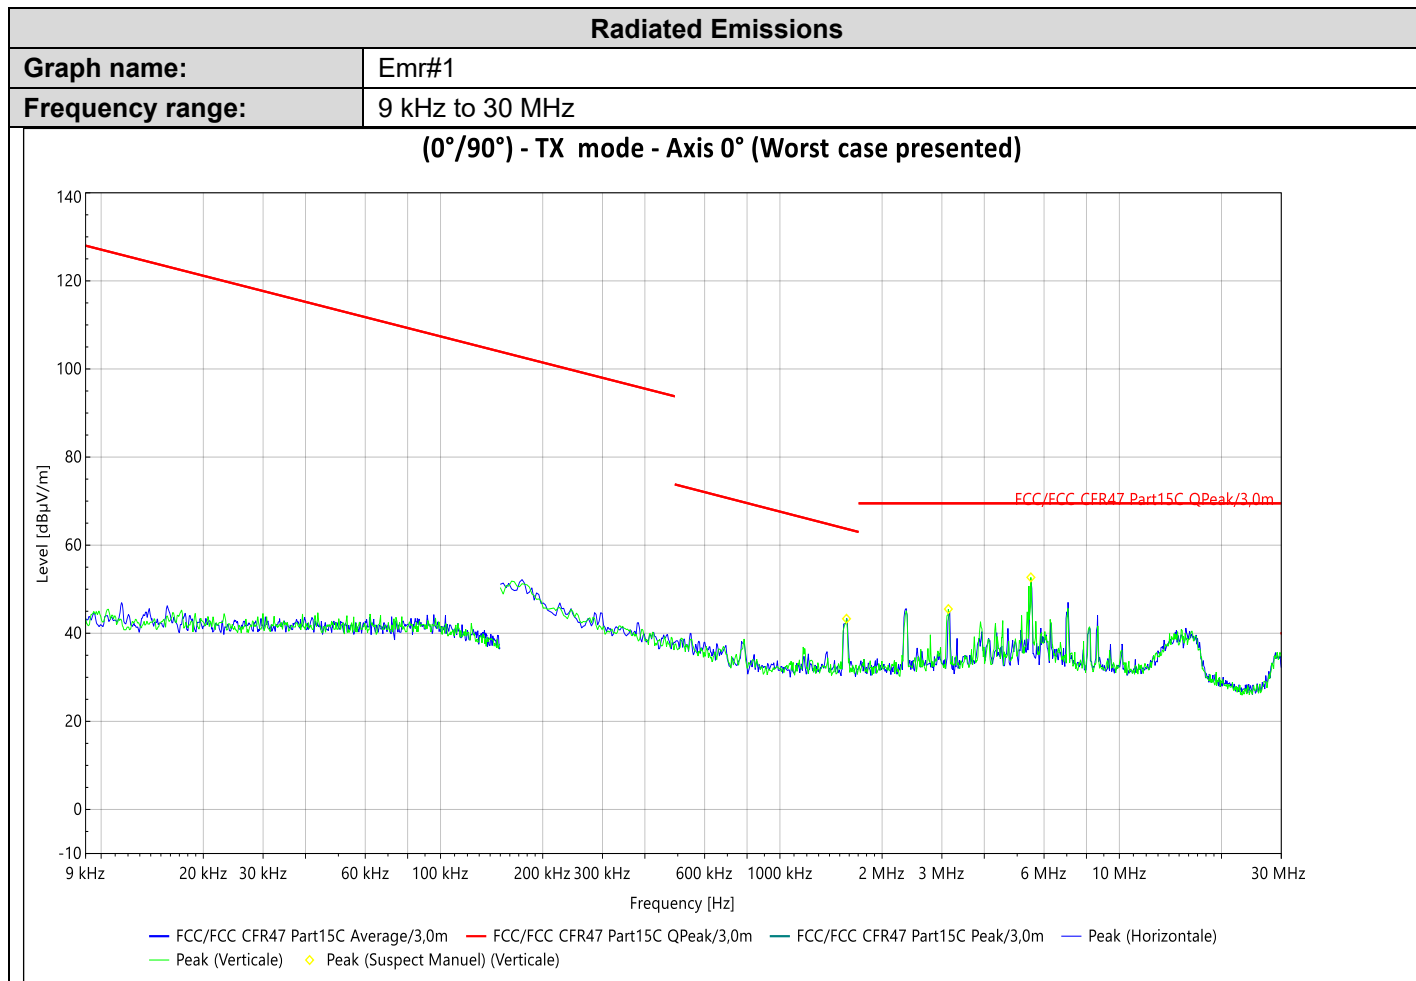

Pre-Characterization:


Frequency	PK Level (dBµV/m)	Lim.PK (dBµV/m)	Lim.Avg (dBµV/m)	Lim.QP (dBµV/m)	Angle (°)	Polar.	Correct. (dB)
1.57086 MHz	43.30	/	/	63.71	65	V	41.85
3.135 MHz	45.50	/	/	69.50	6	V	40.35
5.48718 MHz	52.69	/	/	69.50	133	V	40.09

No significant frequency observed

Radiated Emissions

Graph name: Emr#2
Frequency range: 9 kHz to 30 MHz

(180°) - TX mode - Axis 0° (Worst case presented)

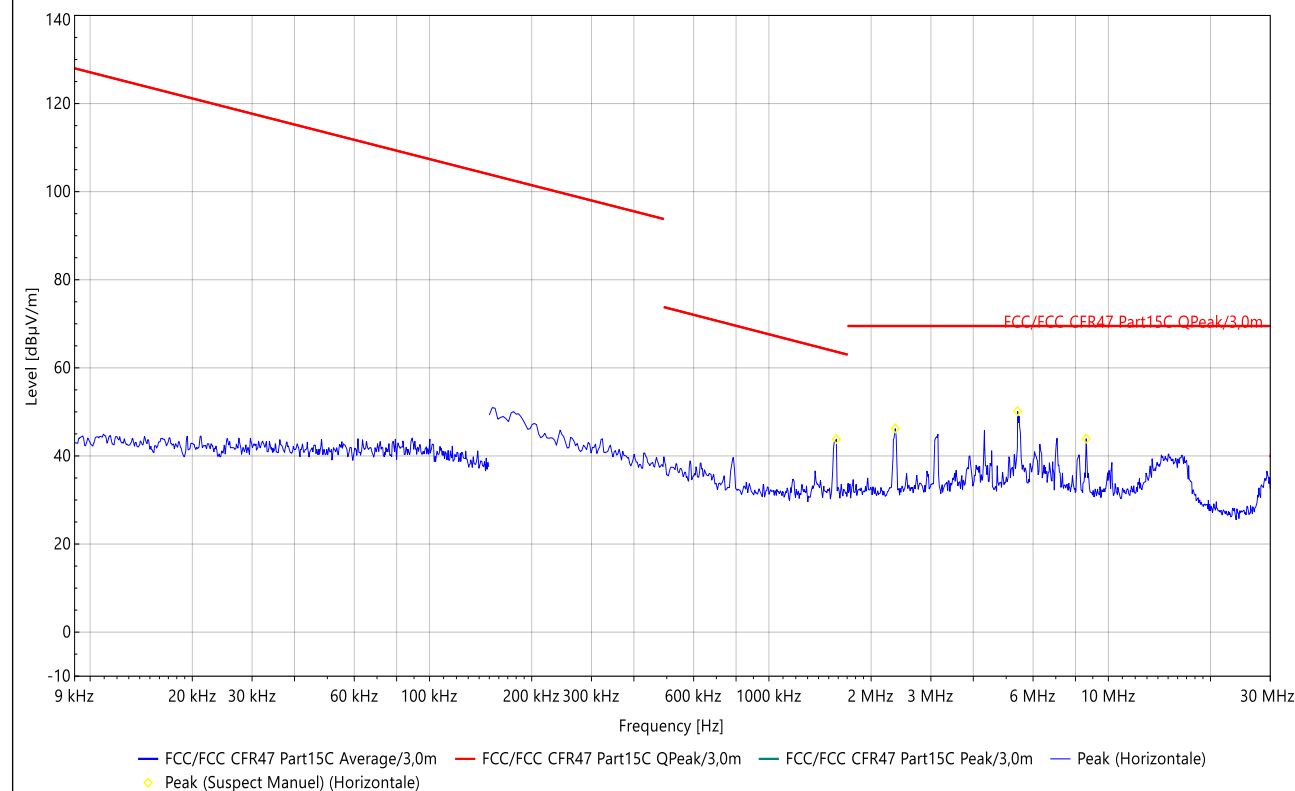

Pre-Characterization:


Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Lim.Avg (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
1.579815 MHz	43.85	/	/	63.66	13	H	41.83
2.355915 MHz	46.23	/	/	69.50	42	H	40.69
5.4036 MHz	50.16	/	/	69.50	151	H	40.09
8.606505 MHz	43.93	/	/	69.50	163	H	39.87

No significant frequency observed

8.6.2. 30MHz to 14GHz

Graphs – Pre characterization:

Graph identifier	Polarization	Mode	Channel	EUT position	Comments
Emr# 3	H/V	TX	Cmin	0-150°/ Step 30°	See the following results
Emr# 4	H/V	TX	Cmin	0-150°/ Step 30°	See the following results
Emr# 5	H/V	TX	Cmin	0-150°/ Step 30°	See the following results

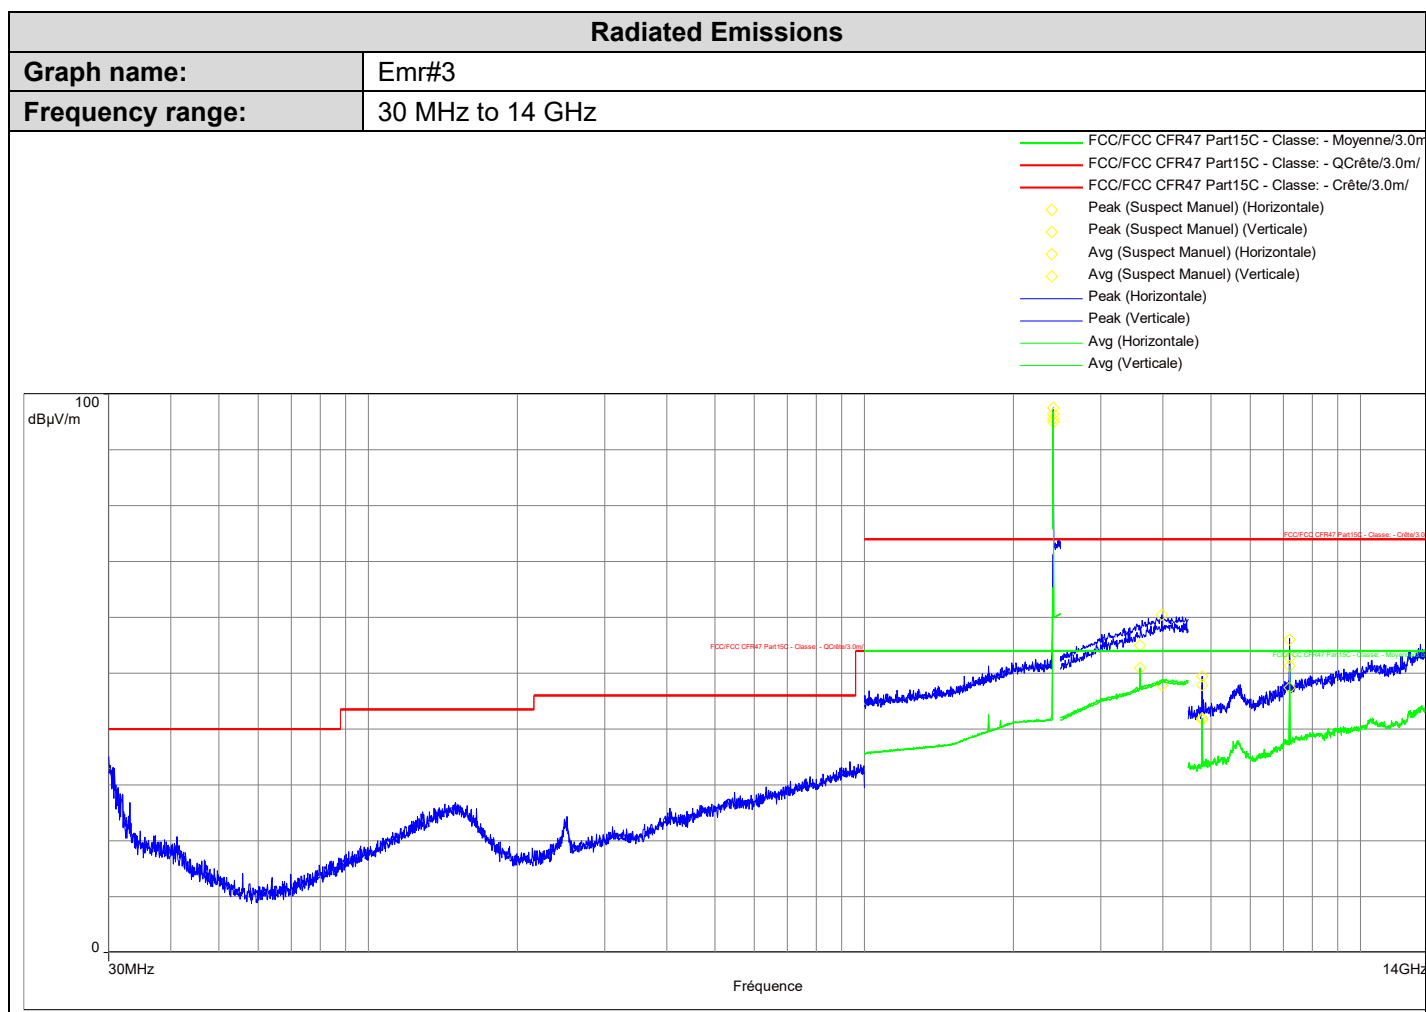


Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Lim.QP (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
2.4020875 GHz*	97.51	74.00	96.44	54.00	/	189	H	35.71
4.804 GHz	49.50	74.00	41.68	54.00	/	0	H	-18.50
7.2056 GHz	56.01	74.00	51.29	54.00	/	3	H	-13.15
4.80305 GHz	47.88	74.00	41.92	54.00	/	0	V	-18.50
7.2056 GHz	52.77	74.00	47.40	54.00	/	0	V	-13.15
3.599834399 GHz	55.02	74.00	50.94	54.00	/	105	V	40.39
2.4019205 GHz*	95.56	74.00	95.02	54.00	/	265	V	35.71
3.9805496 GHz	60.43	74.00	47.86	54.00	/	189	H	41.63

*Carrier frequency

No significant frequency observed

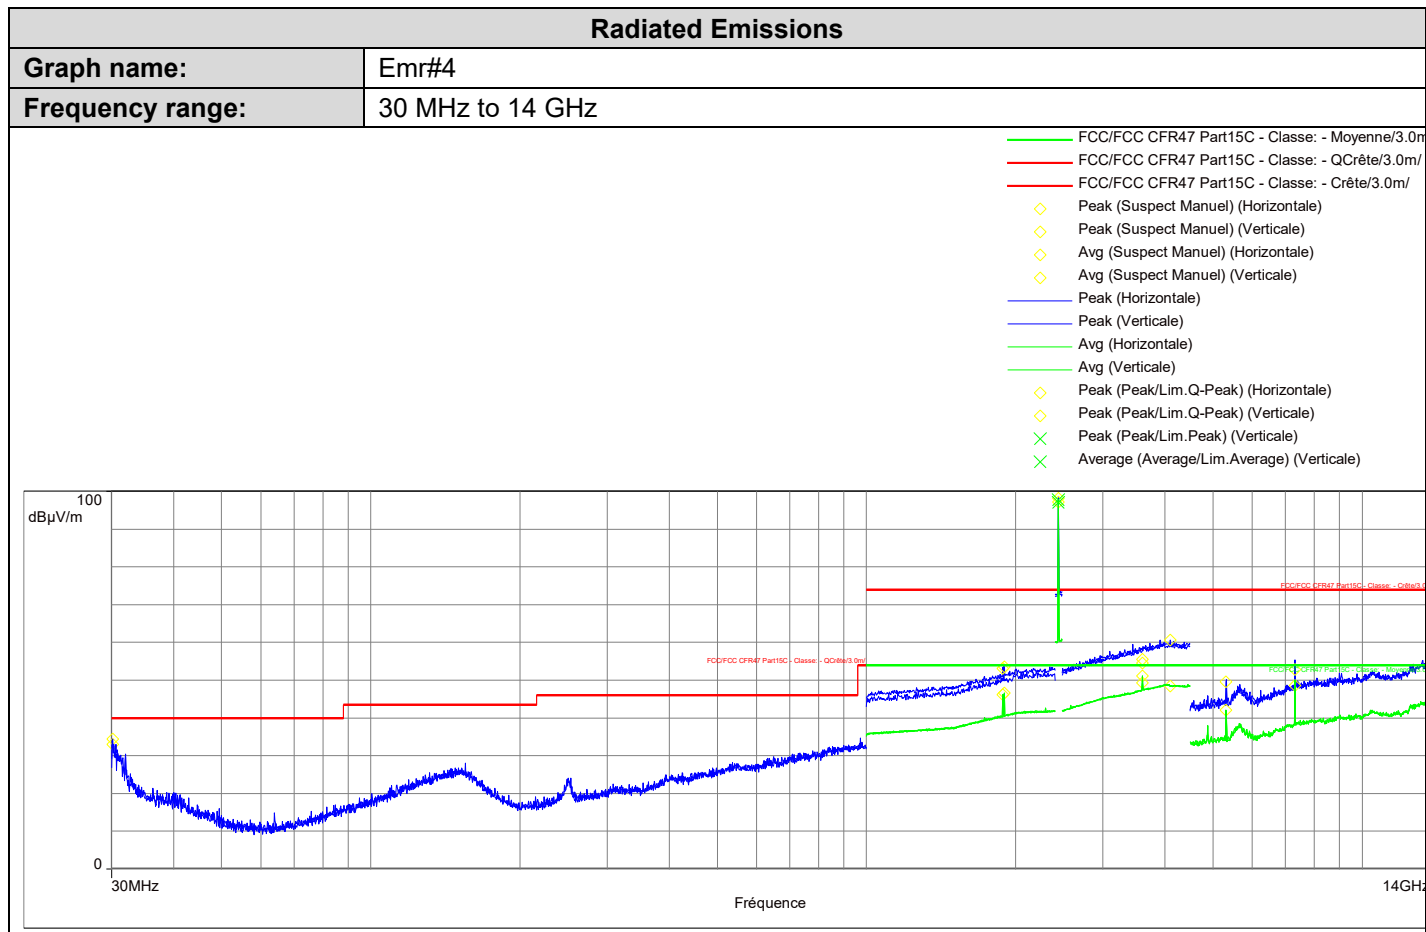


Pre-Characterization:

Frequency	PK Level (dBµV/m)	Lim.PK (dBµV/m)	Avg (dBµV/m)	Lim.Avg (dBµV/m)	Lim.QP (dBµV/m)	Angle (°)	Polar.	Correct. (dB)
30.1455 MHz	34.44	/	/	/	40.00		H	21.89
1.882 GHz	53.12	74.00	46.14	54.00	/	192	H	34.64
1.89775 GHz	53.53	74.00	46.58	54.00	/	276	H	34.75
2.44003825 GHz*	98.22	74.00	97.14	54.00	/	257	H	35.77
3.599834399 GHz	54.58	74.00	49.34	54.00	/	248	H	40.39
5.3132 GHz	49.53	74.00	42.09	54.00	/	356	H	-17.57
7.3196 GHz	52.88	74.00	48.66	54.00	/	281	V	-12.98
3.599834399 GHz	55.47	74.00	51.21	54.00	/	285	V	40.39
4.099.5231 GHz	60.68	74.00	48.41	54.00	/	141	V	41.58
30.1455 MHz	33.02	/	/	/	40.00		V	21.89

*Carrier frequency

No significant frequency observed

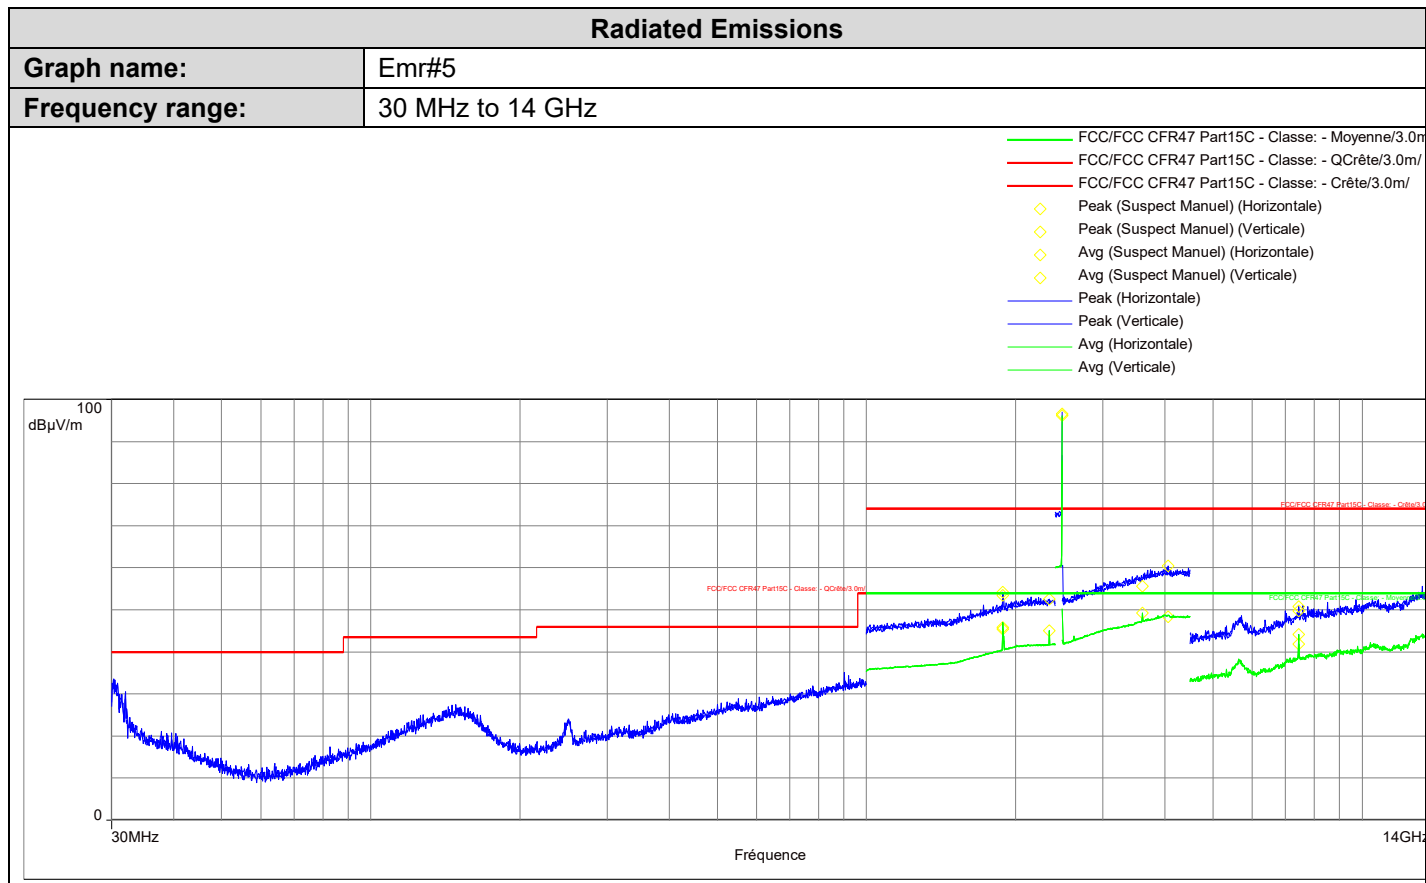

Pre-Characterization:


Frequency	PK Level (dBµV/m)	Lim.PK (dBµV/m)	Avg (dBµV/m)	Lim.Avg (dBµV/m)	Lim.QP (dBµV/m)	Angle (°)	Polar.	Correct. (dB)
2.479993 GHz*	96.60	74.00	96.17	54.00	/	272	H	35.77
1.88165 GHz	54.16	74.00	45.82	54.00	/	109	H	34.64
2.3363 GHz	52.59	74.00	45.05	54.00	/	93	H	35.67
3.599834399 GHz	55.61	74.00	49.24	54.00	/	265	H	40.39
4.0547568 GHz	60.42	74.00	48.32	54.00	/	189	H	41.69
7.439299999 GHz	50.79	74.00	44.19	54.00	/	0	H	-12.86
7.439299999 GHz	49.80	74.00	41.90	54.00	/	41	V	-12.86
1.8848 GHz	53.43	74.00	45.38	54.00	/	276	V	34.65

*Carrier frequency
No significant frequency observed

8.6.3. 1GHz to 26GHz

Graphs – Pre characterization:

Graph identifier	Polarization	Mode	Channel	EUT position	Comments
Emr# 6	H/V	TX	Cmin	Axis XY/Z	See the following results
Emr# 7	H/V	TX	Cmid	Axis XY/Z	See the following results
Emr# 8	H/V	TX	Cmax	Axis XY/Z	See the following results

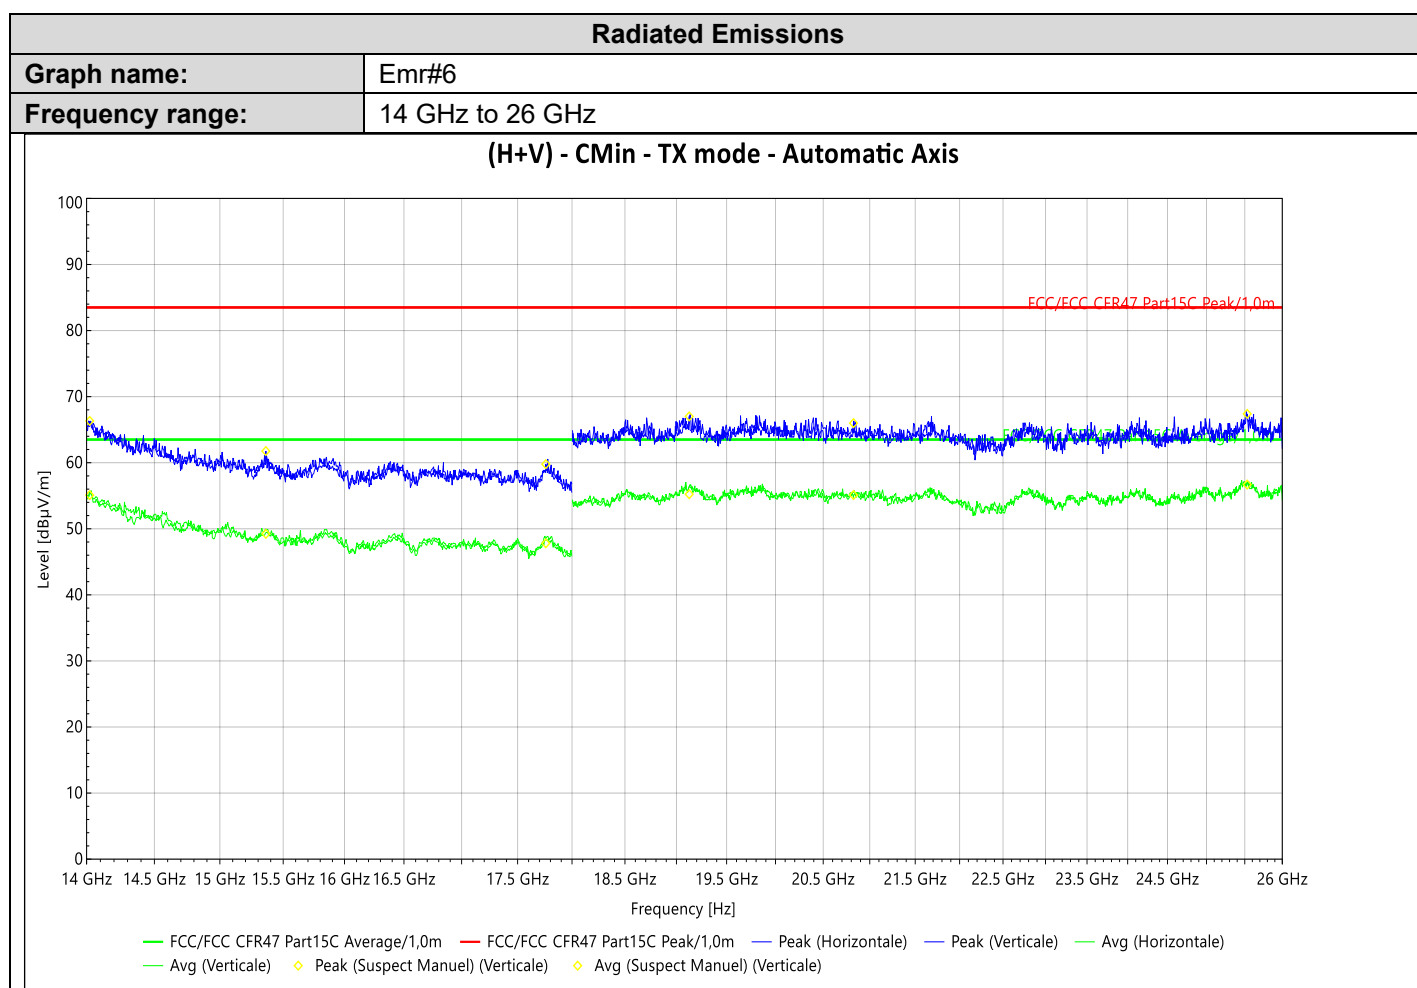


Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
14.0225 GHz	66.32	83.50	55.09	63.50	179	V	1.64
15.3615 GHz	61.76	83.50	49.22	63.50	40	V	-5.82
17.7575 GHz	59.78	83.50	47.80	63.50	245	V	-6.75
19.126 GHz	67.01	83.50	55.23	63.50	234	V	1.53
20.824 GHz	65.99	83.50	55.11	63.50	0	V	0.33
25.532 GHz	67.39	83.50	56.69	63.50	0	V	2.73

Radiated Emissions


Graph name: Emr#7
Frequency range: 14 GHz to 26 GHz

(H+V) - CMid - TX mode - Automatic Axis

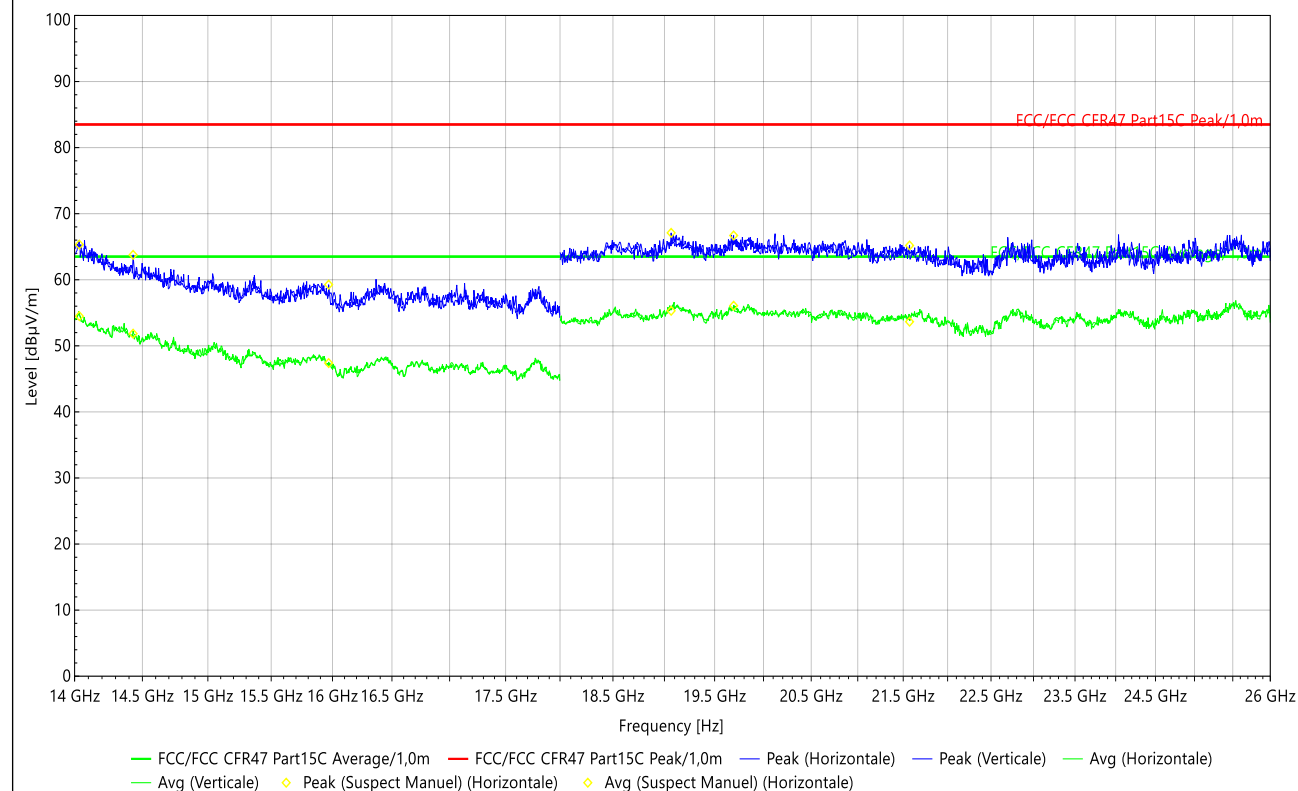

Pre-Characterization:

Frequency	PK Level (dBμV/m)	Lim.PK (dBμV/m)	Avg (dBμV/m)	Lim.Avg (dBμV/m)	Angle (°)	Polar.	Correct. (dB)
14.0345 GHz	65.32	83.50	54.49	63.50	58	H	1.56
14.4305 GHz	63.77	83.50	51.84	63.50	0	H	-2.24
15.968 GHz	59.26	83.50	47.39	63.50	334	H	-6.73
19.066 GHz	67.10	83.50	55.30	63.50	11	H	1.86
19.693 GHz	66.70	83.50	56.07	63.50	224	H	1.48
21.571 GHz	65.19	83.50	53.65	63.50	80	H	0.32

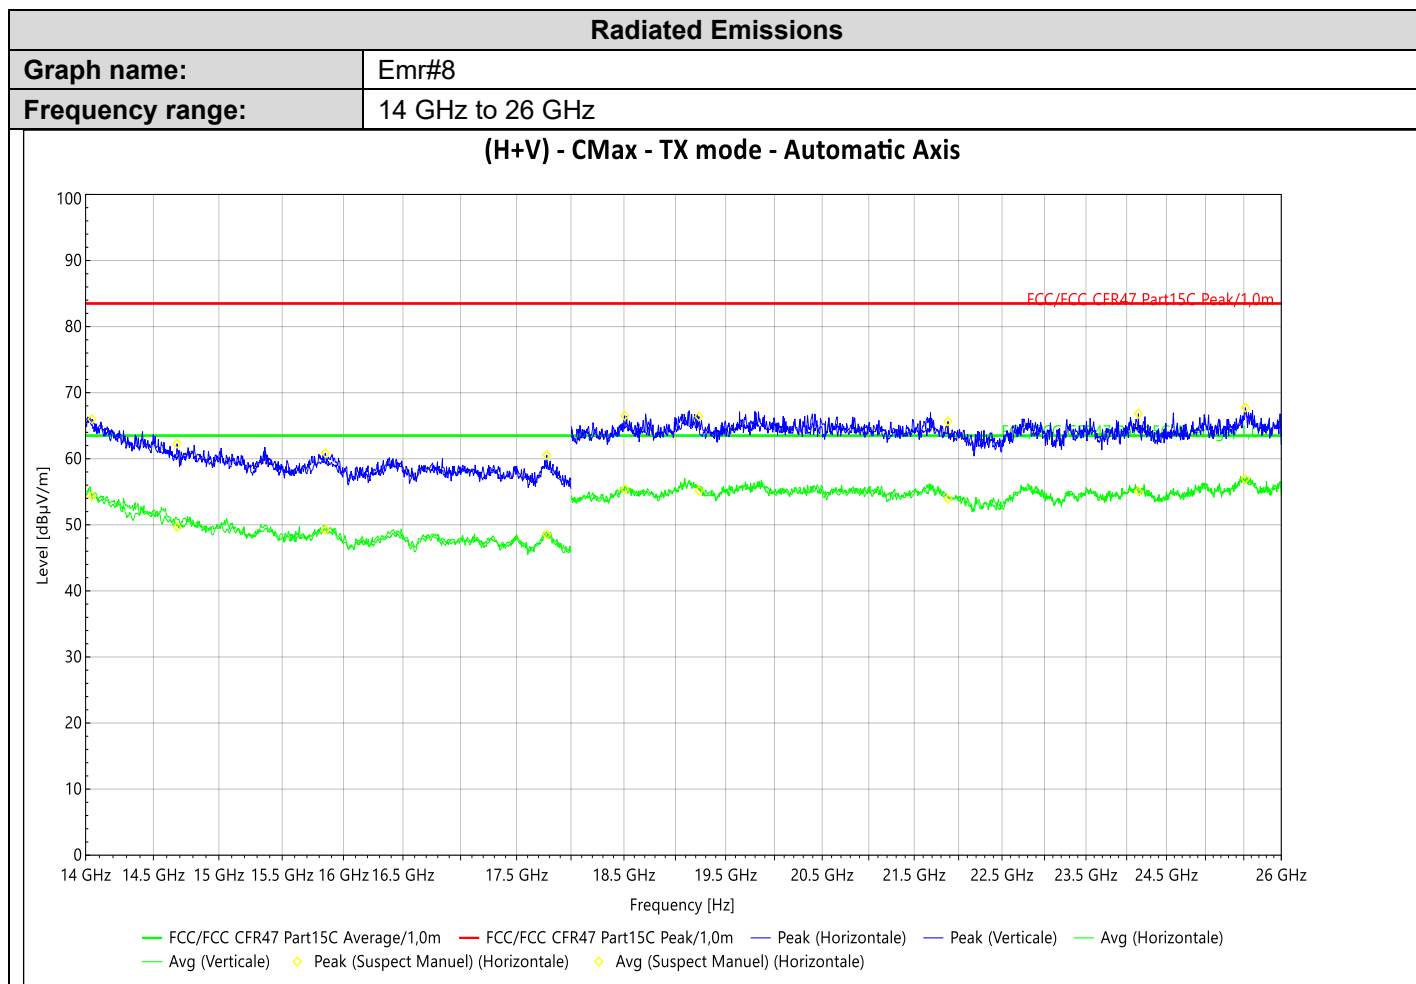

Pre-Characterization:


Frequency	PK Level (dBµV/m)	Lim.PK (dBµV/m)	Avg (dBµV/m)	Lim.Avg (dBµV/m)	Angle (°)	Polar.	Correct. (dB)
14.046 GHz	65.99	83.50	54.36	63.50	55	H	1.50
14.679 GHz	62.28	83.50	49.67	63.50	180	H	-3.50
15.851 GHz	60.86	83.50	49.24	63.50	164	H	-6.51
17.7755 GHz	60.57	83.50	48.56	63.50	338	H	-6.61
18.508 GHz	66.52	83.50	55.42	63.50	119	H	1.18
19.233 GHz	66.41	83.50	55.18	63.50	11	H	1.09
21.879 GHz	65.67	83.50	53.94	63.50	0	H	0.00
24.146 GHz	66.83	83.50	55.09	63.50	0	H	1.19
25.52 GHz	67.74	83.50	56.95	63.50	0	H	2.76


No significant frequency observed

8.6.4. Restricted Band

Graphs – Pre characterization:

Graph identifier	Polarization	Mode	Channel	EUT position	Comments
Emr# 1	H/V	TX	Cmin	Axis XY/Z	-
Emr# 2	H/V	TX	Cmid	Axis XY/Z	-
Emr# 3	H/V	TX	Cmax	Axis XY/Z	-

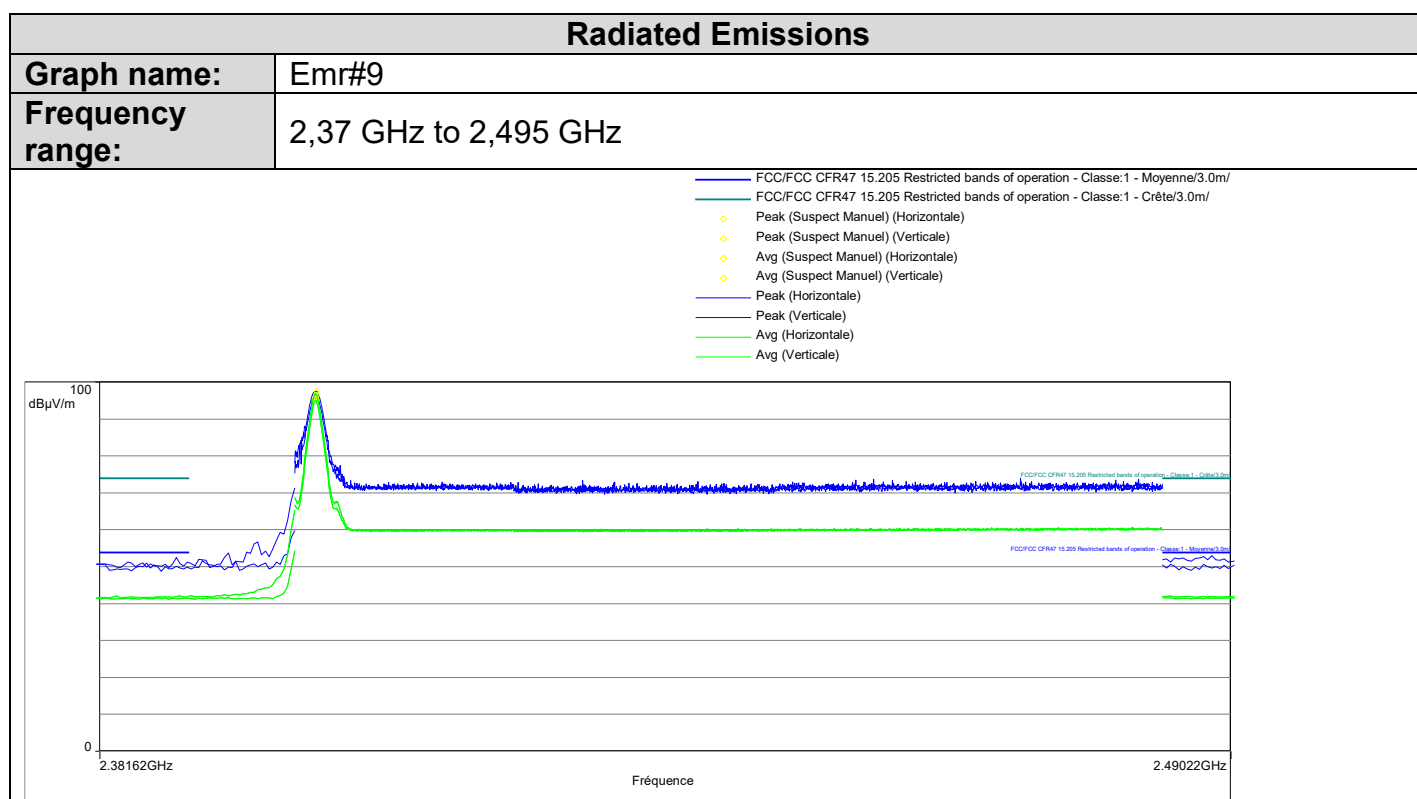

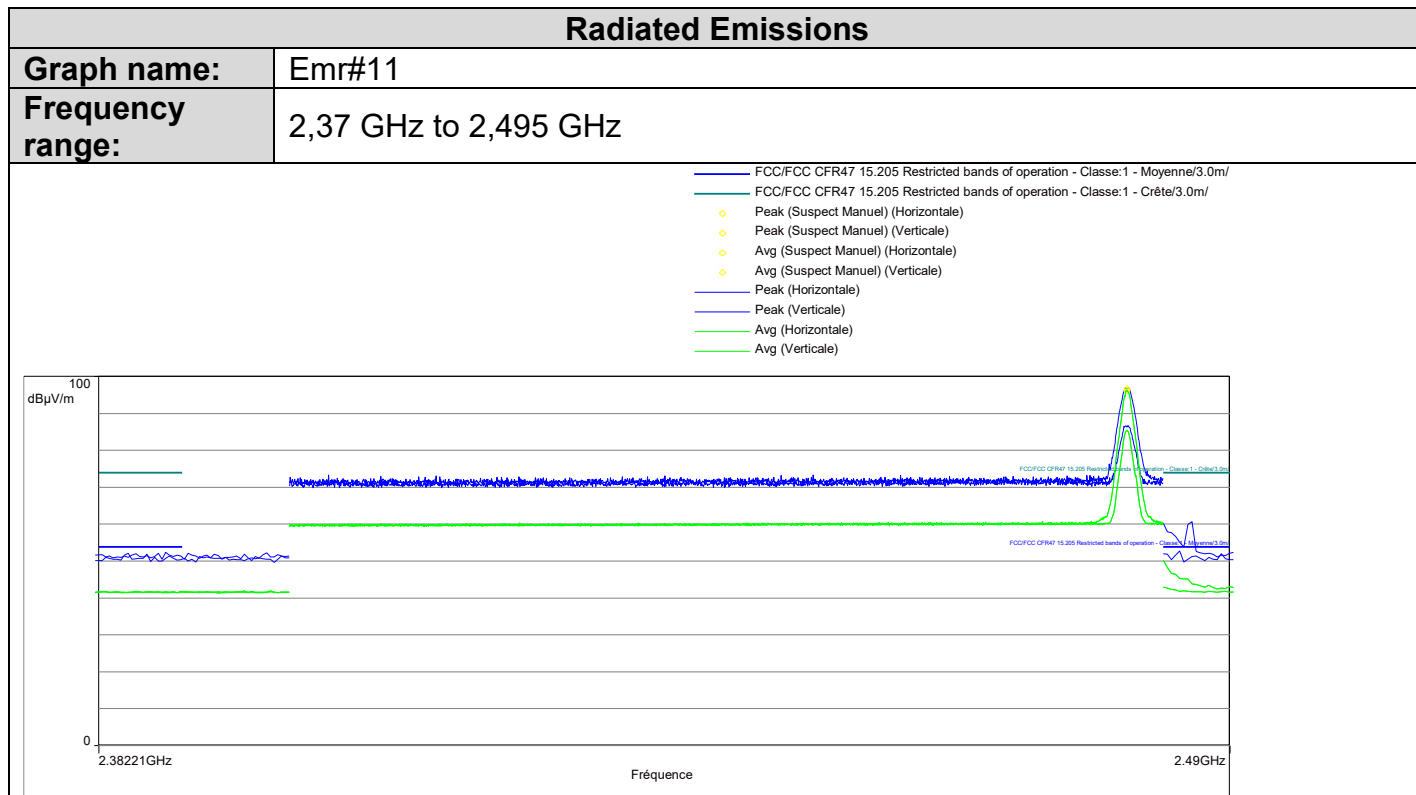

8.7. CONCLUSION

Unwanted emissions in non-restricted bands measurement performed on the sample of the product **TMS AQ-01**, Sn: 60C0BFF5CEEE, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247** limits.

9. UNCERTAINTIES CHART

<i>Kind of measurement</i>	<i>Wide uncertainty laboratory</i>
Occupied Channel Bandwidth	±2.8 %
Humidity	±3.2 %
Power Spectral Density, Conducted	±1.7 dB
Radio frequency	±0.3 ppm
RF power, conducted	±1.2 dB
RF power, radiated (Full anechoic chamber above 1GHz)	±3.7 dB
RF power, radiated (Semi anechoic chamber & open test site)	±5.6 dB
Spurious emission, conducted	±2.3 dB
Spurious emission, radiated (Full anechoic chamber above 1GHz)	±3.8 dB
Spurious emission, radiated (Semi anechoic chamber & open test site)	±5.7 dB
Temperature	±0.75 °C
Time	±2.3 %
Voltage	±1.7 %

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the standard. The conformity of the sample is directly established by the applicable limit values. This table includes all uncertainties maximum feasible for testing in the laboratory, whether or not made in this report.