

RF Mode	802.11a	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	103.5 PK			1.88 H	64	56.7	46.8
2	*6475.00	93.9 AV			1.88 H	64	47.1	46.8
3	#12950.00	60.5 PK	88.2	-27.7	2.23 H	151	38.7	21.8
4	#12950.00	46.4 AV	68.2	-21.8	2.23 H	151	24.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	107.7 PK			1.20 V	16	60.9	46.8
2	*6475.00	97.8 AV			1.20 V	16	51.0	46.8
3	#12950.00	60.9 PK	88.2	-27.3	1.99 V	172	39.1	21.8
4	#12950.00	46.8 AV	68.2	-21.4	1.99 V	172	25.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	103.6 PK			1.87 H	69	56.6	47.0
2	*6515.00	94.0 AV			1.87 H	69	47.0	47.0
3	#13030.00	60.2 PK	88.2	-28.0	2.30 H	161	38.3	21.9
4	#13030.00	46.3 AV	68.2	-21.9	2.30 H	161	24.4	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.6 PK			1.22 V	13	60.6	47.0
2	*6515.00	97.8 AV			1.22 V	13	50.8	47.0
3	#13030.00	60.7 PK	88.2	-27.5	1.99 V	172	38.8	21.9
4	#13030.00	46.6 AV	68.2	-21.6	1.99 V	172	24.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	103.7 PK			1.89 H	63	56.5	47.2
2	*6535.00	94.0 AV			1.89 H	63	46.8	47.2
3	#13070.00	60.2 PK	88.2	-28.0	2.36 H	158	38.2	22.0
4	#13070.00	46.3 AV	68.2	-21.9	2.36 H	158	24.3	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.8 PK			1.20 V	11	60.6	47.2
2	*6535.00	97.9 AV			1.20 V	11	50.7	47.2
3	#13070.00	60.8 PK	88.2	-27.4	1.99 V	180	38.8	22.0
4	#13070.00	46.7 AV	68.2	-21.5	1.99 V	180	24.7	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	103.6 PK			1.84 H	61	56.2	47.4
2	*6695.00	94.0 AV			1.84 H	61	46.6	47.4
3	13390.00	60.5 PK	74.0	-13.5	2.29 H	156	37.7	22.8
4	13390.00	46.2 AV	54.0	-7.8	2.29 H	156	23.4	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.7 PK			1.23 V	15	60.3	47.4
2	*6695.00	97.7 AV			1.23 V	15	50.3	47.4
3	13390.00	60.7 PK	74.0	-13.3	1.99 V	172	37.9	22.8
4	13390.00	46.8 AV	54.0	-7.2	1.99 V	172	24.0	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	103.5 PK			1.85 H	66	56.1	47.4
2	*6855.00	94.0 AV			1.85 H	66	46.6	47.4
3	#13710.00	60.2 PK	88.2	-28.0	2.39 H	154	36.7	23.5
4	#13710.00	46.3 AV	68.2	-21.9	2.39 H	154	22.8	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.7 PK			1.20 V	20	60.3	47.4
2	*6855.00	97.9 AV			1.20 V	20	50.5	47.4
3	#13710.00	60.9 PK	88.2	-27.3	1.94 V	177	37.4	23.5
4	#13710.00	46.8 AV	68.2	-21.4	1.94 V	177	23.3	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	103.5 PK			1.88 H	62	55.9	47.6
2	*6875.00	93.8 AV			1.88 H	62	46.2	47.6
3	#13750.00	60.1 PK	88.2	-28.1	2.28 H	153	36.5	23.6
4	#13750.00	46.2 AV	68.2	-22.0	2.28 H	153	22.6	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.7 PK			1.24 V	10	60.1	47.6
2	*6875.00	97.9 AV			1.24 V	10	50.3	47.6
3	#13750.00	60.9 PK	88.2	-27.3	1.92 V	170	37.3	23.6
4	#13750.00	46.8 AV	68.2	-21.4	1.92 V	170	23.2	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	103.8 PK			1.84 H	66	55.1	48.7
2	*6995.00	94.2 AV			1.84 H	66	45.5	48.7
3	#13990.00	60.5 PK	88.2	-27.7	2.36 H	158	36.0	24.5
4	#13990.00	46.6 AV	68.2	-21.6	2.36 H	158	22.1	24.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.8 PK			1.25 V	11	59.1	48.7
2	*6995.00	97.6 AV			1.25 V	11	48.9	48.7
3	#13990.00	60.7 PK	88.2	-27.5	1.99 V	178	36.2	24.5
4	#13990.00	46.6 AV	68.2	-21.6	1.99 V	178	22.1	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	103.8 PK			1.80 H	60	55.2	48.6
2	*7095.00	94.2 AV			1.80 H	60	45.6	48.6
3	#14190.00	60.3 PK	88.2	-27.9	2.33 H	164	35.4	24.9
4	#14190.00	46.3 AV	68.2	-21.9	2.33 H	164	21.4	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	107.5 PK			1.23 V	11	58.9	48.6
2	*7095.00	97.6 AV			1.23 V	11	49.0	48.6
3	#14190.00	60.7 PK	88.2	-27.5	1.99 V	172	35.8	24.9
4	#14190.00	46.8 AV	68.2	-21.4	1.99 V	172	21.9	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	103.1 PK			1.87 H	62	54.3	48.8
2	*7115.00	93.0 AV			1.87 H	62	44.2	48.8
3	#7125.00	79.9 PK	88.2	-8.3	1.87 H	62	63.0	16.9
4	#7125.00	53.6 AV	68.2	-14.6	1.87 H	62	36.7	16.9
5	#14230.00	60.3 PK	88.2	-27.9	2.33 H	156	35.4	24.9
6	#14230.00	46.6 AV	68.2	-21.6	2.33 H	156	21.7	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	106.0 PK			1.22 V	13	57.2	48.8
2	*7115.00	96.3 AV			1.22 V	13	47.5	48.8
3	#7125.00	85.1 PK	88.2	-3.1	1.22 V	13	68.2	16.9
4	#7125.00	56.3 AV	68.2	-11.9	1.22 V	13	39.4	16.9
5	#14230.00	60.9 PK	88.2	-27.3	1.99 V	172	36.0	24.9
6	#14230.00	46.8 AV	68.2	-21.4	1.99 V	172	21.9	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.3 PK	88.2	-24.9	1.79 H	63	49.2	14.1
2	#5925.00	48.8 AV	68.2	-19.4	1.79 H	63	34.7	14.1
3	*6115.00	107.6 PK			1.79 H	63	62.3	45.3
4	*6115.00	93.9 AV			1.79 H	63	48.6	45.3
5	12230.00	60.2 PK	74.0	-13.8	2.11 H	169	39.2	21.0
6	12230.00	46.3 AV	54.0	-7.7	2.11 H	169	25.3	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	1.06 V	16	49.8	14.1
2	#5925.00	49.3 AV	68.2	-18.9	1.06 V	16	35.2	14.1
3	*6115.00	110.5 PK			1.06 V	16	65.2	45.3
4	*6115.00	97.8 AV			1.06 V	16	52.5	45.3
5	12230.00	60.8 PK	74.0	-13.2	1.99 V	172	39.8	21.0
6	12230.00	46.9 AV	54.0	-7.1	1.99 V	172	25.9	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	107.7 PK			1.77 H	65	61.9	45.8
2	*6255.00	94.7 AV			1.77 H	65	48.9	45.8
3	12510.00	60.0 PK	74.0	-14.0	2.16 H	159	39.3	20.7
4	12510.00	45.9 AV	54.0	-8.1	2.16 H	159	25.2	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	110.9 PK			1.12 V	14	65.1	45.8
2	*6255.00	97.9 AV			1.12 V	14	52.1	45.8
3	12510.00	60.4 PK	74.0	-13.6	1.94 V	175	39.7	20.7
4	12510.00	46.5 AV	54.0	-7.5	1.94 V	175	25.8	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	107.4 PK			1.74 H	62	60.8	46.6
2	*6415.00	93.6 AV			1.74 H	62	47.0	46.6
3	#12830.00	60.1 PK	88.2	-28.1	2.09 H	166	38.5	21.6
4	#12830.00	46.2 AV	68.2	-22.0	2.09 H	166	24.6	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.4 PK			1.07 V	13	63.8	46.6
2	*6415.00	97.7 AV			1.07 V	13	51.1	46.6
3	#12830.00	60.7 PK	88.2	-27.5	1.95 V	177	39.1	21.6
4	#12830.00	46.8 AV	68.2	-21.4	1.95 V	177	25.2	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	107.4 PK			1.77 H	65	60.8	46.6
2	*6435.00	93.6 AV			1.77 H	65	47.0	46.6
3	#12870.00	60.2 PK	88.2	-28.0	2.13 H	167	38.6	21.6
4	#12870.00	46.2 AV	68.2	-22.0	2.13 H	167	24.6	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	110.3 PK			1.04 V	14	63.7	46.6
2	*6435.00	97.5 AV			1.04 V	14	50.9	46.6
3	#12870.00	60.7 PK	88.2	-27.5	1.95 V	177	39.1	21.6
4	#12870.00	46.8 AV	68.2	-21.4	1.95 V	177	25.2	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	107.5 PK			1.72 H	65	60.7	46.8
2	*6475.00	93.9 AV			1.72 H	65	47.1	46.8
3	#12950.00	60.3 PK	88.2	-27.9	2.04 H	164	38.5	21.8
4	#12950.00	46.4 AV	68.2	-21.8	2.04 H	164	24.6	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.6 PK			1.08 V	16	63.8	46.8
2	*6475.00	97.9 AV			1.08 V	16	51.1	46.8
3	#12950.00	60.7 PK	88.2	-27.5	1.93 V	180	38.9	21.8
4	#12950.00	46.8 AV	68.2	-21.4	1.93 V	180	25.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.5 PK			1.76 H	64	60.5	47.0
2	*6515.00	93.7 AV			1.76 H	64	46.7	47.0
3	#13030.00	60.1 PK	88.2	-28.1	2.16 H	173	38.2	21.9
4	#13030.00	46.2 AV	68.2	-22.0	2.16 H	173	24.3	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	110.7 PK			1.06 V	15	63.7	47.0
2	*6515.00	97.8 AV			1.06 V	15	50.8	47.0
3	#13030.00	60.7 PK	88.2	-27.5	1.94 V	173	38.8	21.9
4	#13030.00	46.8 AV	68.2	-21.4	1.94 V	173	24.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.4 PK			1.80 H	69	60.2	47.2
2	*6535.00	93.7 AV			1.80 H	69	46.5	47.2
3	#13070.00	60.1 PK	88.2	-28.1	2.16 H	163	38.1	22.0
4	#13070.00	46.2 AV	68.2	-22.0	2.16 H	163	24.2	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.6 PK			1.08 V	12	63.4	47.2
2	*6535.00	97.8 AV			1.08 V	12	50.6	47.2
3	#13070.00	60.7 PK	88.2	-27.5	1.97 V	179	38.7	22.0
4	#13070.00	46.8 AV	68.2	-21.4	1.97 V	179	24.8	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.4 PK			1.72 H	65	60.0	47.4
2	*6695.00	93.7 AV			1.72 H	65	46.3	47.4
3	13390.00	60.1 PK	74.0	-13.9	2.13 H	162	37.3	22.8
4	13390.00	46.2 AV	54.0	-7.8	2.13 H	162	23.4	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.7 PK			1.08 V	15	63.3	47.4
2	*6695.00	97.9 AV			1.08 V	15	50.5	47.4
3	13390.00	60.7 PK	74.0	-13.3	1.95 V	177	37.9	22.8
4	13390.00	46.9 AV	54.0	-7.1	1.95 V	177	24.1	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.8 PK			1.74 H	70	60.4	47.4
2	*6855.00	93.9 AV			1.74 H	70	46.5	47.4
3	#13710.00	60.4 PK	88.2	-27.8	2.13 H	163	36.9	23.5
4	#13710.00	46.5 AV	68.2	-21.7	2.13 H	163	23.0	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.7 PK			1.06 V	18	63.3	47.4
2	*6855.00	97.6 AV			1.06 V	18	50.2	47.4
3	#13710.00	60.6 PK	88.2	-27.6	1.92 V	177	37.1	23.5
4	#13710.00	46.7 AV	68.2	-21.5	1.92 V	177	23.2	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.5 PK			1.84 H	69	59.9	47.6
2	*6875.00	93.6 AV			1.84 H	69	46.0	47.6
3	#13750.00	60.3 PK	88.2	-27.9	2.20 H	162	36.7	23.6
4	#13750.00	46.5 AV	68.2	-21.7	2.20 H	162	22.9	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	110.7 PK			1.05 V	11	63.1	47.6
2	*6875.00	97.7 AV			1.05 V	11	50.1	47.6
3	#13750.00	61.2 PK	88.2	-27.0	1.95 V	182	37.6	23.6
4	#13750.00	47.3 AV	68.2	-20.9	1.95 V	182	23.7	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.4 PK			1.78 H	69	58.7	48.7
2	*6995.00	93.5 AV			1.78 H	69	44.8	48.7
3	#13990.00	60.2 PK	88.2	-28.0	2.09 H	163	35.7	24.5
4	#13990.00	46.5 AV	68.2	-21.7	2.09 H	163	22.0	24.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.4 PK			1.09 V	18	61.7	48.7
2	*6995.00	97.8 AV			1.09 V	18	49.1	48.7
3	#13990.00	60.8 PK	88.2	-27.4	1.93 V	178	36.3	24.5
4	#13990.00	46.8 AV	68.2	-21.4	1.93 V	178	22.3	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	107.0 PK			1.75 H	62	58.4	48.6
2	*7095.00	93.1 AV			1.75 H	62	44.5	48.6
3	#14190.00	60.0 PK	88.2	-28.2	2.11 H	169	35.1	24.9
4	#14190.00	46.3 AV	68.2	-21.9	2.11 H	169	21.4	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	110.6 PK			1.05 V	18	62.0	48.6
2	*7095.00	97.6 AV			1.05 V	18	49.0	48.6
3	#14190.00	60.7 PK	88.2	-27.5	1.95 V	177	35.8	24.9
4	#14190.00	46.9 AV	68.2	-21.3	1.95 V	177	22.0	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	90.7 PK			1.72 H	69	41.9	48.8
2	*7115.00	77.3 AV			1.72 H	69	28.5	48.8
3	#7125.00	75.0 PK	88.2	-13.2	1.72 H	69	58.1	16.9
4	#7125.00	63.2 AV	68.2	-5.0	1.72 H	69	46.3	16.9
5	#14230.00	60.1 PK	88.2	-28.1	2.16 H	166	35.2	24.9
6	#14230.00	46.2 AV	68.2	-22.0	2.16 H	166	21.3	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	93.3 PK			1.32 V	11	44.5	48.8
2	*7115.00	80.3 AV			1.32 V	11	31.5	48.8
3	#7125.00	83.3 PK	88.2	-4.9	1.32 V	11	66.4	16.9
4	#7125.00	68.0 AV	68.2	-0.2	1.32 V	11	51.1	16.9
5	#14230.00	60.7 PK	88.2	-27.5	1.98 V	177	35.8	24.9
6	#14230.00	46.6 AV	68.2	-21.6	1.98 V	177	21.7	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.1 PK	88.2	-25.1	1.76 H	59	49.0	14.1
2	#5925.00	48.6 AV	68.2	-19.6	1.76 H	59	34.5	14.1
3	*6125.00	107.1 PK			1.76 H	59	61.8	45.3
4	*6125.00	94.3 AV			1.76 H	59	49.0	45.3
5	12250.00	60.3 PK	74.0	-13.7	2.13 H	166	39.3	21.0
6	12250.00	46.5 AV	54.0	-7.5	2.13 H	166	25.5	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.8 PK	88.2	-24.4	1.12 V	13	49.7	14.1
2	#5925.00	49.2 AV	68.2	-19.0	1.12 V	13	35.1	14.1
3	*6125.00	110.4 PK			1.12 V	13	65.1	45.3
4	*6125.00	97.1 AV			1.12 V	13	51.8	45.3
5	12250.00	60.7 PK	74.0	-13.3	1.95 V	175	39.7	21.0
6	12250.00	46.8 AV	54.0	-7.2	1.95 V	175	25.8	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	107.8 PK			1.81 H	64	62.1	45.7
2	*6245.00	93.8 AV			1.81 H	64	48.1	45.7
3	12490.00	60.3 PK	74.0	-13.7	2.16 H	170	39.6	20.7
4	12490.00	46.2 AV	54.0	-7.8	2.16 H	170	25.5	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	110.4 PK			1.09 V	15	64.7	45.7
2	*6245.00	97.6 AV			1.09 V	15	51.9	45.7
3	12490.00	60.9 PK	74.0	-13.1	1.98 V	177	40.2	20.7
4	12490.00	46.8 AV	54.0	-7.2	1.98 V	177	26.1	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	107.5 PK			1.71 H	60	60.9	46.6
2	*6405.00	93.7 AV			1.71 H	60	47.1	46.6
3	#12810.00	60.3 PK	88.2	-27.9	2.16 H	174	38.7	21.6
4	#12810.00	46.1 AV	68.2	-22.1	2.16 H	174	24.5	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.7 PK			1.04 V	15	64.1	46.6
2	*6405.00	97.8 AV			1.04 V	15	51.2	46.6
3	#12810.00	60.9 PK	88.2	-27.3	1.95 V	170	39.3	21.6
4	#12810.00	46.7 AV	68.2	-21.5	1.95 V	170	25.1	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	107.4 PK			1.72 H	63	60.8	46.6
2	*6445.00	93.5 AV			1.72 H	63	46.9	46.6
3	#12890.00	60.4 PK	88.2	-27.8	2.13 H	162	38.8	21.6
4	#12890.00	46.5 AV	68.2	-21.7	2.13 H	162	24.9	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	110.4 PK			1.15 V	12	63.8	46.6
2	*6445.00	97.8 AV			1.15 V	12	51.2	46.6
3	#12890.00	60.9 PK	88.2	-27.3	1.96 V	188	39.3	21.6
4	#12890.00	46.8 AV	68.2	-21.4	1.96 V	188	25.2	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	107.5 PK			1.78 H	62	60.6	46.9
2	*6485.00	93.9 AV			1.78 H	62	47.0	46.9
3	#12970.00	60.1 PK	88.2	-28.1	2.08 H	163	38.3	21.8
4	#12970.00	46.2 AV	68.2	-22.0	2.08 H	163	24.4	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.7 PK			1.14 V	18	63.8	46.9
2	*6485.00	97.5 AV			1.14 V	18	50.6	46.9
3	#12970.00	60.8 PK	88.2	-27.4	1.86 V	170	39.0	21.8
4	#12970.00	46.7 AV	68.2	-21.5	1.86 V	170	24.9	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	107.5 PK			1.77 H	58	60.5	47.0
2	*6525.00	93.6 AV			1.77 H	58	46.6	47.0
3	#13050.00	60.2 PK	88.2	-28.0	2.13 H	166	38.3	21.9
4	#13050.00	46.5 AV	68.2	-21.7	2.13 H	166	24.6	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	110.7 PK			1.08 V	12	63.7	47.0
2	*6525.00	97.9 AV			1.08 V	12	50.9	47.0
3	#13050.00	61.0 PK	88.2	-27.2	1.95 V	179	39.1	21.9
4	#13050.00	47.1 AV	68.2	-21.1	1.95 V	179	25.2	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	107.8 PK			1.77 H	69	60.5	47.3
2	*6565.00	93.7 AV			1.77 H	69	46.4	47.3
3	#13130.00	60.1 PK	88.2	-28.1	2.17 H	158	38.0	22.1
4	#13130.00	46.5 AV	68.2	-21.7	2.17 H	158	24.4	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.8 PK			1.14 V	19	63.5	47.3
2	*6565.00	97.6 AV			1.14 V	19	50.3	47.3
3	#13130.00	60.7 PK	88.2	-27.5	1.92 V	177	38.6	22.1
4	#13130.00	46.8 AV	68.2	-21.4	1.92 V	177	24.7	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	107.7 PK			1.80 H	65	60.2	47.5
2	*6725.00	93.7 AV			1.80 H	65	46.2	47.5
3	#13450.00	60.4 PK	88.2	-27.8	2.09 H	163	37.2	23.2
4	#13450.00	46.5 AV	68.2	-21.7	2.09 H	163	23.3	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	110.7 PK			1.09 V	13	63.2	47.5
2	*6725.00	97.9 AV			1.09 V	13	50.4	47.5
3	#13450.00	60.9 PK	88.2	-27.3	1.96 V	168	37.7	23.2
4	#13450.00	47.0 AV	68.2	-21.2	1.96 V	168	23.8	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	107.5 PK			1.84 H	66	60.1	47.4
2	*6845.00	93.6 AV			1.84 H	66	46.2	47.4
3	#13690.00	60.1 PK	88.2	-28.1	2.10 H	163	36.6	23.5
4	#13690.00	46.2 AV	68.2	-22.0	2.10 H	163	22.7	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.8 PK			1.14 V	14	63.4	47.4
2	*6845.00	97.9 AV			1.14 V	14	50.5	47.4
3	#13690.00	60.8 PK	88.2	-27.4	1.90 V	171	37.3	23.5
4	#13690.00	46.8 AV	68.2	-21.4	1.90 V	171	23.3	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	107.5 PK			1.74 H	65	59.8	47.7
2	*6885.00	93.8 AV			1.74 H	65	46.1	47.7
3	#13770.00	60.3 PK	88.2	-27.9	2.05 H	164	36.5	23.8
4	#13770.00	46.4 AV	68.2	-21.8	2.05 H	164	22.6	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	110.5 PK			1.15 V	14	62.8	47.7
2	*6885.00	97.6 AV			1.15 V	14	49.9	47.7
3	#13770.00	60.9 PK	88.2	-27.3	1.95 V	177	37.1	23.8
4	#13770.00	46.8 AV	68.2	-21.4	1.95 V	177	23.0	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	107.4 PK			1.78 H	68	58.6	48.8
2	*7005.00	93.5 AV			1.78 H	68	44.7	48.8
3	#14010.00	60.3 PK	88.2	-27.9	2.18 H	162	35.7	24.6
4	#14010.00	46.5 AV	68.2	-21.7	2.18 H	162	21.9	24.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	110.6 PK			1.08 V	12	61.8	48.8
2	*7005.00	97.7 AV			1.08 V	12	48.9	48.8
3	#14010.00	60.7 PK	88.2	-27.5	1.95 V	177	36.1	24.6
4	#14010.00	46.8 AV	68.2	-21.4	1.95 V	177	22.2	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	106.7 PK			1.72 H	68	58.1	48.6
2	*7085.00	93.5 AV			1.72 H	68	44.9	48.6
3	#7125.00	61.2 PK	88.2	-27.0	1.72 H	68	44.3	16.9
4	#7125.00	44.0 AV	68.2	-24.2	1.72 H	68	27.1	16.9
5	#14170.00	60.3 PK	88.2	-27.9	2.10 H	166	35.4	24.9
6	#14170.00	46.5 AV	68.2	-21.7	2.10 H	166	21.6	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	109.2 PK			1.13 V	5	60.6	48.6
2	*7085.00	96.7 AV			1.13 V	5	48.1	48.6
3	#7125.00	63.0 PK	88.2	-25.2	1.13 V	5	46.1	16.9
4	#7125.00	45.5 AV	68.2	-22.7	1.13 V	5	28.6	16.9
5	#14170.00	60.9 PK	88.2	-27.3	1.95 V	180	36.0	24.9
6	#14170.00	46.8 AV	68.2	-21.4	1.95 V	180	21.9	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.1 PK	88.2	-25.1	1.70 H	52	49.0	14.1
2	#5925.00	48.4 AV	68.2	-19.8	1.70 H	52	34.3	14.1
3	*6145.00	107.5 PK			1.70 H	52	62.3	45.2
4	*6145.00	95.0 AV			1.70 H	52	49.8	45.2
5	12290.00	60.1 PK	74.0	-13.9	2.17 H	163	39.2	20.9
6	12290.00	46.3 AV	54.0	-7.7	2.17 H	163	25.4	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	1.12 V	10	49.8	14.1
2	#5925.00	49.5 AV	68.2	-18.7	1.12 V	10	35.4	14.1
3	*6145.00	110.5 PK			1.12 V	10	65.3	45.2
4	*6145.00	97.1 AV			1.12 V	10	51.9	45.2
5	12290.00	60.7 PK	74.0	-13.3	1.97 V	172	39.8	20.9
6	12290.00	47.0 AV	54.0	-7.0	1.97 V	172	26.1	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	107.4 PK			1.79 H	68	61.8	45.6
2	*6225.00	95.2 AV			1.79 H	68	49.6	45.6
3	12450.00	60.2 PK	74.0	-13.8	2.16 H	167	39.6	20.6
4	12450.00	46.4 AV	54.0	-7.6	2.16 H	167	25.8	20.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.4 PK			1.15 V	14	64.8	45.6
2	*6225.00	97.3 AV			1.15 V	14	51.7	45.6
3	12450.00	60.7 PK	74.0	-13.3	1.96 V	175	40.1	20.6
4	12450.00	47.3 AV	54.0	-6.7	1.96 V	175	26.7	20.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.6 PK			1.74 H	56	61.0	46.6
2	*6385.00	95.2 AV			1.74 H	56	48.6	46.6
3	#12770.00	60.2 PK	88.2	-28.0	2.19 H	168	38.7	21.5
4	#12770.00	46.1 AV	68.2	-22.1	2.19 H	168	24.6	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.7 PK			1.18 V	12	64.1	46.6
2	*6385.00	97.2 AV			1.18 V	12	50.6	46.6
3	#12770.00	60.9 PK	88.2	-27.3	1.99 V	170	39.4	21.5
4	#12770.00	47.2 AV	68.2	-21.0	1.99 V	170	25.7	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	107.5 PK			1.78 H	53	60.8	46.7
2	*6465.00	95.1 AV			1.78 H	53	48.4	46.7
3	#12930.00	60.2 PK	88.2	-28.0	2.13 H	169	38.4	21.8
4	#12930.00	46.1 AV	68.2	-22.1	2.13 H	169	24.3	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.7 PK			1.14 V	14	64.0	46.7
2	*6465.00	97.1 AV			1.14 V	14	50.4	46.7
3	#12930.00	60.5 PK	88.2	-27.7	1.96 V	178	38.7	21.8
4	#12930.00	47.1 AV	68.2	-21.1	1.96 V	178	25.3	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	107.8 PK			1.74 H	61	60.6	47.2
2	*6545.00	95.4 AV			1.74 H	61	48.2	47.2
3	#13090.00	60.1 PK	88.2	-28.1	2.19 H	159	38.0	22.1
4	#13090.00	46.4 AV	68.2	-21.8	2.19 H	159	24.3	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	110.7 PK			1.14 V	12	63.5	47.2
2	*6545.00	97.3 AV			1.14 V	12	50.1	47.2
3	#13090.00	60.9 PK	88.2	-27.3	1.99 V	174	38.8	22.1
4	#13090.00	47.2 AV	68.2	-21.0	1.99 V	174	25.1	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	107.6 PK			1.79 H	60	60.3	47.3
2	*6625.00	95.1 AV			1.79 H	60	47.8	47.3
3	13250.00	60.1 PK	74.0	-13.9	2.11 H	168	37.6	22.5
4	13250.00	46.5 AV	54.0	-7.5	2.11 H	168	24.0	22.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.7 PK			1.16 V	18	63.4	47.3
2	*6625.00	97.4 AV			1.16 V	18	50.1	47.3
3	13250.00	60.7 PK	74.0	-13.3	1.99 V	175	38.2	22.5
4	13250.00	47.2 AV	54.0	-6.8	1.99 V	175	24.7	22.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.4 PK			1.70 H	56	59.9	47.5
2	*6705.00	94.8 AV			1.70 H	56	47.3	47.5
3	#13410.00	60.1 PK	88.2	-28.1	2.25 H	163	37.2	22.9
4	#13410.00	46.2 AV	68.2	-22.0	2.25 H	163	23.3	22.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.5 PK			1.20 V	18	63.0	47.5
2	*6705.00	97.3 AV			1.20 V	18	49.8	47.5
3	#13410.00	60.8 PK	88.2	-27.4	1.95 V	188	37.9	22.9
4	#13410.00	47.2 AV	68.2	-21.0	1.95 V	188	24.3	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	107.4 PK			1.79 H	58	60.0	47.4
2	*6785.00	95.2 AV			1.79 H	58	47.8	47.4
3	#13570.00	60.5 PK	88.2	-27.7	2.11 H	169	36.9	23.6
4	#13570.00	46.2 AV	68.2	-22.0	2.11 H	169	22.6	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.6 PK			1.14 V	12	63.2	47.4
2	*6785.00	97.2 AV			1.14 V	12	49.8	47.4
3	#13570.00	60.9 PK	88.2	-27.3	1.95 V	170	37.3	23.6
4	#13570.00	47.2 AV	68.2	-21.0	1.95 V	170	23.6	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.4 PK			1.75 H	58	59.9	47.5
2	*6865.00	95.3 AV			1.75 H	58	47.8	47.5
3	#13730.00	60.2 PK	88.2	-28.0	2.14 H	166	36.6	23.6
4	#13730.00	46.5 AV	68.2	-21.7	2.14 H	166	22.9	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.4 PK			1.13 V	14	62.9	47.5
2	*6865.00	97.0 AV			1.13 V	14	49.5	47.5
3	#13730.00	60.5 PK	88.2	-27.7	1.90 V	178	36.9	23.6
4	#13730.00	47.2 AV	68.2	-21.0	1.90 V	178	23.6	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	107.6 PK			1.78 H	64	59.3	48.3
2	*6945.00	95.2 AV			1.78 H	64	46.9	48.3
3	#13890.00	60.2 PK	88.2	-28.0	2.13 H	169	36.3	23.9
4	#13890.00	46.5 AV	68.2	-21.7	2.13 H	169	22.6	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	110.7 PK			1.26 V	18	62.4	48.3
2	*6945.00	97.3 AV			1.26 V	18	49.0	48.3
3	#13890.00	61.2 PK	88.2	-27.0	1.89 V	163	37.3	23.9
4	#13890.00	47.5 AV	68.2	-20.7	1.89 V	163	23.6	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	106.9 PK			1.71 H	59	58.2	48.7
2	*7025.00	93.8 AV			1.71 H	59	45.1	48.7
3	#7125.00	67.7 PK	88.2	-20.5	1.71 H	59	50.8	16.9
4	#7125.00	46.4 AV	68.2	-21.8	1.71 H	59	29.5	16.9
5	#14050.00	60.2 PK	88.2	-28.0	2.20 H	165	35.5	24.7
6	#14050.00	46.7 AV	68.2	-21.5	2.20 H	165	22.0	24.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	110.5 PK			1.25 V	4	61.8	48.7
2	*7025.00	98.1 AV			1.25 V	4	49.4	48.7
3	#7125.00	71.1 PK	88.2	-17.1	1.25 V	4	54.2	16.9
4	#7125.00	48.0 AV	68.2	-20.2	1.25 V	4	31.1	16.9
5	#14050.00	60.9 PK	88.2	-27.3	1.95 V	170	36.2	24.7
6	#14050.00	47.5 AV	68.2	-20.7	1.95 V	170	22.8	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.2 PK	88.2	-25.0	1.74 H	56	49.1	14.1
2	#5925.00	48.6 AV	68.2	-19.6	1.74 H	56	34.5	14.1
3	*6185.00	107.1 PK			1.74 H	56	61.7	45.4
4	*6185.00	94.9 AV			1.74 H	56	49.5	45.4
5	12370.00	60.2 PK	74.0	-13.8	2.15 H	169	39.5	20.7
6	12370.00	46.5 AV	54.0	-7.5	2.15 H	169	25.8	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.8 PK	88.2	-24.4	1.15 V	15	49.7	14.1
2	#5925.00	49.3 AV	68.2	-18.9	1.15 V	15	35.2	14.1
3	*6185.00	110.7 PK			1.15 V	15	65.3	45.4
4	*6185.00	98.4 AV			1.15 V	15	53.0	45.4
5	12370.00	60.8 PK	74.0	-13.2	1.99 V	184	40.1	20.7
6	12370.00	47.2 AV	54.0	-6.8	1.99 V	184	26.5	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.6 PK			1.79 H	59	61.1	46.5
2	*6345.00	95.2 AV			1.79 H	59	48.7	46.5
3	12690.00	60.2 PK	74.0	-13.8	2.17 H	166	38.9	21.3
4	12690.00	46.5 AV	54.0	-7.5	2.17 H	166	25.2	21.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.8 PK			1.14 V	16	64.3	46.5
2	*6345.00	98.0 AV			1.14 V	16	51.5	46.5
3	12690.00	60.7 PK	74.0	-13.3	1.85 V	179	39.4	21.3
4	12690.00	47.3 AV	54.0	-6.7	1.85 V	179	26.0	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.6 PK			1.78 H	56	60.6	47.0
2	*6505.00	95.2 AV			1.78 H	56	48.2	47.0
3	#13010.00	60.4 PK	88.2	-27.8	2.16 H	169	38.5	21.9
4	#13010.00	46.2 AV	68.2	-22.0	2.16 H	169	24.3	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.7 PK			1.20 V	12	63.7	47.0
2	*6505.00	98.3 AV			1.20 V	12	51.3	47.0
3	#13010.00	60.9 PK	88.2	-27.3	1.95 V	188	39.0	21.9
4	#13010.00	47.5 AV	68.2	-20.7	1.95 V	188	25.6	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.7 PK			1.76 H	59	60.4	47.3
2	*6665.00	95.2 AV			1.76 H	59	47.9	47.3
3	13330.00	60.2 PK	74.0	-13.8	2.15 H	163	37.5	22.7
4	13330.00	46.5 AV	54.0	-7.5	2.15 H	163	23.8	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.6 PK			1.12 V	12	63.3	47.3
2	*6665.00	98.5 AV			1.12 V	12	51.2	47.3
3	13330.00	60.9 PK	74.0	-13.1	1.85 V	172	38.2	22.7
4	13330.00	47.1 AV	54.0	-6.9	1.85 V	172	24.4	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.5 PK			1.72 H	56	60.1	47.4
2	*6825.00	95.2 AV			1.72 H	56	47.8	47.4
3	#13650.00	60.2 PK	88.2	-28.0	2.16 H	159	36.7	23.5
4	#13650.00	46.5 AV	68.2	-21.7	2.16 H	159	23.0	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.8 PK			1.17 V	14	63.4	47.4
2	*6825.00	98.6 AV			1.17 V	14	51.2	47.4
3	#13650.00	60.8 PK	88.2	-27.4	1.95 V	183	37.3	23.5
4	#13650.00	47.2 AV	68.2	-21.0	1.95 V	183	23.7	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.2 PK			1.74 H	62	58.5	48.7
2	*6985.00	93.6 AV			1.74 H	62	44.9	48.7
3	#7125.00	72.5 PK	88.2	-15.7	1.74 H	62	55.6	16.9
4	#7125.00	57.1 AV	68.2	-11.1	1.74 H	62	40.2	16.9
5	#13970.00	60.3 PK	88.2	-27.9	2.18 H	163	36.0	24.3
6	#13970.00	46.5 AV	68.2	-21.7	2.18 H	163	22.2	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.6 PK			1.15 V	16	61.9	48.7
2	*6985.00	97.7 AV			1.15 V	16	49.0	48.7
3	#7125.00	76.4 PK	88.2	-11.8	1.15 V	16	59.5	16.9
4	#7125.00	60.5 AV	68.2	-7.7	1.15 V	16	43.6	16.9
5	#13970.00	60.8 PK	88.2	-27.4	1.85 V	172	36.5	24.3
6	#13970.00	47.3 AV	68.2	-20.9	1.85 V	172	23.0	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.0 PK	88.2	-25.2	1.70 H	63	48.9	14.1
2	#5925.00	48.9 AV	68.2	-19.3	1.70 H	63	34.8	14.1
3	*6265.00	107.0 PK			1.70 H	63	61.2	45.8
4	*6265.00	93.9 AV			1.70 H	63	48.1	45.8
5	12530.00	60.2 PK	74.0	-13.8	2.24 H	171	39.4	20.8
6	12530.00	46.3 AV	54.0	-7.7	2.24 H	171	25.5	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	1.10 V	11	49.8	14.1
2	#5925.00	49.9 AV	68.2	-18.3	1.10 V	11	35.8	14.1
3	*6265.00	110.2 PK			1.10 V	11	64.4	45.8
4	*6265.00	97.6 AV			1.10 V	11	51.8	45.8
5	12530.00	60.7 PK	74.0	-13.3	1.95 V	180	39.9	20.8
6	12530.00	47.3 AV	54.0	-6.7	1.95 V	180	26.5	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	107.0 PK			1.78 H	59	60.4	46.6
2	*6425.00	93.6 AV			1.78 H	59	47.0	46.6
3	#12850.00	60.2 PK	88.2	-28.0	2.19 H	174	38.6	21.6
4	#12850.00	46.8 AV	68.2	-21.4	2.19 H	174	25.2	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.4 PK			1.13 V	15	63.8	46.6
2	*6425.00	97.6 AV			1.13 V	15	51.0	46.6
3	#12850.00	60.9 PK	88.2	-27.3	1.99 V	172	39.3	21.6
4	#12850.00	47.5 AV	68.2	-20.7	1.99 V	172	25.9	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	106.9 PK			1.69 H	60	59.6	47.3
2	*6585.00	93.8 AV			1.69 H	60	46.5	47.3
3	#13170.00	60.2 PK	88.2	-28.0	2.19 H	170	37.9	22.3
4	#13170.00	46.1 AV	68.2	-22.1	2.19 H	170	23.8	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.3 PK			1.17 V	19	63.0	47.3
2	*6585.00	97.7 AV			1.17 V	19	50.4	47.3
3	#13170.00	60.8 PK	88.2	-27.4	1.95 V	175	38.5	22.3
4	#13170.00	47.6 AV	68.2	-20.6	1.95 V	175	25.3	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	107.0 PK			1.79 H	55	59.4	47.6
2	*6745.00	93.8 AV			1.79 H	55	46.2	47.6
3	#13490.00	60.2 PK	88.2	-28.0	2.18 H	164	36.7	23.5
4	#13490.00	46.7 AV	68.2	-21.5	2.18 H	164	23.2	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.5 PK			1.16 V	18	62.9	47.6
2	*6745.00	97.8 AV			1.16 V	18	50.2	47.6
3	#13490.00	60.9 PK	88.2	-27.3	1.99 V	182	37.4	23.5
4	#13490.00	47.5 AV	68.2	-20.7	1.99 V	182	24.0	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	106.4 PK			1.70 H	68	58.5	47.9
2	*6905.00	92.8 AV			1.70 H	68	44.9	47.9
3	#7125.00	75.3 PK	88.2	-12.9	1.70 H	68	58.4	16.9
4	#7125.00	59.3 AV	68.2	-8.9	1.70 H	68	42.4	16.9
5	7250.00	64.2 PK	74.0	-9.8	1.70 H	68	46.8	17.4
6	7250.00	49.3 AV	54.0	-4.7	1.70 H	68	31.9	17.4
7	#13810.00	60.9 PK	88.2	-27.3	2.16 H	170	37.1	23.8
8	#13810.00	47.0 AV	68.2	-21.2	2.16 H	170	23.2	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.2 PK			1.08 V	10	62.3	47.9
2	*6905.00	98.2 AV			1.08 V	10	50.3	47.9
3	#7125.00	78.3 PK	88.2	-9.9	1.08 V	10	61.4	16.9
4	#7125.00	62.5 AV	68.2	-5.7	1.08 V	10	45.6	16.9
5	7250.00	67.0 PK	74.0	-7.0	1.08 V	10	49.6	17.4
6	7250.00	51.5 AV	54.0	-2.5	1.08 V	10	34.1	17.4
7	#13810.00	61.2 PK	88.2	-27.0	1.83 V	169	37.4	23.8
8	#13810.00	47.8 AV	68.2	-20.4	1.83 V	169	24.0	23.8


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.


NSS1 Plot of Band Edge

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11a Channel 33

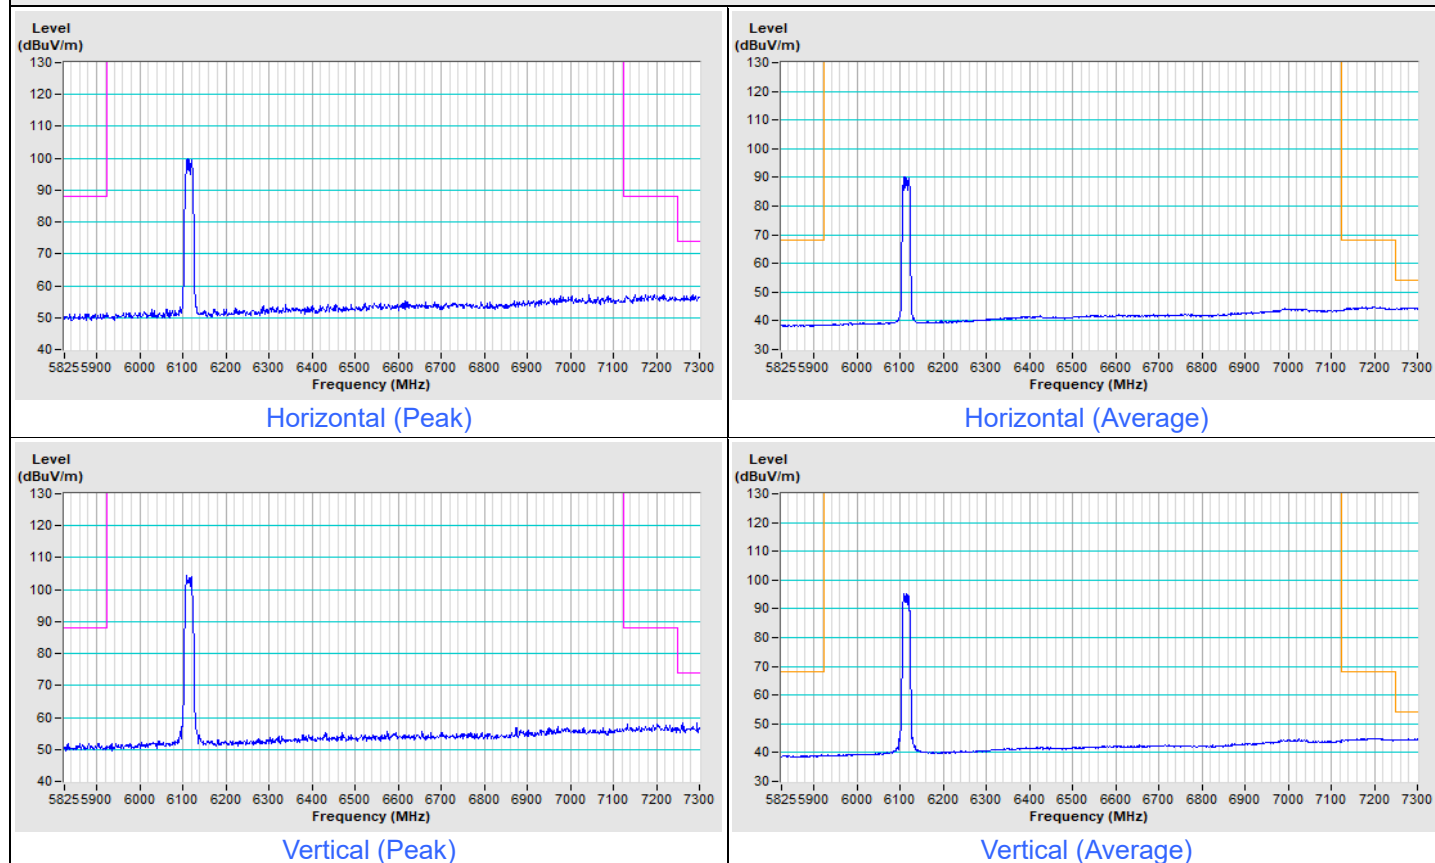


802.11a Channel 233

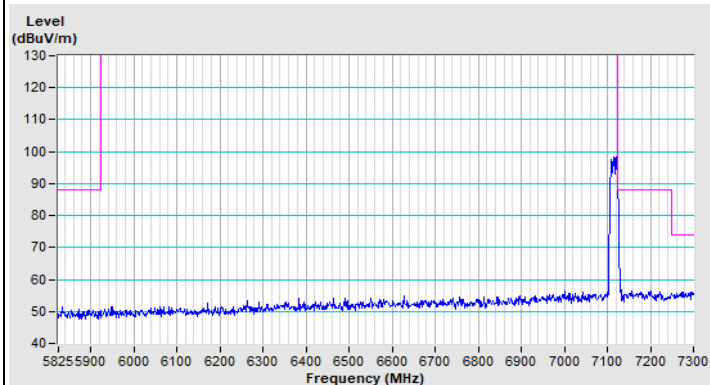


Horizontal (Peak)

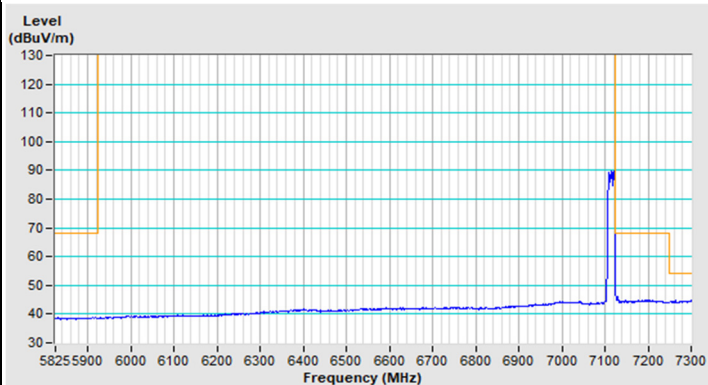

Horizontal (Average)

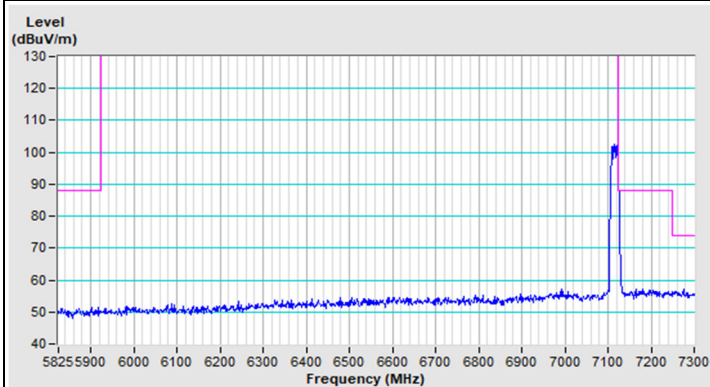


Vertical (Peak)

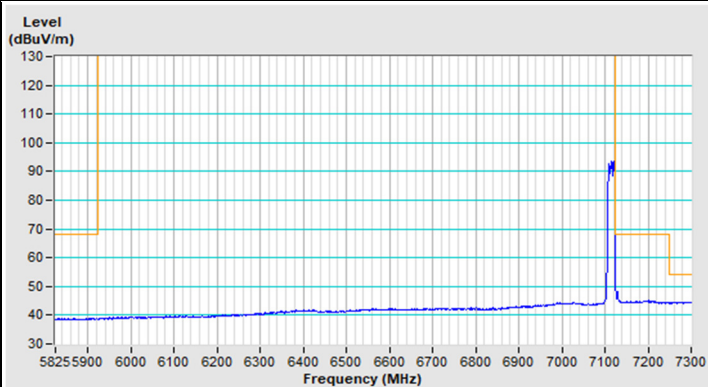


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) Channel 33

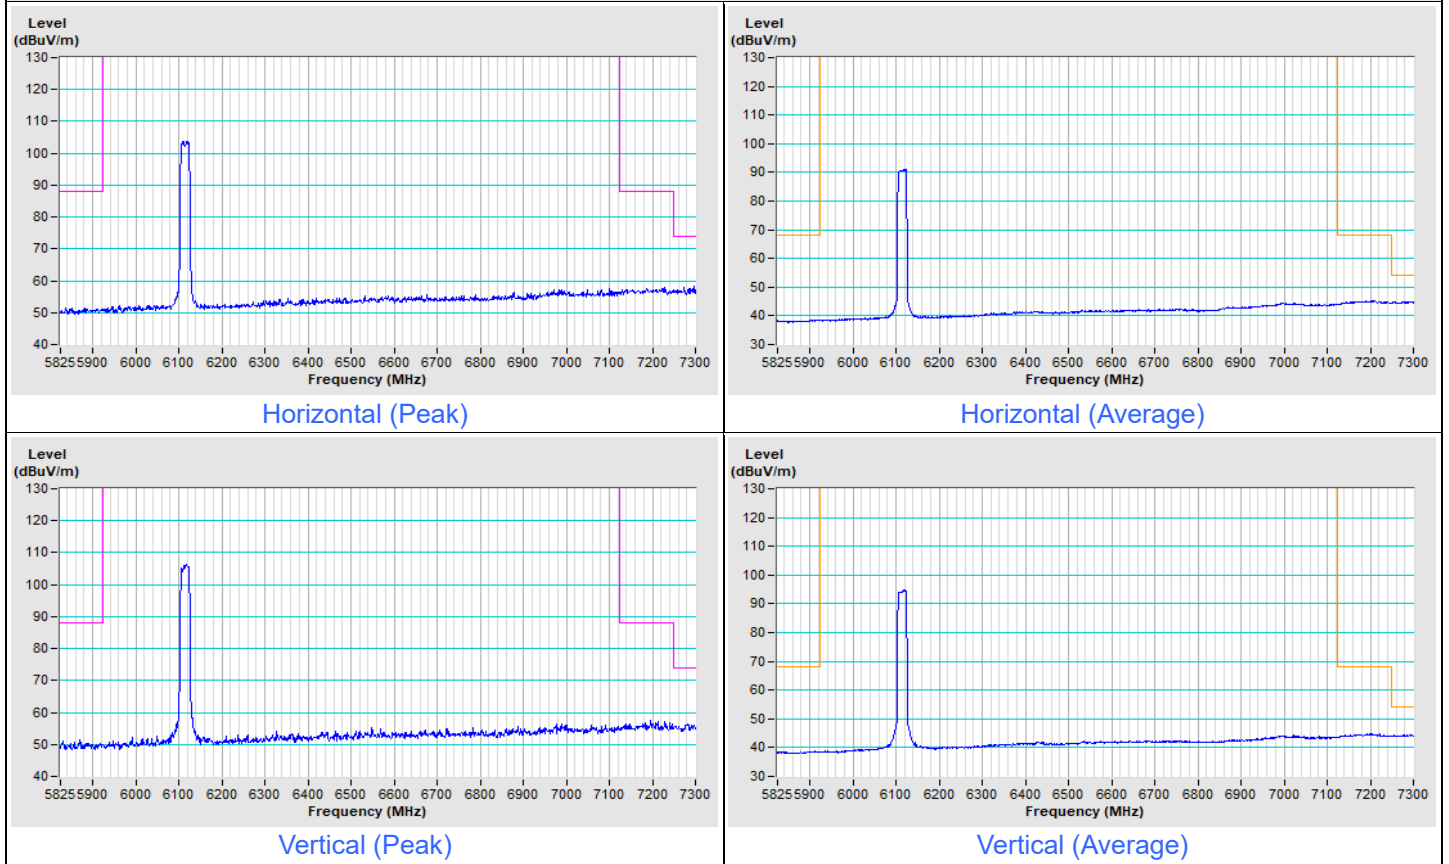


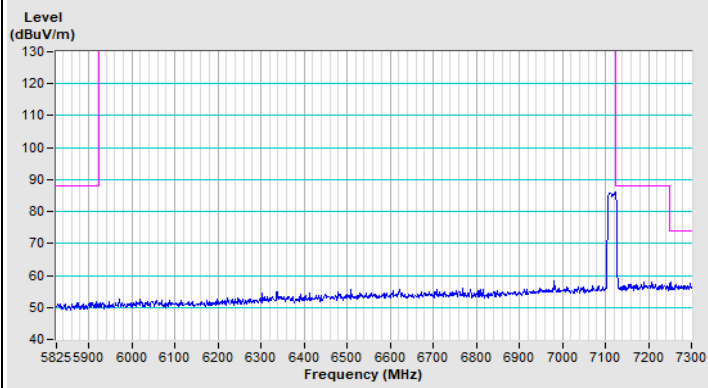802.11be (EHT20) Channel 233


Horizontal (Peak)

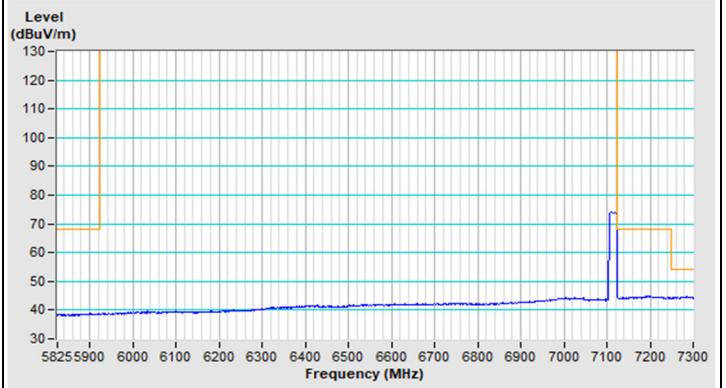

Horizontal (Average)

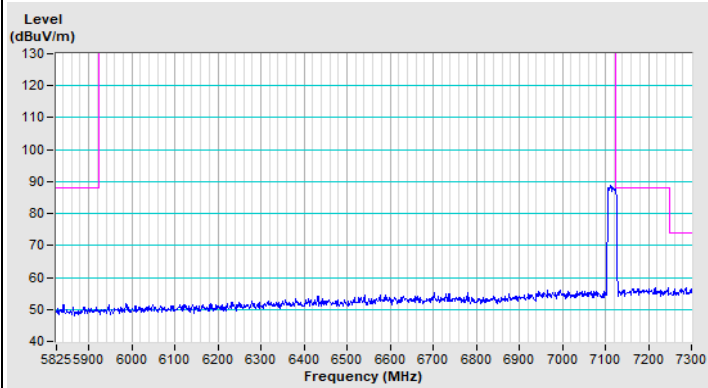


Vertical (Peak)

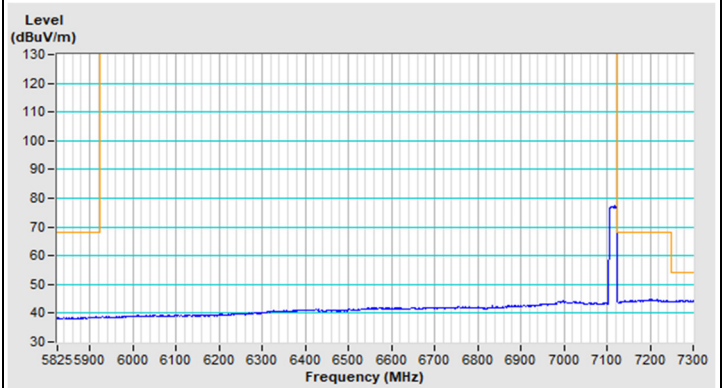


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT40) Channel 35

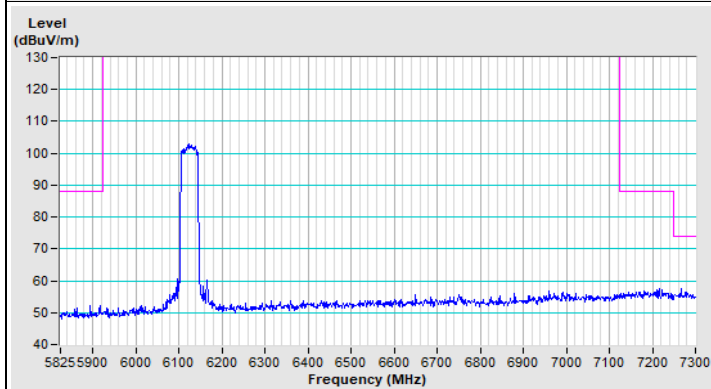


Horizontal (Peak)

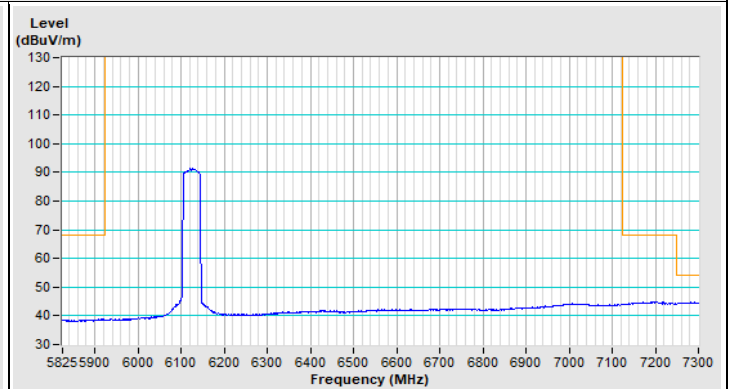


Horizontal (Average)

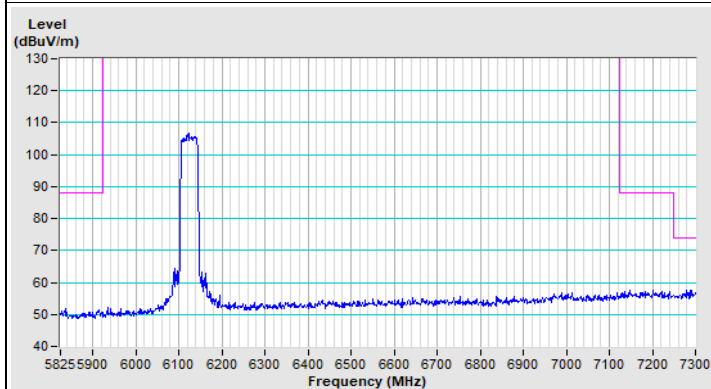


Vertical (Peak)

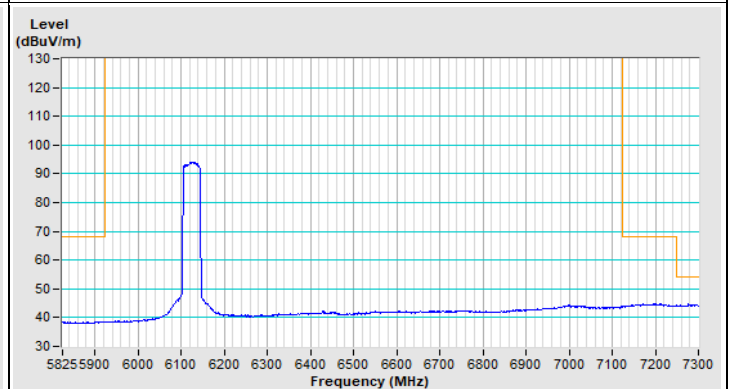


Vertical (Average)

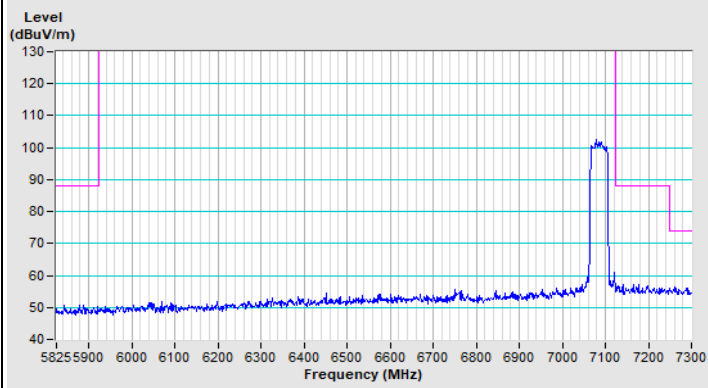802.11be (EHT40) Channel 227


Horizontal (Peak)

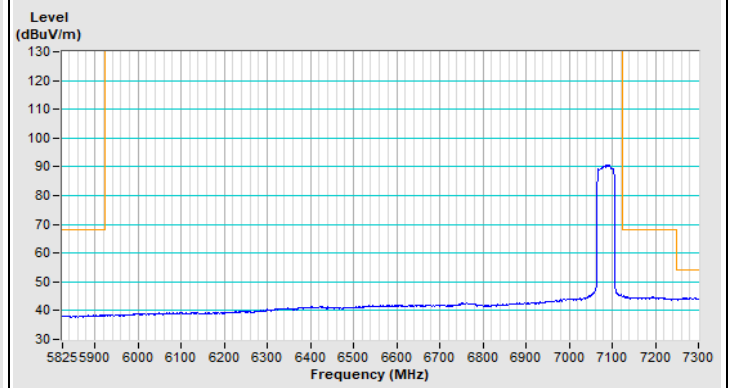

Horizontal (Average)

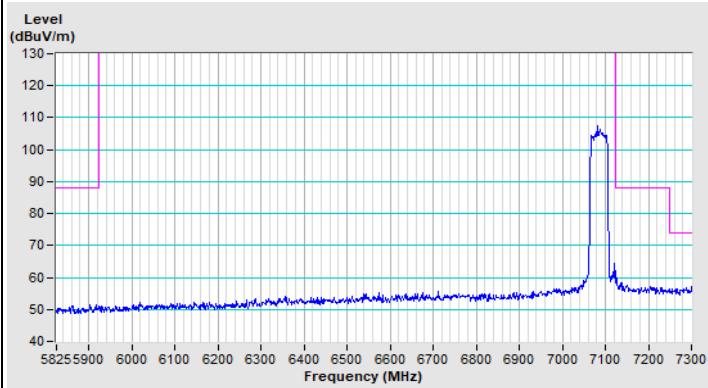


Vertical (Peak)

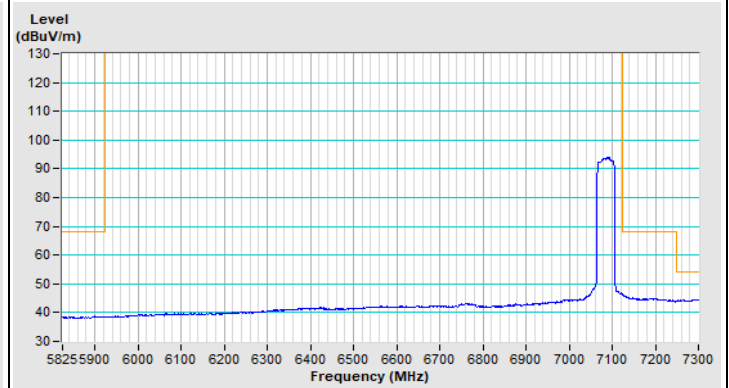


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 39

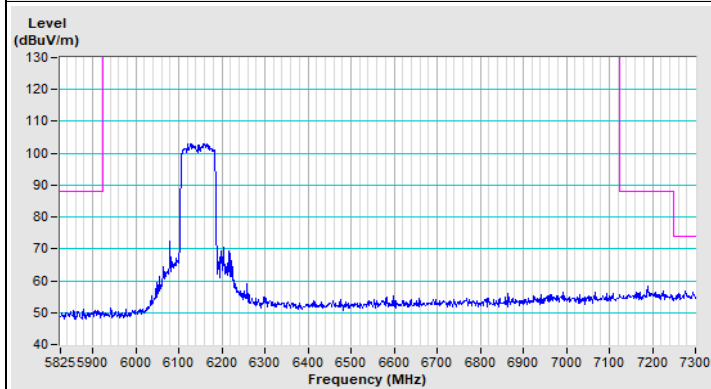


Horizontal (Peak)

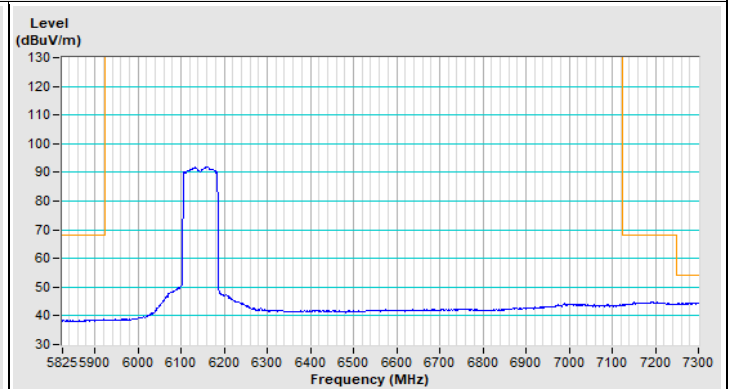

Horizontal (Average)

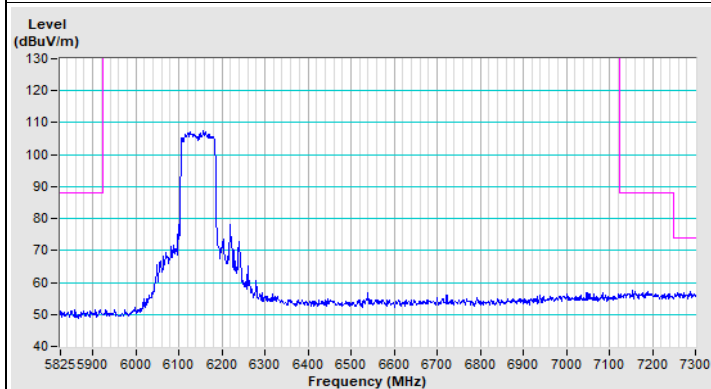


Vertical (Peak)

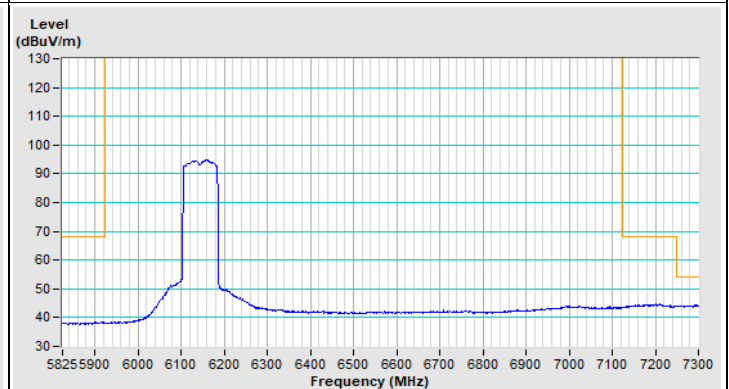


Vertical (Average)


802.11be (EHT80) Channel 215

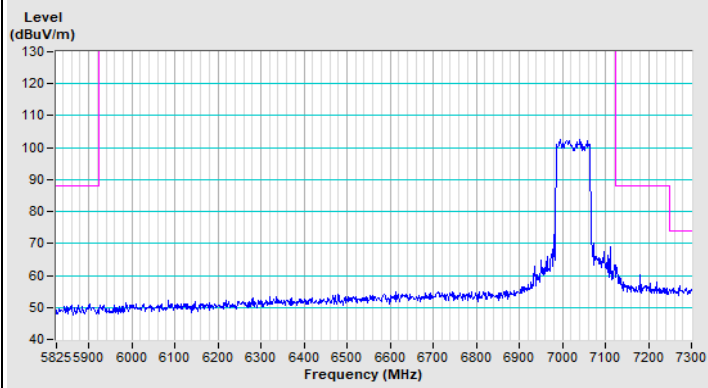


Horizontal (Peak)

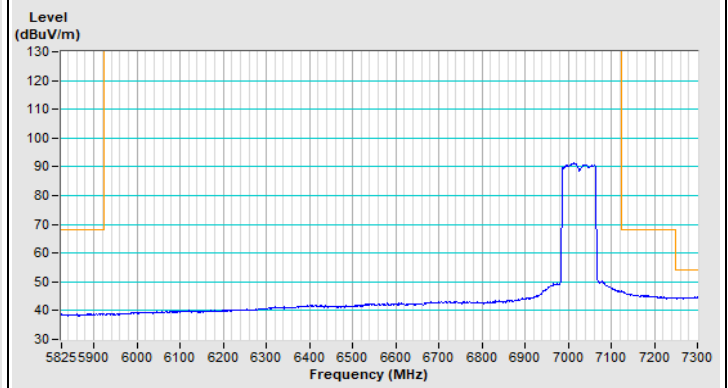

Horizontal (Average)

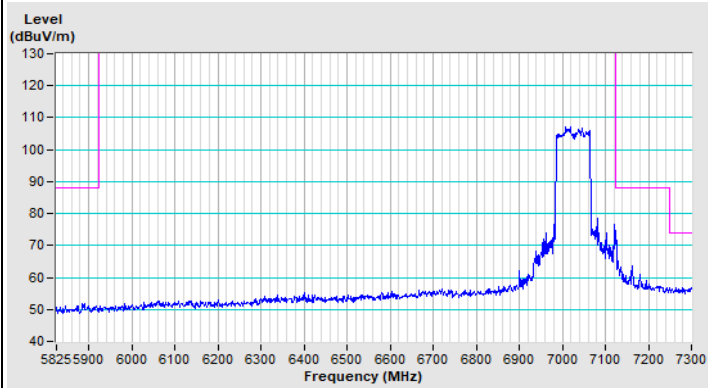


Vertical (Peak)

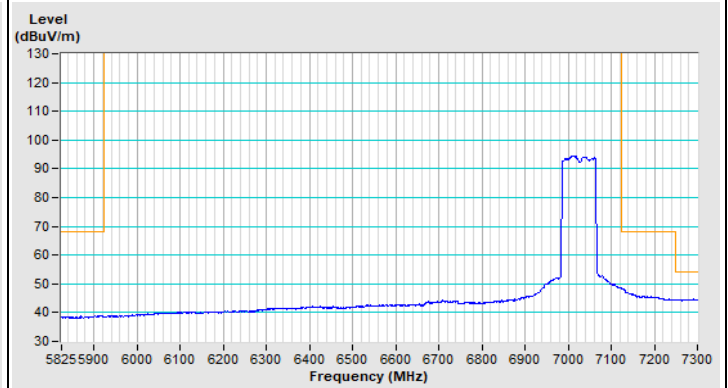


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 47

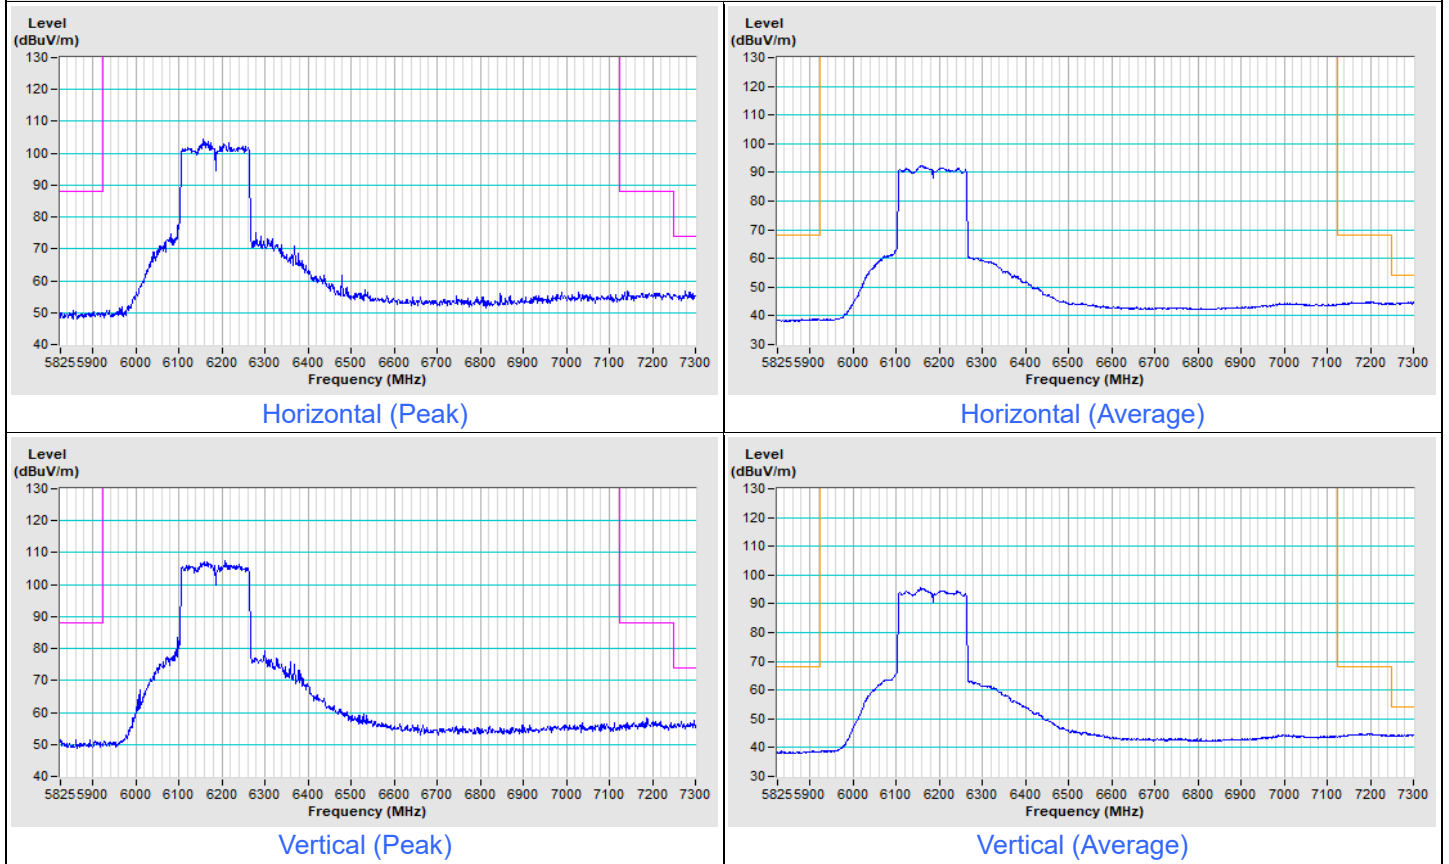


802.11be (EHT160) Channel 207

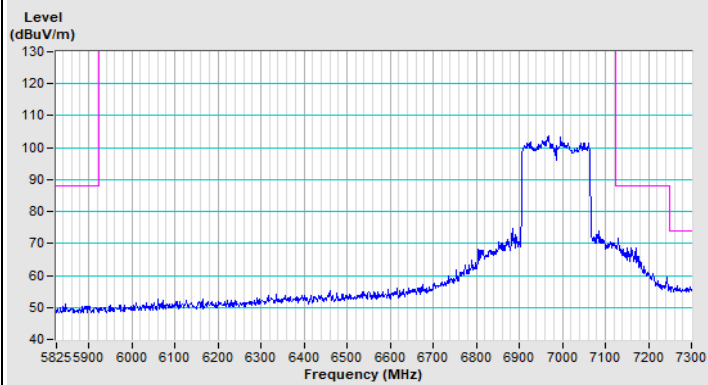


Horizontal (Peak)

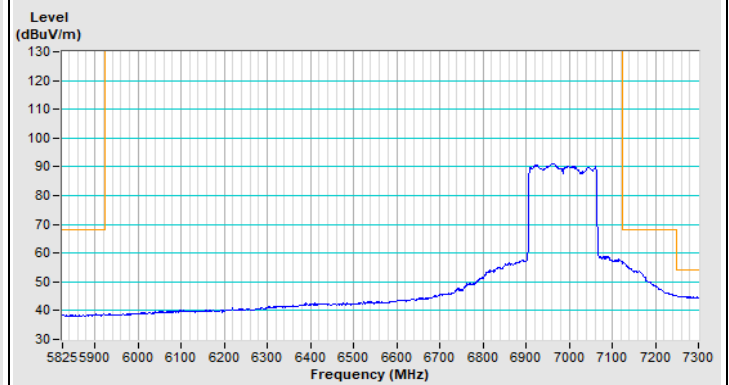

Horizontal (Average)

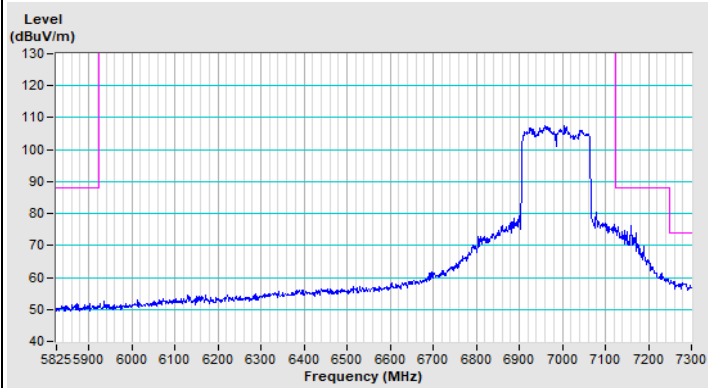


Vertical (Peak)

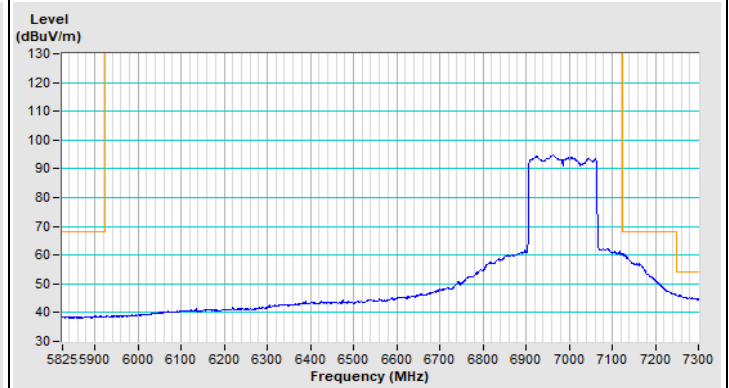


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 63

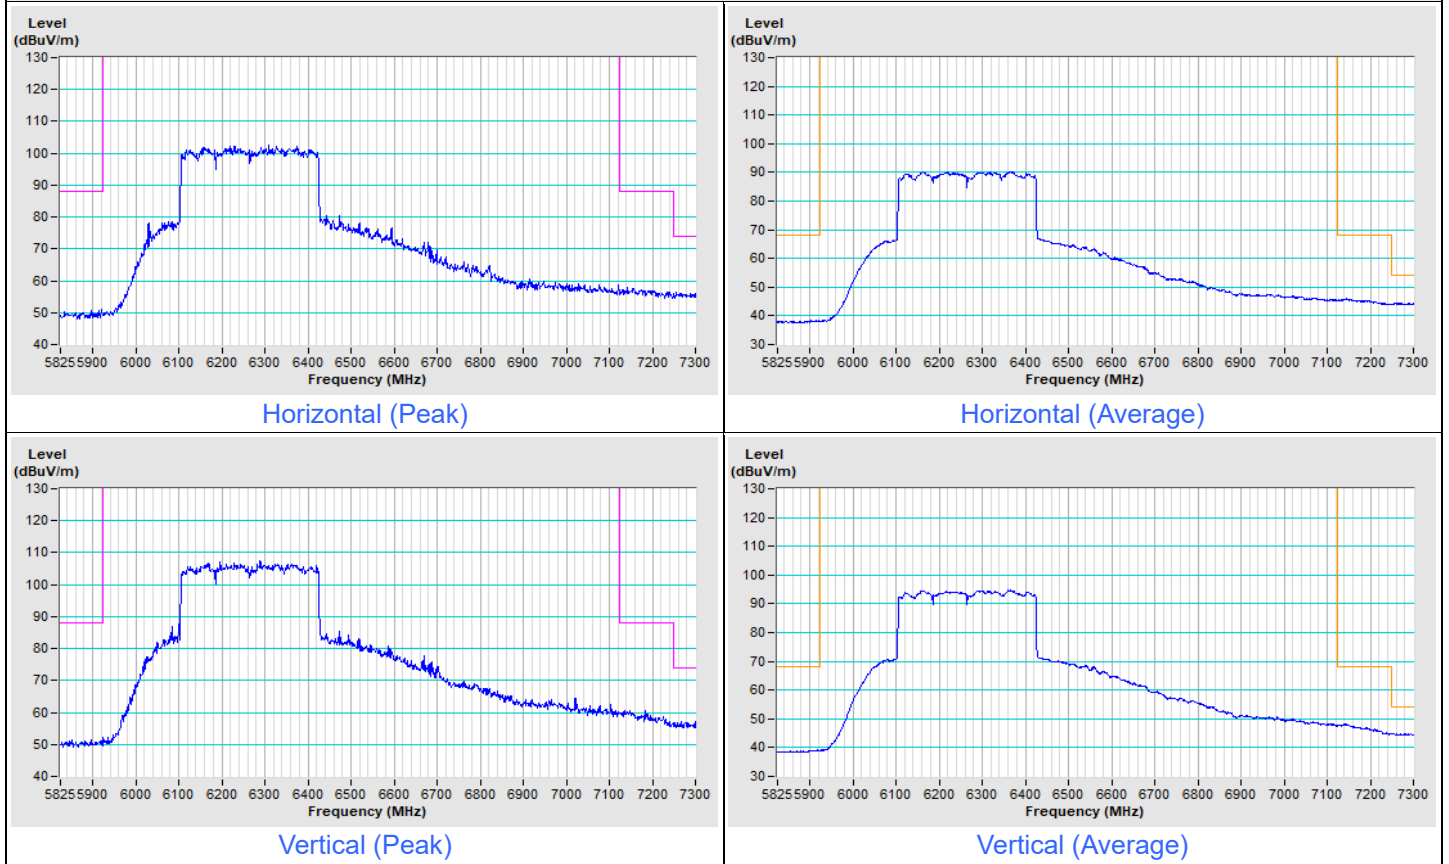


802.11be (EHT320) Channel 191

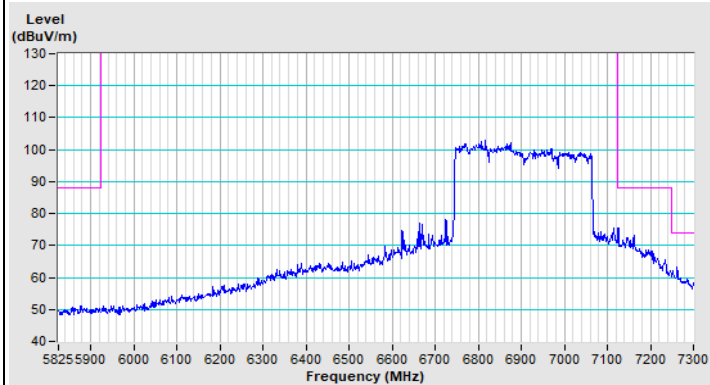


Horizontal (Peak)

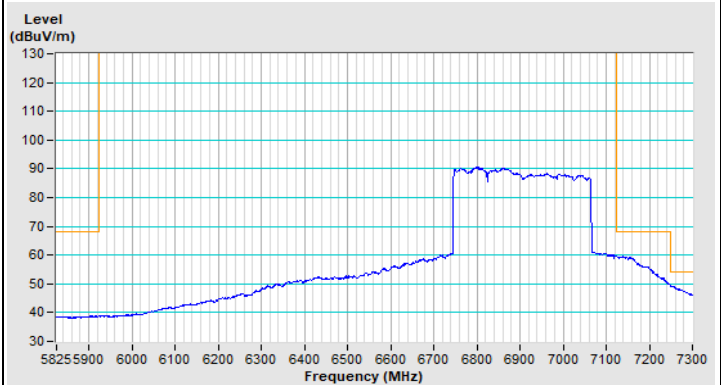

Horizontal (Average)

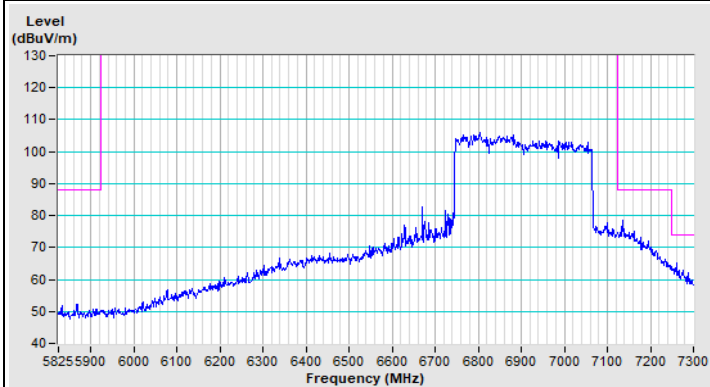

Vertical (Peak)

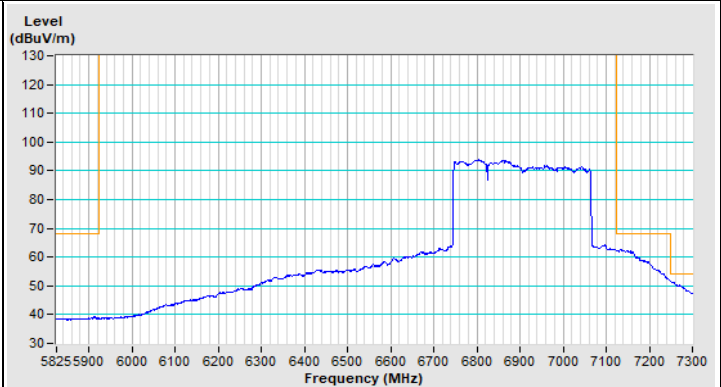

Vertical (Average)

NSS2

RF Mode	802.11be (EHT20)	Channel	CH 33 : 6115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.2 PK	88.2	-25.0	1.78 H	59	49.1	14.1
2	#5925.00	49.2 AV	68.2	-19.0	1.78 H	59	35.1	14.1
3	*6115.00	107.0 PK			1.78 H	59	61.7	45.3
4	*6115.00	93.6 AV			1.78 H	59	48.3	45.3
5	12230.00	60.2 PK	74.0	-13.8	2.19 H	167	39.2	21.0
6	12230.00	46.6 AV	54.0	-7.4	2.19 H	167	25.6	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.8 PK	88.2	-24.4	1.16 V	11	49.7	14.1
2	#5925.00	49.8 AV	68.2	-18.4	1.16 V	11	35.7	14.1
3	*6115.00	110.2 PK			1.16 V	11	64.9	45.3
4	*6115.00	97.1 AV			1.16 V	11	51.8	45.3
5	12230.00	60.8 PK	74.0	-13.2	1.94 V	172	39.8	21.0
6	12230.00	47.5 AV	54.0	-6.5	1.94 V	172	26.5	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 61 : 6255 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	107.2 PK			1.77 H	62	61.4	45.8
2	*6255.00	93.8 AV			1.77 H	62	48.0	45.8
3	12510.00	60.3 PK	74.0	-13.7	2.15 H	169	39.6	20.7
4	12510.00	46.5 AV	54.0	-7.5	2.15 H	169	25.8	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	110.5 PK			1.13 V	15	64.7	45.8
2	*6255.00	97.7 AV			1.13 V	15	51.9	45.8
3	12510.00	60.8 PK	74.0	-13.2	1.84 V	171	40.1	20.7
4	12510.00	47.6 AV	54.0	-6.4	1.84 V	171	26.9	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 93 : 6415 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	106.9 PK			1.76 H	70	60.3	46.6
2	*6415.00	93.4 AV			1.76 H	70	46.8	46.6
3	#12830.00	60.2 PK	88.2	-28.0	2.25 H	180	38.6	21.6
4	#12830.00	46.3 AV	68.2	-21.9	2.25 H	180	24.7	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	110.3 PK			1.10 V	21	63.7	46.6
2	*6415.00	97.5 AV			1.10 V	21	50.9	46.6
3	#12830.00	60.8 PK	88.2	-27.4	1.99 V	180	39.2	21.6
4	#12830.00	47.5 AV	68.2	-20.7	1.99 V	180	25.9	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 97 : 6435 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	107.0 PK			1.77 H	74	60.4	46.6
2	*6435.00	93.8 AV			1.77 H	74	47.2	46.6
3	#12870.00	60.3 PK	88.2	-27.9	2.15 H	161	38.7	21.6
4	#12870.00	46.2 AV	68.2	-22.0	2.15 H	161	24.6	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	110.4 PK			1.17 V	16	63.8	46.6
2	*6435.00	97.5 AV			1.17 V	16	50.9	46.6
3	#12870.00	60.9 PK	88.2	-27.3	1.95 V	183	39.3	21.6
4	#12870.00	47.5 AV	68.2	-20.7	1.95 V	183	25.9	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 105 : 6475 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	107.2 PK			1.78 H	76	60.4	46.8
2	*6475.00	93.7 AV			1.78 H	76	46.9	46.8
3	#12950.00	60.3 PK	88.2	-27.9	2.15 H	169	38.5	21.8
4	#12950.00	46.8 AV	68.2	-21.4	2.15 H	169	25.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	110.6 PK			1.19 V	16	63.8	46.8
2	*6475.00	97.8 AV			1.19 V	16	51.0	46.8
3	#12950.00	60.8 PK	88.2	-27.4	1.99 V	174	39.0	21.8
4	#12950.00	47.6 AV	68.2	-20.6	1.99 V	174	25.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 113 : 6515 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.2 PK			1.77 H	69	60.2	47.0
2	*6515.00	93.4 AV			1.77 H	69	46.4	47.0
3	#13030.00	60.5 PK	88.2	-27.7	2.11 H	159	38.6	21.9
4	#13030.00	46.7 AV	68.2	-21.5	2.11 H	159	24.8	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	110.4 PK			1.11 V	9	63.4	47.0
2	*6515.00	97.8 AV			1.11 V	9	50.8	47.0
3	#13030.00	60.9 PK	88.2	-27.3	1.85 V	169	39.0	21.9
4	#13030.00	47.6 AV	68.2	-20.6	1.85 V	169	25.7	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 117 : 6535 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	107.0 PK			1.70 H	69	59.8	47.2
2	*6535.00	93.5 AV			1.70 H	69	46.3	47.2
3	#13070.00	60.2 PK	88.2	-28.0	2.19 H	170	38.2	22.0
4	#13070.00	46.3 AV	68.2	-21.9	2.19 H	170	24.3	22.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	110.6 PK			1.16 V	12	63.4	47.2
2	*6535.00	97.6 AV			1.16 V	12	50.4	47.2
3	#13070.00	60.9 PK	88.2	-27.3	1.91 V	183	38.9	22.0
4	#13070.00	47.5 AV	68.2	-20.7	1.91 V	183	25.5	22.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 149 : 6695 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	107.4 PK			1.69 H	73	60.0	47.4
2	*6695.00	93.9 AV			1.69 H	73	46.5	47.4
3	13390.00	60.5 PK	74.0	-13.5	2.09 H	181	37.7	22.8
4	13390.00	46.7 AV	54.0	-7.3	2.09 H	181	23.9	22.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6695.00	110.8 PK			1.18 V	20	63.4	47.4
2	*6695.00	97.6 AV			1.18 V	20	50.2	47.4
3	13390.00	60.7 PK	74.0	-13.3	1.99 V	172	37.9	22.8
4	13390.00	47.5 AV	54.0	-6.5	1.99 V	172	24.7	22.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT20)	Channel	CH 181 : 6855 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	107.1 PK			1.79 H	60	59.7	47.4
2	*6855.00	94.0 AV			1.79 H	60	46.6	47.4
3	#13710.00	60.2 PK	88.2	-28.0	2.25 H	159	36.7	23.5
4	#13710.00	46.3 AV	68.2	-21.9	2.25 H	159	22.8	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	110.6 PK			1.12 V	13	63.2	47.4
2	*6855.00	97.7 AV			1.12 V	13	50.3	47.4
3	#13710.00	60.8 PK	88.2	-27.4	1.90 V	181	37.3	23.5
4	#13710.00	47.5 AV	68.2	-20.7	1.90 V	181	24.0	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 185 : 6875 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	107.2 PK			1.73 H	69	59.6	47.6
2	*6875.00	93.8 AV			1.73 H	69	46.2	47.6
3	#13750.00	60.5 PK	88.2	-27.7	2.19 H	155	36.9	23.6
4	#13750.00	46.7 AV	68.2	-21.5	2.19 H	155	23.1	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	110.6 PK			1.19 V	15	63.0	47.6
2	*6875.00	97.9 AV			1.19 V	15	50.3	47.6
3	#13750.00	60.9 PK	88.2	-27.3	1.89 V	177	37.3	23.6
4	#13750.00	47.8 AV	68.2	-20.4	1.89 V	177	24.2	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 209 : 6995 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	107.4 PK			1.81 H	60	58.7	48.7
2	*6995.00	94.2 AV			1.81 H	60	45.5	48.7
3	#13990.00	60.8 PK	88.2	-27.4	2.26 H	179	36.3	24.5
4	#13990.00	47.0 AV	68.2	-21.2	2.26 H	179	22.5	24.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6995.00	110.4 PK			1.10 V	14	61.7	48.7
2	*6995.00	97.9 AV			1.10 V	14	49.2	48.7
3	#13990.00	62.6 PK	88.2	-25.6	1.99 V	170	38.1	24.5
4	#13990.00	49.1 AV	68.2	-19.1	1.99 V	170	24.6	24.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 229 : 7095 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	107.3 PK			1.79 H	64	58.7	48.6
2	*7095.00	93.8 AV			1.79 H	64	45.2	48.6
3	#14190.00	60.7 PK	88.2	-27.5	2.28 H	174	35.8	24.9
4	#14190.00	46.8 AV	68.2	-21.4	2.28 H	174	21.9	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	110.6 PK			1.10 V	18	62.0	48.6
2	*7095.00	97.8 AV			1.10 V	18	49.2	48.6
3	#14190.00	61.4 PK	88.2	-26.8	1.94 V	180	36.5	24.9
4	#14190.00	48.0 AV	68.2	-20.2	1.94 V	180	23.1	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT20)	Channel	CH 233 : 7115 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	89.8 PK			1.74 H	63	41.0	48.8
2	*7115.00	77.4 AV			1.74 H	63	28.6	48.8
3	#7125.00	78.9 PK	88.2	-9.3	1.74 H	63	62.0	16.9
4	#7125.00	64.4 AV	68.2	-3.8	1.74 H	63	47.5	16.9
5	#14230.00	60.9 PK	88.2	-27.3	2.12 H	153	36.0	24.9
6	#14230.00	47.3 AV	68.2	-20.9	2.12 H	153	22.4	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	93.0 PK			1.16 V	11	44.2	48.8
2	*7115.00	80.4 AV			1.16 V	11	31.6	48.8
3	#7125.00	83.1 PK	88.2	-5.1	1.16 V	11	66.2	16.9
4	#7125.00	68.1 AV	68.2	-0.1	1.16 V	11	51.2	16.9
5	#14230.00	61.9 PK	88.2	-26.3	1.89 V	174	37.0	24.9
6	#14230.00	48.8 AV	68.2	-19.4	1.89 V	174	23.9	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 35 : 6125 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.0 PK	88.2	-25.2	1.79 H	55	48.9	14.1
2	#5925.00	49.0 AV	68.2	-19.2	1.79 H	55	34.9	14.1
3	*6125.00	107.1 PK			1.79 H	55	61.8	45.3
4	*6125.00	93.9 AV			1.79 H	55	48.6	45.3
5	12250.00	60.4 PK	74.0	-13.6	2.23 H	169	39.4	21.0
6	12250.00	46.5 AV	54.0	-7.5	2.23 H	169	25.5	21.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	1.20 V	15	49.8	14.1
2	#5925.00	49.7 AV	68.2	-18.5	1.20 V	15	35.6	14.1
3	*6125.00	110.4 PK			1.22 V	6	65.1	45.3
4	*6125.00	97.8 AV			1.22 V	6	52.5	45.3
5	12250.00	60.9 PK	74.0	-13.1	1.90 V	177	39.9	21.0
6	12250.00	47.7 AV	54.0	-6.3	1.90 V	177	26.7	21.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 59 : 6245 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	107.3 PK			1.77 H	52	61.6	45.7
2	*6245.00	93.7 AV			1.77 H	52	48.0	45.7
3	12490.00	60.2 PK	74.0	-13.8	2.26 H	159	39.5	20.7
4	12490.00	46.7 AV	54.0	-7.3	2.26 H	159	26.0	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	110.5 PK			1.19 V	17	64.8	45.7
2	*6245.00	97.5 AV			1.19 V	17	51.8	45.7
3	12490.00	60.7 PK	74.0	-13.3	1.99 V	175	40.0	20.7
4	12490.00	47.6 AV	54.0	-6.4	1.99 V	175	26.9	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT40)	Channel	CH 91 : 6405 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	107.2 PK			1.81 H	55	60.6	46.6
2	*6405.00	93.4 AV			1.81 H	55	46.8	46.6
3	#12810.00	60.3 PK	88.2	-27.9	2.24 H	163	38.7	21.6
4	#12810.00	46.7 AV	68.2	-21.5	2.24 H	163	25.1	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	110.5 PK			1.19 V	14	63.9	46.6
2	*6405.00	97.2 AV			1.19 V	14	50.6	46.6
3	#12810.00	60.7 PK	88.2	-27.5	1.94 V	177	39.1	21.6
4	#12810.00	47.6 AV	68.2	-20.6	1.94 V	177	26.0	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 99 : 6445 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	107.3 PK			1.71 H	63	60.7	46.6
2	*6445.00	93.7 AV			1.71 H	63	47.1	46.6
3	#12890.00	60.1 PK	88.2	-28.1	2.15 H	163	38.5	21.6
4	#12890.00	46.8 AV	68.2	-21.4	2.15 H	163	25.2	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	110.4 PK			1.21 V	10	63.8	46.6
2	*6445.00	97.3 AV			1.21 V	10	50.7	46.6
3	#12890.00	60.9 PK	88.2	-27.3	1.99 V	172	39.3	21.6
4	#12890.00	47.6 AV	68.2	-20.6	1.99 V	172	26.0	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 107 : 6485 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	107.3 PK			1.77 H	56	60.4	46.9
2	*6485.00	93.5 AV			1.77 H	56	46.6	46.9
3	#12970.00	60.9 PK	88.2	-27.3	2.23 H	160	39.1	21.8
4	#12970.00	46.8 AV	68.2	-21.4	2.23 H	160	25.0	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.5 PK			1.16 V	15	63.6	46.9
2	*6485.00	97.4 AV			1.16 V	15	50.5	46.9
3	#12970.00	60.9 PK	88.2	-27.3	1.90 V	163	39.1	21.8
4	#12970.00	47.8 AV	68.2	-20.4	1.90 V	163	26.0	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 115 : 6525 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	107.2 PK			1.84 H	62	60.2	47.0
2	*6525.00	93.8 AV			1.84 H	62	46.8	47.0
3	#13050.00	60.4 PK	88.2	-27.8	2.23 H	163	38.5	21.9
4	#13050.00	46.8 AV	68.2	-21.4	2.23 H	163	24.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	110.4 PK			1.25 V	17	63.4	47.0
2	*6525.00	97.2 AV			1.25 V	17	50.2	47.0
3	#13050.00	60.8 PK	88.2	-27.4	1.99 V	170	38.9	21.9
4	#13050.00	47.9 AV	68.2	-20.3	1.99 V	170	26.0	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 123 : 6565 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	107.3 PK			1.81 H	67	60.0	47.3
2	*6565.00	93.8 AV			1.81 H	67	46.5	47.3
3	#13130.00	60.4 PK	88.2	-27.8	2.20 H	163	38.3	22.1
4	#13130.00	46.7 AV	68.2	-21.5	2.20 H	163	24.6	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	110.4 PK			1.18 V	10	63.1	47.3
2	*6565.00	97.2 AV			1.18 V	10	49.9	47.3
3	#13130.00	60.7 PK	88.2	-27.5	1.90 V	178	38.6	22.1
4	#13130.00	47.6 AV	68.2	-20.6	1.90 V	178	25.5	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 155 : 6725 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	107.3 PK			1.74 H	53	59.8	47.5
2	*6725.00	93.5 AV			1.74 H	53	46.0	47.5
3	#13450.00	60.5 PK	88.2	-27.7	2.15 H	169	37.3	23.2
4	#13450.00	46.9 AV	68.2	-21.3	2.15 H	169	23.7	23.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	110.5 PK			1.21 V	13	63.0	47.5
2	*6725.00	97.4 AV			1.21 V	13	49.9	47.5
3	#13450.00	61.1 PK	88.2	-27.1	1.99 V	178	37.9	23.2
4	#13450.00	47.9 AV	68.2	-20.3	1.99 V	178	24.7	23.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 179 : 6845 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	107.2 PK			1.89 H	55	59.8	47.4
2	*6845.00	93.6 AV			1.89 H	55	46.2	47.4
3	#13690.00	60.7 PK	88.2	-27.5	2.12 H	161	37.2	23.5
4	#13690.00	47.3 AV	68.2	-20.9	2.12 H	161	23.8	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	110.5 PK			1.25 V	19	63.1	47.4
2	*6845.00	97.4 AV			1.25 V	19	50.0	47.4
3	#13690.00	61.5 PK	88.2	-26.7	1.90 V	177	38.0	23.5
4	#13690.00	48.3 AV	68.2	-19.9	1.90 V	177	24.8	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 187 : 6885 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	107.2 PK			1.77 H	60	59.5	47.7
2	*6885.00	93.8 AV			1.77 H	60	46.1	47.7
3	#13770.00	60.1 PK	88.2	-28.1	2.16 H	168	36.3	23.8
4	#13770.00	46.8 AV	68.2	-21.4	2.16 H	168	23.0	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	110.4 PK			1.23 V	16	62.7	47.7
2	*6885.00	97.4 AV			1.23 V	16	49.7	47.7
3	#13770.00	61.0 PK	88.2	-27.2	1.98 V	177	37.2	23.8
4	#13770.00	48.2 AV	68.2	-20.0	1.98 V	177	24.4	23.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 211 : 7005 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	107.2 PK			1.72 H	61	58.4	48.8
2	*7005.00	93.8 AV			1.72 H	61	45.0	48.8
3	#14010.00	60.8 PK	88.2	-27.4	2.31 H	165	36.2	24.6
4	#14010.00	47.8 AV	68.2	-20.4	2.31 H	165	23.2	24.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	110.5 PK			1.25 V	18	61.7	48.8
2	*7005.00	97.4 AV			1.25 V	18	48.6	48.8
3	#14010.00	61.9 PK	88.2	-26.3	1.90 V	170	37.3	24.6
4	#14010.00	48.2 AV	68.2	-20.0	1.90 V	170	23.6	24.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT40)	Channel	CH 227 : 7085 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	106.8 PK			1.89 H	55	58.2	48.6
2	*7085.00	93.7 AV			1.89 H	55	45.1	48.6
3	#7125.00	62.5 PK	88.2	-25.7	1.89 H	55	45.6	16.9
4	#7125.00	44.5 AV	68.2	-23.7	1.89 H	55	27.6	16.9
5	#14170.00	61.3 PK	88.2	-26.9	2.25 H	164	36.4	24.9
6	#14170.00	47.9 AV	68.2	-20.3	2.25 H	164	23.0	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	110.7 PK			1.22 V	8	62.1	48.6
2	*7085.00	97.5 AV			1.22 V	8	48.9	48.6
3	#7125.00	61.0 PK	88.2	-27.2	1.22 V	8	44.1	16.9
4	#7125.00	46.3 AV	68.2	-21.9	1.22 V	8	29.4	16.9
5	#14170.00	62.1 PK	88.2	-26.1	1.88 V	170	37.2	24.9
6	#14170.00	48.9 AV	68.2	-19.3	1.88 V	170	24.0	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 39 : 6145 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.1 PK	88.2	-25.1	1.80 H	55	49.0	14.1
2	#5925.00	49.4 AV	68.2	-18.8	1.80 H	55	35.3	14.1
3	*6145.00	107.3 PK			1.80 H	55	62.1	45.2
4	*6145.00	93.8 AV			1.80 H	55	48.6	45.2
5	12290.00	60.3 PK	74.0	-13.7	2.23 H	160	39.4	20.9
6	12290.00	46.8 AV	54.0	-7.2	2.23 H	160	25.9	20.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.9 PK	88.2	-24.3	1.22 V	8	49.8	14.1
2	#5925.00	49.8 AV	68.2	-18.4	1.22 V	8	35.7	14.1
3	*6145.00	110.3 PK			1.22 V	8	65.1	45.2
4	*6145.00	97.7 AV			1.22 V	8	52.5	45.2
5	12290.00	60.9 PK	74.0	-13.1	1.96 V	178	40.0	20.9
6	12290.00	47.8 AV	54.0	-6.2	1.96 V	178	26.9	20.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 55 : 6225 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	107.4 PK			1.77 H	64	61.8	45.6
2	*6225.00	93.4 AV			1.77 H	64	47.8	45.6
3	12450.00	60.3 PK	74.0	-13.7	2.13 H	166	39.7	20.6
4	12450.00	46.9 AV	54.0	-7.1	2.13 H	166	26.3	20.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.3 PK			1.19 V	15	64.7	45.6
2	*6225.00	97.5 AV			1.19 V	15	51.9	45.6
3	12450.00	60.9 PK	74.0	-13.1	1.88 V	169	40.3	20.6
4	12450.00	47.6 AV	54.0	-6.4	1.88 V	169	27.0	20.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 87 : 6385 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	107.4 PK			1.81 H	63	60.8	46.6
2	*6385.00	93.5 AV			1.81 H	63	46.9	46.6
3	#12770.00	60.4 PK	88.2	-27.8	2.19 H	166	38.9	21.5
4	#12770.00	46.7 AV	68.2	-21.5	2.19 H	166	25.2	21.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	110.3 PK			1.28 V	12	63.7	46.6
2	*6385.00	97.4 AV			1.28 V	12	50.8	46.6
3	#12770.00	60.7 PK	88.2	-27.5	1.99 V	170	39.2	21.5
4	#12770.00	47.6 AV	68.2	-20.6	1.99 V	170	26.1	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 103 : 6465 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	107.2 PK			1.89 H	50	60.5	46.7
2	*6465.00	93.6 AV			1.89 H	50	46.9	46.7
3	#12930.00	60.4 PK	88.2	-27.8	2.20 H	163	38.6	21.8
4	#12930.00	46.7 AV	68.2	-21.5	2.20 H	163	24.9	21.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.5 PK			1.18 V	19	63.8	46.7
2	*6465.00	97.6 AV			1.18 V	19	50.9	46.7
3	#12930.00	60.8 PK	88.2	-27.4	1.88 V	173	39.0	21.8
4	#12930.00	47.6 AV	68.2	-20.6	1.88 V	173	25.8	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 119 : 6545 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	107.2 PK			1.88 H	54	60.0	47.2
2	*6545.00	93.8 AV			1.88 H	54	46.6	47.2
3	#13090.00	60.4 PK	88.2	-27.8	2.12 H	163	38.3	22.1
4	#13090.00	46.7 AV	68.2	-21.5	2.12 H	163	24.6	22.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	110.3 PK			1.24 V	10	63.1	47.2
2	*6545.00	97.4 AV			1.24 V	10	50.2	47.2
3	#13090.00	60.9 PK	88.2	-27.3	1.88 V	190	38.8	22.1
4	#13090.00	47.6 AV	68.2	-20.6	1.88 V	190	25.5	22.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 135 : 6625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	107.2 PK			1.75 H	63	59.9	47.3
2	*6625.00	93.7 AV			1.75 H	63	46.4	47.3
3	13250.00	60.4 PK	74.0	-13.6	2.20 H	163	37.9	22.5
4	13250.00	46.7 AV	54.0	-7.3	2.20 H	163	24.2	22.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.3 PK			1.15 V	8	63.0	47.3
2	*6625.00	97.3 AV			1.15 V	8	50.0	47.3
3	13250.00	60.9 PK	74.0	-13.1	1.99 V	178	38.4	22.5
4	13250.00	47.7 AV	54.0	-6.3	1.99 V	178	25.2	22.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT80)	Channel	CH 151 : 6705 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	107.4 PK			1.80 H	55	59.9	47.5
2	*6705.00	93.7 AV			1.80 H	55	46.2	47.5
3	#13410.00	60.5 PK	88.2	-27.7	2.21 H	163	37.6	22.9
4	#13410.00	46.7 AV	68.2	-21.5	2.21 H	163	23.8	22.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.4 PK			1.26 V	20	62.9	47.5
2	*6705.00	97.8 AV			1.26 V	20	50.3	47.5
3	#13410.00	60.9 PK	88.2	-27.3	1.86 V	180	38.0	22.9
4	#13410.00	47.9 AV	68.2	-20.3	1.86 V	180	25.0	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 167 : 6785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	107.0 PK			1.75 H	69	59.6	47.4
2	*6785.00	93.5 AV			1.75 H	69	46.1	47.4
3	#13570.00	60.8 PK	88.2	-27.4	2.31 H	169	37.2	23.6
4	#13570.00	47.0 AV	68.2	-21.2	2.31 H	169	23.4	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.3 PK			1.14 V	10	62.9	47.4
2	*6785.00	97.3 AV			1.14 V	10	49.9	47.4
3	#13570.00	60.8 PK	88.2	-27.4	1.99 V	162	37.2	23.6
4	#13570.00	47.8 AV	68.2	-20.4	1.99 V	162	24.2	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 183 : 6865 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	107.3 PK			1.77 H	54	59.8	47.5
2	*6865.00	93.9 AV			1.77 H	54	46.4	47.5
3	#13730.00	60.5 PK	88.2	-27.7	2.16 H	170	36.9	23.6
4	#13730.00	46.9 AV	68.2	-21.3	2.16 H	170	23.3	23.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.4 PK			1.09 V	6	62.9	47.5
2	*6865.00	97.5 AV			1.09 V	6	50.0	47.5
3	#13730.00	60.9 PK	88.2	-27.3	1.99 V	168	37.3	23.6
4	#13730.00	47.8 AV	68.2	-20.4	1.99 V	168	24.2	23.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 199 : 6945 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	107.2 PK			1.77 H	55	58.9	48.3
2	*6945.00	93.8 AV			1.77 H	55	45.5	48.3
3	#13890.00	60.8 PK	88.2	-27.4	2.14 H	178	36.9	23.9
4	#13890.00	47.2 AV	68.2	-21.0	2.14 H	178	23.3	23.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	110.5 PK			1.20 V	15	62.2	48.3
2	*6945.00	97.4 AV			1.20 V	15	49.1	48.3
3	#13890.00	61.3 PK	88.2	-26.9	1.99 V	170	37.4	23.9
4	#13890.00	48.2 AV	68.2	-20.0	1.99 V	170	24.3	23.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT80)	Channel	CH 215 : 7025 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	107.6 PK			1.78 H	58	58.9	48.7
2	*7025.00	94.1 AV			1.78 H	58	45.4	48.7
3	#7125.00	62.8 PK	88.2	-25.4	1.78 H	58	45.9	16.9
4	#7125.00	44.7 AV	68.2	-23.5	1.78 H	58	27.8	16.9
5	#14050.00	60.9 PK	88.2	-27.3	2.24 H	165	36.2	24.7
6	#14050.00	47.0 AV	68.2	-21.2	2.24 H	165	22.3	24.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.0 PK			1.18 V	9	62.3	48.7
2	*7025.00	98.1 AV			1.18 V	9	49.4	48.7
3	#7125.00	66.1 PK	88.2	-22.1	1.18 V	9	49.2	16.9
4	#7125.00	46.5 AV	68.2	-21.7	1.18 V	9	29.6	16.9
5	#14050.00	61.5 PK	88.2	-26.7	1.99 V	170	36.8	24.7
6	#14050.00	48.1 AV	68.2	-20.1	1.99 V	170	23.4	24.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 47 : 6185 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.3 PK	88.2	-24.9	1.77 H	60	49.2	14.1
2	#5925.00	49.4 AV	68.2	-18.8	1.77 H	60	35.3	14.1
3	*6185.00	106.4 PK			1.77 H	60	61.0	45.4
4	*6185.00	93.7 AV			1.77 H	60	48.3	45.4
5	12370.00	60.3 PK	74.0	-13.7	2.24 H	160	39.6	20.7
6	12370.00	46.8 AV	54.0	-7.2	2.24 H	160	26.1	20.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.8 PK	88.2	-24.4	1.18 V	12	49.7	14.1
2	#5925.00	49.9 AV	68.2	-18.3	1.18 V	12	35.8	14.1
3	*6185.00	110.0 PK			1.13 V	13	64.6	45.4
4	*6185.00	97.2 AV			1.13 V	13	51.8	45.4
5	12370.00	60.8 PK	74.0	-13.2	1.99 V	180	40.1	20.7
6	12370.00	47.6 AV	54.0	-6.4	1.99 V	180	26.9	20.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 79 : 6345 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	107.1 PK			1.70 H	66	60.6	46.5
2	*6345.00	93.8 AV			1.70 H	66	47.3	46.5
3	12690.00	60.5 PK	74.0	-13.5	2.18 H	163	39.2	21.3
4	12690.00	46.9 AV	54.0	-7.1	2.18 H	163	25.6	21.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	110.4 PK			1.18 V	14	63.9	46.5
2	*6345.00	97.3 AV			1.18 V	14	50.8	46.5
3	12690.00	60.9 PK	74.0	-13.1	1.98 V	170	39.6	21.3
4	12690.00	47.6 AV	54.0	-6.4	1.98 V	170	26.3	21.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 111 : 6505 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	107.2 PK			1.79 H	62	60.2	47.0
2	*6505.00	93.8 AV			1.79 H	62	46.8	47.0
3	#13010.00	60.5 PK	88.2	-27.7	2.14 H	178	38.6	21.9
4	#13010.00	46.8 AV	68.2	-21.4	2.14 H	178	24.9	21.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.5 PK			1.19 V	10	63.5	47.0
2	*6505.00	97.3 AV			1.19 V	10	50.3	47.0
3	#13010.00	60.9 PK	88.2	-27.3	1.99 V	168	39.0	21.9
4	#13010.00	47.8 AV	68.2	-20.4	1.99 V	168	25.9	21.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 143 : 6665 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	107.4 PK			1.81 H	64	60.1	47.3
2	*6665.00	93.8 AV			1.81 H	64	46.5	47.3
3	13330.00	60.4 PK	74.0	-13.6	2.13 H	158	37.7	22.7
4	13330.00	46.8 AV	54.0	-7.2	2.13 H	158	24.1	22.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.5 PK			1.20 V	7	63.2	47.3
2	*6665.00	68.4 AV			1.20 V	7	21.1	47.3
3	13330.00	60.9 PK	74.0	-13.1	1.99 V	170	38.2	22.7
4	13330.00	47.8 AV	54.0	-6.2	1.99 V	170	25.1	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11be (EHT160)	Channel	CH 175 : 6825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	107.3 PK			1.74 H	64	59.9	47.4
2	*6825.00	93.8 AV			1.74 H	64	46.4	47.4
3	#13650.00	60.4 PK	88.2	-27.8	2.21 H	163	36.9	23.5
4	#13650.00	46.9 AV	68.2	-21.3	2.21 H	163	23.4	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.4 PK			1.14 V	18	63.0	47.4
2	*6825.00	97.5 AV			1.14 V	18	50.1	47.4
3	#13650.00	61.3 PK	88.2	-26.9	1.99 V	170	37.8	23.5
4	#13650.00	48.1 AV	68.2	-20.1	1.99 V	170	24.6	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT160)	Channel	CH 207 : 6985 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	106.7 PK			1.75 H	61	58.0	48.7
2	*6985.00	93.8 AV			1.75 H	61	45.1	48.7
3	#7125.00	71.5 PK	88.2	-16.7	1.75 H	61	54.6	16.9
4	#7125.00	53.7 AV	68.2	-14.5	1.75 H	61	36.8	16.9
5	#13970.00	61.0 PK	88.2	-27.2	2.25 H	159	36.7	24.3
6	#13970.00	47.2 AV	68.2	-21.0	2.25 H	159	22.9	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.2 PK			1.14 V	13	61.5	48.7
2	*6985.00	97.0 AV			1.14 V	13	48.3	48.7
3	#7125.00	74.3 PK	88.2	-13.9	1.14 V	13	57.4	16.9
4	#7125.00	56.9 AV	68.2	-11.3	1.14 V	13	40.0	16.9
5	#13970.00	61.9 PK	88.2	-26.3	1.90 V	169	37.6	24.3
6	#13970.00	48.4 AV	68.2	-19.8	1.90 V	169	24.1	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 63 : 6265 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.3 PK	88.2	-24.9	1.77 H	56	49.2	14.1
2	#5925.00	49.4 AV	68.2	-18.8	1.77 H	56	35.3	14.1
3	*6265.00	107.3 PK			1.77 H	56	61.5	45.8
4	*6265.00	93.7 AV			1.77 H	56	47.9	45.8
5	12530.00	60.3 PK	74.0	-13.7	2.25 H	163	39.5	20.8
6	12530.00	46.9 AV	54.0	-7.1	2.25 H	163	26.1	20.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	63.7 PK	88.2	-24.5	1.12 V	3	49.6	14.1
2	#5925.00	49.6 AV	68.2	-18.6	1.12 V	3	35.5	14.1
3	*6265.00	109.7 PK			1.12 V	3	63.9	45.8
4	*6265.00	97.1 AV			1.12 V	3	51.3	45.8
5	12530.00	60.8 PK	74.0	-13.2	1.90 V	168	40.0	20.8
6	12530.00	47.4 AV	54.0	-6.6	1.90 V	168	26.6	20.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 95 : 6425 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	107.0 PK			1.78 H	55	60.4	46.6
2	*6425.00	93.7 AV			1.78 H	55	47.1	46.6
3	#12850.00	60.5 PK	88.2	-27.7	2.13 H	165	38.9	21.6
4	#12850.00	46.8 AV	68.2	-21.4	2.13 H	165	25.2	21.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6425.00	110.4 PK			1.12 V	5	63.8	46.6
2	*6425.00	97.3 AV			1.12 V	5	50.7	46.6
3	#12850.00	60.9 PK	88.2	-27.3	1.89 V	177	39.3	21.6
4	#12850.00	47.8 AV	68.2	-20.4	1.89 V	177	26.2	21.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 127 : 6585 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	107.2 PK			1.88 H	56	59.9	47.3
2	*6585.00	93.9 AV			1.88 H	56	46.6	47.3
3	#13170.00	60.5 PK	88.2	-27.7	2.23 H	164	38.2	22.3
4	#13170.00	46.8 AV	68.2	-21.4	2.23 H	164	24.5	22.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6585.00	110.4 PK			1.20 V	19	63.1	47.3
2	*6585.00	97.4 AV			1.20 V	19	50.1	47.3
3	#13170.00	61.0 PK	88.2	-27.2	1.99 V	163	38.7	22.3
4	#13170.00	47.9 AV	68.2	-20.3	1.99 V	163	25.6	22.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 159 : 6745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	107.4 PK			1.77 H	60	59.8	47.6
2	*6745.00	93.7 AV			1.77 H	60	46.1	47.6
3	#13490.00	60.7 PK	88.2	-27.5	2.13 H	160	37.2	23.5
4	#13490.00	47.2 AV	68.2	-21.0	2.13 H	160	23.7	23.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6745.00	110.2 PK			1.12 V	18	62.6	47.6
2	*6745.00	96.8 AV			1.12 V	18	49.2	47.6
3	#13490.00	60.7 PK	88.2	-27.5	1.89 V	175	37.2	23.5
4	#13490.00	47.6 AV	68.2	-20.6	1.89 V	175	24.1	23.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11be (EHT320)	Channel	CH 191 : 6905 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	22°C, 67% RH
Tested By	Luis Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	107.3 PK			1.77 H	58	59.4	47.9
2	*6905.00	94.5 AV			1.77 H	58	46.6	47.9
3	#7125.00	76.5 PK	88.2	-11.7	1.77 H	58	59.6	16.9
4	#7125.00	62.2 AV	68.2	-6.0	1.77 H	58	45.3	16.9
5	7250.00	65.0 PK	74.0	-9.0	1.77 H	58	47.6	17.4
6	7250.00	50.1 AV	54.0	-3.9	1.77 H	58	32.7	17.4
7	#13810.00	61.5 PK	88.2	-26.7	2.24 H	162	37.7	23.8
8	#13810.00	48.3 AV	68.2	-19.9	2.24 H	162	24.5	23.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6905.00	110.6 PK			1.20 V	6	62.7	47.9
2	*6905.00	97.1 AV			1.20 V	6	49.2	47.9
3	#7125.00	79.6 PK	88.2	-8.6	1.20 V	3	62.7	16.9
4	#7125.00	65.1 AV	68.2	-3.1	1.20 V	3	48.2	16.9
5	7250.00	67.7 PK	74.0	-6.3	1.20 V	3	50.3	17.4
6	7250.00	53.8 AV	54.0	-0.2	1.20 V	3	36.4	17.4
7	#13810.00	61.9 PK	88.2	-26.3	1.96 V	170	38.1	23.8
8	#13810.00	48.3 AV	68.2	-19.9	1.96 V	170	24.5	23.8


Remarks:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

NSS2 Plot of Band Edge


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT20) Channel 33

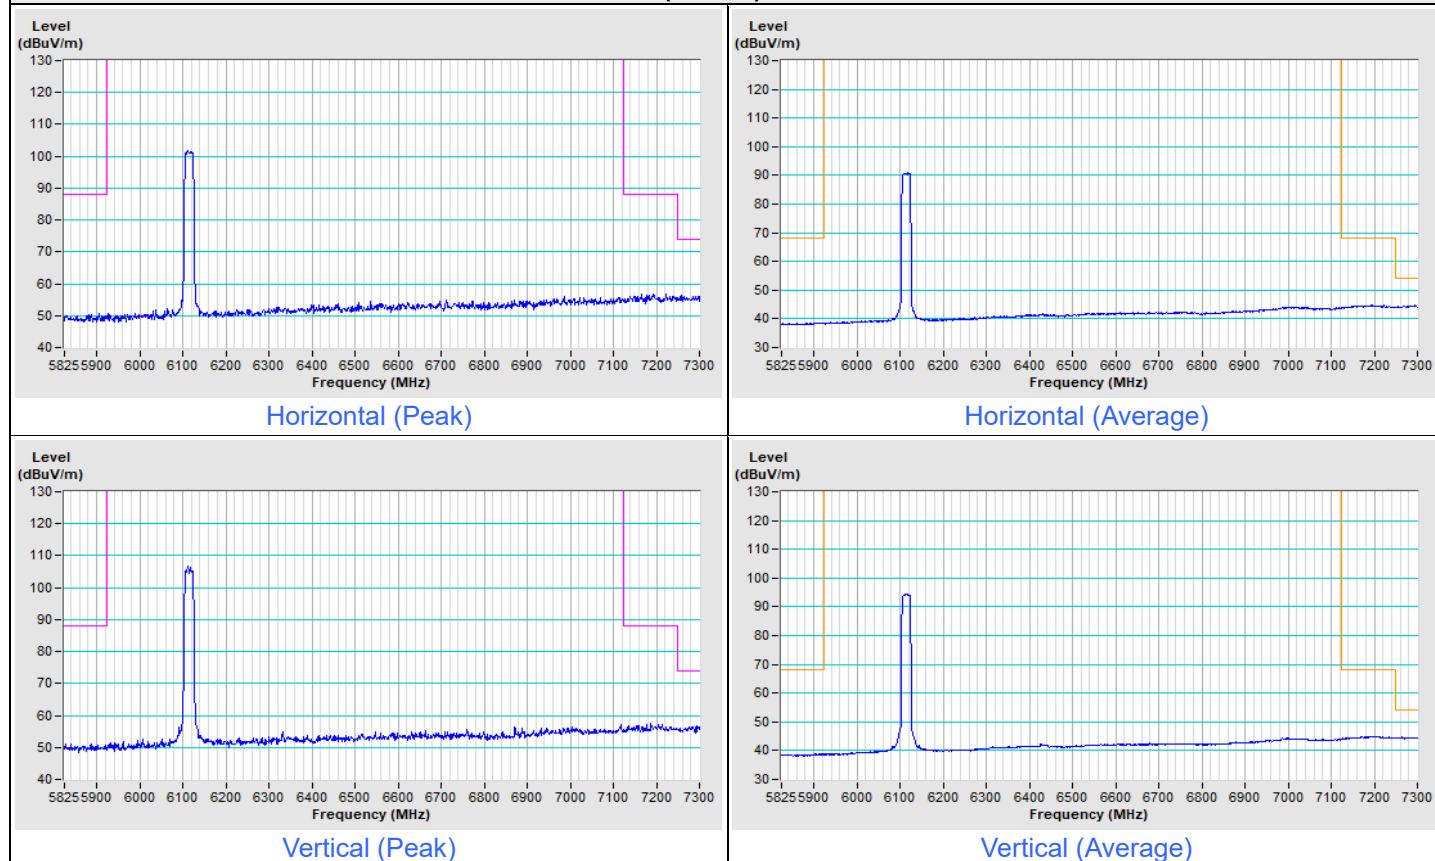


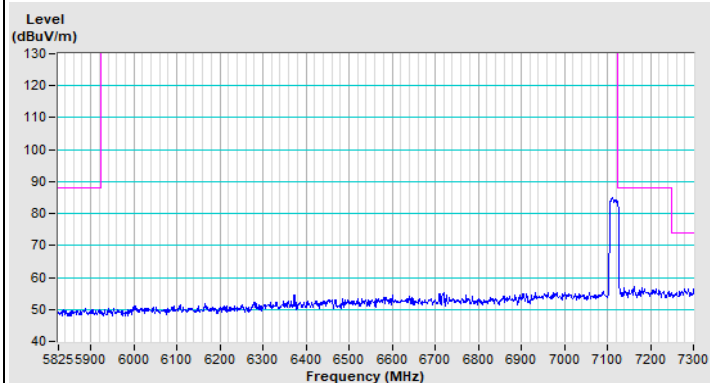802.11be (EHT20) Channel 233


Horizontal (Peak)

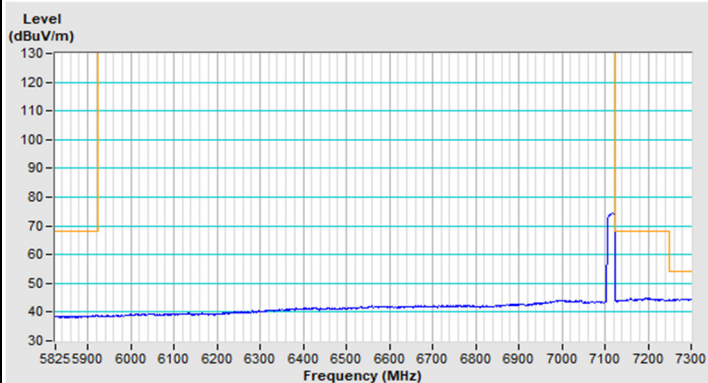

Horizontal (Average)

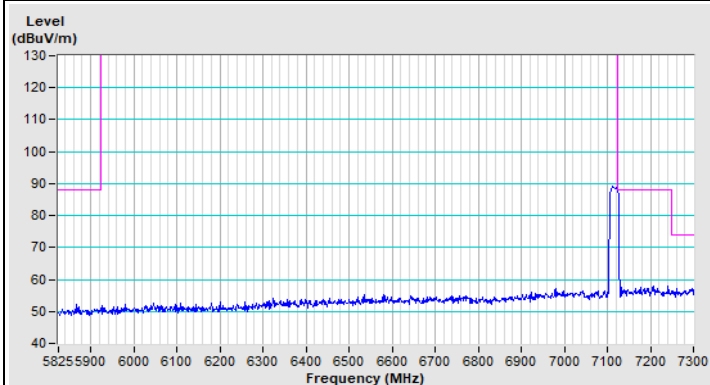


Vertical (Peak)

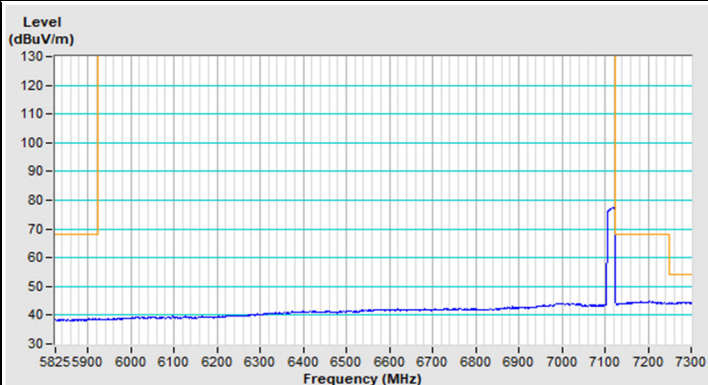


Vertical (Average)


Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--

802.11be (EHT40) Channel 35

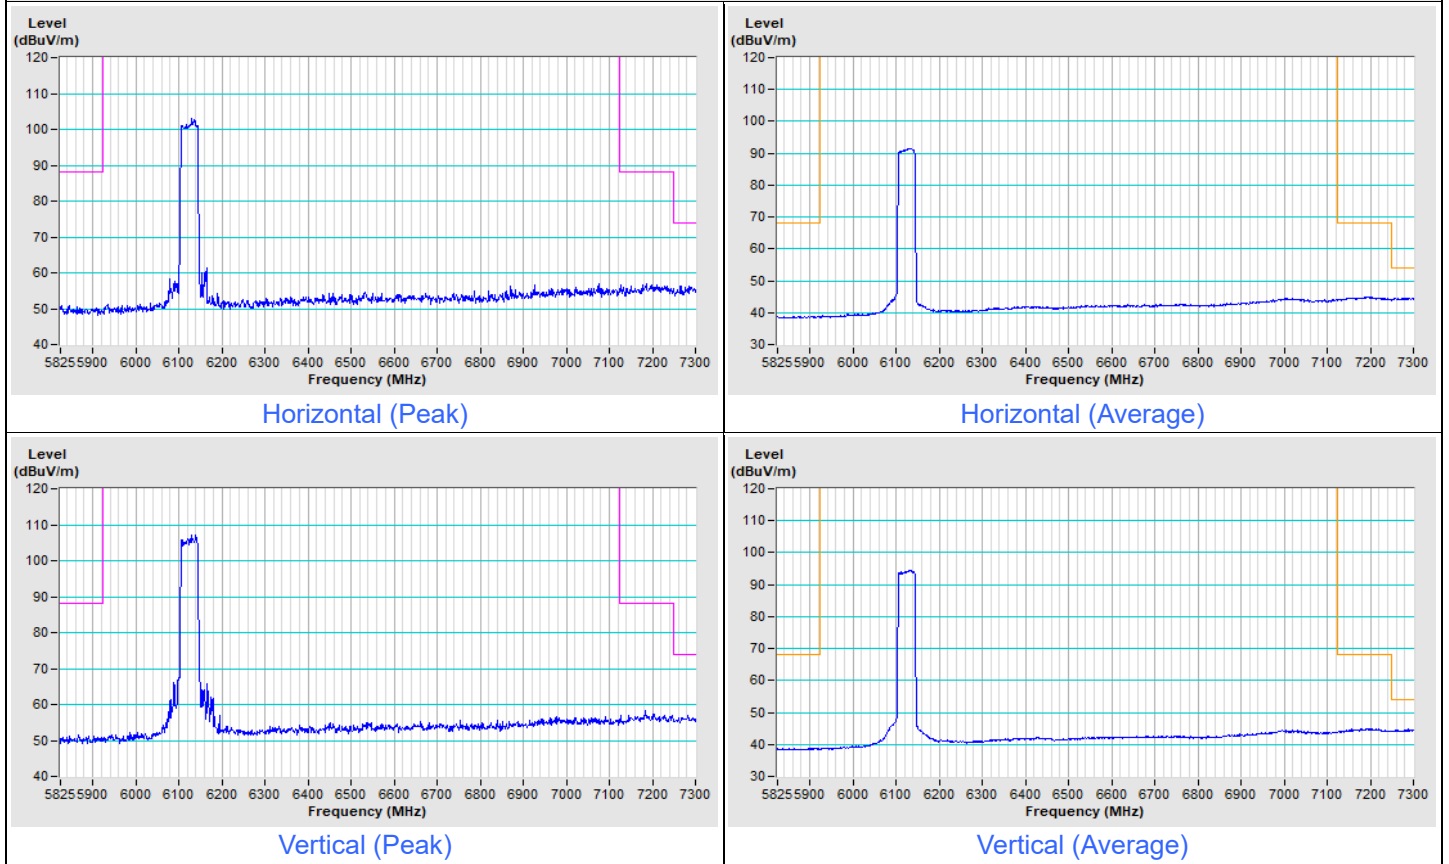


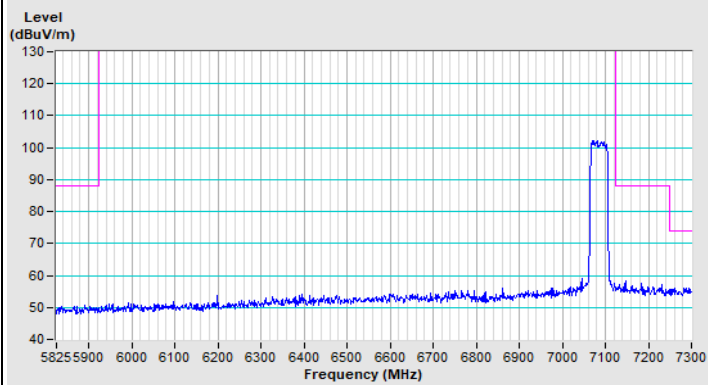802.11be (EHT40) Channel 227


Horizontal (Peak)

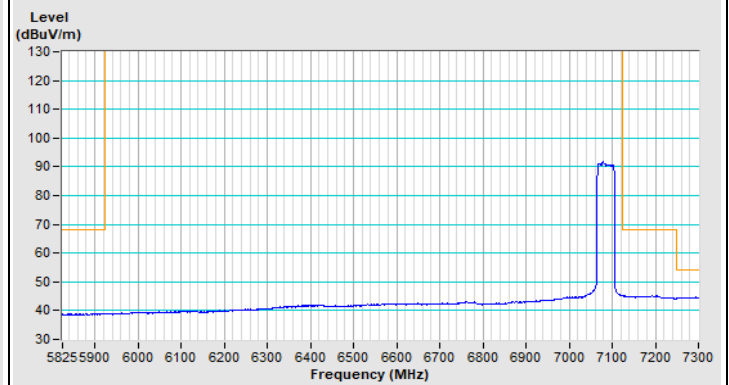

Horizontal (Average)

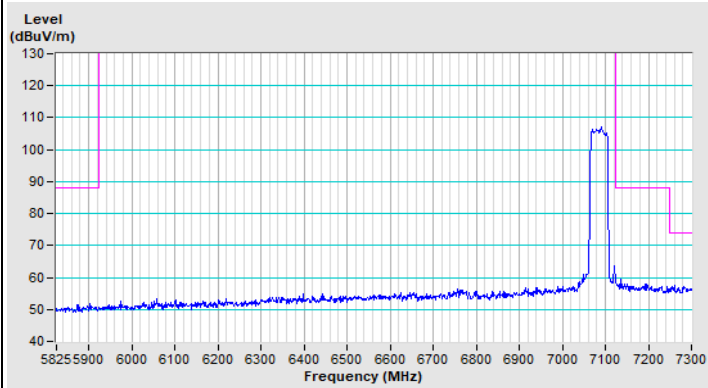


Vertical (Peak)

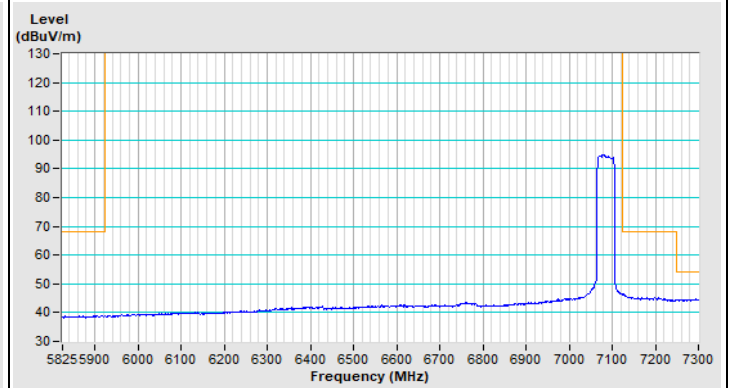


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT80) Channel 39

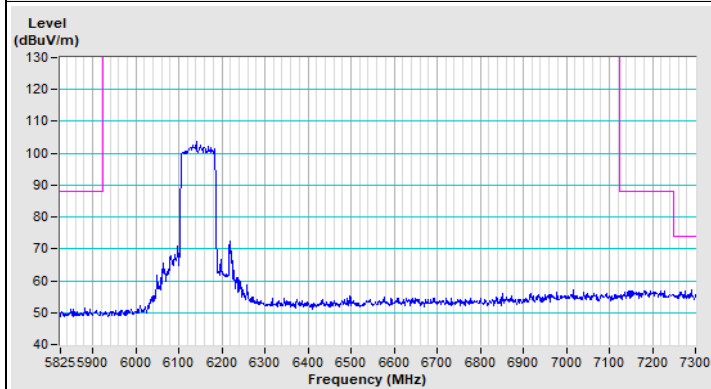


Horizontal (Peak)

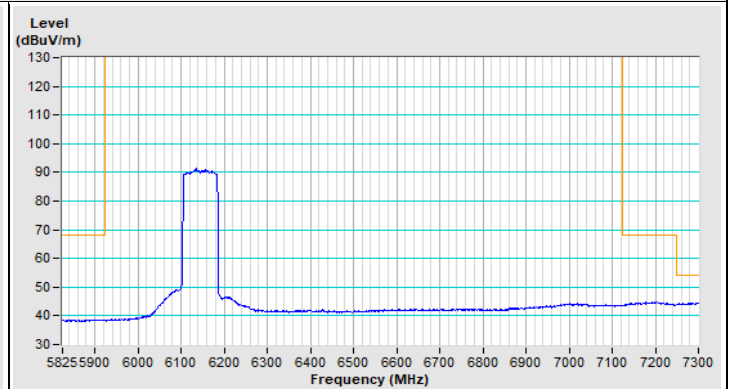

Horizontal (Average)

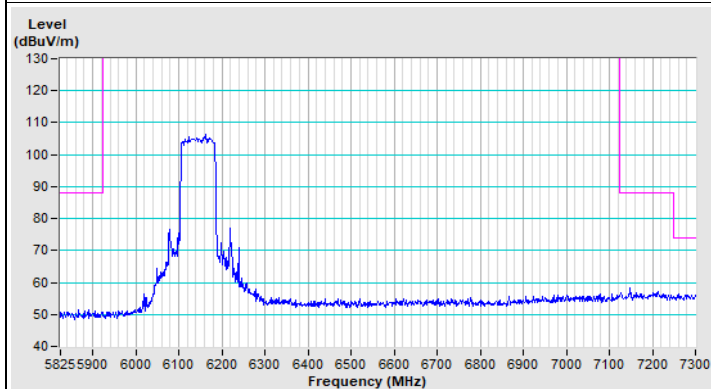


Vertical (Peak)

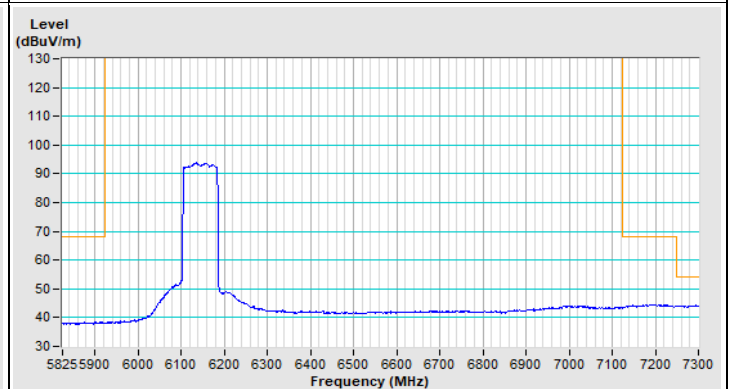


Vertical (Average)


802.11be (EHT80) Channel 215

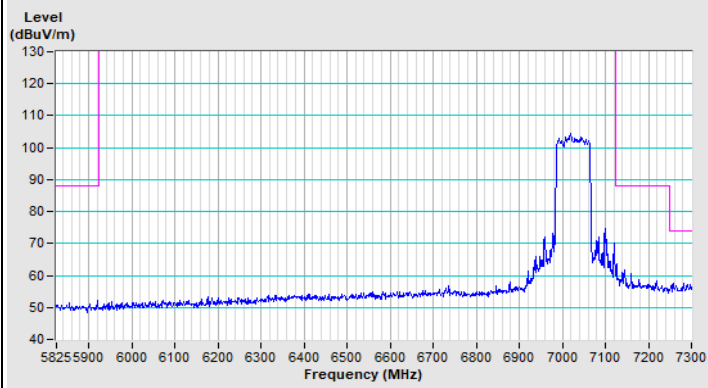


Horizontal (Peak)

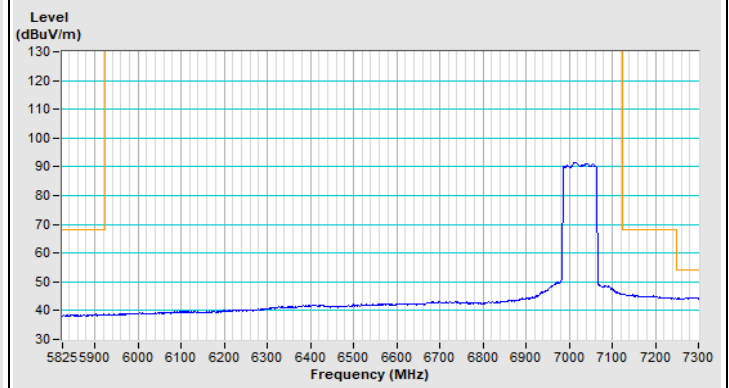

Horizontal (Average)

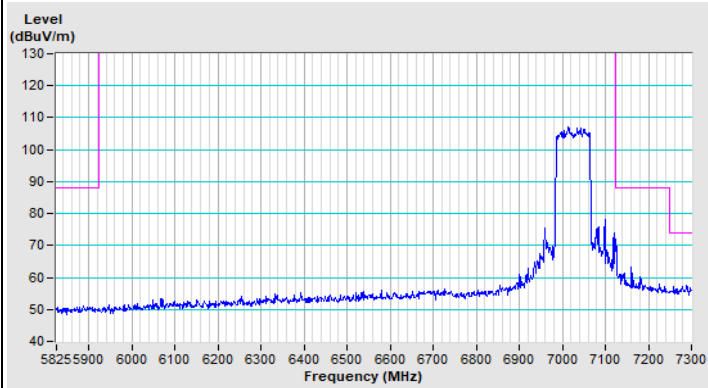


Vertical (Peak)

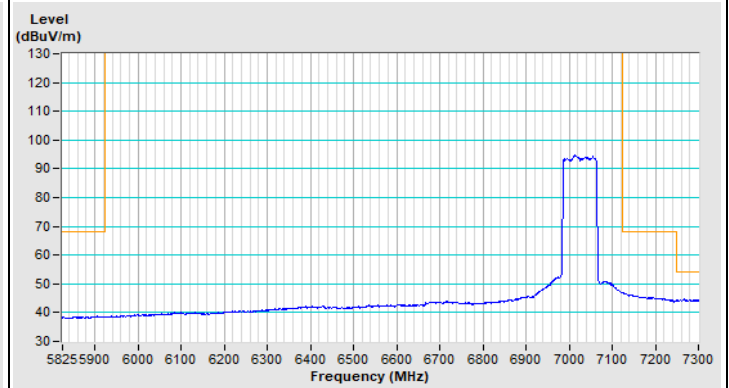


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT160) Channel 47

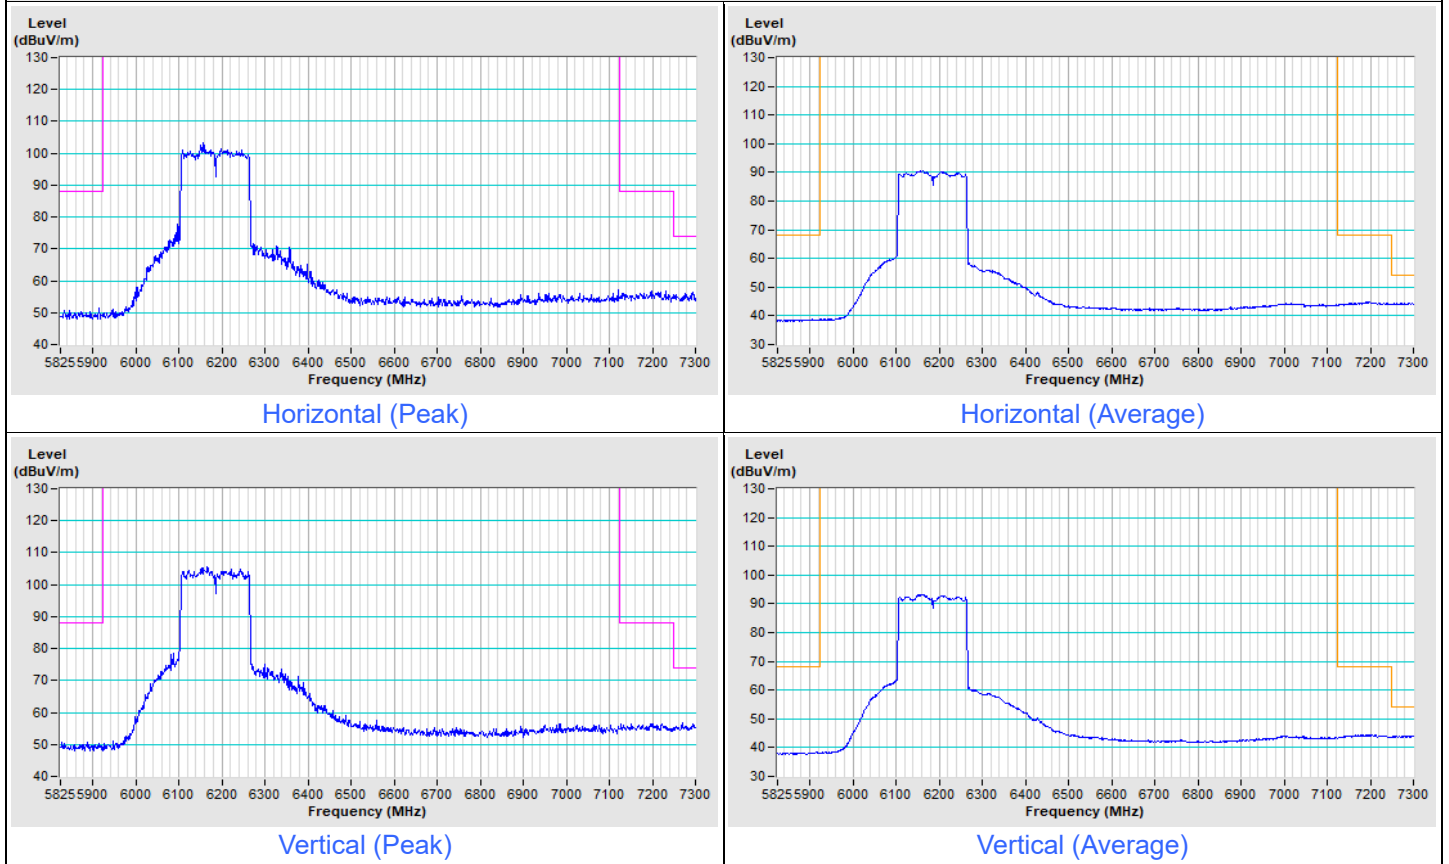


802.11be (EHT160) Channel 207

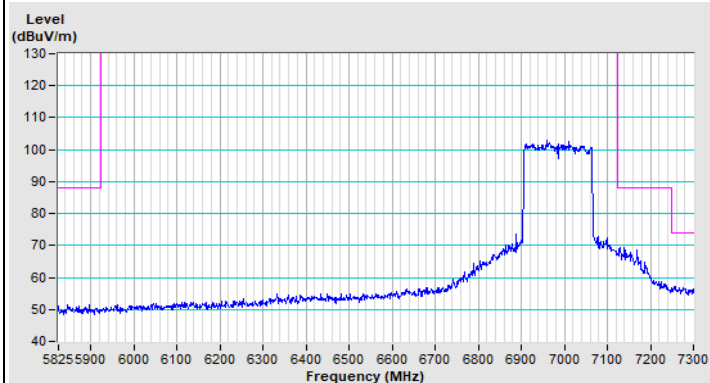


Horizontal (Peak)

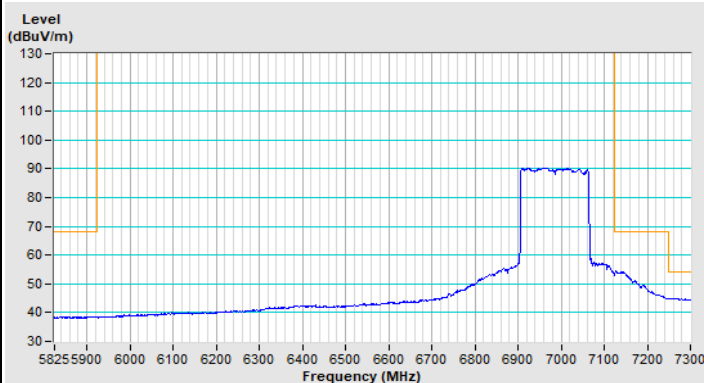

Horizontal (Average)

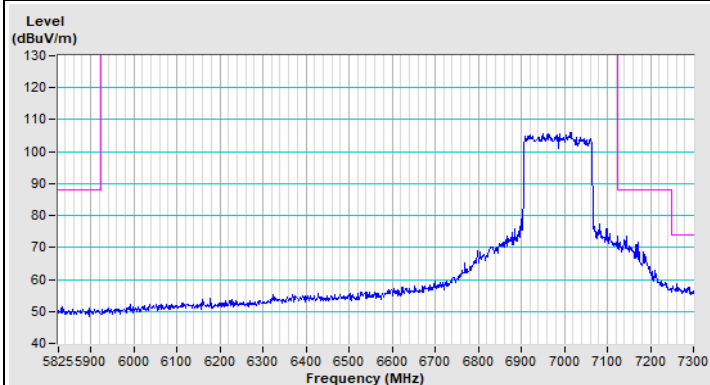


Vertical (Peak)

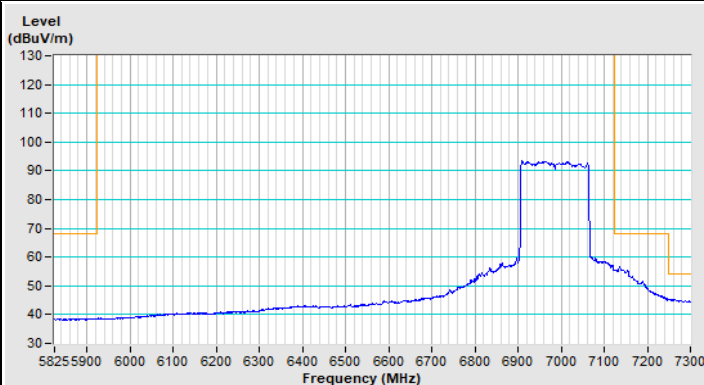


Vertical (Average)

Frequency Range	5.825 GHz ~ 7.3 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 Hz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11be (EHT320) Channel 63

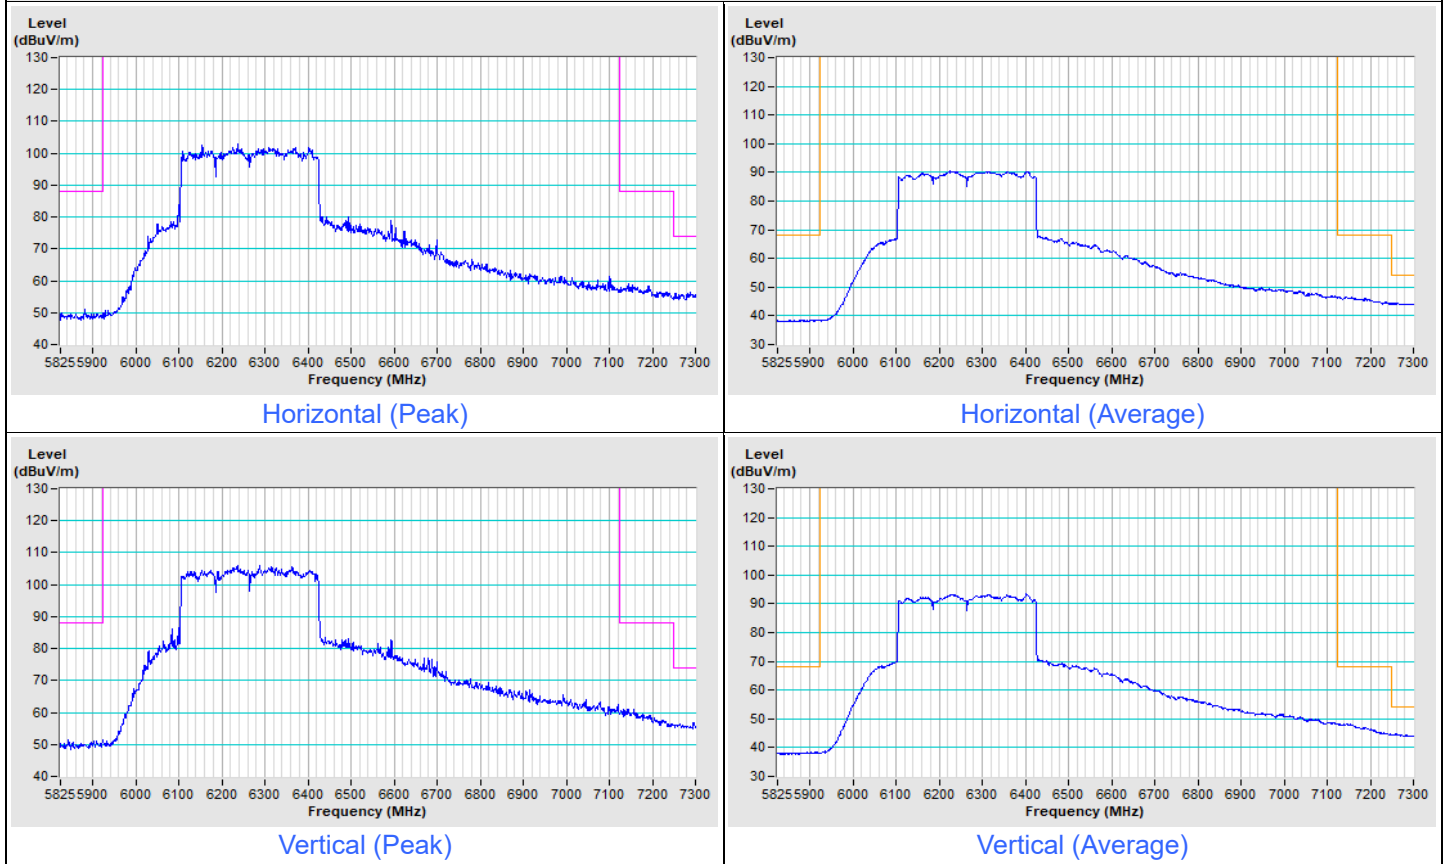


802.11be (EHT320) Channel 191

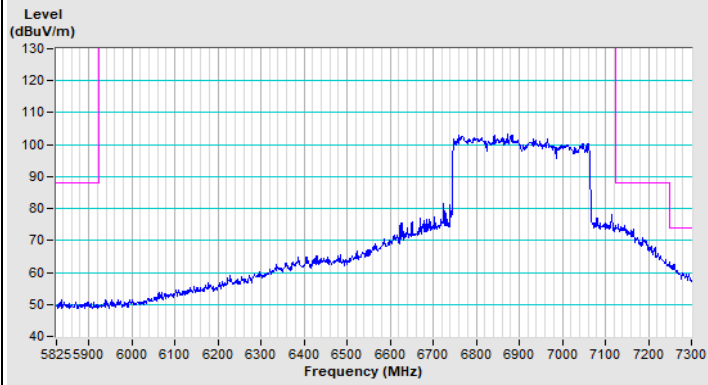


Horizontal (Peak)

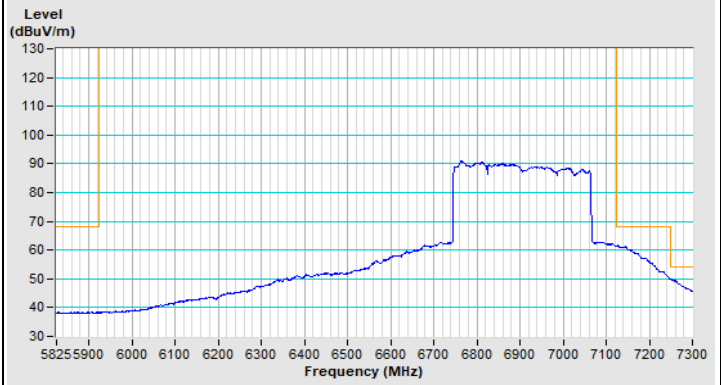

Horizontal (Average)

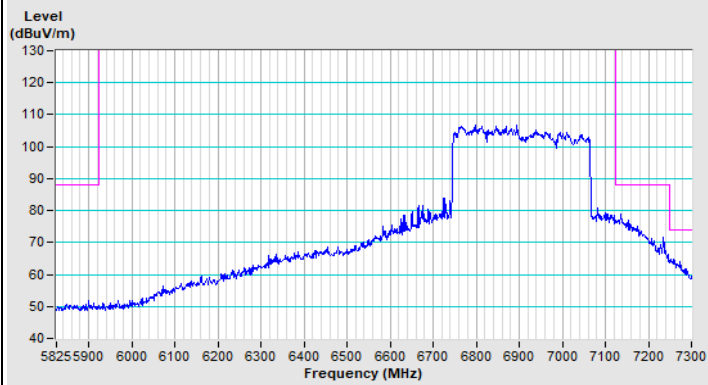

Vertical (Peak)

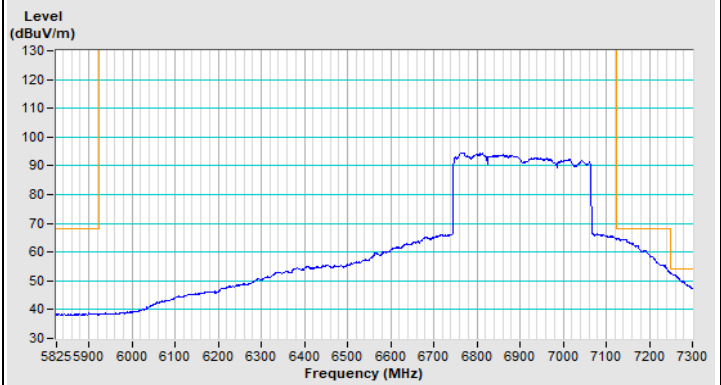

Vertical (Average)

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---