

MEASUREMENT AND TECHNICAL REPORT

CUBIC TRANSPORTATION SYSTEMS 5650 Kearney Mesa Road San Diego, CA 92111

DATE: 28 March 2005

This Report Concerns:	Original Grant: X		Class II Change:	
Equipment Type:	ACT 7, Model 06	1-1311 Rev. B		
Deferred grant requested per 47 0.457(d)(1)(ii)?	CFR	Yes: Defer until:	No: X	
Company Name agrees to notify Commission by: of the intended date of announc date.		N/A duct so that the g	grant can be issued on that	
Transition Rules Request per 15	5.37? Yes:	No: X*		
(*) FCC Part 15, Paragraph(s) 15.2	209(a), 15.225(a),	15.225(e)		
Report Prepared b	y:	TÜV AMERICA, 10040 Mesa Rin San Diego, CA 9 Phone: 858 678 Fax: 858 546	n Road 92121-2912 1400	



TABLE OF CONTENTS

	Pages
GENERAL INFORMATION	3 - 9
1.1 Product Description	3 - 8
1.2 Related Submittal Grant	9
1.3 Tested System Details	9
1.4 Test Methodology	9
1.5 Test Facility	9
SYSTEM TEST CONFIGURATION	10
2.1 Justification	10
2.2 EUT Exercise Software	10
2.3 Special Accessories	10
2.4 Equipment Modifications	10
2.5 Configuration of Test System	10
FIELD STRENGTH OF EMISSIONS EQUIPMENT/DATA	
	11 - 16
ATTESTATION STATEMENT	17
	 1.1 Product Description 1.2 Related Submittal Grant 1.3 Tested System Details 1.4 Test Methodology 1.5 Test Facility SYSTEM TEST CONFIGURATION 2.1 Justification 2.2 EUT Exercise Software 2.3 Special Accessories 2.4 Equipment Modifications 2.5 Configuration of Test System FIELD STRENGTH OF EMISSIONS EQUIPMENT/DATA FREQUENCY TOLERANCE OF CARRIER SIGNAL EQUIPMENT/DATA FREQUENCY STABILITY OVER VOLTAGE EQUIPMENT/DATA



1.0 GENERAL INFORMATION

1.1 Product Description

EMC Test Pla	n and Constructional Data Form	IUV AMERICA
2.110 1001114	rana constituctional Data Form	
PLEASE COMPLETE TH	HIS DOCUMENT IN FULL, ENTERING N/A IF THE FIELD IS NOT APPL	ICABLE.
Applicant NOTE: 1 Press the F1 key at any	This information will be input into your test report as shown below. time to get HELP for the current field selected.	
Company:	Cubic Transportation Systems, Inc.	
Address:	5650 Kearny Mesa Road	
	San Diego, CA 92111	
Contact:	Chuck Burns Position: Sr.	Compliance Specialist
Phone:	(858) 627-4676 Fax: (85	8) 292-9987
E-mail Address:	chuck.burns@cubic.com	
General Equipment	t Description NOTE: This information will be input into your	test report as shown below.
EUT Description	Contactless Smart Card Reader for Access Control Sy	/stem
EUT Name	ACT 7	
Model No.:	061-1311 Rev. B Serial No.: 550)
Product Options:	None	
Configurations to be	tested: One (with updated Rev. B antenna shield)	
Test Objective		
□ EMC Directive 89 Std: □ Machinery Directive Std: □ Medical Device D Std: □ Vehicle Directive Std: □ FDA Reviewers C	### PCC: Class VCCI: Class	A
TÜV Product Servic	ce Certification Requested	
Attestation of Cor		ed with Octagon Mark)
Certificate of Con		
	(N/A for vehicles)	
Attendance		
	Attended by the customer	stomer
FILE: EMCU F09.02E,	REVISION 2, Effective: 03 October 2002	Page 1 of 6



Form TI"N/
EMC Test Plan and Constructional Data Form AMERICA
Failure - Complete this section if testing will not be attended by the customer. If a failure occurs, TUV Product Service should: Call contact listed above, if not available then stop testing. Continue testing to complete test series. Continue testing to define corrective action. Stop testing.
EUT Specifications and Requirements
Length: 4.5 in Width: 2.75 in Height: 1.5 in Weight: 14 oz
Power Requirements Regulations require testing to be performed at twicell account in the countries of interest in the countries of
Regulations require testing to be performed at typical power ratings in the countries of intended use. (i.e., European power is typically 230 VAC 50 Hz or 400 VAC 50 Hz, single and three phase, respectively)
Voltage: 12Vdc (If battery powered, make sure battery life is sufficient to complete testing.)
of Phases:
Current (Amps/phase(max)): 0.200A (Amps/phase(nominal)): 0.100A
Other
Other Special Requirements
Typical Installation and/or Operating Environment (ie. Hospital, Small Business, Industrial/Factory, etc.) Office building
EUT Power Cable
□ Power cable □ Permanent OR □ Removable Length (in meters): <150m □ Shielded OR ☑ Unshielded □ Not Applicable

Page 2 of 6

FILE: EMCU_F09.02E, REVISION 2, Effective: 03 October 2002



Form



EMC Test Plan and Constructional Data Form

Interface				Shi	eldi	ng						_
Туре	Analog	Digital	Óty	Yes	8	Туре	Termination	Connector Type	Port Termination	Length (in meters)	Removable	Permanent
EXAMPLE: RS232		×	2	×		Foil over braid	Coaxial	Metallized 9- pin D-Sub	Characteristic Impedance	6	×	
DC power			2	M		Foil shield	unterminated	Terminal block	No	150		×
Wiegand comms		☒	2	Ø		Foil shield	unterminated	Terminal block	No	150		×
	1											L
										0		
												С
												T
						, , , , , , , , , , , , , , , , , , , ,						
							,			****		
												С
										×.		

FILE: EMCU_F09.02E, REVISION 2, Effective: 03 October 2002

Page 3 of 6





EMC Test Plan and Constructional Data Form

EUT Software.	****		44	
Revision Level:	1.00			
Description:	ACT7/Web Targe	et PIC CPU Firmware	e, Part No. 061-9906	-1.01.00GCWEB
peripherals requires t software, firmware, a	e equipment be tested o hat a simple program go nd PLD algorithms used	while operating in a typical enerate a complete line of	operation mode. FCC te upper case H's. Provide	ting modes to be used during test. sting of personal computers and/or a general description of all bed above, with the revision level nce is required.
	olling for cards			
2.				
3.				
Equipment Unde	er Test (EUT) Syst	em Components	List and describe all com	ponents which are part of the EUT.
For FCC testing a mil	nimum configuration is r	required (ie Mouse Printe		
				Drive, Motherboard, etc.)
Description		Model #	Serial #	Drive, Motherboard, etc.) FCC ID #
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)
Description				Drive, Motherboard, etc.)

Page 6 of 17





EMC Test Plan and Constructional Data Form

Description		Model #	Serial #	part of the EUT. (i.e. peripherals, simulators, etc
Oscillator Fre	quencies			
	Derived			
Frequency	Frequency	Component # / Lo	cation	Description of Use
7.3728 MHz		Y1, RF Board		Microprocessor clock
13.56 MHz		Y2, RF Board		RF Carrier
			11847-2-2	
			- Walley	
Power Supply	,			
Manufacturer	Model #	Serial #	Туре	
			Switch	
			Switch	
		177		
Power Line Fi	Iters			
Manufacturer	Мо	del #	Location in E	UT
				W
- 549440000				

FILE: EMCU_F09.02E, REVISION 2, Effective: 03 October 2002

Page 5 of 6





EMC Test Plan and Constructional Data Form

Description	Manufacturer	Part # or Value	Qty	Component # / Location
u				

Foil shield on antenna surface

FILE: EMCU_F09.02E, REVISION 2, Effective: 03 October 2002

Page 6 of 6



1.2 Related Submittal Grant

None

1.3 Tested System Details

The FCC ID's for all equipment, plus descriptions of all cables used in the tested system are:

None

1.4 Test Methodology

Purpose of Test: To demonstrate compliance with the following tests.

	Test Summary							
	Paragraph		Summary of Results					
Test Description	Number	Low Channel	Mid Channel	High Channel	Pass/Fail			
			54.5 dBuV/m at					
Field Strength of Emissions	15.225(a)		13.56 MHz		Pass			
			-4.9 dB at 40.68					
Field Strength of Emissions	15.209(a)		MHz		Pass			
			Voltage Variation					
			of 10.2 VDC to					
			13.8 VDC from					
			rated operating					
Frequency Tolerance of			voltage (12 VDC)		_			
Carrier Signal	15.225(e)		at +20°C		Pass			
			No frequency					
			variation over the					
Frequency Stability Over			operating range of					
Voltage	15.225(e)		8 VDC to 28 VDC		Pass			

Testing was performed according to the procedures in FCC/ANSI C63.4 and CSA 108.8-M1983.

1.5 Test Facility

The open area test site and conducted measurement data were tested by:

TÜV AMERICA, INC 10040 Mesa Rim Road San Diego, CA 92121-2912 Phone: 858 678 1400 Fax: 858 546 0364

The Test Site Data and performance comply with ANSI C63.4 and are registered with the FCC, 7435 Oakland Mills Road, Columbia Maryland 21046. All Measurement Data is acquired according to the content of FCC Measurement Procedure and ANSI C63.4, unless supplemented with additional requirements as noted in the test report.



2.0 SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was initially tested for FCC emissions in the following configuration:

See Test Setup Photos Exhibit

2.2 EUT Exercise Software

None

2.3 Special Accessories

None

2.4 Equipment Modifications

None

2.5 Configuration of Test System

See Test Setup Photos Exhibit

Report No. SC405767-03



3.0 FIELD STRENGTH OF EMISSIONS EQUIPMENT/DATA FREQUENCY TOLERANCE OF CARRIER SIGNAL EQUIPMENT/DATA FREQUENCY STABILITY OVER VOLTAGE EQUIPMENT/DATA

Test Conditions: FIELD STRENGTH OF EMISSIONS: Parts 15.225(a) and 15.209(a)

FREQUENCY TOLERANCE OF CARRIER SIGNAL: Part 15.225(e)

FREQUENCY STABILITY OVER VOLTAGE: Part 15.225(e)

The following measurements were performed at the San Diego Testing Facility:

☐ - Test not applicable

- - TR-2, Test Room
- - Canyon #2 (3- and 10-Meter Open Area Test Site), Carroll Canyon, San Diego

Test Equipment Used:

Model No.	Prop. No.	Description	Manufacturer	Serial No.	Date Cal'ed
LPB 2520/A	739	Antenna, Bilog	Antenna Research	1170	05/04
ESVS 30	466	EMI Test Receiver	Rhode & Schwarz	833825/003	05/04
6228B	6485	Dual DC Power Supply	Hewlett Packard	3441A-05771	VBU*
34401A	6709	Digital Multimeter	Hewlett Packard	3146A03945	07/04
HP8568B	187/188	Spectrum Analyzer	Hewlett Packard	2304A02500	04/04
T30RC	6225	Environmental Chamber	Tenney Environmental	27244-02	05/04

Remarks: One year calibration cycle for all test equipment and sites. (*) Verified Before Use.

Report No. SC405767-03



Cubic Transportation ACT7


SC405767

Field Strength of Emissions (15.225(a))

Frequency	Maximum	Limit
13.56 MHz	$54.5 \text{ dB}_{\mu}\text{V/m} = 530 _{\mu}\text{V/m}$	84 dB μ V/m = 15,848 μ V/m

NOTE: Measured at 30 meters. No extrapolation required.



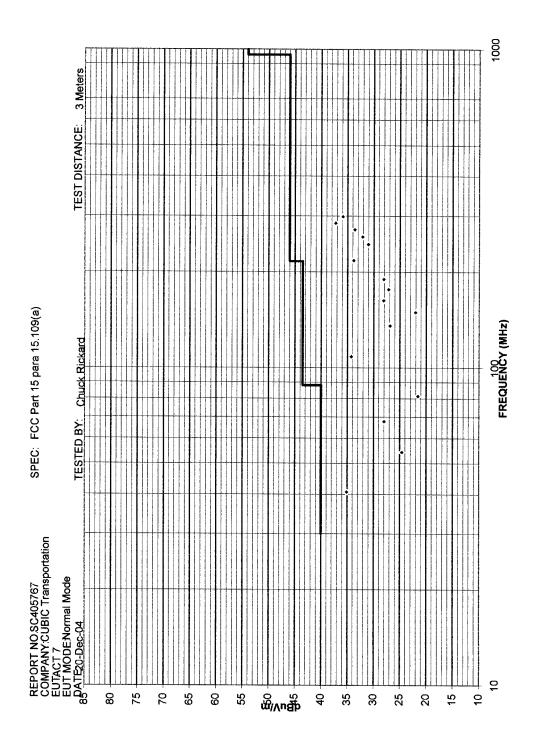

Report No. SC405767-03



REPORT No: SC405767

EUT MODE: Normal Mode

SPEC: FCC Part 15 para 15.109(a)

CUSTOMER: CUBIC Transportation

20-Dec-04

TEST DIST: 3 Meters

EUT: ACT 7

TEST SITE:

TESTED BY: Chuck Rickard

BICONICAL:

LOG PERIODIC:

DATE: NOTES:

Quasi-Peak with 120 KHz measurement bandwidth.

RCVR:

466

2

739

739

Temperature: Relative Humidity: ver 1.8b VERTICAL HORIZONTAL CORRECTION MAXIMUM **SPECIFIED** EUT **EUT ANTENNA FREQUENCY** measured measured **FACTOR** CORRECTED LIMIT MARGIN ROTATION HEIGHT (MHz) (dBuv) (dBuV/m) (dBuV) (dB/m) (dBuV/m) (dB) (degrees) (meters) 1 _ __ _ 0 1 _ 0 1 0 1 40.68 16 6.2 19.1 35.1 40 -4.9 180 1 67.80 18.1 8 9.9 40 28.0 -12.0 0 1 81.36 12.2 8.6 9.4 21.6 40 -18.4 0 1 54.24 14.8 8.8 15.8 40 24.6 -15.4 180 1 135.60 14 11 12.9 26.9 43.5 -16.6 180 1 149.16 10.7 8.1 11.4 22.1 43.5 -21.4 0 1 162.72 16.6 8.9 11.5 28.1 43.5 -15.4 180 1 189.84 15.2 10.2 12.9 28.1 43.5 -15.4 150 1 216.96 18.8 13.7 15.1 33.9 46 -12.1 150 1 244.08 14.7 8.7 16.4 31.1 46 -14.9 180 1 271.20 17 13.2 16.6 33.6 46 300 -12.41 257.64 15.5 12.3 16.7 32.2 46 -13.8 300 1 108.50 20.7 10.9 13.6 34.3 43.5 300 -9.3 1 176.30 15.1 9.7 12.1 27.2 43.5 -16.3 250 1 284.78 20.5 16 16.8 -8.7 37.3 46 30 1 298.36 18.6 15 17.3 35.9 46 -10.1150 1



Cubic Transportation

SC405767

Frequency Tolerance

15.225(e)

Temp (°C)	Frequency (Hz)	
+50	13 559 864	
+40	13 559 868	
+30	13 559 876	
+20	See Table Below	
+10	13 559 912	
0	13 559 928	
-10	13 559 930	
-20	13 559 912	
Limit (Hz)	13 558 644 to 13 561 356	

Voltage Variation at 20°C

V(dc)	Frequency (Hz)	
10.2	13 559 895	
10.8	13 559 890	
11.4	13 559 890	
12.0	13 559 900	
12.6	13 559 895	
13.2	13 559 890	
13.8	13 559 885	
Limit (Hz)	13 558 644 to 13 561 356	

Remarks

Measurements taken at 1 hour intervals to allow for temperature stabilization. Frequency tolerance limit is +/-0.01% of normal operating frequency. Extreme voltage test range is 85% to 115% of rated operating voltage (12vdc). This equates to 10.2vdc to 13.8vdc.



Cubic Transportation ACT7

SC501493

Frequency Stability Over Voltage (15.225(e))

12 VDC Nomonal Voltage, 8-28 VDC Operating Range.

The specification states that the frequency may not vary more than 0.01% of the operating frequency (± 0.001356 MHz).

Voltage	Frequency	Change	
12.0 VDC	13.559 875 MHz	None	
8.00 VDC	13.559 875 MHz	None	
6.80 VDC	13.559 875 MHz	None	
28.00 VDC	13.559 875 MHz	None	
32.20 VDC	13.559 875 MHz	None	
12.00 VDC	13.559 875 MHz	None	

Conclusion: There was no frequency variation over the operating voltage range, even when extended ±15 %. Pass.



4.0 ATTESTATION STATEMENT

GENERAL REMARKS:

Additional test results provided under TUV report number SC501493 for Frequency Stability Over Voltage (15.225(e)).

SUMMARY:

All tests were performed per CFR 47, Part(s) 15.209(a), 15.225(a), 15.225(e)

■ - Performed

The Equipment Under Test

■ - Fulfills the requirements of CFR 47, Part(s) 15.209(a), 15.225(a), 15.225(e)

Testing Start Date: 20 December 2004

Testing End Date: 25 March 2005

- TÜV AMERICA, INC. -

Responsible Engineer:

Jim Owen

(EMC Manager)

Responsible Engineer:

Chuck Rickard (EMC Engineer)