



Appendix B

Detailed Test Results

1. GSM
GSM850 for Body
GSM1900 for Body
2. WCDMA
WCDMA Band II for Body
WCDMA Band V for Body
3. LTE
LTE Band 5 for Body
LTE Band 7 for Body
LTE Band 38 for Body
LTE Band 40 for Body
LTE Band 41 for Body
4. WIFI
WIFI 2.4GHz for Body





Date: 2024/6/6

Test Laboratory: LCS-SAR Lab

GSM 850 GPRS 4TX 251CH Rear side 0mm**DUT: Smart POS Terminal; Type: P30; Serial: A240605088-1**



Communication System: UID 0, GPRS (0); Frequency: 848.8 MHz; Duty Cycle: 1: 2.075
Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.945 \text{ S/m}$; $\epsilon_r = 41.532$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.442 W/kg

Configuration/Unnamed procedure/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

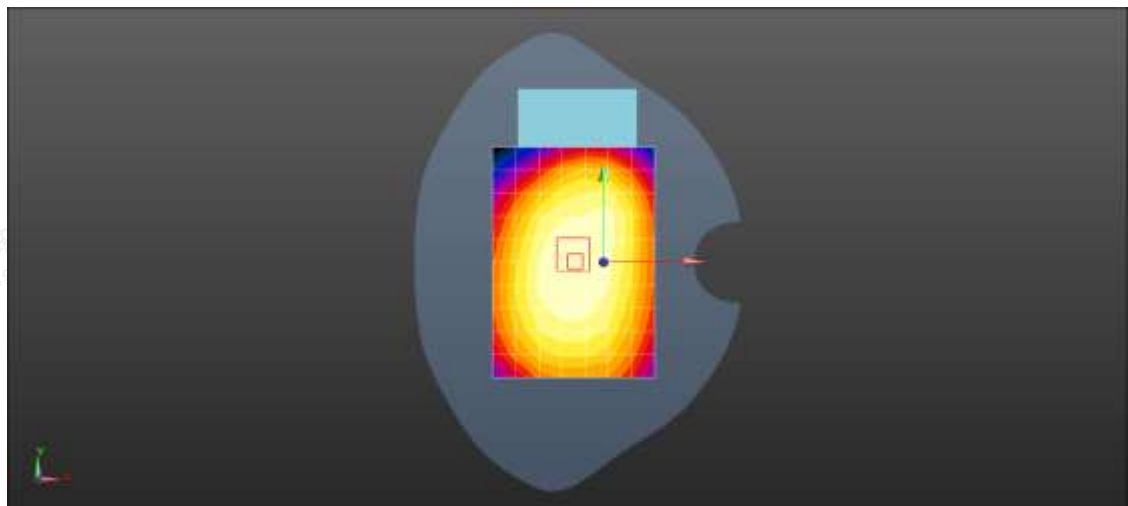Reference Value = 19.74 V/m ; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.465 W/kg **SAR(1 g) = 0.357 W/kg ; SAR(10 g) = 0.255 W/kg** Maximum value of SAR (measured) = 0.421 W/kg  $0 \text{ dB} = 0.421 \text{ W/kg} = -3.76 \text{ dBW/kg}$



Date: 2024/6/7

Test Laboratory: LCS-SAR Lab

GSM 1900 GPRS 4TX 661CH Rear side 0mm**DUT: Smart POS Terminal; Type: P30; Serial: A240605088-1**

Communication System: UID 0, GPRS (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r = 40.542$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.242 W/kg



Configuration/Unnamed procedure/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.69 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

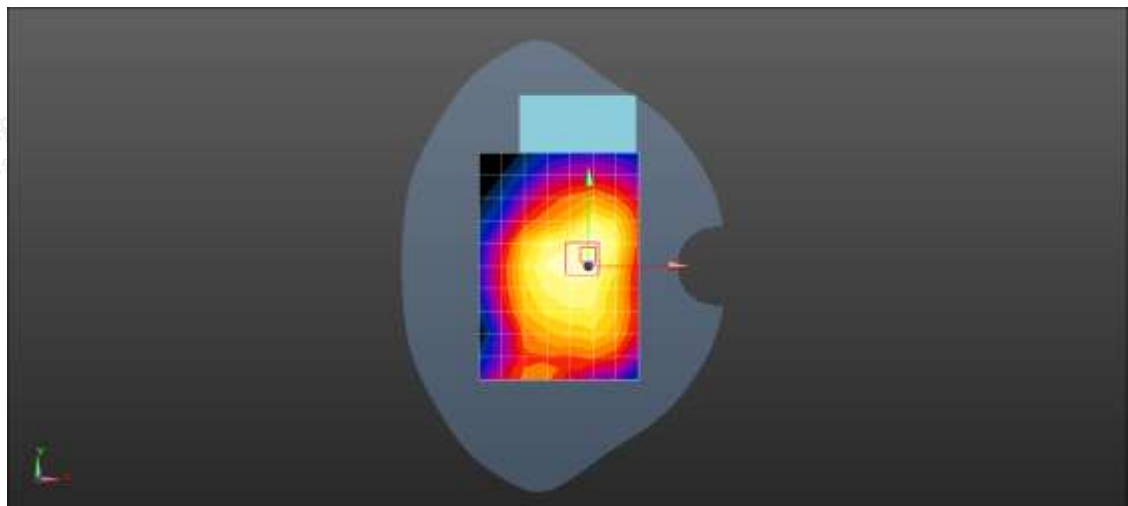

0 dB = 0.233 W/kg = -6.33 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2024/6/7

Test Laboratory: LCS-SAR Lab

WCDMA Band II RMC 9262CH Rear side 0mm**DUT: Smart POS Terminal; Type: P30; Serial: A240605088-1**

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.4324$ S/m; $\epsilon_r = 41.126$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.329 W/kg



Configuration/Unnamed procedure/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.59 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.328 W/kg

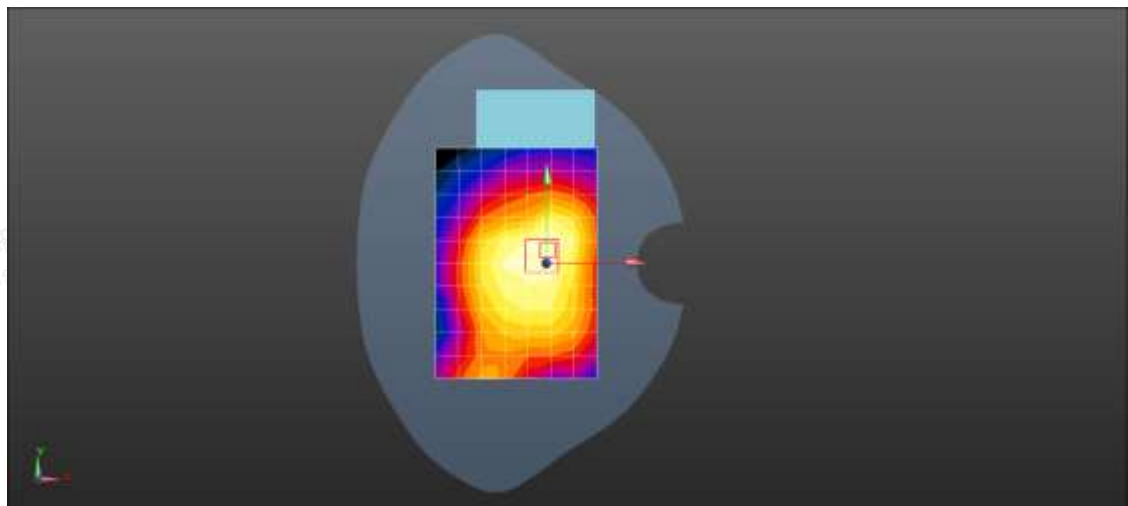

0 dB = 0.328 W/kg = -4.84 dBW/kg



Date: 2024/6/6

Test Laboratory: LCS-SAR Lab

WCDMA Band V RCM 4233CH Rear side 0mm**DUT: Smart POS Terminal; Type: P30; Serial: A240605088-1**



Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6 \text{ MHz}$; $\sigma = 0.915 \text{ S/m}$; $\epsilon_r = 41.685$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

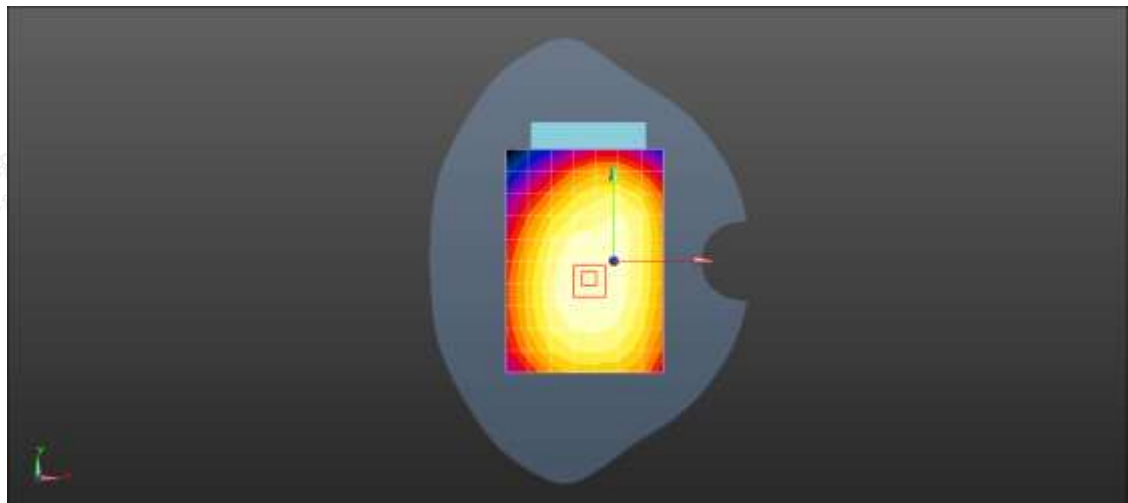Configuration/Unnamed procedure/Area Scan (8x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.324 W/kg **Configuration/Unnamed procedure/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 18.15 V/m ; Power Drift = 0.17 dB Peak SAR (extrapolated) = 0.374 W/kg **SAR(1 g) = 0.267 W/kg ; SAR(10 g) = 0.117 W/kg** Maximum value of SAR (measured) = 0.344 W/kg  $0 \text{ dB} = 0.344 \text{ W/kg} = -4.63 \text{ dBW/kg}$ 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2024/6/6

Test Laboratory: LCS-SAR Lab

LTE Band 5 10M QPSK 1RB25 20525CH Rear side 0mm**DUT: Smart POS Terminal; Type: P30; Serial: A240605088-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 41.441$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.138 W/kg



Configuration/Unnamed procedure/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.11 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.136 W/kg

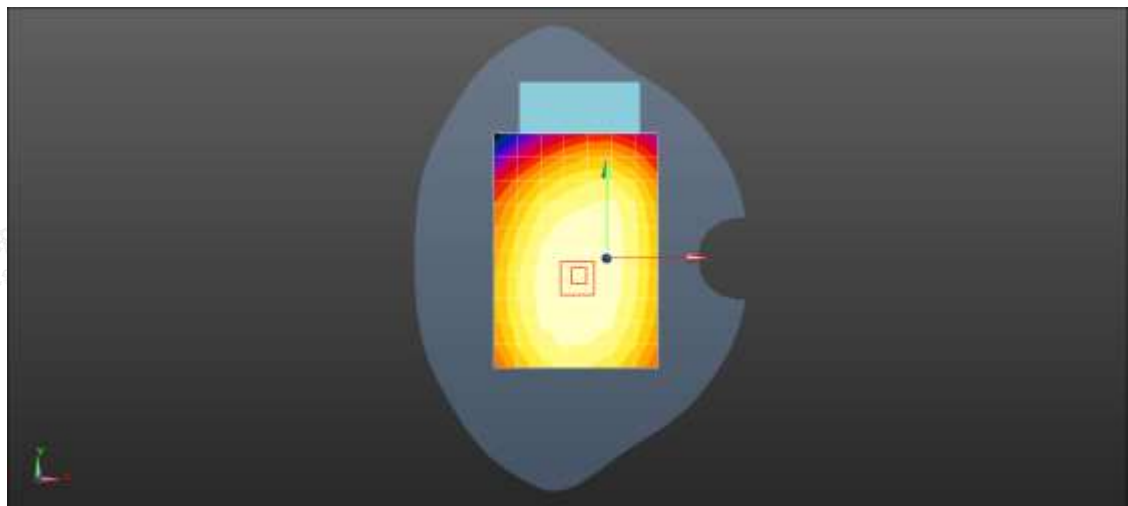

0 dB = 0.136W/kg = -8.66 dBW/kg



Date: 2024/6/14

Test Laboratory: LCS-SAR Lab

LTE Band 7 20M QPSK 1RB50 21350CH Rear side 0mm**DUT: Smart POS Terminal; Type: P30; Serial: A240605088-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.882$ S/m; $\epsilon_r = 38.856$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.17, 7.17, 7.17); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (8x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.245 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.52 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.252 W/kg

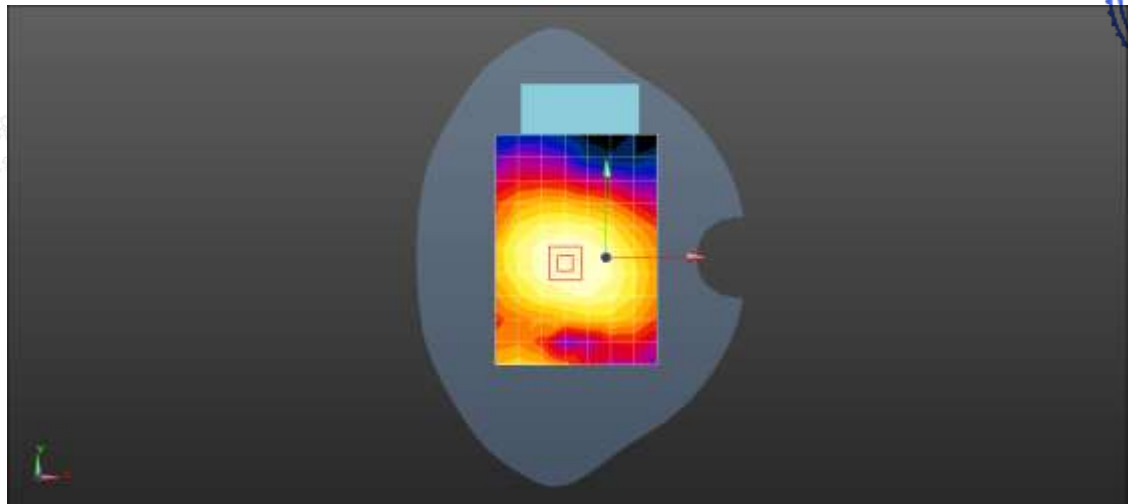

0 dB = 0.252 W/kg = -5.99 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2024/6/14

Test Laboratory: LCS-SAR Lab

LTE Band 38 20M QPSK 1RB50 37850CH Rear side 0mm**DUT: Smart POS Terminal; Type: P30; Serial: A240605088-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 2580 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.996$ S/m; $\epsilon_r = 41.587$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.17, 7.17, 7.17); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (8x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.377 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.47 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.363 W/kg

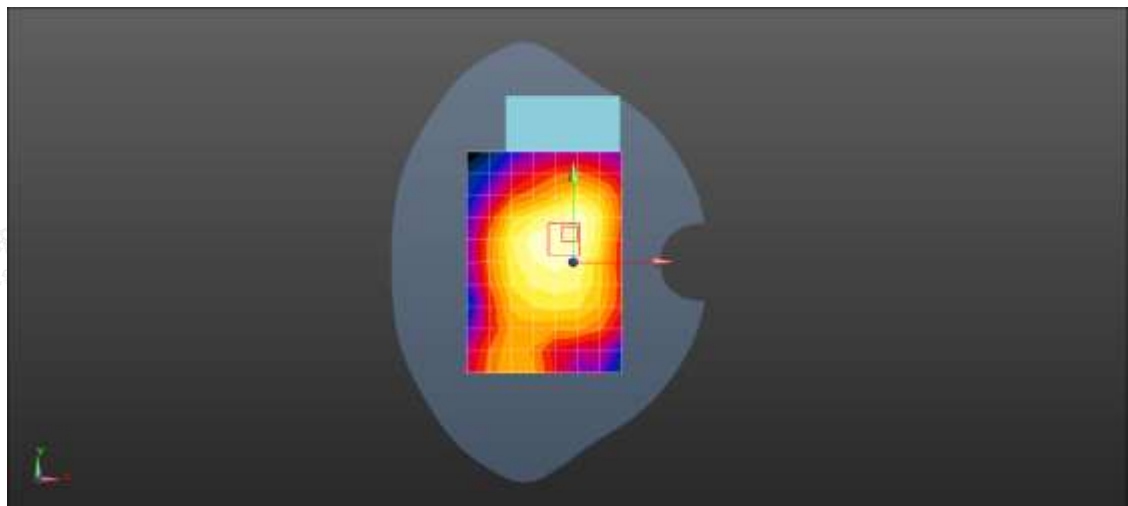

0 dB = 0.363 W/kg = -4.40 dBW/kg



Date: 2024/6/8

Test Laboratory: LCS-SAR Lab

LTE Band 40 20M QPSK 1RB50 38750CH Rear side 0mm**DUT: Smart POS Terminal; Type: P30; Serial: A240605088-1**

Communication System: UID 0, LTE-FDD (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.688$ S/m; $\epsilon_r = 40.658$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.66,7.66, 7.66); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (8x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.311 W/kg


Configuration/Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.68 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.342 W/kg

SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.232 W/kg

Maximum value of SAR (measured) = 0.310 W/kg

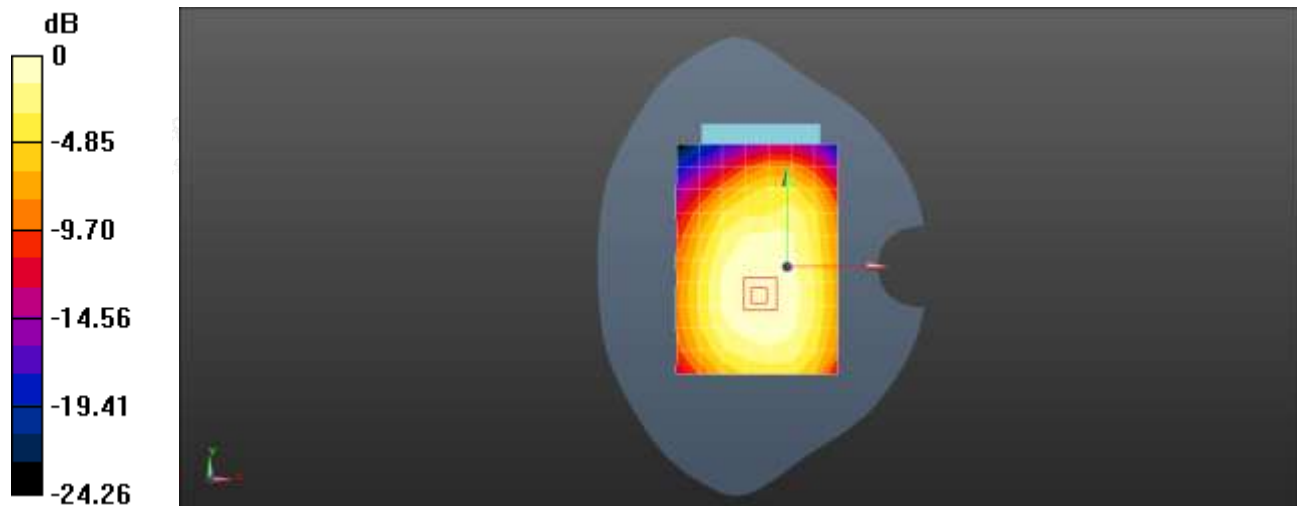

0 dB = 0.310 W/kg = -5.09 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2024/6/9

Test Laboratory: LCS-SAR Lab

LTE Band 41 20M QPSK 1RB0 39750CH Rear side 0mm**DUT: Smart POS Terminal; Type: P30; Serial: A240605088-1**

Communication System: UID 0, LTE-TDD (0); Frequency: 2506 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2506$ MHz; $\sigma = 1.758$ S/m; $\epsilon_r = 39.286$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (9x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.126 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.478 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

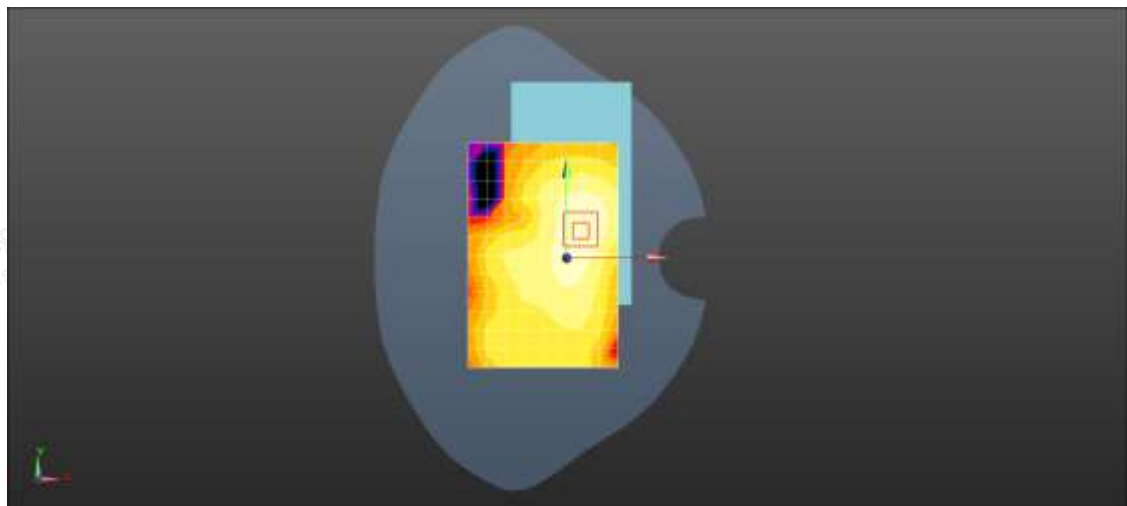

0 dB = 0.111 W/kg = -9.55 dBW/kg



Date: 2024/6/9

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 11CH Rear side 0mm**DUT: Smart POS Terminal; Type: P30; Serial: A240605088-1**



Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.796 \text{ S/m}$; $\epsilon_r = 38.754$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

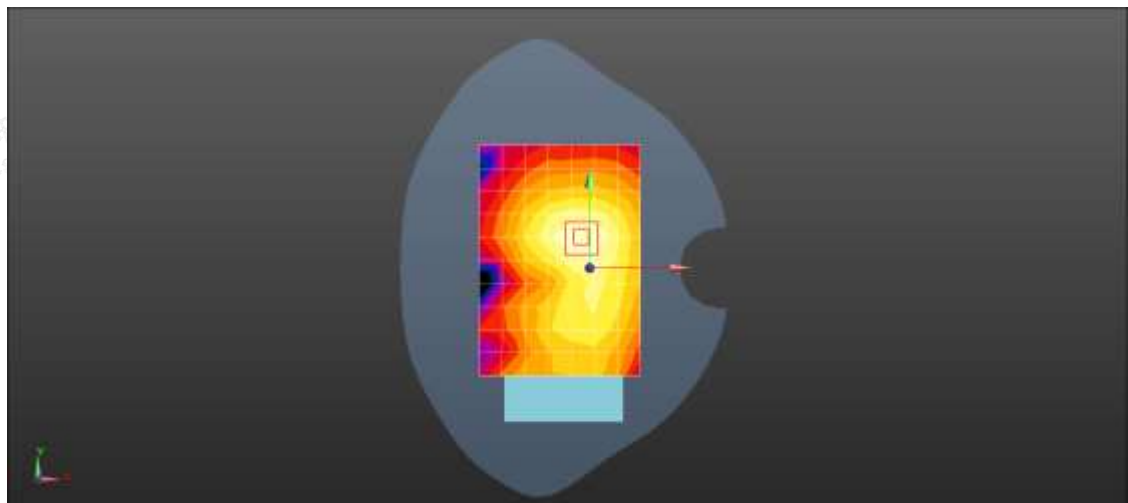Configuration/Unnamed procedure/Area Scan (8x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.458 W/kg **Configuration/Unnamed procedure/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.412 V/m ; Power Drift = 0.11 dB Peak SAR (extrapolated) = 0.763 W/kg **SAR(1 g) = 0.399 W/kg ; SAR(10 g) = 0.161 W/kg** Maximum value of SAR (measured) = 0.448 W/kg  $0 \text{ dB} = 0.448 \text{ W/kg} = -3.12 \text{ dBW/kg}$ 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity