

Technical Information

Micropilot FMR62

Free space radar



Level measurement in liquids

Application

- Continuous, non-contact level measurement of liquids, pastes and sludges
- Integrated PEEK antenna or PTFE-plated, flush-mounted antenna
- Maximum measuring range: 80 m (262 ft)
- Temperature: -40 to +200 °C (-40 to +392 °F)
- Pressure: -1 to +25 bar (-14.5 to +362.6 psi)
- Accuracy: ± 1 mm (0.04 in)
- International explosion protection certificates; WHG
- Linearity protocol (3-point, 5-point)

Your benefits

- Reliable measurement thanks to improved focusing and small beam angle, particularly in vessels with many internal fittings
- Compact design enables installation in the case of small vessels and small process connections
- Easy, guided commissioning with intuitive user interface in local language
- Reliable measurement even in variable product and process conditions
- Maximum reliability thanks to multi-echo tracking
- HistoROM configuration memory makes for easier commissioning, maintenance and diagnostics
- SIL2 as per IEC 61508, SIL3 for homogeneous or diverse redundancy
- Easy proof testing for SIL and WHG
- Seamless integration in process control and asset management systems
- Heartbeat Technology

Table of contents

Important document information	4	Environment	32
Safety symbols	4	Ambient temperature range	32
Electrical symbols	4	Ambient temperature limits	32
Symbols for certain types of information	4	Storage temperature	33
Symbols in graphics	4	Climate class	33
Symbols at the device	5	Altitude according to IEC61010-1 Ed.3	33
Terms and abbreviations	6	Degree of protection	33
Registered trademarks	7	Vibration resistance	33
Function and system design	8	Cleaning the antenna	33
Measuring principle	8	Electromagnetic compatibility (EMC)	34
Input	9	Process	35
Measured variable	9	Process temperature, process pressure	35
Measuring range	9	Dielectric constant	37
Operating frequency	9	Mechanical construction	38
Transmission power	9	Dimensions	38
Output	10	Weight	42
Output signal	10	Materials: GT18 housing (stainless steel, corrosion-resistant)	43
Signal on alarm	10	Materials: GT19 housing (plastic)	44
Linearization	10	Materials: GT20 housing (die-cast aluminum, powder-coated, seawater-resistant)	45
Galvanic isolation	11	Materials: antenna and process connection	46
Protocol-specific data	11	Materials: Weather protection cover	48
Power supply	12	Operability	49
Terminal assignment	12	Operating concept	49
Device plug connectors	18	Local operation	49
Supply voltage	19	Operation with remote display and operating module	
Power consumption	21	FHX50	50
Current consumption	21	Remote operation	50
Power supply failure	21	System integration via Fieldgate	52
Potential equalization	21	Certificates and approvals	53
Cable entries	21	CE mark	53
Cable specification	22	RoHS	53
Overvoltage protection	22	RCM-Tick marking	53
Performance characteristics	23	Ex approval	53
Reference operating conditions	23	Dual seal according to ANSI/ISA 12.27.01	53
Maximum measured error	23	Functional safety	53
Measured value resolution	23	WHG	53
Response time	23	Hygienic compatibility	53
Influence of ambient temperature	24	NACE MR 0175 / ISO 15156	54
Influence of gas phase	24	NACE MR 0103	54
Installation	25	Pressure equipment with allowable pressure	
Installation conditions	25	≤ 200 bar (2 900 psi)	54
Installation: integrated antenna	28	Marine approval	54
Installation: flush mount antenna	29	Radio standard EN 302729-1/2	54
Container with heat insulation	30	Radio standard EN 302372-1/2	55
Turning the transmitter housing	31	FCC / Industry Canada	55
Turning the display module	31	Japanese radio approval	56
		CRN approval	56
		Test, certificate	57
		Hard-copy product documentation	57
		Other standards and guidelines	58

Ordering information 59
Ordering information 59
3-point linearity protocol 60
5-point linearity protocol 61
Customer-specific configuration 62
Services 62

Application Packages 63
Heartbeat Diagnostics 63
Heartbeat Verification 64
Heartbeat Monitoring 65

Accessories 66
Device-specific accessories 66
Communication-specific accessories 69
Service-specific accessories 70
System components 70

Supplementary documentation 71
Standard documentation 71
Safety Instructions (XA) 71

Important document information

Safety symbols

Symbol	Meaning
	DANGER! This symbol alerts you to a dangerous situation. Failure to avoid this situation will result in serious or fatal injury.
	WARNING! This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in serious or fatal injury.
	CAUTION! This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in minor or medium injury.
	NOTE! This symbol contains information on procedures and other facts which do not result in personal injury.

Electrical symbols

Symbol	Meaning	Symbol	Meaning
	Direct current		Alternating current
	Direct current and alternating current		Ground connection A grounded terminal which, as far as the operator is concerned, is grounded via a grounding system.
	Protective ground connection A terminal which must be connected to ground prior to establishing any other connections.		Equipotential connection A connection that has to be connected to the plant grounding system: This may be a potential equalization line or a star grounding system depending on national or company codes of practice.

Symbols for certain types of information

Symbol	Meaning
	Permitted Procedures, processes or actions that are permitted.
	Preferred Procedures, processes or actions that are preferred.
	Forbidden Procedures, processes or actions that are forbidden.
	Tip Indicates additional information.
	Reference to documentation
	Reference to page
	Reference to graphic
	Visual inspection

Symbols in graphics

Symbol	Meaning
1, 2, 3 ...	Item numbers
 1,  2,  3...	Series of steps
A, B, C, ...	Views
A-A, B-B, C-C, ...	Sections

Symbol	Meaning
	Hazardous area Indicates a hazardous area.
	Safe area (non-hazardous area) Indicates the non-hazardous area.

Symbols at the device

Symbol	Meaning
	Safety instructions Observe the safety instructions contained in the associated Operating Instructions.
	Temperature resistance of the connection cables Specifies the minimum value of the temperature resistance of the connection cables.

Terms and abbreviations

Term/abbreviation	Explanation
BA	Document type "Operating Instructions"
KA	Document type "Brief Operating Instructions"
TI	Document type "Technical Information"
SD	Document type "Special Documentation"
XA	Document type "Safety Instructions"
PN	Nominal pressure
MWP	Maximum Working Pressure The MWP can also be found on the nameplate.
ToF	Time of Flight
FieldCare	Scalable software tool for device configuration and integrated plant asset management solutions
DeviceCare	Universal configuration software for Endress+Hauser HART, PROFIBUS, FOUNDATION Fieldbus and Ethernet field devices
DTM	Device Type Manager
DD	Device Description for HART communication protocol
DC	Relative dielectric constant ϵ_r
Operating tool	The term "operating tool" is used in place of the following operating software: FieldCare / DeviceCare, for operation via HART communication and PC
BD	Blocking Distance; no signals are analyzed within the BD.

Registered trademarks

HART®

Registered trademark of the HART Communication Foundation, Austin, USA

KALREZ®, VITON®

Registered trademark of DuPont Performance Elastomers L.L.C., Wilmington, USA

TEFLON®

Registered trademark of E.I. DuPont de Nemours & Co., Wilmington, USA


TRI CLAMP®

Registered trademark of Ladish Co. Inc., Kenosha, USA

Function and system design

Measuring principle

The Micropilot is a "downward-looking" measuring system, operating based on the frequency modulated continuous wave method (FMCW). The antenna emits an electromagnetic wave at a continuously varying frequency. This wave is reflected by the product and received again by the antenna.

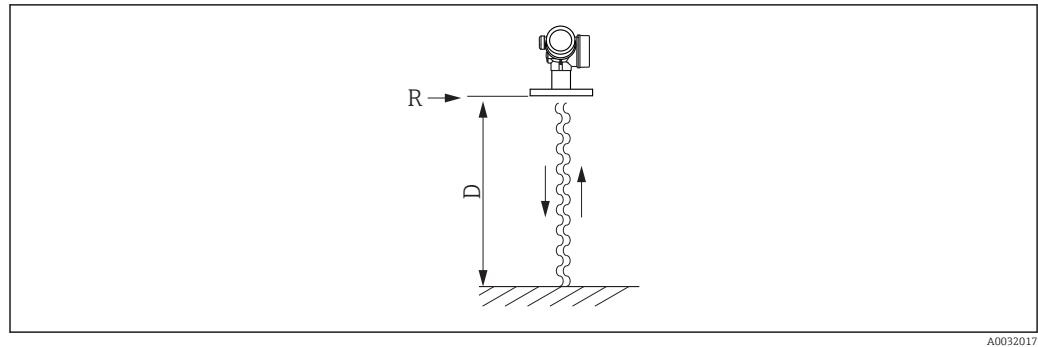


A0032017

1 FMCW principle: transmission and reflection of the continuous wave

R Reference point of measurement

D Distance between reference point and product surface

The frequency of this wave is modulated in the form of a sawtooth signal between two limit frequencies f_1 and f_2 :

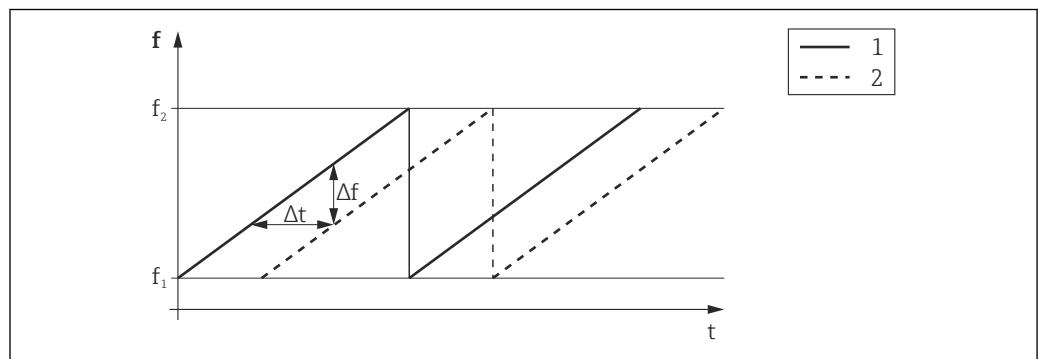

A0023771

2 FMCW principle: result of frequency modulation

1 Transmitted signal

2 Received signal

This results in the following difference frequency at any time between the transmitted signal and the received signal:

$$\Delta f = k \Delta t$$

where Δt is the run time and k is the specified increase in frequency modulation.

Δt is given by the distance D between the reference point R and the product surface:

$$D = (c \Delta t) / 2$$

where c is the speed of propagation of the wave.

In summary, D can be calculated from the measured difference frequency Δf . D is then used to determine the content of the tank or silo.

Input

Measured variable The measured variable is the distance between the reference point and the product surface. The level is calculated based on "E", the empty distance entered. Optionally, the level can be converted to other variables (volume, mass) by linearization (32 value pairs).

Measuring range

Maximum measuring range

Device	Antenna ¹⁾	Maximum measuring range
FMR62	GE: integrated, PEEK, 20 mm / 3/4"	10 m (32.8 ft)
	GF: integrated PEEK, 40 mm / 1-1/2"	22 m (72 ft)
	GM: PTFE cladded flush mount 50 mm / 2"	50 m (164 ft)
	GN: PTFE cladded flush mount 80 mm / 3"	80 m (262 ft)

1) Feature 070 in the product structure

Usable measuring range

The usable measuring range depends on the antenna size, the medium's reflective properties, the installation position and any possible interference reflections.

Tables in preparation



For dielectric constants (DC values) of many media commonly used in various industries refer to:

- the Endress+Hauser DC manual (CP01076F)
- the Endress+Hauser "DC Values App" (available for Android and iOS)

Operating frequency

Approx. 80 GHz

Several FMR6x devices can be installed in one tank thanks to the short measuring duration and the high beam focus.

Transmission power

- Peak pulse power: 6.3 mW
- Average output power: 63 µW

Output

Output signal

HART

Signal coding	FSK ± 0.5 mA over current signal
Data transmission rate	1 200 Bit/s
Galvanic isolation	Yes

Switch output

 For HART devices, the switch output is available as an option. See product structure, feature 20: "Power Supply, Output", option B: "2-wire; 4-20mA HART, switch output"

Devices with PROFIBUS PA and FOUNDATION Fieldbus always have a switch output.

Switch output	
Function	Open collector switching output
Switching behavior	Binary (conductive or non-conductive), switches when the programmable switch point is reached
Failure mode	non-conductive
Electrical connection values	$U = 10.4$ to 35 V_{DC} , $I = 0$ to 40 mA
Internal resistance	$R_i < 880\ \Omega$ The voltage drop at this internal resistance has to be taken into account on planning the configuration. For example, the resulting voltage at a connected relay must be sufficient to switch the relay.
Insulation voltage	floating, Insulation voltage $1\ 350\text{ V}_{DC}$ to power supply and 500 V_{AC} to ground
Switch point	freely programmable, separately for switch-on and switch-off point
Switching delay	freely programmable from 0 to 100 s, separately for switch-on and switch-off point
Number of switching cycles	corresponds to the measuring cycle
Signal source device variables	■ Level linearized ■ Distance ■ Terminal voltage ■ Electronic temperature ■ Relative echo amplitude ■ Diagnostic values, Advanced diagnostics
Number of switching cycles	unlimited

Signal on alarm

Depending on the interface, failure information is displayed as follows:

- Current output (for HART devices)
 - Failsafe mode selectable (in accordance with NAMUR Recommendation NE 43):
 - Minimum alarm: 3.6 mA
 - Maximum alarm (= factory setting): 22 mA
 - Failsafe mode with user-selectable value: 3.59 to 22.5 mA
- Local display
 - Status signal (in accordance with NAMUR Recommendation NE 107)
 - Plain text display
- Operating tool via digital communication (HART, PROFIBUS PA, FOUNDATION Fieldbus) or service interface (CDI)
 - Status signal (in accordance with NAMUR Recommendation NE 107)
 - Plain text display

Linearization

The linearization function of the device allows the conversion of the measured value into any unit of length or volume. Linearization tables for calculating the volume in cylindrical tanks are pre-programmed. Other linearization tables of up to 32 value pairs can be entered manually or semi-automatically.

Galvanic isolation

All circuits for the outputs are galvanically isolated from each other.

Protocol-specific data**HART**

Manufacturer ID	17 (0x11)
Device type ID	0x112B
HART specification	7.0
Device description files (DTM, DD)	Information and files under: ▪ www.endress.com ▪ www.hartcomm.org
HART load	min. 250 Ω
HART device variables	The measured values can be freely assigned to the device variables. Measured values for PV (primary variable) ▪ Level linearized ▪ Distance ▪ Electronic temperature ▪ Relative echo amplitude ▪ Area of incoupling ▪ Analog output adv. diagnostics 1 ▪ Analog output adv. diagnostics 2 Measured values for SV, TV, FV (second, third and fourth variable) ▪ Level linearized ▪ Distance ▪ Electronic temperature ▪ Terminal voltage ▪ Relative echo amplitude ▪ Absolute echo amplitude ▪ Area of incoupling ▪ Analog output adv. diagnostics 1 ▪ Analog output adv. diagnostics 2
Supported functions	▪ Burst mode ▪ Additional transmitter status


Wireless HART data

Minimum start-up voltage	16 V
Start-up current	3.6 mA
Start-up time	40 s
Minimum operating voltage	12.3 V
Multidrop current	3.6 mA
Set-up time	1 s

Power supply

Terminal assignment

2-wire: 4-20mA HART

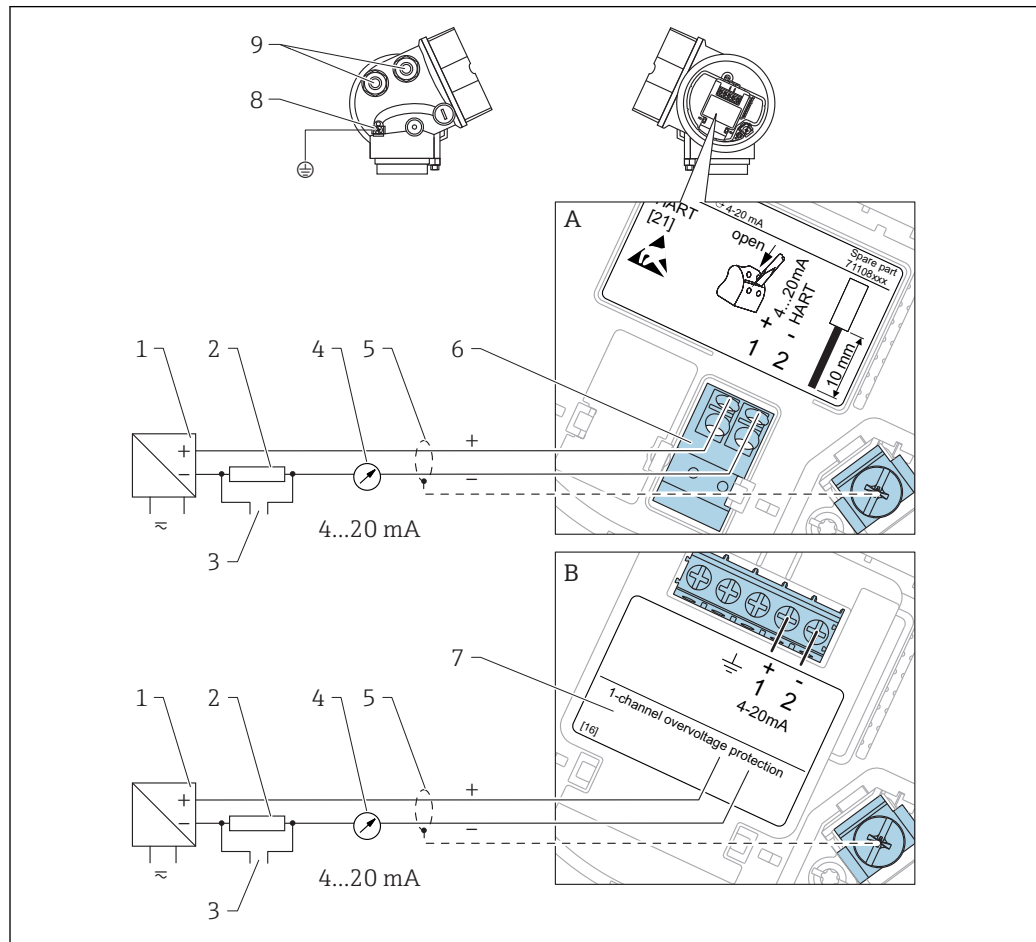


A0011294

3 Terminal assignment 2-wire; 4-20mA HART

- A Without integrated overvoltage protection
- B With integrated overvoltage protection
- 1 Active barrier with power supply (e.g. RN221N): Observe terminal voltage
- 2 HART communication resistor ($\geq 250 \Omega$): Observe maximum load
- 3 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)
- 4 Analog display device: Observe maximum load
- 5 Cable screen; observe cable specification
- 6 4-20mA HART (passive): Terminals 1 and 2
- 7 Overvoltage protection module
- 8 Terminal for potential equalization line
- 9 Cable entry

2-wire: 4-20mA HART, switch output

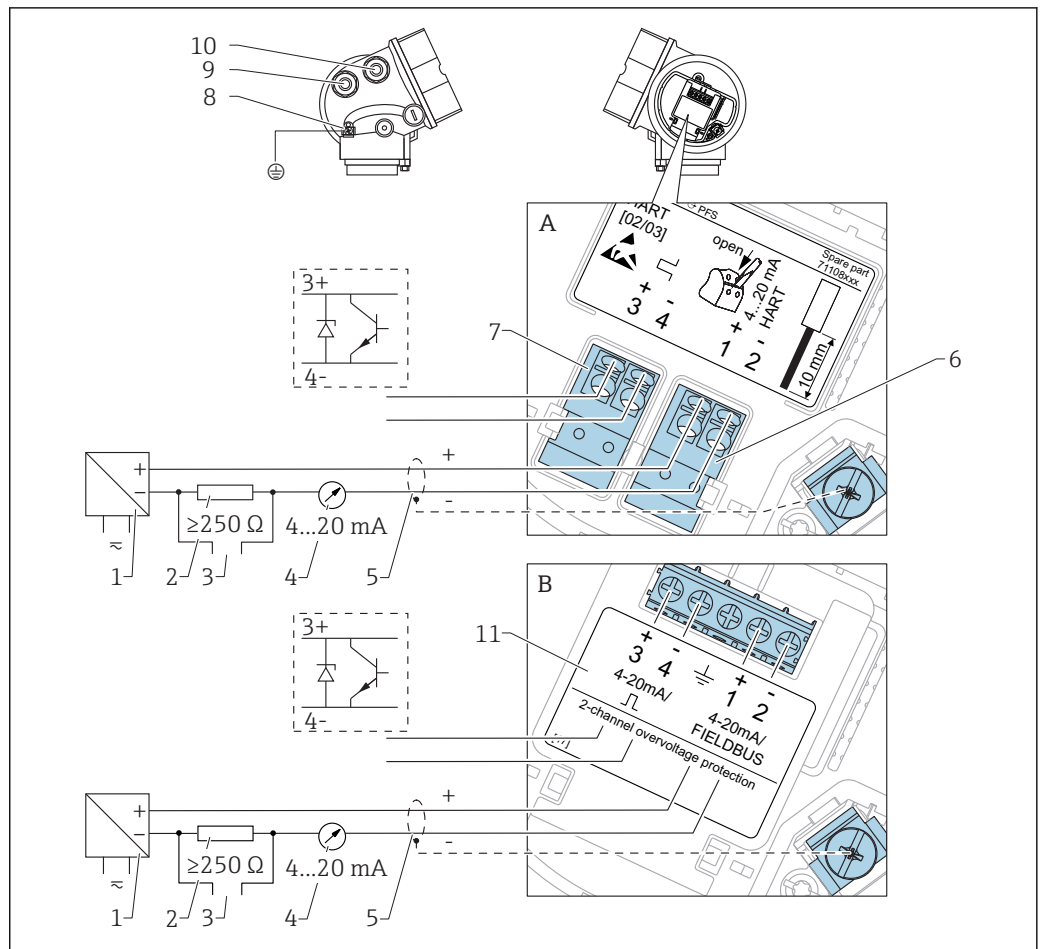

A0013759

4 Terminal assignment 2-wire; 4-20mA HART, switch output

A Without integrated overvoltage protection

B With integrated overvoltage protection

1 Active barrier with power supply (e.g. RN221N): Observe terminal voltage

2 HART communication resistor ($\geq 250 \Omega$): Observe maximum load

3 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)

4 Analog display device: Observe maximum load

5 Cable screen; observe cable specification

6 4-20mA HART (passive): Terminals 1 and 2

7 Switch output (open collector): Terminals 3 and 4


8 Terminal for potential equalization line

9 Cable entry for 4-20mA HART line

10 Cable entry for switch output line

11 Overvoltage protection module

2-wire: 4-20mA HART, 4-20mA

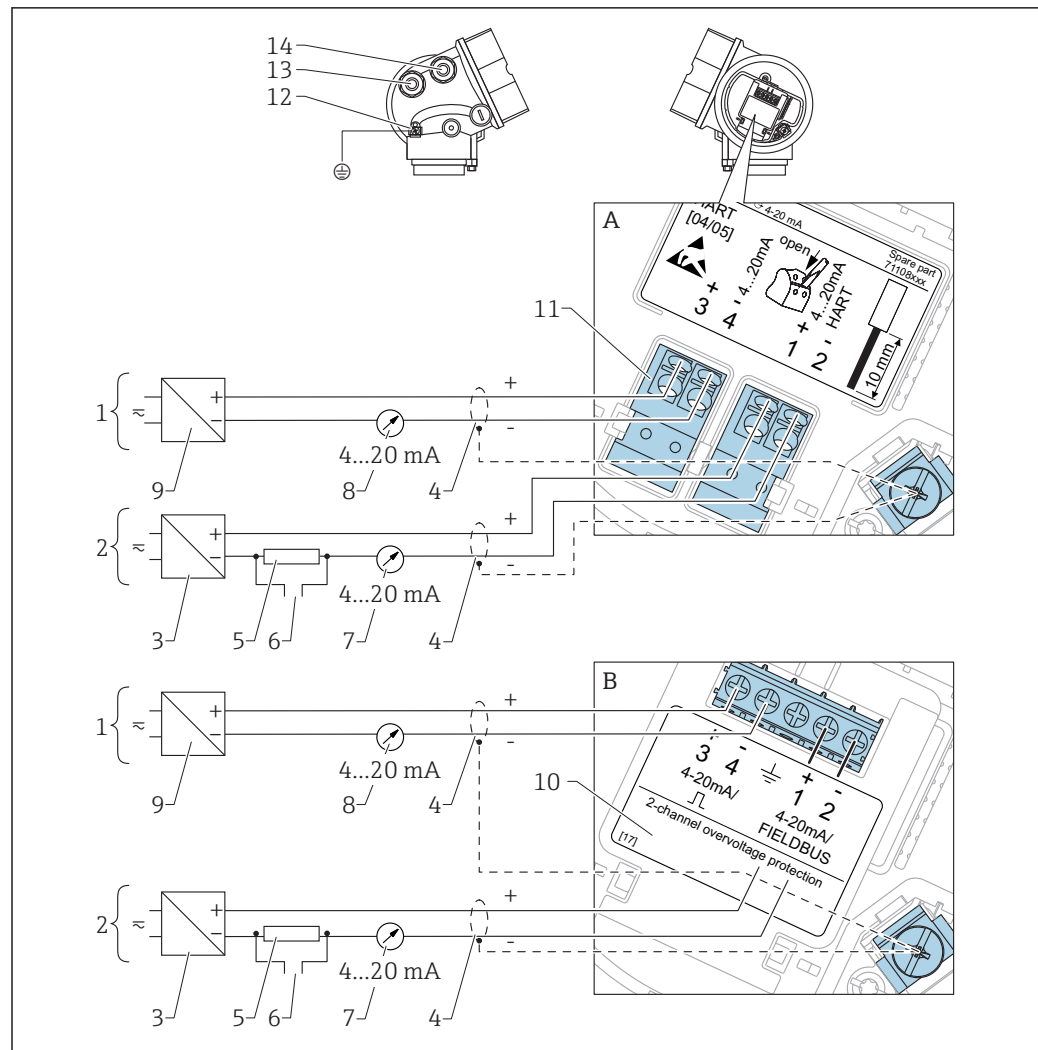

A0013923

 5 Terminal assignment 2-wire, 4-20 mA HART, 4...20mA

A Without integrated overvoltage protection

B With integrated overvoltage protection

1 Connection current output 2

2 Connection current output 1

3 Supply voltage for current output 1 (e.g. RN221N); Observe terminal voltage

4 Cable screen; observe cable specification

5 HART communication resistor ($\geq 250 \Omega$); Observe maximum load

6 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)

7 Analog display device ; observe maximum load

8 Analog display device ; observe maximum load

9 Supply voltage for current output 2 (e.g. RN221N); Observe terminal voltage

10 Overvoltage protection module

11 Current output 2: Terminals 3 and 4


12 Terminal for the potential equalization line

13 Cable entry for current output 1

14 Cable entry for current output 2


 This version is also suited for single-channel operation. In this case, current output 1 (terminals 1 and 2) must be used.

4-wire: 4-20mA HART (10.4 to 48 V_{DC})

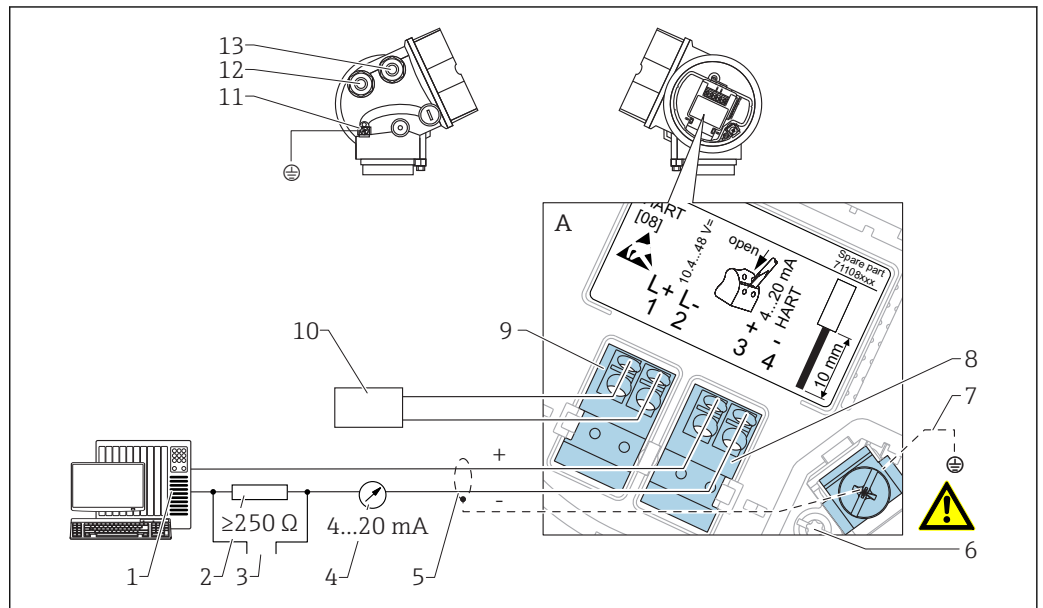

 6 Terminal assignment 4-wire; 4-20mA HART (10.4 to 48 V_{DC})

- 1 Evaluation unit, e.g. PLC
- 2 HART communication resistor ($\geq 250 \Omega$): Observe maximum load
- 3 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)
- 4 Analog display device: Observe maximum load
- 5 Signal cable including screening (if required), observe cable specification
- 6 Protective connection; do not disconnect!
- 7 Protective earth, observe cable specification
- 8 4...20mA HART (active): Terminals 3 and 4
- 9 Supply voltage: Terminals 1 and 2
- 10 Supply voltage: Observe terminal voltage, observe cable specification
- 11 Terminal for potential equalization
- 12 Cable entry for signal line
- 13 Cable entry for power supply

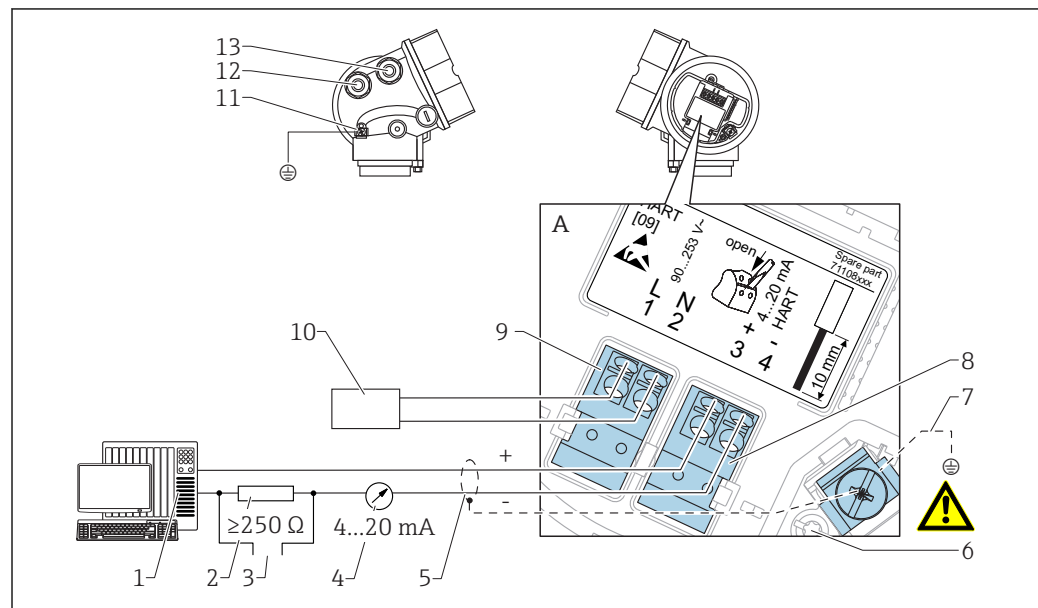4-wire: 4-20mA HART (90 to 253 V_{AC})

A0018965

7 Terminal assignment 4-wire; 4-20mA HART (90 to 253 V_{AC})

- 1 Evaluation unit, e.g. PLC
- 2 HART communication resistor ($\geq 250 \Omega$): Observe maximum load
- 3 Connection for Commubox FXA195 or FieldXpert SFX350/SFX370 (via VIATOR Bluetooth modem)
- 4 Analog display device: Observe maximum load
- 5 Signal cable including screening (if required), observe cable specification
- 6 Protective connection; do not disconnect!
- 7 Protective earth, observe cable specification
- 8 4...20mA HART (active): Terminals 3 and 4
- 9 Supply voltage: Terminals 1 and 2
- 10 Supply voltage: Observe terminal voltage, observe cable specification
- 11 Terminal for potential equalization
- 12 Cable entry for signal line
- 13 Cable entry for power supply

CAUTION

To ensure electrical safety:

- ▶ Do not disconnect the protective connection (6).
- ▶ Disconnect the supply voltage before disconnecting the protective earth (7).


- i** Connect protective earth to the internal ground terminal (7) before connecting the supply voltage. If necessary, connect the potential matching line to the external ground terminal (11).
- i** In order to ensure electromagnetic compatibility (EMC): Do not only ground the device via the protective earth conductor of the supply cable. Instead, the functional grounding must also be connected to the process connection (flange or threaded connection) or to the external ground terminal.
- i** An easily accessible power switch must be installed in the proximity of the device. The power switch must be marked as a disconnector for the device (IEC/EN61010).

Connection examples for the switch output



For HART devices, the switch output is available as an option. See product structure, feature 20: "Power Supply, Output", option B: "2-wire; 4-20mA HART, switch output"

Devices with PROFIBUS PA and FOUNDATION Fieldbus always have a switch output.

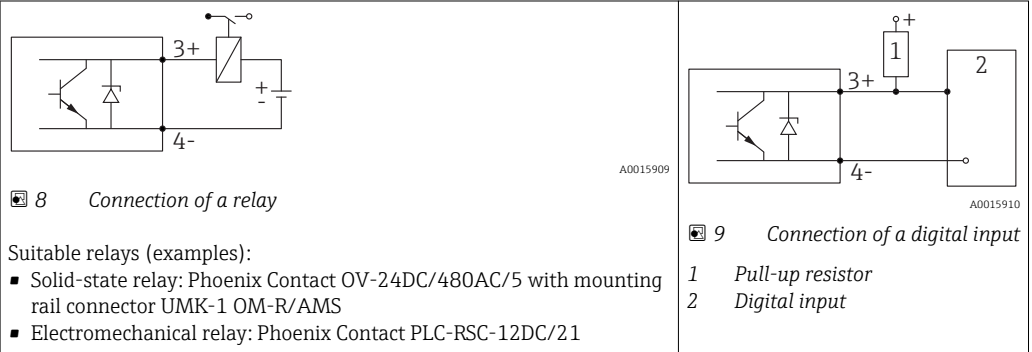


For optimum interference immunity we recommend to connect an external resistor (internal resistance of the relay or Pull-up resistor) of $< 1\,000\ \Omega$.


Device plug connectors

For the versions with fieldbus plug connector (M12 or 7/8"), the signal line can be connected without opening the housing.

Pin assignment of the M12 plug connector

 A0011175	Pin	Meaning
	1	Signal +
	2	not connected
	3	Signal -
	4	Ground

Pin assignment of the 7/8" plug connector

 A0011176	Pin	Meaning
	1	Signal -
	2	Signal +
	3	Not connected
	4	Screen

Supply voltage

An external power supply is necessary.



Various power supply units can be ordered as an accessory from Endress+Hauser.

2-wire, 4-20mA HART, passive

"Power supply, output" ¹⁾	"Approval" ²⁾	Terminal voltage U at device	Maximum load R, depending on the supply voltage U ₀ of the power supply unit
A: 2-wire; 4-20mA HART	- Non-hazardous - Ex nA - Ex ic - CSA GP	14 to 35 V	
	Ex ia / IS	14 to 30 V	
	- Ex d(ia) / XP - Ex ic(ia) - Ex nA(ia) - Ex ta / DIP	14 to 35 V ³⁾	
	Ex ia + Ex d(ia) / IS + XP	14 to 30 V	

1) Feature 020 in the product structure

2) Feature 010 in the product structure

3) At ambient temperatures $T_a \leq -20^\circ\text{C}$, a terminal voltage $U \geq 16\text{ V}$ is required to start the device with the min. error current (3.6 mA).

"Power supply, output" ¹⁾	"Approval" ²⁾	Terminal voltage U at device	Maximum load R, depending on the supply voltage U ₀ of the power supply unit
B: 2-wire; 4-20 mA HART, switch output	- Non-hazardous - Ex nA - Ex nA(ia) - Ex ic - Ex ic(ia) - Ex d(ia) / XP - Ex ta / DIP - CSA GP	16 to 35 V	
	- Ex ia / IS - Ex ia + Ex d(ia) / IS + XP	16 to 30 V	

1) Feature 020 in the product structure

2) Feature 010 in the product structure

"Power supply, output" ¹⁾	"Approval" ²⁾	Terminal voltage U at device	Maximum load R, depending on the supply voltage U ₀ of the power supply unit
C: 2-wire; 4-20mA HART, 4-20mA	All	16 to 30 V	

1) Feature 020 in the product structure

2) Feature 010 in the product structure

Integrated polarity reversal protection	Yes
Permitted residual ripple with f = 0 to 100 Hz	$U_{SS} < 1\text{ V}$
Permitted residual ripple with f = 100 to 10000 Hz	$U_{SS} < 10\text{ mV}$

4-wire, 4-20mA HART, active

"Power supply; output" ¹⁾	Terminal voltage U	Maximum load R _{max}
K: 4-wire 90-253VAC; 4-20mA HART	90 to 253 V _{AC} (50 to 60 Hz), overvoltage category II	500 Ω
L: 4-wire 10.4-48VDC; 4-20mA HART	10.4 to 48 V _{DC}	

1) Feature 020 in the product structure

Power consumption	"Power supply; Output" ¹⁾	Power consumption
	A: 2-wire; 4-20mA HART	< 0.9 W
	B: 2-wire; 4-20mA HART, switch output	< 0.9 W
	C: 2-wire; 4-20mA HART, 4-20mA	< 2 x 0.7 W
	K: 4-wire 90-253VAC; 4-20mA HART	6 VA
	L: 4-wire 10,4-48VDC; 4-20mA HART	1.3 W

1) Feature 020 of the product structure

Current consumption	HART				
	<table> <tr> <td>Nominal current</td><td>3.6 to 22 mA, the start-up current for multidrop mode can be parametrized (is set to 3.6 mA on delivery)</td></tr> <tr> <td>Breakdown signal (NAMUR NE43)</td><td>adjustable: 3.59 to 22.5 mA</td></tr> </table>	Nominal current	3.6 to 22 mA, the start-up current for multidrop mode can be parametrized (is set to 3.6 mA on delivery)	Breakdown signal (NAMUR NE43)	adjustable: 3.59 to 22.5 mA
Nominal current	3.6 to 22 mA, the start-up current for multidrop mode can be parametrized (is set to 3.6 mA on delivery)				
Breakdown signal (NAMUR NE43)	adjustable: 3.59 to 22.5 mA				

Power supply failure	- Configuration is retained in the HistoROM (EEPROM). - Error messages (incl. value of operated hours counter) are stored.
----------------------	---

Potential equalization	No special measures for potential equalization are required.  If the device is designed for hazardous areas, observe the information in the documentation "Safety Instructions" (XA).
------------------------	--

Cable entries	Connection of power supply and signal line To be selected in feature 050 "Electrical connection" - Gland M20; Material dependent on the approval: - For Non-Ex, ATEX, IECEx, NEPSI Ex ia/ic: Plastics M20x1.5 for cable Ø5 to 10 mm (0.2 to 0.39 in) - For Dust-Ex, FM IS, CSA IS, CSA GP, Ex nA: Metal M20x1.5 for cable Ø7 to 10 mm (0.28 to 0.39 in) ¹⁾ - For Ex d: No gland available - Thread ½" NPT - G ½" - M20 × 1.5 - Plug M12 / Plug 7/8" - Only available for Non-Ex, Ex ic, Ex ia Connection of remote display FHX50 Dependent on feature 030: "Display, Operation": "Prepared for display FHX50 + M12 connection": M12 socket "Prepared for display FHX50 + custom connection": M16 cable gland
---------------	---

1) The material of the gland is dependent on the housing type; GT18 (stainless steel housing): 316L (1.4404); GT19 (plastic housing) and GT20 (aluminum housing): nickel-coated brass (CuZn).

Cable specification

- **Devices without integrated overvoltage protection**
Pluggable spring-force terminals for wire cross-sections 0.5 to 2.5 mm² (20 to 14 AWG)
- **Devices with integrated overvoltage protection**
Screw terminals for wire cross-sections 0.2 to 2.5 mm² (24 to 14 AWG)
- For ambient temperature $T_U \geq 60^\circ\text{C}$ (140 °F): use cable for temperature $T_U + 20\text{ K}$.

HART

- A normal device cable suffices if only the analog signal is used.
- A shielded cable is recommended if using the HART protocol. Observe grounding concept of the plant.
- For 4-wire devices: Standard device cable is sufficient for the power line.

Overvoltage protection

If the measuring device is used for level measurement in flammable liquids which requires the use of overvoltage protection according to DIN EN 60079-14, standard for test procedures 60060-1 (10 kA, pulse 8/20 µs), overvoltage protection has to be ensured by an integrated or external overvoltage protection module.

Integrated overvoltage protection

An integrated overvoltage protection module is available for 2-wire HART as well as PROFIBUS PA and FOUNDATION Fieldbus devices.

Product structure: Feature 610 "Accessory mounted", option NA "Overvoltage protection".

Technical data	
Resistance per channel	$2 \times 0.5\ \Omega\ \text{max.}$
Threshold DC voltage	400 to 700 V
Threshold impulse voltage	< 800 V
Capacitance at 1 MHz	< 1.5 pF
Nominal arrest impulse voltage (8/20 µs)	10 kA

External overvoltage protection

HAW562 or HAW569 from Endress+Hauser are suited as external overvoltage protection.



For detailed information please refer to the following documents:

- HAW562: TI01012K
- HAW569: TI01013K

Performance characteristics


Reference operating conditions	- Temperature = +24 °C (+75 °F) ±5 °C (±9 °F) - Pressure = 960 mbar abs. (14 psia) ±100 mbar (±1.45 psi) - Humidity = 60 % ±15 % - Reflector: metal plate with diameter ≥ 1 m (40 in) - No major interference reflections inside the signal beam
--------------------------------	--

Maximum measured error	Typical data under reference operating conditions: DIN EN IEC 61298-2 / DIN EN IEC 60770-1; percentage values in relation to the span.
------------------------	--

Device	Value	Output	
		digital	analog ¹⁾
FMR62	Sum of non-linearity, non-repeatability and hysteresis	±1 mm (0.04 in)	±0.02 %
	Offset/Zero	±4 mm (0.2 in)	±0.03 %

1) Only relevant for 4-20mA current output; add error of the analog value to the digital value

Differing values in near-range applications

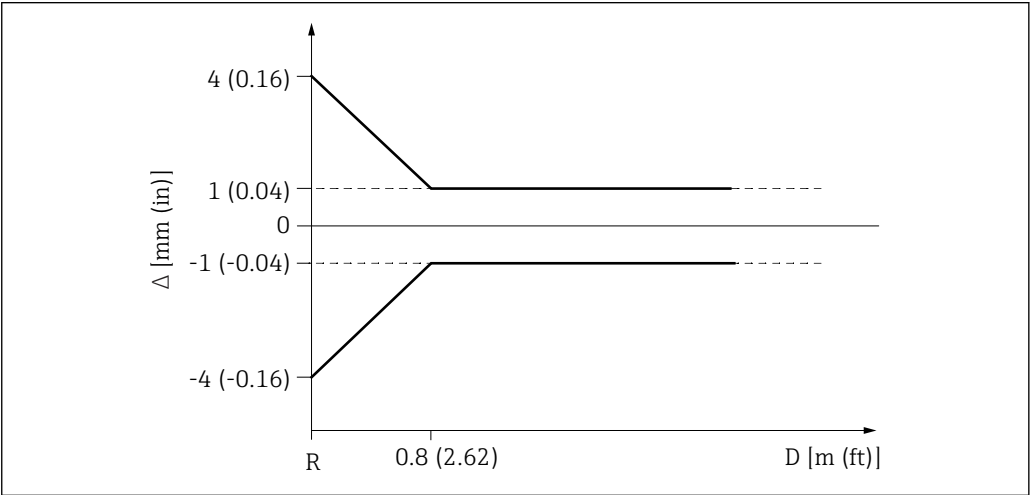

10 Maximum measured error in near-range applications

- Δ Maximum measured error
- R Reference point of the distance measurement
- D Distance from reference point of antenna

Measured value resolution	Dead band according to DIN EN IEC 61298-2 / DIN EN IEC 60770-1: - Digital: 1 mm - Analog: 1 μA
---------------------------	--

Response time	The response time can be configured. The following step response times (in accordance with DIN EN IEC 61298-2 / DIN EN IEC 60770-1) ²⁾ are when damping is switched off:
---------------	---

Sampling rate	≥1.3 s ⁻¹ at UB ≥ 24 V
Response time	< 3.6 s

2) According to DIN EN IEC 61298-2 / DIN EN IEC 60770-1, the step response time is the time that elapses after an abrupt change in the input signal until the change in the output signal has adopted 90% of the steady-state value for the first time.

Influence of ambient temperature

The measurements are performed according to DIN EN IEC 61298-3 / DIN EN IEC 60770-1

- Digital (HART, PROFIBUS PA, FOUNDATION Fieldbus): average $T_K = 3 \text{ mm}/10 \text{ K}$
- Analog (current output):
 - Zero point (4 mA): average $T_K = 0.02 \text{ } \%/10 \text{ K}$
 - Span (20 mA): average $T_K = 0.05 \text{ } \%/10 \text{ K}$

Influence of gas phase

High pressure reduces the speed of propagation of the measuring signals in the gas/vapor above the medium. This effect depends on the type of gas phase and its temperature. This results in a systematic measured error that increases with increasing distance between the reference point of the measurement (flange) and the surface of the product. The following table shows this measured error for a few typical gases/vapors (with regard to the distance, a positive value means that a too large distance is measured):

Gas phase	Temperature		Pressure		
	°C	°F	1 bar (14,5 psi)	10 bar (145 psi)	25 bar (362 psi)
Air/nitrogen	20	68	0.00 %	0.22 %	0.58 %
	200	392	−0.01 %	0.13 %	0.36 %
	400	752	−0.02 %	0.08 %	0.29 %
Hydrogen	20	68	−0.01 %	0.10 %	0.25 %
	200	392	−0.02 %	0.05 %	0.17 %
	400	752	−0.02 %	0.03 %	0.11 %
Water (saturated steam)	100	212	0.02 %	-	-
	180	356	-	2.1 %	-
	263	505,4	-	-	4.15 %
	310	590	-	-	-
	364	687	-	-	-




With a known, constant pressure, it is possible to compensate for this measured error with a linearization, for example.

Installation


Installation conditions

Orientation

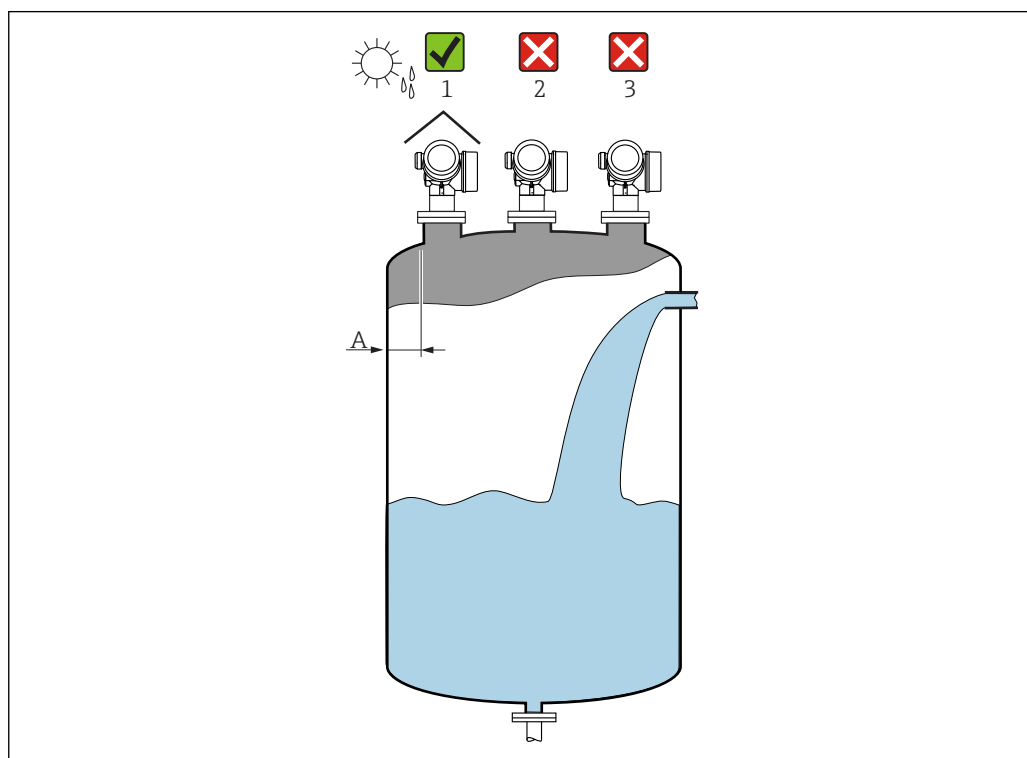


A0016882

- Recommended distance **A** wall - nozzle outer edge: $\sim 1/6$ of the container diameter. However, the device must not under any circumstances be mounted closer than 15 cm (5.91 in) to the tank wall.
- Not in the center (2) as interference can cause signal loss.
- Not above the filling curtain (3).
- The use of a weather protection cover (1) is recommended to protect the transmitter from direct sunlight or rain.

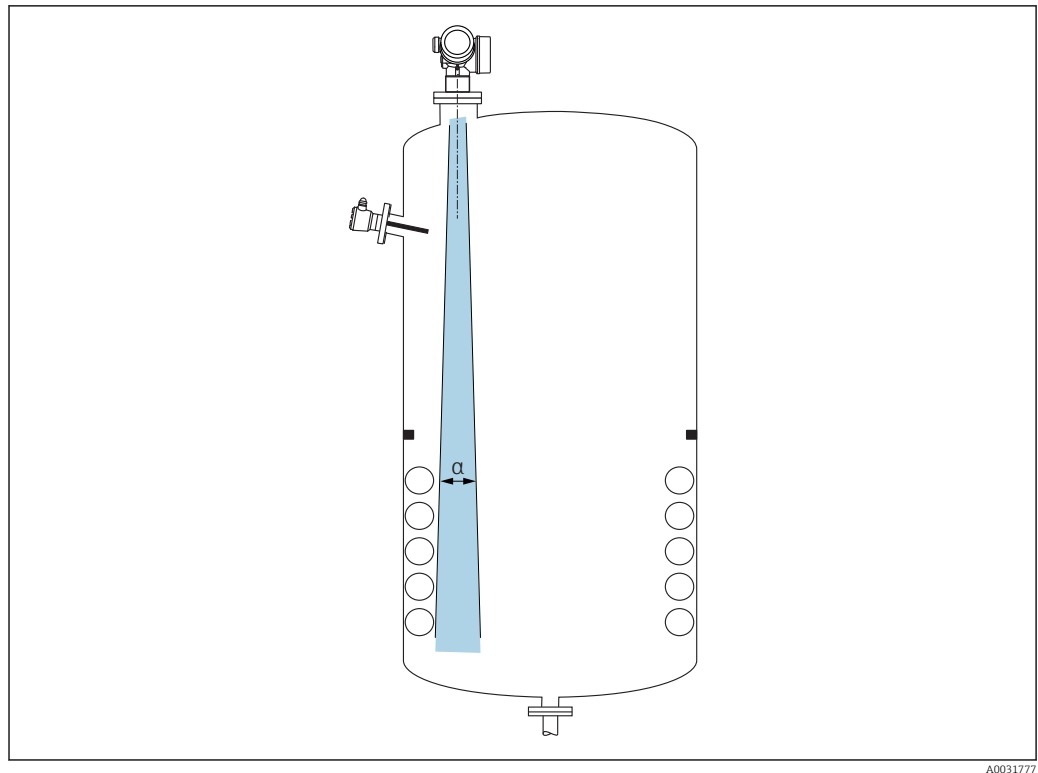Internal container fittings

Avoid the location of internal fittings (limit switches, temperature sensors, struts, vacuum rings, heating coils, baffles etc.) inside the signal beam. Take into account the beam angle → 27.

Avoiding interference echoes

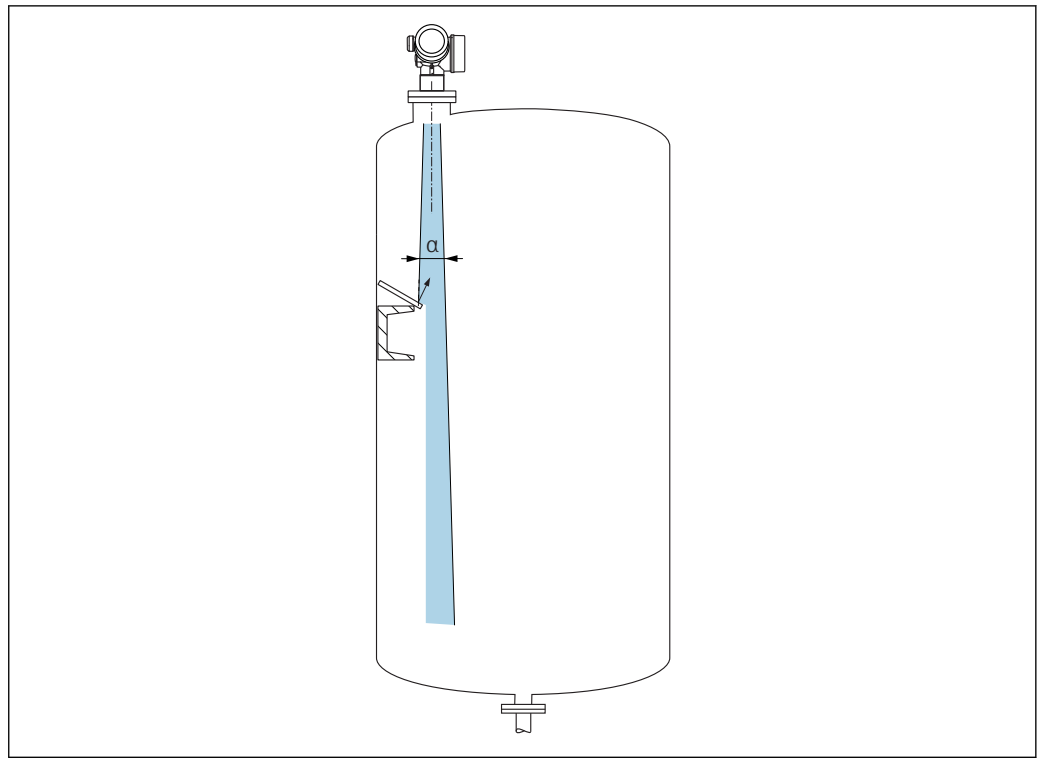


A0031813

Metal orifice plates installed at an angle to scatter the radar signals help prevent interference echoes.

Optimization options

- Antenna size
The larger the antenna the smaller the beam angle α , resulting in fewer interference echoes
→ 27.
- Mapping
Measurement can be optimized by electronically suppressing interference echoes.



Beam angle

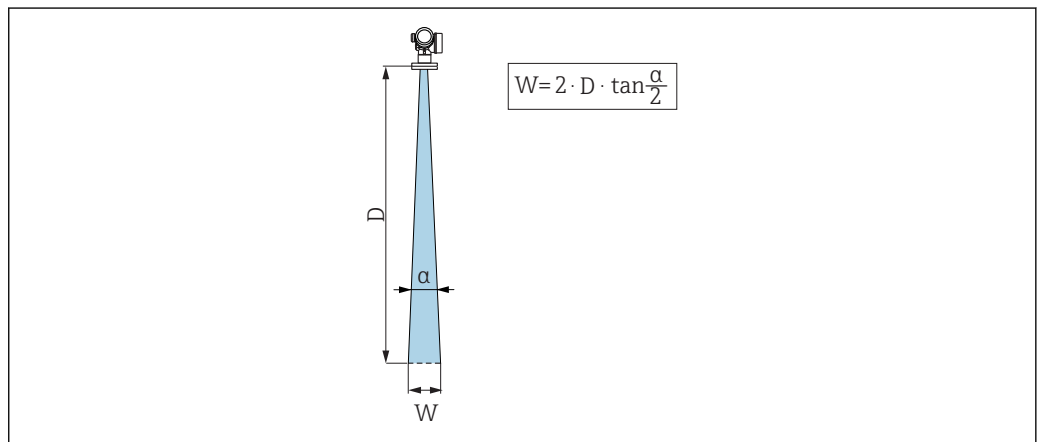

A0031824

11 Relationship between beam angle α , distance D and beamwidth diameter W

The beam angle is defined as the angle α where the energy density of the radar waves reaches half the value of the maximum energy density (3dB width). Microwaves are also emitted outside the signal beam and can be reflected off interfering installations.

FMR62				
	 A0032081		 A0032082	
Antenna ¹⁾	integrated , PEEK, 20 mm / 3/4"	integrated, PEEK, 40 mm / 1-1/2"	PTFE clad flush mount 50 mm / 2"	PTFE clad flush mount 80 mm / 3"
Beam angle α	15 °	8 °	7 °	4 °
Distance (D)	Beamwidth diameter W			
5 m (16 ft)	1.32 m (4.33 ft)	0.70 m (2.29 ft)	0.61 m (2.00 ft)	0.35 m (1.14 ft)
10 m (33 ft)	2.63 m (8.63 ft)	1.40 m (4.58 ft)	1.22 m (4.00 ft)	0.70 m (2.29 ft)
15 m (49 ft)	-	2.09 m (6.87 ft)	1.83 m (6.01 ft)	1.05 m (3.43 ft)
20 m (66 ft)	-	2.79 m (9.16 ft)	2.44 m (8.01 ft)	1.40 m (4.58 ft)
25 m (82 ft)	-	-	3.05 m (10.02 ft)	1.74 m (5.72 ft)
30 m (98 ft)	-	-	3.66 m (12.02 ft)	2.09 m (6.87 ft)
35 m (115 ft)	-	-	4.27 m (14.02 ft)	2.44 m (8.01 ft)
40 m (131 ft)	-	-	4.88 m (16.03 ft)	2.79 m (9.16 ft)
45 m (148 ft)	-	-	5.50 m (18.03 ft)	3.14 m (10.30 ft)
50 m (164 ft)	-	-	6.11 m (20.03 ft)	3.49 m (11.45 ft)
60 m (197 ft)	-	-	-	4.19 m (13.74 ft)
70 m (230 ft)	-	-	-	4.88 m (16.03 ft)
80 m (262 ft)	-	-	-	5.58 m (18.31 ft)

1) Order code 070


Installation: integrated antenna

Radial alignment of the antenna

Radial alignment of the antenna is not necessary because the effect of polarization is negligible due to the narrow beam angle.

Information concerning nozzles

The maximum nozzle length H_{max} depends on the nozzle diameter D :

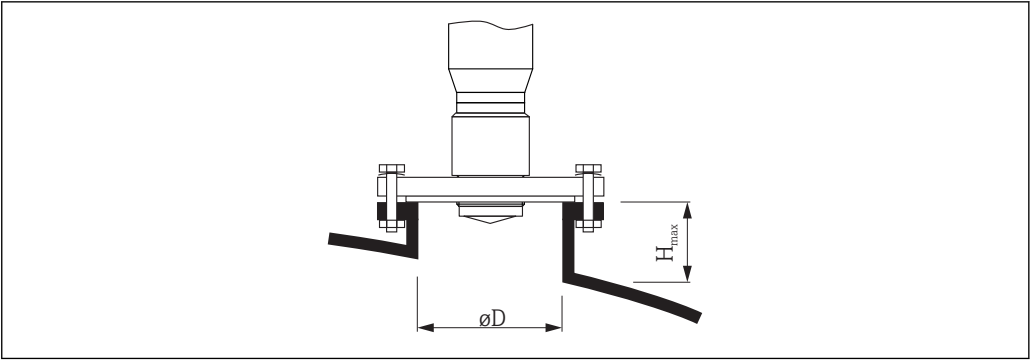

A0032208

Nozzle diameter D	Maximum nozzle height H_{max}
40 to 50 mm (1.5 to 2 in)	≤ 150 mm (6 in)
80 mm (3 in)	≤ 200 mm (8 in)
100 mm (4 in)	≤ 300 mm (12 in)
150 mm (6 in)	≤ 500 mm (20 in)

- i** Note the following if the antenna does not project out of the nozzle:
- The end of the nozzle must be smooth and free from burrs. The edge of the nozzle should be rounded if possible.
 - Mapping must be performed.
 - Please contact Endress+Hauser for applications with nozzles that are higher than indicated in the table.

Information concerning threaded connections


- When screwing in, turn by the hex bolt only.
- Tool: open-ended wrench 50 mm
- Maximum permissible torque: 35 Nm (26 lbf ft)

Installation: flush mount antenna

Aligning the antenna axis

Radial alignment of the antenna is not necessary because the effect of polarization is negligible due to the narrow beam angle.

Information concerning nozzles

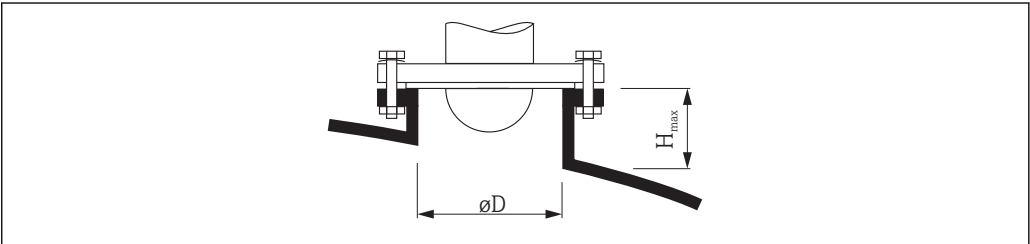

A0032206

Nozzle diameter D	Maximum nozzle height H_{max}
50 mm (2 in)	≤ 150 mm (6 in)
80 mm (3 in)	≤ 200 mm (8 in)

Nozzle diameter D	Maximum nozzle height H_{max}
100 mm (4 in)	≤300 mm (12 in)
150 mm (6 in)	≤500 mm (20 in)


- i** Note the following if the antenna does not project out of the nozzle:
- The end of the nozzle must be smooth and free from burrs. The edge of the nozzle should be rounded if possible.
 - Mapping must be performed.
 - Please contact Endress+Hauser for applications with nozzles that are higher than indicated in the table.

Mounting cladded flanges

- i** Note the following for cladded flanges:
- Use the same number of flange screws as the number of flange bores provided.
 - Tighten the screws with the necessary torque (see Table).
 - Retighten after 24 hours or after the first temperature cycle.
 - Depending on the process pressure and temperature, check and retighten the screws, where necessary, at regular intervals.
- i** The PTFE flange cladding normally acts simultaneously as a seal between the nozzle and the device flange.

Flange size	Number of screws	Recommended tightening torque [Nm]	
		Minimum	Maximum
EN			
DN50/PN16	4	45	65
DN80/PN16	8	40	55
DN100/PN16	8	40	60
DN150/PN16	8	75	115
ASME			
2"/150lbs	4	40	55
3"/150lbs	4	65	95
4"/150lbs	8	45	70
6"/150lbs	8	85	125
JIS			
10K 50A	4	40	60
10K 80A	8	25	35
10K 100A	8	35	55
10K 150A	8	75	115

Container with heat insulation

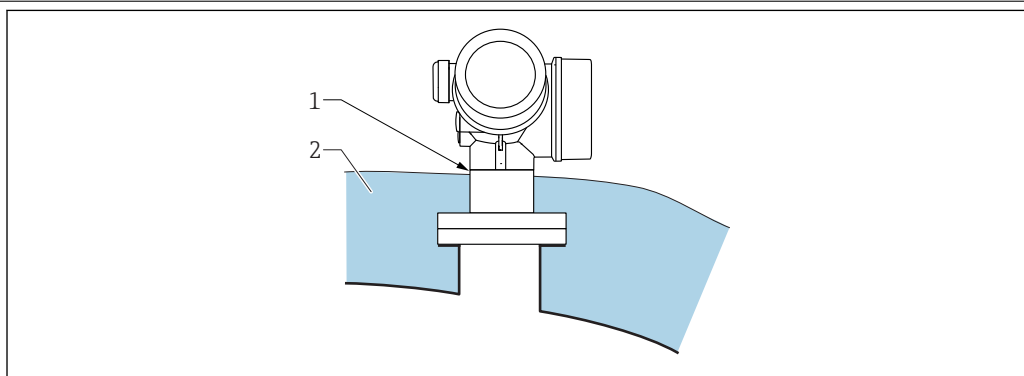


A0032207

If process temperatures are high, the device should be included in the usual container insulation system (2) to prevent the electronics from heating as a result of thermal radiation or convection. The insulation should not be higher than the neck of the device (1).

Turning the transmitter housing


To provide easier access to the connection compartment or display module, the transmitter housing can be turned:

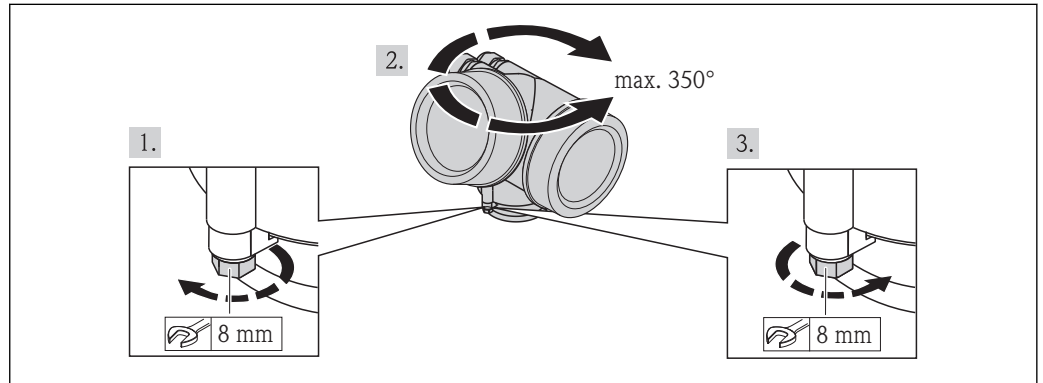

A0013713

1. Unscrew the securing screw using an open-ended wrench.
2. Rotate the housing in the desired direction.
3. Tighten the securing screw (1,5 Nm for plastics housing; 2,5 Nm for aluminium or stainless steel housing).

Turning the display module

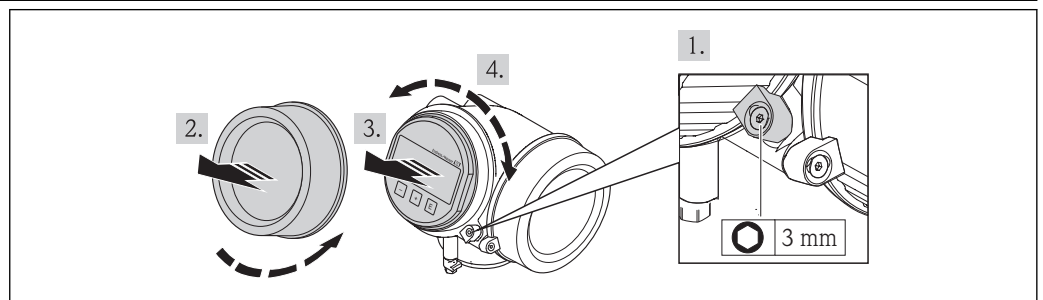

A0013905

1. If present: Loosen the screw of the securing clamp of the electronics compartment cover using an Allen key and turn the clamp 90° counterclockwise.
2. Unscrew cover of the electronics compartment from the transmitter housing.
3. Pull out the display module with a gentle rotation movement.
4. Rotate the display module into the desired position: Max. $8 \times 45^\circ$ in each direction.
5. Feed the spiral cable into the gap between the housing and main electronics module and plug the display module into the electronics compartment until it engages.
6. Screw the cover of the electronics compartment firmly back onto the transmitter housing.
7. Tighten the securing clamp again using the Allen key (Torque: 2.5 Nm).

Environment

Ambient temperature range

Measuring device	-40 to +80 °C (-40 to +176 °F)
Local display	-20 to +70 °C (-4 to +158 °F), the readability of the display may be impaired at temperatures outside the temperature range.

Outdoor operation in strong sunlight:

- Mount the device in the shade.
- Avoid direct sunlight, particularly in warm climatic regions.
- Use a weather protection cover (see accessories).

Ambient temperature limits

 The following diagrams only consider functional aspects. Additional restrictions may apply for certified device versions. See the separate Safety Instructions for more information →  71.

In the event of temperature (T_p) at the process connection, the permitted ambient temperature (T_a) is reduced as indicated in the following diagram (temperature derating) in the table header.

FMR62


Antenna ¹⁾

- GE: integrated, PEEK, 3/4"
- GF: integrated, PEEK, 1-1/2"
- GM: PTFE cladded flush mount DN50
- GN: PTFE cladded flush mount DN80

Seal ²⁾

- A6: FKM Viton GLT, -40 to 200 °C (-40 to 392 °F)
- C2: FFKM Kalrez, -20 to 200 °C (-4 to 392 °F)
- F6: PTFE cladded, -40 to 200 °C (-40 to 392 °F)

Temperature specifications: °C (°F)



A0032024

Housing type ³⁾	P1		P2		P3		P4		P5	
	T_p	T_a	T_p	T_a	T_p	T_a	T_p	T_a	T_p	T_a
B: GT18 two-chamber 316L	-40 (-40)	76 (168.8)	76 (168.8)	76 (168.8)	200 (392)	63 (145.4)	200 (392)	-40 (-40)	-40 (-40)	-40 (-40)
A: GT19 two-chamber Plastic PBT	-40 (-40)	60 (140)	60 (140)	60 (140)	200 (392)	42 (107.6)	200 (392)	-40 (-40)	-40 (-40)	-40 (-40)
C: GT20 two-chamber Aluminum, coated	-40 (-40)	76 (168.8)	76 (168.8)	76 (168.8)	200 (392)	68 (154.4)	200 (392)	-40 (-40)	-40 (-40)	-40 (-40)

1) Feature 070 in the product structure

2) Feature 090 in the product structure


3) Feature 040 in the product structure

FMR62**Antenna ¹⁾**

- GE: integrated, PEEK, 3/4"
- GF: integrated, PEEK, 1-1/2"
- GM: PTFE cladde flush mount DN50
- GN: PTFE cladde flush mount DN80

Seal ²⁾

- A5: FKM Viton GLT, -40 to 150 °C (-40 to 302 °F)
- C1: FFKM Kalrez, -40 to 150 °C (-40 to 302 °F)
- F5: PTFE cladde, -40 to 150 °C (-40 to 302 °F)

Temperature specifications: °C (°F)

A0032025

Housing type ³⁾	P1		P2		P2+		P3		P4		P5	
	T _p	T _a	T _p	T _a	T _p	T _a	T _p	T _a	T _p	T _a	T _p	T _a
B: GT18 two-chamber 316L	-40 (-40)	76 (168.8)	76 (168.8)	76 (168.8)	109 (228.2)	71 (159.8)	150 (302)	47 (116.6)	150 (302)	-40 (-40)	-40 (-40)	-40 (-40)
A: GT19 two-chamber Plastic PBT	-40 (-40)	60 (140)	60 (140)	60 (140)	127 (260.6)	45 (113)	150 (302)	24 (75.2)	150 (302)	-40 (-40)	-40 (-40)	-40 (-40)
C: GT20 two-chamber Aluminum, coated	-40 (-40)	76 (168.8)	76 (168.8)	76 (168.8)	112 (233.6)	72 (161.6)	150 (302)	55 (131)	150 (302)	-40 (-40)	-40 (-40)	-40 (-40)

1) Feature 070 in the product structure

2) Feature 090 in the product structure

3) Feature 040 in the product structure

Storage temperature -40 to +80 °C (-40 to +176 °F)**Climate class** DIN EN 60068-2-38 (test Z/AD)**Altitude according to IEC61010-1 Ed.3**

- Generally up to 2 000 m (6 600 ft) above MSL.
- Above 2 000 m (6 600 ft) if the following conditions are met:
 - Ordering feature 020 "Power supply; Output" = A, B, C, E or G (2-wire versions)
 - Supply voltage U < 35 V
 - Supply voltage of overvoltage category 1

Degree of protection

- With closed housing tested according to:
 - IP68, NEMA6P (24 h at 1.83 m under water surface)
 - For plastic housing with transparent cover (display module): IP68 (24 h at 1.00 m under water surface) ³⁾
 - IP66, NEMA4X
- With open housing: IP20, NEMA1
- Display module: IP22, NEMA2



Degree of protection IP68 NEMA6P applies for M12 PROFIBUS PA plugs only when the PROFIBUS cable is plugged in and is also rated IP68 NEMA6P.

Vibration resistance DIN EN 60068-2-64 / IEC 60068-2-64: 20 to 2 000 Hz, 1 (m/s²)²/Hz**Cleaning the antenna**

The antenna may become contaminated depending on the application. Emission and reception of microwaves can thus be hindered. The level of contamination leading to an error depends firstly on the medium and secondly on the reflectivity, mainly determined by the dielectric constant ϵ_r .

If the medium tends to cause contamination and buildup, cleaning on a regular basis is recommended. Care must be taken to ensure the antenna is not damaged in the process of mechanical or hose-down cleaning. Material compatibility must be taken into account if cleaning agents are used! The maximum permissible flange temperatures should not be exceeded.

3) This restriction is valid if the following options of the product structure have been selected at the same time: 030 ("Display, Operation") = C ("SD02") or E ("SD03"); 040 ("Housing") = A ("GT19").

**Electromagnetic
compatibility (EMC)**

Electromagnetic compatibility in accordance with all of the relevant requirements outlined in the EN 61326 series and NAMUR Recommendation EMC (NE 21). For details, please refer to the Declaration of Conformity ⁴⁾.

A normal device cable suffices if only the analog signal should be used. Use a shielded cable for digital communication (HART/ PA/ FF).

Maximum measured error during EMC testing: < 0.5 % of the span. By way of derogation, for devices with a plastic housing and see-through lid (integrated display SD02 or SD03) the measured error can be up to 2 % of the span in the event of strong electromagnetic radiation in the 1 to 2 GHz frequency range.

4) Available for download at www.de.endress.com.

Process


Process temperature, process pressure

i The pressure ranges indicated can be reduced by the choice of process connection. The nominal pressure (PN) indicated on the nameplate refers to a reference temperature of 20 °C, and of 100 °F for ASME flanges. Observe pressure-temperature dependency.

Please refer to the following standards for the pressure values permitted at higher temperatures:

- EN 1092-1: 2001 Tab. 18
In terms of their stability-temperature property, the materials 1.4435 and 1.4404 are grouped in EN 1092-1 table 18 under 13E0. The chemical composition of the two materials can be identical.
- ASME B 16.5a – 1998 Tab. 2-2.2 F316
- ASME B 16.5a – 1998 Tab. 2.3.8 N10276
- JIS B 2220

FMR62, antenna: integrated PEEK, 150°

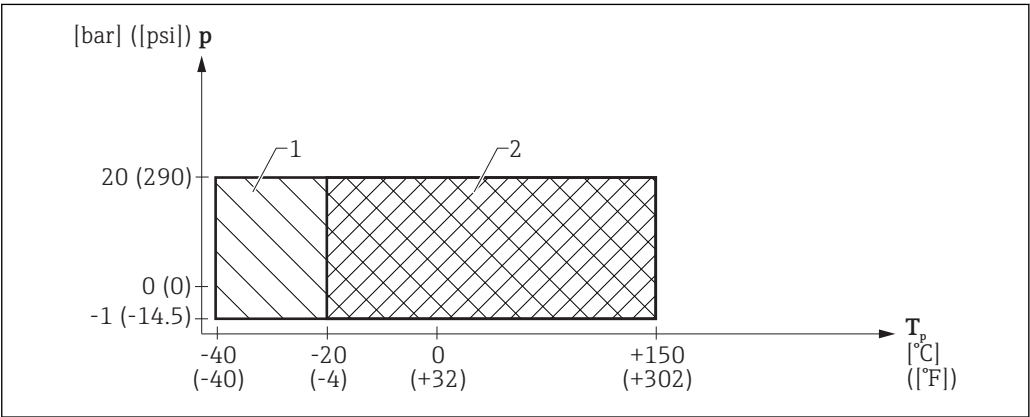


12 FMR62: Permitted range for process temperature and process pressure of version with integrated antenna, PEEK, 150° (feature 070)

1 Feature 90, seal: A5, FKM Viton GLT

2 Feature 90, seal: C1, FFKM Kalrez

Feature 90 "Seal"	Process temperature range	Process pressure range
A5: FKM Viton GLT	-40 to +150 °C (-40 to +302 °F)	$p_{rel} = -1 \text{ to } 20 \text{ bar } (-14.5 \text{ to } 290 \text{ psi})$ ¹⁾
C1: FFKM Kalrez	-20 to +150 °C (-4 to +302 °F)	

1) The pressure range may be further restricted in the event of a CRN approval

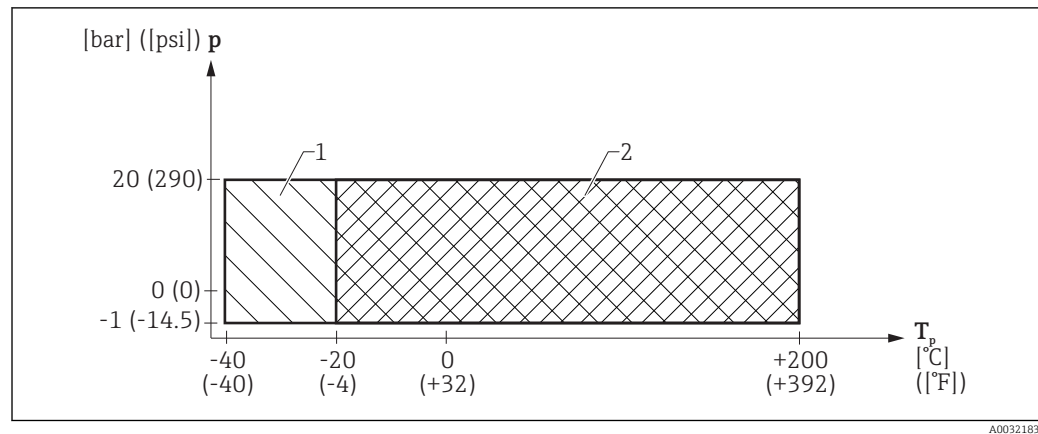FMR62, antenna: integrated PEEK, 200°


A0032183

13 FMR62: Permitted range for process temperature and process pressure of version with integrated antenna, PEEK, 200° (feature 070)

- 1 Feature 90, seal: A6, FKM Viton GLT
 2 Feature 90, seal: C2, FFKM Kalrez

Feature 90 "Seal"	Process temperature range	Process pressure range
A6: FKM Viton GLT	-40 to +200 °C (-40 to +392 °F)	$p_{rel} = -1 \text{ to } 20 \text{ bar } (-14.5 \text{ to } 290 \text{ psi})$ ¹⁾
C2: FFKM Kalrez	-20 to +200 °C (-4 to +392 °F)	

- 1) The pressure range may be further restricted in the event of a CRN approval

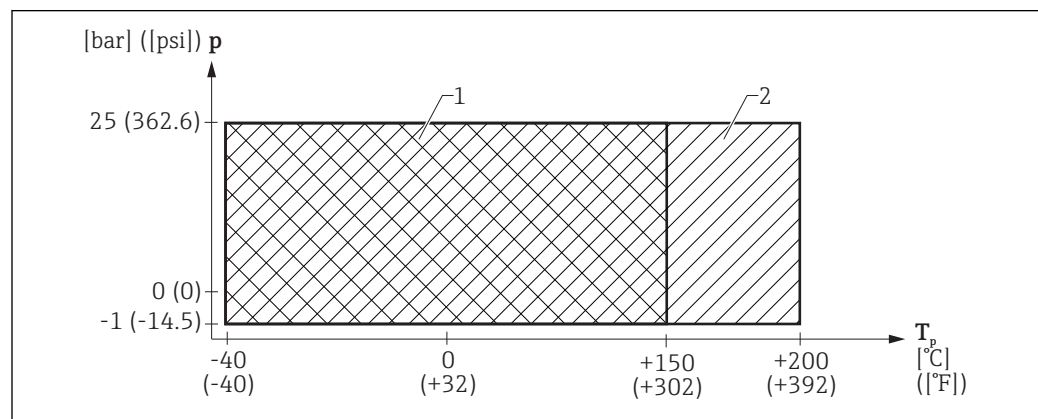FMR62, antenna: PTFE flush mount

A0032184

14 FMR62: Permitted range for process temperature and process pressure of version with flush mount PTFE antenna (feature 070)

- 1 Feature 90, seal: F5
 2 Feature 90, seal: F6

Feature 90 "Seal"	Process temperature range	Process pressure range
F5: PTFE claddd	-40 to +150 °C (-40 to +302 °F)	$p_{rel} = -1 \text{ to } 25 \text{ bar } (-14.5 \text{ to } 362.6 \text{ psi})$ ¹⁾
F6: PTFE claddd	-40 to +200 °C (-40 to +392 °F)	

- 1) The pressure range may be further restricted in the event of a CRN approval

Dielectric constant

- **For liquids**

$\epsilon_r \geq 1.9$

- **For bulk solids**

$\epsilon_r \geq 1.6$




For dielectric constants (DC values) of many media commonly used in various industries refer to:

- the Endress+Hauser DC manual (CP01076F)
- the Endress+Hauser "DC Values App" (available for Android and iOS)

Mechanical construction

Dimensions


Dimensions of the electronics housing

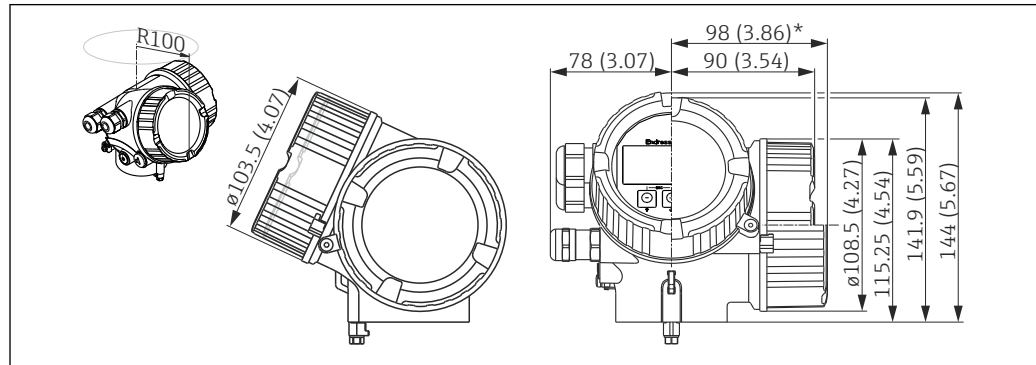

A0011666

15 Housing GT18 (316L); Dimensions in mm (in)


*for devices with integrated overvoltage protection.

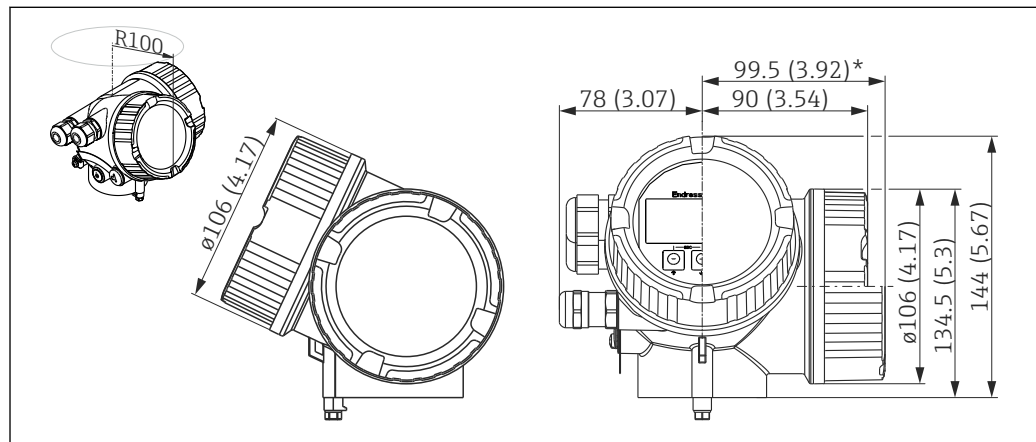

A0011346

16 Housing GT19 (Plastics PBT); Dimensions in mm (in)

*for devices with integrated overvoltage protection.

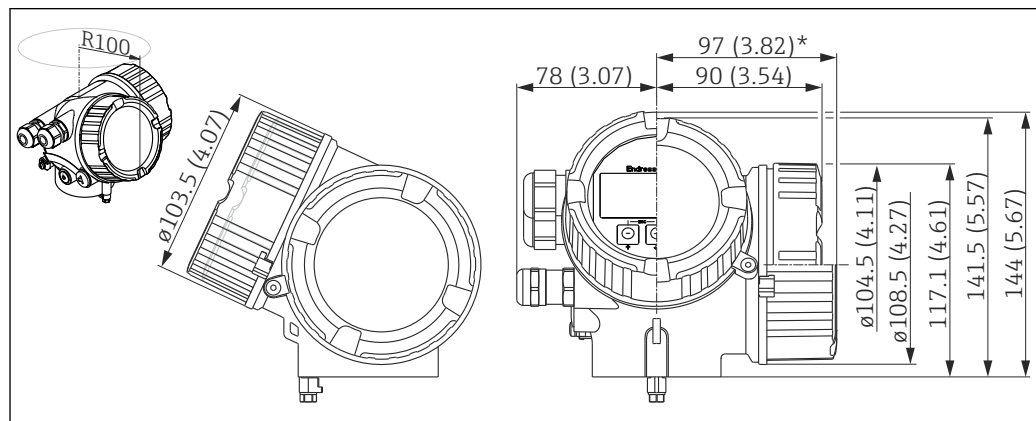


A0020751

17 Housing GT20 (Alu coated); Dimensions in mm (in)

*for devices with integrated overvoltage protection.


FMR62, antenna: integrated, PEEK 3/4" and 1-1/2"

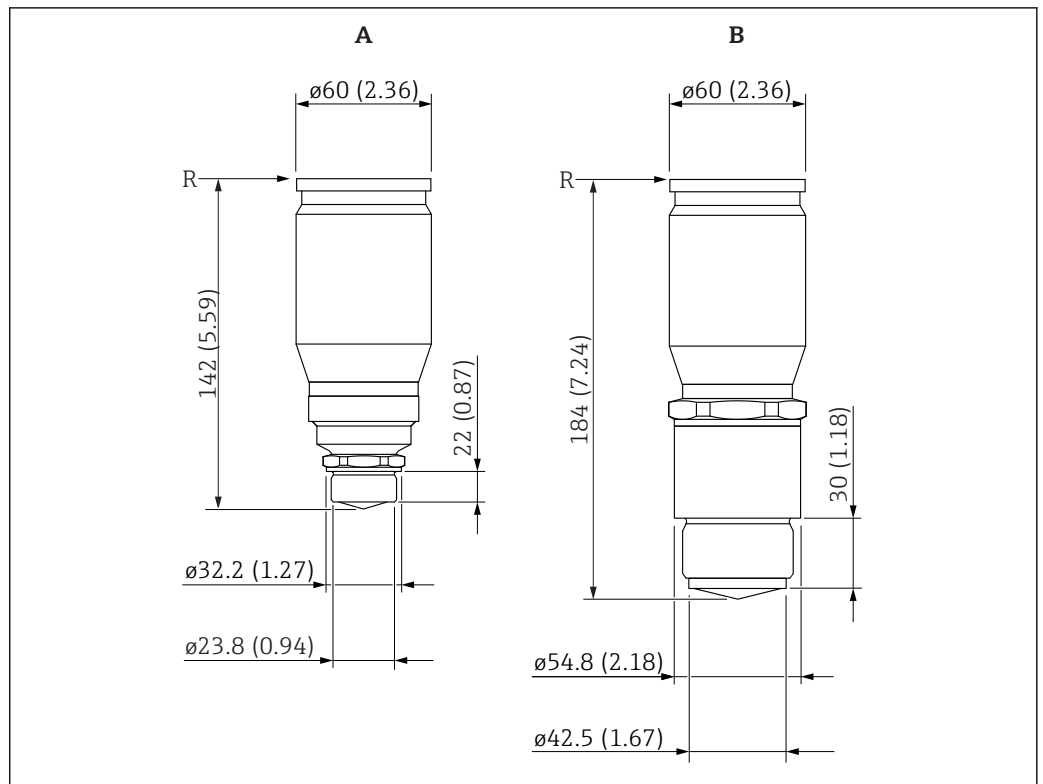

18 Dimensions: mm (in)

- A Process connection: G3/4 or MNPT3/4 thread
 B Process connection: G1-1/2 or MNPT1-1/2 thread
 R Bottom edge of housing


FMR62, sanitary adapter DIN11851, PTFE clad

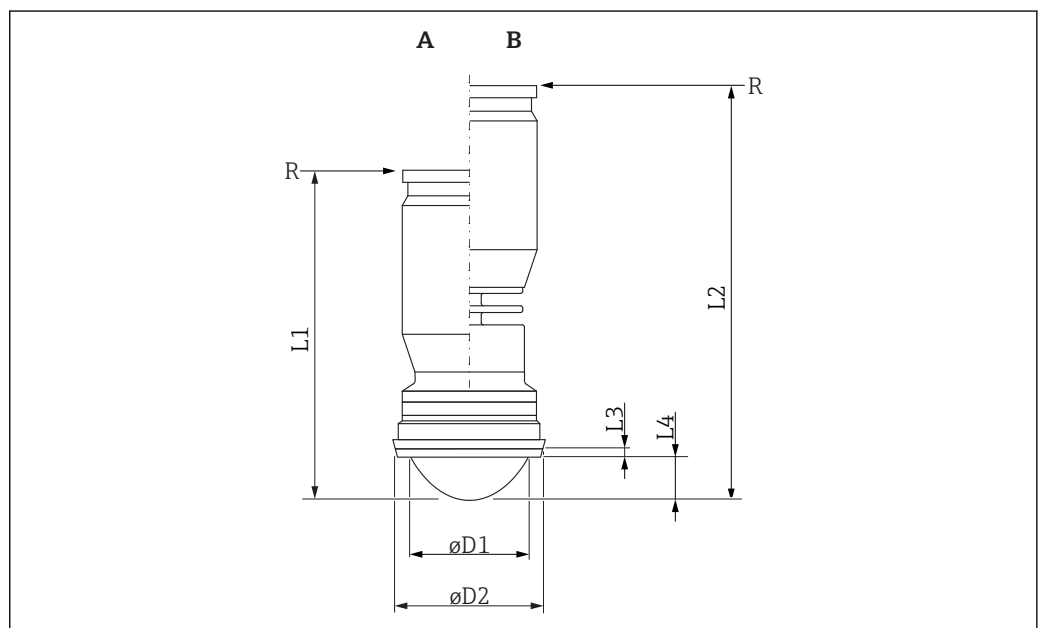

19 Dimensions: mm (in)

- A Seal: PTFE clad, -40 to 150°C/-40 to 302°F
 B Seal: PTFE clad, -40 to 200°C/-40 to 392°F
 R Bottom edge of housing

Feature 100 "Process connection"	øD1	øD2	L1	L2	L3	L4
MRK: DN50 PN25 slotted nut, PTFE>316L	48 mm (1.89 in)	65.5 mm (2.58 in)	148 mm (5.83 in)	193 mm (7.60 in)	5 mm (0.20 in)	19 mm (0.75 in)
MTK: DN80 PN25 slotted nut, PTFE>316L	75 mm (2.95 in)	97 mm (3.82 in)	188 mm (7.40 in)	233 mm (9.17 in)	6 mm (0.24 in)	32 mm (1.26 in)

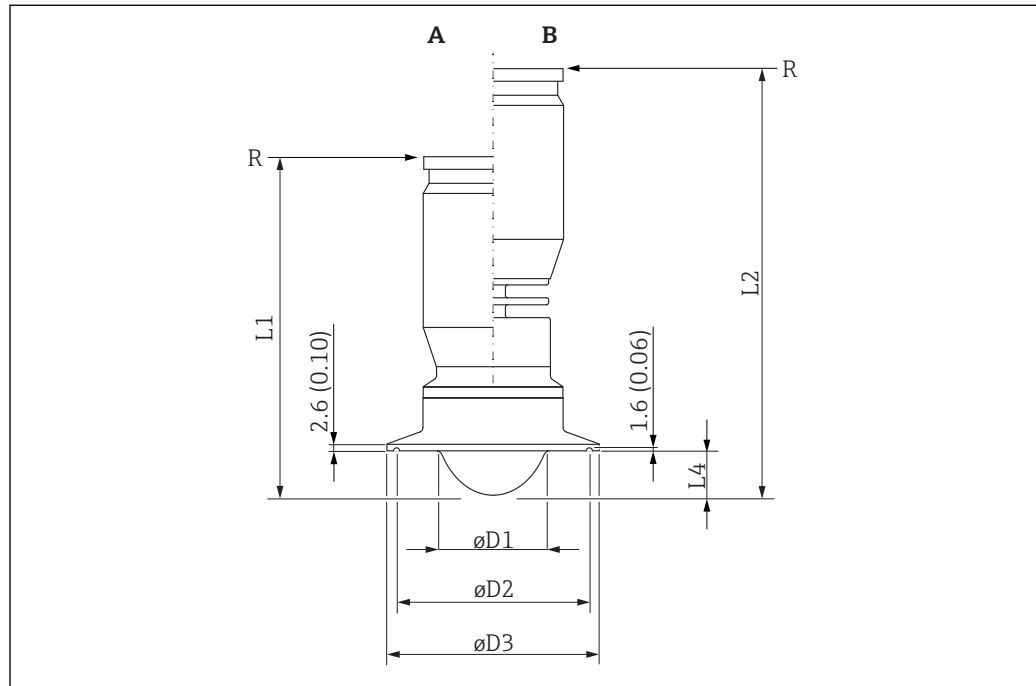FMR62, Tri-Clamp ISO2852, PTFE cladded

20 Dimensions: mm (in)

A Seal: PTFE cladded, -40 to 150°C/-40 to 302°F


B Seal: PTFE cladded, -40 to 200°C/-40 to 392°F

R Bottom edge of housing

Feature 70 "Antenna"	øD1	L1	L2	L4
GM: PTFE cladded flush mount DN50	48 mm (1.89 in)	146 mm (5.75 in)	191 mm (7.52 in)	19 mm (0.75 in)
GN: PTFE cladded flush mount DN80	75 mm (2.95 in)	185 mm (7.28 in)	230 mm (9.06 in)	32 mm (1.26 in)

Feature 100 "Process connection"	øD2	øD3
TDK: DN40-51 (2")	56.5 mm (2.22 in)	64 mm (2.52 in)
TFK: DN70-76.1 (3")	83.5 mm (3.29 in)	91 mm (3.58 in)
THK: DN101.6 (4")	110 mm (4.33 in)	119 mm (4.69 in)

FMR62, flange EN1092-1; ASME B16.5; JIS B2220 , PTFE clad

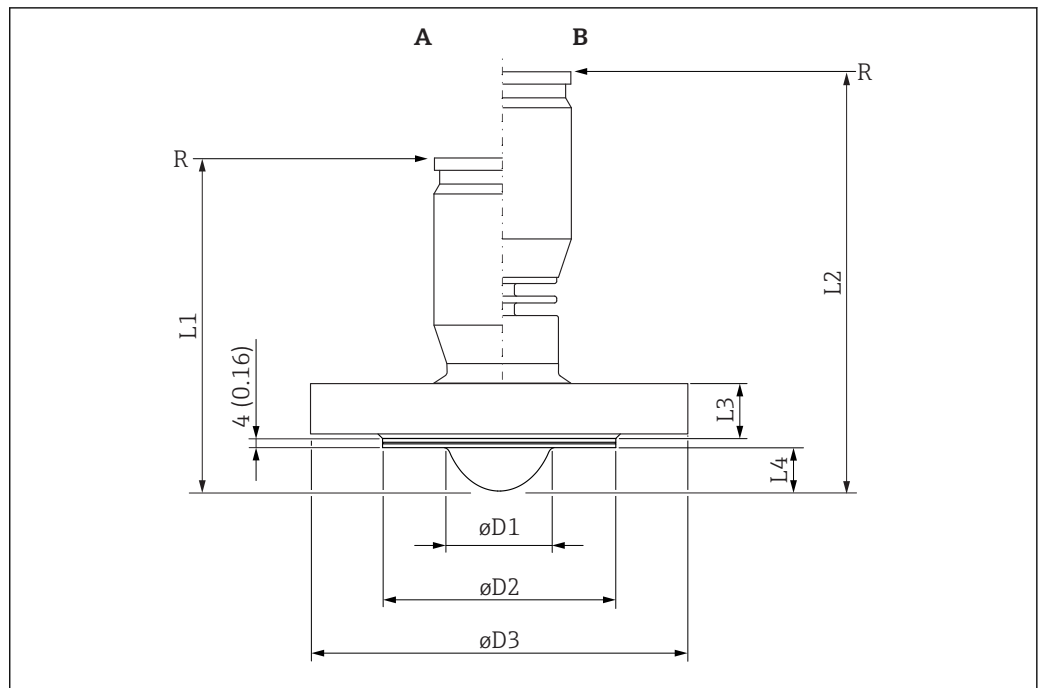

A0032177

21 Dimensions: mm (in)

A Seal: PTFE clad, -40 to 150°C/-40 to 302°F

B Seal: PTFE clad, -40 to 200°C/-40 to 392°F

R Bottom edge of housing

Feature 70 "Antenna"	øD1	L1	L2	L4
GM: PTFE clad flush mount DN50	48 mm (1.89 in)	141 mm (5.55 in)	186 mm (7.32 in)	19 mm (0.75 in)
GN: PTFE clad flush mount DN80	75 mm (2.95 in)	186.5 mm (7.34 in)	231.5 mm (9.11 in)	32 mm (1.26 in)

Feature 100 "Process connection"	øD2	øD3	L3
AFK: NPS 2" Cl.150, PTFE>316/316L	92 mm (3.62 in)	152 mm (5.98 in)	19.1 mm (0.75 in)
AGK: NPS 3" Cl.150, PTFE>316/316L	127 mm (5.00 in)	190 mm (7.48 in)	23.9 mm (0.94 in)
AHK: NPS 4" Cl.150, PTFE>316/316L	158 mm (6.22 in)	229 mm (9.02 in)	23.9 mm (0.94 in)
AJK: NPS 6" Cl.150, PTFE>316/316L	212 mm (8.35 in)	279 mm (10.98 in)	25.4 mm (1.00 in)
CFK: DN50 PN10/16, PTFE>316L	102 mm (4.02 in)	165 mm (6.50 in)	18 mm (0.71 in)
CGK: DN80 PN10/16, PTFE>316L	138 mm (5.43 in)	200 mm (7.87 in)	20 mm (0.79 in)
CHK: DN100 PN10/16, PTFE>316L	158 mm (6.22 in)	220 mm (8.66 in)	20 mm (0.79 in)
CJK: DN150 PN10/16, PTFE>316L	212 mm (8.35 in)	285 mm (11.22 in)	22 mm (0.87 in)
KFK: 10K 50A, PTFE>316L	96 mm (3.78 in)	155 mm (6.10 in)	16 mm (0.63 in)

Feature 100 "Process connection"	øD2	øD3	L3
KGK: 10K 80A, PTFE>316L	127 mm (5.00 in)	185 mm (7.28 in)	18 mm (0.71 in)
KHK: 10K 100A, PTFE>316L	151 mm (5.94 in)	210 mm (8.27 in)	18 mm (0.71 in)
KJK: 10K 150A, PTFE>316L	212 mm (8.35 in)	280 mm (11.02 in)	22 mm (0.87 in)

Weight*Housing*

Part	Weight
GT18 housing - stainless steel	Approx. 4.5 kg (9.9 lb)
GT19 housing - plastic	Approx. 1.2 kg (2.7 lb)
GT20 housing - aluminum	Approx. 1.9 kg (4.2 lb)


Antenna and process connection

Device	Antenna ¹⁾	Weight of antenna/process connection
FMR62	GE: integrated, PEEK, 3/4"	Max. 000 kg (000 lb) + flange weight ²⁾
	GE: integrated, PEEK, 1-1/2"	Max. 000 kg (000 lb) + flange weight ²⁾
	GM: PTFE claddd flush mount DN50	Max. 000 kg (000 lb) + flange weight ²⁾
	GN: PTFE claddd flush mount DN80	Max. 000 kg (000 lb) + flange weight ²⁾

1) Order code 070

2) For the flange weight, see Technical Information TI00426F.

Materials: GT18 housing
(stainless steel, corrosion-resistant)

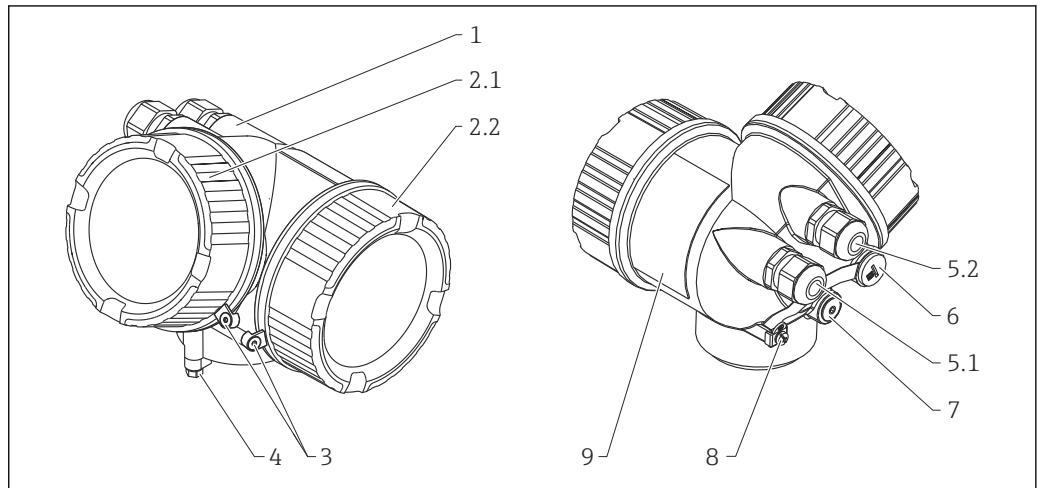


A0013788

No.	Part	Material
1	Housing	CF3M similar to 316L/1.4404
2.1	Cover of the electronics compartment	■ Cover: CF3M (similar to 316L/1.4404) ■ Window: glass ■ Cover seal: NBR ■ Seal of the window: NBR ■ Thread-coating: Graphite-based lubricant varnish
2.2	Cover of the terminal compartment	■ Cover: CF3M (similar to 316L/1.4404) ■ Cover seal: NBR ■ Thread-coating: Graphite-based lubricant varnish
3	Cover lock	■ Screw: A4 ■ Clamp: 316L (1.4404)
4	Lock at the housing neck	■ Screw: A4-70 ■ Clamp: 316L (1.4404)
5.1	Dummy plug, cable gland, adapter or plug (depending on the device version)	■ Dummy plug, depending on the device version: – PE – PBT-GF ■ Cable gland: 316L (1.4404) or nickel-plated brass ■ Adapter: 316L (1.4404/1.4435) ■ Seal: EPDM ■ M12 plug: Nickel-plated brass ¹⁾ ■ 7/8" plug: 316 (1.4401) ²⁾
5.2	Dummy plug, cable gland or adapter (depending on the device version)	■ Dummy plug: 316L (1.4404) ■ Cable gland: 316L (1.4404) or nickel-plated brass ■ Adapter: 316L (1.4404/1.4435) ■ Seal: EPDM
6	Dummy plug or M12 socket (depending on the device version)	■ Dummy plug: 316L (1.4404) ■ M12 socket: 316L (1.4404)
7	Pressure relief stopper	316L (1.4404)
8	Ground terminal	■ Screw: A4 ■ Spring washer: A4 ■ Clamp: 316L (1.4404) ■ Holder: 316L (1.4404)
9	Nameplate	■ Plate: 316L (1.4404) ■ Groove pin: A4 (1.4571)

1) For the version with M12 plug the sealing material is Viton.

2) For the version with 7/8" plug, the sealing material is NBR.

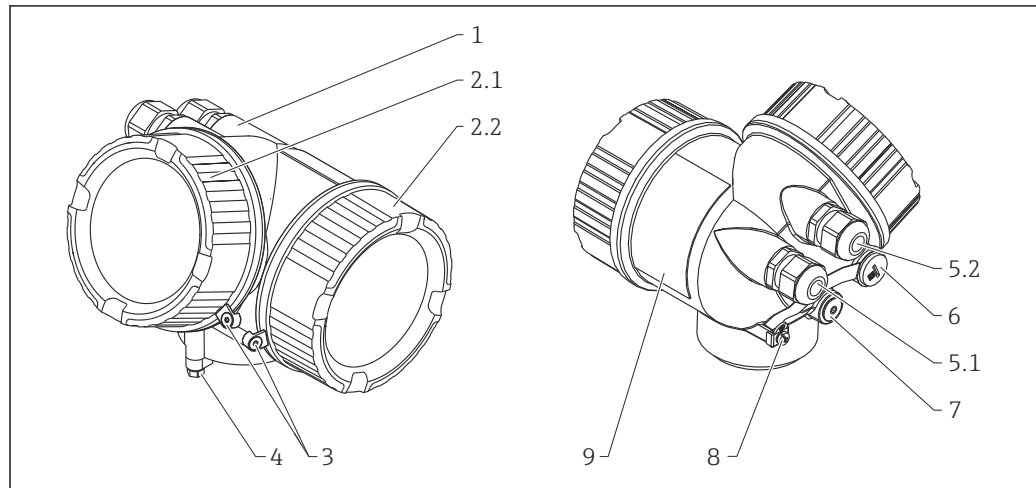**Materials: GT19 housing
(plastic)**


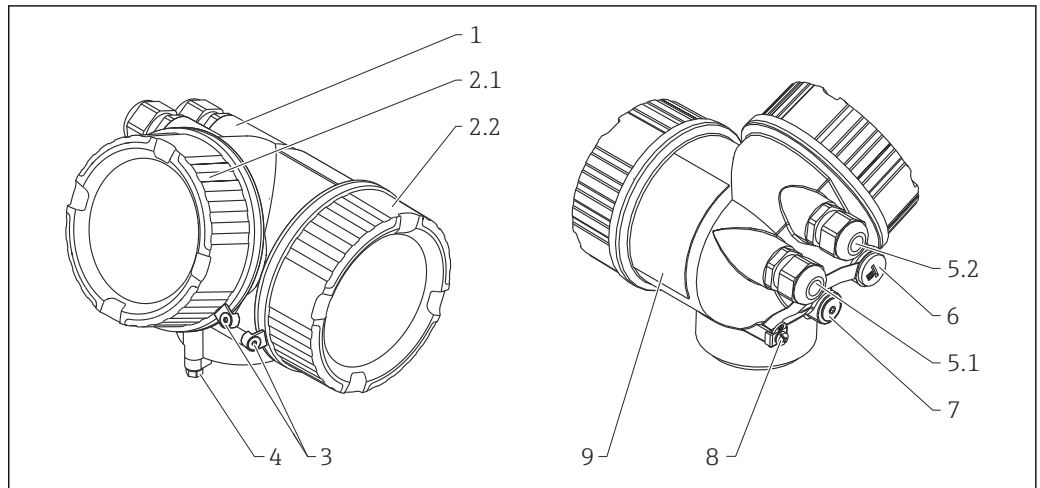
A0013788

No.	Part	Material
1	Housing	PBT
2.1	Cover of the electronics compartment	- Cover glass: PC - Cover frame: PBT-PC - Cover seal: EPDM - Thread-coating: Graphite-based lubricant varnish
2.2	Cover of the terminal compartment	- Cover: PBT - Cover seal: EPDM - Thread-coating: Graphite-based lubricant varnish
4	Lock at the housing neck	- Screw: A4-70 - Clamp: 316L (1.4404)
5.1	Dummy plug, cable gland, adapter or plug (depending on the device version)	- Dummy plug, depending on the device version: - PE - PBT-GF - Cable gland, depending on the device version: - Nickel-plated brass (CuZn) - PA - Adapter: 316L (1.4404/1.4435) - Seal: EPDM - M12 plug: Nickel-plated brass ¹⁾ 7/8" plug: 316 (1.4401) ²⁾
5.2	Dummy plug, cable gland or adapter (depending on the device version)	- Dummy plug, depending on the device version: - PE - PBT-GF - Nickel-plated steel - Cable gland, depending on the device version: - Nickel-plated brass (CuZn) - PA - Adapter: 316L (1.4404/1.4435) - Seal: EPDM
6	Dummy plug or M12 socket (depending on the device version)	- Dummy plug: Nickel-plated brass (CuZn) - M12 socket: Nickel-plated GD-Zn
7	Pressure relief stopper	Nickel-plated brass (CuZn)
8	Ground terminal	- Screw: A2 - Spring washer: A4 - Clamp: 304 (1.4301) - Holder: 304 (1.4301)
9	Adhesive nameplate	Plastic

1) For the version with M12 plug the sealing material is Viton.

2) For the version with 7/8" plug, the sealing material is NBR.

Materials: GT20 housing
(die-cast aluminum, powder-coated, seawater-resistant)



A0013788


Nr.	Part	Material
1	Housing, RAL 5012 (blue)	- Housing: AlSi10Mg(<0,1% Cu) - Coating: Polyester
2.1	Cover of the electronics compartment; RAL 7035 (gray)	- Cover: AlSi10Mg(<0,1% Cu) - Window: Glass - Cover seal: NBR - Seal of the window: NBR - Thread-coating: Graphite-based lubricant varnish
2.2	Cover of the terminal compartment; RAL 7035 (gray)	- Cover: AlSi10Mg(<0,1% Cu) - Cover seal: NBR - Thread-coating: Graphite-based lubricant varnish
3	Cover lock	- Screw: A4 - Clamp: 316L (1.4404)
4	Lock at the housing neck	- Screw: A4-70 - Clamp: 316L (1.4404)
5.1	Dummy plug, cable gland, adapter or plug (depending on the device version)	- Dummy plug, depending on the device version: - PE - PBT-GF - Cable gland, depending on the device version: - Nickel-plated brass (CuZn) - PA - Adapter: 316L (1.4404/1.4435) - Seal: EPDM - M12 plug: Nickel-plated brass ¹⁾ 7/8" plug: 316 (1.4401) ²⁾
5.2	Dummy plug, cable gland or adapter (depending on the device version)	- Dummy plug, depending on the device version: - PE - PBT-GF - Nickel-plated steel - Cable gland, depending on the device version: - Nickel-plated brass (CuZn) - PA - Adapter: 316L (1.4404/1.4435) - Seal: EPDM
6	Dummy plug or M12 socket (depending on the device version)	- Dummy plug : Nickel-plated brass (CuZn) - M12 socket: Nickel-plated GD-Zn
7	Pressure relief stopper	Nickel-plated brass (CuZn)

Nr.	Part	Material
8	Ground terminal	▪ Screw: A2 ▪ Spring washer: A2 ▪ Clamp: 304 (1.4301) ▪ Holder: 304 (1.4301)
9	Adhesive nameplate	Plastic

- 1) For the version with M12 plug the sealing material is Viton.
 2) For the version with 7/8" plug, the sealing material is NBR.

Materials: antenna and process connection

FMR62, integrated antenna

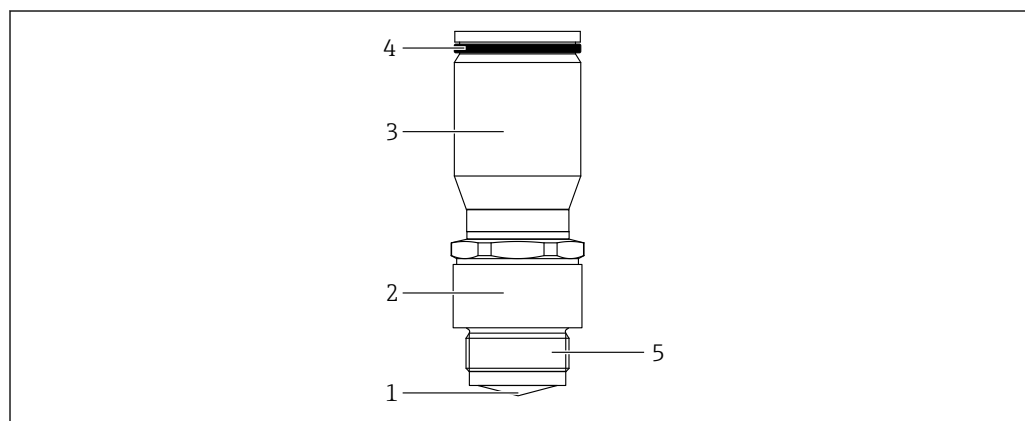


A0032019

No.	Component part	Material
1	Antenna	Antenna: PEEK Antenna seal: Viton (FKM); KALREZ (FFKM)
2	Antenna adapter	316L / 1.4404
3	Housing adapter	316L / 1.4404
4	Housing seal	EPDM
5	Process connection	316L / 1.4404

Under development

FMR62; antenna cladded, flush mount

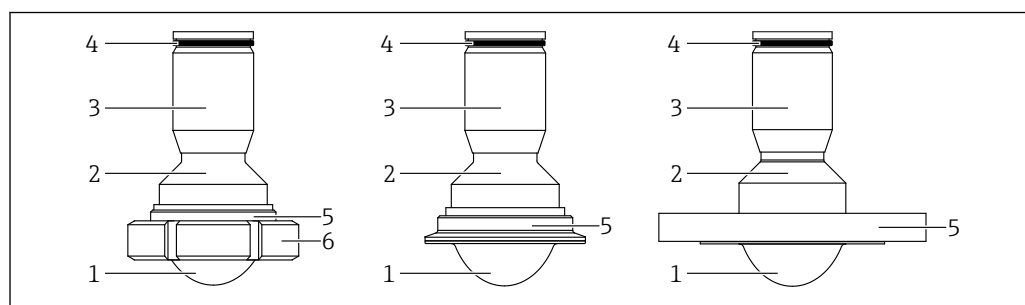


A0031815

No.	Component part	Material
1	Antenna	PTFE Antenna seal: Viton (FKM)
2	Antenna adapter	316L / 1.4404
3	Housing adapter	316L / 1.4404

No.	Component part	Material
4	Housing seal	EPDM
5	Process connection	316L / 1.4404 , PTFE cladded
6	DIN11851 slotted nut	304L / 1.4307

Under development

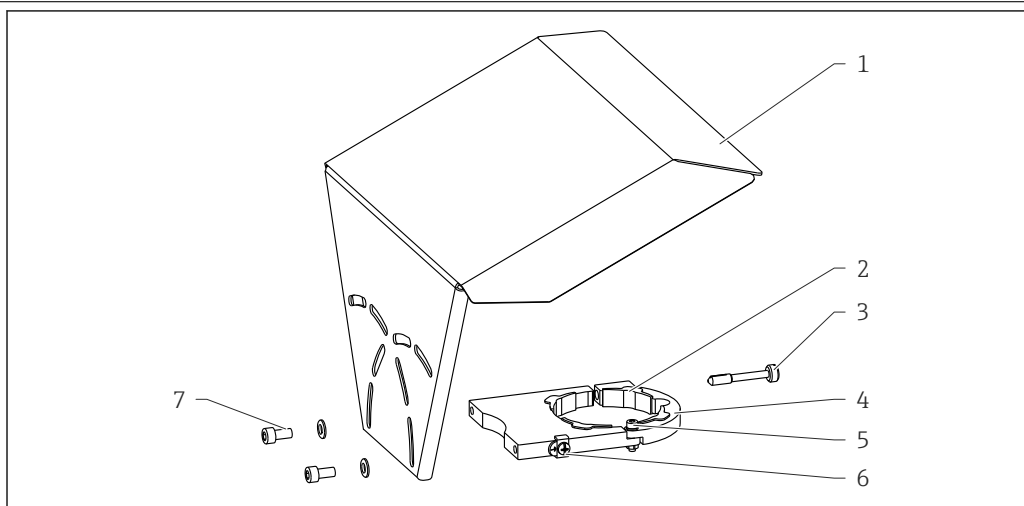**Materials: Weather
protection cover**


A0015473

No	Part: Material
1	Protection cover: 316L (1.4404)
2	Molded rubber part (4x): EPDM
3	Clamping screw: 316L (1.4404) + carbon fibre
4	Bracket: 316L (1.4404)
5	▪ Cheese head screw: A4-70 ▪ Nut: A4 ▪ Spring washer: A4
6	Ground terminal ▪ Screw: A4 ▪ Spring washer: A4 ▪ Clamp: 316L (1.4404) ▪ Holder: 316L (1.4404)
7	▪ Washer: A4 ▪ Cheese head screw: A4-70

Operability

Operating concept

Operator-oriented menu structure for user-specific tasks

- Commissioning
- Operation
- Diagnostics
- Expert level

Operating languages

- English
- Deutsch
- Français
- Español
- Italiano
- Nederlands
- Portuguesa
- Polski
- русский язык (Russian)
- Svenska
- Türkçe
- 中文 (Chinese)
- 日本語 (Japanese)
- 한국어 (Korean)
- Bahasa Indonesia
- tiếng Việt (Vietnamese)
- čeština (Czech)



Feature 500 of the product structure determines which of these languages is preset on delivery.

Quick and save commissioning

- Interactive wizard with graphical interface for easy commissioning via FieldCare/DeviceCare
- Menu guidance with brief explanations of the individual parameter functions
- Standardized operation at the device and in the operating tools



Integrated data storage device (HistoROM)

- Enables transfer of configuration when changing electronic modules
- Records up to 100 event messages in the device
- Records up to 1000 measured values in the device
- Saves the signal curve on commissioning which can later be used as a reference.

Efficient diagnostics increase measurement reliability


- Remedy information is integrated in plain text
- Diverse simulation options and line recorder functions

Local operation

Operation with	Pushbuttons	Touch Control
Order code for "Display; Operation"	Option C "SD02"	Option E "SD"
	 A0032219	 A0032221
Display elements	4-line display	4-line display white background lighting; switches to red in event of device error

	Format for displaying measured variables and status variables can be individually configured	
	Permitted ambient temperature for the display: -20 to +70 °C (-4 to +158 °F) The readability of the display may be impaired at temperatures outside the temperature range.	
Operating elements	local operation with 3 push buttons (⏏, □, ⏏)	external operation via touch control; 3 optical keys: ⏏, □, ⏏
	Operating elements also accessible in various hazardous areas	
Additional functionality	Data backup function The device configuration can be saved in the display module.	
	Data comparison function The device configuration saved in the display module can be compared to the current device configuration.	
	Data transfer function The transmitter configuration can be transmitted to another device using the display module.	

Operation with remote display and operating module FHX50

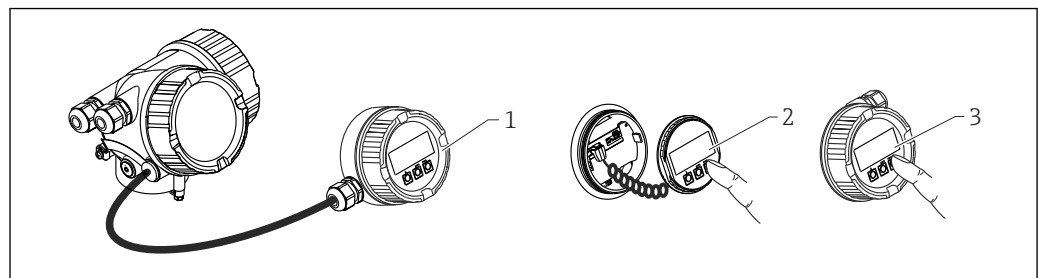


A0013137

22 FHX50 operating options

- 1 Housing of the remote display and operating module FHX50
- 2 Display and operating module SD02, push buttons; cover must be removed
- 3 Display and operating module SD03, optical keys; can be operated through the glass of the cover

Remote operation

Via HART protocol

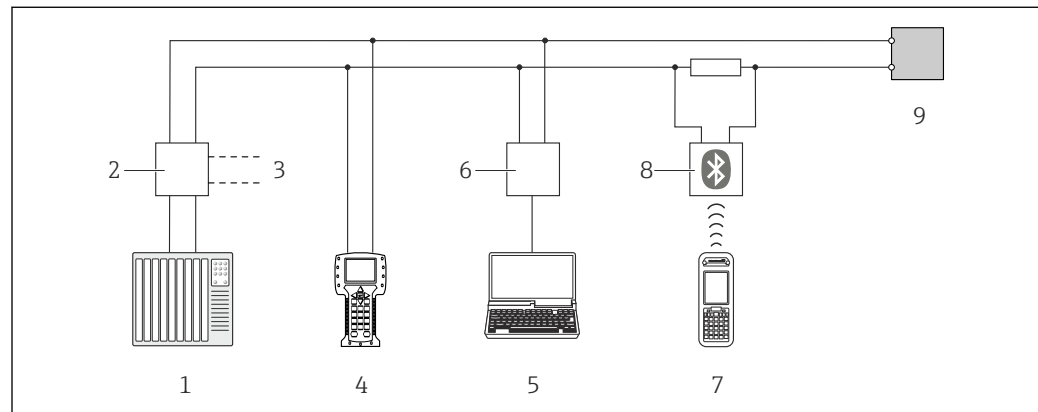


A0013764

23 Options for remote operation via HART protocol

- 1 PLC (programmable logic controller)
- 2 Transmitter power supply unit, e.g. RN221N (with communication resistor)
- 3 Connection for Commubox FXA191, FXA195 and Field Communicator 375, 475
- 4 Field Communicator 475
- 5 Computer with operating tool (e.g. FieldCare, AMS Device Manager, SIMATIC PDM)
- 6 Commubox FXA191 (RS232) or FXA195 (USB)
- 7 Field Xpert SFX350/SFX370
- 8 VIATOR Bluetooth modem with connecting cable
- 9 Transmitter

Via service interface (CDI)

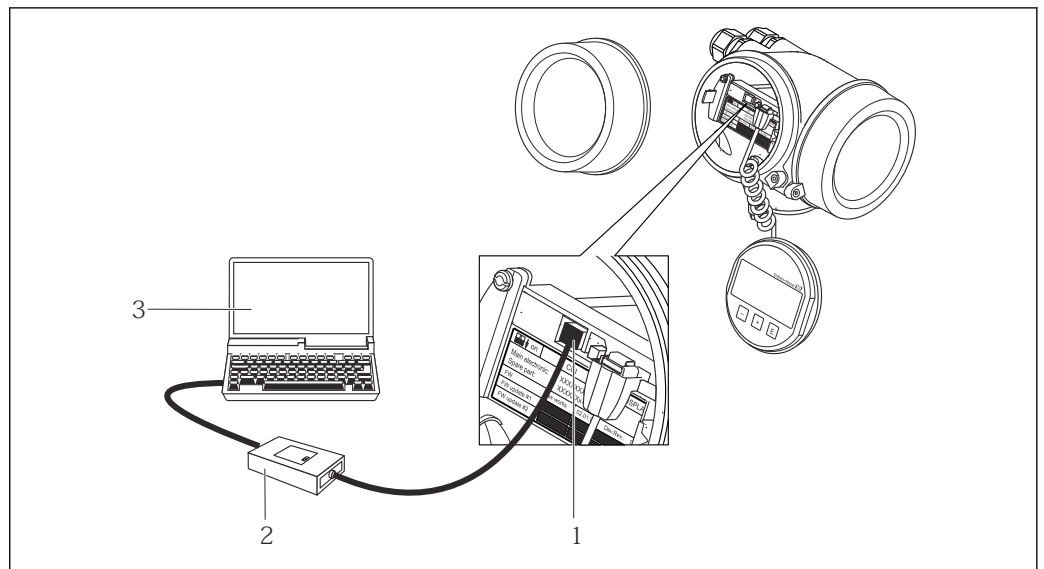

A0014019

- 1 Service interface (CDI) of the measuring device (= Endress+Hauser Common Data Interface)
- 2 Commubox FXA291
- 3 Computer with "FieldCare" operating tool


System integration via Fieldgate

Vendor Managed Inventory

By using Fieldgates to interrogate tank or silo levels remotely, suppliers of raw materials can provide their regular customers with information about the current supplies at any time and, for example, account for them in their own production planning. For their part, the Fieldgates monitor the configured level limits and, if required, automatically activate the next supply. The spectrum of options here ranges from a simple purchasing requisition via e-mail through to fully automatic order administration by coupling XML data into the planning systems on both sides.

Remote maintenance of measuring equipment

Fieldgates not only transfer the current measured values, they also alert the responsible standby personnel, if required, via e-mail or SMS. In the event of an alarm or also when performing routine checks, service technicians can diagnose and configure connected HART devices remotely. All that is required for this is the corresponding HART operating tool (e.g. FieldCare, ...) for the connected device. Fieldgate passes on the information transparently, so that all options for the respective operating software are available remotely. Some on-site service operations can be avoided by using remote diagnosis and remote configuration and all others can at least be better planned and prepared.

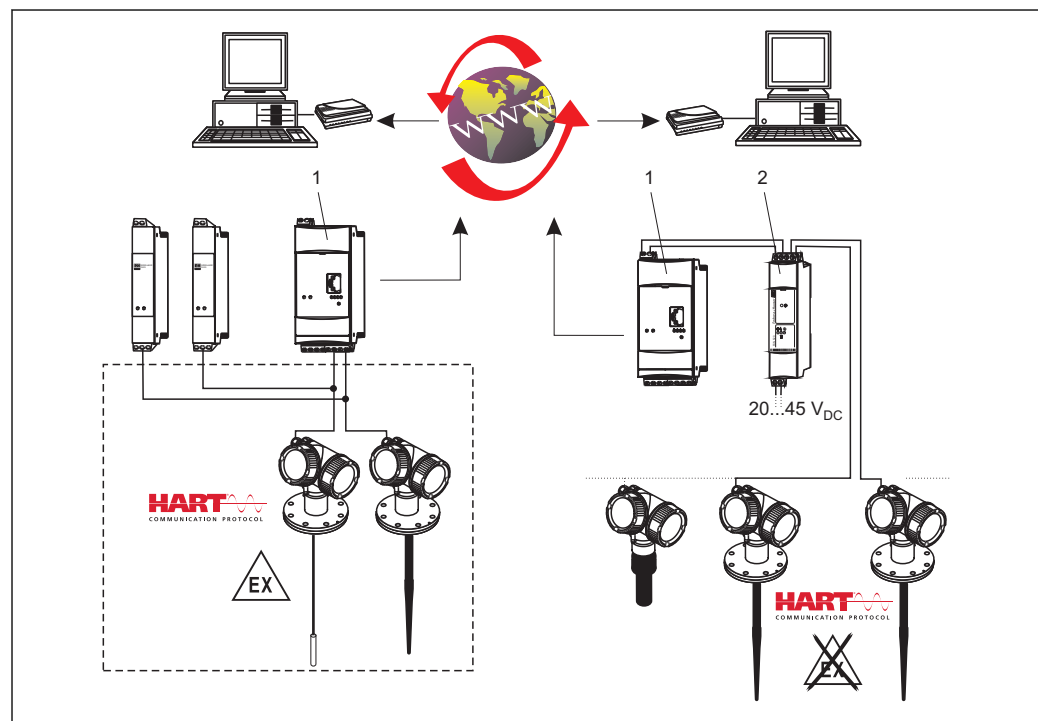

A0011278

24 The complete measuring system consists of devices and:

- 1 Fieldgate FXA520
- 2 Multidrop Connector FXN520

i The number of instruments which can be connected in multidrop mode can be calculated by the "FieldNetCalc" program. A description of this program can be found in Technical Information TI 400F (Multidrop Connector FXN520). The program is available from your Endress+Hauser sales organisation or in the internet at: www.de.endress.com/Download (text search = "Fieldnetcalc").

Certificates and approvals

CE mark	The measuring system meets the legal requirements of the applicable EC guidelines. These are listed in the corresponding EC Declaration of Conformity together with the standards applied. Endress+Hauser confirms successful testing of the device by affixing to it the CE mark.
RoHS	The measuring system complies with the substance restrictions of the Restriction on Hazardous Substances Directive 2011/65/EU (RoHS 2).
RCM-Tick marking	The supplied product or measuring system meets the ACMA (Australian Communications and Media Authority) requirements for network integrity, interoperability, performance characteristics as well as health and safety regulations. Here, especially the regulatory arrangements for electromagnetic compatibility are met. The products are labelled with the RCM- Tick marking on the name plate.  A0029561
Ex approval	■ ATEX ■ IEC Ex ■ CSA ■ FM ■ NEPSI ■ KC ■ INMETRO ■ TIIS ■ EAC Ex Additional safety instructions must be followed for use in hazardous areas. Please refer to the separate "Safety Instructions" (XA) document included in the delivery. Reference to the applicable XA can be found on the nameplate.  For details on the available certificates and associated XAs: →  71
Dual seal according to ANSI/ISA 12.27.01	The devices have been designed according to ANSI/ISA 12.27.01 as dual seal devices, allowing the user to waive the use and save the cost of installing external secondary process seals in the conduit as required by the process sealing sections of ANSI/NFPA 70 (NEC) and CSA 22.1 (CEC). These instruments comply with the North-American installation practice and provide a very safe and cost-saving installation for pressurized applications with hazardous fluids. Further information can be found in the Safety Instructions (XA) of the relevant devices.
Functional safety	Use for level monitoring (MIN, MAX, range) up to SIL 3 (homogeneous or diverse redundancy), independently evaluated by TÜV Rheinland in accordance with IEC 61508, refer to the "Functional Safety Manual" for information.
WHG	WHG approval: No. requested
Hygienic compatibility	FMR62 with flange cladding made of PTFE complies with FDA 21 CFR 177.1550 and USP <88> Class VI.

3A and EHEDG approval for versions with Tri-Clamp and DIN11851 process connections. ⁵⁾

 To avoid any risk of contamination, install the device according to the "Hygienic Equipment Design Criteria (HDC)" which was published by the Subgroup "Design Principles" of the EHEDG on April 8 2004.

Suitable fittings and seals must be used to ensure hygiene-compliant design according to the specifications of 3-A SSI and EHEDG.

 The gap-free connections can be cleaned of all residue using the usual cleaning methods within this industry.

 The 316L housing (GT18), option B in order feature 40, is not suitable for use in applications which require a 3A approval.

NACE MR 0175 / ISO 15156

- The wetted, metal materials comply with the requirements of NACE MR 0175 / ISO 15156.
- Declaration of Conformity: see the product structure, feature 580, version JB

NACE MR 0103

- The wetted, metal materials comply with the requirements of NACE MR 0103.
- The Declaration of Conformity is based on NACE MR 0175.
The hardness and intergranular corrosion have been tested, and heat treatment (solution annealed) has been performed. The materials used therefore meet the requirements of NACE MR 0103.
- Declaration of Conformity: see the product structure, feature 580, version JE.

Pressure equipment with allowable pressure ≤ 200 bar (2 900 psi)

Pressure instruments with a flange and threaded boss that do not have a pressurized housing do not fall within the scope of the Pressure Equipment Directive, irrespective of the maximum allowable pressure.

Reasons:

According to Article 2, point 5 of EU Directive 2014/68/EU, pressure accessories are defined as "devices with an operational function and having pressure-bearing housings".

If a pressure instrument does not have a pressure-bearing housing (no identifiable pressure chamber of its own), there is no pressure accessory present within the meaning of the Directive.

Note:

A partial examination shall be performed for pressure instruments that are part of safety equipment for the protection of a pipe or vessel from exceeding allowable limits (equipment with safety function in accordance with Pressure Equipment Directive 2014/68/EU, Article 2, point 4).

Marine approval

Device	Marine approval ¹⁾			
	LF: ABS marine approval	LG: LR marine approval	LH: BV marine approval	LJ: DNV GL marine approval
FMR62	✓	✓	✓	✓

1) See order code for 590 "Additional approval"

Radio standard EN 302729-1/2

The devices FMR62 with antenna 40 mm / 2" integrated PEEK, comply with the Level Probing Radar (LPR) radio standard EN 302729-1/2. The devices FMR62 with antenna 40 mm / 2" integrated PEEK, are approved for unrestricted use inside and outside closed containers in countries of the EU and the EFTA, that have already implemented this standard.

The following countries are those that have currently implemented the directive:

Belgium, Bulgaria, Germany, Denmark, Estonia, France, Greece, UK, Ireland, Iceland, Italy, Liechtenstein, Lithuania, Latvia, Malta, The Netherlands, Norway, Austria, Poland, Portugal, Romania, Sweden, Switzerland, Slovakia, Spain, Czech Republic and Cyprus.

Implementation is still underway in all of the countries not listed.

⁵⁾ Authorization pending

Please note the following for operation of the devices outside of closed vessels:

1. Installation must be carried out by properly trained, expert staff.
2. The device antenna must be installed in a fixed location pointing vertically downwards.
3. The installation site must be located at a distance of 4 km from the astronomy stations listed below or otherwise approval must be provided by the relevant authority. If the device is installed at a distance of 4 to 40 km from one of the listed stations, it must not be installed at a height of more than 15 m (49 ft) above the ground.

Astronomy stations

Country	Name of the station	Latitude	Longitude
Germany	Effelsberg	50°31'32" North	06°53'00" East
Finland	Metsähovi	60°13'04" North	24°23'37" East
	Tuorla	60°24'56" North	24°26'31" East
France	Plateau de Bure	44°38'01" North	05°54'26" East
	Floirac	44°50'10" North	00°31'37" West
Great Britain	Cambridge	52°09'59" North	00°02'20" East
	Damhall	53°09'22" North	02°32'03" West
	Jodrell Bank	53°14'10" North	02°18'26" West
	Knockin	52°47'24" North	02°59'45" West
	Pickmere	53°17'18" North	02°26'38" West
Italy	Medicina	44°31'14" North	11°38'49" East
	Noto	36°52'34" North	14°59'21" East
	Sardinia	39°29'50" North	09°14'40" East
Poland	Fort Skala Krakow	50°03'18" North	19°49'36" East
Russia	Dmitrov	56°26'00" North	37°27'00" East
	Kalyazin	57°13'22" North	37°54'01" East
	Pushchino	54°49'00" North	37°40'00" East
	Zelenchukskaya	43°49'53" North	41°35'32" East
Sweden	Onsala	57°23'45" North	11°55'35" East
Switzerland	Bleien	47°20'26" North	08°06'44" East
Spain	Yebes	40°31'27" North	03°05'22" West
	Robledo	40°25'38" North	04°14'57" West
Hungary	Penc	47°47'22" North	19°16'53" East



As a general rule, the requirements outlined in EN 302729-1/2 must be observed.

Radio standard EN 302372-1/2

The devices comply with the Tanks Level Probing Radar (TLPR) radio standard EN 302372-1/2 and are approved for use in closed containers. For installation, points a to f in Annex B of EN 302372-1 must be taken into consideration.

FCC / Industry Canada

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Canada CNR-Gen Section 7.1.3

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

[Any] changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The devices are compliant with the FCC Code of Federal Regulations, CFR 47, Part 15, Sections 15.205, 15.207, 15.209.

In addition, FMR62 with antenna 40 mm / 1-1/2" integrated PEEK is compliant with Section 15.256. For these LPR (Level probe radar) applications the devices must be professionally installed in a downward operating position. In addition, the devices are not allowed to be mounted in a zone of 4 km around RAS stations and within a radius of 40 km around RAS stations the maximum operation height of devices is 15 m (49 ft) above ground.

Japanese radio approval

The devices comply with Japanese Radio Law, Article 6, Section 1(1)

CRN approval

Some device versions have CRN approval. Devices are CRN approved if the following two conditions are met:

- The device has a CSA approval (product structure: feature 010 "Approval")
- The device has a CRN-approved process connection as per the following table:

Feature 100 in the product structure	Process connection
AFK	NPS 2" Cl.150, PTFE >316/316L
AGK	NPS 3" Cl.150, PTFE >316/316L
AHK	NPS 4" Cl.150, PTFE >316/316L
AJK	NPS 6" Cl.150, PTFE >316/316L
MRK	DIN11851 DN50 PN25 slotted nut, PTFE>316L
MTK	DIN11851 DN80 PN25 slotted nut, PTFE>316L
RGJ	Thread ANSI MNPT1-1/2, 316L
TDK	Tri-Clamp ISO2852 DN40-51 (2"), PTFE>316L, 3A, EHEDG
TFK	Tri-Clamp ISO2852 DN70-76.1 (3"), PTFE>316L, 3A, EHEDG ¹⁾
THK	Tri-Clamp ISO2852 DN101.6 (4"), PTFE>316L, 3A, EHEDG ¹⁾

1) The CRN certificate applies in a limited pressure range; see the following table.

-  Process connections that do not have CRN approval are not listed in this table.
-  Please refer to the product structure to discover which process connections are available for a specific device type.
-  CRN-approved devices bear the registration number (tbd.) on the nameplate.
-  An additional pressure restriction applies for the device versions listed in the table below if they are CRN-approved. The pressure range indicated in the "Process" section →  35 continues to apply for device versions not listed in the table below.

Table, in preparation

Test, certificate

Feature 580 "Test, certificate"	Description
JA	3.1 Material certificate, wetted metal parts, EN10204-3.1 inspection certificate
JB	Declaration of Conformity NACE MR0175, wetted metal parts
JD	3.1 Material certificate, pressurized parts, EN10204-3.1 inspection certificate
JE	Declaration of Conformity NACE MR0103, wetted metal parts
JF	Declaration of Conformity AD2000, wetted metal parts: Material conformity for all metal wetted/pressurized parts according to AD2000 (data sheets W2, W9, W10)
JG	Declaration of Conformity AD2000, pressurized metal parts
JJ	Declaration of Conformity FDA
JK	Declaration of Conformity, TSE Certificate of Suitability
JL	Declaration of Conformity EC1935/2004
KE	Pressure test, internal procedure, inspection certificate
KI	PMI test (XRF), internal procedure, inspection certificate
KV	Declaration of Conformity ASME B31.3: The construction, the material used, the pressure and temperature ranges and the labeling of the devices meet the requirements of ASME B31.3



Test reports, declarations and inspection certificates are available in electronic format in the *W@M Device Viewer*:

Enter the serial number from nameplate (www.endress.com/deviceviewer)

This concerns the options for the following order codes:

- 550 "Calibration"
- 580 "Test, certificate"
- 590 "Additional approval", option LW: "CoC-ASME BPE"

Hard-copy product documentation

Hard-copy versions of the test reports, declarations and inspection certificates can also be order via order code 570 "Service", option I7 "Hard-copy product documentation". The documents are then supplied with the product.

Other standards and guidelines

- EN 60529
Degrees of protection provided by enclosures (IP code)
- EN 61010-1
Safety Requirements for Electrical Equipment for Measurement, Control and Laboratory Use
- IEC/EN 61326
"Emission in accordance with Class A requirements". Electromagnetic compatibility (EMC requirements).
- NAMUR NE 21
Electromagnetic compatibility (EMC) of industrial process and laboratory control equipment
- NAMUR NE 43
Standardization of the signal level for the breakdown information of digital transmitters with analog output signal.
- NAMUR NE 53
Software of field devices and signal-processing devices with digital electronics
- NAMUR NE 107
Status classification as per NE107
- NAMUR NE 131
Requirements for field devices for standard applications.
- IEC61508
Functional safety of safety-related electric/electronic/programmable electronic systems

Ordering information

Ordering information

Detailed ordering information is available from the following sources:

- In the Product Configurator on the Endress+Hauser website: www.endress.com -> Click "Corporate" -> Select your country -> Click "Products" -> Select the product using the filters and search field -> Open product page -> The "Configure" button to the right of the product image opens the Product Configurator.
- From your Endress+Hauser Sales Center: www.addresses.endress.com




Product Configurator - the tool for individual product configuration

- Up-to-the-minute configuration data
- Depending on the device: Direct input of measuring point-specific information such as measuring range or operating language
- Automatic verification of exclusion criteria
- Automatic creation of the order code and its breakdown in PDF or Excel output format
- Ability to order directly in the Endress+Hauser Online Shop

3-point linearity protocol

The following points must be considered if option F3 (3-point linearity protocol) was selected in feature 550 ("Calibration").

The 3 points of the linearity protocol are defined as follows:

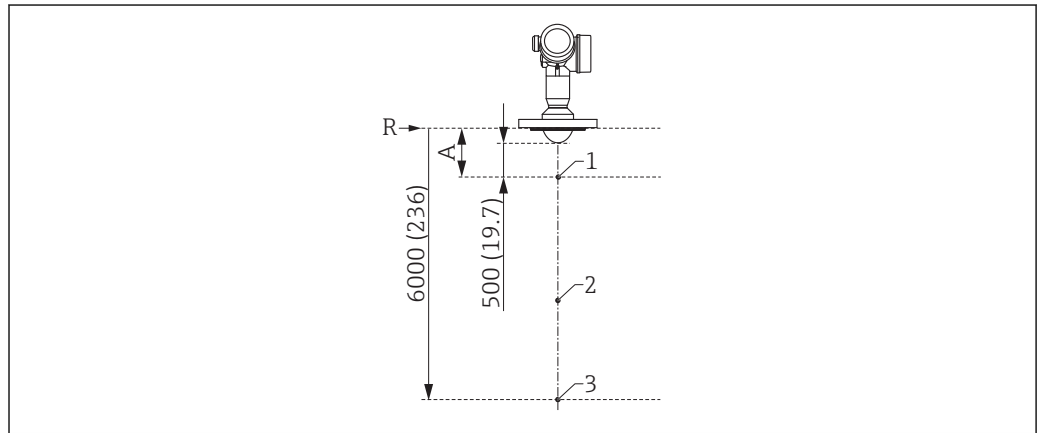

A0032285

25 Points of the 3-point linearity protocol; engineering unit: mm (in)

A Distance from the reference point R to the first measuring point

R Reference point of measurement

1 First measuring point

2 Second measuring point (in the middle between the first and third measuring point)

3 Third measuring point

Measuring point	Position
1st measuring point	- At a distance A from the reference point - A = length of antenna + 500 mm (19.7 in) - Minimum distance: $A_{\min} = 1\,000\text{ mm (39.4 in)}$
2nd measuring point	In the middle between the 1st and 3rd measuring point
3rd measuring point	6 000 mm (236 in) below the reference point R



The position of the measuring points can vary by $\pm 1\text{ cm (}\pm 0.04\text{ in)}$.




The linearity check is performed under reference operating conditions.

5-point linearity protocol

 The following points must be considered if option F4 (5-point linearity protocol) was selected in feature 550 ("Calibration").

The 5 points of the linearity protocol are evenly distributed over the measuring range (0% - 100%). **Empty calibration** (E) and **Full calibration** (F) must be specified in order to define the measuring range⁶⁾.

The following restrictions must be considered when selecting E and F:

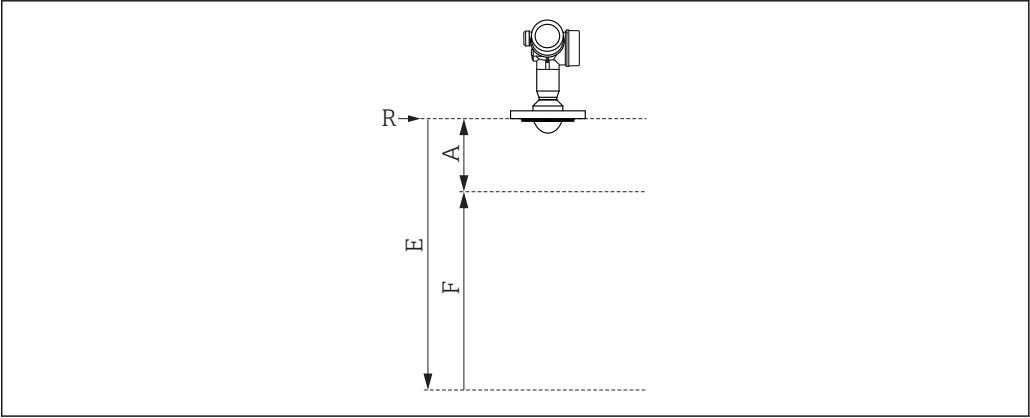

A0032286

Minimum distance between reference point R and 100% mark	Minimum span	Maximum value for "Empty calibration"
$A \geq \text{length of antenna} + 200 \text{ mm (8 in)}$ Minimum value: 400 mm (16 in)	$F \geq 400 \text{ mm (16 in)}$	$E \leq 24 \text{ m (79 ft)}$

 The linearity check is performed under reference operating conditions.

 The selected values for **Empty calibration** and **Full calibration** are only used to create the linearity protocol. Afterwards, the values are reset to the default values specific for the antenna. If values other than the default values are required, they must be ordered as a customized parameterization →  62.

6) If (E) and (F) are not specified, antenna-dependent default values will be used instead.

Customer-specific configuration

If the option IJ: "Customized parameterization HART", IK "Customized parameterization PA" or IL "Customized parameterization FF" has been selected in feature 570 "Service", presettings that differ from the default settings can be selected for the following parameters:

Parameters	Communication protocol	Picklist / range of values
Setup → Unit of length	■ HART ■ PA ■ FF	■ in ■ ft ■ mm ■ m
Setup → Empty calibration	■ HART ■ PA ■ FF	max. 70 m (230 ft)
Setup → Full calibration	■ HART ■ PA ■ FF	max. <70 m (230 ft)
Setup → Extended setup → Curr. output 1 or 2 → Damping	HART	0 to 999.9 s
Setup → Extended setup → Curr. output 1 or 2 → Failure mode	HART	■ Min ■ Max ■ Last valid value
Expert → Comm. → HART config. → Burst mode	HART	■ Off ■ On

Services

The following services can be selected via the product structure in the Product Configurator ⁷⁾:

- PWIS-free (PWIS = paint-wetting impairment substances)
- Customized parameterization HART →  62
- Customized parameterization PA →  62
- Customized parameterization FF →  62
- W/o tooling DVD (FieldCare)
- Hard-copy product documentation

7) Feature 570 in the product structure

Application Packages

Heartbeat Diagnostics

Availability

Available in all device versions.

Function

- Continuous self-monitoring of the device.
- Diagnostic messages output to
 - the local display.
 - an asset management system (e.g. FieldCare/DeviceCare).
 - an automation system (e.g. PLC).

Advantages

- Device condition information is available immediately and processed in time.
- The status signals are classified in accordance with VDI/VDE 2650 and NAMUR recommendation NE 107 and contain information about the cause of the error and remedial action.

Detailed description

See Operating Instructions of the device (→  71); chapter "Diagnostics and trouble shooting"

Heartbeat Verification

Availability

Available for the following options of feature 540 "Application Package":

- EH: Heartbeat Verification + Monitoring
- EJ: Heartbeat Verification

Device functionality checked on demand

- Verification of the correct functioning of the measuring device within specifications.
- The verification result provides information about the condition of the device: **Passed** or **Failed**.
- The results are documented in a verification report.
- The automatically generated report supports the obligation to demonstrate compliance with internal and external regulations, laws and standards.
- Verification is possible without interrupting the process.

Advantages

- No onsite presence is required to use the function.
- The DTM⁸⁾ triggers verification in the device and interprets the results. No specific knowledge is required on the part of the user.
- The verification report can be used to prove quality measures to a third party.
- **Heartbeat Verification** can replace other maintenance tasks (e.g. periodic check) or extend the test intervals.

SIL/WHG-locked devices⁹⁾

- The **Heartbeat Verification** module contains a wizard for the proof test which must be performed at appropriate intervals for the following applications:
 - SIL (IEC61508/IEC61511)
 - WHG (German Water Resources Act)
- To perform a proof test, the device must be locked (SIL/WHG locking).
- The wizard can be used via FieldCare, DeviceCare or a DTM-based process control system.



In the case of SIL-locked and WHG-locked devices, it is **not** possible to perform verification without additional measures (e.g. by-passing of the output current) because the output current must be simulated (Increased safety mode) or the level must be approached manually (Expert mode) during subsequent re-locking (SIL/WHG locking).

Detailed description

SD01870F

8) DTM: Device Type Manager; controls device operation via DeviceCare, FieldCare or a DTM-based process control system.

9) Only relevant for devices with SIL or WHG approval: order code 590 ("Additional approval"), option LA ("SIL") or LC ("WHG").

Heartbeat Monitoring**Availability**

Available for the following options of feature 540 "Application Package":
EH: Heartbeat Verification + Monitoring

Function

- In addition to the verification parameters, the corresponding parameter values are also logged.
- Existing measured variables, such as the echo amplitude, are used in the **Foam detection** and **Build-up detection** wizards.



The **Foam detection** and **Build-up detection** wizards cannot be used together.

"Foam detection" wizard

- The Heartbeat Monitoring module contains the **Foam detection** wizard.
- This wizard is used to configure automatic foam detection, which detects foam on the product surface on the basis of the reduced signal amplitude. Foam detection can be linked to a switch output in order to control a sprinkler system, for example, which dissolves the foam.
- This wizard can be used via FieldCare, DeviceCare or a DTM-based process control system.

"Build-up detection" wizard

- The Heartbeat Monitoring module contains the **Build-up detection** wizard.
- The wizard is used to configure automatic buildup detection, which detects the buildup of deposits on the antenna on the basis of the increased area of the coupling signal. Buildup detection can be linked to a switch output in order to control a compressed air system, for example, to clean the antenna.
- This wizard can be used via FieldCare, DeviceCare or a DTM-based process control system.

Advantages





- Early detection of changes (trends) to ensure plant availability and product quality.
- Use of information for the proactive planning of measures (e.g. cleaning/maintenance).
- Identification of undesirable process conditions as the basis to optimizing the facility and the processes.
- Automated control of measures to remove foam or buildup.

Detailed description


SD01870F

Accessories


Device-specific accessories Weather protection cover

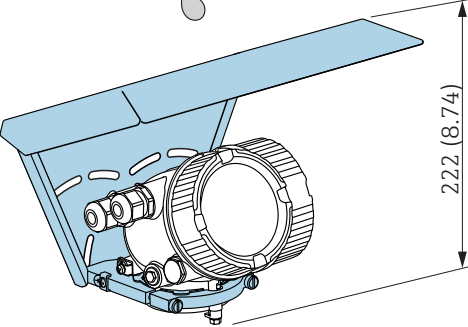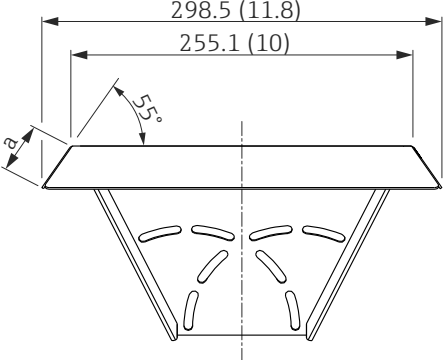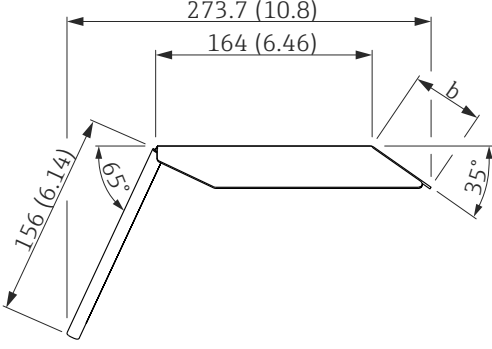Accessory	Description
Weather protection cover	    A0015466 A0015472 26 Weather protection cover; Dimensions: mm (in) a 37,8 mm (1,5 in) b 54 mm (2,1 in)  The weather protection cover can be ordered together with the device (product structure, feature 620 "Accessory Enclosed", option PB "Weather Protection Cover"). Alternatively, it can be separately ordered as an accessory; order code 71162242.

Remote display FHX50

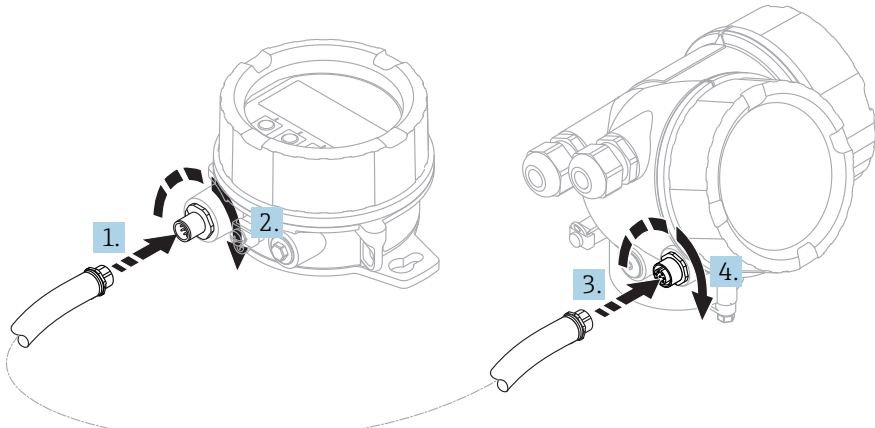Accessories	Description
Remote display FHX50	 A0019128 ■ Material: – Plastic PBT – 316L/1.4404 ■ Degree of protection: IP68 / NEMA 6P and IP66 / NEMA 4x ■ Suitable for display modules: – SD02 (push buttons) – SD03 (touch control) ■ Connecting cable: – Cable supplied with device up to 30 m (98 ft) – Standard cable supplied by customer up to 60 m (196 ft) ■ Ambient temperature range: –40 to 80 °C (–40 to 176 °F) i ■ If the remote display should be used, order the device version "Prepared for display FHX50" (feature 030, version L or M). For the FHX50, you must select option A: "Prepared for display FHX50" under feature 050 "Measuring device version". ■ If the device version "Prepared for display FHX50" was not originally ordered and a FHX50 display is to be retrofitted, you must select version B "Not prepared for display FHX50" under feature 050: "Measuring device version" when ordering the FHX50. In this case, a retrofit kit for the device is supplied with the FHX50. The kit can be used to prepare the device so that the FHX50 can be used. i Use of the FHX50 may be restricted for transmitters with an approval. A device can only be retrofitted with the FHX50 if the option L or M ("Prepared for FHX50") is listed under <i>Basic specifications</i>, item 4 "Display, operation" in the Safety Instructions (XA) for the device. Also pay attention to the Safety Instructions (XA) of the FHX50. i Retrofitting is not possible on transmitters with: ■ An approval for use in areas with flammable dust (dust ignition-proof approval) ■ Ex nA type of protection i For details, see document SD01007F.

Overvoltage protection

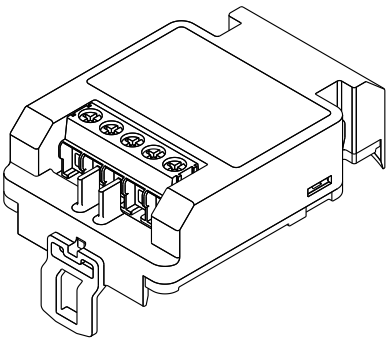Accessory	Description
Overvoltage protection for 2-wire-devices OVP10 (1 channel) OVP20 (2 channel)	 A0021734 Technical data ■ Resistance per channel: $2 \cdot 0.5 \Omega_{\max}$ ■ Threshold DC voltage: 400 to 700 V ■ Threshold impulse voltage: < 800 V ■ Capacitance at 1 MHz: < 1.5 pF ■ Nominal arrest impulse voltage (8/20 μs): 10 kA ■ Suited for wire cross-sections: 0.2 to 2.5 mm² (24 to 14 AWG) i Ordering with device The overvoltage protection module is preferably ordered with the device. See product structure, feature 610 "Accessory mounted", option NA "Overvoltage protection". Separate ordering of the module is only necessary if a device is to retrofitted with the overvoltage protection. i Order code for retrofitting ■ For 1-channel devices (feature 020, option A) OVP10: 71128617 ■ For 2-channel devices (feature 020, option B, C, E or G) OVP20 : 71128619 Housing lid for retrofitting In order to keep the necessary safety distances, the housing lid needs to be replaced if the device is retrofitted with the overvoltage protection. Depending on the housing type, the order code of the suitable lid is as follows: ■ GT18 housing: Lid 71185516 ■ GT19 housing: Lid 71185518 ■ GT20 housing: Lid 71185516 i Restrictions for retrofitting Depending on the approval of the transmitter the usage of the OVP module may be restricted. A device may only be retrofitted with an OVP module if the option NA (overvoltage protection) is quoted under <i>Optional Specifications</i> in the Safety Instructions (XA) pertaining to the device. i For details refer to SD01090F.

Gas-tight feedthrough

Accessories	Description
Gas-tight feedthrough	Chemically inert glass feedthrough; prevents gases from entering the electronics housing To order with the device: product structure, feature 610 "Accessory mounted", option NC "Gas-tight feedthrough"

Communication-specific accessories

Accessory	Description
Commubox FXA195 HART	For intrinsically safe HART communication with FieldCare via the USB interface.  For details refer to Technical Information TI00404F

Accessory	Description
Commubox FXA291	Connects Endress+Hauser field devices with CDI interface (= Endress+Hauser Common Data Interface) to the USB interface of a computer. Order code: 51516983  For details refer to Technical Information TI00405C

Accessory	Description
HART Loop Converter HMX50	Evaluates the dynamic HART variables and converts them to analog current signals or limit values. Order code: 71063562  For details refer to Technical Information TI00429F and Operating Instructions BA00371F

Accessory	Description
WirelessHART Adapter SWA70	Connects field devices to a WirelessHART network. The WirelessHART adapter can be mounted directly at a HART device and is easily integrated into an existing HART network. It ensures safe data transmission and can be operated in parallel with other wireless networks.  For details refer to Operating Instructions BA00061S

Accessory	Description
Fieldgate FXA320	Gateway for remote monitoring of connected 4-20mA measuring devices via web browser.  For details refer to Technical Information TI00025S and Operating Instructions BA00053S

Accessory	Description
Fieldgate FXA520	Gateway for remote diagnosis and parametrization of connected HART measuring devices via web browser.  For details refer to Technical Information TI00025S and Operating Instructions BA00051S

Accessory	Description
Field Xpert SFX350	Field Xpert SFX350 is a mobile computer for commissioning and maintenance. It enables efficient device configuration and diagnostics for HART and FOUNDATION fieldbus devices in the non-Ex area .  For details, see Operating Instructions BA01202S

Accessory	Description
Field Xpert SFX370	Field Xpert SFX370 is a mobile computer for commissioning and maintenance. It enables efficient device configuration and diagnostics for HART and FOUNDATION fieldbus devices in the non-Ex area and the Ex area .  For details, see Operating Instructions BA01202S

Service-specific accessories

Accessory	Description
FieldCare / DeviceCare	Endress+Hauser's FDT-based Plant Asset Management tool. Helps to configure and maintain all field devices of your plant. By supplying status information it also supports the diagnosis of the devices.  For details refer to Operating Instructions BA00027S and BA00059S.

System components

Accessory	Description
Graphic Data Manager Memograph M	The graphic data manager Memograph M provides information on all the relevant process variables. Measured values are recorded correctly, limit values are monitored and measuring points analyzed. The data are stored in the 256 MB internal memory and also on an SD card or USB stick.  For details refer to Technical Information TI00133R and Operating Instructions BA00247R
RN221N	Active barrier with power supply for safe separation of 4 to 20 mA current circuits. Provides bi-directional HART transmission.  For details refer to Technical Information TI00073R and Operating Instructions BA00202R
RNS221	Transmitter supply for 2-wire sensors or transmitters exclusively for non-Ex areas. Provides bi-directional communication using the HART communication sockets.  For details refer to Technical Information TI00081R and Operating Instructions KA00110R

Supplementary documentation



For an overview of the scope of the associated Technical Documentation, refer to the following:

- The *W@M Device Viewer*: enter the serial number from the nameplate (www.endress.com/deviceviewer)
- The *Endress+Hauser Operations App*: Enter the serial number from the nameplate or scan the 2-D matrix code (QR code) on the nameplate.



The following document types are available:

In the Download Area of the Endress+Hauser Internet site: www.endress.com → Downloads

Standard documentation

Micropilot FMR62

Correlation of documentations to the device:

Device	Power supply, output	Communication	Document type	Document code
FMR62	A, B, C, K, L	HART	Operating Instructions	BA01619F
			Brief Operating Instructions	KA01252F
			Description of device parameters	GP01101F
	G	PROFIBUS PA	Operating Instructions	* ¹⁾
			Brief Operating Instructions	*
			Description of device parameters	*
	E	FOUNDATION Fieldbus	Operating Instructions	*
			Brief Operating Instructions	*
			Description of device parameters	*

1) In preparation

Safety Instructions (XA)

Depending on the approval, the following Safety Instructions (XA) are supplied with the device. They are an integral part of the Operating Instructions.

Feature 010	Approval	Feature 020 "Power Supply; Output"				
		A ¹⁾	B ²⁾	C ³⁾	E ⁴⁾ /G ⁵⁾	K ⁶⁾ /L ⁷⁾
BA	ATEX II G Ex ia IIC T6-T1 Ga	XA01549F	XA01549F	XA01549F	XA01557F	* ⁸⁾
BB	ATEX II 1/2G Ex ia IIC T6 Ga/Gb	XA01549F	XA01549F	XA01549F	XA01557F	* ⁸⁾
BC	ATEX II 1/2G Ex d [ia] IIC T6 Ga/Gb	XA01552F	XA01552F	XA01552F	XA01560F	XA01552F
BD	ATEX II 1/2/3G Ex ic [ia Ga] IIC T6 Ga/Gb/Gc	XA01558F	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾
BG	ATEX II 3G Ex nA IIC T6 Gc	XA01551F	XA01551F	XA01551F	XA01559F	XA01551F
BH	ATEX II 3G Ex ic IIC T6 Gc	XA01551F	XA01551F	XA01551F	XA01559F	XA01551F
BL	ATEX II 1/2/3G Ex nA [ia Ga] IIC T6 Ga/Gb/Gc	XA01558F	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾
B2	ATEX II 1/2G Ex ia IIC T6 Ga/Gb, 1/2D Ex ia IIIC Da/Db	XA01555F	XA01555F	XA01555F	XA01563F	* ⁸⁾
B3	ATEX II 1/2G Ex d [ia] IIC T6 Ga/Gb, 1/2 D Ex ta IIIC Da/Db	XA01556F	XA01556F	XA01556F	XA01564F	XA01556F
B4	ATEX II 1/2G Ex ia IIC T6 Ga/Gb, Ex d[ia] IIC T6 Ga/Gb	XA01553F	XA01553F	XA01553F	XA01561F	* ⁸⁾
CD	CSA C/US DIP Cl.I,II,III Div.1 Gr.E-G	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾
C2	CSA C/US IS Cl.I,II,III Div.1 Gr.A-G, NI Cl.1 Div.2, Ex ia	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾
C3	CSA C/US XP Cl.I,II,III Div.1 Gr.A-G, NI Cl.1 Div.2, Ex d	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾
FB	FM IS Cl.I,II,III Div.1 Gr.A-G, AEx ia, NI Cl.1 Div.2	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾
FD	FM XP Cl.I,II,III Div.1 Gr.A-G, AEx d, NI Cl.1 Div.2	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾
FE	FM DIP Cl.I,II,III Div.1 Gr.E-G	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾	* ⁸⁾

Feature 010	Approval	Feature 020 "Power Supply; Output"				
		A ¹⁾	B ²⁾	C ³⁾	E ⁴⁾ /G ⁵⁾	K ⁶⁾ /L ⁷⁾
IA	IEC Ex ia IIC T6 Ga	XA01549F	XA01549F	XA01549F	XA01557F	* 8)
IB	IEC Ex ia IIC T6 Ga/Gb	XA01549F	XA01549F	XA01549F	XA01557F	* 8)
IC	IEC Ex d[ia] IIC T6 Ga/Gb	XA01552F	XA01552F	XA01552F	XA01560F	XA01552F
ID	IEC Ex ic[ia Ga] IIC T6 Ga/Gb/Gc	* 8)	* 8)	* 8)	* 8)	* 8)
IG	IEC Ex nA IIC T6 Gc	XA01551F	XA01551F	XA01551F	XA01559F	XA01551F
IH	IEC Ex ic IIC T6 Gc	XA01551F	XA01551F	XA01551F	XA01559F	XA01551F
IL	IEC Ex nA[ia Ga] IIC T6 Ga/Gb/Gc	* 8)	* 8)	* 8)	* 8)	v
I2	IEC Ex ia IIC T6 Ga/Gb, Ex ia IIIC Da/Db	XA01555F	XA01555F	XA01555F	XA01563F	* 8)
I3	IEC Ex d[ia] IIC T6 Ga/Gb, Ex ta IIIC Da/Db	XA01556F	XA01556F	XA01556F	XA01564F	XA01556F
I4	IEC Ex ia IIC T6 Ga/Gb, Ex d[ia] IIC T6 Ga/Gb	XA01553F	XA01553F	XA01553F	XA01561F	* 8)
KA	KC Ex ia IIC T6 Ga	* 8)	* 8)	* 8)	* 8)	* 8)
KB	KC Ex ia IIC T6 Ga/Gb	* 8)	* 8)	* 8)	* 8)	* 8)
KC	KC Ex d[ia] IIC T6 Ga/Gb	* 8)	* 8)	* 8)	* 8)	* 8)
MA	INMETRO Ex ia IIC T6 Ga	* 8)	* 8)	* 8)	* 8)	* 8)
MC	INMETRO Ex d[ia] IIC T6 Ga/Gb	* 8)	* 8)	* 8)	* 8)	* 8)
MH	INMETRO Ex ic IIC T6 Gc	* 8)	* 8)	* 8)	* 8)	* 8)
NA	NEPSI Ex ia IIC T6 Ga	* 8)	* 8)	* 8)	* 8)	* 8)
NB	NEPSI Ex ia IIC T6 Ga/Gb	* 8)	* 8)	* 8)	* 8)	* 8)
NC	NEPSI Ex d[ia] IIC T6 Ga/Gb	* 8)	* 8)	* 8)	* 8)	* 8)
NG	NEPSI Ex nA II T6 Gc	* 8)	* 8)	* 8)	* 8)	* 8)
NH	NEPSI Ex ic IIC T6 Gc	* 8)	* 8)	* 8)	* 8)	* 8)
N2	NEPSI Ex ia IIC T6 Ga/Gb, Ex iaD 20/21 T85...90oC	* 8)	* 8)	* 8)	* 8)	* 8)
N3	NEPSI Ex d[ia] IIC T6 Ga/Gb, DIP A20/21 T85...90oC IP66	* 8)	* 8)	* 8)	* 8)	* 8)
8A	FM/CSA IS+XP Cl.I,II,III Div.1 Gr.A-G	* 8)	* 8)	* 8)	* 8)	* 8)

- 1) 2-wire; 4-20mA HART
- 2) 2-wire; 4-20mA HART, switch output
- 3) 2-wire; 4-20mA HART, 4-20mA
- 4) 2-wire; FOUNDATION Fieldbus, switch output
- 5) 2-wire; PROFIBUS PA, switch output
- 6) 4-wire 90-253VAC; 4-20mA HART
- 7) 4-wire 10.4-48VDC; 4-20mA HART
- 8) In preparation



The nameplate indicates the Safety Instructions (XA) that are relevant to the device.

If the device is prepared for the remote display FHX50 (product structure: feature 030: Display, Operation", option L or M), the Ex marking of some certificates changes according to the following table ¹⁰⁾:

Feature 010 ("Approval")	Feature 030 ("Display, Operation")	Ex marking
B3	L ¹⁾	II 1/2 G Ex db [ia] IIC T6 Ga/Gb, II 1/2 D Ex ta [ia Db] IIIC Txx°C Da/Db
I3	L ²⁾	Ex db [ia] IIC T6 Ga/Gb, Ex ta [ia Db] IIIC Txx°C Da/Db

1) 4-wire 10.4-48VDC; 4-20mA HART

2) 4-wire 10.4-48VDC; 4-20mA HART

10) The marking of certificates not mentioned in this table are not affected by the FHX50.

www.addresses.endress.com
