

RADIO TEST REPORT

FCC ID: 2BADE-SEIEXSE2801

Product: SoundExtreme SE28

Trade Mark: SOUNDEXTREME BY ECOXGEAR

Model No.: SEI-EXSE2801

Family Model: N/A

Report No.: S23022402002002

Issue Date: Jun 15, 2023

Prepared for

Sound Extreme Inc.

9212 Fry Road, Suite 105-351, Cypress, TX 77433, USA

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	4
2	SUMMARY OF TEST RESULTS.....	5
3	FACILITIES AND ACCREDITATIONS	6
3.1	FACILITIES.....	6
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	6
3.3	MEASUREMENT UNCERTAINTY	6
4	GENERAL DESCRIPTION OF EUT	7
5	DESCRIPTION OF TEST MODES	9
6	SETUP OF EQUIPMENT UNDER TEST	10
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	10
6.2	SUPPORT EQUIPMENT.....	11
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	12
7	TEST REQUIREMENTS.....	13
7.1	CONDUCTED EMISSIONS TEST	13
7.1.1	<i>Applicable Standard</i>	13
7.1.2	<i>Conformance Limit</i>	13
7.1.3	<i>Measuring Instruments</i>	13
7.1.4	<i>Test Configuration</i>	13
7.1.5	<i>Test Procedure</i>	13
7.1.6	<i>Test Results</i>	14
7.2	RADIATED SPURIOUS EMISSION	15
7.2.1	<i>Applicable Standard</i>	15
7.2.2	<i>Conformance Limit</i>	15
7.2.3	<i>Measuring Instruments</i>	16
7.2.4	<i>Test Configuration</i>	16
7.2.5	<i>Test Procedure</i>	17
7.2.6	<i>Test Results</i>	18
7.3	6DB BANDWIDTH.....	27
7.3.1	<i>Applicable Standard</i>	27
7.3.2	<i>Conformance Limit</i>	27
7.3.3	<i>Measuring Instruments</i>	27
7.3.4	<i>Test Setup</i>	27
7.3.5	<i>Test Procedure</i>	27
7.3.6	<i>Test Results</i>	27
7.4	DUTY CYCLE.....	28
7.4.1	<i>Applicable Standard</i>	28
7.4.2	<i>Conformance Limit</i>	28
7.4.3	<i>Measuring Instruments</i>	28
7.4.4	<i>Test Setup</i>	28
7.4.5	<i>Test Procedure</i>	28
7.4.6	<i>Test Results</i>	29
7.5	PEAK OUTPUT POWER.....	30
7.5.1	<i>Applicable Standard</i>	30
7.5.2	<i>Conformance Limit</i>	30
7.5.3	<i>Measuring Instruments</i>	30
7.5.4	<i>Test Setup</i>	30
7.5.5	<i>Test Procedure</i>	30
7.5.6	<i>Test Results</i>	30

7.6	POWER SPECTRAL DENSITY	31
7.6.1	Applicable Standard	31
7.6.2	Conformance Limit	31
7.6.3	Measuring Instruments	31
7.6.4	Test Setup	31
7.6.5	Test Procedure	31
7.6.6	Test Results	32
7.7	CONDUCTED BAND EDGE MEASUREMENT	33
7.7.1	Applicable Standard	33
7.7.2	Conformance Limit	33
7.7.3	Measuring Instruments	33
7.7.4	Test Setup	33
7.7.5	Test Procedure	33
7.7.6	Test Results	33
7.8	SPURIOUS RF CONDUCTED EMISSIONS	34
7.8.1	Conformance Limit	34
7.8.2	Measuring Instruments	34
7.8.3	Test Setup	34
7.8.4	Test Procedure	34
7.8.5	Test Results	34
7.9	ANTENNA APPLICATION	35
7.9.1	Antenna Requirement	35
7.9.2	Result	35
8	TEST RESULTS	36
MODULE 1:		36
8.1.1	Duty Cycle	36
8.1.2	Maximum Conducted Output Power	38
8.1.3	-6dB Bandwidth	41
8.1.4	Occupied Channel Bandwidth	44
8.1.5	Maximum Power Spectral Density Level	47
8.1.6	Band Edge	50
8.1.7	Conducted RF Spurious Emission	53
MODULE 2(1M):		57
8.1.8	Duty Cycle	57
8.1.9	Maximum Conducted Output Power	59
8.1.10	-6dB Bandwidth	62
8.1.11	Occupied Channel Bandwidth	65
8.1.12	Maximum Power Spectral Density Level	68
8.1.13	Band Edge	71
8.1.14	Conducted RF Spurious Emission	74
MODULE 2(2M):		78
8.1.15	Duty Cycle	78
8.1.16	Maximum Conducted Output Power	80
8.1.17	-6dB Bandwidth	83
8.1.18	Occupied Channel Bandwidth	86
8.1.19	Maximum Power Spectral Density Level	89
8.1.20	Band Edge	92
8.1.21	Conducted RF Spurious Emission	95

1 TEST RESULT CERTIFICATION

Applicant's name	Sound Extreme Inc.
Address	9212 Fry Road, Suite 105-351, Cypress, TX 77433, USA
Manufacturer's Name	Xingtel Xiamen Group Co., Ltd.
Address	Xingtel Building, Chuangxin Road, Torch Hi-Tech Industrial District, Xiamen 361006, PR China
Product description	
Product name	SoundExtreme SE28
Model and/or type reference	SEI-EXSE2801
Family Model	N/A
Sample number	S230224020004

Measurement Procedure Used:

APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02	Complied

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : Mar 14, 2023 ~ Jun 15, 2023

Testing Engineer : 
(Allen Liu)

Authorized Signatory : 
(Alex Li)

2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C			
Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	N/A	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.209 (a) 15.205 (a)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.247 (d)	Band Edge Emission	PASS	
15.247 (d)	Spurious RF Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	
Remark: 1. "N/A" denotes test is not applicable in this Test Report. 2. All test items were verified and recorded according to the standards and without any deviation during the test.			

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.
CAB identifier:CN0074

FCC- Accredited : Test Firm Registration Number: 463705.

Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(>6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$
9	All emissions, radiated(9KHz~30MHz)	$\pm 6\text{dB}$

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	SoundExtreme SE28
Trade Mark	SOUNDEXTREME BY ECOXGEAR
FCC ID	2BADE-SEIEXSE2801
Model No.	SEI-EXSE2801
Family Model	N/A
Model Difference	N/A
Operating Frequency	2402MHz~2480MHz
Modulation	GFSK
Number of Channels	40 Channels
Antenna Type	Antenna 1: PCB Antenna Antenna 2: PCB antenna
Antenna Gain	Antenna 1: 0 dBi Antenna 2: 0 dBi
Power supply	Input: DC 12V powered by DC port Output: DC 5V, 2A
Adapter	N/A
Battery	N/A
HW Version	N/A
SW Version	N/A

Note 1: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Note 2: The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps/2Mbps for GFSK modulation) were used for all test.

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

Channel	Frequency(MHz)
0	2402
1	2404
...	...
19	2440
20	2442
...	...
38	2478
39	2480

Note: $f_c = 2402\text{MHz} + k \times 2\text{MHz}$ $k=0$ to 39

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Test Cases	
Test Item	Data Rate/ Modulation
Radiated Test Cases	Mode 1: normal link mode
	Mode 2: GFSK Tx Ch00 2402MHz 1Mbps/2Mbps
	Mode 3: GFSK Tx Ch19 2440MHz 1Mbps/2Mbps
	Mode 4: GFSK Tx Ch39 2480MHz 1Mbps/2Mbps
Conducted Test Cases	Mode 2: GFSK Tx Ch00 2402MHz 1Mbps/2Mbps
	Mode 3: GFSK Tx Ch19 2440MHz 1Mbps/2Mbps
	Mode 4: GFSK Tx Ch39 2480MHz 1Mbps/2Mbps


Note:

- The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode(duty cycle =100% during the test)
- AC power line Conducted Emission was tested under maximum output power.
For radiated test cases, the worst mode data was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

For Radiated Test Cases

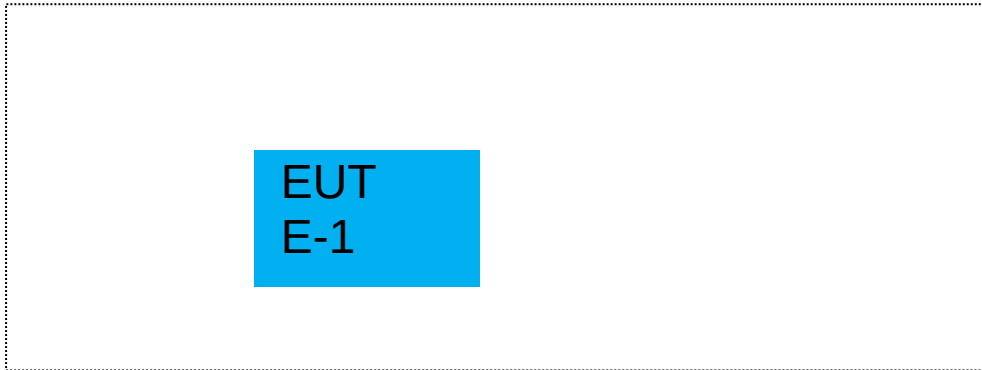

For Conducted Test Cases

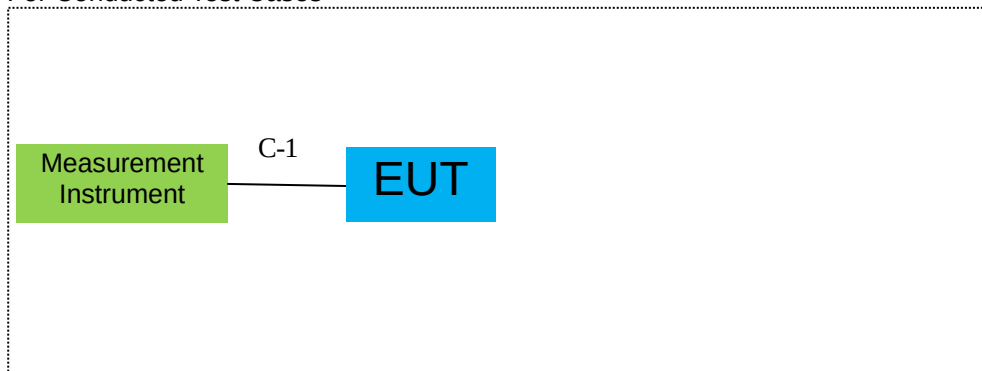

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	SoundExtreme SE28	SEI-EXSE2801	N/A	EUT

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	RF Cable	YES	NO	0.1m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2022.04.06 2023.03.27	2023.04.05 2024.03.26	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2022.06.17	2023.06.16	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2022.04.06 2023.03.27	2023.04.05 2024.03.26	1 year
4	Test Receiver	R&S	ESPI7	101318	2022.04.06 2023.03.27	2023.04.05 2024.03.26	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2022.03.30 2023.03.27	2023.03.29 2024.03.26	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11 2023.05.06	2023.05.10 2026.05.05	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2022.03.31 2023.03.27	2023.03.30 2024.03.26	1 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2022.11.08	2023.11.07	1 year
9	Amplifier	EMC	EMC051835SE	980246	2022.06.17	2023.06.16	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2022.11.08	2023.11.07	1 year
11	Power Meter	DARE	RPR3006W	15I00041SN084	2022.11.08	2023.11.07	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
14	High Test Cable(1G-40GHz)	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
15	Filter	TRILTHIC	2400MHz	29	2022.11.08	2023.11.07	1 year
16	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a)

7.1.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
2. The lower limit shall apply at the transition frequencies
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

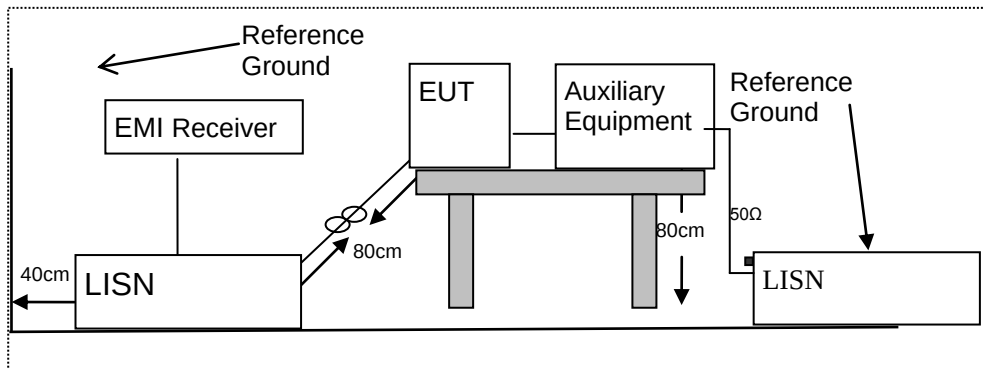

7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

7.1.6 Test Results

EUT:	SoundExtreme SE28	Model Name :	SEI-EXSE2801
Temperature:	22 °C	Relative Humidity:	57%
Pressure:	1010hPa	Phase :	N/A
Test Voltage :	N/A	Test Mode:	N/A

Note: EUT is battery powered ,Not Applicable

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz: Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz: Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

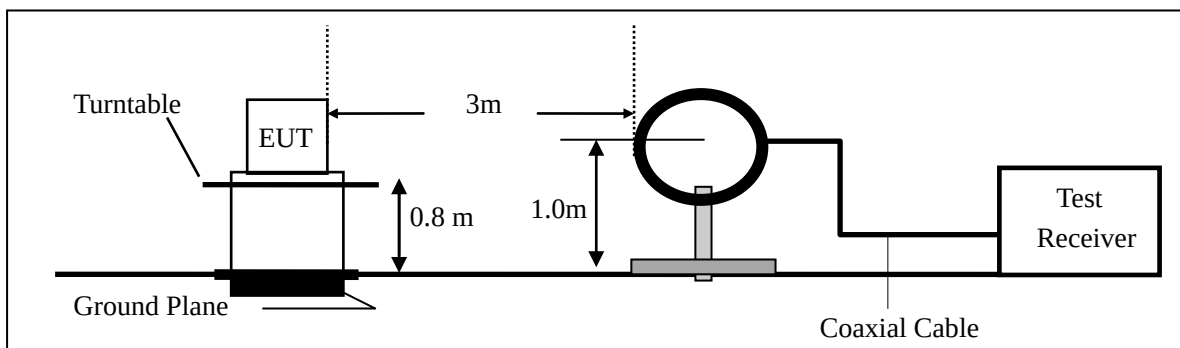

(b) For radiated emissions from 30MHz to 1000MHz

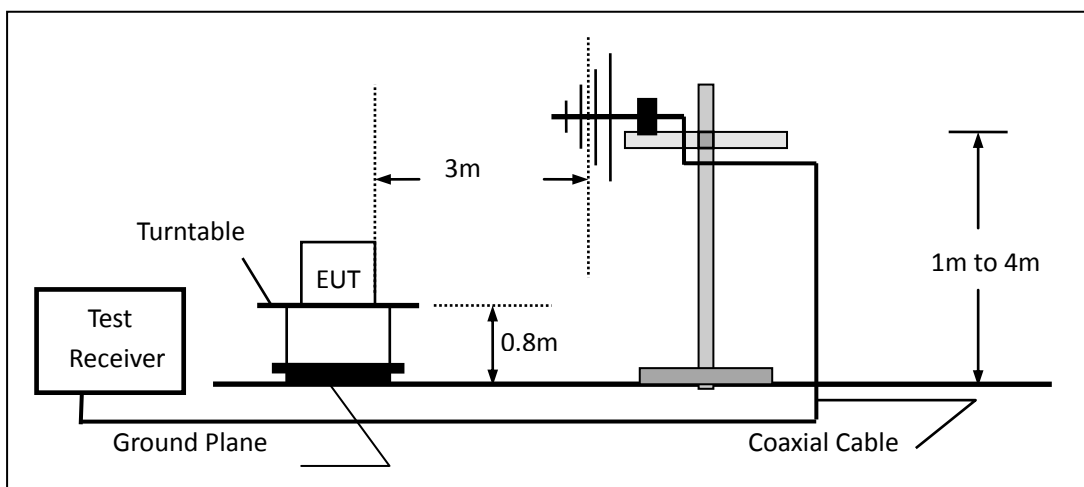

(c) For radiated emissions above 1000MHz

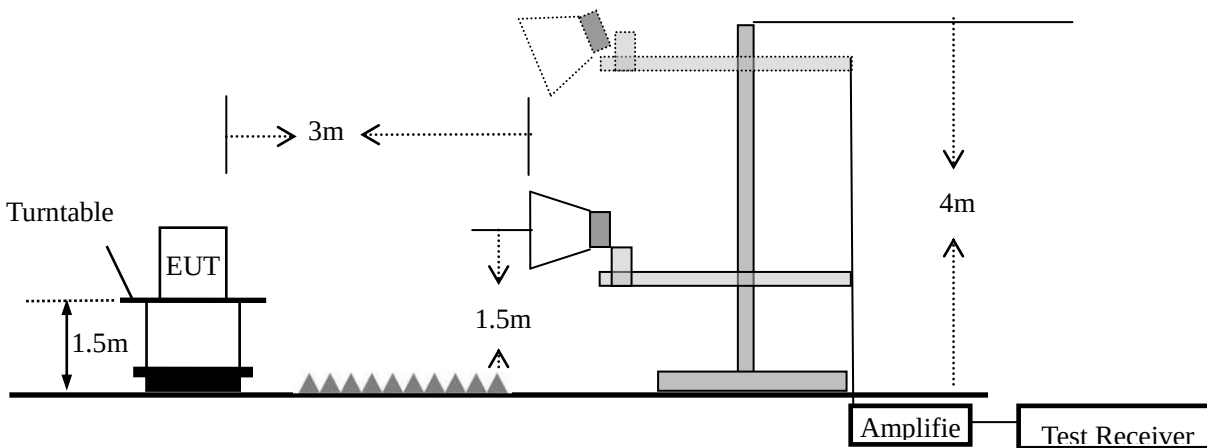

7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1MHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	1 MHz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	SoundExtreme SE28	Model No.:	SEI-EXSE2801
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode1/Mode2/Mode3/ Mode4	Test By:	Allen Liu

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Spurious Emission below 1GHz (30MHz to 1GHz)

All the modulation modes have been tested, and the worst result was report as below:


EUT:	SoundExtreme SE28	Model Name :	SEI-EXSE2801
Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010hPa	Test Mode:	Mode 1
Test Voltage :	DC 12V		

Module 1

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	120.6991	17.54	18.74	36.28	43.50	-7.22	QP
V	139.3611	15.91	18.71	34.62	43.50	-8.88	QP
V	158.6676	13.07	18.14	31.21	43.50	-12.29	QP
V	191.0738	10.81	16.45	27.26	43.50	-16.24	QP
V	208.5801	10.82	16.58	27.40	43.50	-16.10	QP
V	324.4560	13.16	20.61	33.77	46.00	-12.23	QP

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

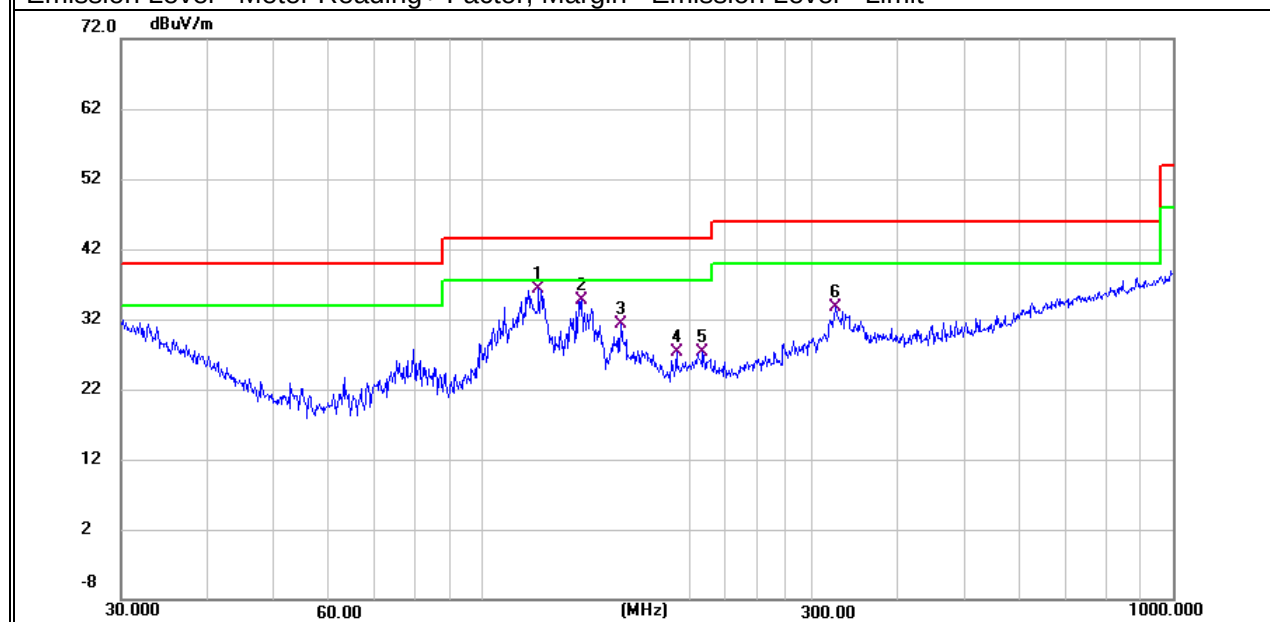

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	54.6428	16.72	13.06	29.78	40.00	-10.22	QP
H	71.0802	16.33	13.67	30.00	40.00	-10.00	QP
H	137.9028	17.11	18.73	35.84	43.50	-7.66	QP
H	169.5990	17.97	17.51	35.48	43.50	-8.02	QP
H	202.8103	20.67	16.46	37.13	43.50	-6.37	QP
H	330.1950	20.93	20.85	41.78	46.00	-4.22	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

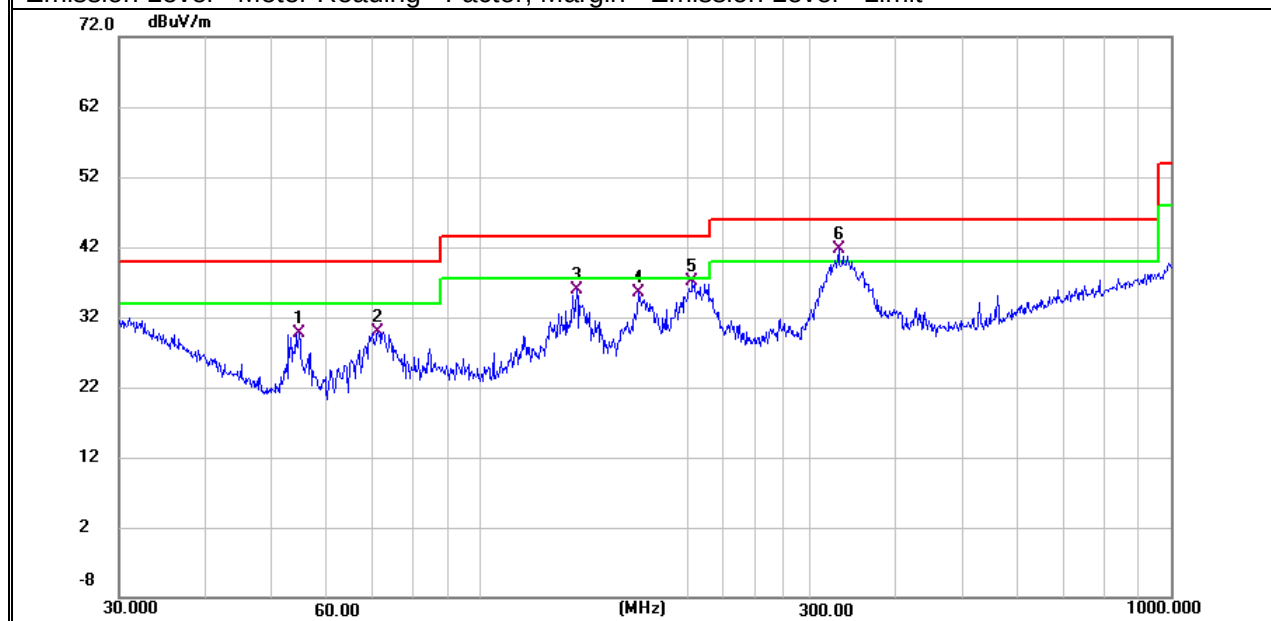

Module 2

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	82.3590	13.72	15.71	29.43	40.00	-10.57	QP
V	116.5400	18.36	18.66	37.02	43.50	-6.48	QP
V	135.5062	16.55	18.78	35.33	43.50	-8.17	QP
V	155.9100	13.84	18.30	32.14	43.50	-11.36	QP
V	192.4185	13.13	16.43	29.56	43.50	-13.94	QP
V	326.7395	12.67	20.71	33.38	46.00	-12.62	QP

Remark:


Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit



Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	54.2610	16.92	13.24	30.16	40.00	-9.84	QP
H	71.0802	16.64	13.67	30.31	40.00	-9.69	QP
H	137.9028	20.18	18.73	38.91	43.50	-4.59	QP
H	172.5988	18.32	17.35	35.67	43.50	-7.83	QP
H	209.3130	21.29	16.60	37.89	43.50	-5.61	QP
H	329.0390	20.34	20.80	41.14	46.00	-4.86	QP

Remark:

Emission Level= Meter Reading+ Factor, Margin= Emission Level - Limit

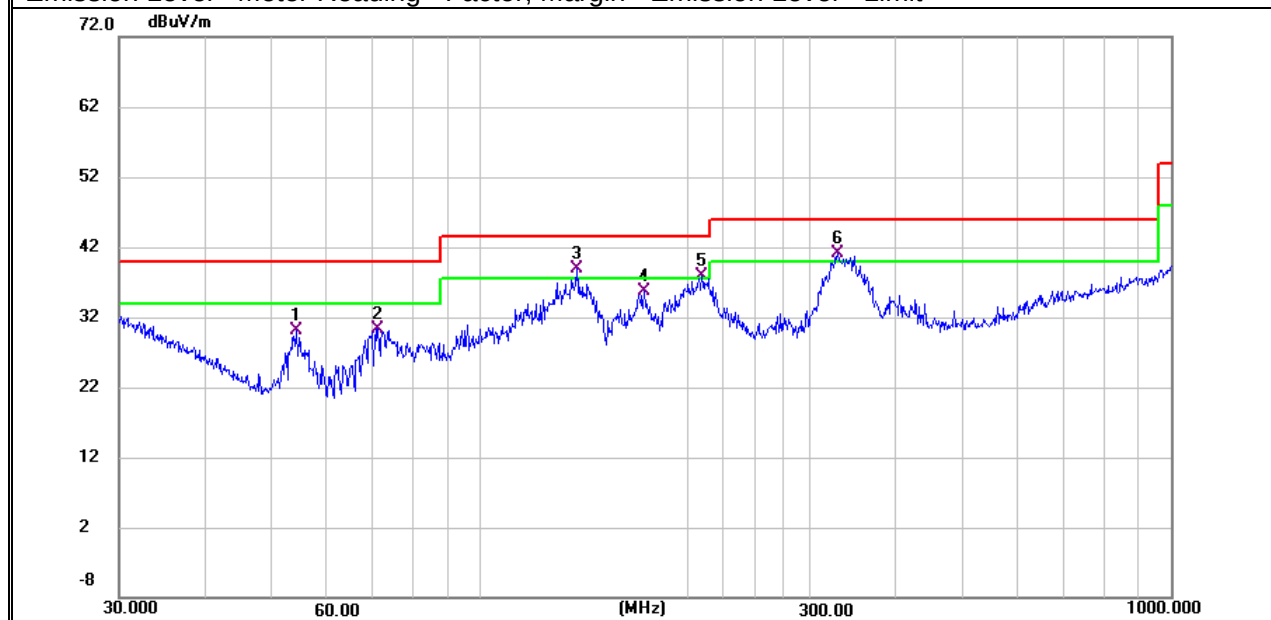

Spurious Emission Above 1GHz (1GHz to 25GHz)

EUT:	SoundExtreme SE28	Model No.:	SEI-EXSE2801
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Module 1

Frequency	Read Level	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2402 MHz)(GFSK)--Above 1G									
4804.338	61.37	5.21	35.59	44.30	57.87	74.00	-16.13	Pk	Vertical
4804.338	43.02	5.21	35.59	44.30	39.52	54.00	-14.48	AV	Vertical
7206.107	61.36	6.48	36.27	44.60	59.51	74.00	-14.49	Pk	Vertical
7206.107	42.08	6.48	36.27	44.60	40.23	54.00	-13.77	AV	Vertical
4804.169	62.85	5.21	35.55	44.30	59.31	74.00	-14.69	Pk	Horizontal
4804.169	42.97	5.21	35.55	44.30	39.43	54.00	-14.57	AV	Horizontal
7206.214	62.68	6.48	36.27	44.52	60.91	74.00	-13.09	Pk	Horizontal
7206.214	42.62	6.48	36.27	44.52	40.85	54.00	-13.15	AV	Horizontal
Mid Channel (2440 MHz)(GFSK)--Above 1G									
4880.473	63.85	5.21	35.66	44.20	60.52	74.00	-13.48	Pk	Vertical
4880.473	43.68	5.21	35.66	44.20	40.35	54.00	-13.65	AV	Vertical
7320.265	64.30	7.10	36.50	44.43	63.47	74.00	-10.53	Pk	Vertical
7320.265	42.62	7.10	36.50	44.43	41.79	54.00	-12.21	AV	Vertical
4880.366	61.96	5.21	35.66	44.20	58.63	74.00	-15.37	Pk	Horizontal
4880.366	41.07	5.21	35.66	44.20	37.74	54.00	-16.26	AV	Horizontal
7320.234	59.50	7.10	36.50	44.43	58.67	74.00	-15.33	Pk	Horizontal
7320.234	44.28	7.10	36.50	44.43	43.45	54.00	-10.55	AV	Horizontal
High Channel (2480 MHz)(GFSK)-- Above 1G									
4960.482	63.57	5.21	35.52	44.21	60.09	74.00	-13.91	Pk	Vertical
4960.482	42.81	5.21	35.52	44.21	39.33	54.00	-14.67	AV	Vertical
7440.131	64.60	7.10	36.53	44.60	63.63	74.00	-10.37	Pk	Vertical
7440.131	49.82	7.10	36.53	44.60	48.85	54.00	-5.15	AV	Vertical
4960.326	63.69	5.21	35.52	44.21	60.21	74.00	-13.79	Pk	Horizontal
4960.326	45.03	5.21	35.52	44.21	41.55	54.00	-12.45	AV	Horizontal
7440.199	64.18	7.10	36.53	44.60	63.21	74.00	-10.79	Pk	Horizontal
7440.199	45.03	7.10	36.53	44.60	44.06	54.00	-9.94	AV	Horizontal

Module 2

Frequency	Read Level	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Remark	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)		
Low Channel (2402 MHz)(GFSK)--Above 1G									
4804.338	62.50	5.21	35.59	44.30	59.00	74.00	-15.00	Pk	Vertical
4804.338	42.25	5.21	35.59	44.30	38.75	54.00	-15.25	AV	Vertical
7206.107	60.82	6.48	36.27	44.60	58.97	74.00	-15.03	Pk	Vertical
7206.107	42.16	6.48	36.27	44.60	40.31	54.00	-13.69	AV	Vertical
4804.169	63.92	5.21	35.55	44.30	60.38	74.00	-13.62	Pk	Horizontal
4804.169	42.05	5.21	35.55	44.30	38.51	54.00	-15.49	AV	Horizontal
7206.214	62.40	6.48	36.27	44.52	60.63	74.00	-13.37	Pk	Horizontal
7206.214	42.56	6.48	36.27	44.52	40.79	54.00	-13.21	AV	Horizontal
Mid Channel (2440 MHz)(GFSK)--Above 1G									
4880.473	63.76	5.21	35.66	44.20	60.43	74.00	-13.57	Pk	Vertical
4880.473	43.40	5.21	35.66	44.20	40.07	54.00	-13.93	AV	Vertical
7320.265	65.00	7.10	36.50	44.43	64.17	74.00	-9.83	Pk	Vertical
7320.265	41.05	7.10	36.50	44.43	40.22	54.00	-13.78	AV	Vertical
4880.366	62.04	5.21	35.66	44.20	58.71	74.00	-15.29	Pk	Horizontal
4880.366	40.98	5.21	35.66	44.20	37.65	54.00	-16.35	AV	Horizontal
7320.234	60.78	7.10	36.50	44.43	59.95	74.00	-14.05	Pk	Horizontal
7320.234	44.84	7.10	36.50	44.43	44.01	54.00	-9.99	AV	Horizontal
High Channel (2480 MHz)(GFSK)-- Above 1G									
4960.482	64.45	5.21	35.52	44.21	60.97	74.00	-13.03	Pk	Vertical
4960.482	41.35	5.21	35.52	44.21	37.87	54.00	-16.13	AV	Vertical
7440.131	64.80	7.10	36.53	44.60	63.83	74.00	-10.17	Pk	Vertical
7440.131	49.98	7.10	36.53	44.60	49.01	54.00	-4.99	AV	Vertical
4960.326	63.87	5.21	35.52	44.21	60.39	74.00	-13.61	Pk	Horizontal
4960.326	45.31	5.21	35.52	44.21	41.83	54.00	-12.17	AV	Horizontal
7440.199	64.48	7.10	36.53	44.60	63.51	74.00	-10.49	Pk	Horizontal
7440.199	45.70	7.10	36.53	44.60	44.73	54.00	-9.27	AV	Horizontal

Note:

- (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor
- (2) All other emissions more than 20dB below the limit.

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

EUT:	SoundExtreme SE28	Model No.:	SEI-EXSE2801
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/ Mode4	Test By:	Allen Liu

Module 1

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
1Mbps(GFSK)									
2310.00	63.15	2.97	27.80	43.80	50.12	74	-23.88	Pk	Horizontal
2310.00	43.08	2.97	27.80	43.80	30.05	54	-23.95	AV	Horizontal
2310.00	62.12	2.97	27.80	43.80	49.09	74	-24.91	Pk	Vertical
2310.00	41.91	2.97	27.80	43.80	28.88	54	-25.12	AV	Vertical
2390.00	64.11	3.14	27.21	43.80	50.66	74	-23.34	Pk	Vertical
2390.00	42.65	3.14	27.21	43.80	29.20	54	-24.80	AV	Vertical
2390.00	64.15	3.14	27.21	43.80	50.70	74	-23.30	Pk	Horizontal
2390.00	42.74	3.14	27.21	43.80	29.29	54	-24.71	AV	Horizontal
2483.50	62.49	3.58	27.70	44.00	49.77	74	-24.23	Pk	Vertical
2483.50	43.02	3.58	27.70	44.00	30.30	54	-23.70	AV	Vertical
2483.50	64.40	3.58	27.70	44.00	51.68	74	-22.32	Pk	Horizontal
2483.50	43.57	3.58	27.70	44.00	30.85	54	-23.15	AV	Horizontal

Module 2

Frequency	Meter Reading	Cable Loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
1Mbps(GFSK)									
2310.00	63.35	2.97	27.80	43.80	50.32	74	-23.68	Pk	Horizontal
2310.00	43.34	2.97	27.80	43.80	30.31	54	-23.69	AV	Horizontal
2310.00	60.92	2.97	27.80	43.80	47.89	74	-26.11	Pk	Vertical
2310.00	41.37	2.97	27.80	43.80	28.34	54	-25.66	AV	Vertical
2390.00	63.27	3.14	27.21	43.80	49.82	74	-24.18	Pk	Vertical
2390.00	43.17	3.14	27.21	43.80	29.72	54	-24.28	AV	Vertical
2390.00	64.77	3.14	27.21	43.80	51.32	74	-22.68	Pk	Horizontal
2390.00	42.73	3.14	27.21	43.80	29.28	54	-24.72	AV	Horizontal
2483.50	61.50	3.58	27.70	44.00	48.78	74	-25.22	Pk	Vertical
2483.50	42.39	3.58	27.70	44.00	29.67	54	-24.33	AV	Vertical
2483.50	65.05	3.58	27.70	44.00	52.33	74	-21.67	Pk	Horizontal
2483.50	43.14	3.58	27.70	44.00	30.42	54	-23.58	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.

Spurious Emission in Restricted Band 3260MHz-18000MHz

EUT:	SoundExtreme SE28	Model No.:	SEI-EXSE2801
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/ Mode4	Test By:	Allen Liu

Module 1

Frequency	Reading Level	Cable Loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
3260	64.44	4.04	29.57	44.70	53.35	74	-20.65	Pk	Vertical
3260	56.73	4.04	29.57	44.70	45.64	54	-8.36	AV	Vertical
3260	67.03	4.04	29.57	44.70	55.94	74	-18.06	Pk	Horizontal
3260	59.07	4.04	29.57	44.70	47.98	54	-6.02	AV	Horizontal
3332	65.96	4.26	29.87	44.40	55.69	74	-18.31	Pk	Vertical
3332	56.66	4.26	29.87	44.40	46.39	54	-7.61	AV	Vertical
3332	66.81	4.26	29.87	44.40	56.54	74	-17.46	Pk	Horizontal
3332	52.45	4.26	29.87	44.40	42.18	54	-11.82	AV	Horizontal
17797	45.49	10.99	43.95	43.50	56.93	74	-17.07	Pk	Vertical
17797	34.62	10.99	43.95	43.50	46.06	54	-7.94	AV	Vertical
17788	45.59	11.81	43.69	44.60	56.49	74	-17.51	Pk	Horizontal
17788	35.75	11.81	43.69	44.60	46.65	54	-7.35	AV	Horizontal

Module 2

Frequency	Reading Level	Cable Loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	dB/m	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
3260	64.37	4.04	29.57	44.70	53.28	74	-20.72	Pk	Vertical
3260	58.41	4.04	29.57	44.70	47.32	54	-6.68	AV	Vertical
3260	66.07	4.04	29.57	44.70	54.98	74	-19.02	Pk	Horizontal
3260	57.95	4.04	29.57	44.70	46.86	54	-7.14	AV	Horizontal
3332	65.19	4.26	29.87	44.40	54.92	74	-19.08	Pk	Vertical
3332	57.85	4.26	29.87	44.40	47.58	54	-6.42	AV	Vertical
3332	65.89	4.26	29.87	44.40	55.62	74	-18.38	Pk	Horizontal
3332	52.93	4.26	29.87	44.40	42.66	54	-11.34	AV	Horizontal
17797	44.95	10.99	43.95	43.50	56.39	74	-17.61	Pk	Vertical
17797	35.50	10.99	43.95	43.50	46.94	54	-7.06	AV	Vertical
17788	44.24	11.81	43.69	44.60	55.14	74	-18.86	Pk	Horizontal
17788	36.22	11.81	43.69	44.60	47.12	54	-6.88	AV	Horizontal

Note: (1) All other emissions more than 20dB below the limit.

7.3 6DB BANDWIDTH

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.2.

7.3.2 Conformance Limit

The minimum permissible 6dB bandwidth is 500 kHz.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows Subclause 11.8 of ANSI C63.10

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.6 Test Results

EUT:	SoundExtreme SE28	Model No.:	SEI-EXSE2801
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Test data reference attachment.

7.4 DUTY CYCLE

7.4.1 Applicable Standard

According to KDB 558074 D01 15.247 Meas Guidance v05r02s Section 6.

7.4.2 Conformance Limit

No limit requirement.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 8MHz(the largest available value)

VBW = 8MHz ($\geq$ RBW)

Number of points in Sweep > 100

Detector function = peak

Trace = Clear write

Measure T_{total} and T_{on}

Calculate Duty Cycle = T_{on} / T_{total}

7.4.6 Test Results

EUT:	SoundExtreme SE28	Model No.:	SEI-EXSE2801
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Test data reference attachment.

7.5 PEAK OUTPUT POWER

7.5.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.3.1.

7.5.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm). If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The testing follows Subclause 11.9.1.1 of ANSI C63.10
 The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
 Set to the maximum power setting and enable the EUT transmit continuously.
 The EUT was operating in controlled its channel.
 Use the following spectrum analyzer settings:
 Set the RBW $\cong$ DTS bandwidth.
 Set VBW = 3*RBW.
 Set the span $\cong$ 3*RBW
 Set Sweep time = auto couple.
 Set Detector = peak.
 Set Trace mode = max hold.
 Allow trace to fully stabilize.
 Use peak marker function to determine the peak amplitude level.

7.5.6 Test Results

EUT:	SoundExtreme SE28	Model No.:	SEI-EXSE2801
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Test data reference attachment.

7.6 POWER SPECTRAL DENSITY

7.6.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.4.

7.6.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows Measurement Procedure Subclause 11.10.2 of ANSI C63.10
This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5*DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \text{ RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.6.6 Test Results

EUT:	SoundExtreme SE28	Model No.:	SEI-EXSE2801
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Allen Liu

Test data reference attachment.

7.7 CONDUCTED BAND EDGE MEASUREMENT

7.7.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.

7.7.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 558074 D01 15.247 Meas Guidance v05r02 Section 8.7.
The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
Set to the maximum power setting and enable the EUT transmit continuously.
The EUT was operating in controlled its channel.
Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
Repeat above procedures until all measured frequencies were complete.

7.7.6 Test Results

EUT:	SoundExtreme SE28	Model No.:	SEI-EXSE2801
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode2/Mode4	Test By:	Allen Liu

Test data reference attachment.

7.8 SPURIOUS RF CONDUCTED EMISSIONS

7.8.1 Conformance Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.8.2 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.3 Test Setup

Please refer to Section 6.1 of this test report.

7.8.4 Test Procedure

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 30MHz to 26.5GHz.

7.8.5 Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

Test data reference attachment.

7.9 ANTENNA APPLICATION

7.9.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.9.2 Result


The EUT antenna is permanent attached PCB antenna (Gain: Ant 1 0dBi; Ant 2 0dBi).It comply with the standard requirement.


8 TEST RESULTS

Module 1:

8.1.1 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	87.81	0.56	0.61
NVNT	BLE 1M	2440	Ant1	87.77	0.57	0.61
NVNT	BLE 1M	2480	Ant1	87.59	0.58	0.61

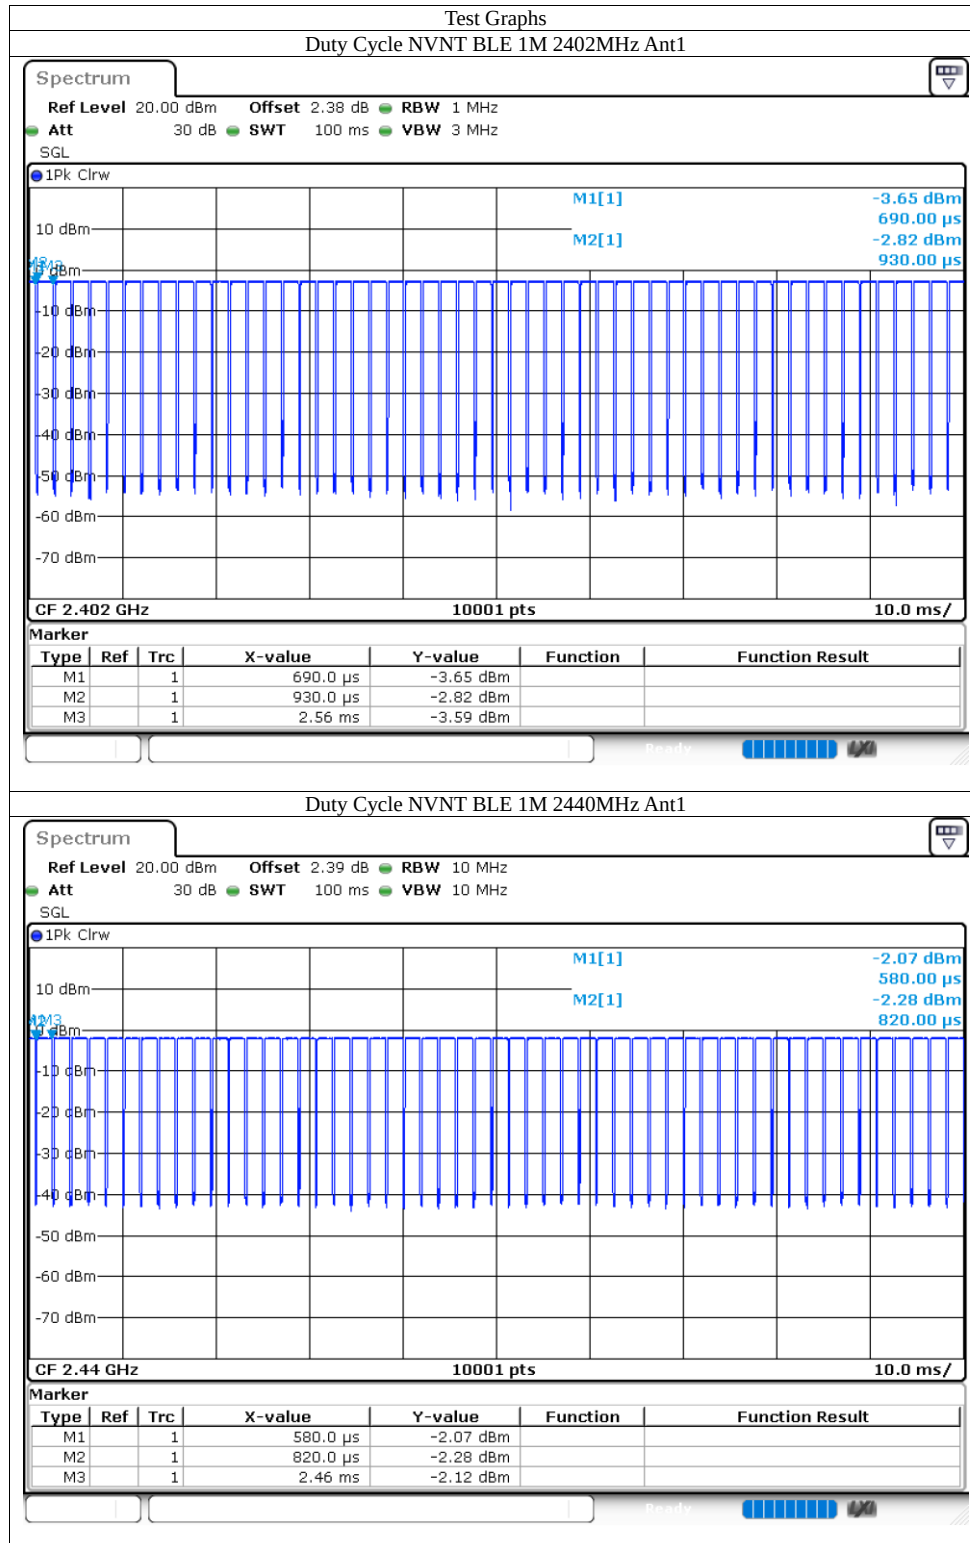


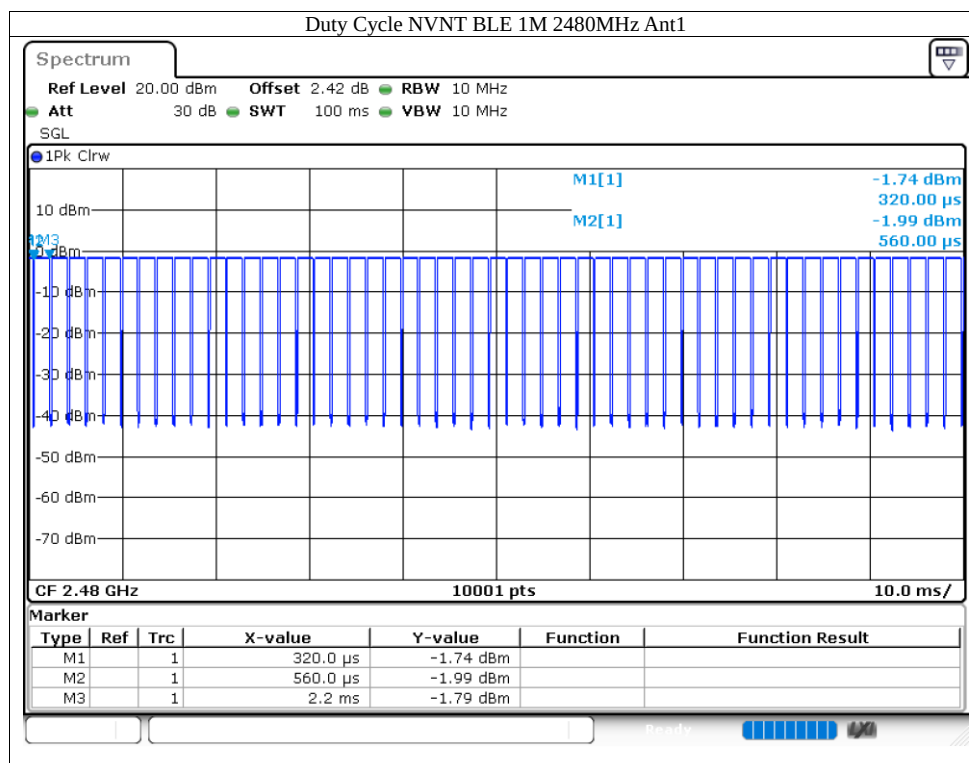

8.1.2 Maximum Conducted Output Power



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-0.4	30	Pass
NVNT	BLE 1M	2440	Ant1	-0.23	30	Pass
NVNT	BLE 1M	2480	Ant1	-0.46	30	Pass

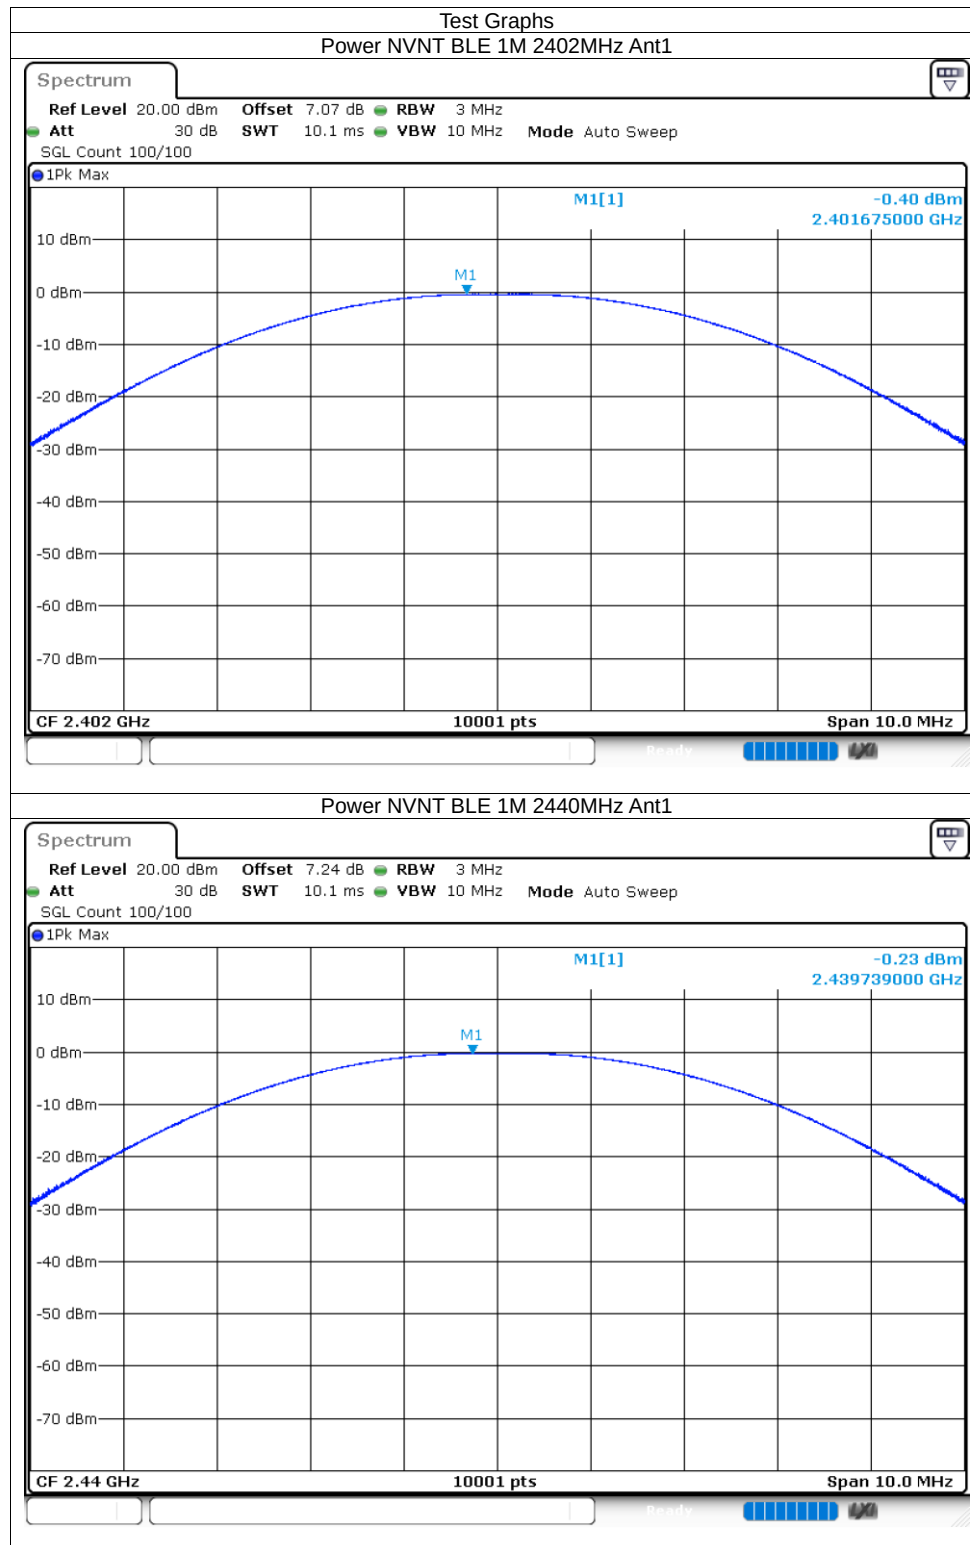


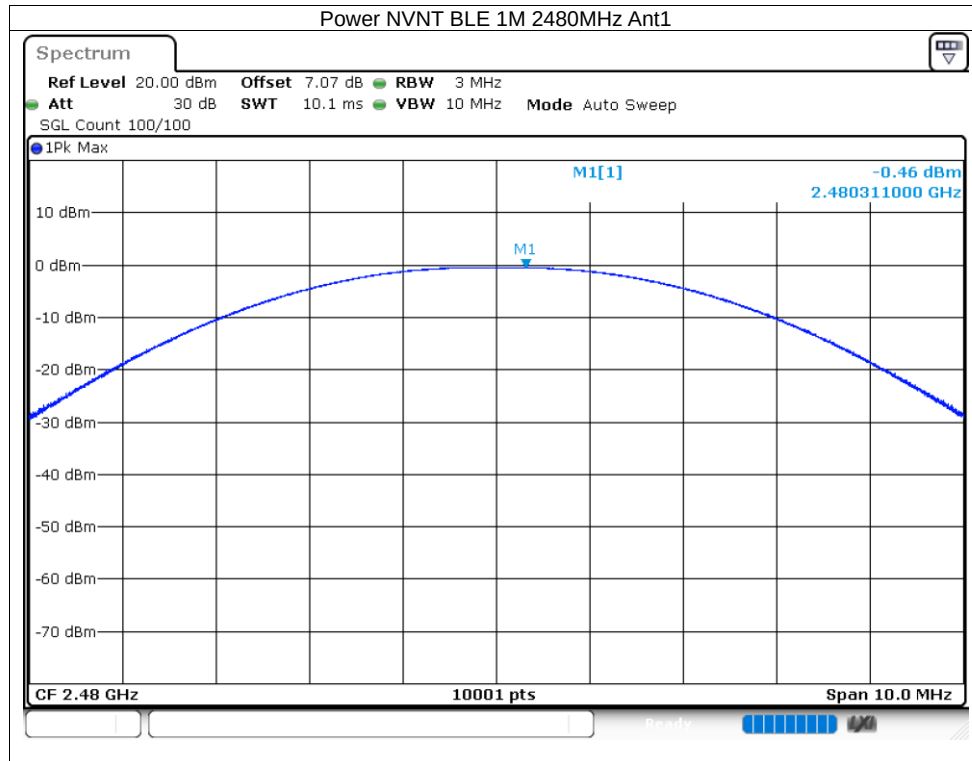

8.1.3 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.672	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.655	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.694	0.5	Pass

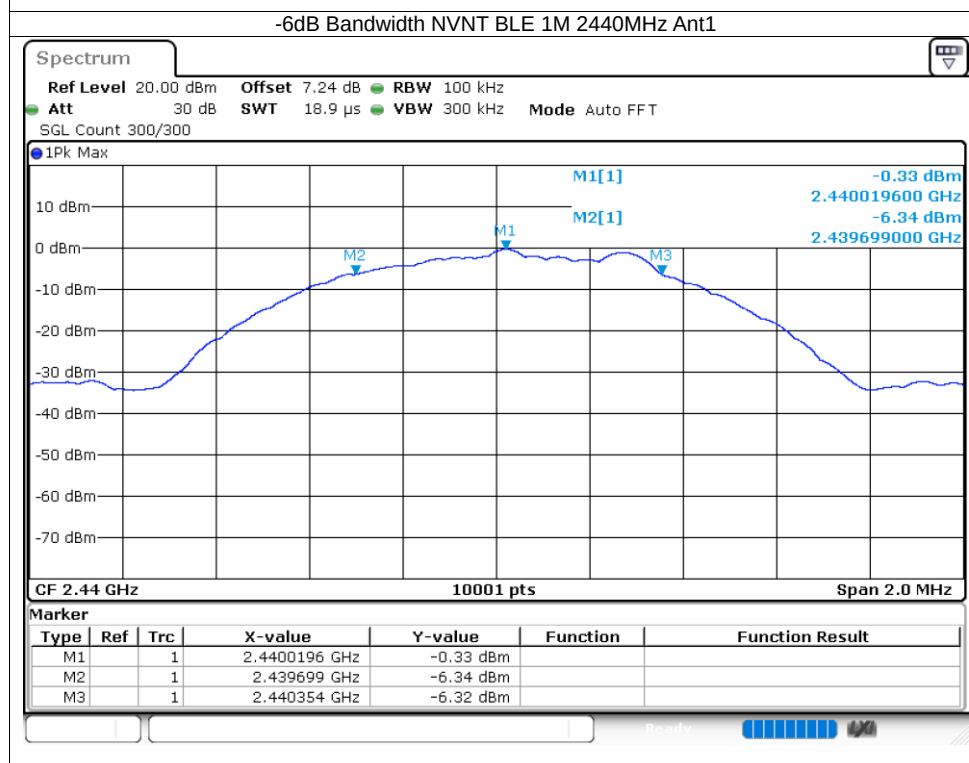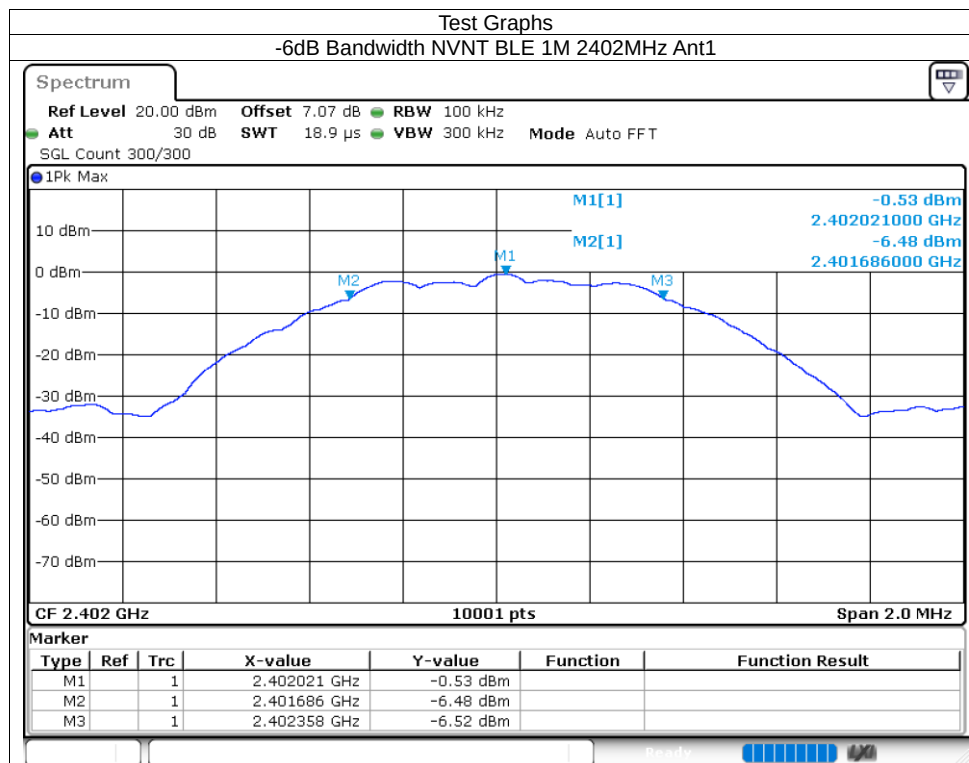


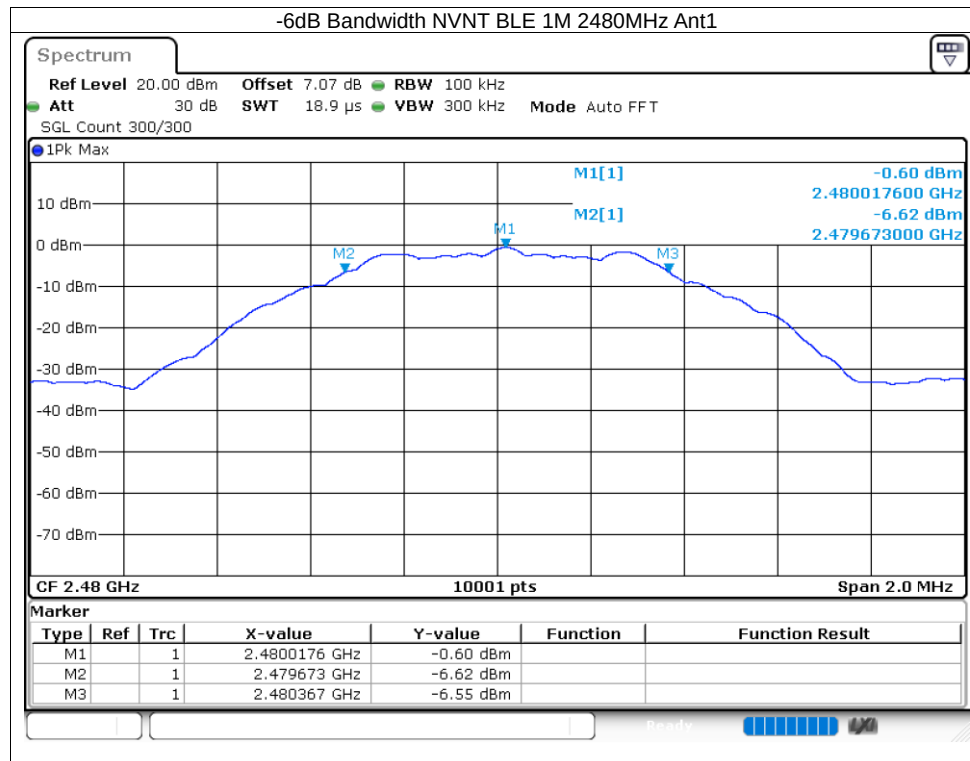

8.1.4 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.013
NVNT	BLE 1M	2440	Ant1	1.025
NVNT	BLE 1M	2480	Ant1	1.019

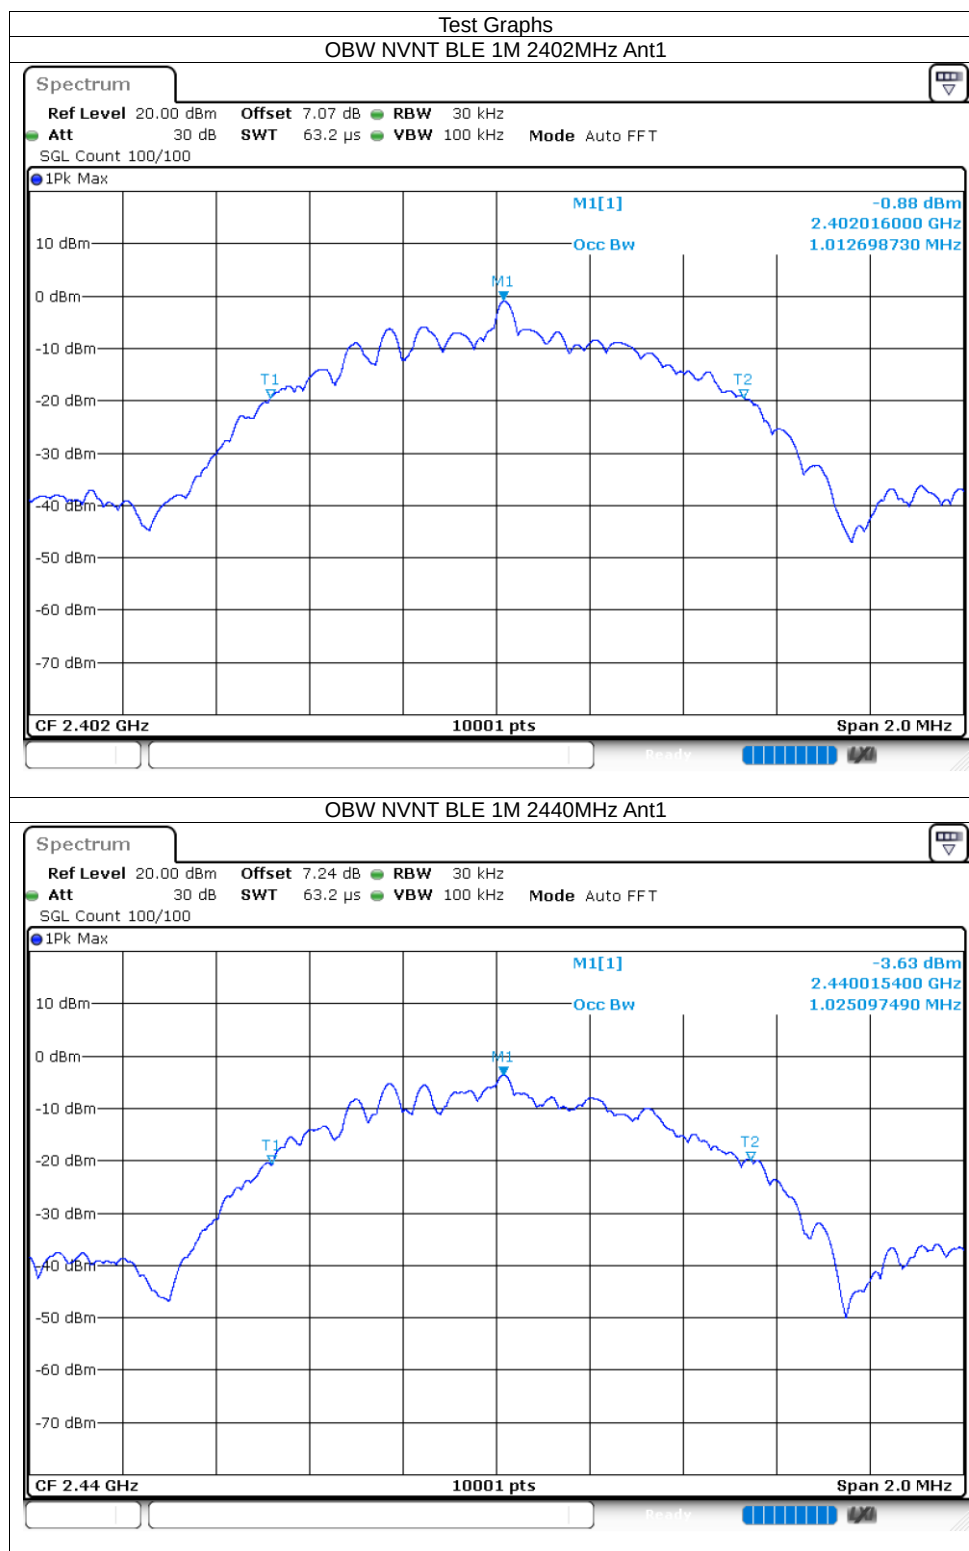


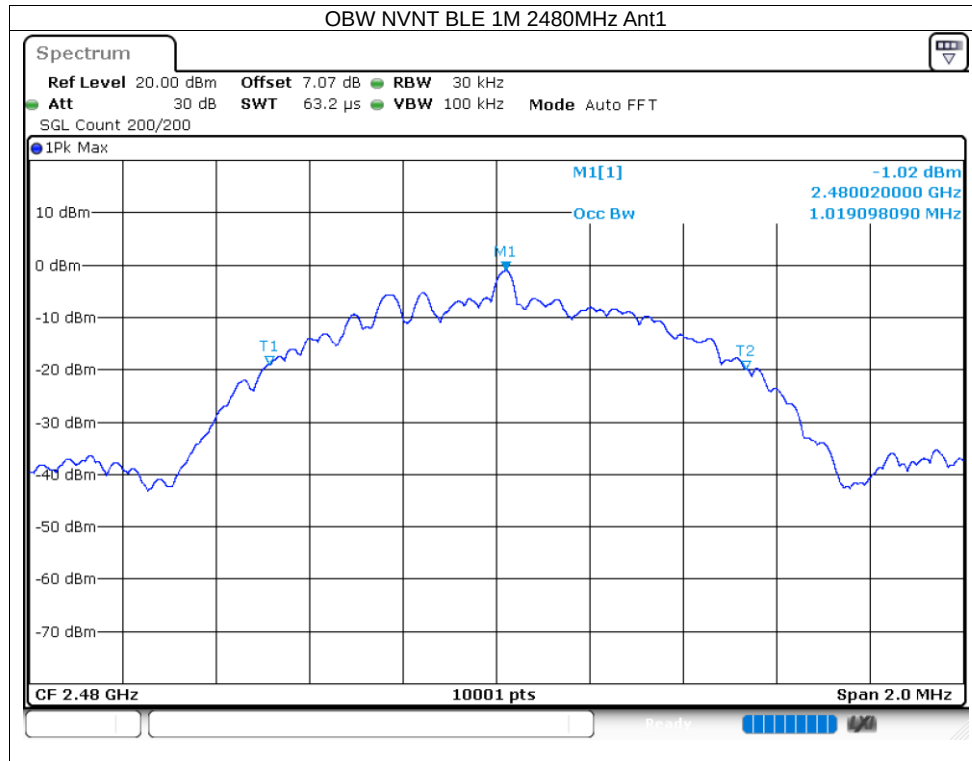

8.1.5 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-14.54	8	Pass
NVNT	BLE 1M	2440	Ant1	-14.42	8	Pass
NVNT	BLE 1M	2480	Ant1	-13.5	8	Pass

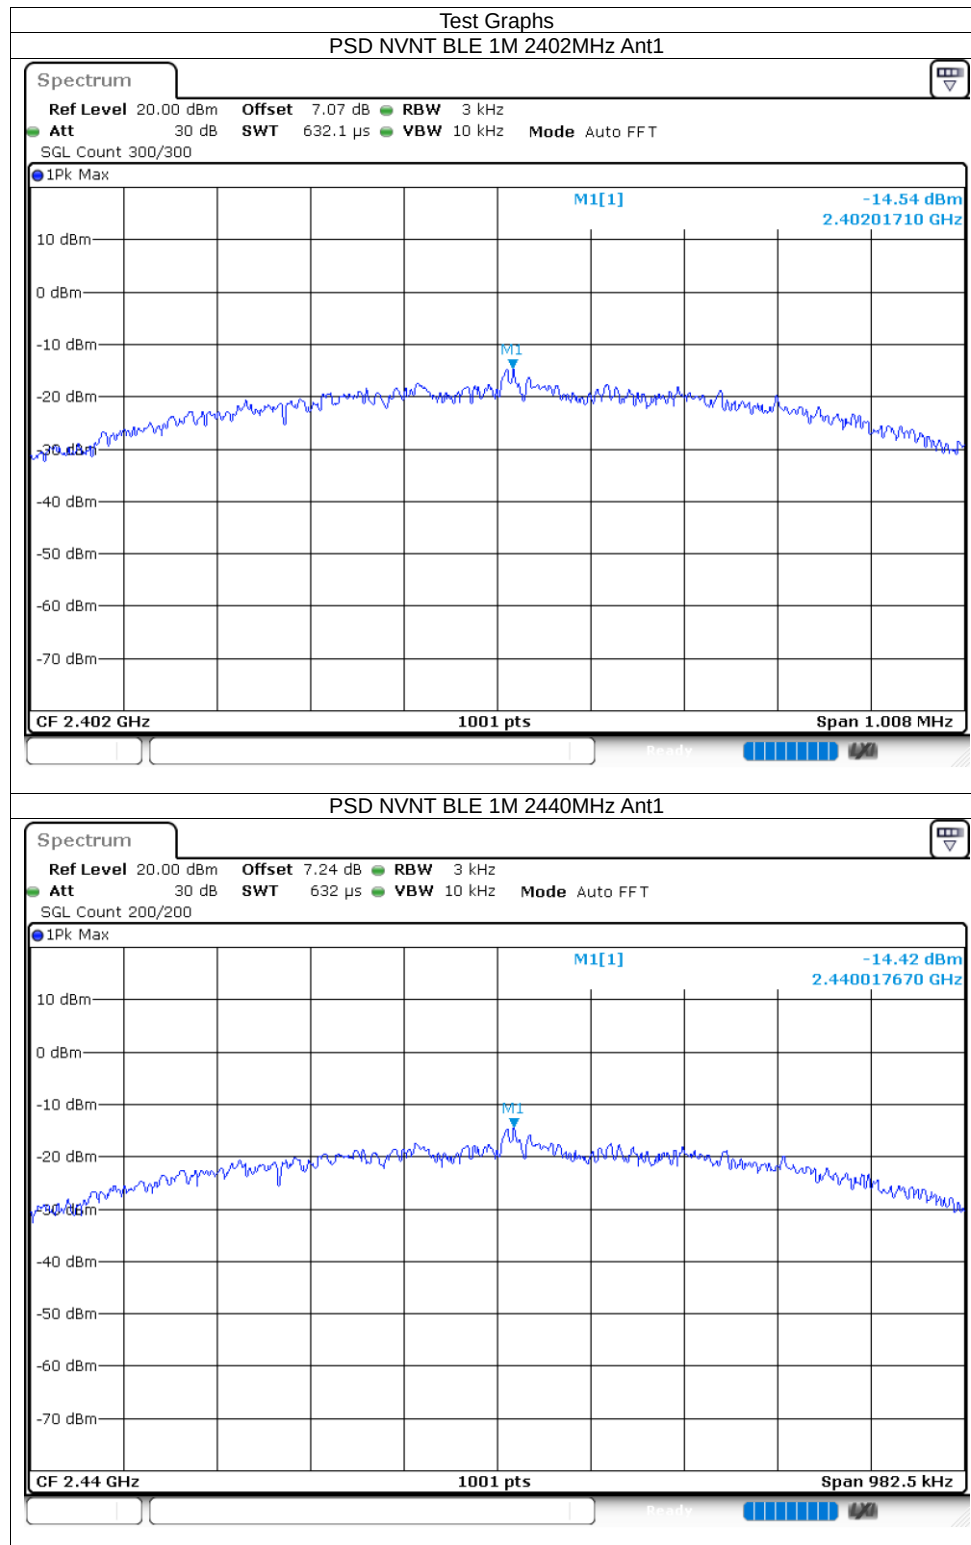


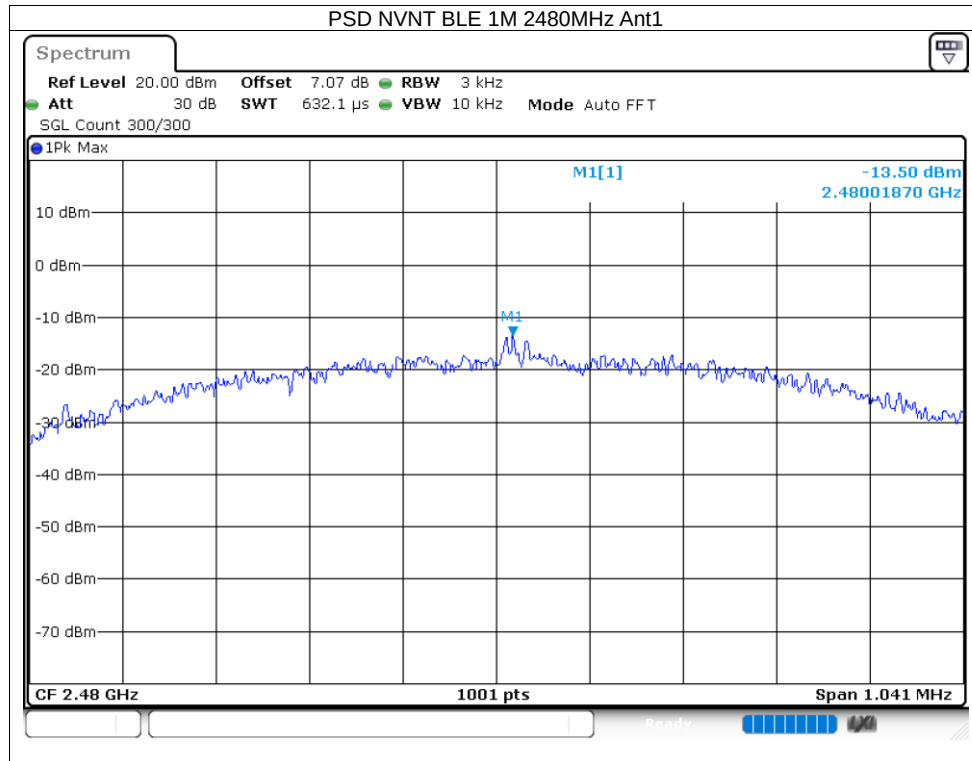

8.1.6 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-40.49	-20	Pass
NVNT	BLE 1M	2480	Ant1	-41.76	-20	Pass

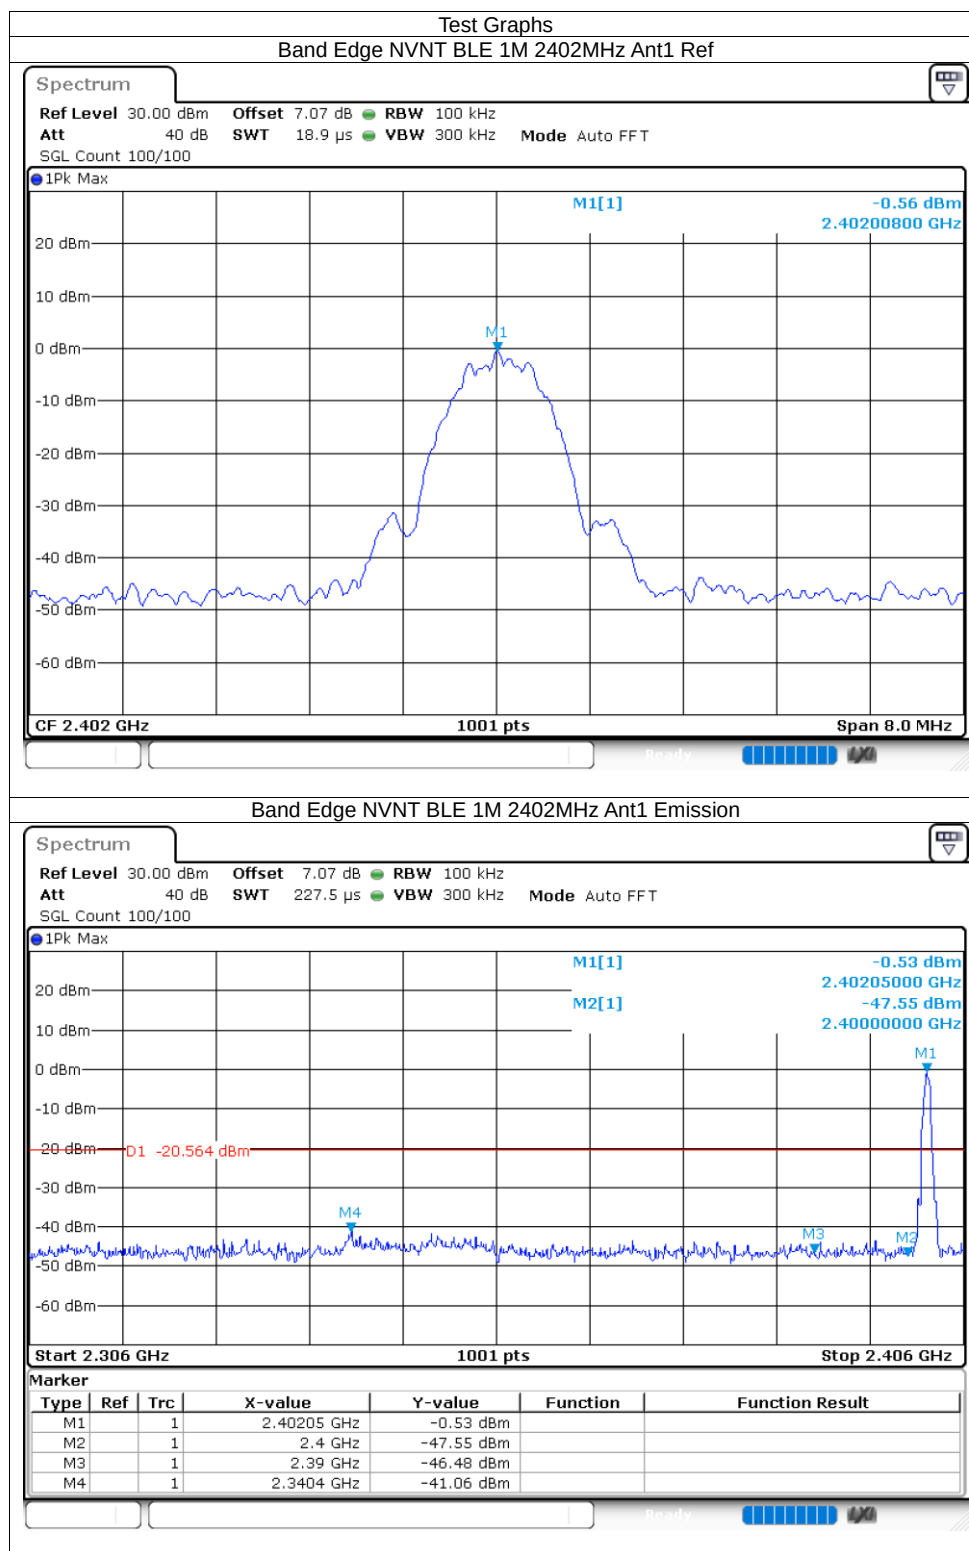


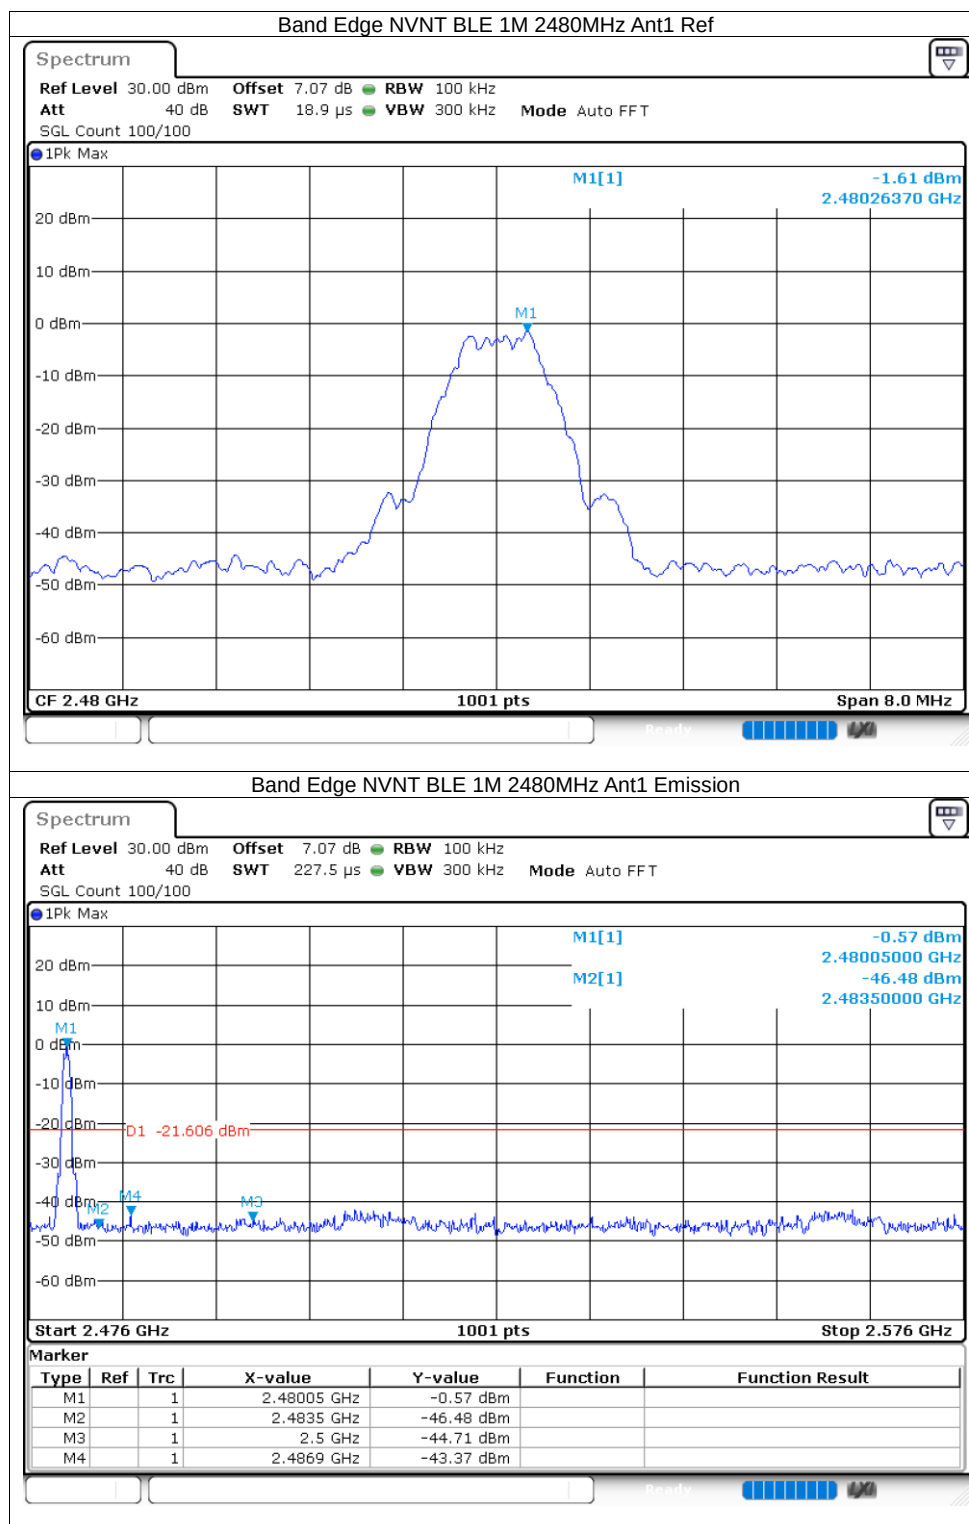


8.1.7 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-42.21	-20	Pass
NVNT	BLE 1M	2440	Ant1	-46.2	-20	Pass
NVNT	BLE 1M	2480	Ant1	-45.28	-20	Pass

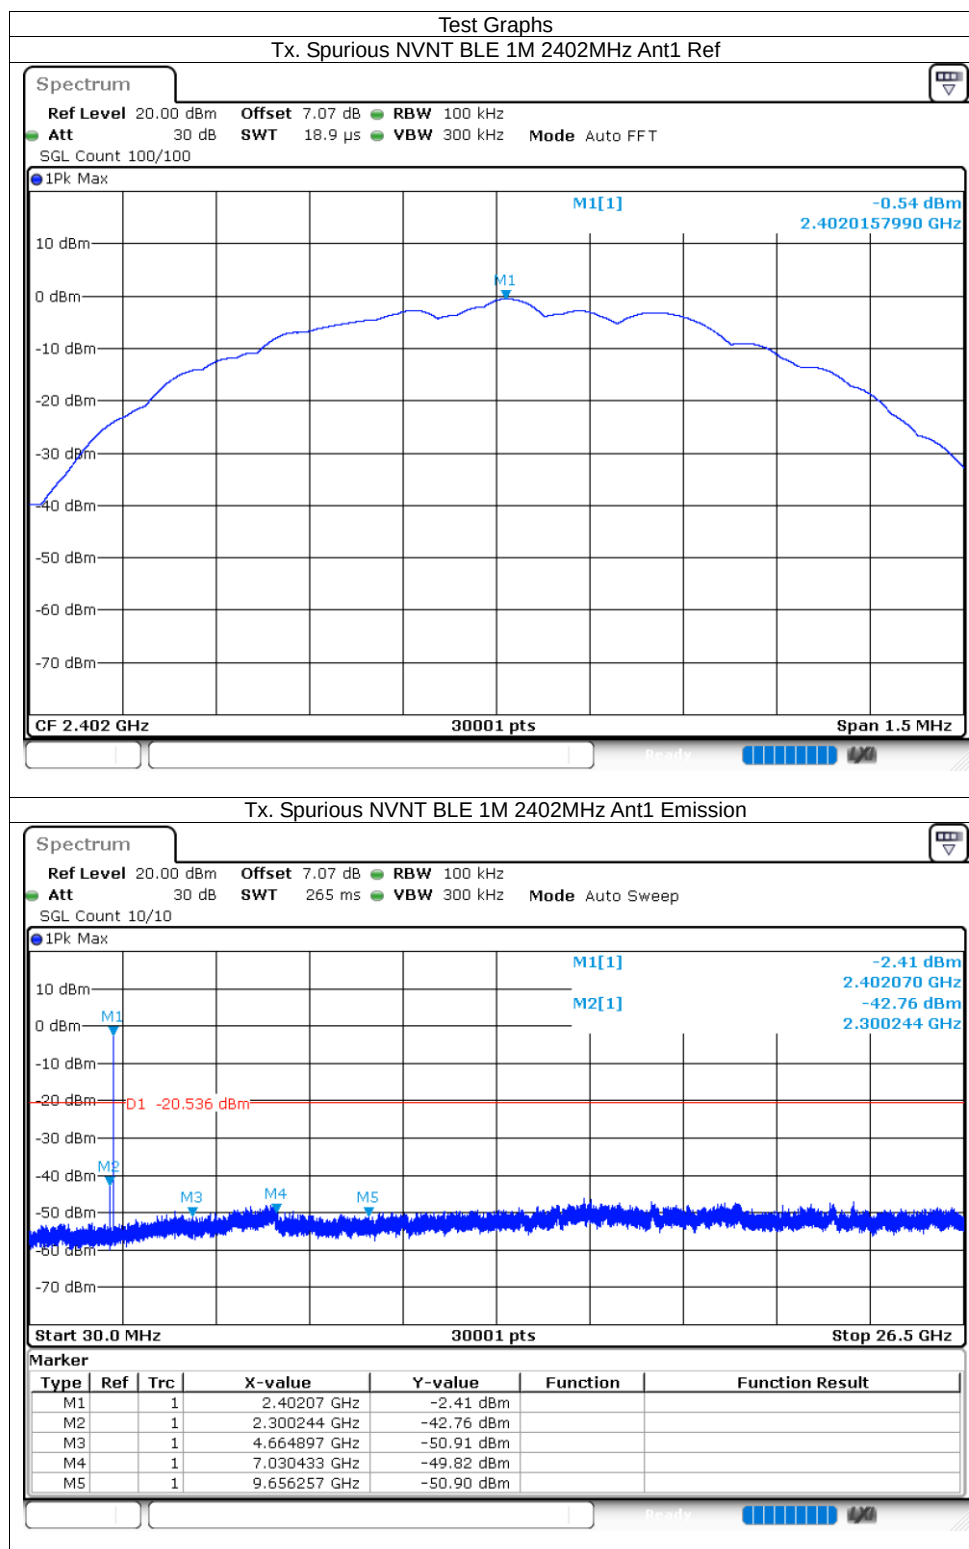

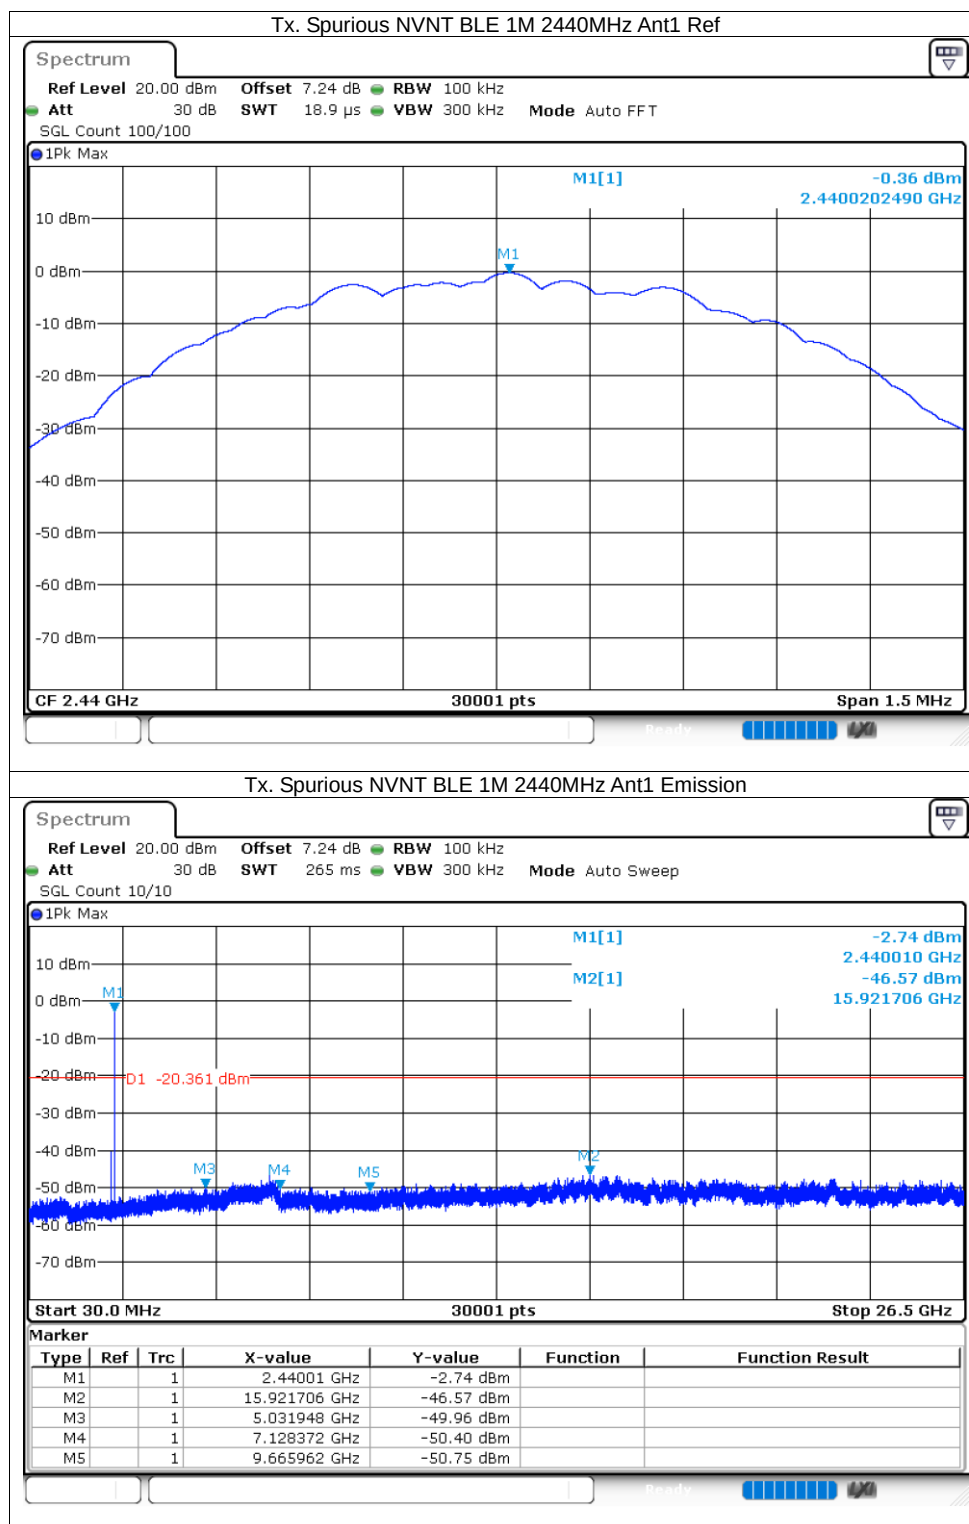


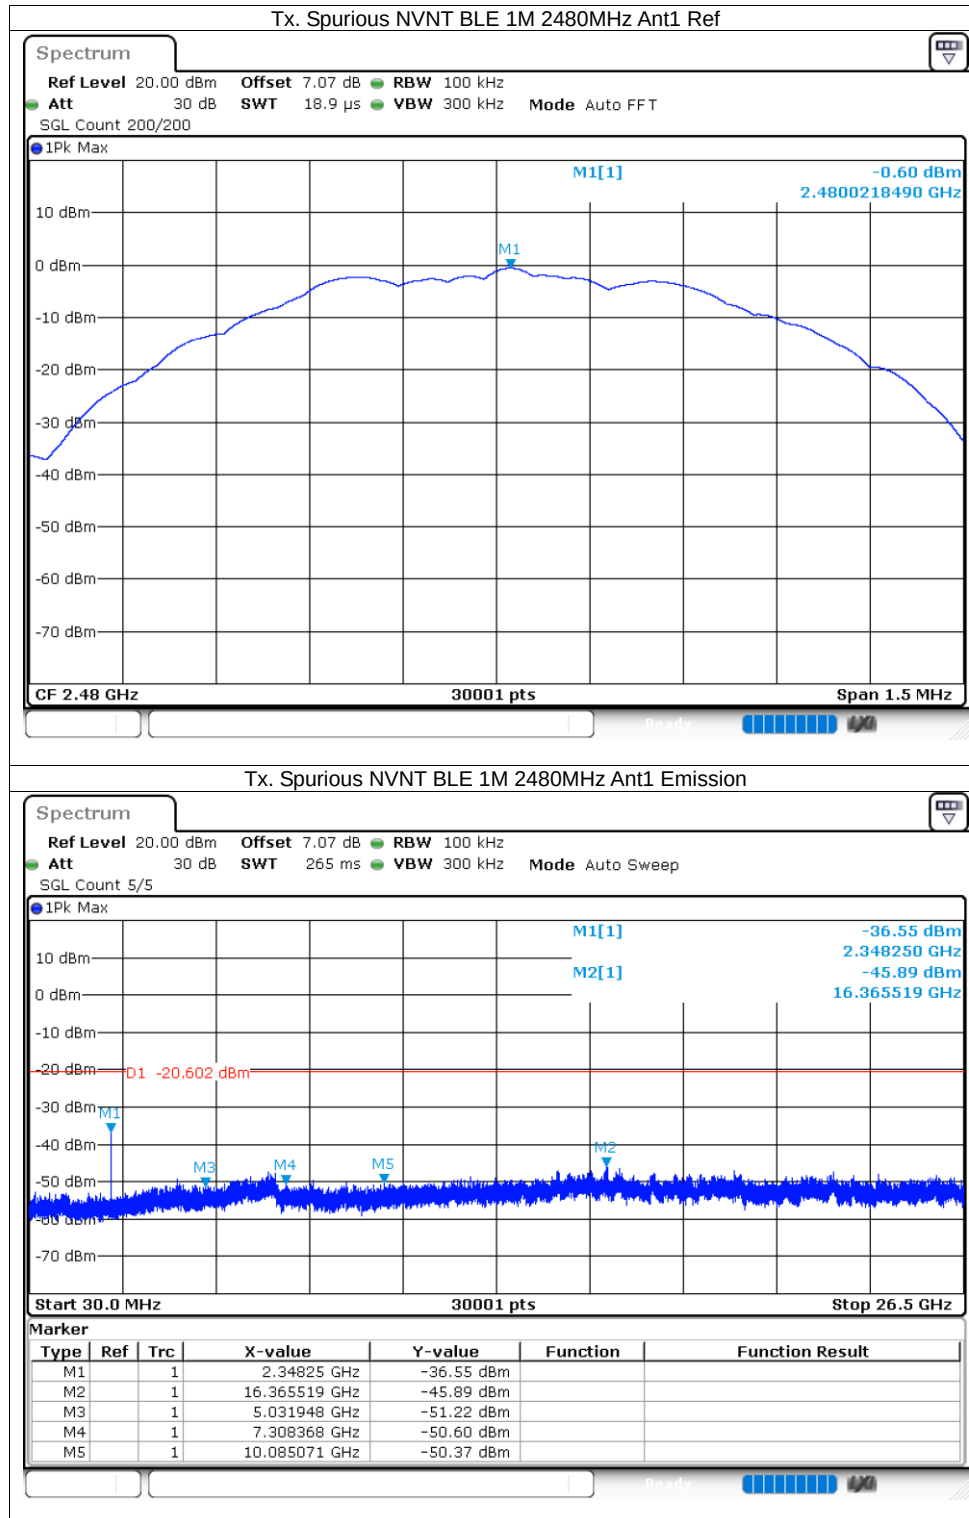


Module 2(1M):

8.1.8 Duty Cycle



Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 2M	2402	Ant1	67.2	1.73	1.2
NVNT	BLE 2M	2440	Ant1	67.19	1.73	1.2
NVNT	BLE 2M	2480	Ant1	66.4	1.78	1.22

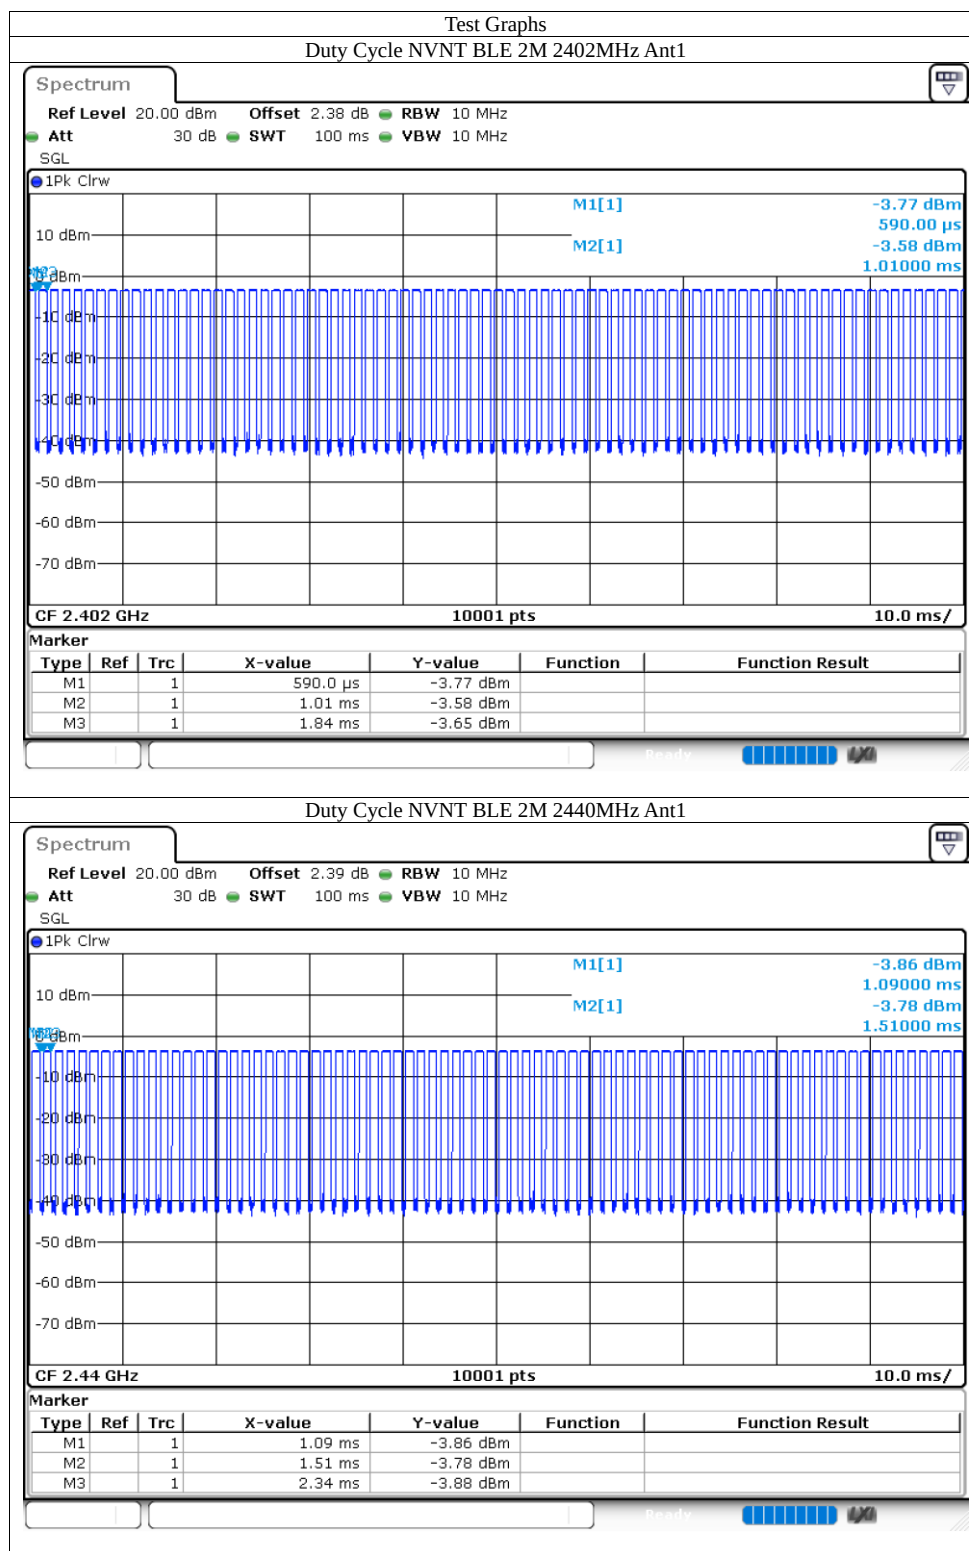


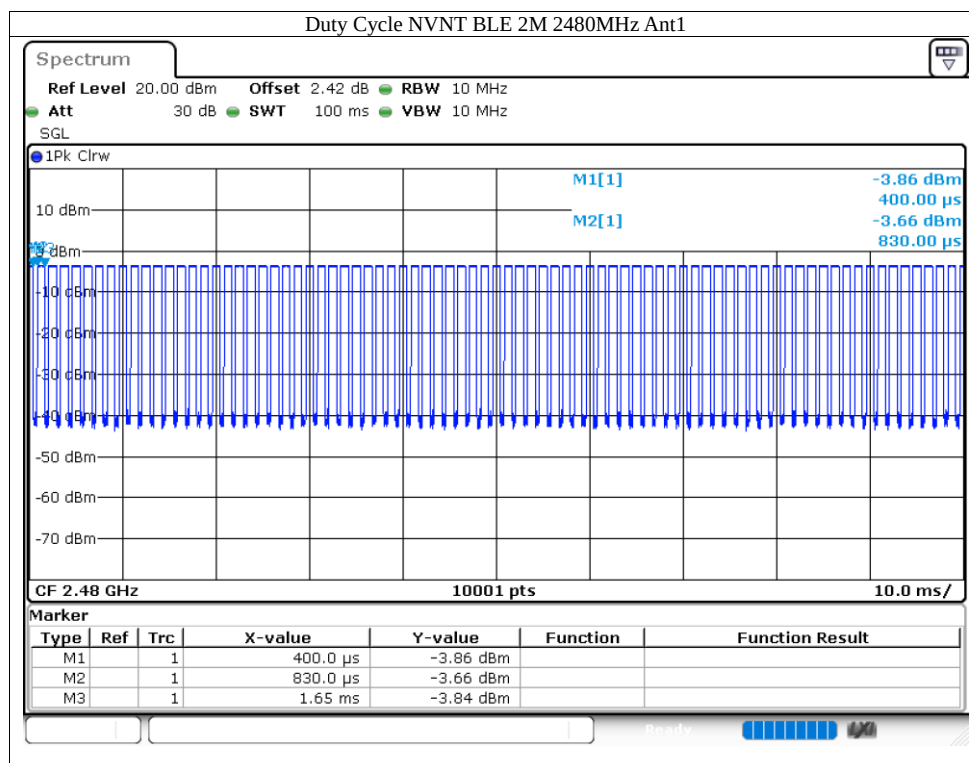

8.1.9 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	5.49	30	Pass
NVNT	BLE 1M	2440	Ant1	5.81	30	Pass
NVNT	BLE 1M	2480	Ant1	6.07	30	Pass

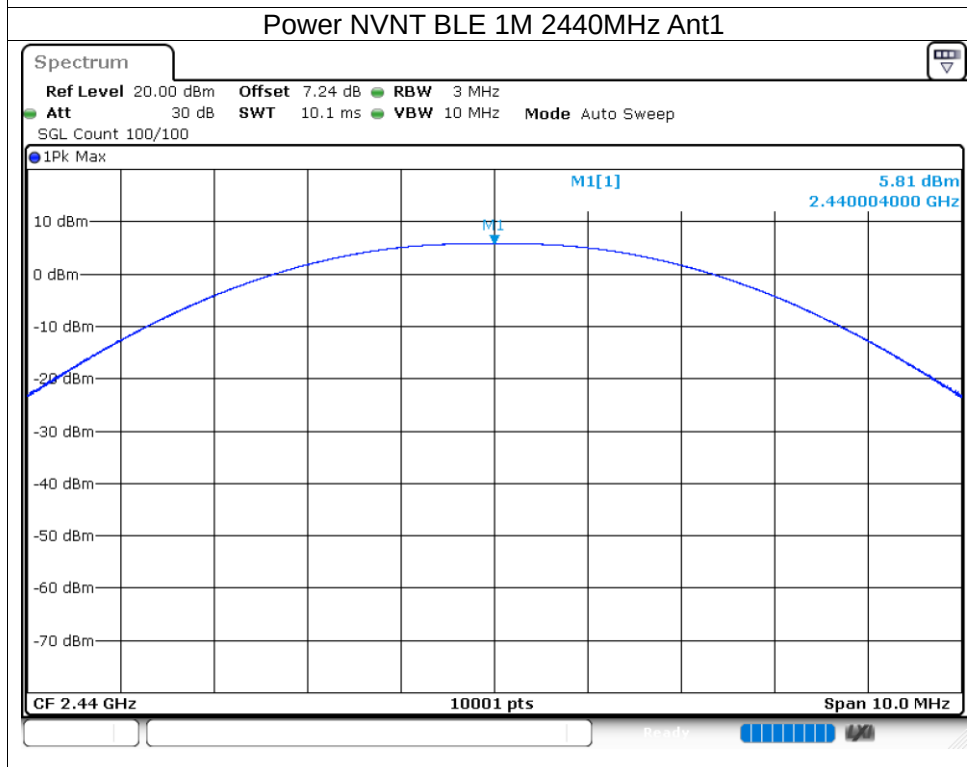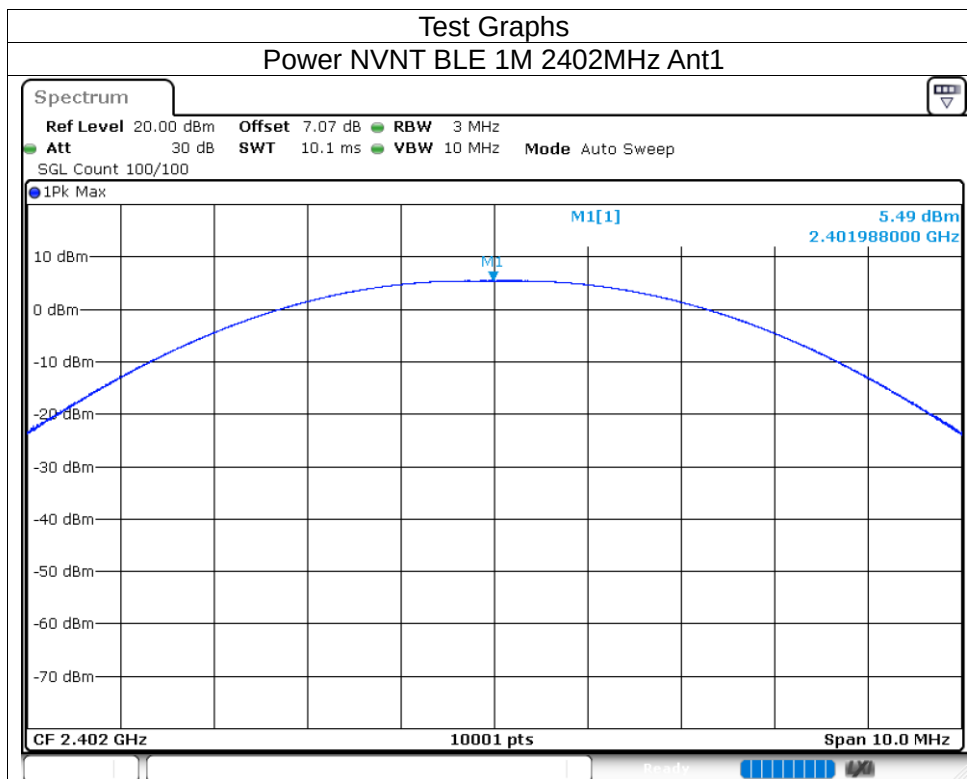

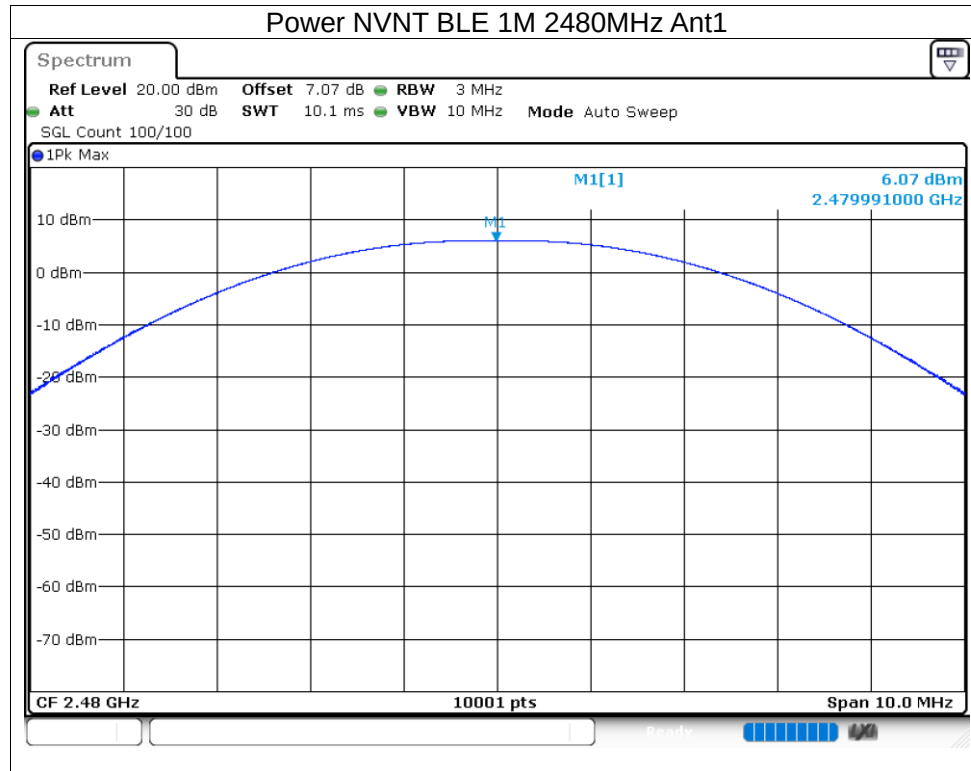

8.1.10 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.727	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.719	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.72	0.5	Pass


Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

Spectrum

Ref Level 20.00 dBm Offset 7.07 dB RBW 100 kHz
Att 30 dB SWT 18.9 μ s VBW 300 kHz Mode Auto FFT
SGL Count 300/300

1Pk Max

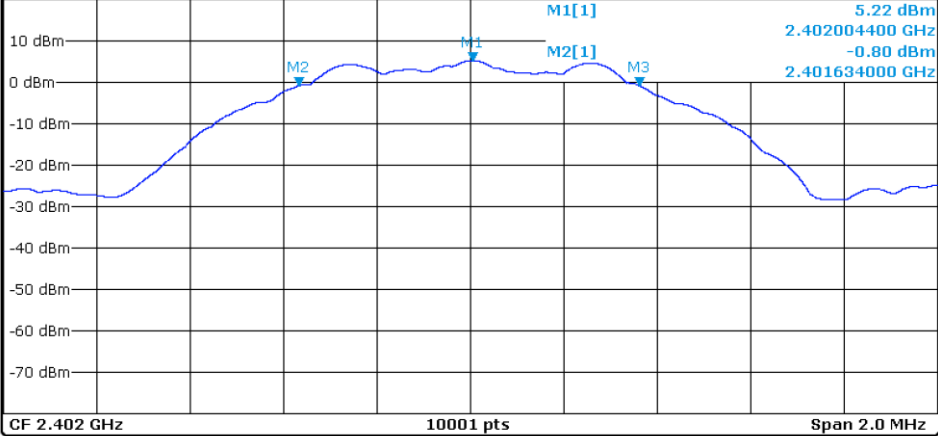

Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		2.4020044 GHz	5.22 dBm		
M2	1		2.401634 GHz	-0.80 dBm		
M3	1		2.402361 GHz	-0.78 dBm		

-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

Spectrum


Ref Level 20.00 dBm Offset 7.24 dB RBW 100 kHz
Att 30 dB SWT 18.9 μ s VBW 300 kHz Mode Auto FFT
SGL Count 300/300

1Pk Max

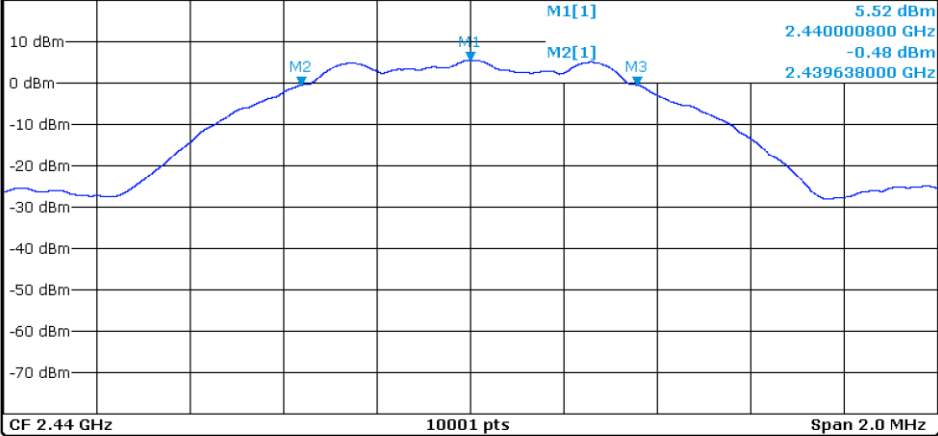


Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		2.4400008 GHz	5.52 dBm		
M2	1		2.439638 GHz	-0.48 dBm		
M3	1		2.440357 GHz	-0.48 dBm		

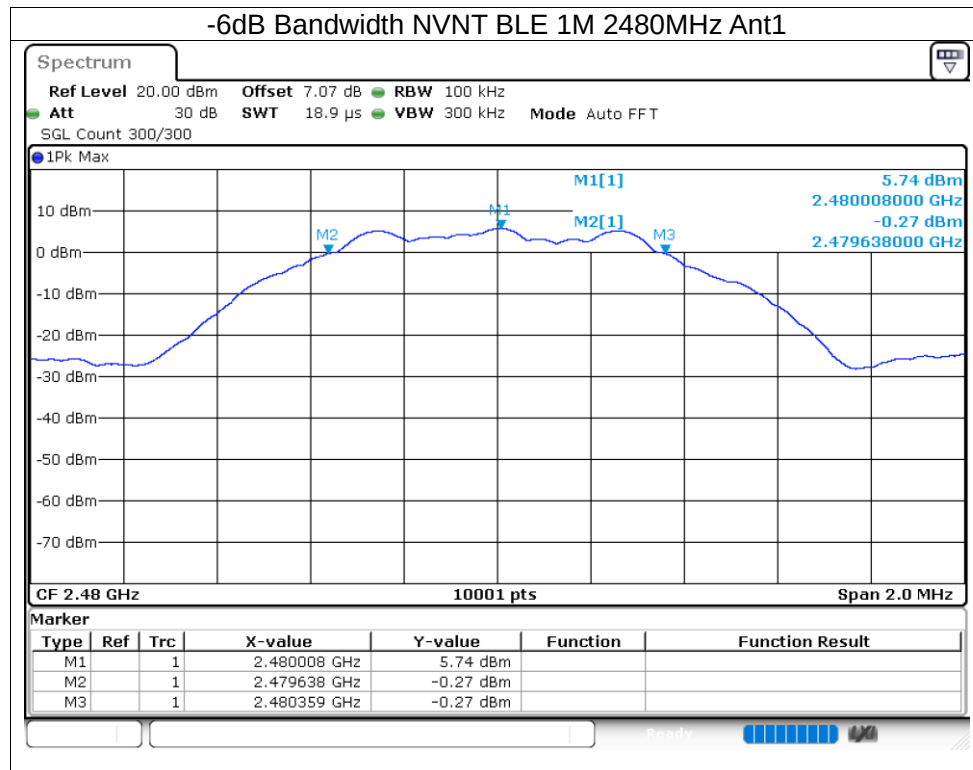

8.1.11 Occupied Channel Bandwidth



Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.033
NVNT	BLE 1M	2440	Ant1	1.032
NVNT	BLE 1M	2480	Ant1	1.03

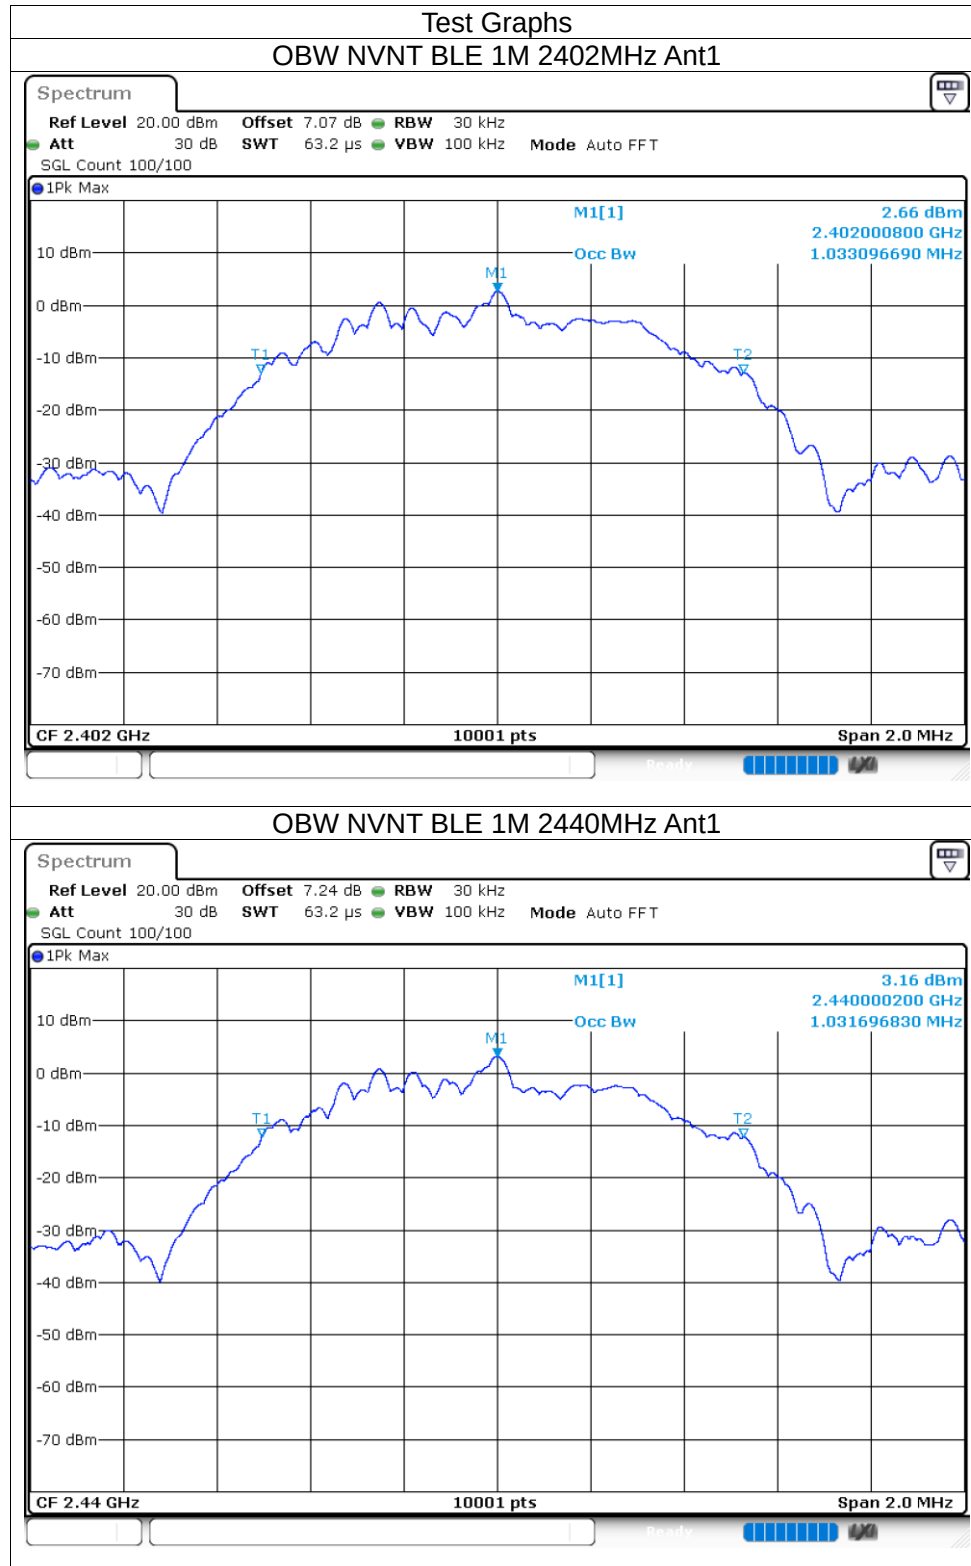


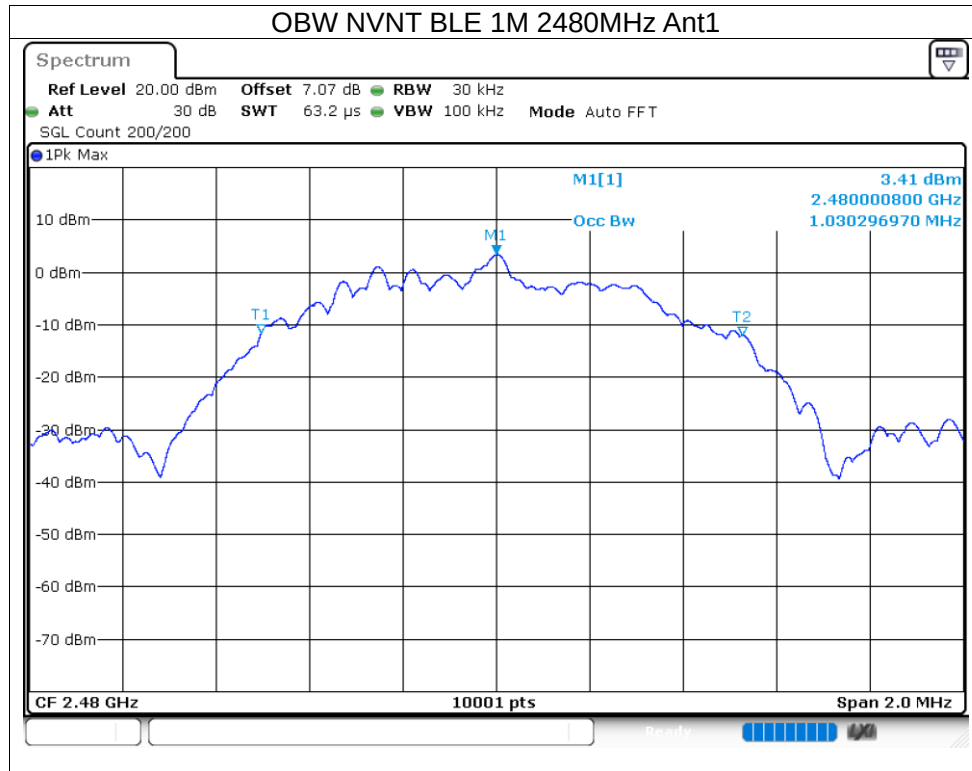

8.1.12 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-9.81	8	Pass
NVNT	BLE 1M	2440	Ant1	-9.49	8	Pass
NVNT	BLE 1M	2480	Ant1	-9.25	8	Pass

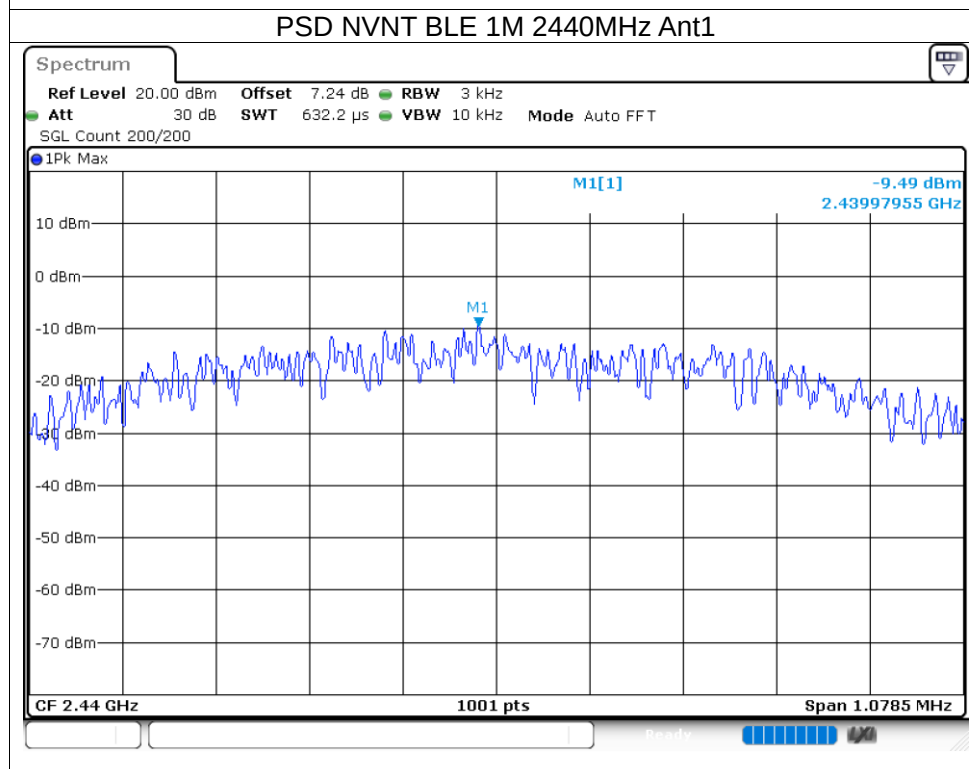
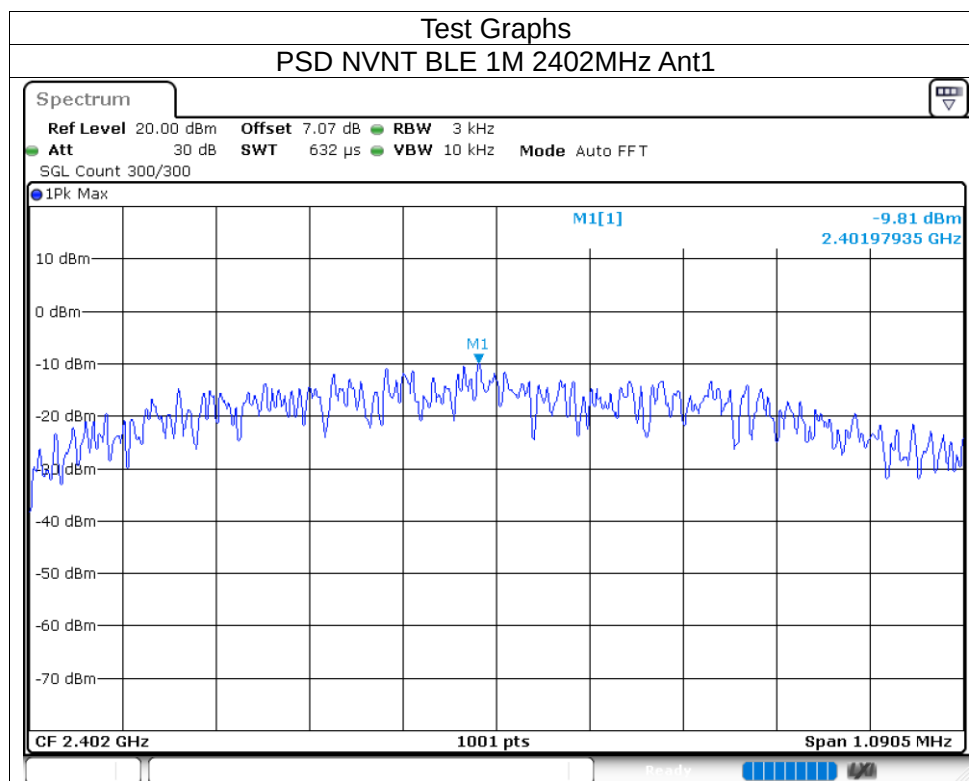


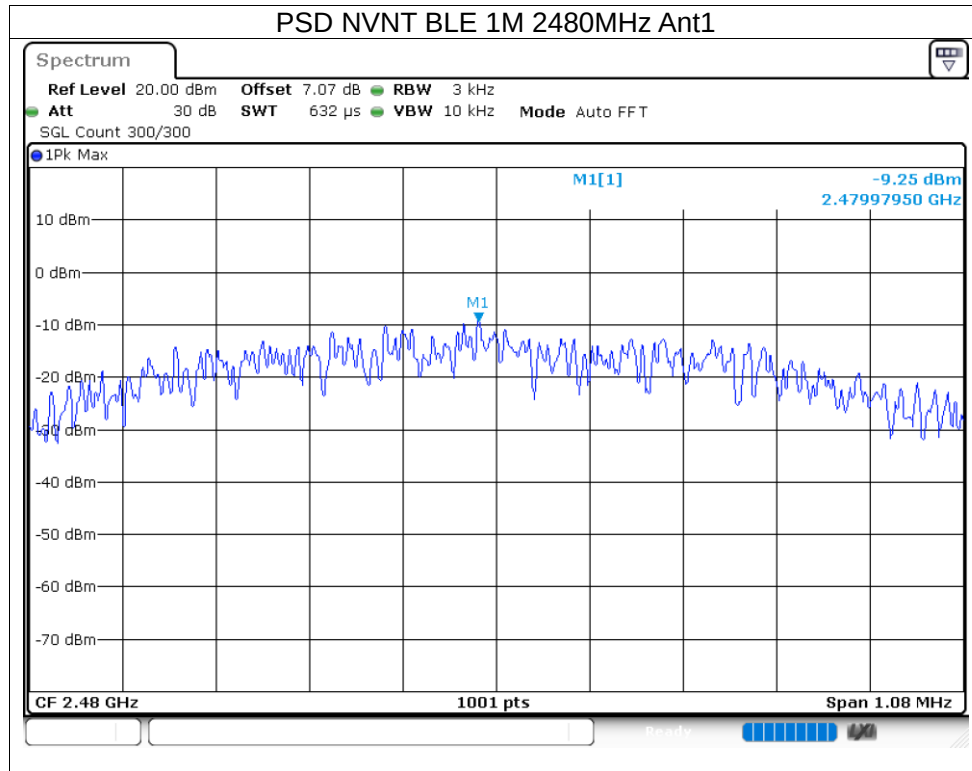

8.1.13 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-45.45	-20	Pass
NVNT	BLE 1M	2480	Ant1	-49.06	-20	Pass

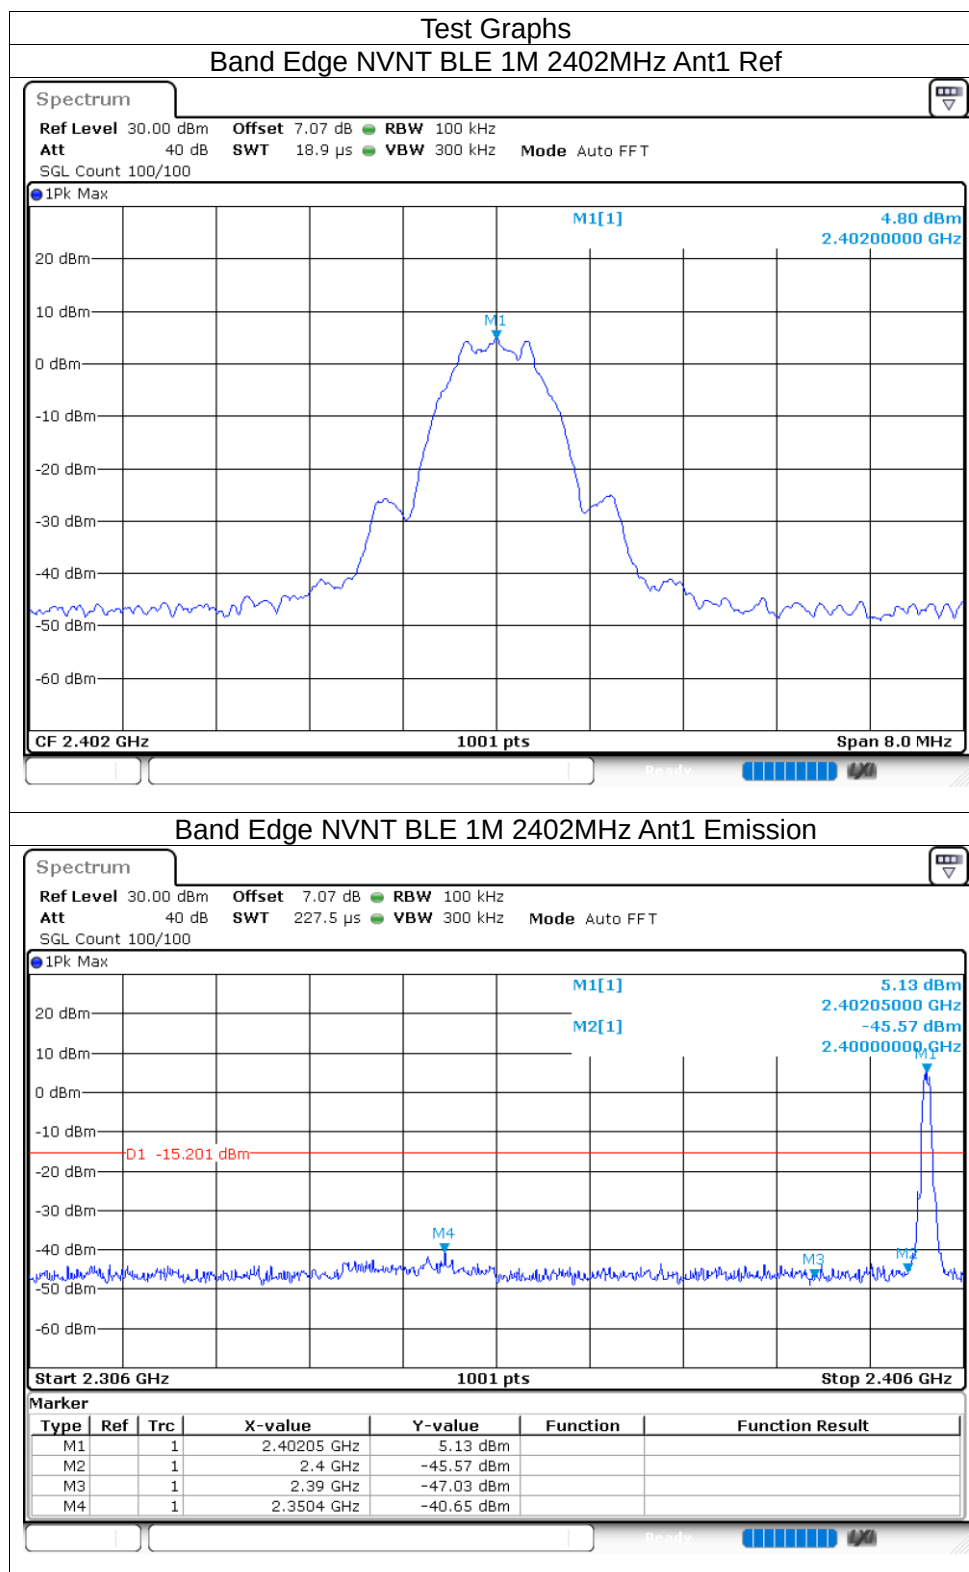

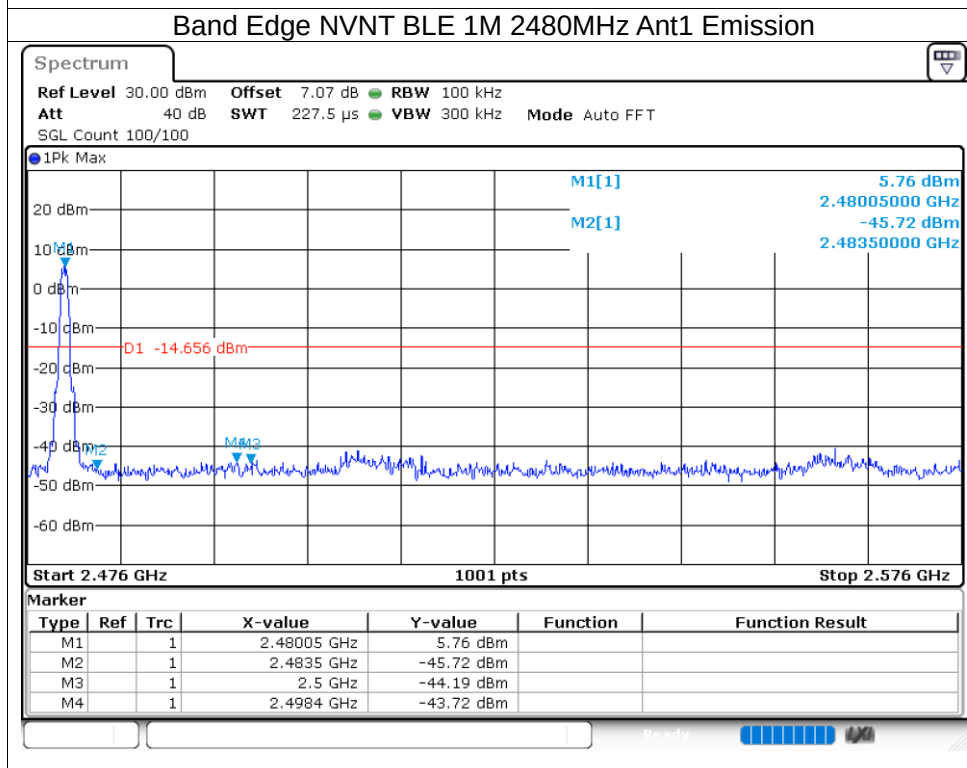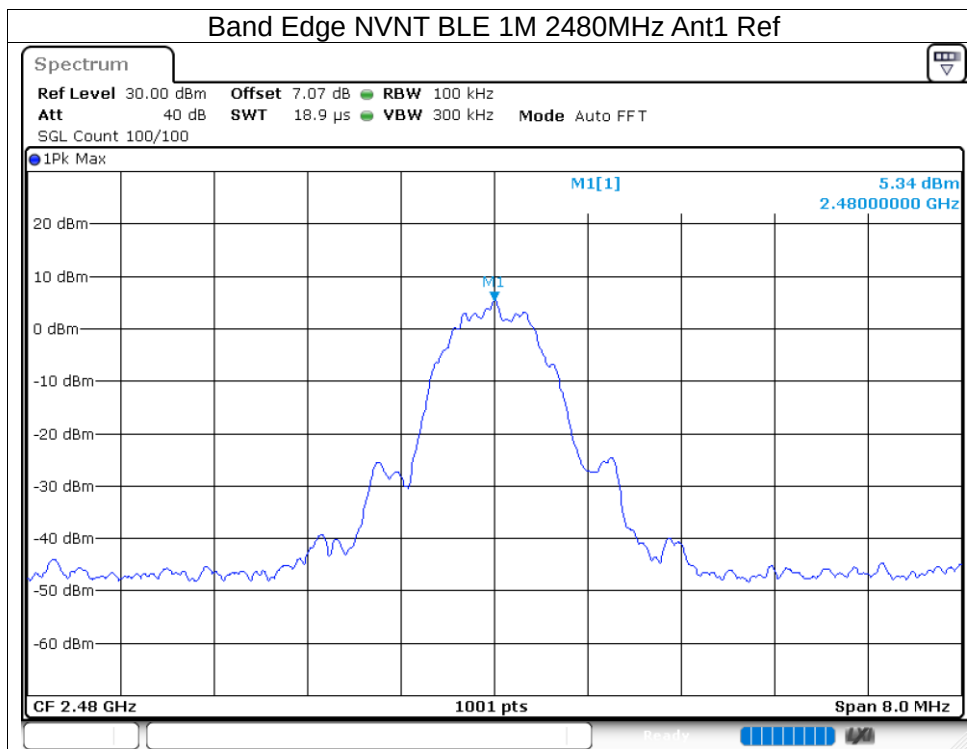


8.1.14 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-51.15	-20	Pass
NVNT	BLE 1M	2440	Ant1	-51.52	-20	Pass
NVNT	BLE 1M	2480	Ant1	-52.89	-20	Pass

Test Graphs


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

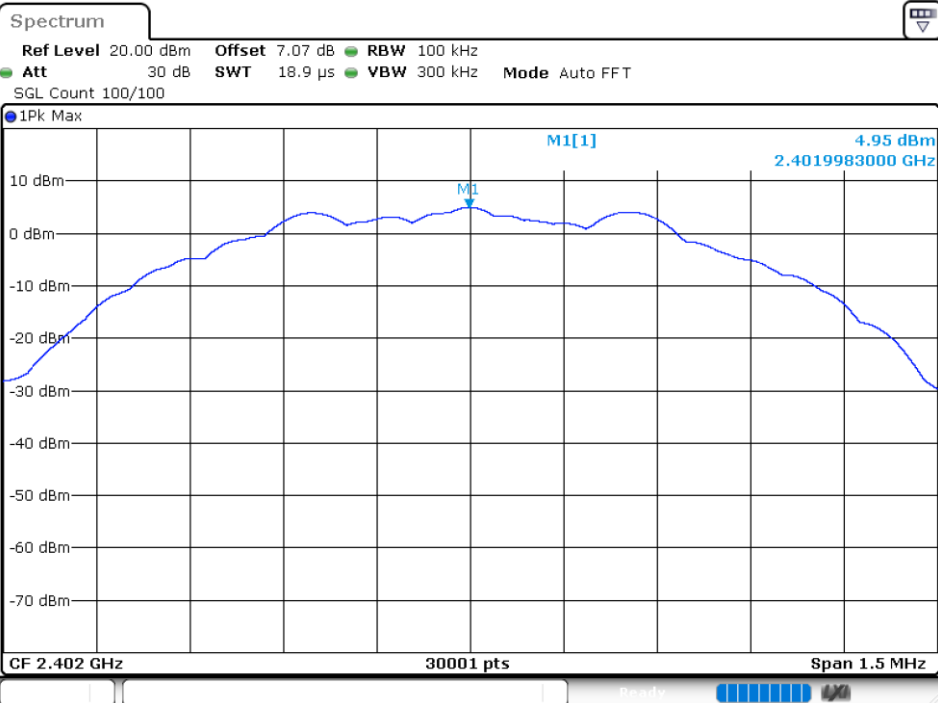


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

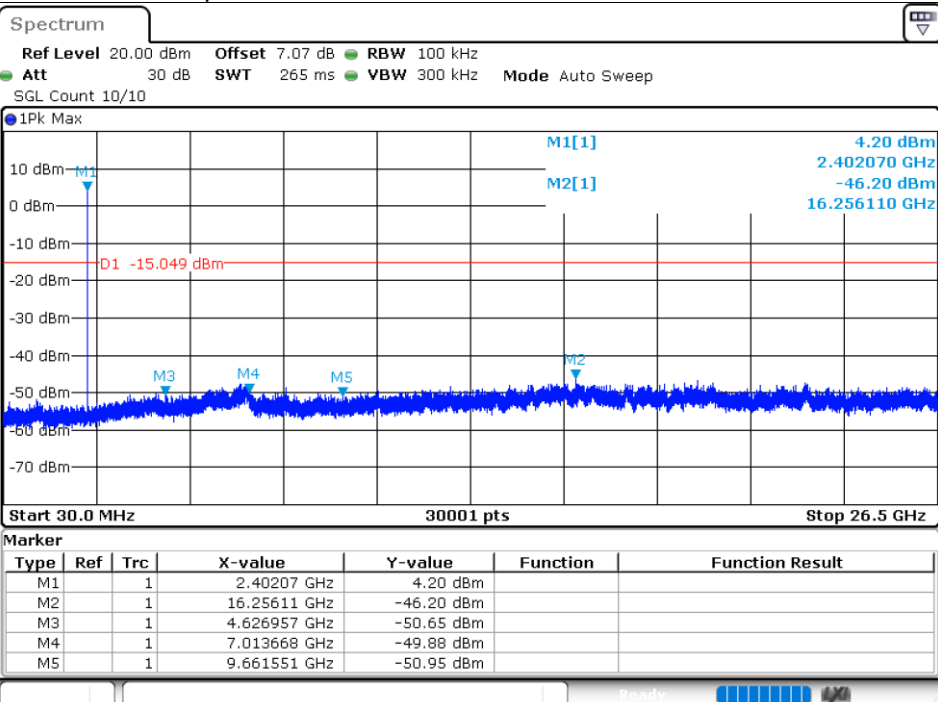


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

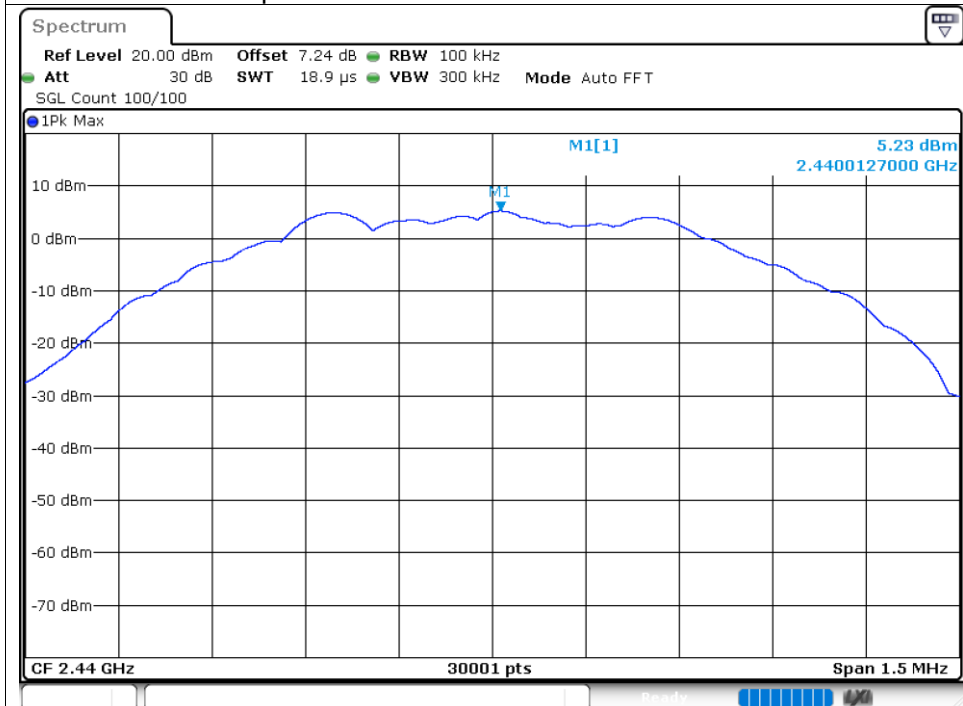


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

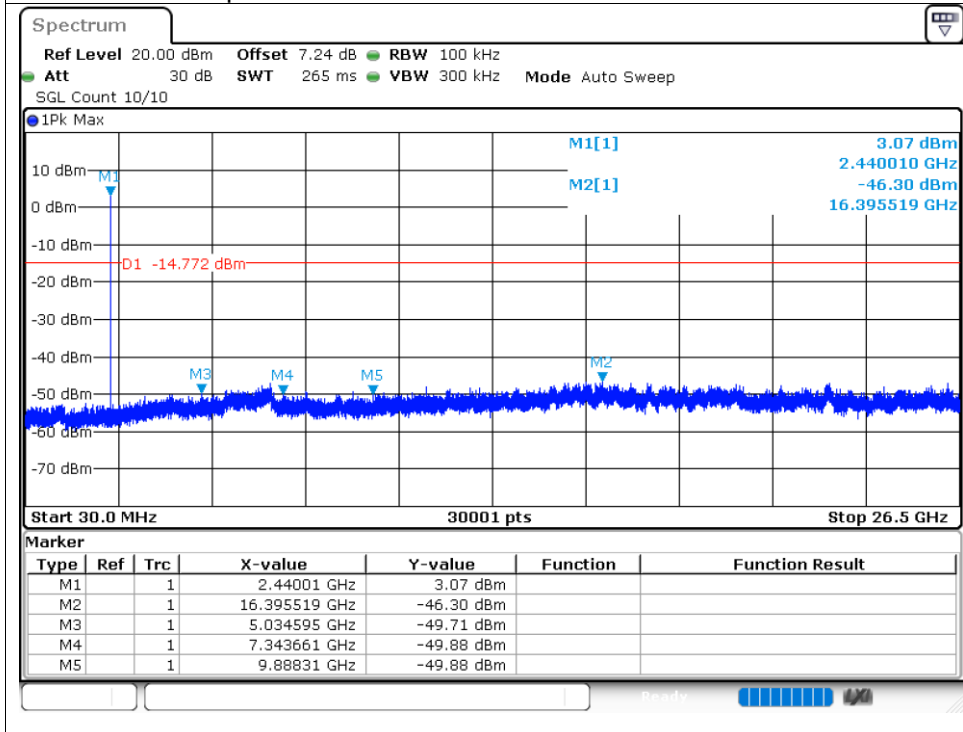

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

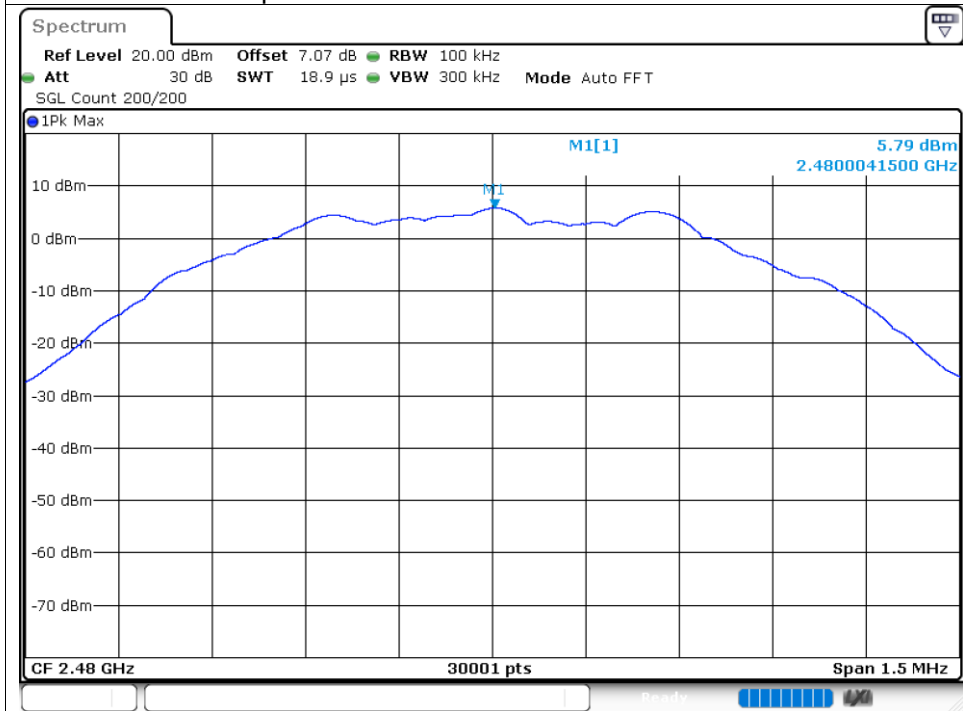


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

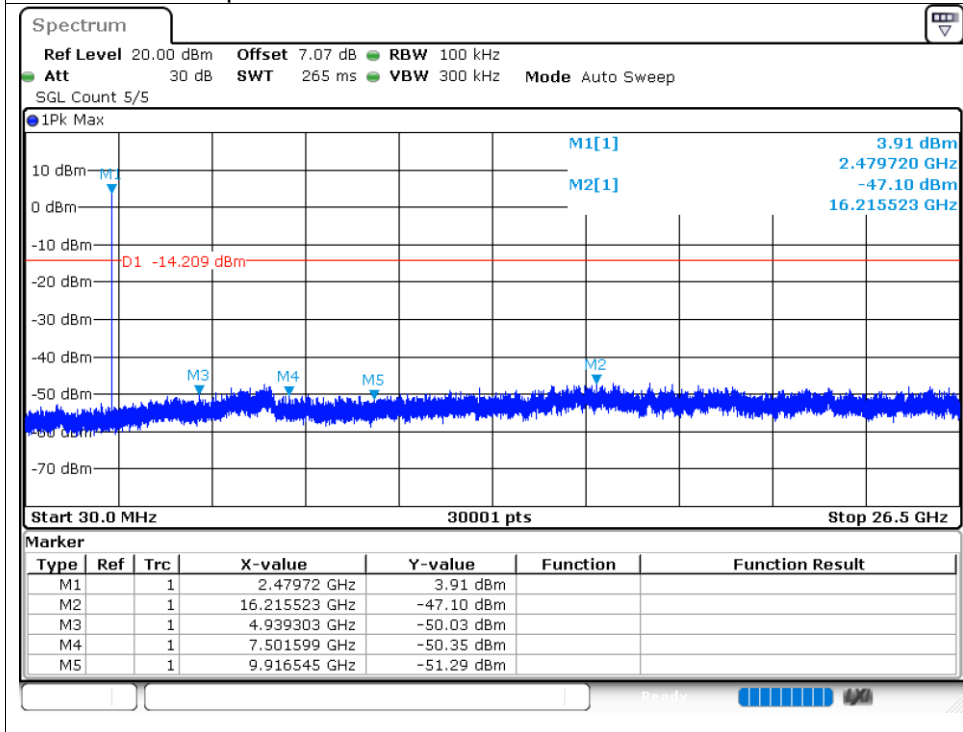


Module 2(2M):

8.1.15 Duty Cycle



Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	87.72	0.57	0.61
NVNT	BLE 1M	2440	Ant1	88.07	0.55	0.61
NVNT	BLE 1M	2480	Ant1	88.08	0.55	0.61

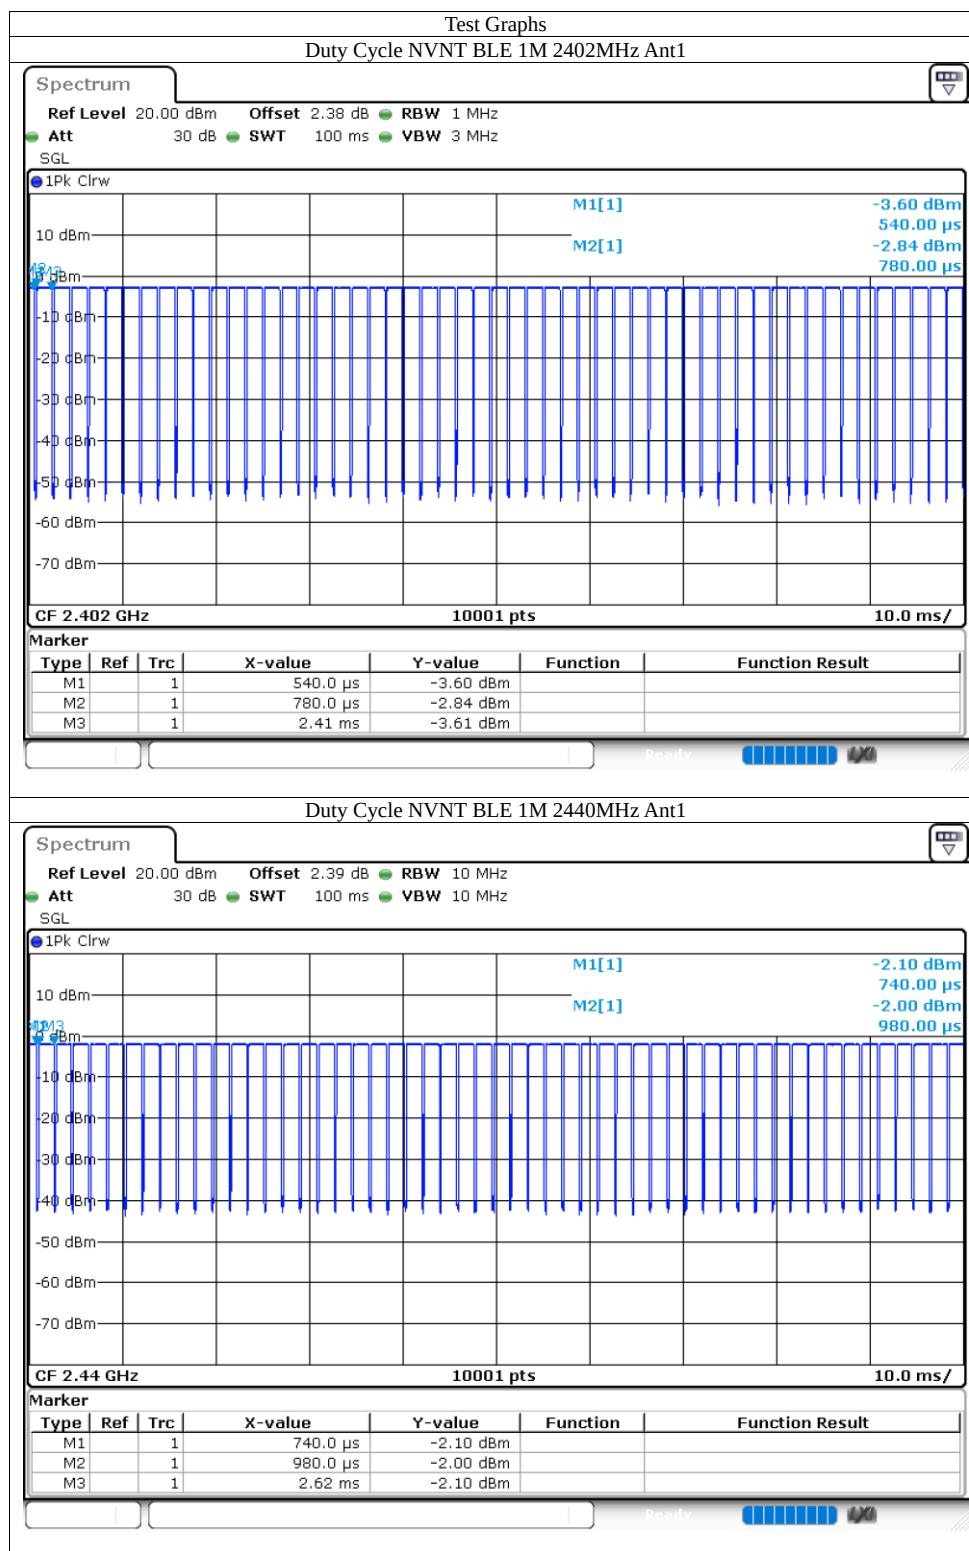


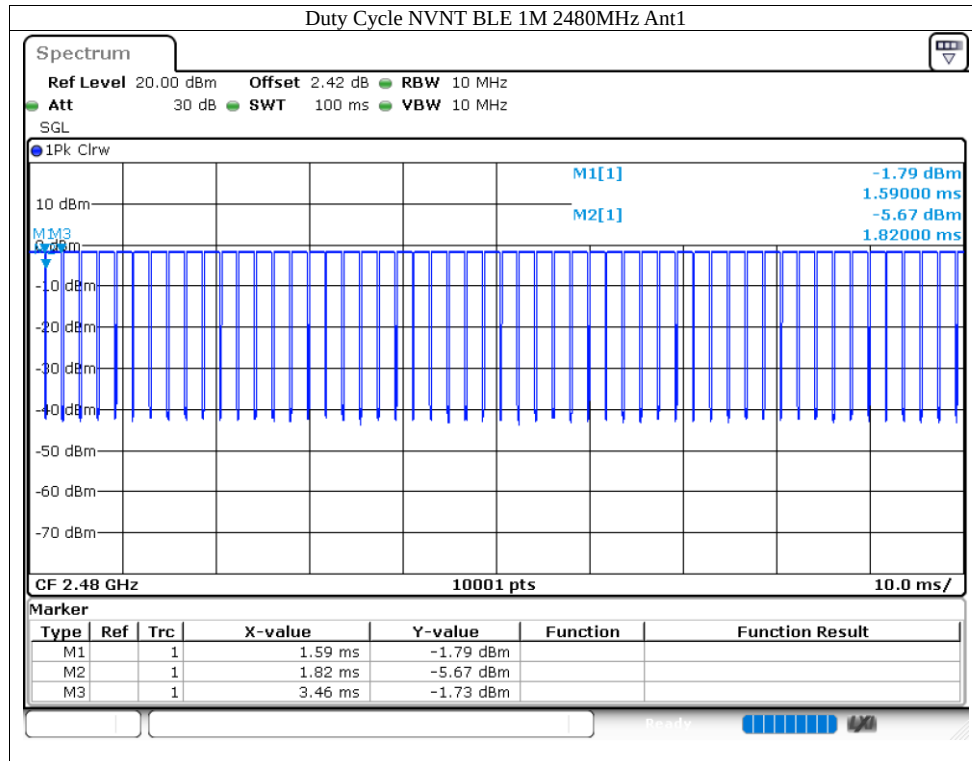

8.1.16 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 2M	2402	Ant1	5.5	30	Pass
NVNT	BLE 2M	2440	Ant1	5.83	30	Pass
NVNT	BLE 2M	2480	Ant1	6.1	30	Pass

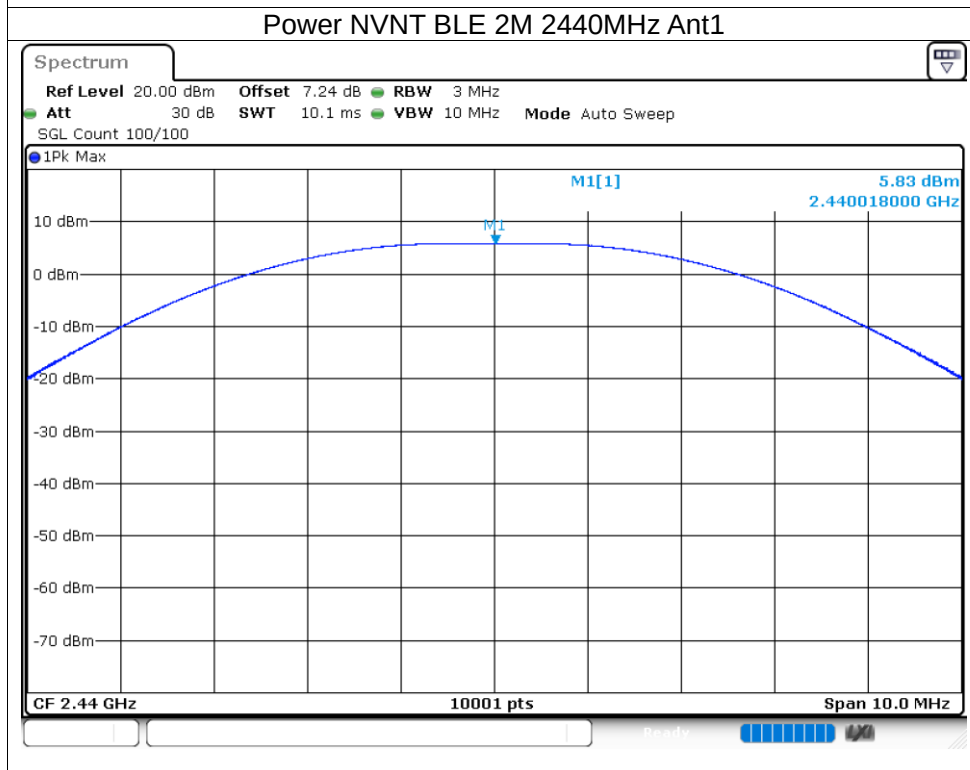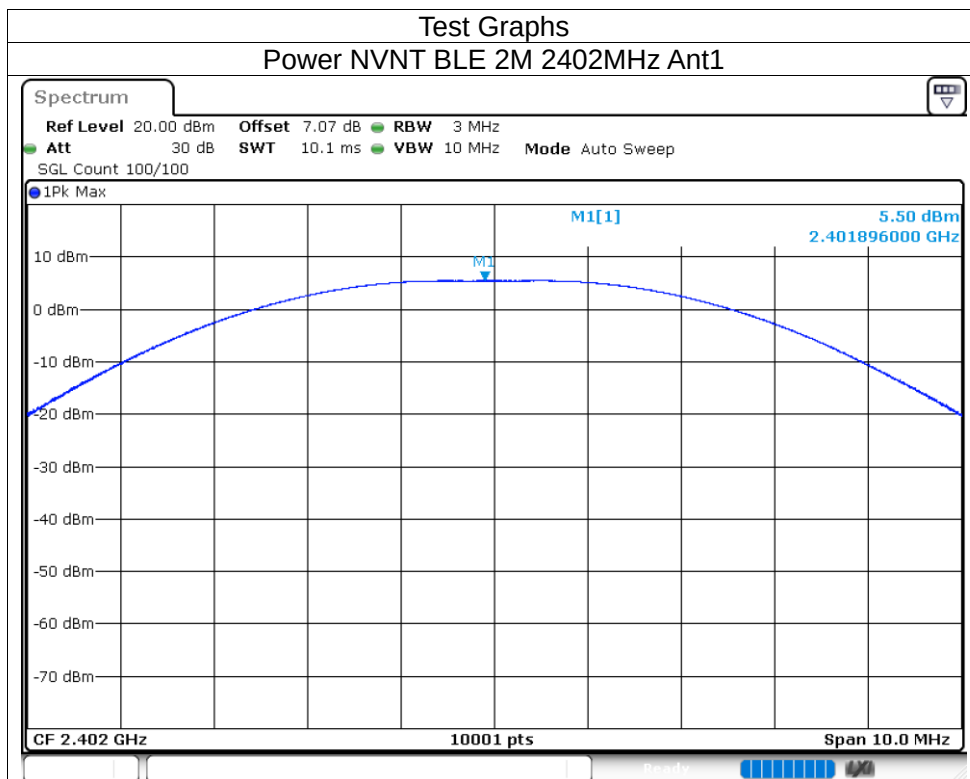

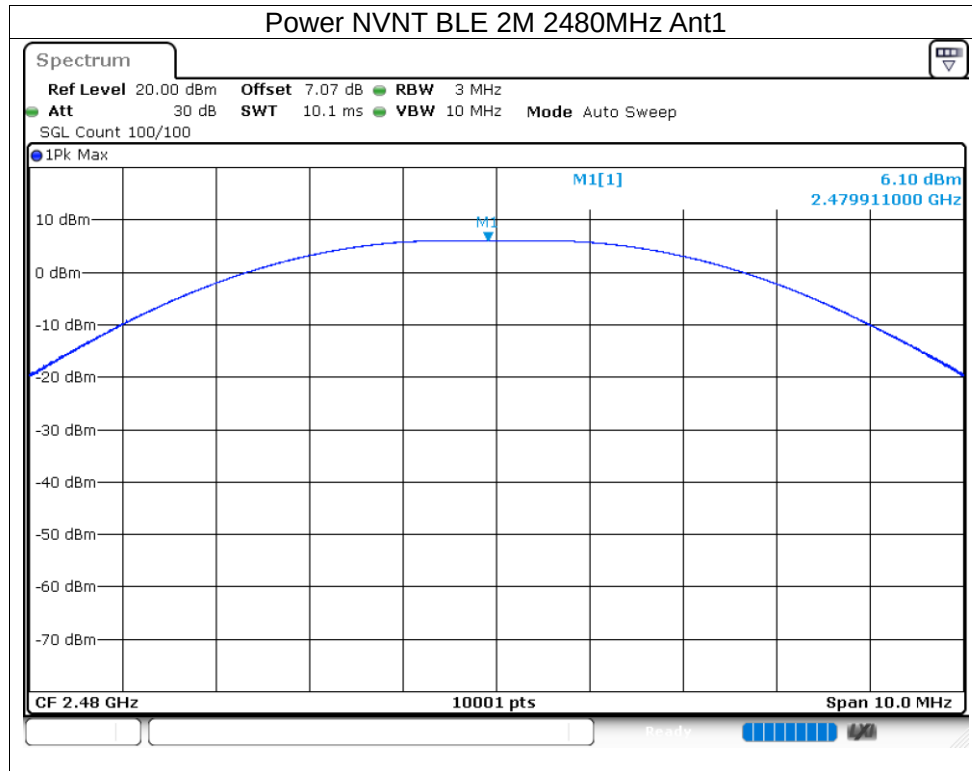

8.1.17 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 2M	2402	Ant1	0.83	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.119	0.5	Pass
NVNT	BLE 2M	2480	Ant1	0.755	0.5	Pass


Test Graphs

-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

Spectrum

Ref Level 20.00 dBm Offset 7.07 dB RBW 100 kHz
Att 30 dB SWT 18.9 μ s VBW 300 kHz Mode Auto FFT
SGL Count 100/100

1Pk Max

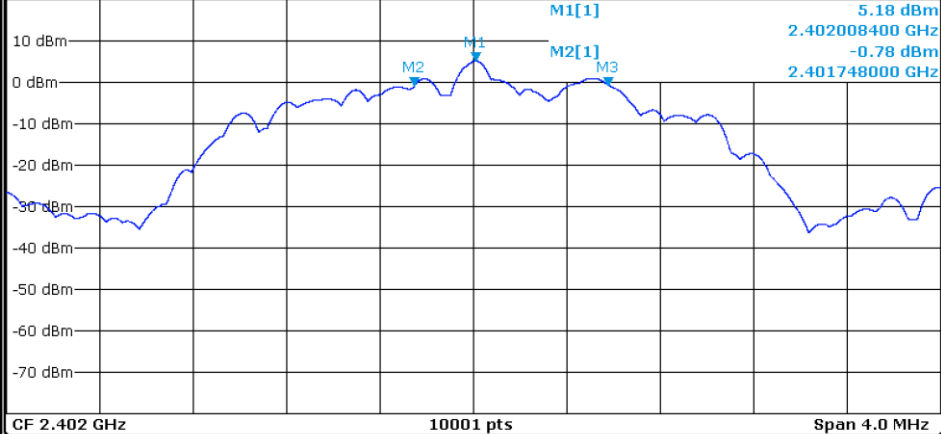

Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1	1	2.4020084 GHz	5.18 dBm		
M2	1	1	2.401748 GHz	-0.78 dBm		
M3	1	1	2.402577 GHz	-0.81 dBm		

-6dB Bandwidth NVNT BLE 2M 2440MHz Ant1

Spectrum


Ref Level 20.00 dBm Offset 7.24 dB RBW 100 kHz
Att 30 dB SWT 18.9 μ s VBW 300 kHz Mode Auto FFT
SGL Count 100/100

1Pk Max

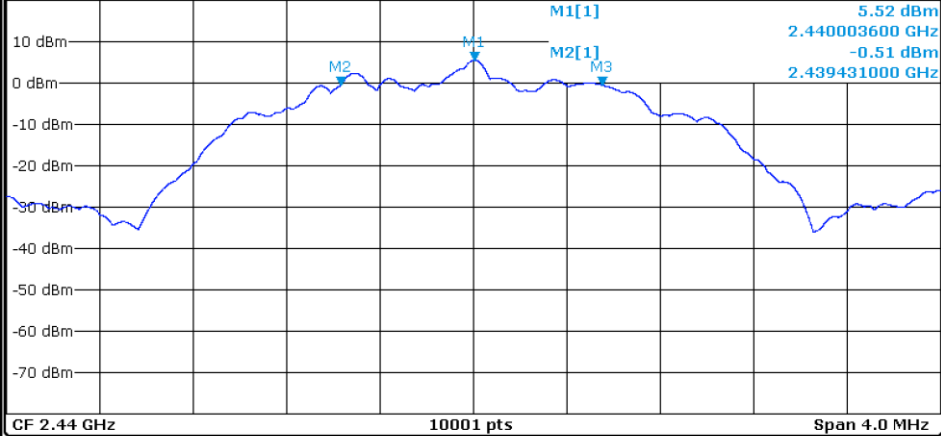


Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1	1	2.4400036 GHz	5.52 dBm		
M2	1	1	2.439431 GHz	-0.51 dBm		
M3	1	1	2.44055 GHz	-0.49 dBm		

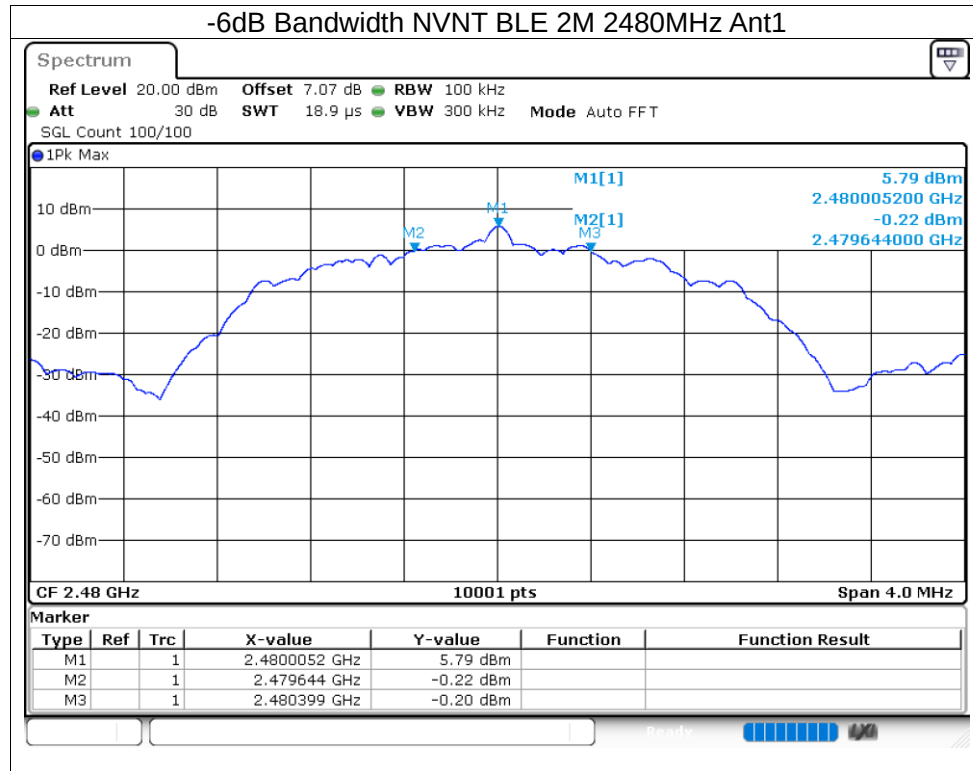

8.1.18 Occupied Channel Bandwidth



Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 2M	2402	Ant1	2.057
NVNT	BLE 2M	2440	Ant1	2.064
NVNT	BLE 2M	2480	Ant1	2.042

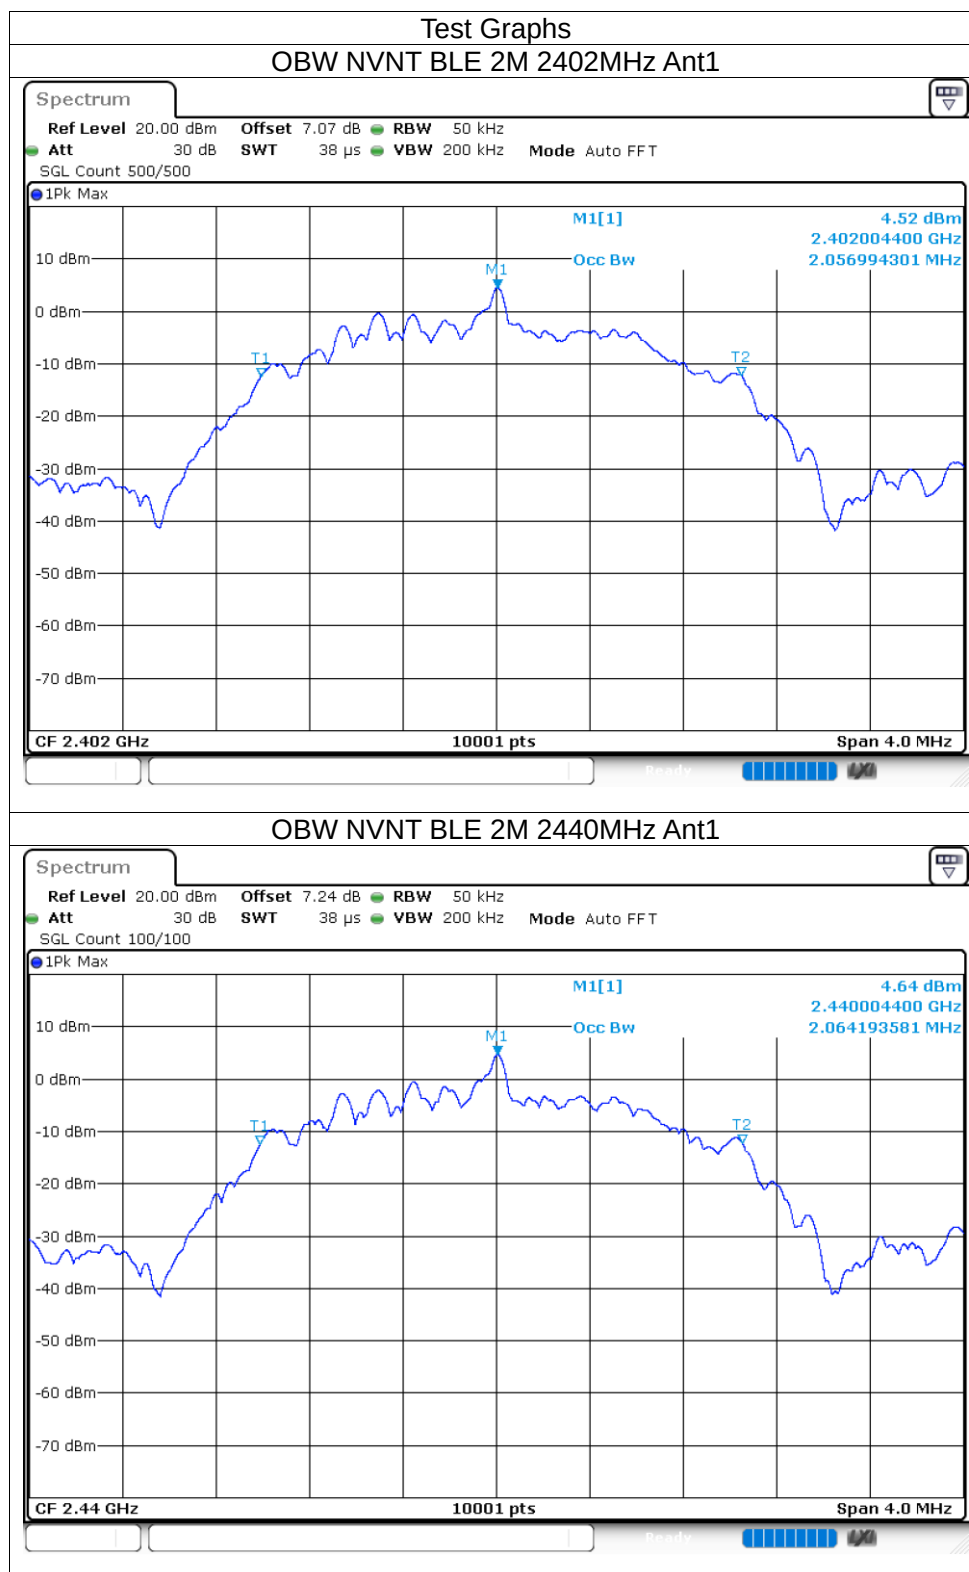


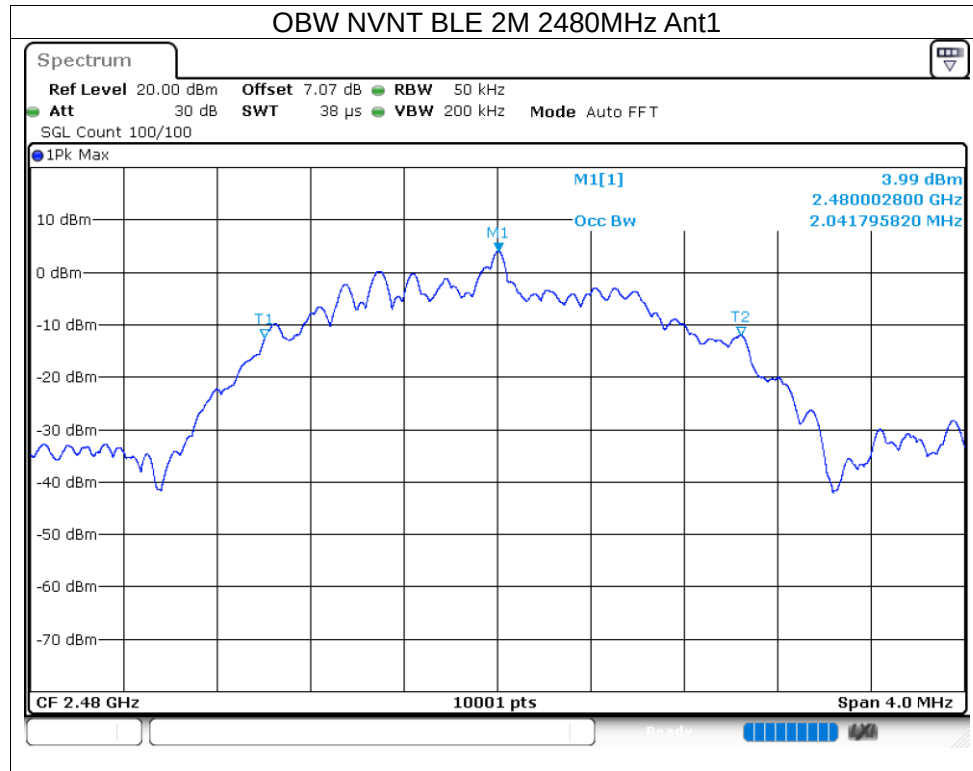

8.1.19 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 2M	2402	Ant1	-12.59	8	Pass
NVNT	BLE 2M	2440	Ant1	-12.31	8	Pass
NVNT	BLE 2M	2480	Ant1	-11.97	8	Pass

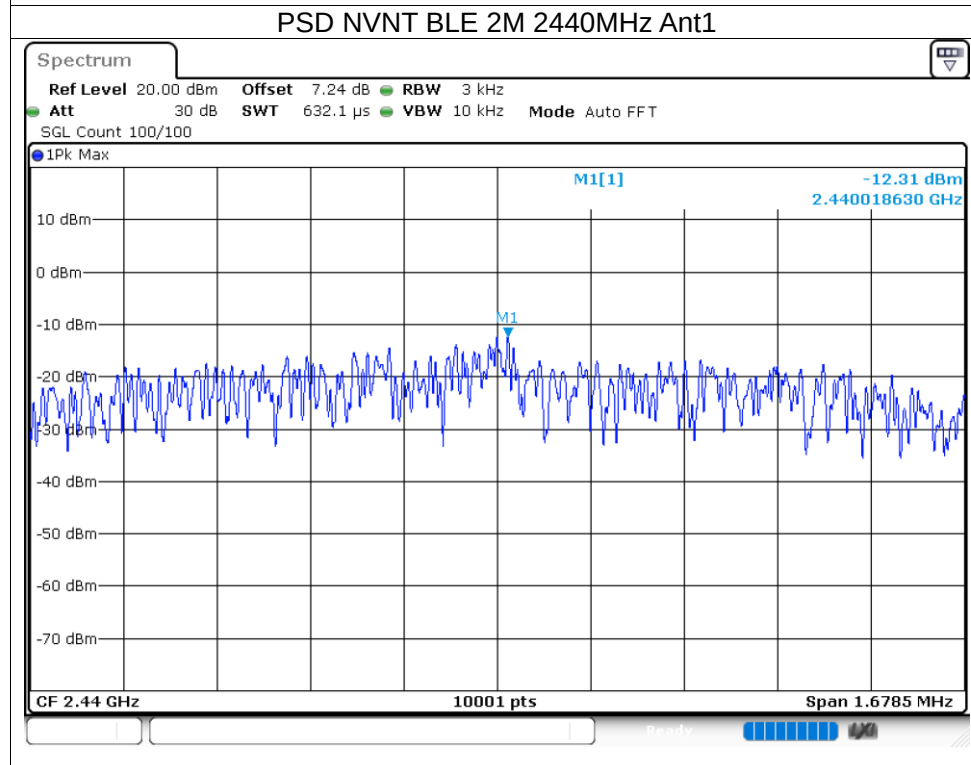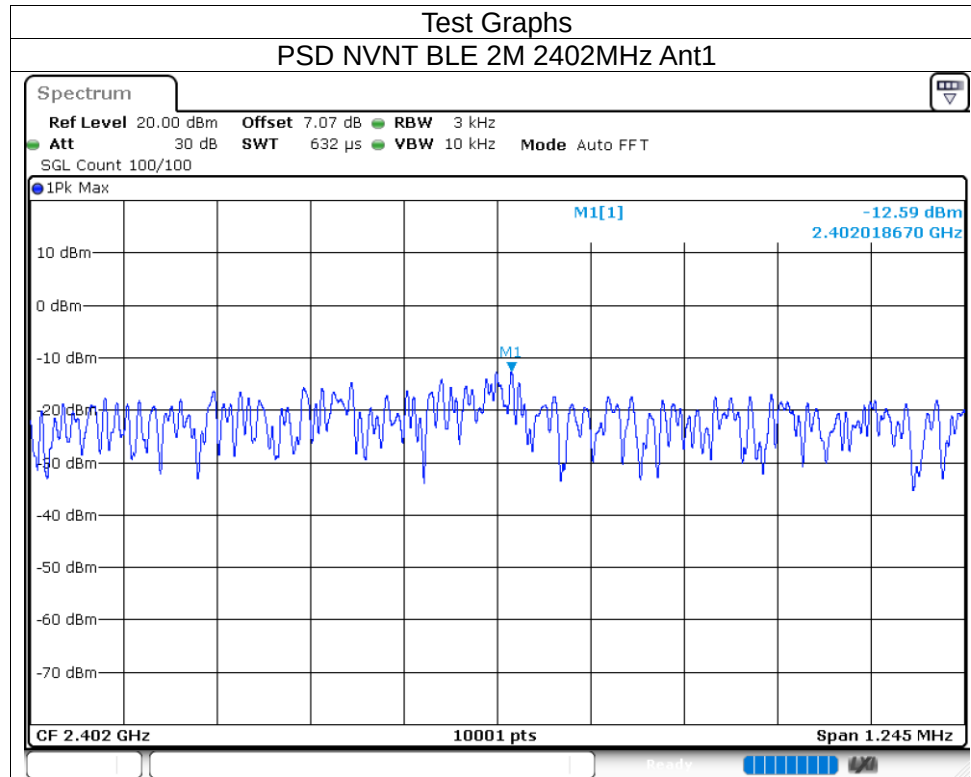

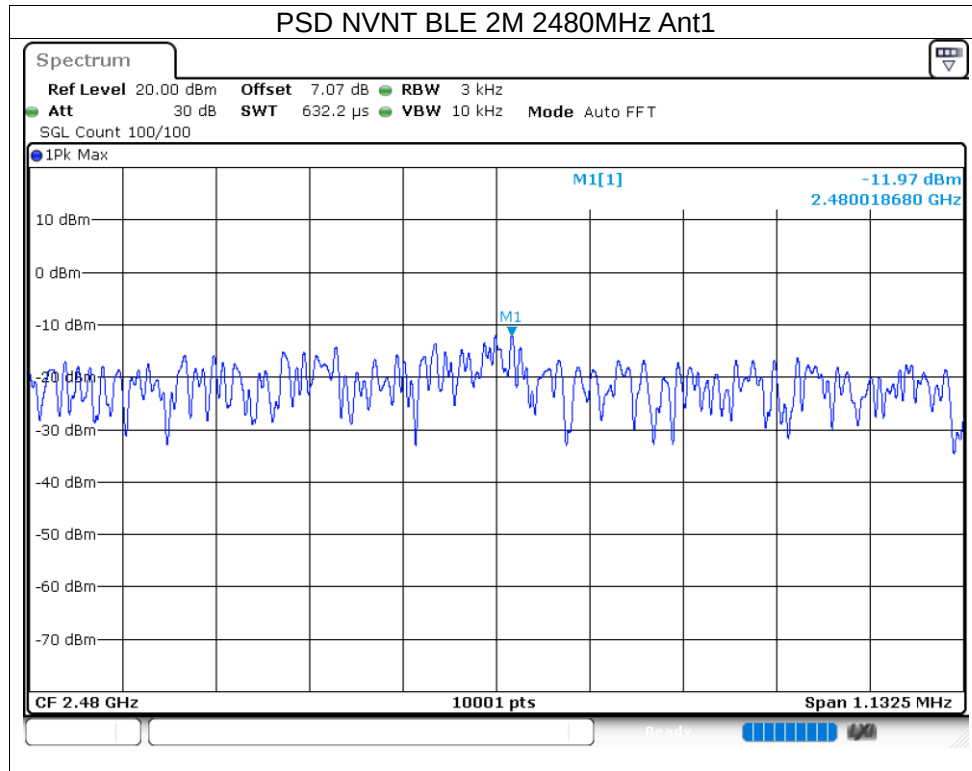

8.1.20 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 2M	2402	Ant1	-56.52	-20	Pass
NVNT	BLE 2M	2480	Ant1	-55.64	-20	Pass


Test Graphs

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref

Spectrum

Ref Level 20.00 dBm Offset 7.07 dB RBW 100 kHz
Att 30 dB SWT 18.9 μ s VBW 300 kHz Mode Auto FFT
SGL Count 200/200

1Pk Max

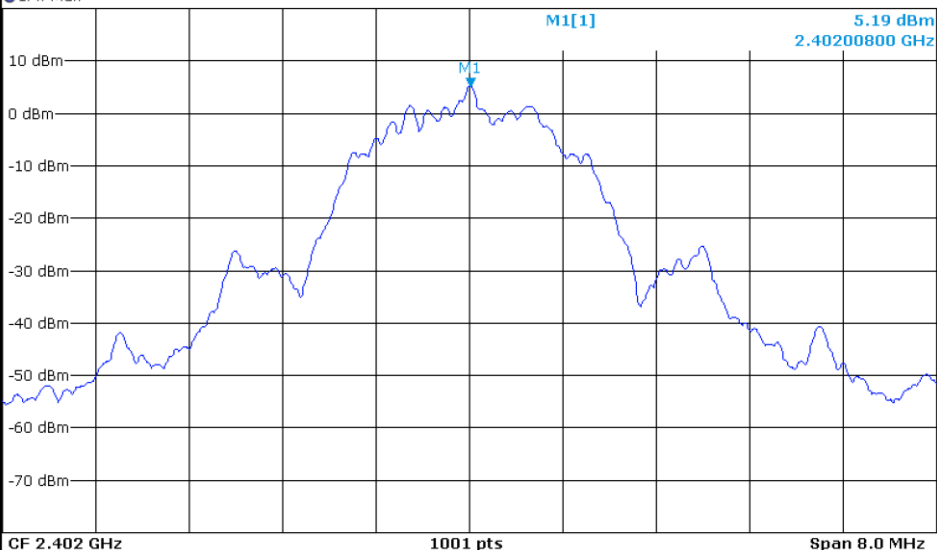


Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

Spectrum

Ref Level 20.00 dBm Offset 7.07 dB RBW 100 kHz
Att 30 dB SWT 227.5 μ s VBW 300 kHz Mode Auto FFT
SGL Count 100/100

1Pk Max

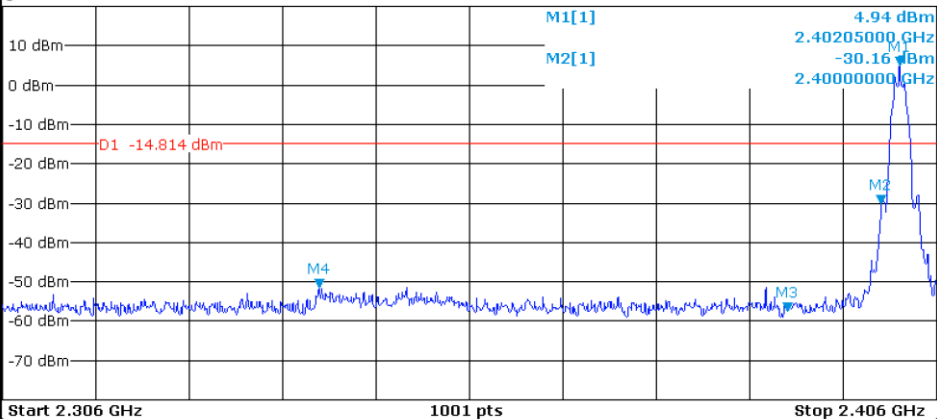

Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.40205 GHz	4.94 dBm		
M2		1	2.4 GHz	-30.16 dBm		
M3		1	2.39 GHz	-57.33 dBm		
M4		1	2.3399 GHz	-51.33 dBm		

Band Edge NVNT BLE 2M 2480MHz Ant1 Ref

Spectrum

Ref Level 20.00 dBm Offset 7.07 dB RBW 100 kHz
Att 30 dB SWT 18.9 μ s VBW 300 kHz Mode Auto FFT
SGL Count 200/200

1Pk Max

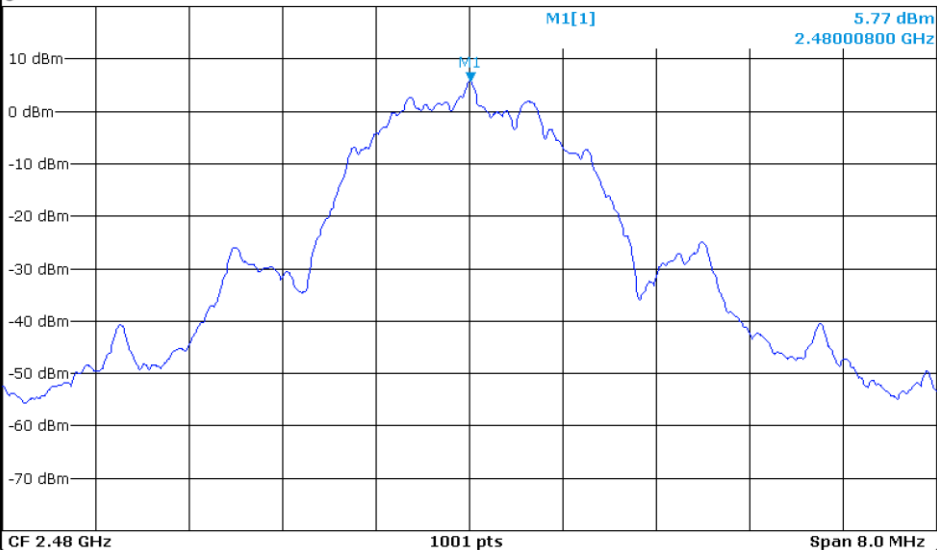


Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

Spectrum

Ref Level 20.00 dBm Offset 7.07 dB RBW 100 kHz
Att 30 dB SWT 227.5 μ s VBW 300 kHz Mode Auto FFT
SGL Count 100/100

1Pk Max

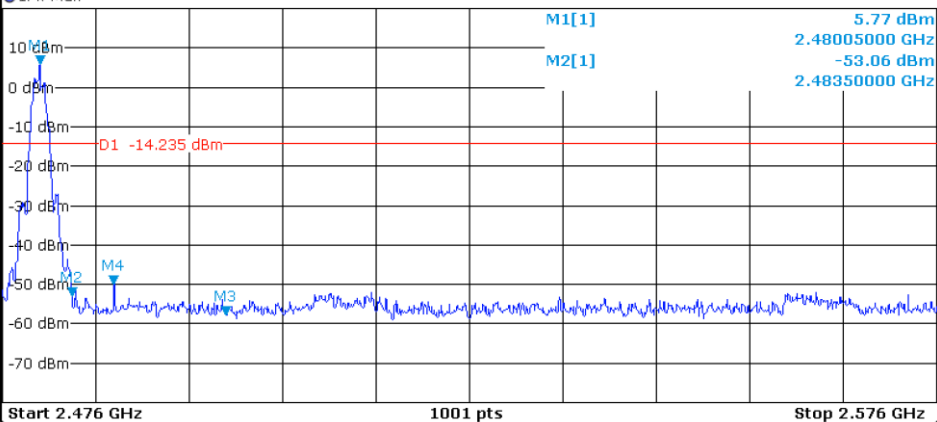

Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48005 GHz	5.77 dBm		
M2		1	2.4835 GHz	-53.06 dBm		
M3		1	2.5 GHz	-57.92 dBm		
M4		1	2.4879 GHz	-49.87 dBm		

8.1.21 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 2M	2402	Ant1	-50.95	-20	Pass
NVNT	BLE 2M	2440	Ant1	-51.85	-20	Pass
NVNT	BLE 2M	2480	Ant1	-51.98	-20	Pass

Test Graphs


Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

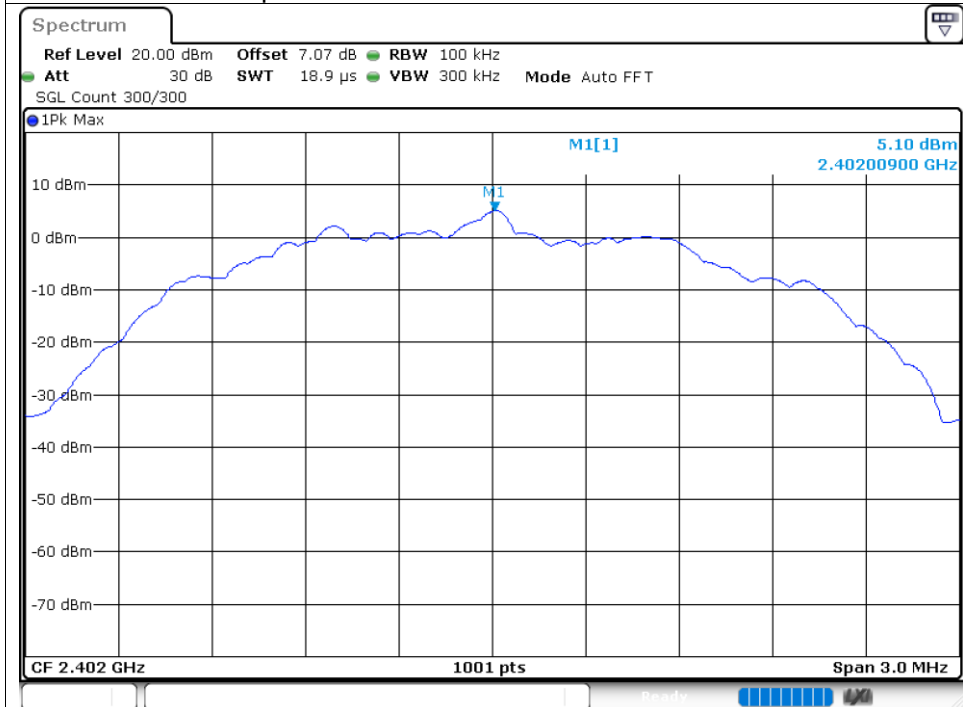


Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

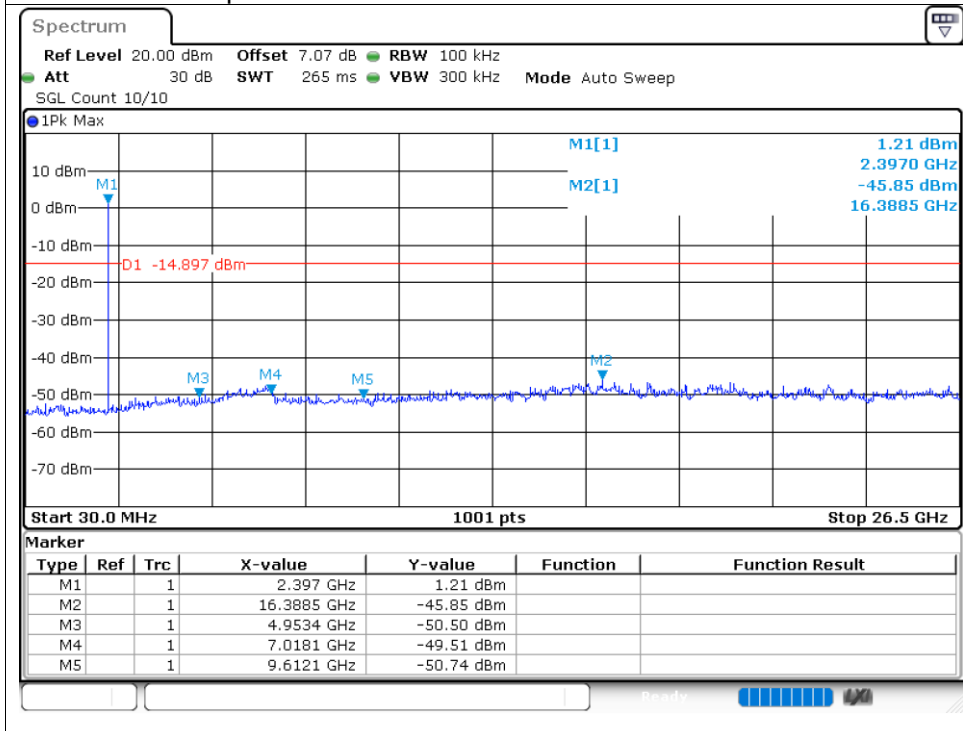


Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Ref

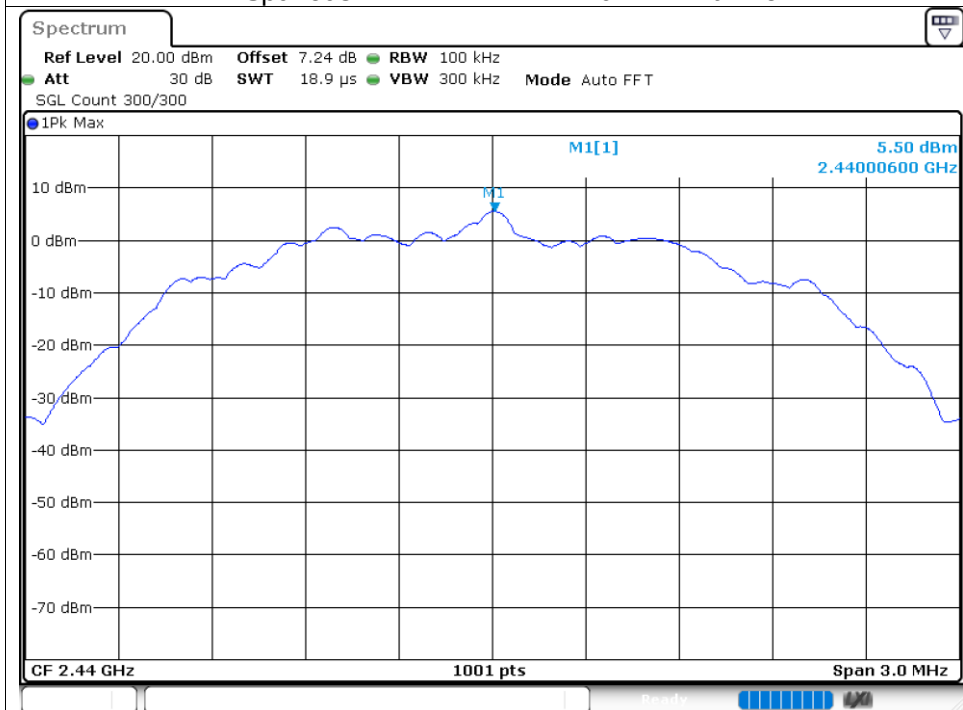


Tx. Spurious NVNT BLE 2M 2440MHz Ant1 Emission

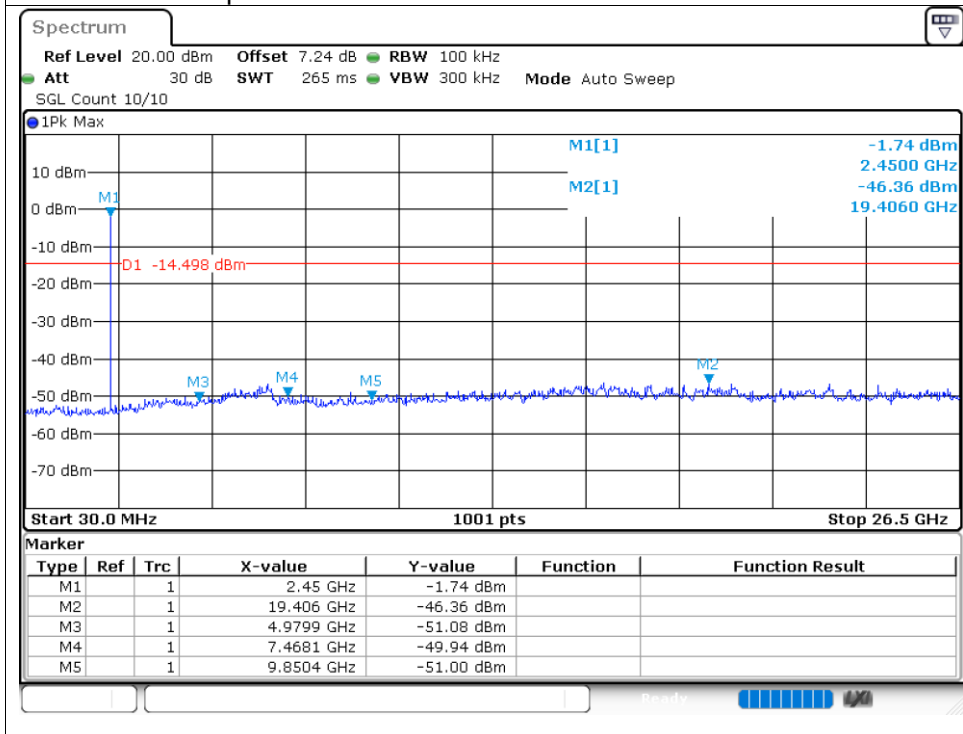

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref

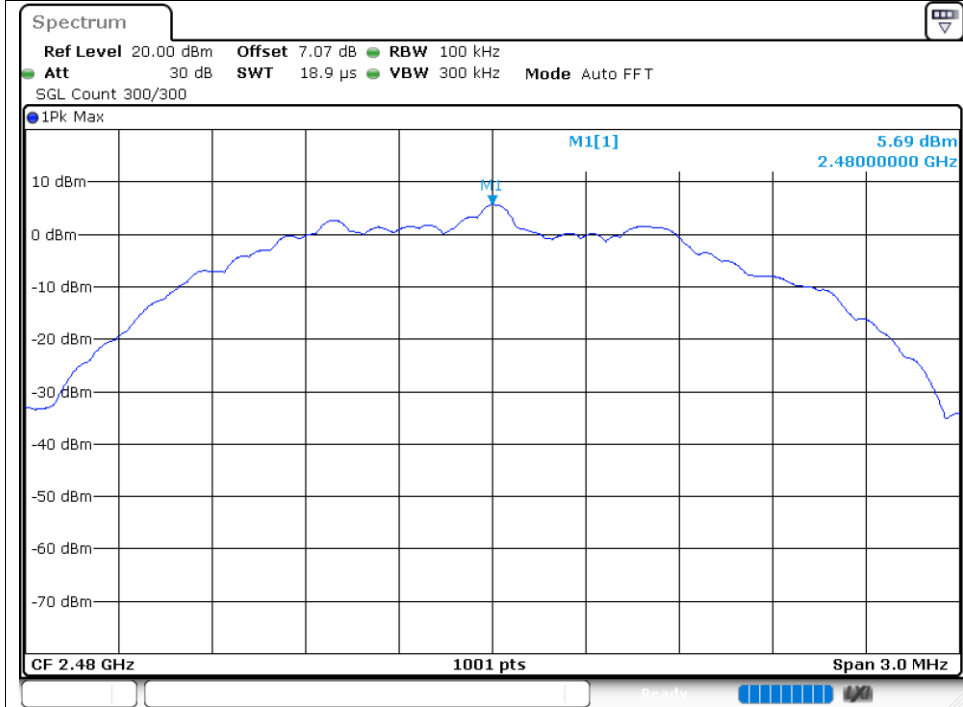

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

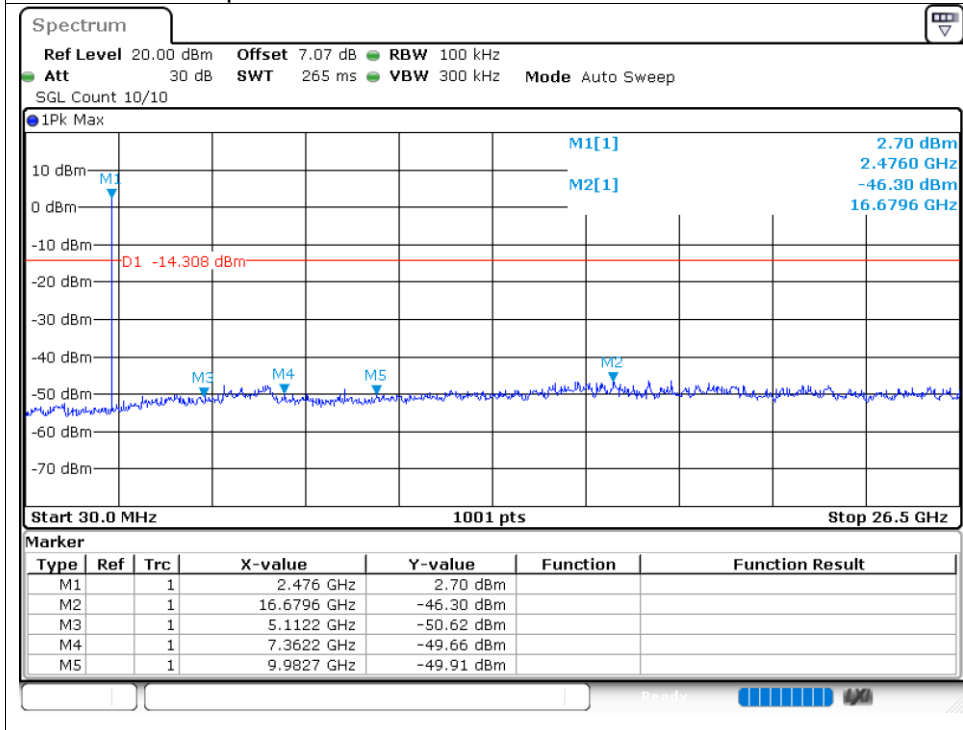

END OF REPORT