



Class II Permissive Change Application

For

Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an Intentional Radiator per Part 15, Subpart C, paragraphs 15.207, 15.209 and 15.247

And

**Innovation Science and Economic Development Canada
Certification per IC RSS-Gen, General Requirements for Radio Apparatus and
RSS-247, Digital Transmission Systems (DTSs), Frequency Hopping Systems
(FHSs) and License-Exempt Local Area Network (LE-LAN) Devices**

For the

Inventek Systems

Model: ISM4343-X

FCC ID: O7P-4343

IC: 10147A-4343

UST Project: 22-0116

Issue Date: April 4, 2022

Total Pages in This Report: 37

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**



I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: 

Title: Compliance Engineer – President

Date April 4, 2022



This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com



Testing Tomorrow's Technology

MEASUREMENT TECHNICAL REPORT

COMPANY NAME: Inventek Systems

MODEL: ISM4343-X

FCC ID: O7P-4343

IC: 10147A-4343

DATE: April 4, 2022

This report concerns (check one): Original grant
Class II change ☒

Equipment type: 2402-2480 MHz Transmitter Module

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes_____ No X

If yes, defer until: N/A
date

agrees to notify the Commission by N/A
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

US Tech
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

Table of Contents

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1	General Information.....	7
1.1	Purpose of this Report	7
1.2	Characterization of Test Sample.....	7
1.3	Product Description	7
1.4	Configuration of Tested System.....	9
1.5	Test Facility.....	9
1.6	Related Submittals.....	9
1.7	Test Results.....	10
2	Tests and Measurements	11
2.1	Test Equipment.....	11
2.2	Modifications to EUT Hardware	12
2.3	Number of Measurements for Intentional Radiators (CFR 15.31(m), RSS-Gen 6.8)	12
2.4	Frequency Range of Radiated Measurements (CFR 15.33, RSS-Gen 6.13) 13	
2.4.1	Intentional Radiator.....	13
2.4.2	Unintentional Radiator	13
2.5	Measurement Detector Function and Bandwidth (CFR 15.35, RSS-Gen 6.9) 13	
2.5.1	Detector Function and Associated Bandwidth	13
2.5.2	Corresponding Peak and Average Requirements.....	13
2.5.3	Pulsed Transmitter Averaging.....	14
2.6	EUT Antenna Requirements (CFR 15.203, RSS-Gen 6.7)	14
2.7	Restricted Bands of Operation (CFR 15.205, RSS-Gen 8.10)	16
2.8	Transmitter Duty Cycle (CFR 15.35 (c), RSS-Gen 6.10)	16
2.10	Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d), RSS-247, 5.1,5.5)	17
2.10.1	Fundamental and Harmonic emissions.....	18
2.10.2	Spurious Emissions other than Fundamental and harmonics	20
2.10.3	Conducted Spurious Emissions	23
2.11	Band Edge Measurements (CFR 15.247(d), RSS-247, 5.5).....	32
2.12	Measurement Uncertainty	37
2.12.1	Conducted Emissions Measurement Uncertainty	37
2.12.2	Radiated Emissions Measurement Uncertainty	37
3	Conclusion	37

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Test Configuration	15
Figure 2.	Conducted Spurious Emissions Low, 30 MHz to 1 GHz	23
Figure 3.	Conducted Spurious Emissions Low, 1 to 2.9 GHz	24
Figure 4.	Conducted Spurious Emissions Low, 2.9 GHz to 25 GHz	25
Figure 5.	Conducted Spurious Emissions Mid, 30 MHz to 1 GHz	26
Figure 6.	Conducted Spurious Emissions Mid, 1 GHz to 2.9 GHz	27
Figure 7.	Conducted Spurious Emissions Mid, 2.9 GHz to 25 GHz	28
Figure 8.	Conducted Spurious Emissions High, 30 MHz to 1 GHz	29
Figure 9.	Conducted Spurious Emissions High, 1 GHz to 2.9 GHz.....	30
Figure 10.	Conducted Spurious Emissions High, 2.9 GHz to 25 GHz.....	31
Figure 11.	Band Edge Compliance, Low Channel Delta – Chip Antenna	33
Figure 12.	Band Edge Compliance, High Channel Delta – Chip Antenna.....	34
Figure 13.	Band Edge Compliance, Low Channel Delta – External Antenna.....	35
Figure 14.	Band Edge Compliance, High Channel Delta – External Antenna.....	36

List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals.....	10
Table 2.	Test Instruments	11
Table 3.	Number of Test Frequencies for Intentional Radiators.....	12
Table 4.	Allowed Antenna(s)	14
Table 5.	Average Radiated Fundamental & Harmonic Emissions (Chip Antenna)	18
Table 6.	Peak Radiated Fundamental & Harmonic Emissions (Chip Antenna).....	19
Table 7.	Intentional Radiator, Spurious Radiated Emissions (CFR 15.209),.....	20
Table 8.	Unintentional and Intentional Radiator, Spurious Radiated Emissions (CFR 15.109, 15.209) 30 MHz to 1000 MHz	21
Table 9.	Intentional Radiator, Spurious Radiated Emissions (CFR 15.109, 15.209) 1 GHz to 12.5 GHz.....	22

US Tech Test Report:

FCC ID:

IC:

Test Report Number:

Issue Date:

Customer:

Model: ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

FCC Part 15/IC RSS Certification

O7P-4343

10147A-4343

22-0116

April 4, 2022

Inventek Systems

List of Attachments

FCC Agency Agreement

IC Agency Agreement

FCC Application Forms

IC Application Forms

Equipment Label(s)

User's Manual

IC Cross Reference

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

1 General Information

1.1 Purpose of this Report

This report is generated to include the addition of two sub-model variants for this radio module. The two sub-models are identical to the originally certified module. The only difference is that the antenna path circuitry will be a trace design to allow the module to be sold as a SIP module. Additional details regarding the trace design will be provided to support the trace design approval. No other changes are made. The new sub-models remain electrically identical to the originally certified module therefore no additional testing was deemed necessary.

The previous test results are presented below so that it can be used as representative test data for the two sub models.

The sub-model numbers are: ISM4343-WBM-L151 and ISM4343-WB-L151.

1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on September 15, 2018 in good operating condition.

1.3 Product Description

The Equipment Under Test (EUT) is the Inventek eS-WiFi SIP/Module:

- Models
 - ISM4343-X
 - ISM4343-WBM-L54
 - ISM4343-WBM-L151
 - ISM4343-WB-L151

The ISM4343-WBM-L54, ISM4343-WBM-L151 and ISM4343-WB-L151 is part of the Inventek Systems eS-WiFi family of SIPs/Modules targeting embedded Wi-Fi 802.11 b/g/n and BT/BLE applications. Inventek eS-WiFi SIPs/Modules offer a plug-and-play solutions that enables the embedded sector to integrated Wi-Fi and BT/BLE. The eS-WiFi SIP hardware system consists of Infineon CYW4343W Wi-Fi/BT/BLE radio, and a ST Micro host MCU. The module provides SPI and UART interfaces, enabling easy connection to an embedded design.

eS-WiFi ISM4343-X SIPs/Modules are offered in multiple configurations:

1. SIP, 10mm x10mm, must use same antenna designs (per Layout Guidelines, DOC-AN-20117) as the -C and -U modules below
 - a. ISM4343-WBM-L151
 - i. WiFi/BT/BLE with integrated MCU
 - b. ISM4343-WB-L151
 - i. WiFi/BT/BLE no integrated MCU
2. Module (SIP with Antenna), 15mm x 34mm, both configurations use ISM4343-WBM-L151 core
 - a. ISM4343-WBM-L54-C
 - i. WiFi/BT/BLE module with integrated antenna.
 - ii. Uses chip antenna with Inventek P/N W245-SC.
 - b. ISM4343-WBM-L54-U
 - i. WiFi/BT/BLE module with U.FL connector.
 - ii. Designs must use the Inventek W24P-U external antenna.

In addition, Inventek offers an evaluation board (ISMART4343) for customer evaluation and integration of the eS-WiFi module into their system.

The Bluetooth feature was tested in this report. The technical specs for this feature are presented below:

Radio: Bluetooth 2

Range: 2400-2483.5 MHz ISM Band

Modulation: GFSK, QPSK

RF Output Power (EIRP): +8 dBm

Data Rate: Mbps (Max): 3 Mbps

Channels: 79

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.4:2014, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014)* for FCC subpart A Digital equipment Verification requirements. Also, *ANSI C63.10:2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices* was used as a test procedure guide.

A list of the EUT and Peripherals is found in Table 1 below. A block diagram of the tested system is shown in Figure 1. Test configuration photographs are provided in separate Appendices.

1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC under designation number US5301. Additionally, this site has been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1.

1.6 Related Submittals

The Equipment under Test (EUT) is subject to the following FCC/IC authorizations:

- a) Certification under section 15.247/IC RSS-247 as a transmitter.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

1.7 Test Results

In our opinion, and as indicated by the test results documented following, when tested in the configuration as described in this report, the EUT meets the applicable requirements of FCC and IC, including: FCC Parts 2.902, 15.207, 15.209, 15.247, RSS GEN, and RSS-247.

Table 1. EUT and Peripherals

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC/IC ID:	CABLES P/D
Inventek	ISM4343-X including ISM4343- WBM-L151 and ISM4343-WB-L151	Engineering Sample	FCC ID: O7P-4343 IC ID: 10147A-4343	UD
Hewlett-Packard (Laptop)	EliteBook 8530p	2CE010000TG	Unknown	-
Hewlett-Packard (Power Supply Adapter)	384020-001	PA-1900-08H2	Not Applicable	3.0 m UP
Antenna See antenna details	--	--	--	--

U= Unshielded
S= Shielded
P= Power
D= Data

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

2 Tests and Measurements

2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are indicated.

Table 2. Test Instruments

TEST INSTRUMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DUE DATE
Spectrum Analyzer	Agilent	E4407B	US41442935	8/17/2020
Spectrum Analyzer	Hewlett-Packard	8593E	3205A00124	01/25/2019
Loop Antenna	A. H. Systems	SAS-200/562	142	1/22/2020 2 yr.
Biconical Antenna	Emco	3110B	9307-1431	5/2/2019 2 yr
Log Periodic Antenna	Emco	3146	9305-3600	5/1/2019 2 yr
Horn Antenna	Emco	3115	9107-3723	12/22/2018
Rf Preamp 100 kHz to 1.3 GHz	Hewlett-Packard	8447D	1937A02980	3/7/2019
Preamp 1.0 GHz to 26.0 GHz	Hewlett-Packard	8449B	3008A00480	2/28/2019
High Pass Filter	Microwave Chircuits	H3R020G2	001DC9528	3/08/2019
8 dB ATTENUATOR	Mini-Circuits	VAT-8 15542	30519	3/8/2019

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

2.2 Modifications to EUT Hardware

No physical modifications were made by US Tech in order to bring the EUT into compliance with FCC Part 15, Subpart C Intentional Radiator Limits for the transmitter portion of the EUT or the Subpart B Unintentional Radiator Limits (Receiver and Digital Device) Requirements.

2.3 Number of Measurements for Intentional Radiators (CFR 15.31(m), RSS-Gen 6.8)

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in Table 3 below.

Table 3. Number of Test Frequencies for Intentional Radiators

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates at 2402 MHz to 2480 MHz, 3 test frequencies were used.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

2.4 Frequency Range of Radiated Measurements (CFR 15.33, RSS-Gen 6.13)

2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10th harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to 5 times the highest internal clock frequency.

2.5 Measurement Detector Function and Bandwidth (CFR 15.35, RSS-Gen 6.9)

The radiated and conducted emissions limits shown herein are based on the following:

2.5.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

2.5.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

2.5.3 Pulsed Transmitter Averaging

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may be expressed logarithmically in dB.

NOTE: If the transmitter was programmed to transmit at >98% duty cycle, then, wherever applicable (where the detection mode was AVG) the duty cycle factor calculated will be applied.

2.6 EUT Antenna Requirements (CFR 15.203, RSS-Gen 6.7)

This equipment is not available to the general public and will only be installed by a professional installer working for an approved utility. The equipment therefore meets the intent of the above requirement. Only the antennas listed in Table 4 will be used with this module.

Table 4. Allowed Antenna(s)

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB _i	TYPE OF CONNECTOR
Chip Antenna	Inventek Systems	Chip	W245-SC	+1.4	U.FL

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems

ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

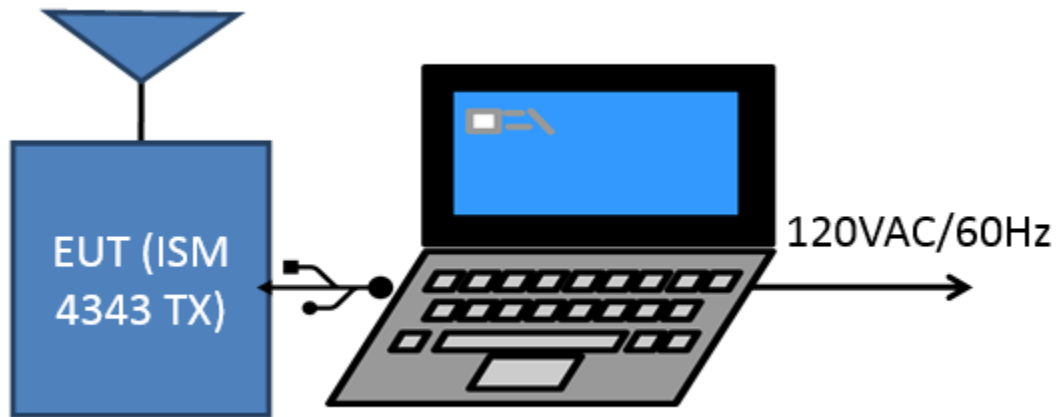


Figure 1. Block Diagram of Test Configuration

Note: The laptop is used for programming the radio module only.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

2.7 Restricted Bands of Operation (CFR 15.205, RSS-Gen 8.10)

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious cannot exceed the limits of 15.209. Radiated harmonics and other spurious emissions are examined for this requirement. See paragraph 2.10 of the test report.

2.8 Transmitter Duty Cycle (CFR 15.35 (c), RSS-Gen 6.10)

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification.

In this case no duty cycle correction factor was used.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.247(d), RSS-247, 5.1,5.5)

Radiated Spurious measurements: The EUT was placed into a continuous transmit mode of operation (>98% or max level possible duty cycle) and tested per ANSI C63.10:2013. The EUT was tested in three orthogonal positions to find the maximum emission position.

Radiated measurements were conducted between the frequency range of 9 kHz (or lowest frequency used/generated by the device) up to the tenth harmonic of the device (not greater than 40 GHz). In the band below 150 kHz, a resolution bandwidth (RBW) of 200 Hz was used. In the band from 150 kHz to 30 MHz, a RBW of 9 kHz was used; emissions below 1 GHz were tested with a RBW of 100/120 kHz and emissions above 1 GHz were tested with a RBW of 1 MHz. All video bandwidth settings were at least three times the RBW value.

The EUT was investigated per CFR 15.209, General requirements for unwanted spurious emissions. The conducted spurious method as described below was used to investigate all other emissions emanating from the antenna port.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 22-0116
 April 4, 2022
 Inventek Systems

ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

2.10.1 Fundamental and Harmonic emissions

Table 5. Average Radiated Fundamental & Harmonic Emissions (Chip Antenna)

Test: FCC Part 15, Para 15.209, 15.247(d)				Client: Inventek Systems			
Project: 18-0327				Model: ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
Low Channel – AVERAGE							
2402.00	23.97	30.35	54.32	--	3.0m./HORZ	--	AVG
4804.00	27.73	2.80	30.53	54.0	3.0m./HORZ	23.5	AVG
7206.00	27.64	8.21	35.85	54.0	3.0m./HORZ	18.1	AVG
Mid Channel – AVERAGE							
2440.00	25.61	30.37	55.98	--	3.0m./HORZ	--	AVG
4880.00	29.65	1.29	30.94	54.0	3.0m./HORZ	23.06	AVG
7320.00	28.01	9.17	37.18	54.0	3.0m./HORZ	16.82	AVG
High Channel – AVERAGE							
2480.00	27.59	30.38	57.97	--	3.0m./HORZ	--	AVG
4960.00	28.12	2.39	30.51	54.0	3.0m./HORZ	23.49	AVG
7440.00	28.02	9.36	37.38	54.0	3.0m./HORZ	16.62	AVG


1. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
2. The EUT was placed in its normal operating position and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98% or max level possible. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 4804.00 MHz:

Magnitude of Measured Frequency	27.73	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	2.80	dB/m
Corrected Result	30.53	dBuV/m

Test Date: October 26, 2018

Tested By

Signature:  Name: Afzal Fazal

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 22-0116
 April 4, 2022
 Inventek Systems
 ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

Table 6. Peak Radiated Fundamental & Harmonic Emissions (Chip Antenna)

Test: FCC Part 15, Para 15.209, 15.247(d)				Client: Inventek Systems			
Project: 18-0327				Model: ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
Low Channel – PK							
2402.00	59.16	30.35	89.5	--	3.0m./HORZ	--	PK
4804.00	49.36	2.80	52.2	74.0	3.0m./HORZ	21.84	PK
7206.00	49.29	8.21	57.5	74.0	3.0m./HORZ	16.50	PK
Mid Channel – PK							
2440.00	65.86	30.37	96.2	--	3.0m./HORZ	--	PK
4880.00	48.83	1.29	50.1	74.0	3.0m./HORZ	23.88	PK
7320.00	49.50	9.17	58.7	74.0	3.0m./HORZ	15.33	PK
High Channel – PK							
2480.00	71.98	30.38	102.4	--	3.0m./HORZ	--	PK
4960.00	49.90	2.39	52.3	74.0	3.0m./HORZ	21.71	PK
7440.00	49.52	9.36	58.9	74.0	3.0m./HORZ	15.12	PK


1. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10th harmonic
2. The EUT was placed in its normal operating position and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98% or max level possible. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 2402.00 MHz:

Magnitude of Measured Frequency	59.16	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	30.35	dB/m
Corrected Result	89.51	dBuV/m

Test Date: October 26, 2018

Tested By

Signature:  Name: Afzal Fazal

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

2.10.2 Spurious Emissions other than Fundamental and harmonics

The EUT was placed into a mode representative of normal operation and spurious emissions measurements were performed. The spurious emissions found are other than Fundamental and harmonic measurements. The antenna port was terminated with a 50 ohm load during testing.

Table 7. Intentional Radiator, Spurious Radiated Emissions (CFR 15.209), 9 kHz to 30 MHz


9 kHz to 30 MHz							
Test: Radiated Emissions				Client: Inventek Systems			
Project: 18-0327				Model: ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151			
Frequency (MHz)	Test Data (dBuv)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or QP
All emissions seen were 20 dB or more below the limit.							

Tested from 9 kHz to 30 MHz

SAMPLE CALCULATION: N/A

Test Date: October 26, 2018

Tested By

Signature:  Name: Afzal Fazal

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 22-0116
 April 4, 2022
 Inventek Systems

ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

Table 8. Unintentional and Intentional Radiator, Spurious Radiated Emissions (CFR 15.109, 15.209) 30 MHz to 1000 MHz

30 MHz to 1000 MHz with Class B Limits							
Test: Radiated Emissions				Client: Inventek Systems			
Project: 18-0327				Model: ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or QP
58.86	47.74	-17.25	30.49	40.0	3m./HORZ	9.5	PK
94.16	41.31	-16.74	24.57	43.5	3m./HORZ	18.9	PK
207.88	46.30	-13.82	32.48	43.5	3m./HORZ	11.0	PK
240.18	43.21	-13.37	29.84	46.0	3m./HORZ	16.2	PK
984.50	40.51	-1.59	38.92	54.0	3m./HORZ	15.1	PK
60.02	43.62	-17.79	25.83	40.0	3m./VERT	14.2	PK
138.96	41.61	-13.39	28.22	43.5	3m./VERT	15.3	PK
209.96	41.55	-14.52	27.03	43.5	3m./VERT	16.5	PK
500.58	43.01	-6.22	36.79	46.0	3m./VERT	9.2	PK
961.00	41.17	-1.90	39.27	54.0	3m./VERT	14.7	PK


Tested from 30 MHz to 1 GHz

SAMPLE CALCULATION at 58.86 MHz:

Magnitude of Measured Frequency	47.74	dBuV
+ Cable Loss+Antenna Factor-Amp Gain	-17.25	dB
=Corrected Result	30.49	dBuV
Limit	40.00	dBuV
-Corrected Result	30.49	dBuV
Margin	9.50	dB

Test Date: October 26, 2018

Tested By

Signature:  Name: Afzal Fazal

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

Table 9. Intentional Radiator, Spurious Radiated Emissions (CFR 15.109, 15.209) 1 GHz to 12.5 GHz


1 GHz to 12.5 GHz with Class B Limits							
Test: Radiated Emissions				Client: Inventek Systems			
Project: 18-0327				Model: ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151			
Frequency (MHz)	Test Data (dBuV)	AF+CA-AMP (dB/m)	Results (dBuV/m)	AVG Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
8795.00	42.39	-5.71	36.68	54.0	1.0m./HORZ	17.3	PK

*Measurements taken above 6 GHz are performed at a distance of 1m (vs. 3m). This correction includes an additional factor of -9.5 dB to account for this change.

SAMPLE CALCULATION at 8795.00 MHz:

Magnitude of Measured Frequency	42.39	dBuV
+ Cable Loss+Antenna Factor-Amp Gain	-5.71	dB
=Corrected Result	36.68	dBuV
Limit	54.00	dBuV
-Corrected Result	36.68	dBuV
Margin	17.30	dB

Test Date: October 26, 2018
Tested By

Signature:  Name: Afzal Fazal

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

2.10.3 Conducted Spurious Emissions

Conducted Spurious measurements: The EUT was put into a continuous-transmit mode of operation (>98% or max level possible duty cycle) and tested per ANSI C63.10-2013 for conducted out of band emissions emanating from the antenna port over the frequency range of 9 kHz or lowest operating clock frequency to ten times the highest operating clock frequency. A conducted scan was performed on the EUT to identify and record the spurious signals that were related to the transmitter.

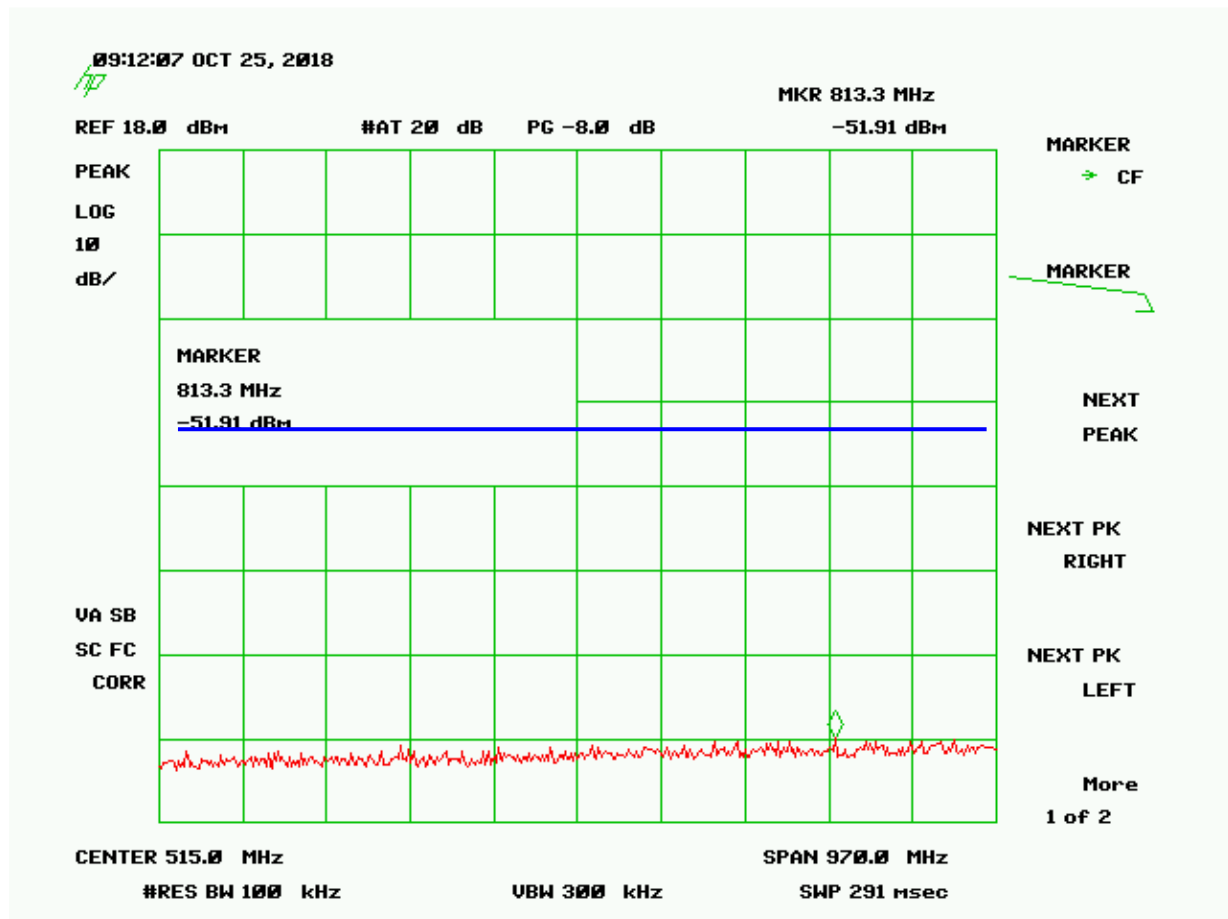


Figure 2. Conducted Spurious Emissions Low, 30 MHz to 1 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

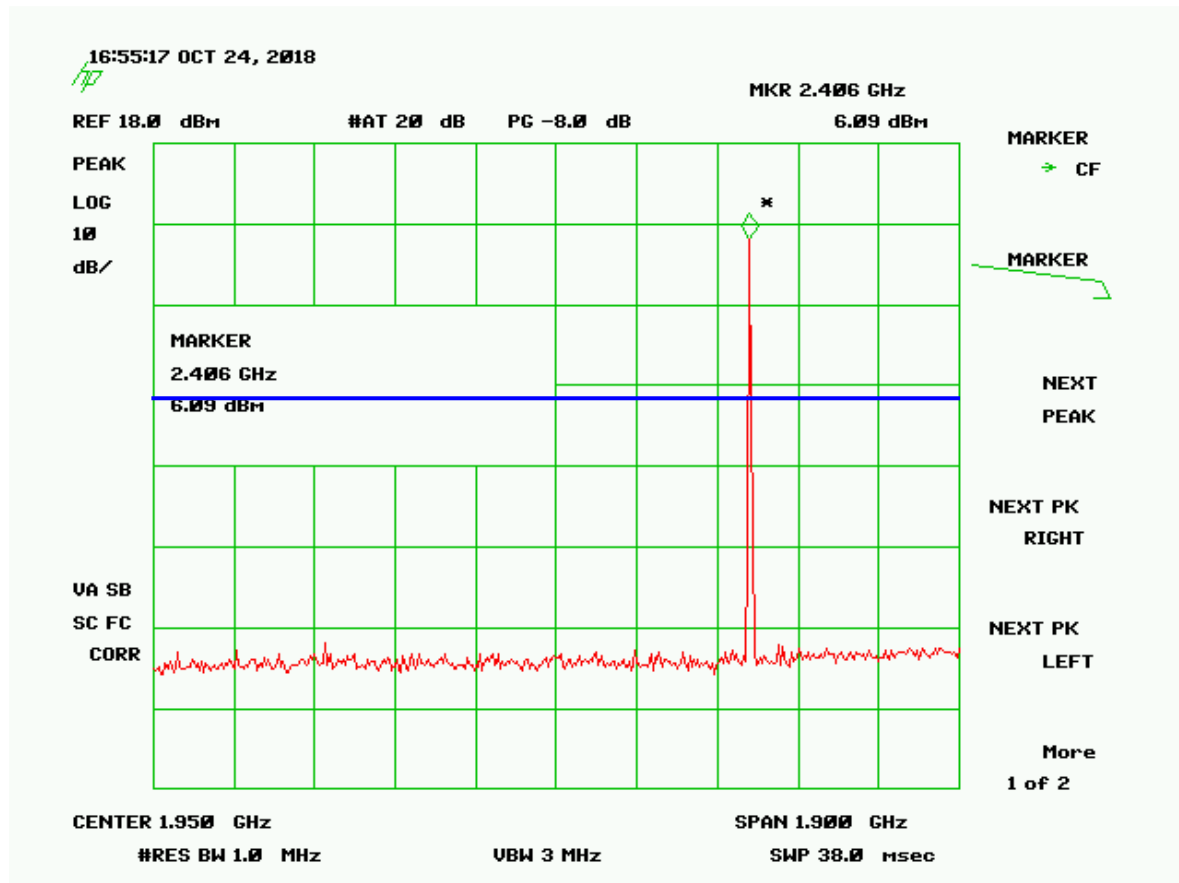


Figure 3. Conducted Spurious Emissions Low, 1 to 2.9 GHz

Note: Large emission seen is the fundamental emission.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems

ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

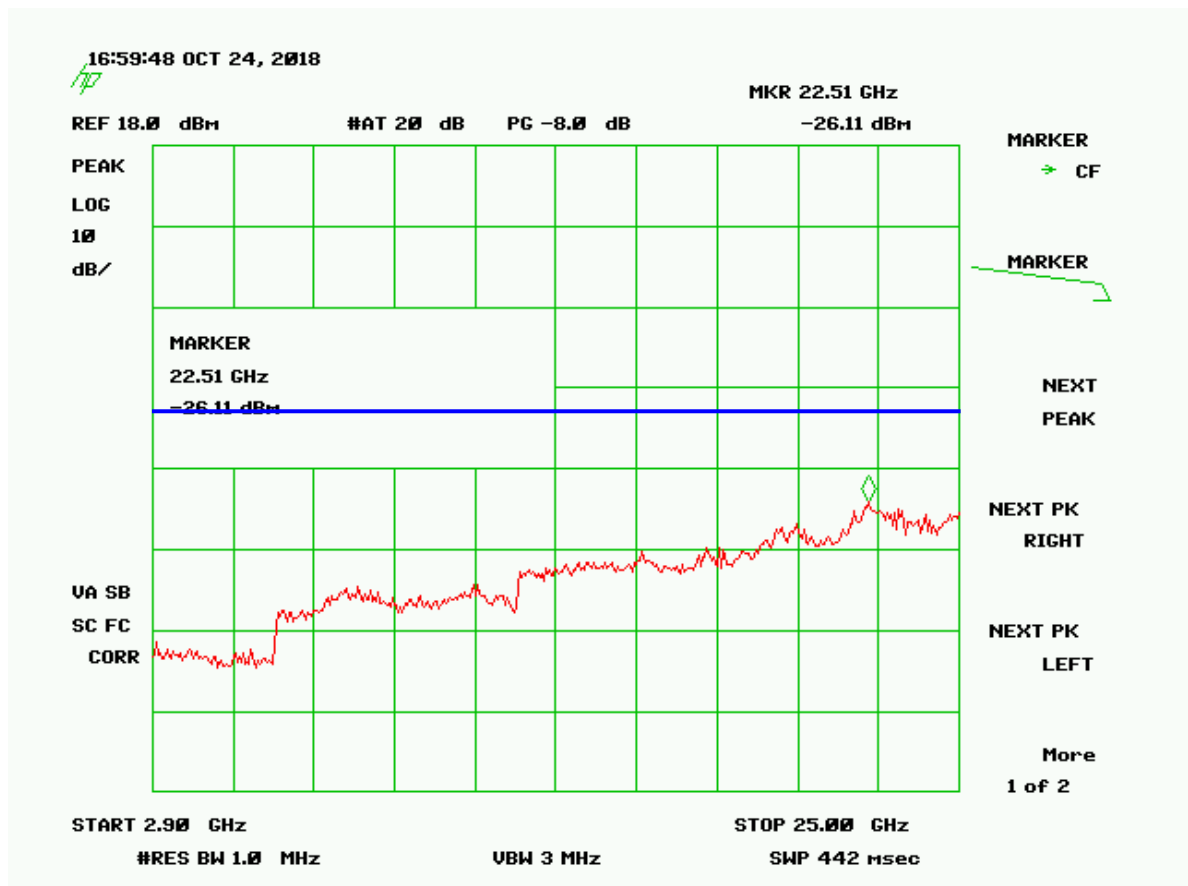


Figure 4. Conducted Spurious Emissions Low, 2.9 GHz to 25 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

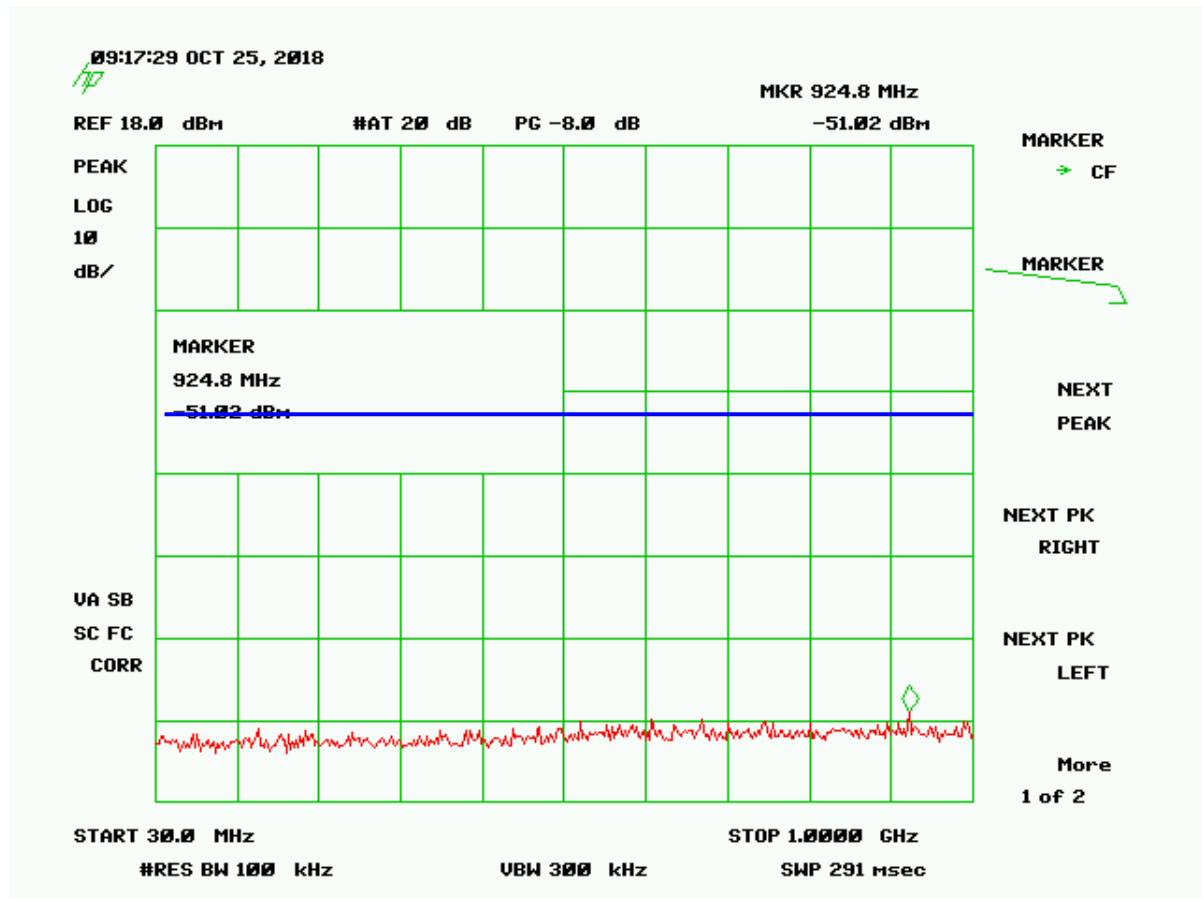


Figure 5. Conducted Spurious Emissions Mid, 30 MHz to 1 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

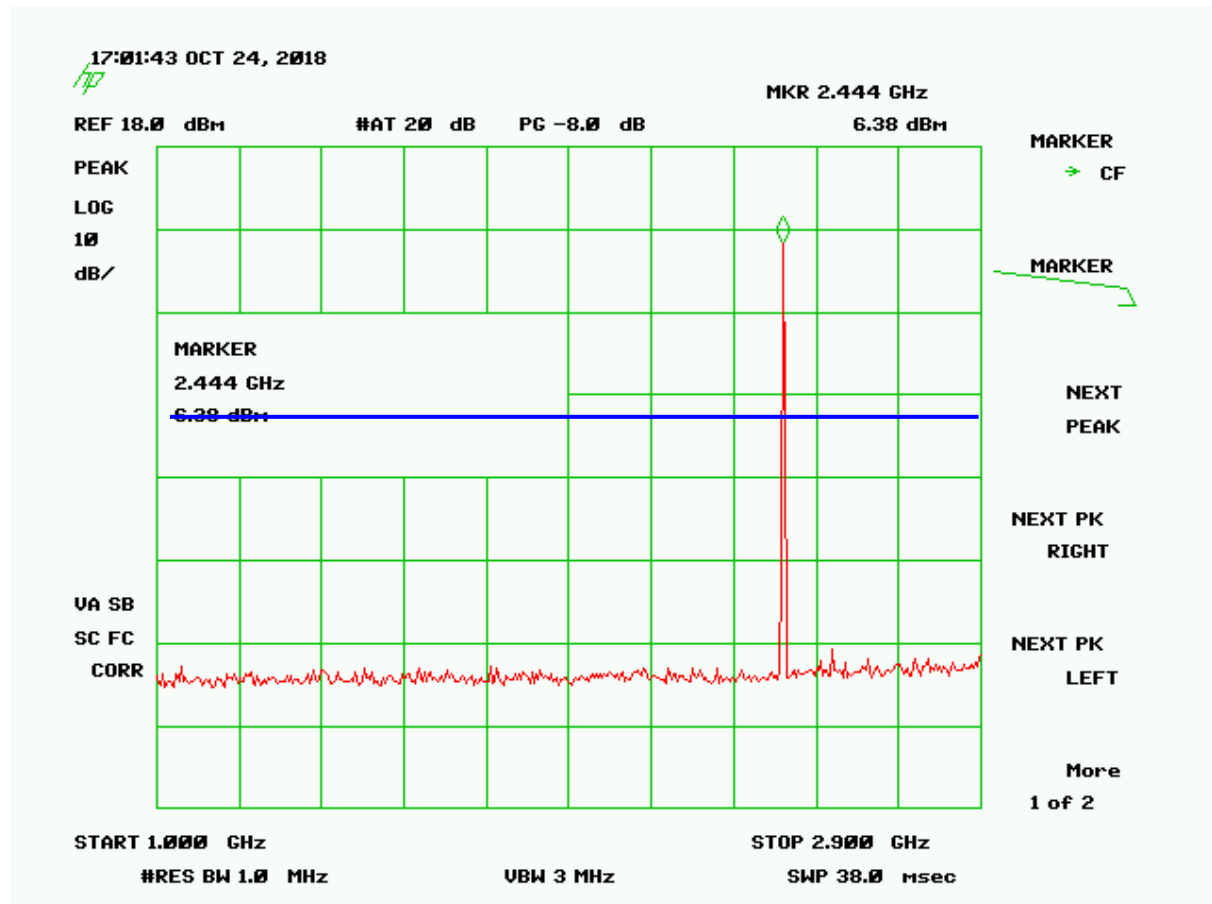


Figure 6. Conducted Spurious Emissions Mid, 1 GHz to 2.9 GHz

Note: Large emission seen is the fundamental emission.

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems

ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

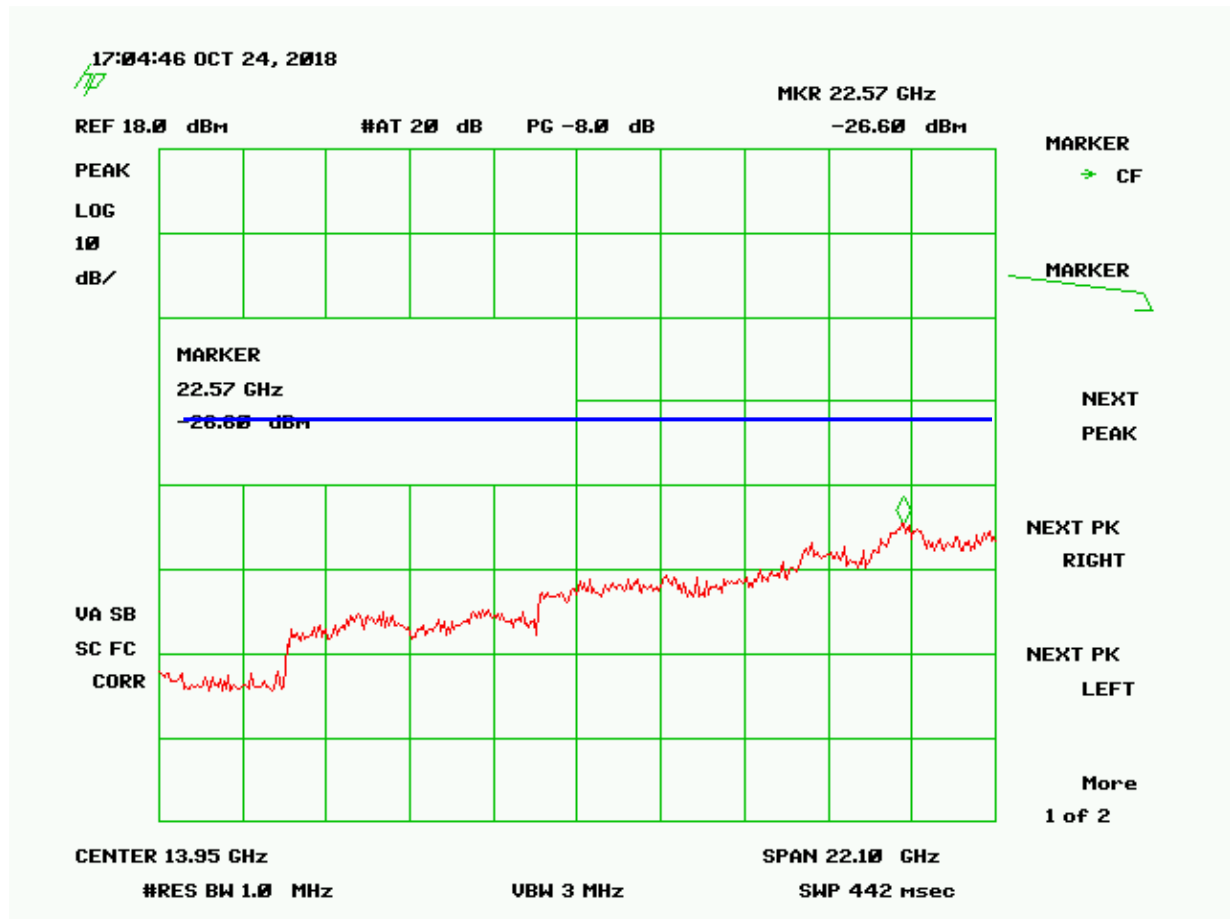


Figure 7. Conducted Spurious Emissions Mid, 2.9 GHz to 25 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems

ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

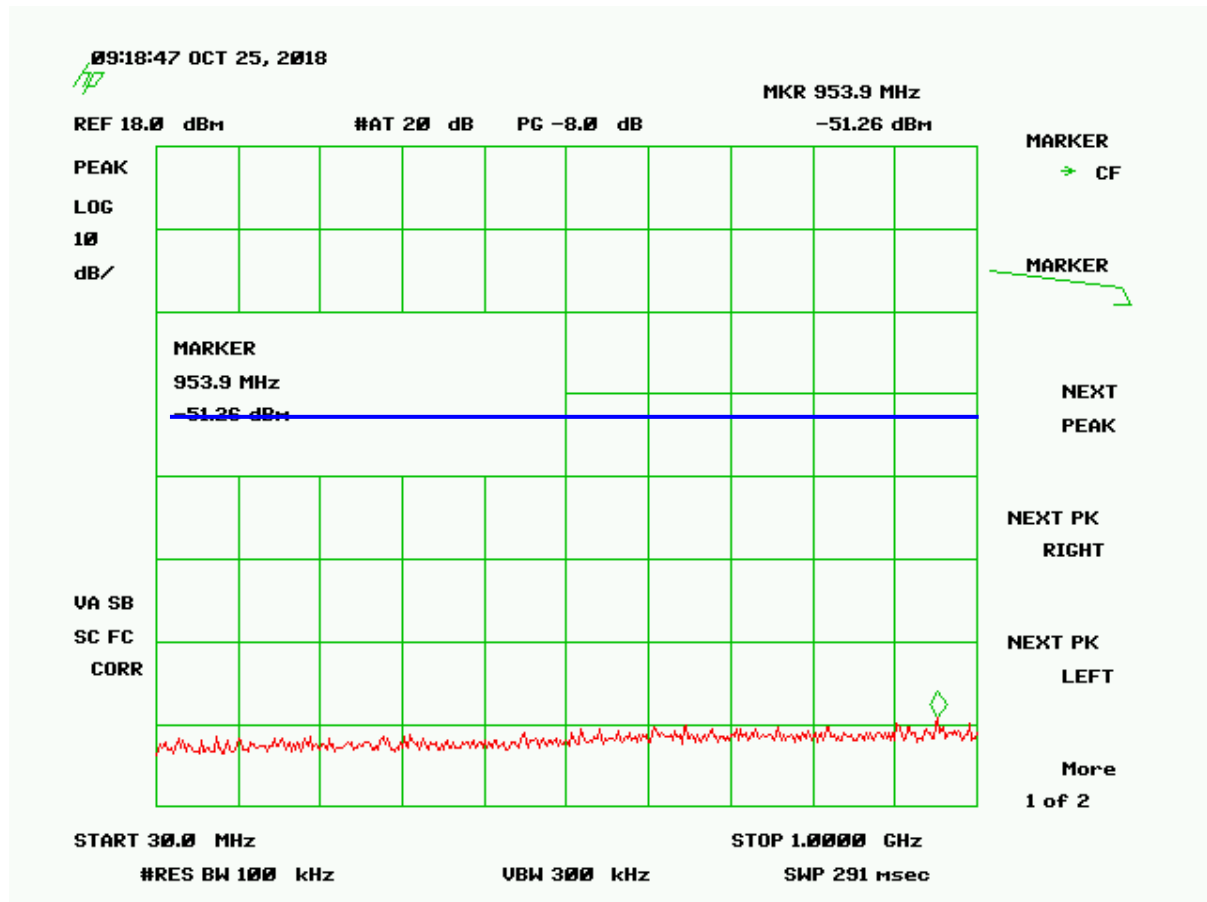


Figure 8. Conducted Spurious Emissions High, 30 MHz to 1 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems

ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

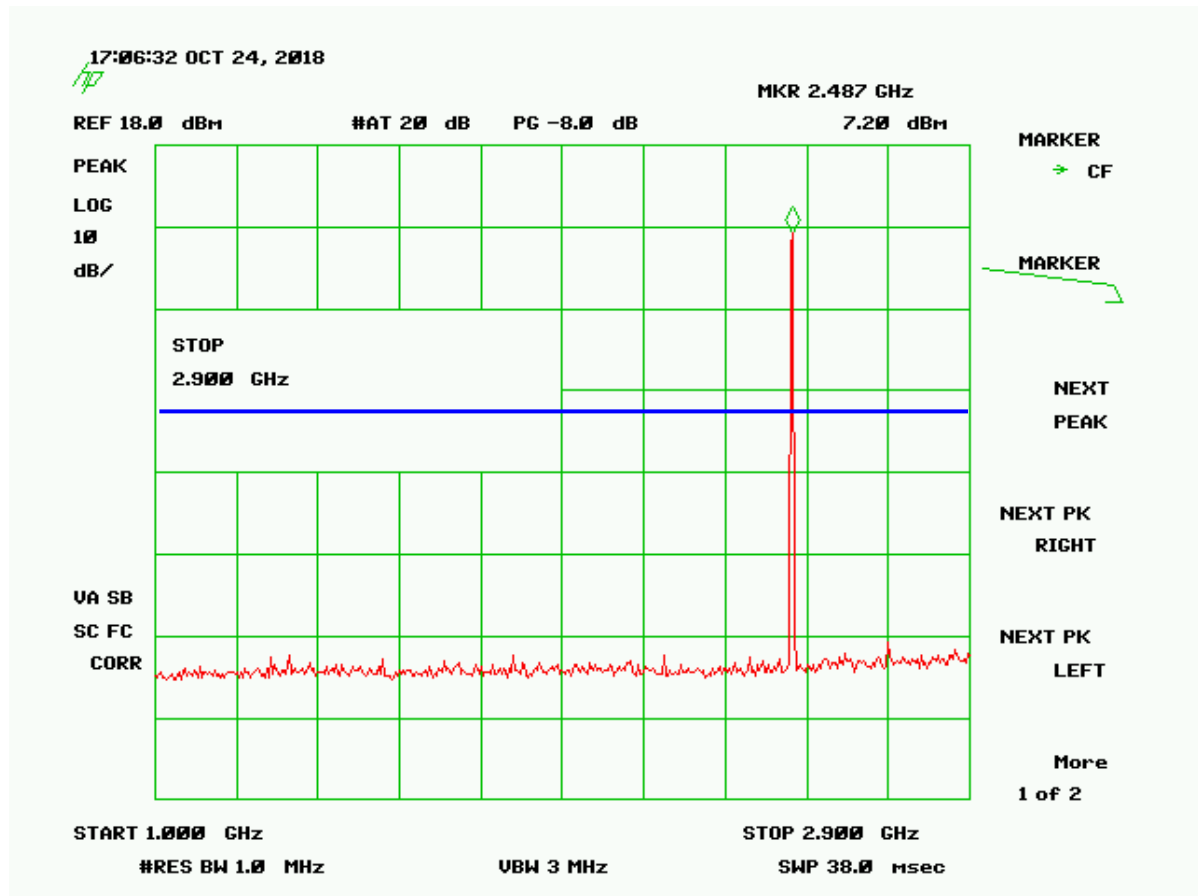


Figure 9. Conducted Spurious Emissions High, 1 GHz to 2.9 GHz

Note: Large emission seen is the fundamental emission.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 22-0116
 April 4, 2022
 Inventek Systems

ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

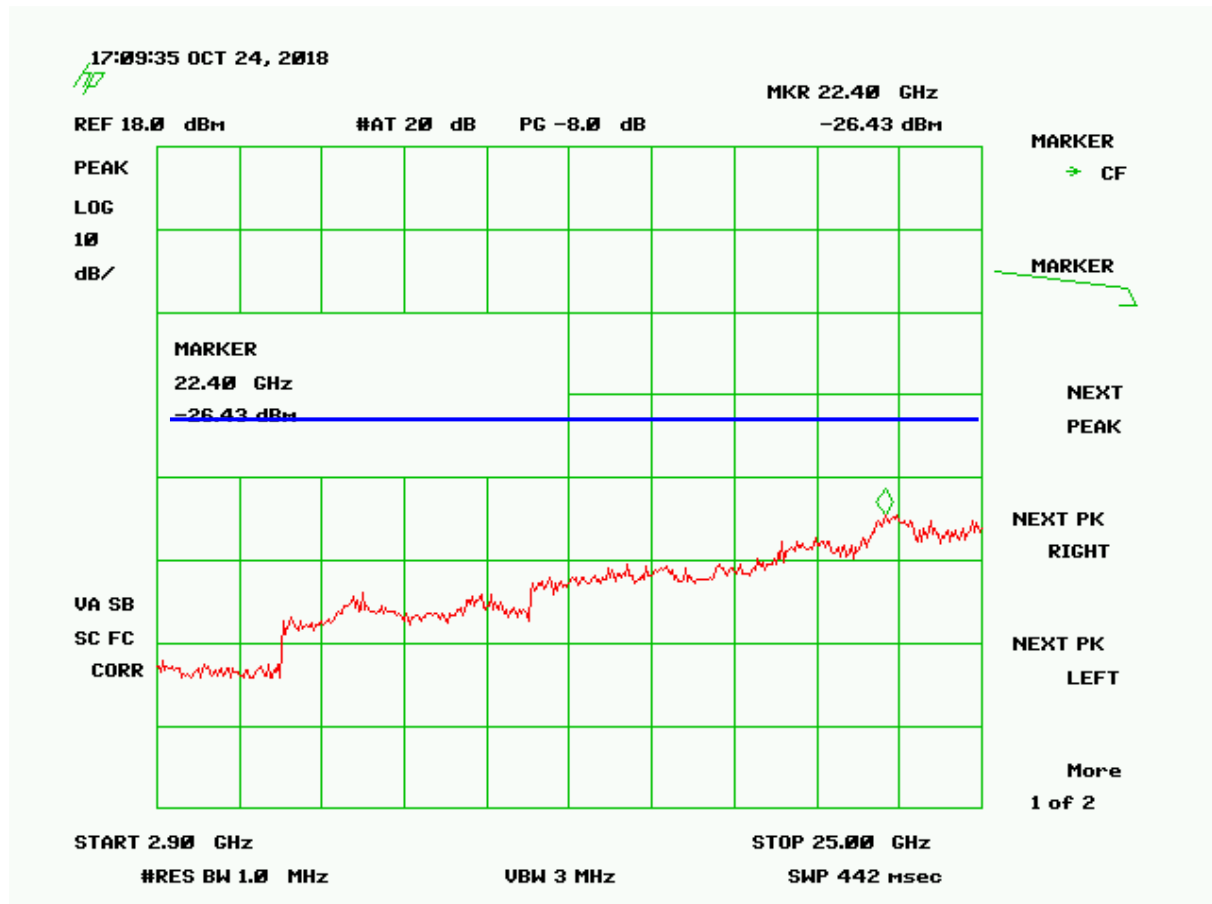


Figure 10. Conducted Spurious Emissions High, 2.9 GHz to 25 GHz

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

2.11 Band Edge Measurements (CFR 15.247(d), RSS-247, 5.5)

Band Edge measurements are made, following the guidelines in ANSI 63.10-2013 for the FHSS modulation, with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Radiated measurements are performed for each antenna to demonstrate compliance with the requirement of 15.247(d) that all emissions outside of the band edges be attenuated by at least 20 dB when compared to its highest in-band value (contained in a 100 kHz band).

To capture the band edge, set the Spectrum Analyzer frequency span large enough (usually around 2 MHz) to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. Radiated measurements are performed with RBW = 100 kHz. The VBW is set $\geq$ RBW. See figure and calculations below for more detail.

Note: Hopping mode was enabled during testing.

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 22-0116
 April 4, 2022
 Inventek Systems

ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

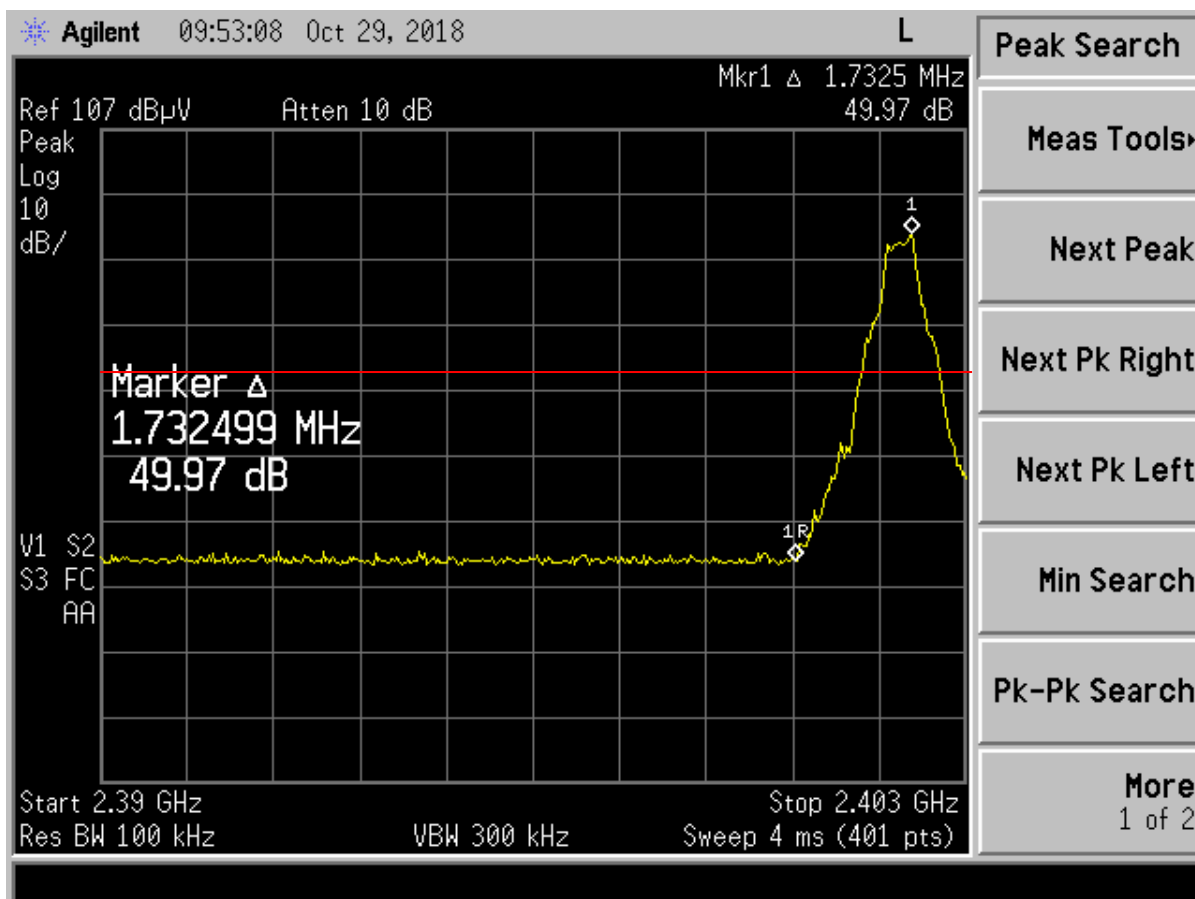


Figure 11. Band Edge Compliance, Low Channel Delta – Chip Antenna

Measured Delta (from Figure 11)	49.97	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	29.97	dB

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 22-0116
 April 4, 2022
 Inventek Systems

ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

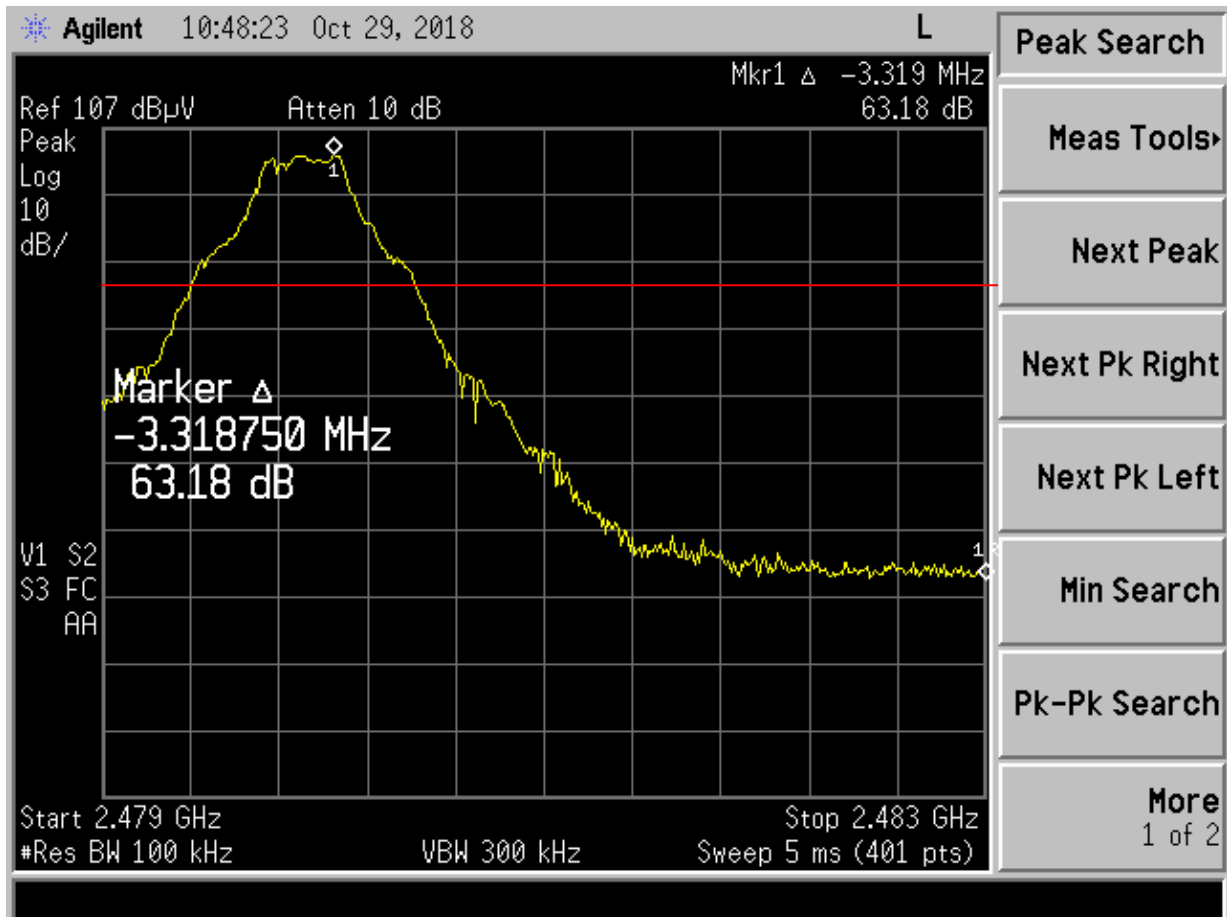


Figure 12. Band Edge Compliance, High Channel Delta – Chip Antenna

Measured Delta (from Figure 13)	63.18	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	43.18	dB

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 22-0116
 April 4, 2022
 Inventek Systems

ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

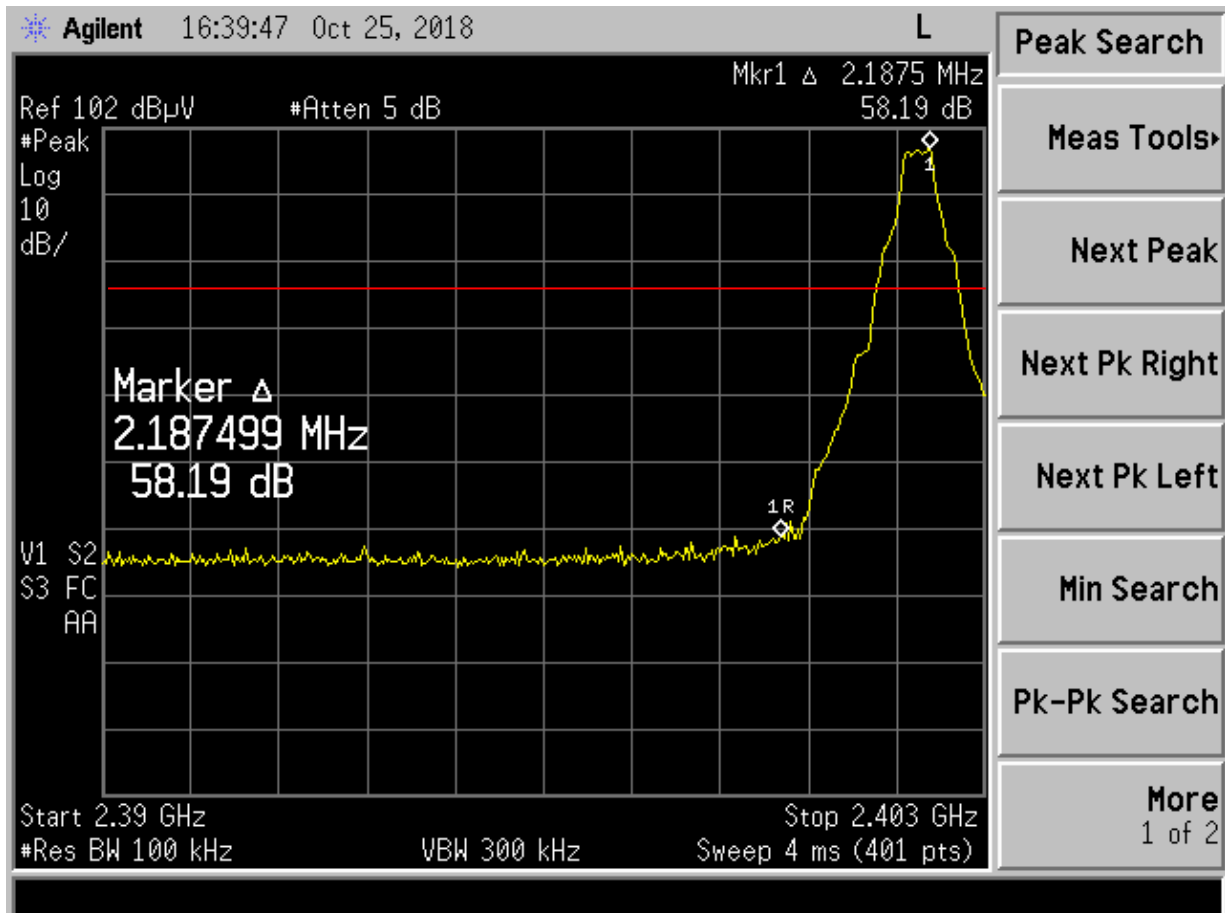


Figure 13. Band Edge Compliance, Low Channel Delta – External Antenna

Measured Delta (from Figure 11)	58.19	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	38.19	dB

US Tech Test Report:
 FCC ID:
 IC:
 Test Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 15/IC RSS Certification
 O7P-4343
 10147A-4343
 22-0116
 April 4, 2022
 Inventek Systems

ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

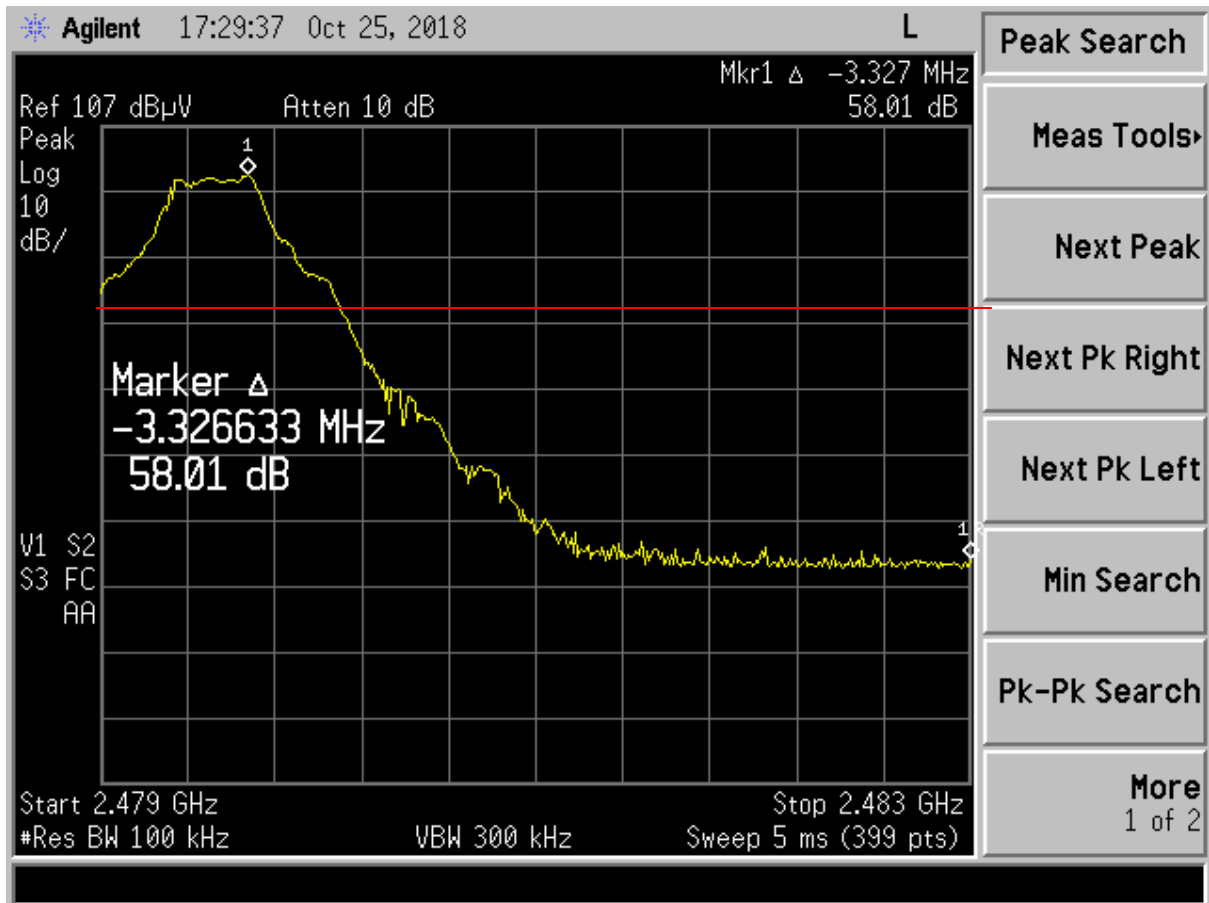


Figure 14. Band Edge Compliance, High Channel Delta – External Antenna

Measured Delta (from Figure 13)	58.01	dBm
Limit (20 dB from fundamental)	20.00	dBm
Band Edge Margin	38.01	dB

US Tech Test Report:
FCC ID:
IC:
Test Report Number:
Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification
O7P-4343
10147A-4343
22-0116
April 4, 2022
Inventek Systems
ISM4343-X including ISM4343-WBM-L151 and ISM4343-WB-L151

2.12 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2. A coverage factor of $k=2$ was used to give a level of confidence of approximately 95%.

2.12.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is ± 1.95 dB.

2.12.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.40 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is ± 5.19 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is ± 5.08 dB.

The data listed in this test report does have sufficient margin to negate the effects of uncertainty. Therefore, the EUT unconditionally meets this requirement.

3 Conclusion

The EUT meets the requirements of Part 15.247 and RSS-247 based on the test results presented in this test report.