



REPORT No.: SZ20070333W02

TEST REPORT

APPLICANT : Tiinlab Acoustic Technology Limited

PRODUCT NAME : omthing AirFree True Wireless
In-Ear Headphones

MODEL NAME : EO002BT

BRAND NAME : omthing

FCC ID : 2ASDIEO002BT

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2020-04-02

TEST DATE : 2020-04-20 to 2020-04-23

ISSUE DATE : 2020-08-04

Edited by:

Peng Mi

Peng Mi (Rapporteur)

Approved by:

Peng Huarui

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. The Channel Number and Frequency	5
1.4. Test Standards and Results	6
1.5. Environmental Conditions	7
2. 47 CFR Part 15C Requirements	8
2.1. Antenna requirement	8
2.2. Hopping Mechanism	9
2.3. Number of Hopping Frequency	10
2.4. Duty Cycle of Test Signal	15
2.5. Maximum Peak Conducted Output Power	17
2.6. Maximum Average Conducted Output Power	30
2.7. 20dB Bandwidth	33
2.8. Carried Frequency Separation	46
2.9. Time of Occupancy (Dwell time)	51
2.10. Conducted Spurious Emissions	64
2.11. Conducted Emission	89
2.12. Restricted Frequency Bands	91
2.13. Radiated Emission	110
Annex A Test Uncertainty	132
Annex B Testing Laboratory Information	133

Change History		
Version	Date	Reason for change
1.0	2020-08-04	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Tiinlab Acoustic Technology Limited
Applicant Address:	Tianliao Building 1403, Zone A Tianliao Industrial Park, Taoyuan Str., Nanshan Dist., Shenzhen, P.R. China
Manufacturer:	Tiinlab Acoustic Technology Limited
Manufacturer Address:	Tianliao Building 1403, Zone A Tianliao Industrial Park, Taoyuan Str., Nanshan Dist., Shenzhen, P.R. China

1.2. Equipment Under Test (EUT) Description

Product Name:	omthing AirFree True Wireless In-Ear Headphones	
Serial No.:	(N/A, marked #1 by test site)	
Hardware Version:	V2	
Software Version:	V1.0.0.3	
Equipment Type:	Bluetooth classic	
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
Operating Frequency Range:	2402MHz – 2480MHz	
Bluetooth Version:	5.0	
Antenna Type:	Chip Antenna	
Antenna Gain:	Left: -2.5dBi Right: -2.3dBi	
Accessory Information:	Battery cell (Headphones)	
	Brand Name:	N/A
	Model No.:	ICR1054
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	40mAh
	Rated Voltage:	3.7V
	Charge Limit:	4.2 V



Accessory Information:	Battery (Charging Case)	
	Brand Name:	Great Power
	Model No.:	GSP581943
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	550mAh
	Rated Voltage:	3.7V
	Charge Limit:	4.2 V
	Charging Case	
	Brand Name:	omthing
	Model No.:	EO002BT
	Serial No.:	(N/A, marked #1 by test site)
	Rated Input:	5V $\Rightarrow$ 1.0A
	Rated Output:	5V $\Rightarrow$ 0.15A

Note 1: We use the dedicated software to control the EUT into the test mode, and then use MT8852B base station to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3.The Channel Number and Frequency

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The Lowest Channel 0, Middle 39 and Highest 78 were selected for test in the report.



1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a)1 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Apr 22, 2020	Ouyang Feng	PASS	No deviation
4	N/A	Duty Cycle	Apr 22, 2020	Ouyang Feng	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Apr 22, 2020	Ouyang Feng	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Apr 22, 2020	Ouyang Feng	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Apr 23, 2020	Ouyang Feng	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Apr 22, 2020	Ouyang Feng	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Apr 23, 2020	Ouyang Feng	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission	Apr 22, 2020	Ouyang Feng	PASS	No deviation
11	15.207	Conducted Emission	N/A	N/A	N/A ^{Note1}	N/A
12	15.247(d)	Restricted Frequency Bands	Apr 21, 2020	Gao Jianrou	PASS	No deviation



13	15.209, 15.247(d)	Radiated Emission	Apr 22, 2020	Gao Jianrou	PASS	No deviation
Note 1: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB558074 D01 v05r02. Note 3: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 2.0dB means the cable loss is 2.0dB. Note 4: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.						

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2.47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



2.2. Hopping Mechanism

2.2.1. Requirement

According to FCC §15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC §15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

2.2.2. Result: Compliant

The hopping mechanism of the EUT is in compliance with the document "**Bluetooth core specification v5.1**".


2.3. Number of Hopping Frequency

2.3.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.3.2. Test Description

Test Setup:

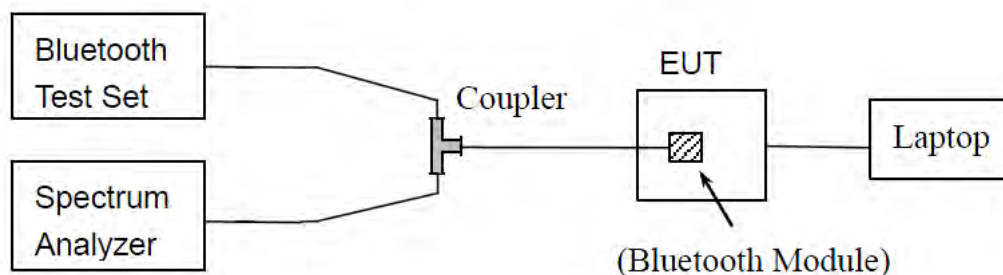

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.3.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize



2.3.4. Test Result


The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

Left



A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS

B. Test Plots:

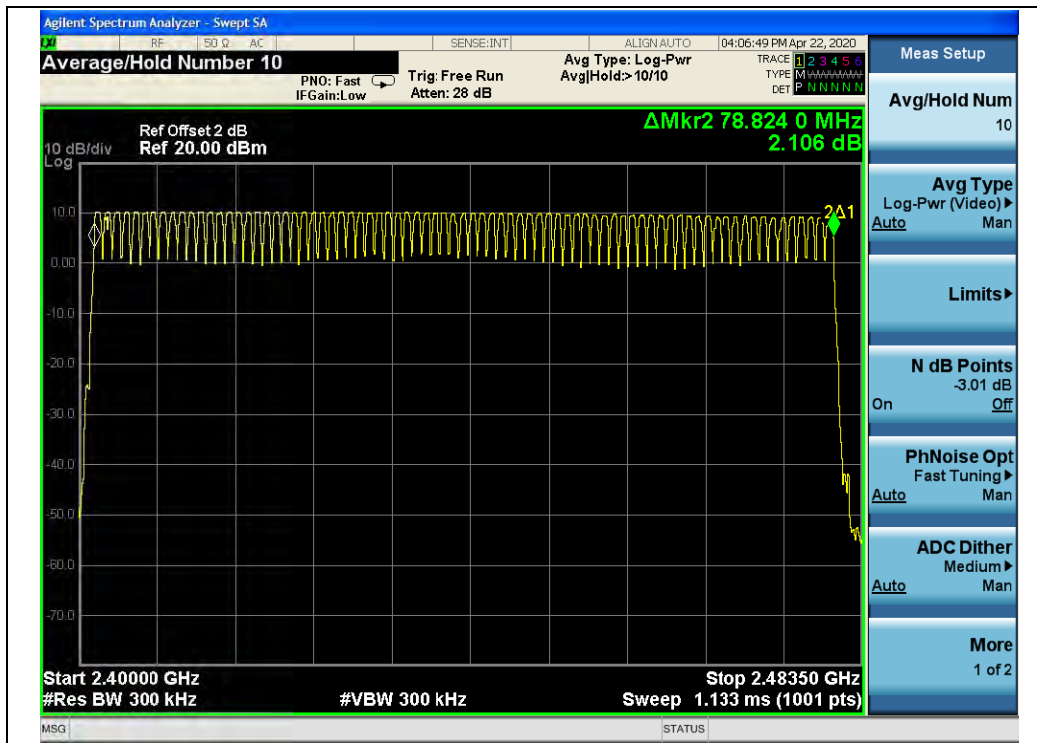

(GFSK)

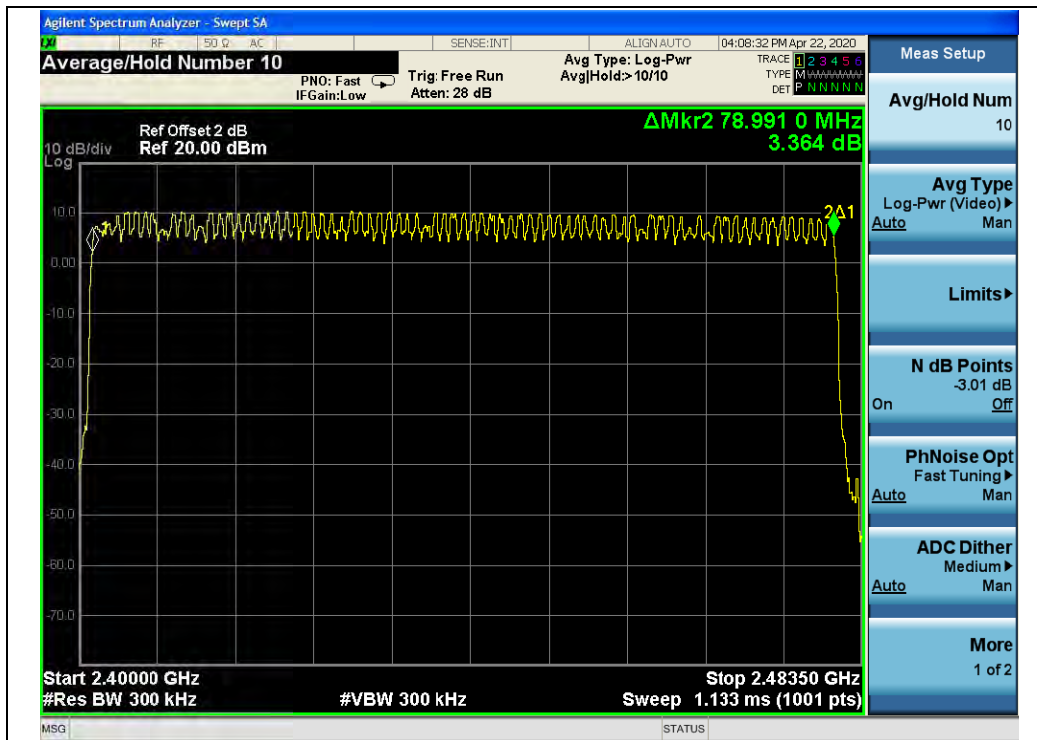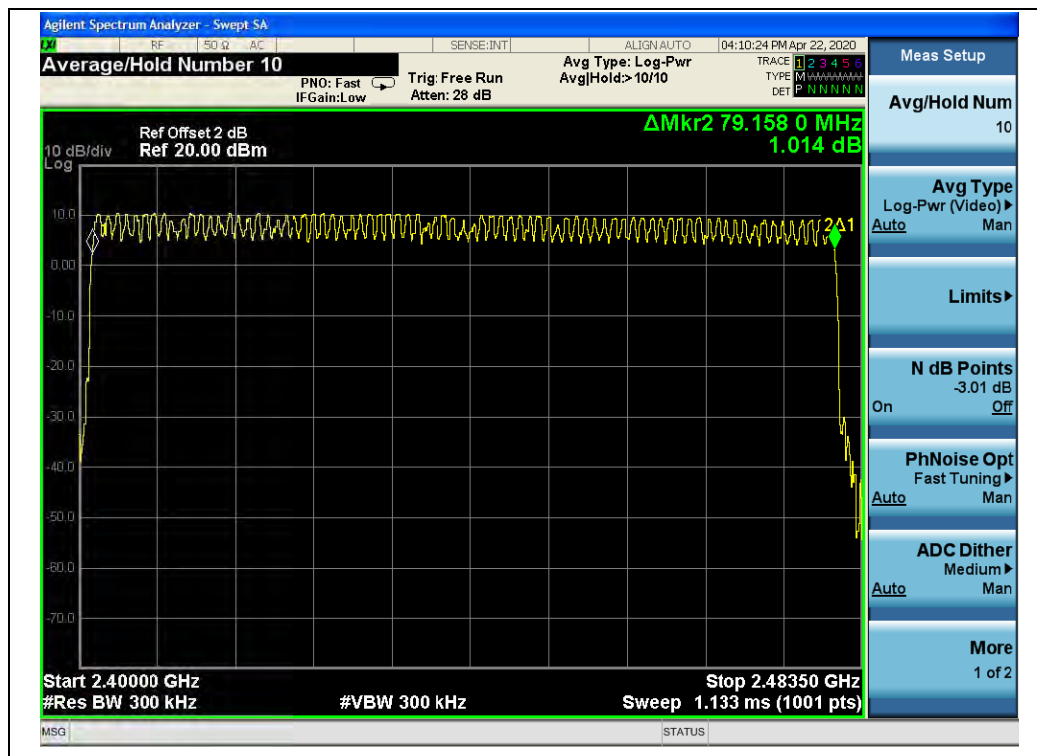 $(\pi/4\text{-DQPSK})$  (8- DPSK)



Right



A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS

B. Test Plots:



(GFSK)

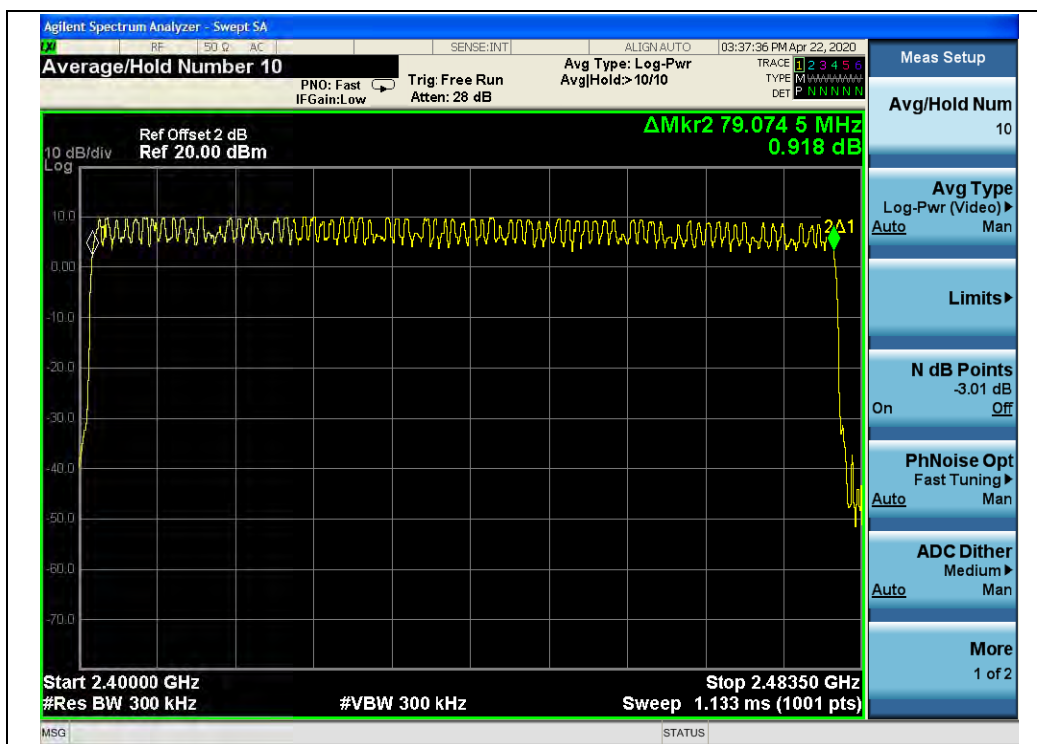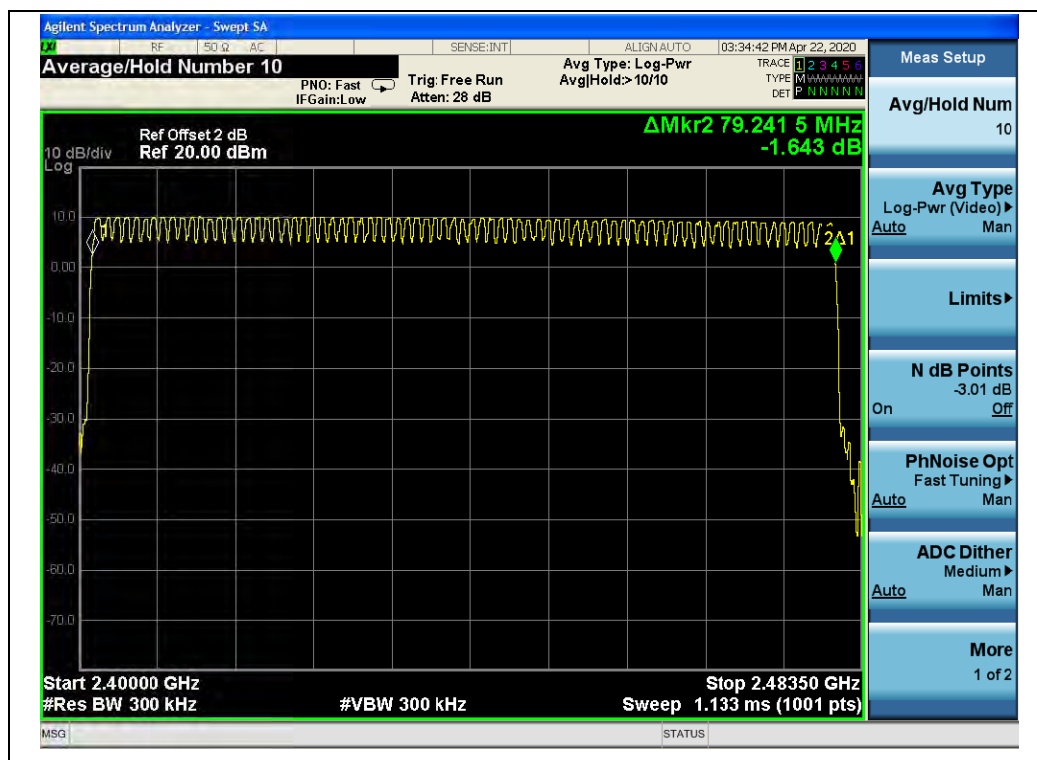 $(\pi/4\text{-DQPSK})$ 

(8- DPSK)

2.4. Duty Cycle of Test Signal


2.4.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.4.2. Test Description

Test Setup:

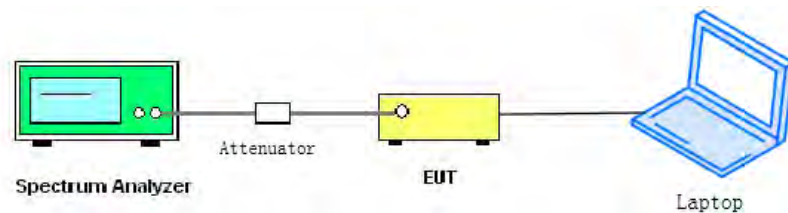

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

**2.4.3. Test Result****Left**

Test Mode	Duty Cycle (%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
GFSK	58.00	2.37
$\pi/4$ -DQPSK	57.88	2.37
8-DPSK	59.68	2.24

Right

Test Mode	Duty Cycle (%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
GFSK	57.88	2.37
$\pi/4$ -DQPSK	58.00	2.37
8-DPSK	58.00	2.37


2.5. Maximum Peak Conducted Output Power

2.5.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.5.2. Test Description

Test Setup:

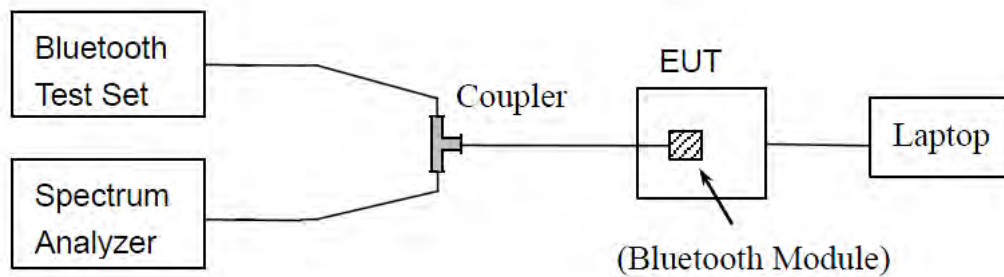

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.



2.5.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module.


Left

GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	10.10	0.010	20.96	0.125	PASS
39	2441	9.88	0.010			PASS
78	2480	9.07	0.008			PASS

B. Test Plots:

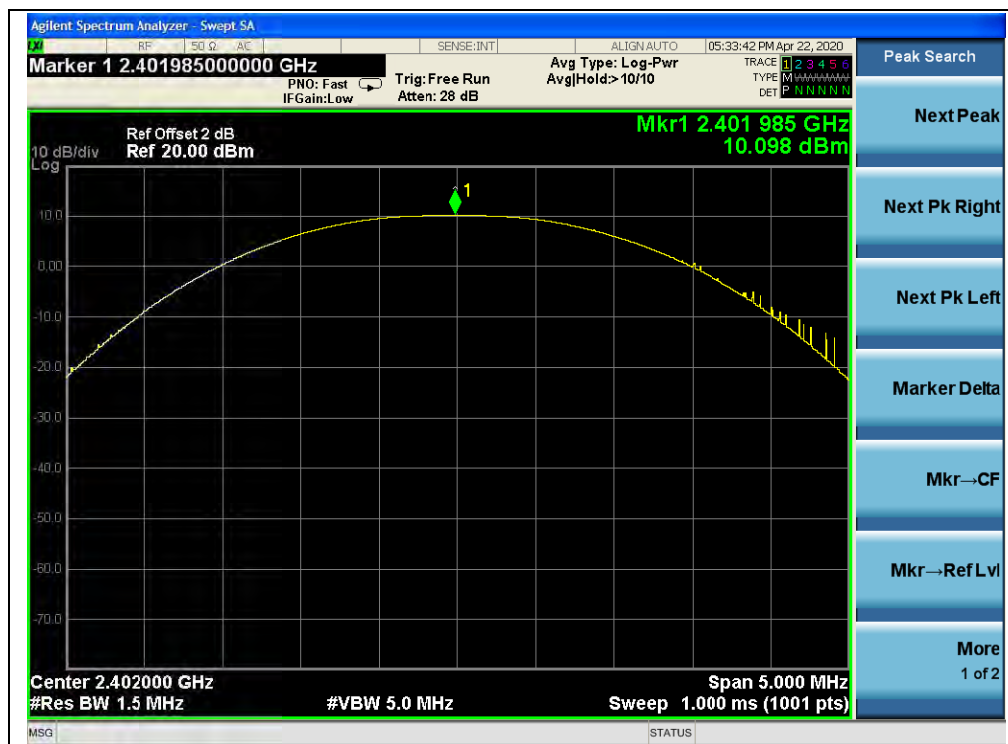

(GFSK, Channel 0, 2402MHz)



(GFSK, Channel 39, 2441MHz)



(GFSK, Channel 78, 2480MHz)




$\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	10.15	0.010	20.96	0.125	PASS
39	2441	9.89	0.010			PASS
78	2480	9.04	0.008			PASS

B. Test Plots:

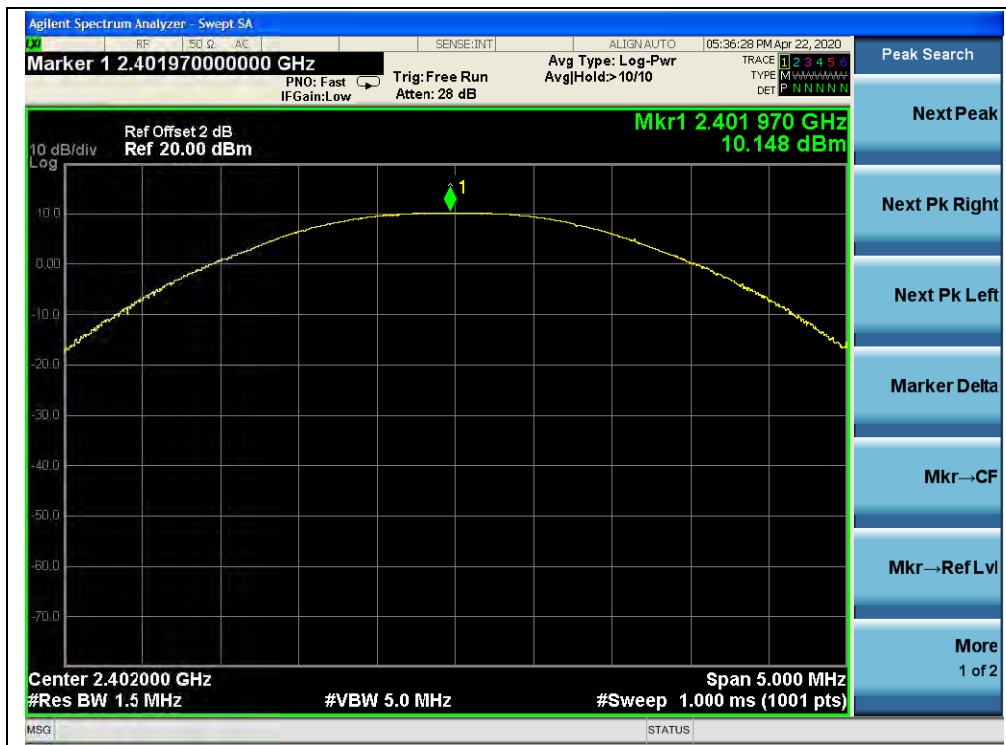

($\pi/4$ -DQPSK, Channel 0, 2402MHz)

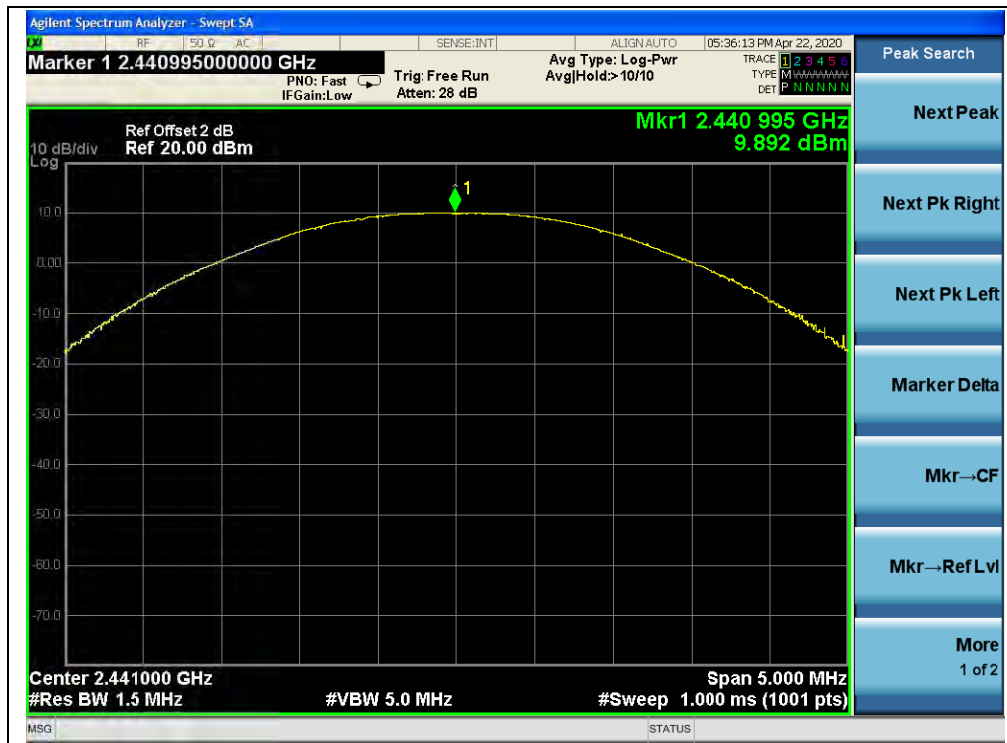


(π/4-DQPSK, Channel 39, 2441MHz)




(π/4-DQPSK, Channel 78, 2480MHz)

**8-DPSK Mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	10.12	0.010	20.96	0.125	PASS
39	2441	9.89	0.010			PASS
78	2480	9.06	0.008			PASS

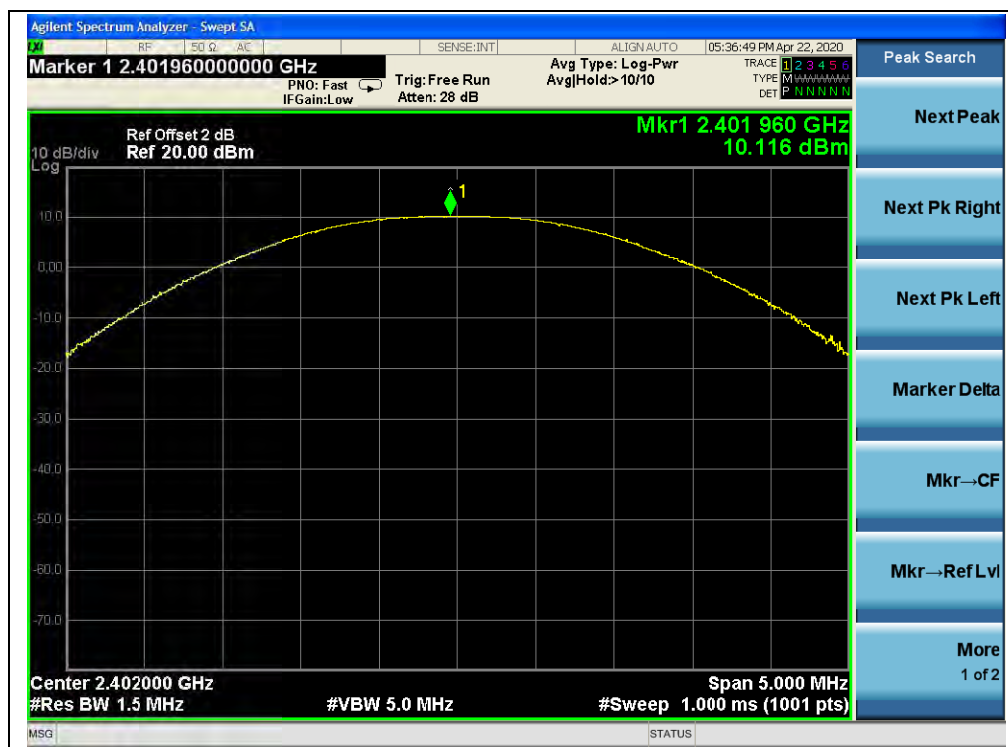B. Test Plots:

(8-DPSK, Channel 0, 2402MHz)

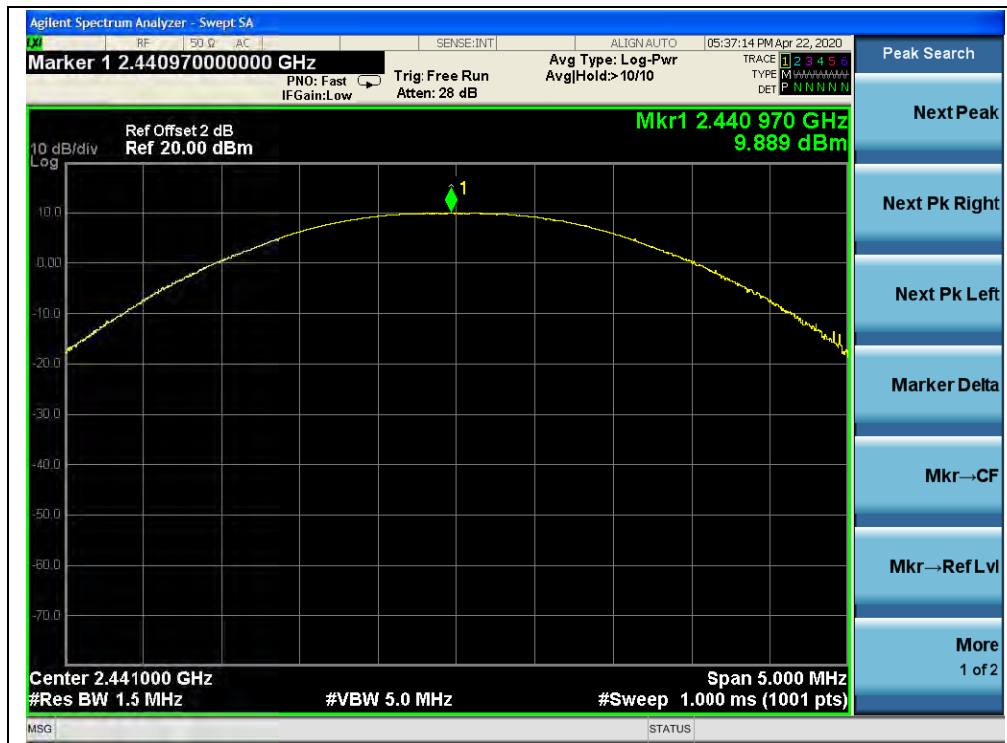

(8-DPSK, Channel 39, 2441MHz)



(8-DPSK, Channel 78, 2480MHz)



Right

GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	9.86	0.010	20.96	0.125	PASS
39	2441	9.64	0.009			PASS
78	2480	8.78	0.008			PASS

B. Test Plots:



(GFSK, Channel 0, 2402MHz)



(GFSK, Channel 39, 2441MHz)



(GFSK, Channel 78, 2480MHz)




$\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	9.93	0.010	20.96	0.125	PASS
39	2441	9.69	0.009			PASS
78	2480	8.78	0.008			PASS


B. Test Plots:

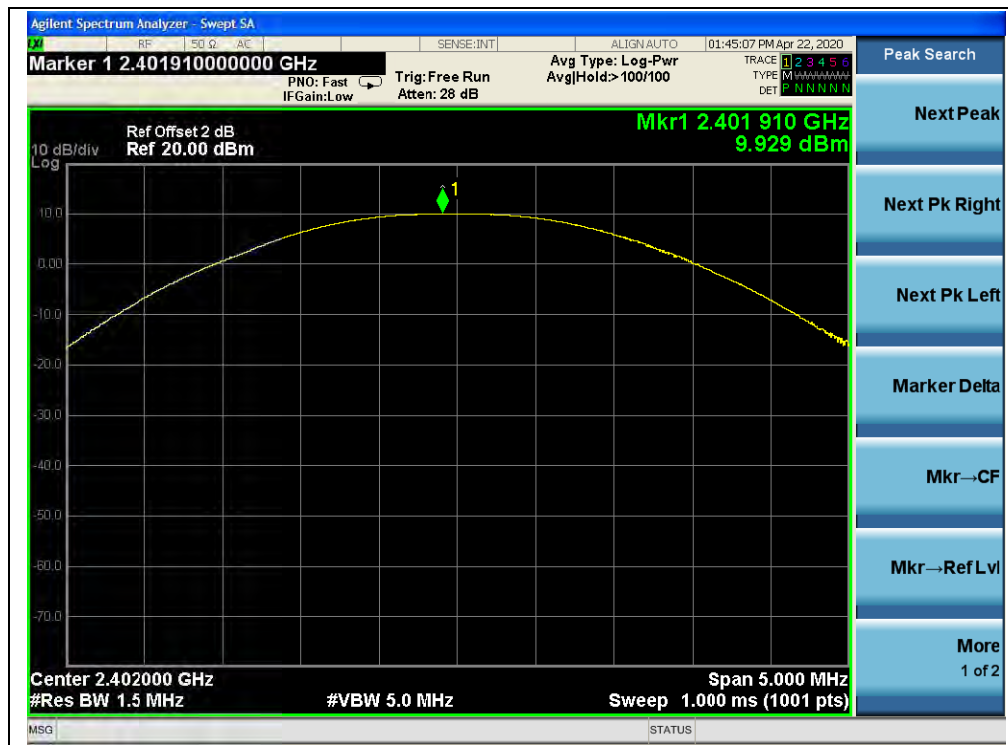

($\pi/4$ -DQPSK, Channel 0, 2402MHz)



(π/4-DQPSK, Channel 39, 2441MHz)

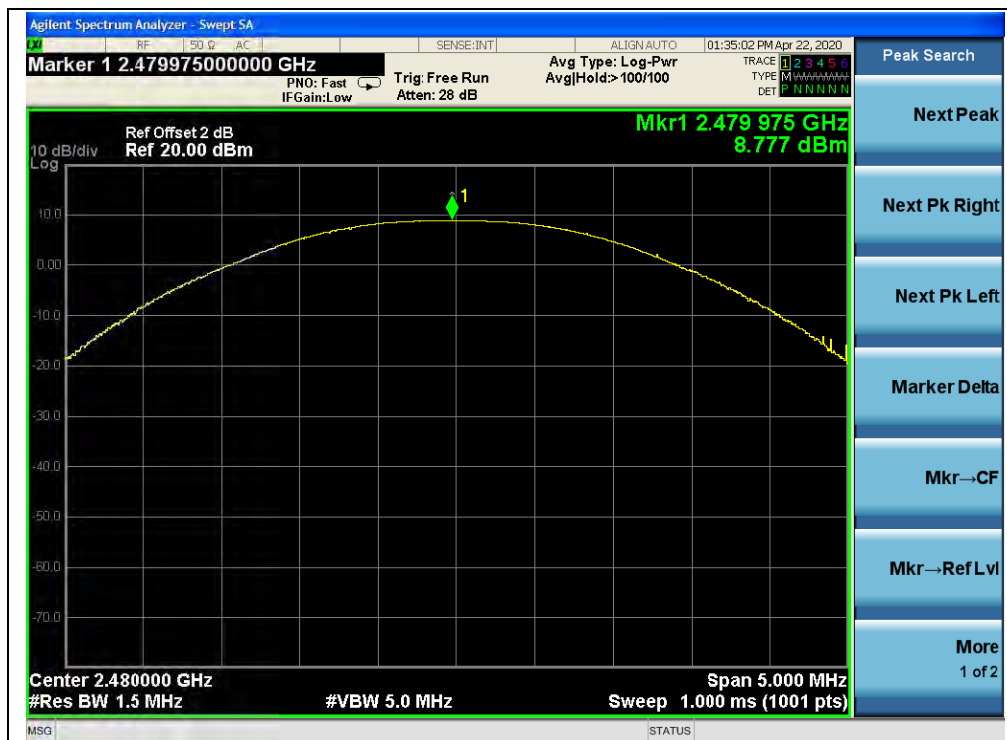

(π/4-DQPSK, Channel 78, 2480MHz)




8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	9.89	0.010	20.96	0.125	PASS
39	2441	9.66	0.009			PASS
78	2480	8.80	0.008			PASS

B. Test Plots:

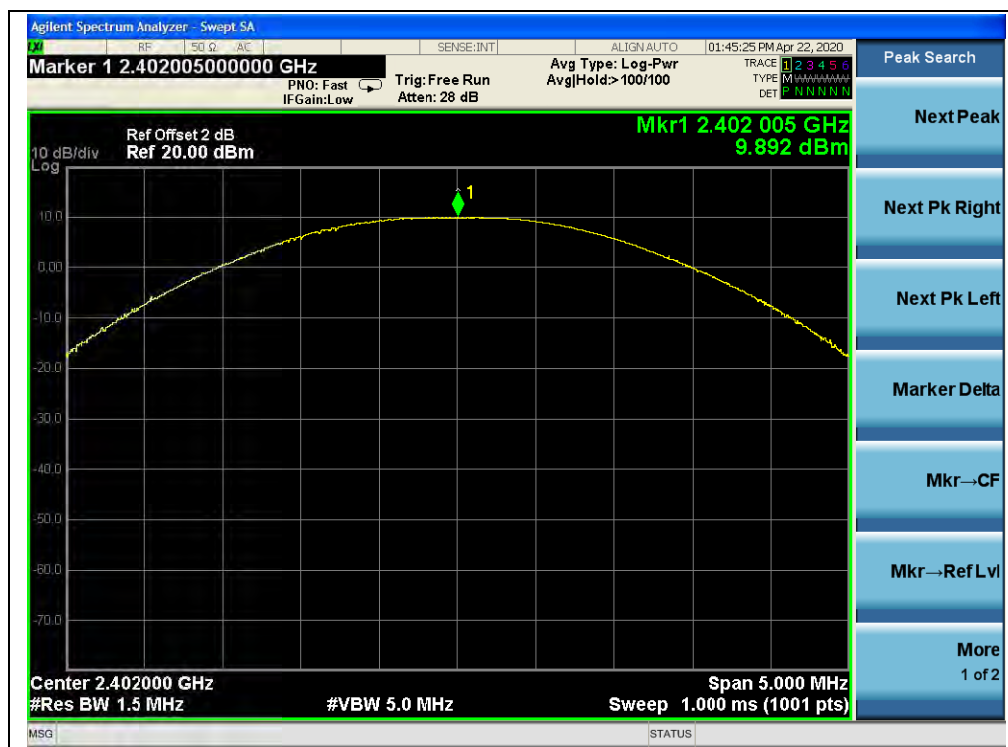

(8-DPSK, Channel 0, 2402MHz)



(8-DPSK, Channel 39, 2441MHz)



(8-DPSK, Channel 78, 2480MHz)

2.6. Maximum Average Conducted Output Power


2.6.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

2.6.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

Test Setup:

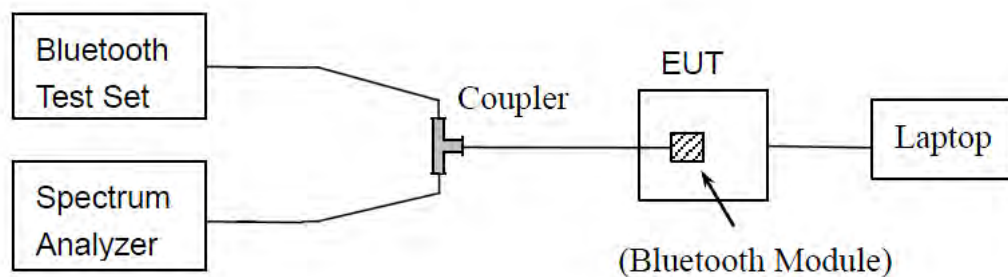

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.6.3. Test procedure

KDB 558074 Section 8.3.2 was used in order to prove compliance.



2.6.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module.

Left

GFSK Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
				dBm		dBm	W	
0	2402	7.67	2.37	10.04	0.010	20.96	0.125	PASS
39	2441	7.32		9.69	0.009			PASS
78	2480	6.58		8.95	0.008			PASS

$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
				dBm		dBm	W	
0	2402	4.84	2.37	7.21	0.005	20.96	0.125	PASS
39	2441	4.30		6.67	0.005			PASS
78	2480	3.76		6.13	0.004			PASS

8-DPSK Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
				dBm		dBm	W	
0	2402	4.81	2.24	7.05	0.005	20.96	0.125	PASS
39	2441	4.77		7.01	0.005			PASS
78	2480	3.70		5.94	0.004			PASS



Right

GFSK Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
				dBm		dBm	W	dBm
0	2402	7.07	2.37	9.44	0.009	20.96	0.125	PASS
39	2441	7.14		9.51	0.009			PASS
78	2480	6.25		8.62	0.007			PASS

 $\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
				dBm		dBm	W	dBm
0	2402	4.38	2.37	6.75	0.005	20.96	0.125	PASS
39	2441	4.28		6.65	0.005			PASS
78	2480	3.71		6.08	0.004			PASS

8-DPSK Mode

Channel	Frequency (MHz)	Average Power				Limit		Verdict
		Measured	Duty Factor	Duty factor Calculated				
				dBm		dBm	W	dBm
0	2402	4.25	2.37	6.62	0.005	20.96	0.125	PASS
39	2441	4.43		6.80	0.005			PASS
78	2480	3.10		5.47	0.004			PASS


2.7.20dB Bandwidth

2.7.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.7.2. Test Description

Test Setup:

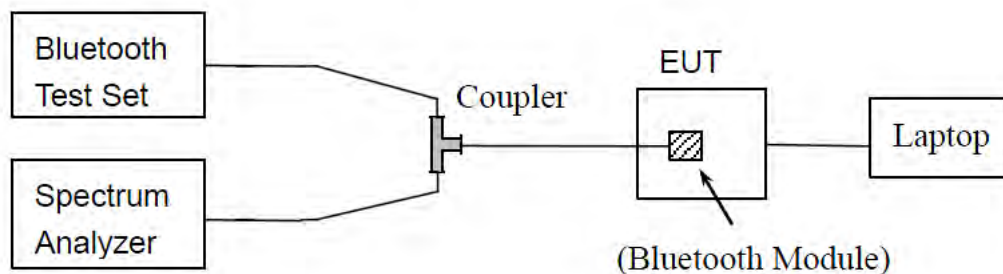

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold



2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

Left

GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.044	PASS
39	2441	1.024	PASS
78	2480	1.032	PASS

B. Test Plots:



(GFSK, Channel 0, 2402MHz)



(GFSK, Channel 39, 2441MHz)



(GFSK, Channel 78, 2480MHz)



$\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.196	PASS
39	2441	1.216	PASS
78	2480	1.196	PASS

B. Test Plots:



($\pi/4$ -DQPSK, Channel 0, 2402MHz)



(π/4-DQPSK, Channel 39, 2441MHz)



(π/4-DQPSK, Channel 78, 2480MHz)

**8-DPSK Mode****A. Test Verdict:**

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.248	PASS
39	2441	1.236	PASS
78	2480	1.234	PASS

B. Test Plots:

(8-DPSK, Channel 0, 2402MHz)



(8-DPSK, Channel 39, 2441MHz)



(8-DPSK, Channel 78, 2480MHz)



Right
GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.044	PASS
39	2441	1.019	PASS
78	2480	1.042	PASS

B. Test Plots:



(GFSK, Channel 0, 2402MHz)



(GFSK, Channel 39, 2441MHz)



(GFSK, Channel 78, 2480MHz)

 $\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.188	PASS
39	2441	1.191	PASS
78	2480	1.189	PASS

B. Test Plots:



(π/4-DQPSK, Channel 0, 2402MHz)



(π/4-DQPSK, Channel 39, 2441MHz)



(π/4-DQPSK, Channel 78, 2480MHz)



8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.228	PASS
39	2441	1.235	PASS
78	2480	1.241	PASS

B. Test Plots:



(8-DPSK, Channel 0, 2402MHz)



(8-DPSK, Channel 39, 2441MHz)



(8-DPSK, Channel 78, 2480MHz)


2.8. Carried Frequency Separation

2.8.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.8.2. Test Description

Test Setup:

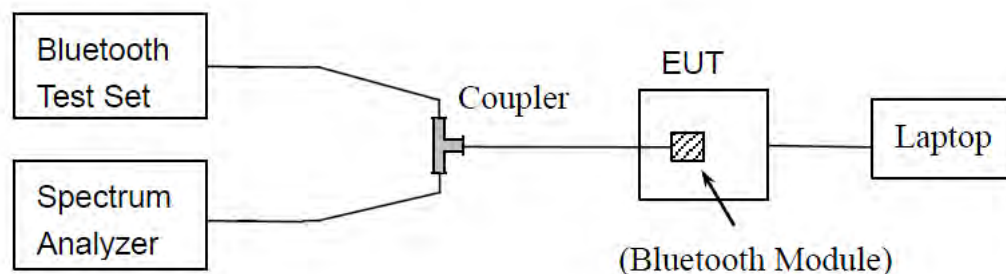

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.8.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

2.8.4. Test Result


The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed below), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 2.4.4), whichever is greater. So, the verdict is PASSING.

Left

Test Mode	Measured Channel Numbers	Carried Frequency Separation	20dB bandwidth (MHz)	Min. Limit	Verdict
GFSK	39 and 40	0.996	0.940	two-thirds of the 20dB bandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	0.966	1.154		PASS
8-DPSK	39 and 40	0.897	1.153		PASS



(GFSK)

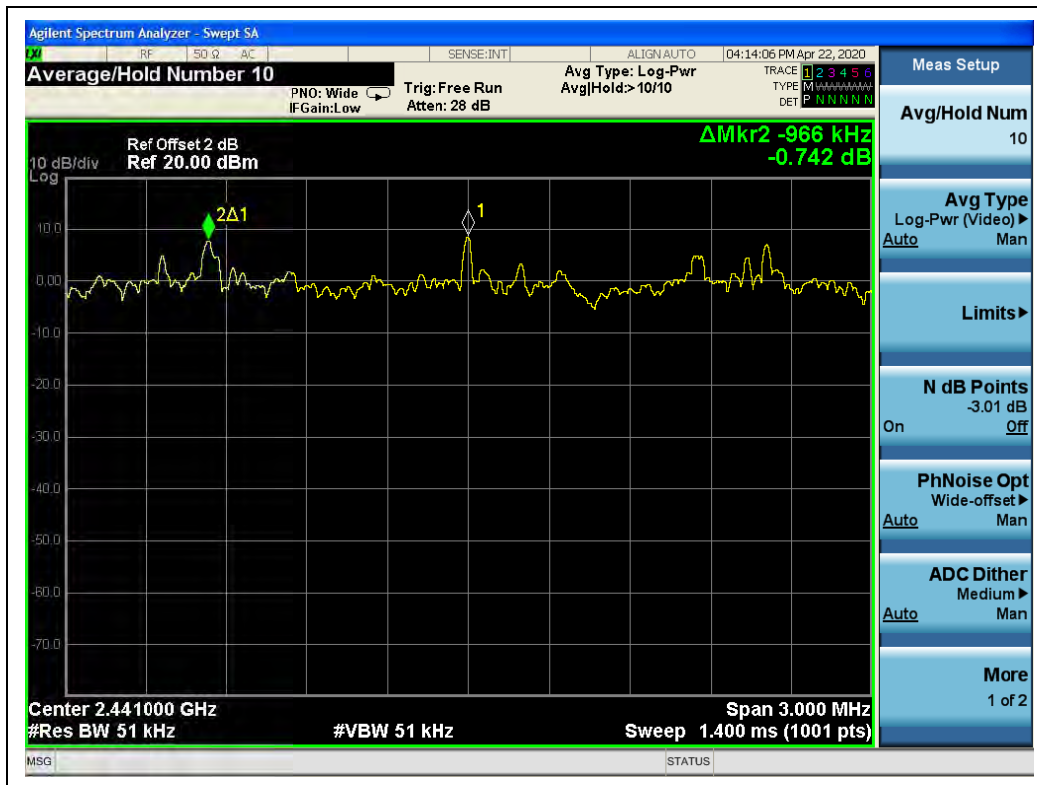 $(\pi/4\text{-DQPSK})$ 

(8-DPSK)



Right

Test Mode	Measured Channel Numbers	Carried Frequency Separation	20dB bandwidth (MHz)	Min. Limit	Verdict
GFSK	39 and 40	1.038	0.943	two-thirds of the 20dB bandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	0.996	1.150		PASS
8-DPSK	39 and 40	1.041	1.154		PASS



(GFSK)



($\pi/4$ -DQPSK)



(8-DPSK)


2.9. Time of Occupancy (Dwell time)

2.9.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.9.2. Test Description

Test Setup:

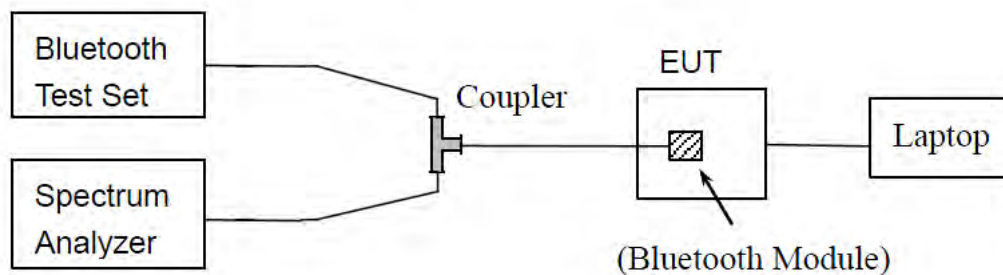

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.9.3. Test Procedure

Option 1:

DH1: Dwell time equal to Pulse time (ms) * (1600 / 2 / 79) * 31.6 Millisecond
DH3: Dwell time equal to Pulse time (ms) * (1600 / 4 / 79) * 31.6 Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (1600 / 6 / 79) * 31.6 Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) * (800 / 2 / 20) * (0.4 * 20) Millisecond
DH3: Dwell time equal to Pulse time (ms) * (800 / 4 / 20) * (0.4 * 20) Millisecond
DH5: Dwell time equal to Pulse Time (ms) * (800 / 6 / 20) * (0.4 * 20) Millisecond




Left

GFSK Mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.380	121.60	60.80	0.4	PASS
DH3	1.640	262.40	131.20		PASS
DH5	2.880	307.20	153.60		PASS


B. Test Plots:

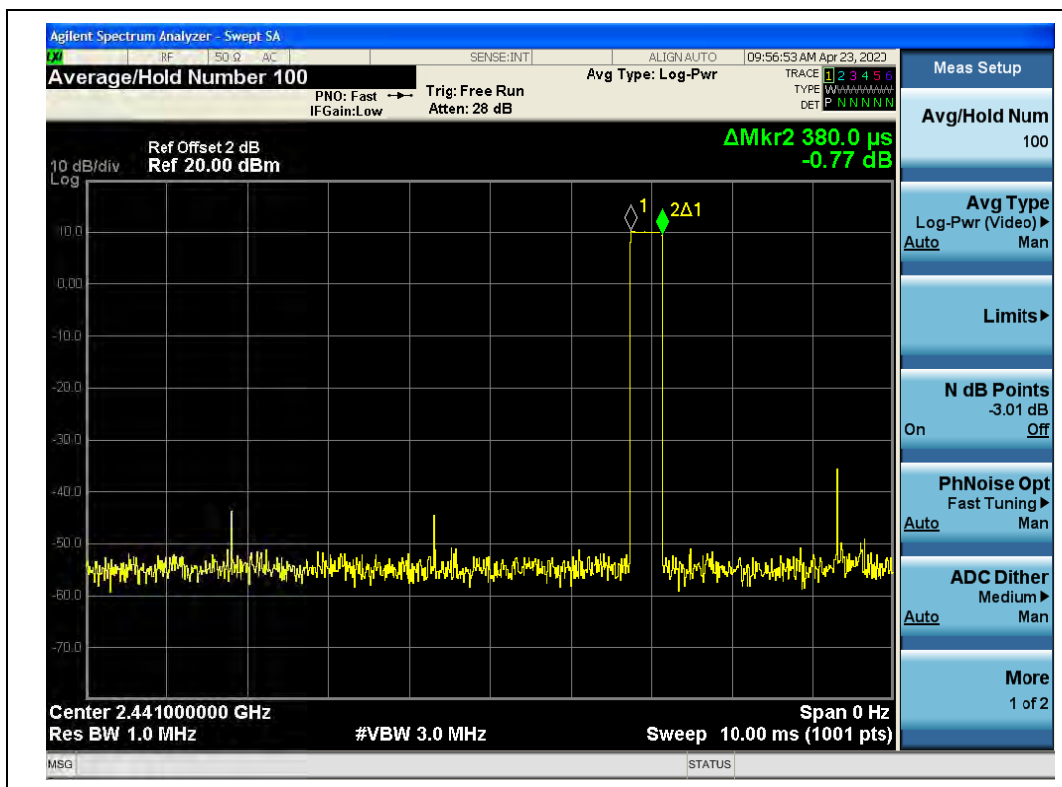

(DH1, GFSK)

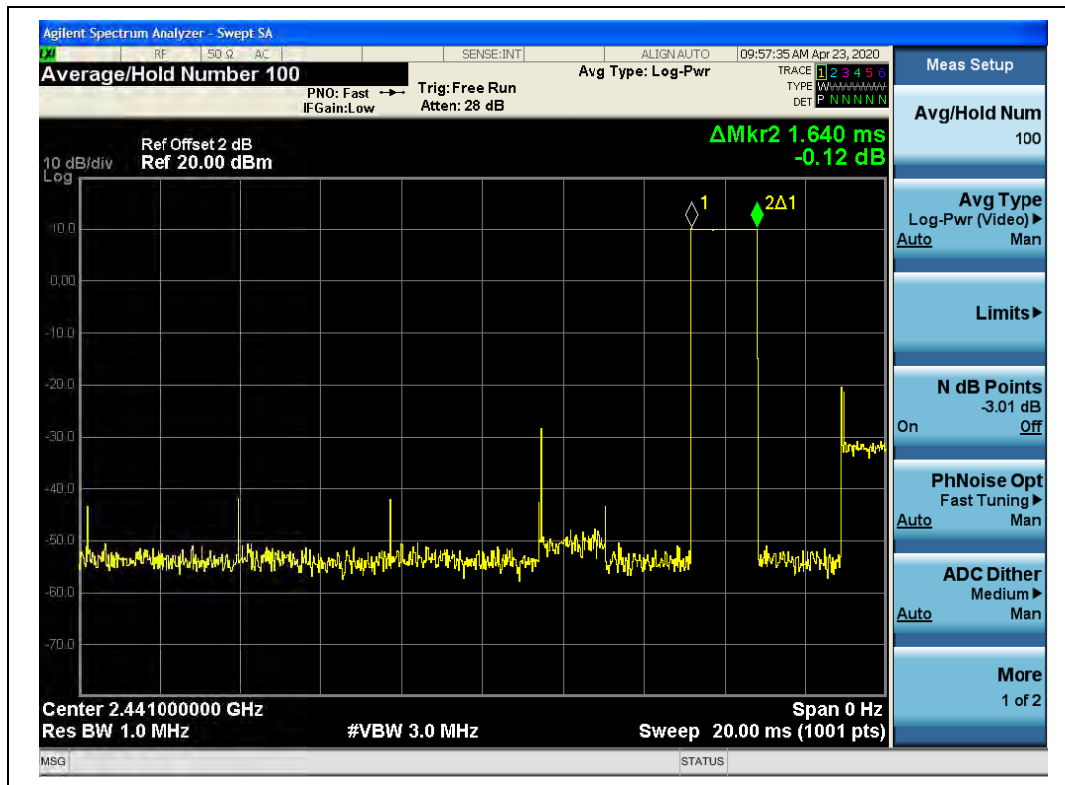

(DH3, GFSK)

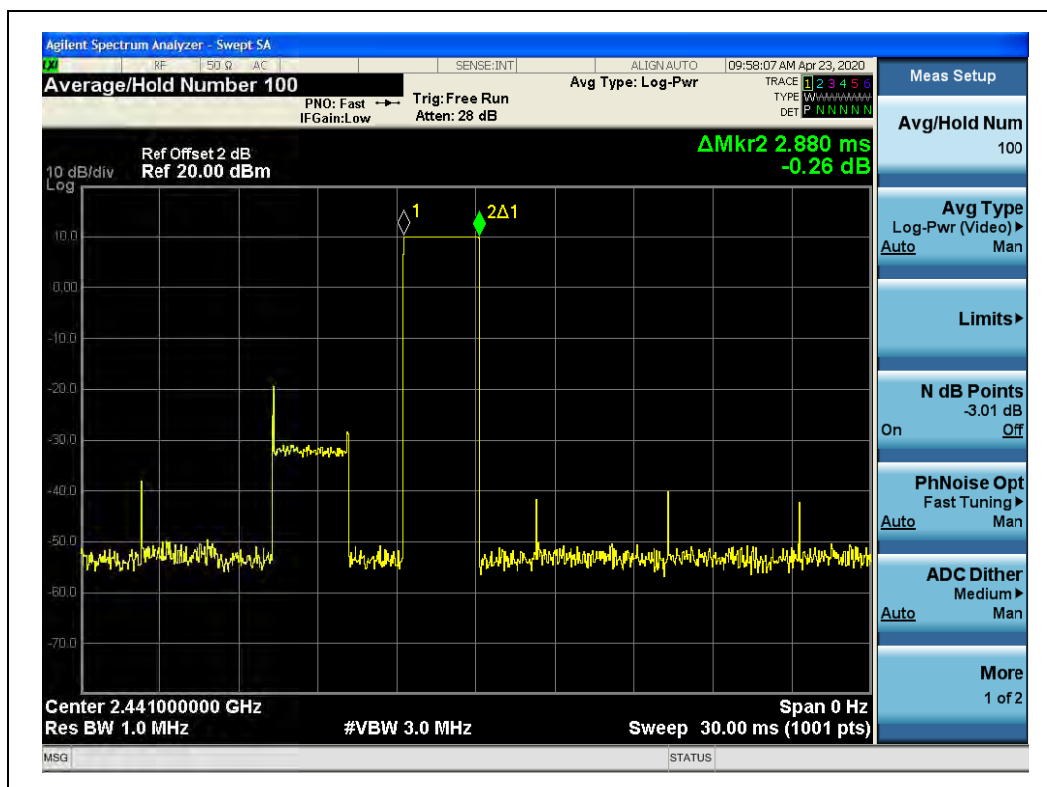

(DH5, GFSK)






$\pi/4$ -DQPSK Mode

A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.390	124.80	62.40	0.4	PASS
DH3	1.640	262.40	131.20		PASS
DH5	2.910	310.40	155.20		PASS

B. Test Plots:

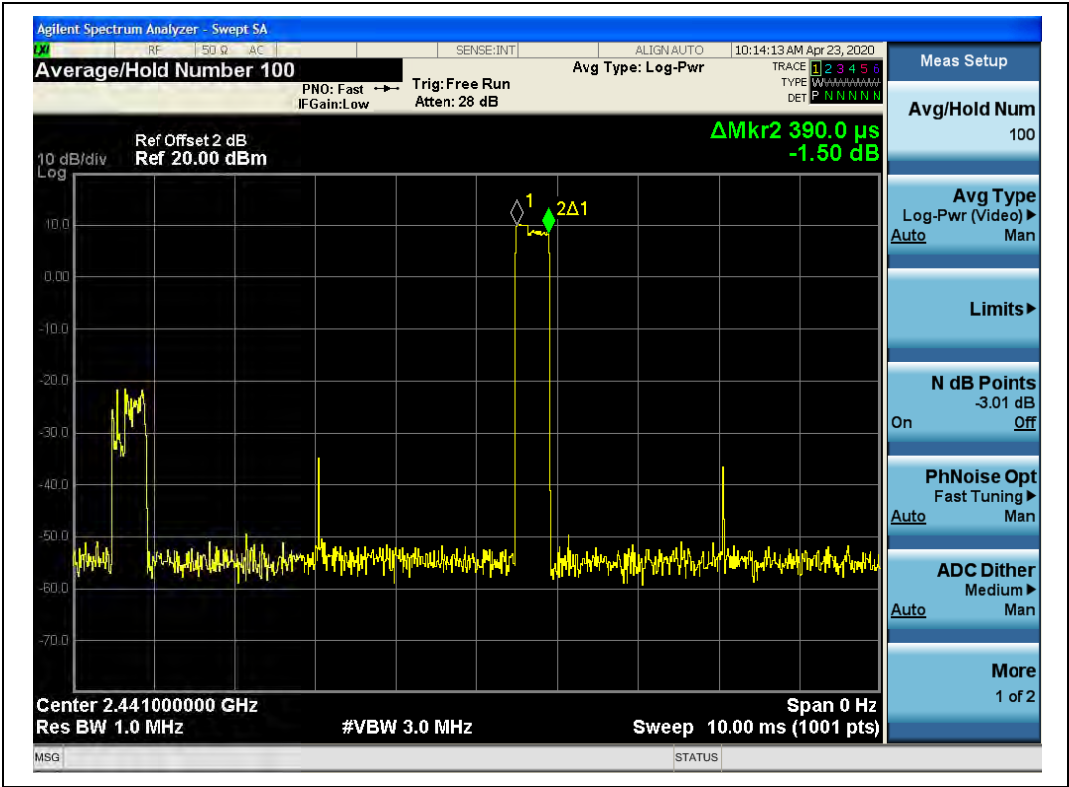(DH1, $\pi/4$ -DQPSK)

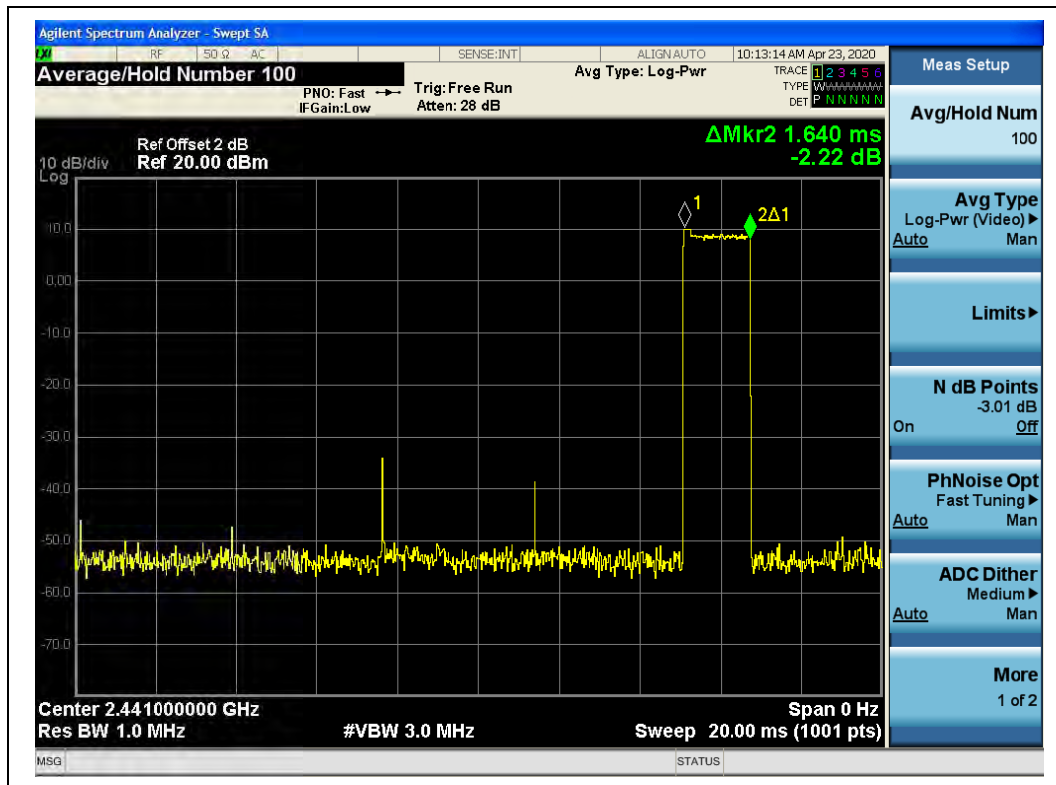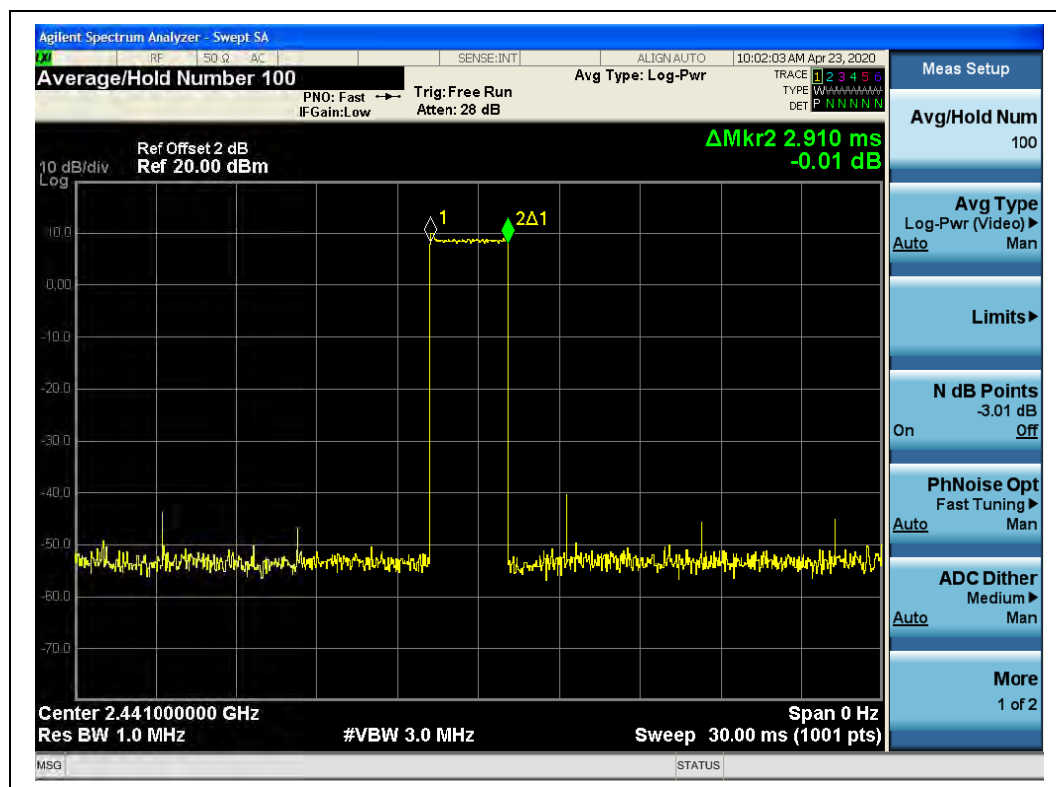(DH3, $\pi/4$ -DQPSK)(DH5, $\pi/4$ -DQPSK)




8-DPSK mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.390	124.80	62.40	0.4	PASS
DH3	1.640	262.40	131.20		PASS
DH5	2.910	310.40	155.20		PASS


B. Test Plots:

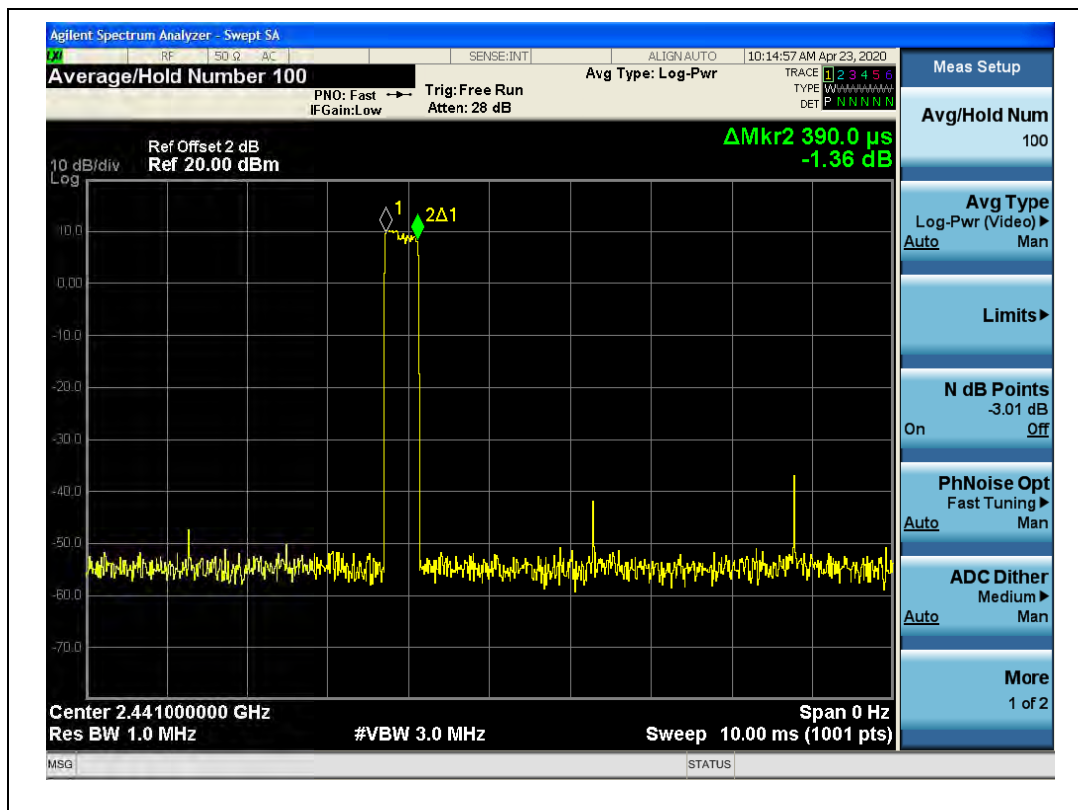

(DH1, 8-DPSK)

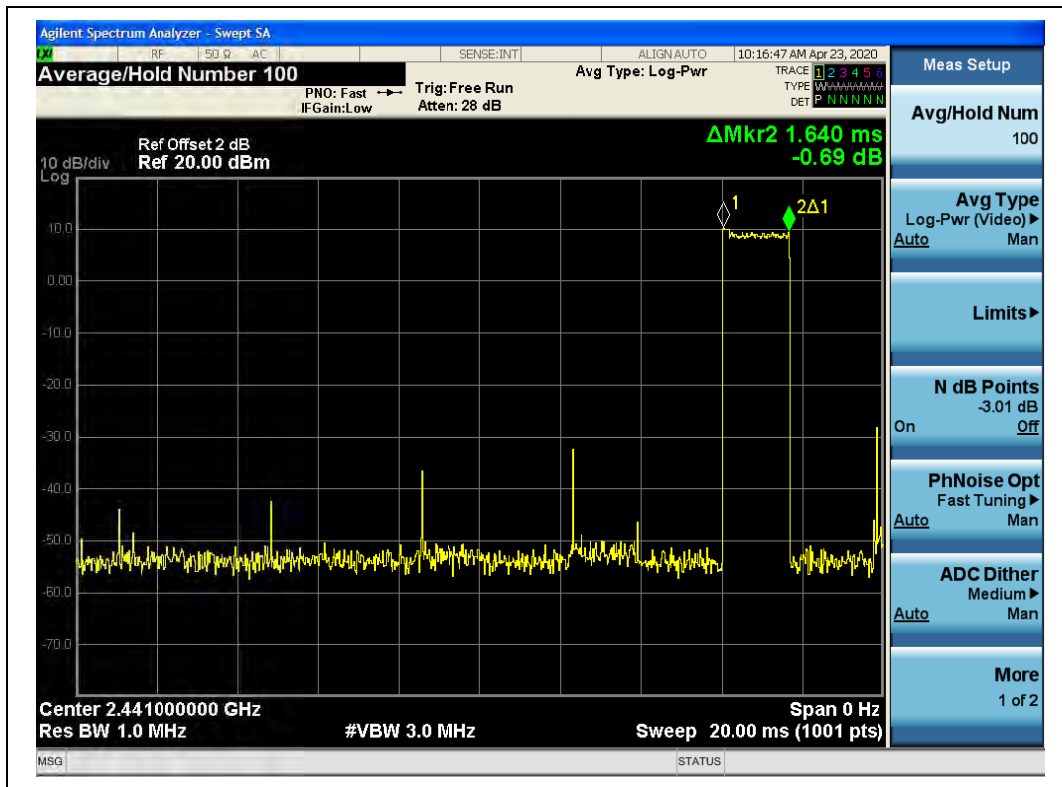

(DH3, 8-DPSK)

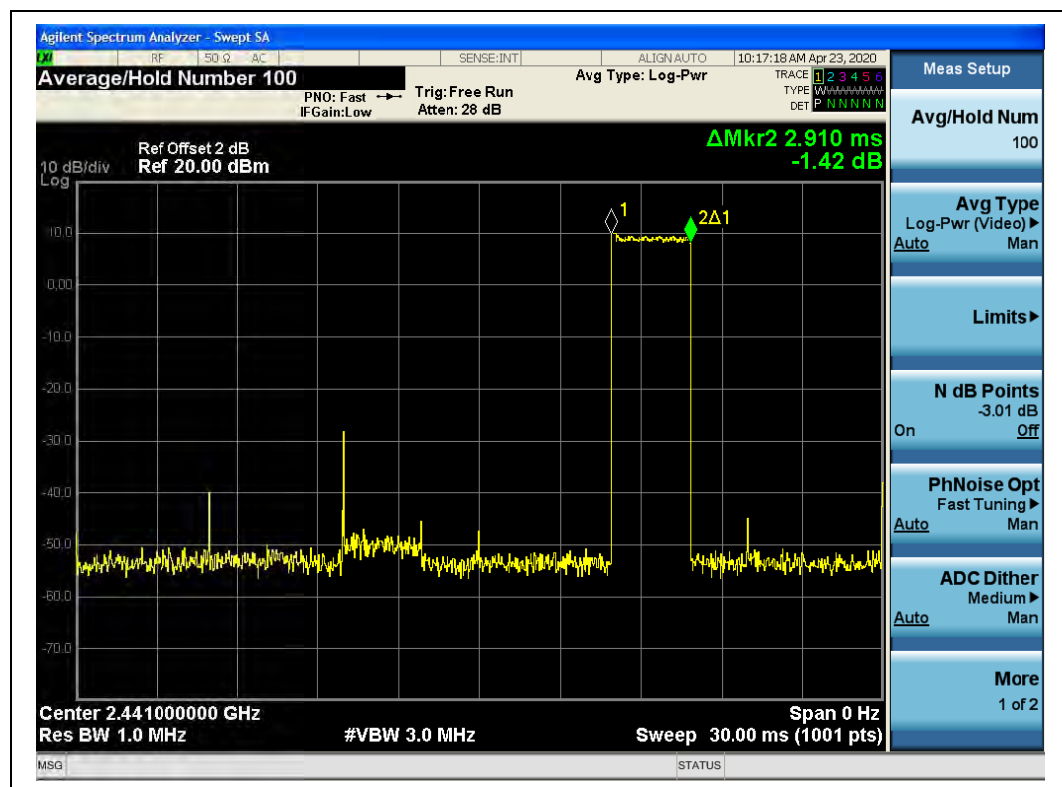

(DH5, 8-DPSK)




Right
GFSK Mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.380	121.60	60.80	0.4	PASS
DH3	1.620	259.20	129.60		PASS
DH5	2.880	307.20	153.60		PASS


B. Test Plots:

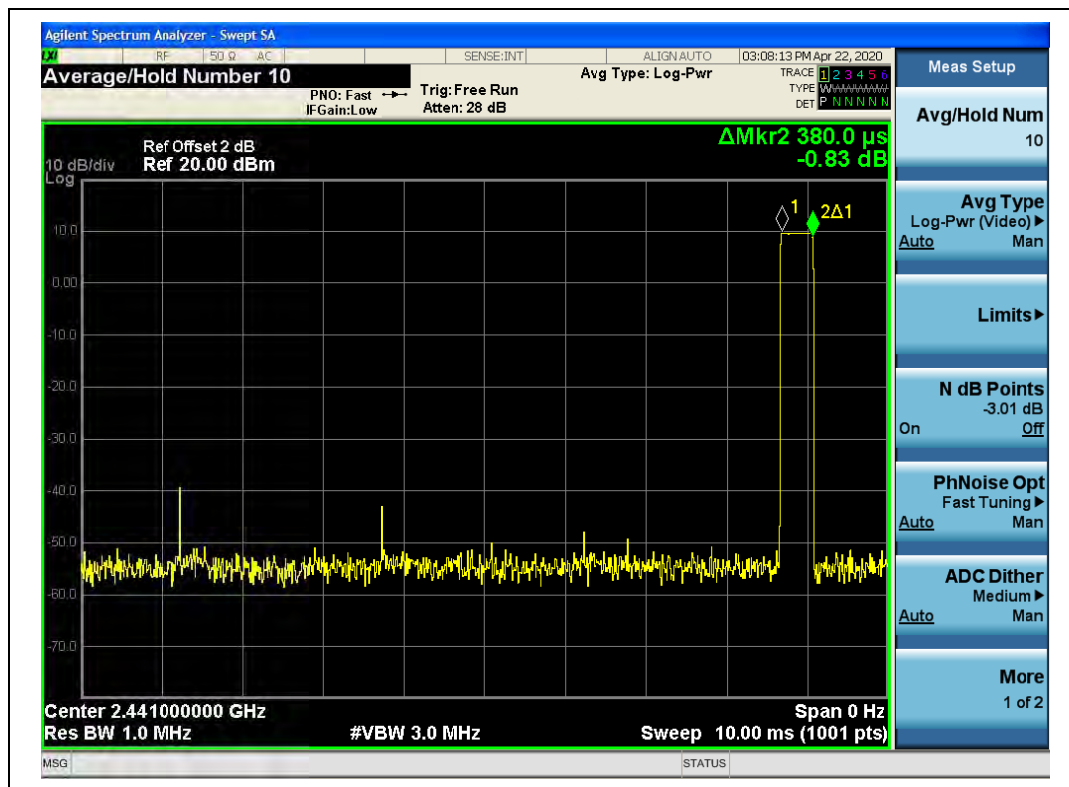

(DH1, GFSK)

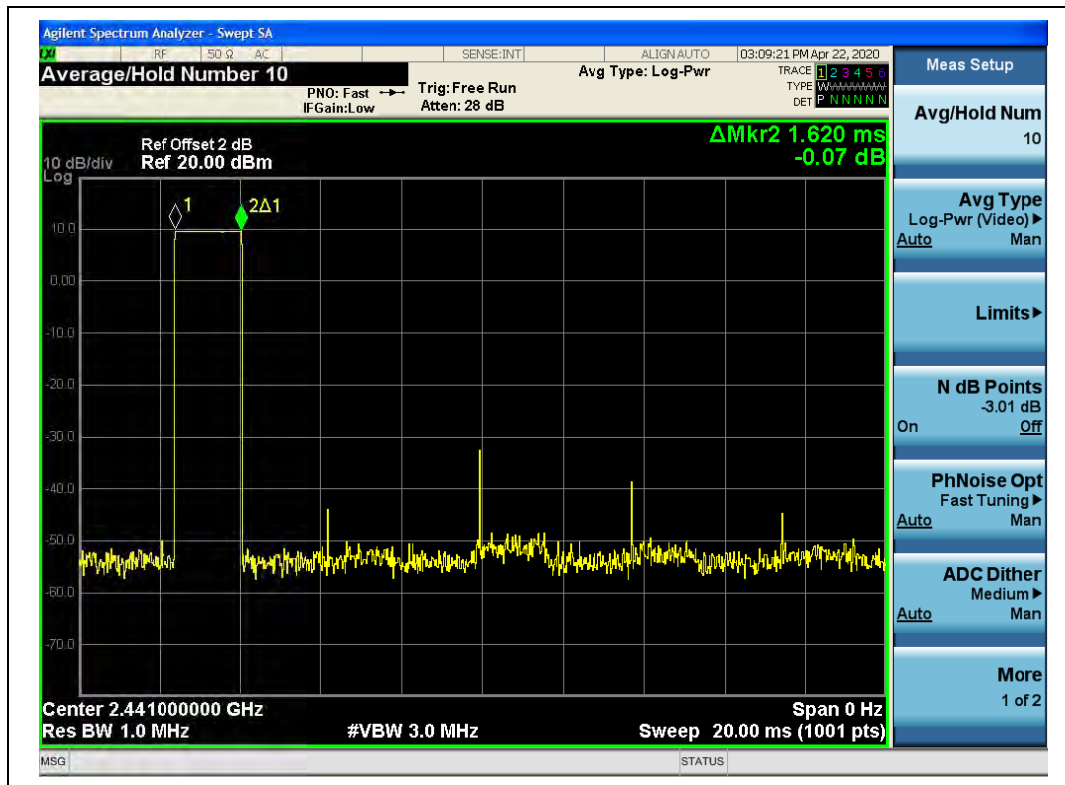

(DH3, GFSK)

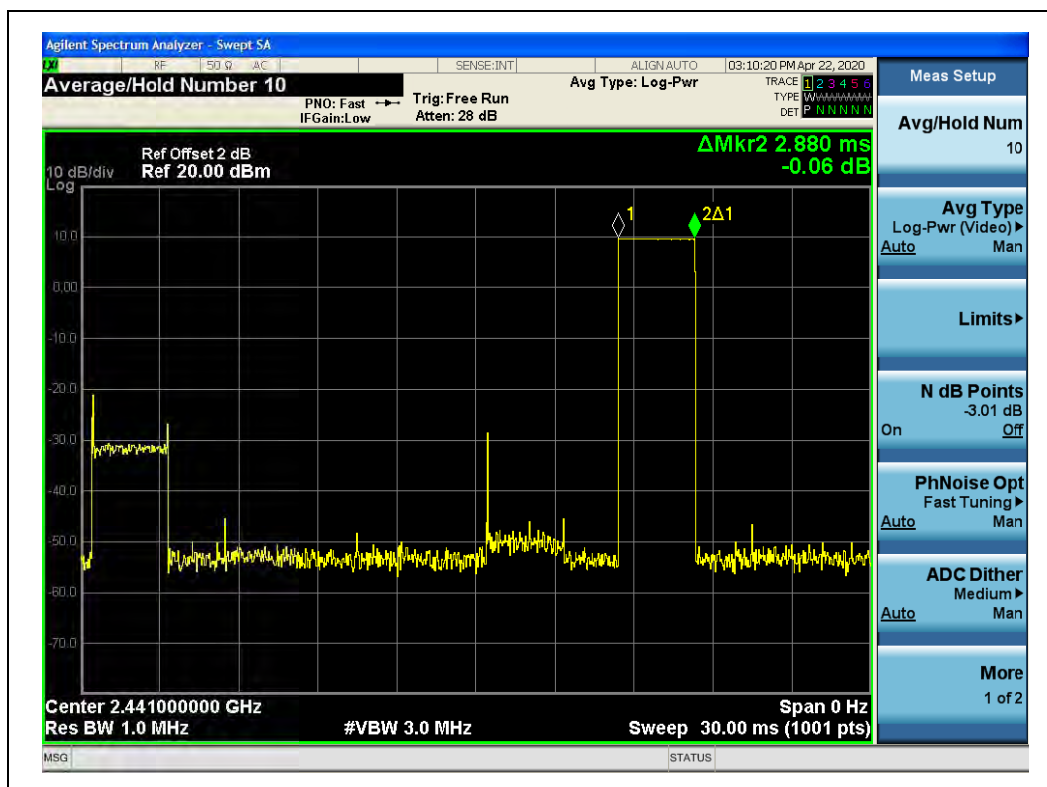

(DH5, GFSK)



A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.390	124.80	62.40	0.4	PASS
DH3	1.660	265.60	132.80		PASS
DH5	2.880	307.20	153.60		PASS

Agilent Spectrum Analyzer - Swept SA

RF 50 Ω AC SENSE:INT ALIGN: AUTO 03:12:51 PM Apr 22, 2020

Average/Hold Number 10

PNO: Fast → Trg: Free Run
IF Gain: Low Atten: 28 dB

Avg Type: Log-Pwr

TRACE 1 2 3 4 5 6
TYPE W W W W W W
DET P N N N N N

Ref Offset 2 dB
Ref 20.00 dBm

**ΔMkr2 390.0 μs
-3.32 dB**

10 dB/div
Log

1 2Δ1

Center 2.441000000 GHz Span 0 Hz
Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (1001 pts)

Meas Setup

Avg/Hold Num
10

Avg Type
Log-Pwr (Video) ▶
Auto Man

Limits ▶



N dB Points
-3.01 dB
On Off

PhNoise Opt
Fast Tuning ▶
Auto Man

ADC Dither
Medium ▶
Auto Man

More
1 of 2

(DH1, $\pi/4$ -DQPSK)

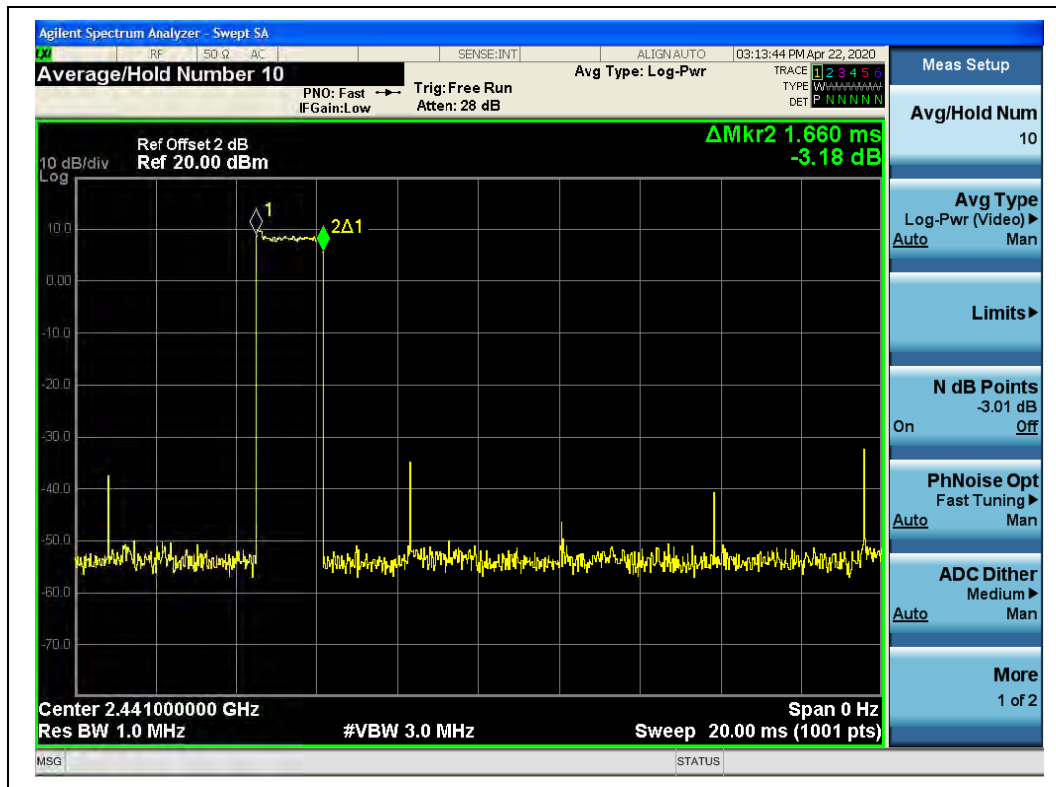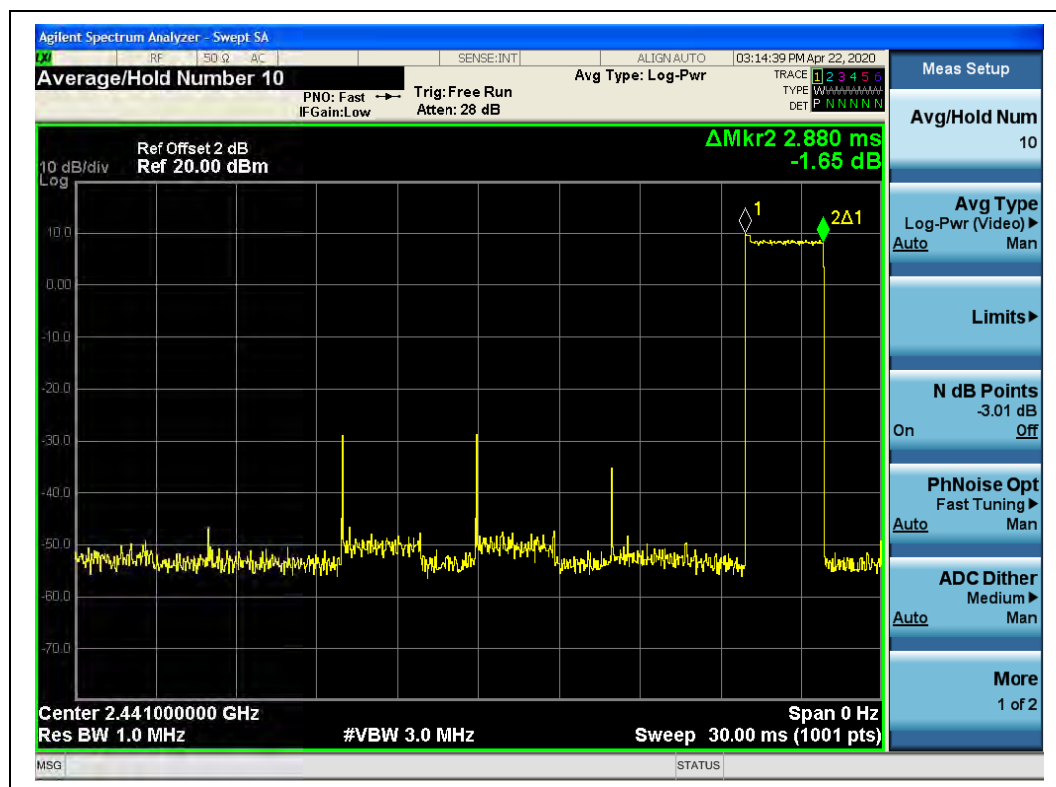
(DH3, $\pi/4$ -DQPSK)

(DH5, $\pi/4$ -DQPSK)




8-DPSK mode


A. Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.390	124.80	62.40	0.4	PASS
DH3	1.640	262.40	131.20		PASS
DH5	2.880	307.20	153.60		PASS


B. Test Plots:

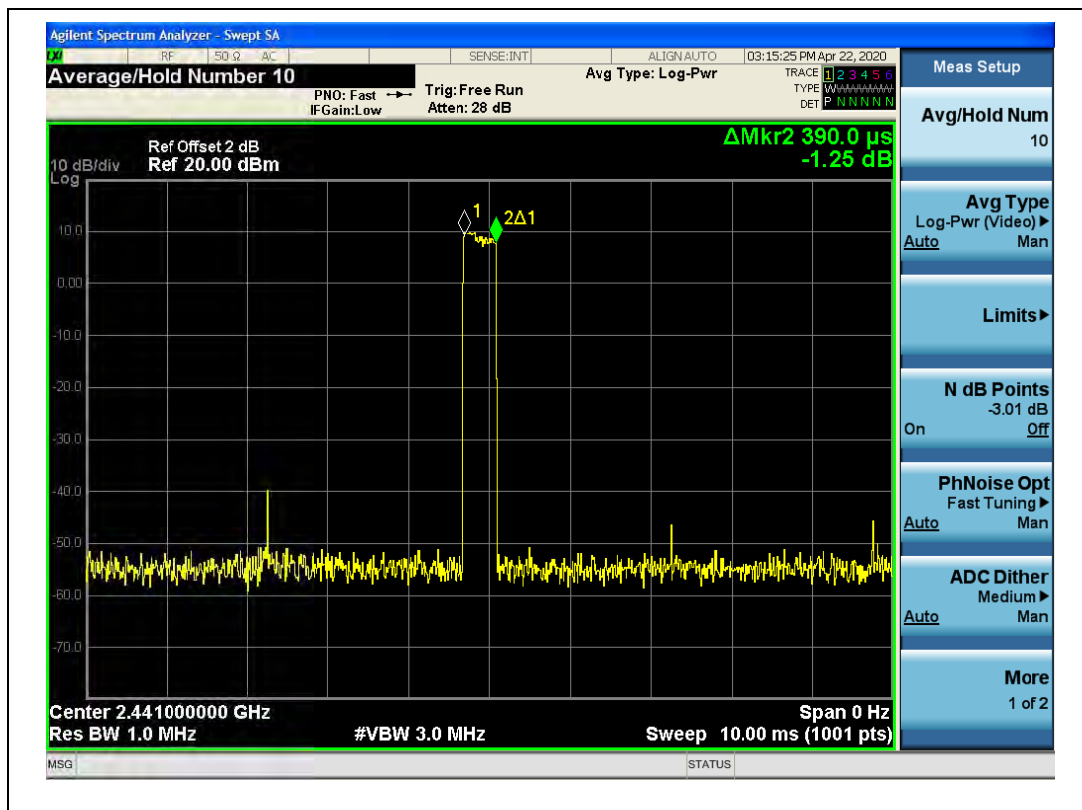

(DH1, 8-DPSK)

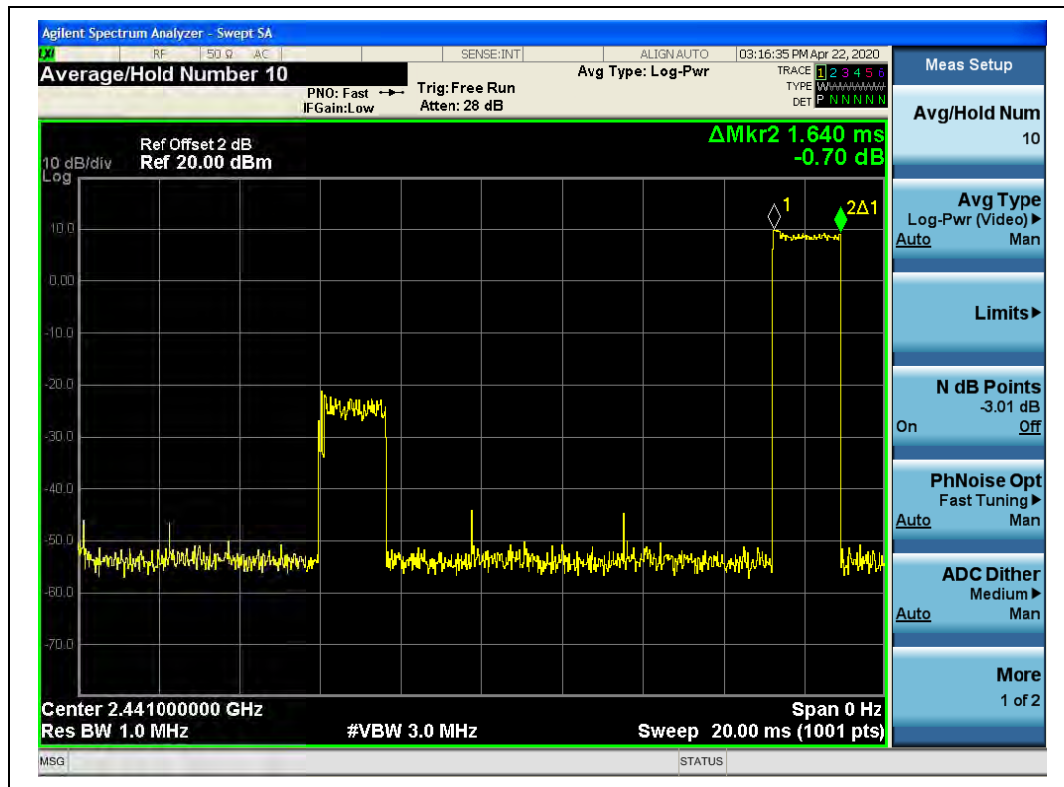

(DH3, 8-DPSK)

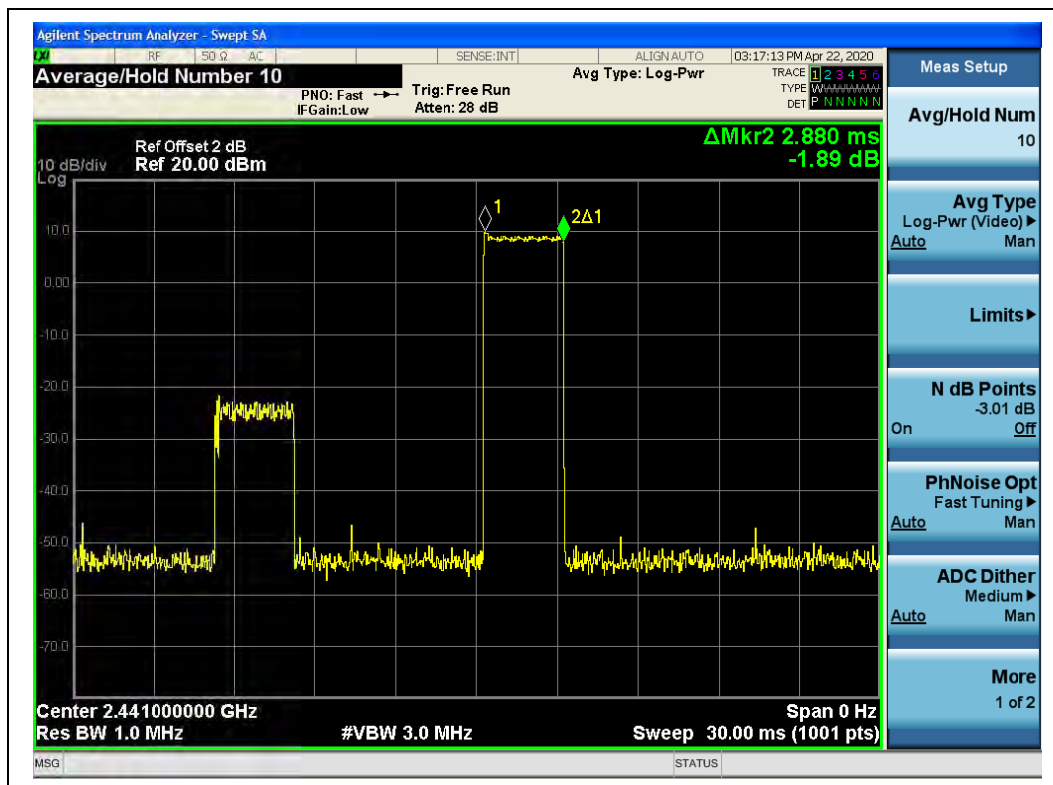

(DH5, 8-DPSK)


2.10. Conducted Spurious Emissions

2.10.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.10.2. Test Description

Test Setup:

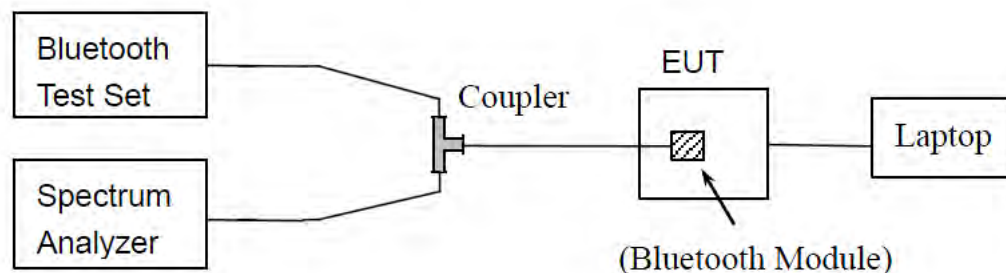

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.



2.10.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


Left

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-43.99	8.78	-11.22	PASS
39	2441	-43.58	9.47	-10.53	PASS
78	2480	-42.52	8.68	-11.32	PASS


B. Test Plots:

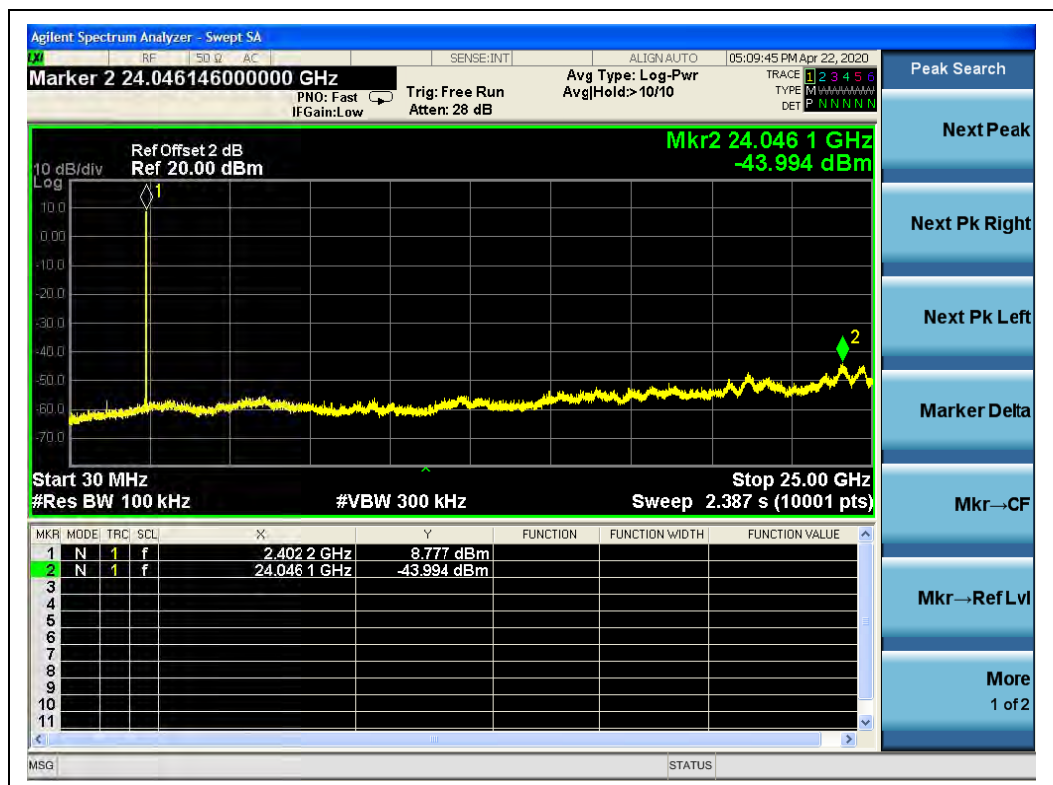

(Channel = 0, 30MHz to 25GHz, GFSK Mode)

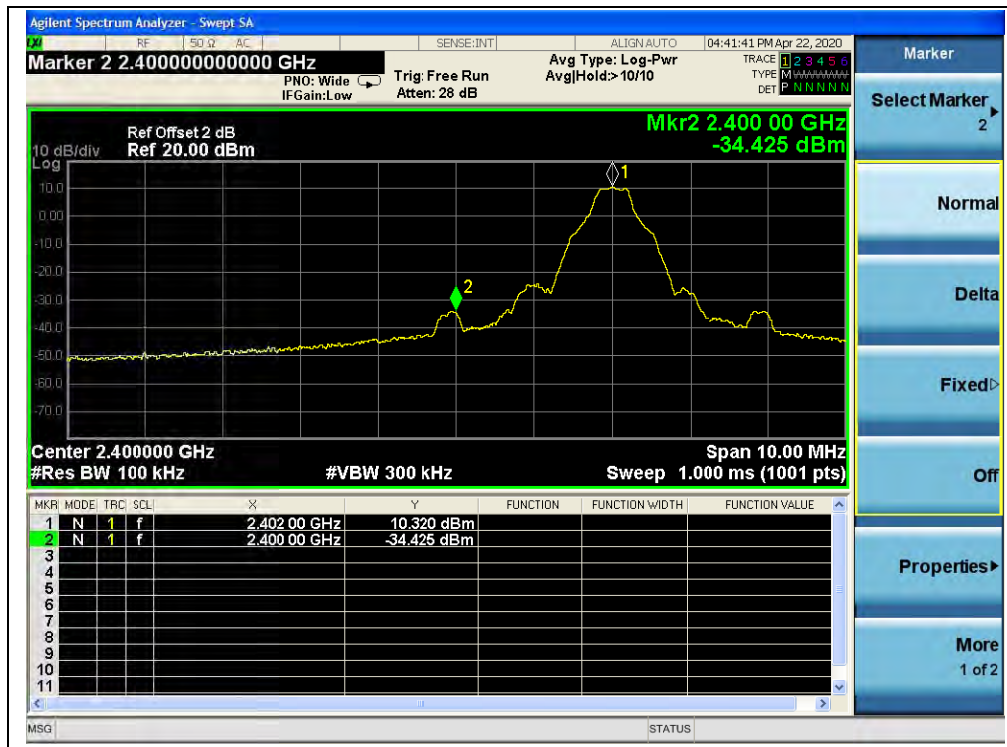


(Channel = 0, Band edge, GFSK Mode)

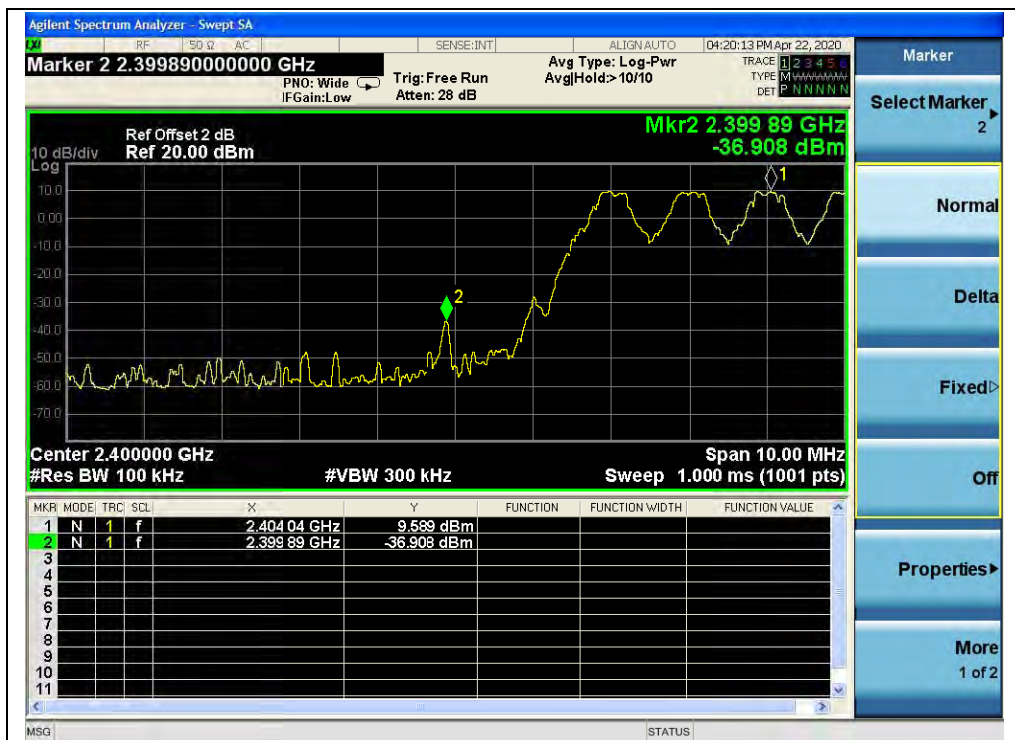

(Channel = 0, Band edge with hopping on, GFSK Mode)




(Channel = 39, 30MHz to 25GHz, GFSK Mode)

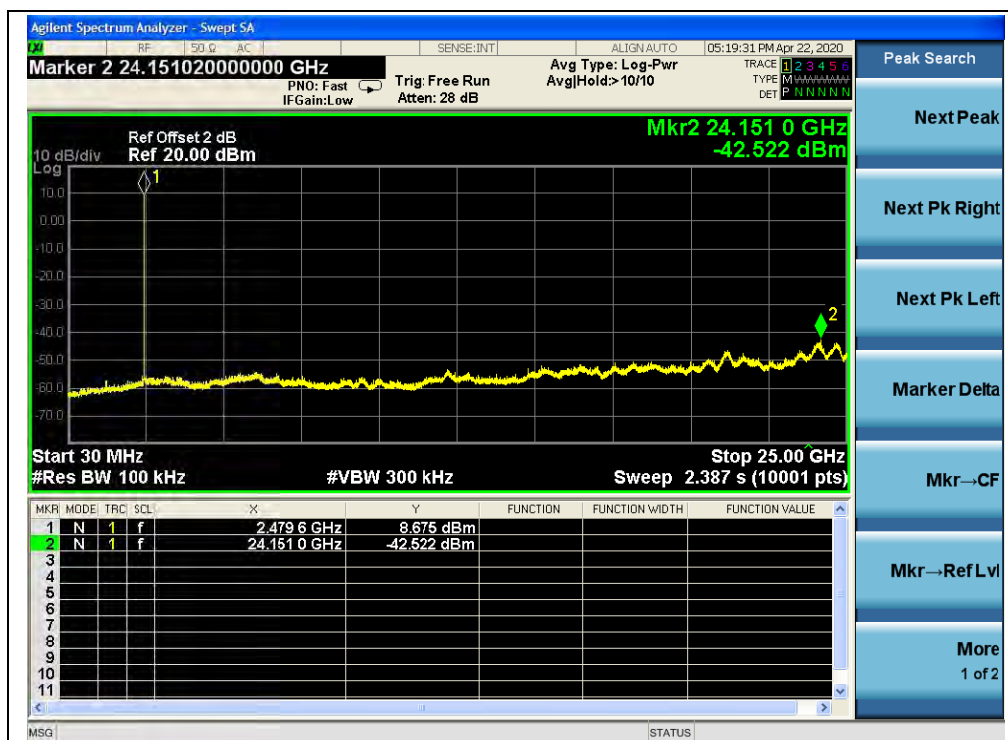

(Channel = 78, 30MHz to 25GHz, GFSK Mode)



(Channel = 78, Band edge, GFSK Mode)

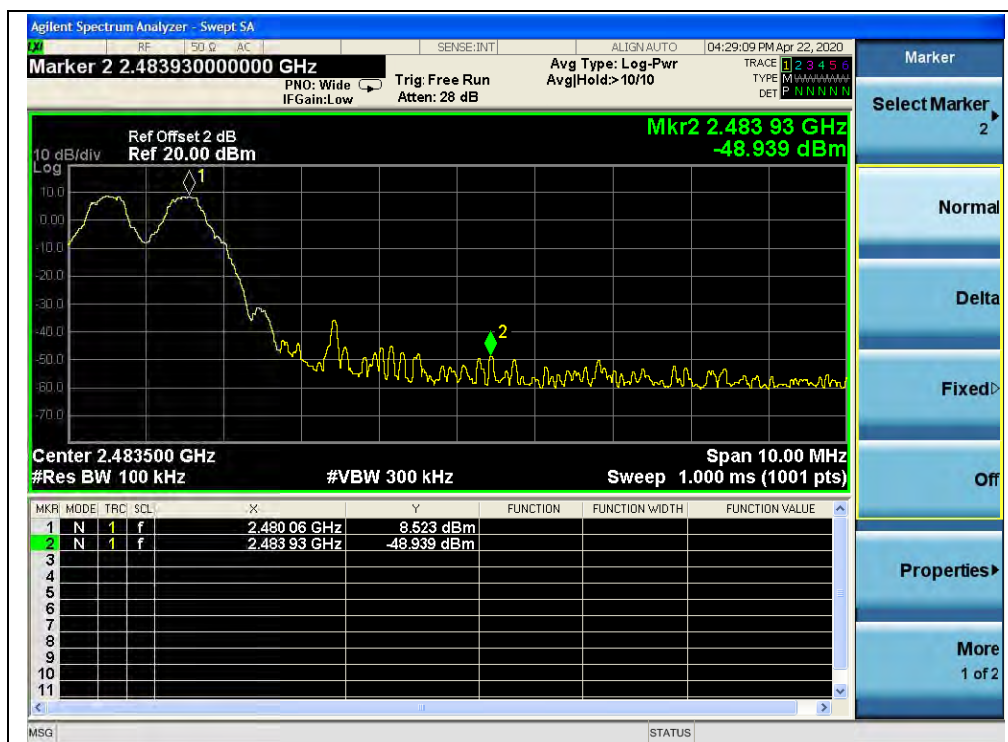

(Channel = 78, Band edge with hopping on, GFSK Mode)




$\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-42.58	4.17	-15.83	PASS
39	2441	-43.67	8.72	-11.28	PASS
78	2480	-43.64	9.04	-10.96	PASS

B. Test Plots:

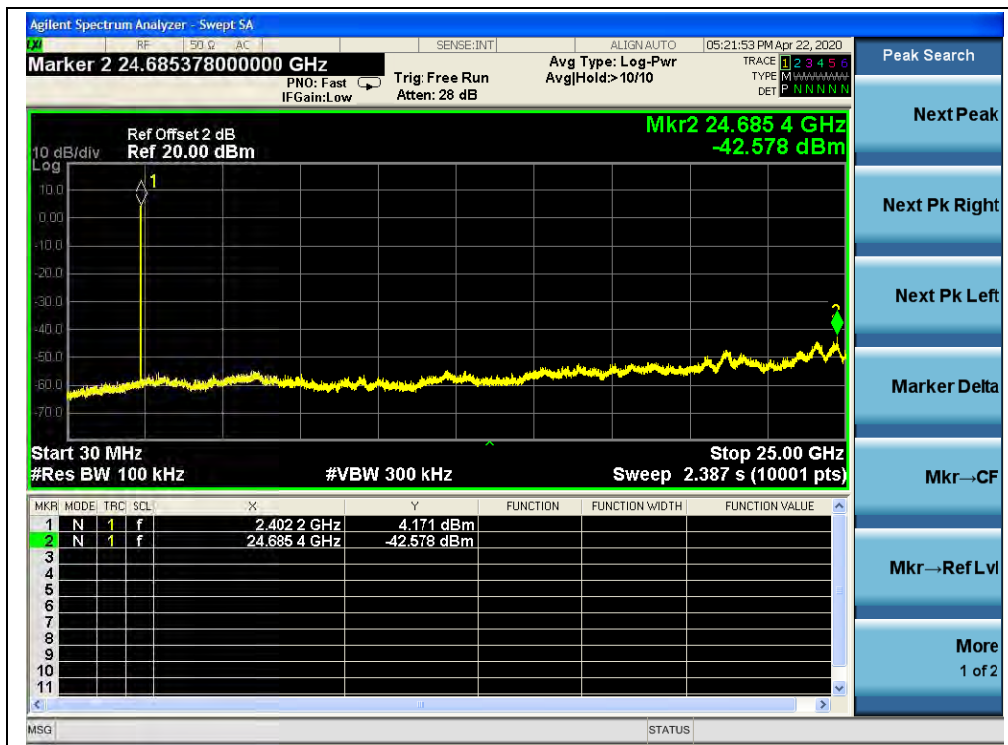



(Channel = 0, 30MHz to 25GHz, $\pi/4$ -DQPSK)

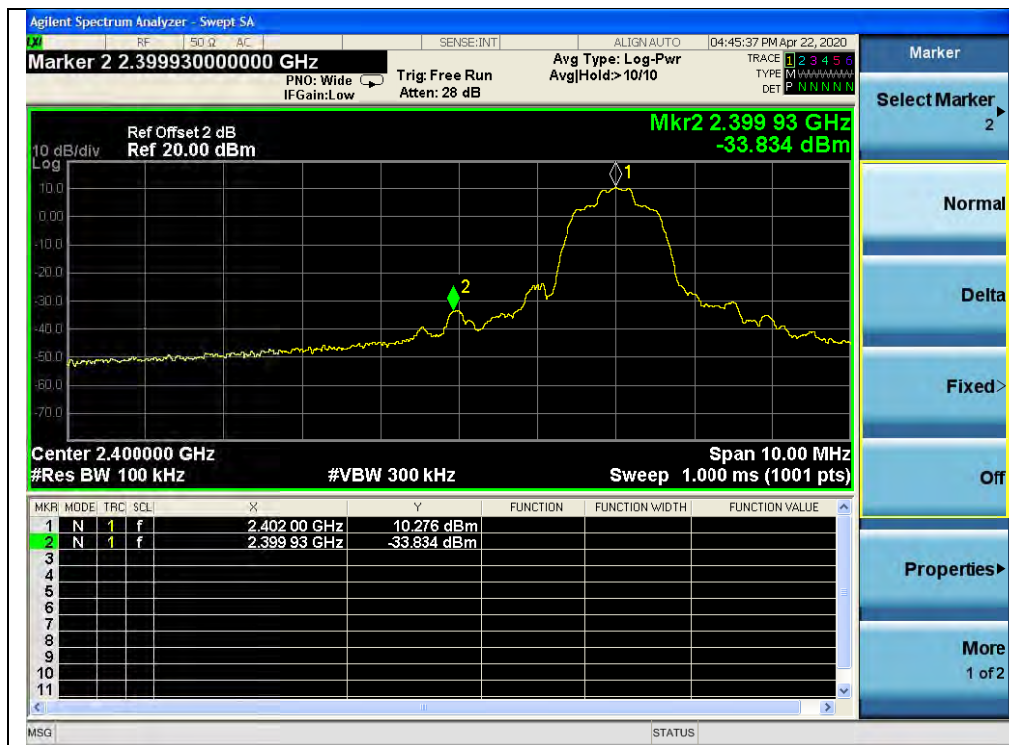


(Channel = 0, Band edge, $\pi/4$ -DQPSK)



(Channel = 0, Band edge with hopping on, $\pi/4$ -DQPSK)

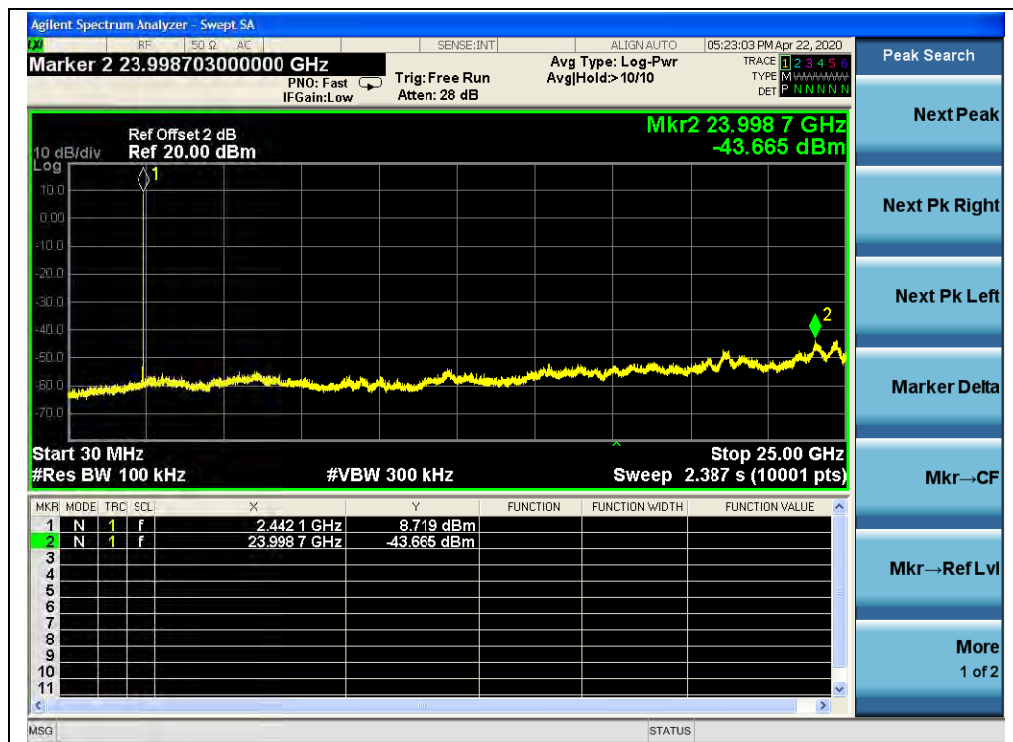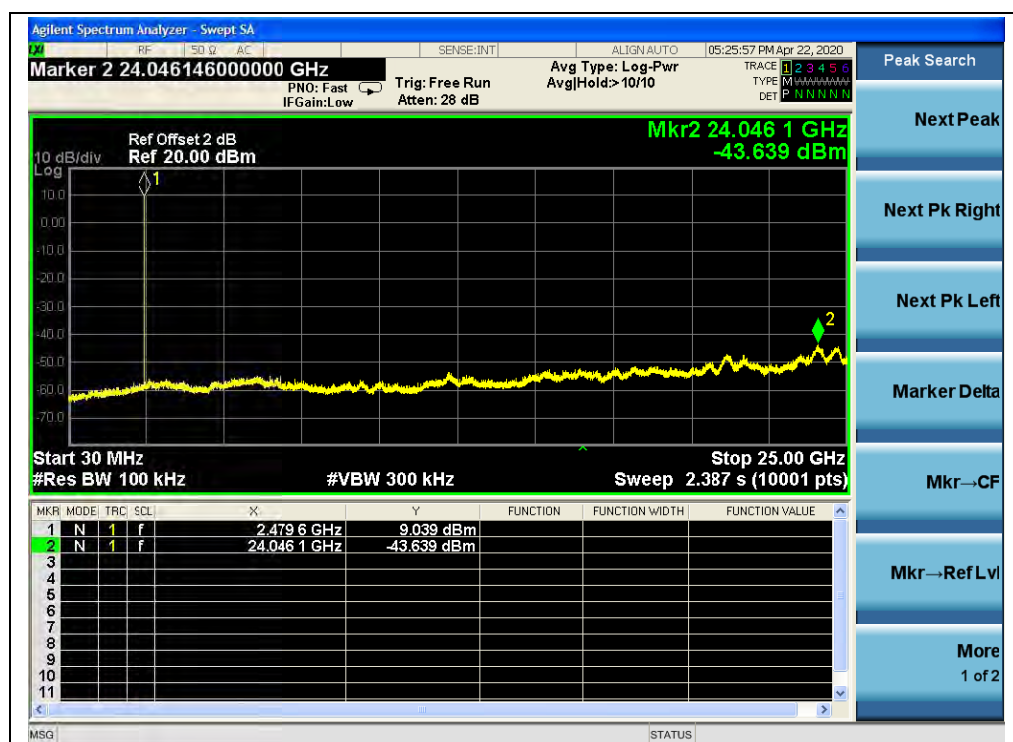(Channel = 39, 30MHz to 25GHz, $\pi/4$ -DQPSK)(Channel = 78, 30MHz to 25GHz, $\pi/4$ -DQPSK)

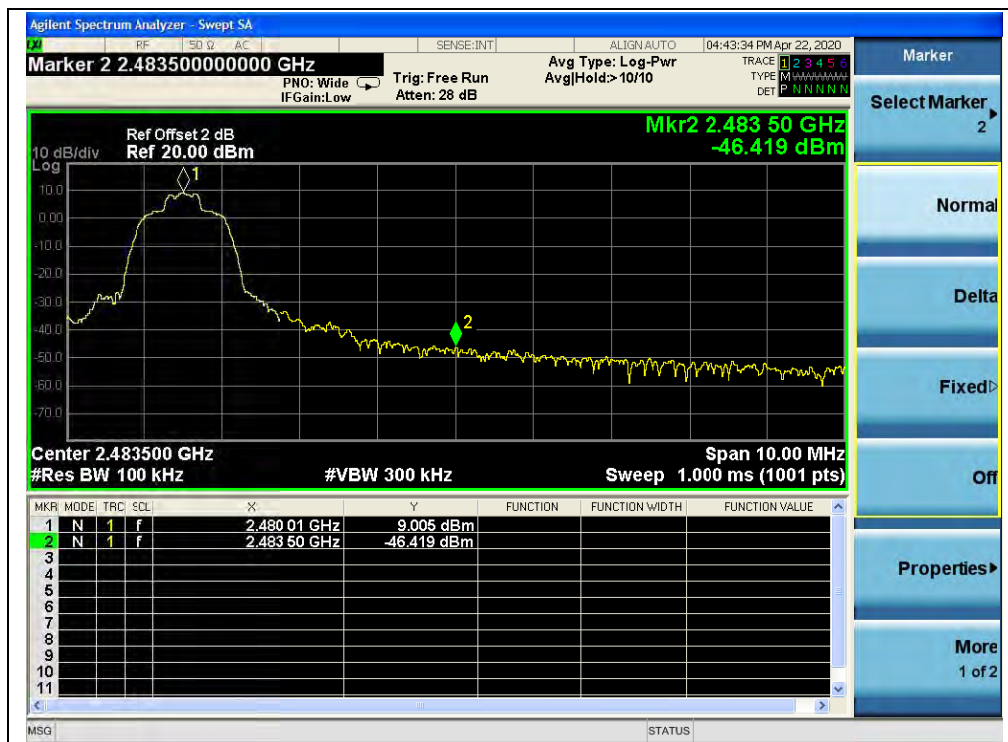

(Channel = 78, Band edge, $\pi/4$ -DQPSK)



(Channel = 78, Band edge with hopping on, $\pi/4$ -DQPSK)




8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-44.29	9.66	-10.34	PASS
39	2441	-44.14	9.89	-10.11	PASS
78	2480	-44.82	3.24	-16.76	PASS

B. Test Plots:

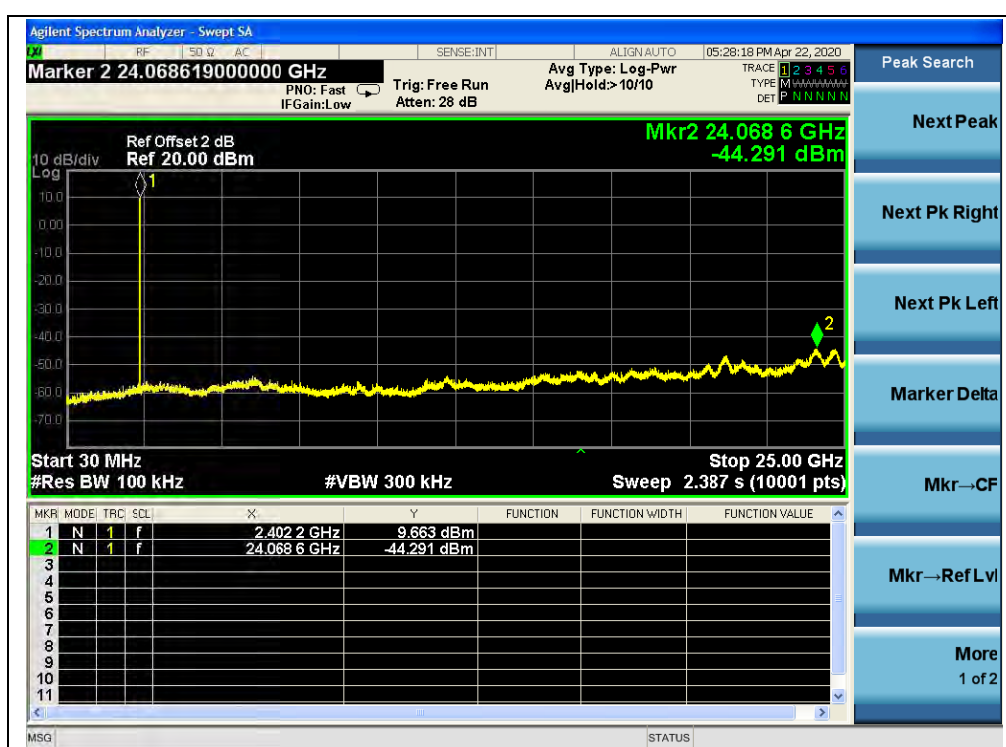

(Channel = 0, 30MHz to 25GH, 8-DPSK)

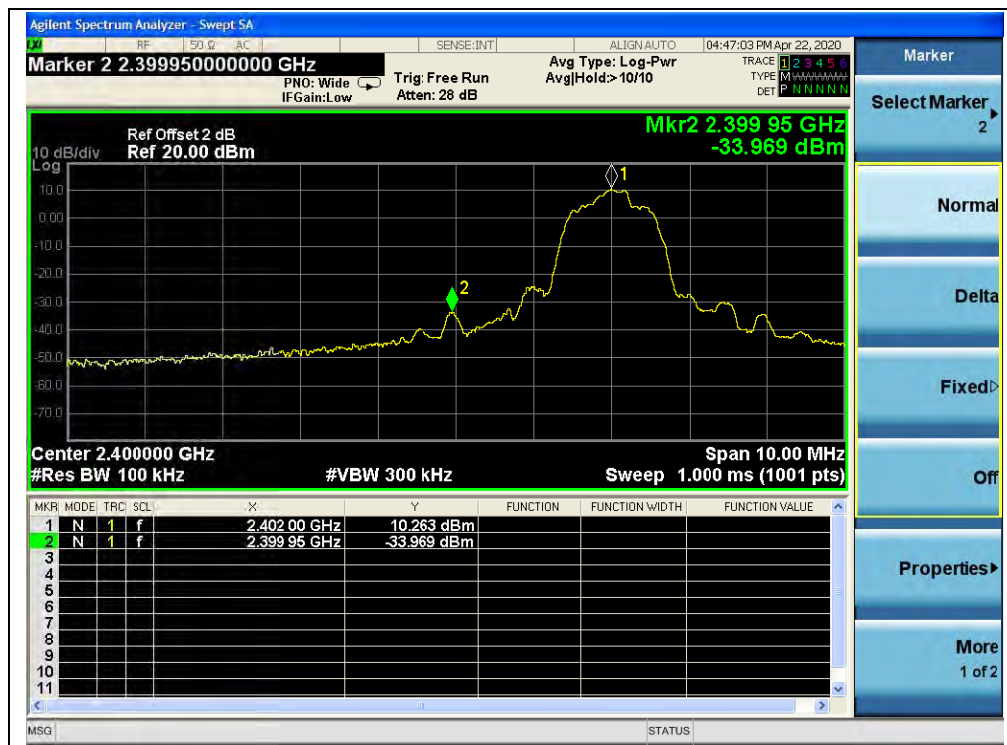


(Channel = 0, Band edge, 8-DPSK)



(Channel = 0, Band edge with hopping on, 8-DPSK)




(Channel = 39, 30MHz to 25GHz, 8-DPSK)

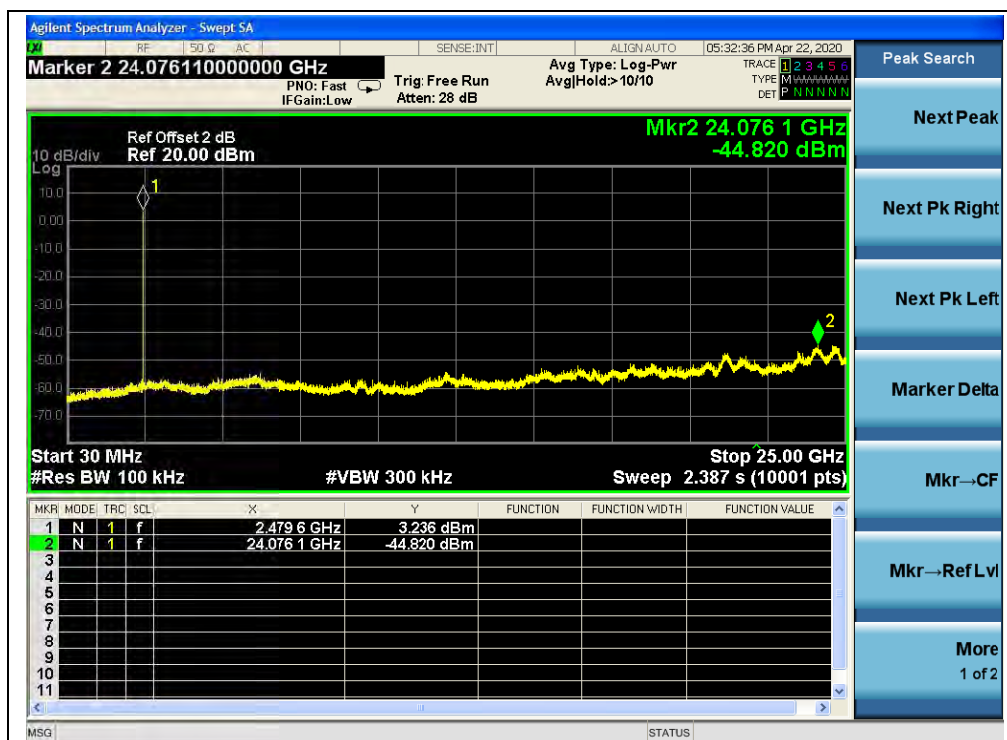

(Channel = 78, 30MHz to 25GH, 8-DPSK)



(Channel = 78, Band edge, 8-DPSK)

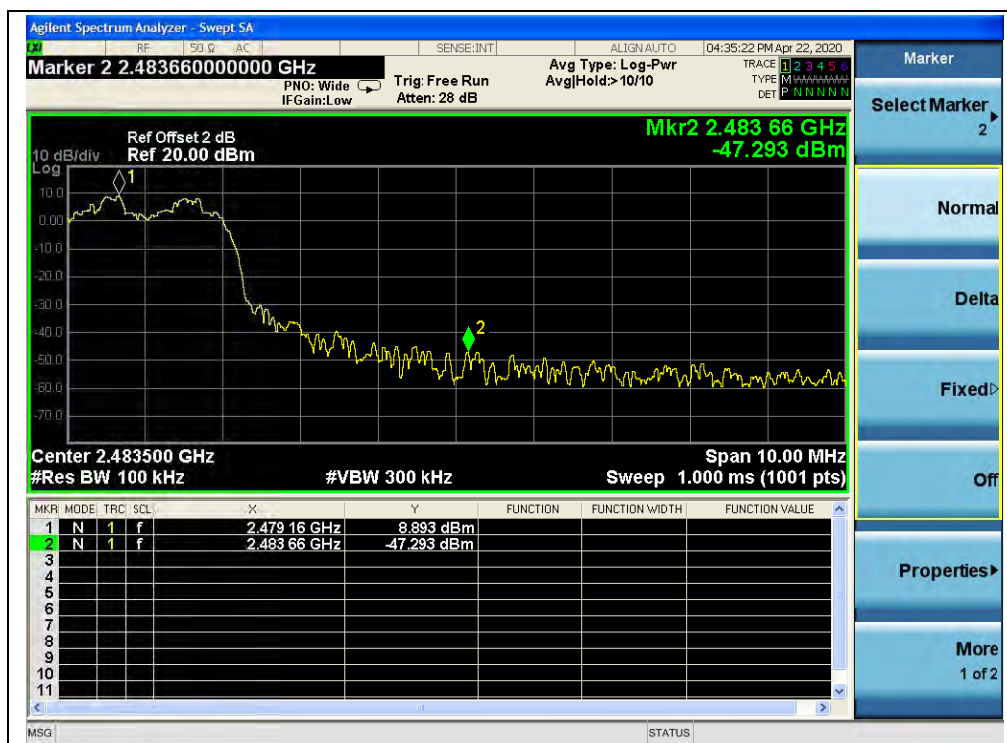

(Channel = 78, Band edge with hopping on, 8-DPSK)




Right

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-44.32	9.39	-10.61	PASS
39	2441	-44.49	9.14	-10.86	PASS
78	2480	-44.01	8.53	-11.47	PASS


B. Test Plots:

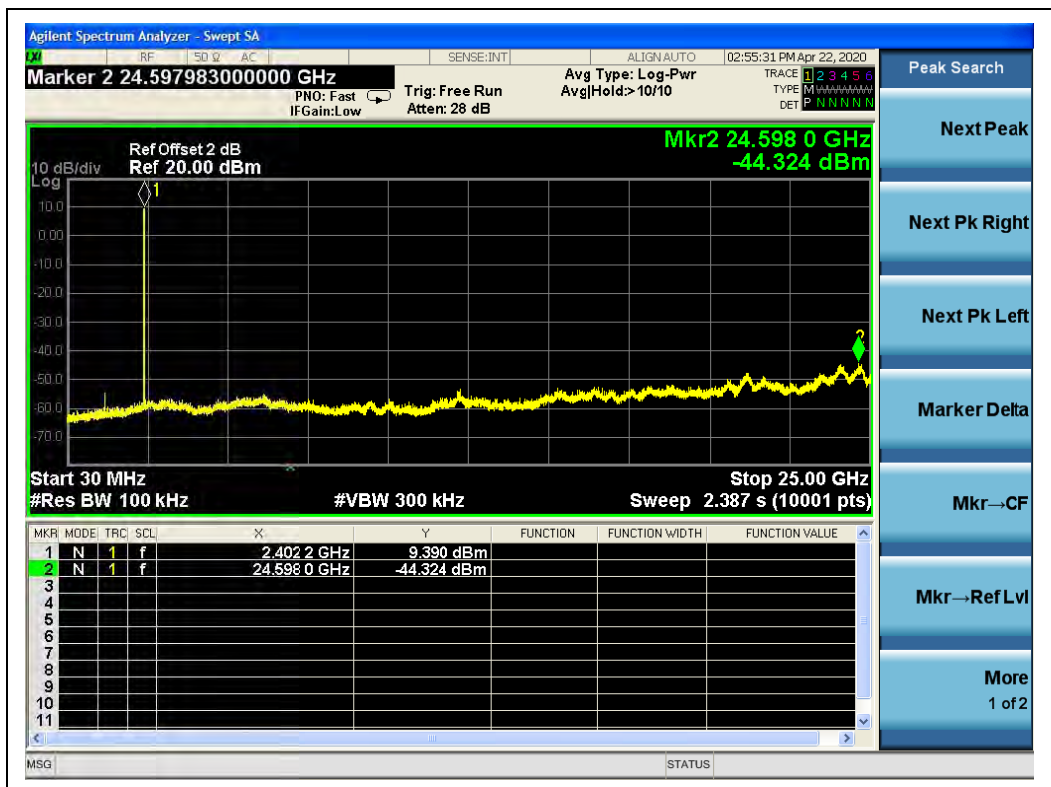


(Channel = 0, 30MHz to 25GHz, GFSK Mode)

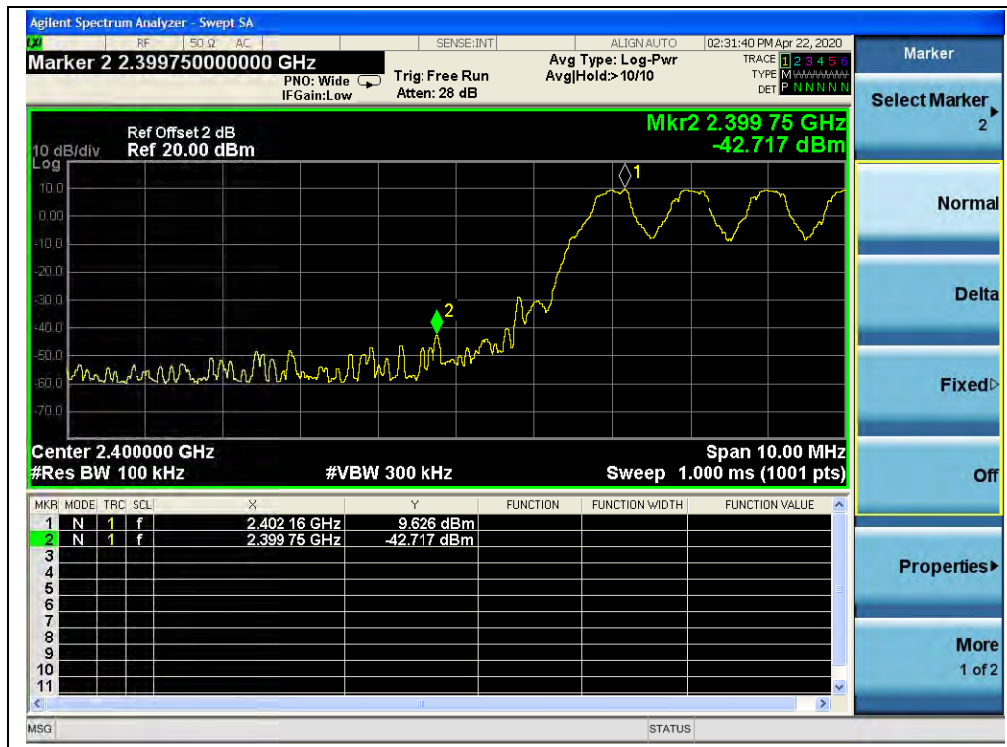


(Channel = 0, Band edge, GFSK Mode)

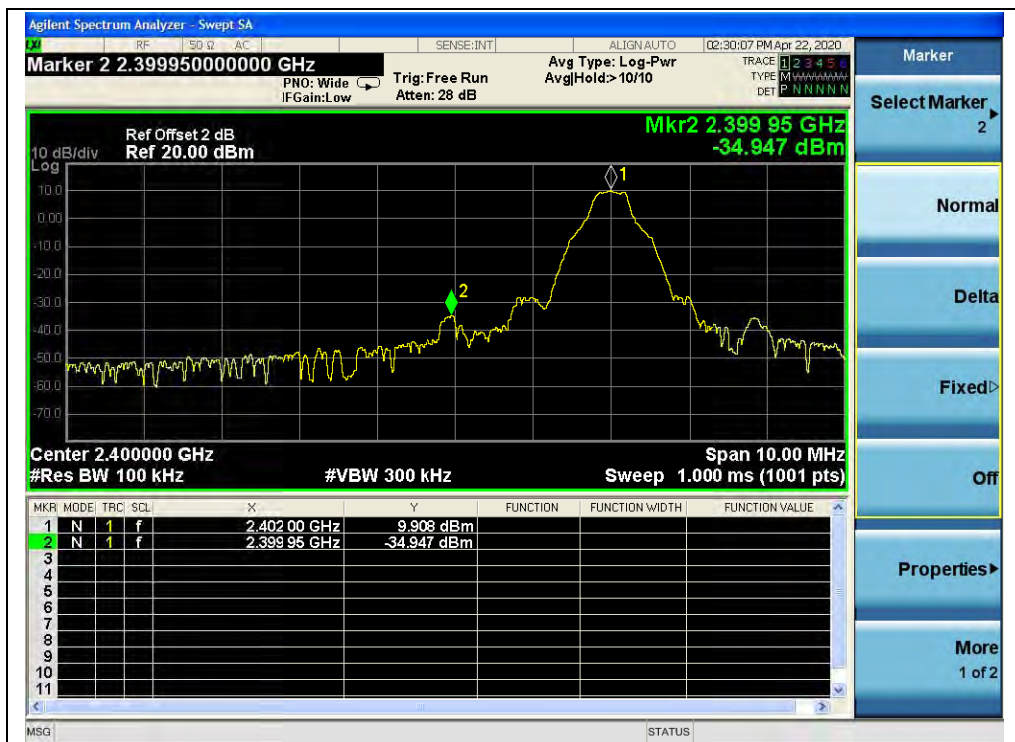


(Channel = 0, Band edge with hopping on, GFSK Mode)

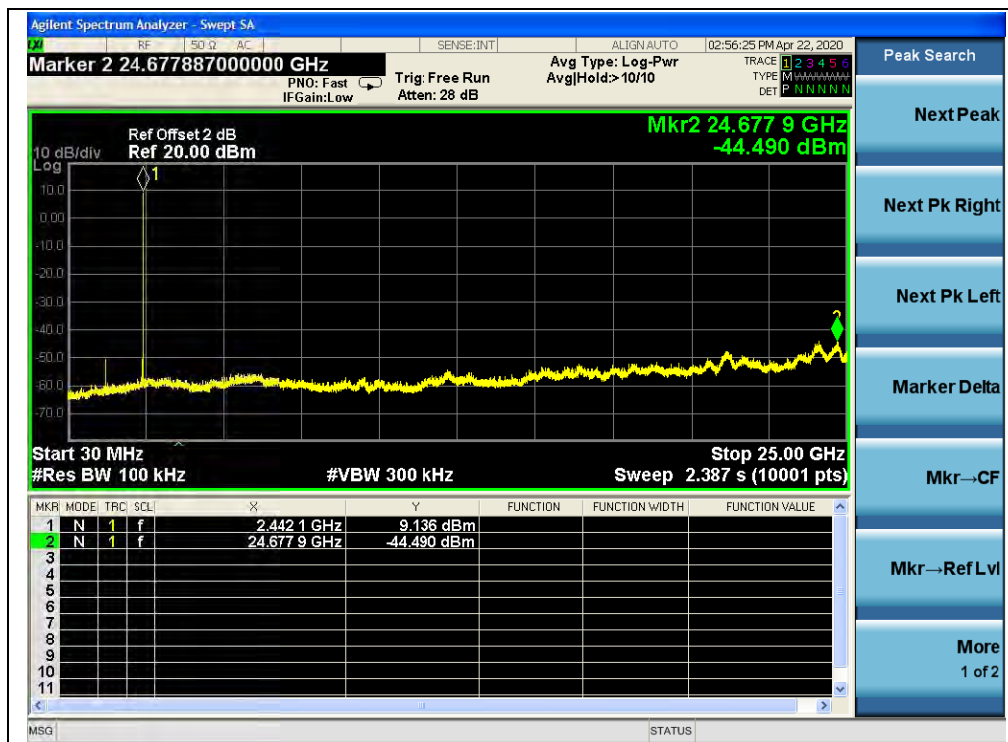

(Channel = 39, 30MHz to 25GHz, GFSK Mode)

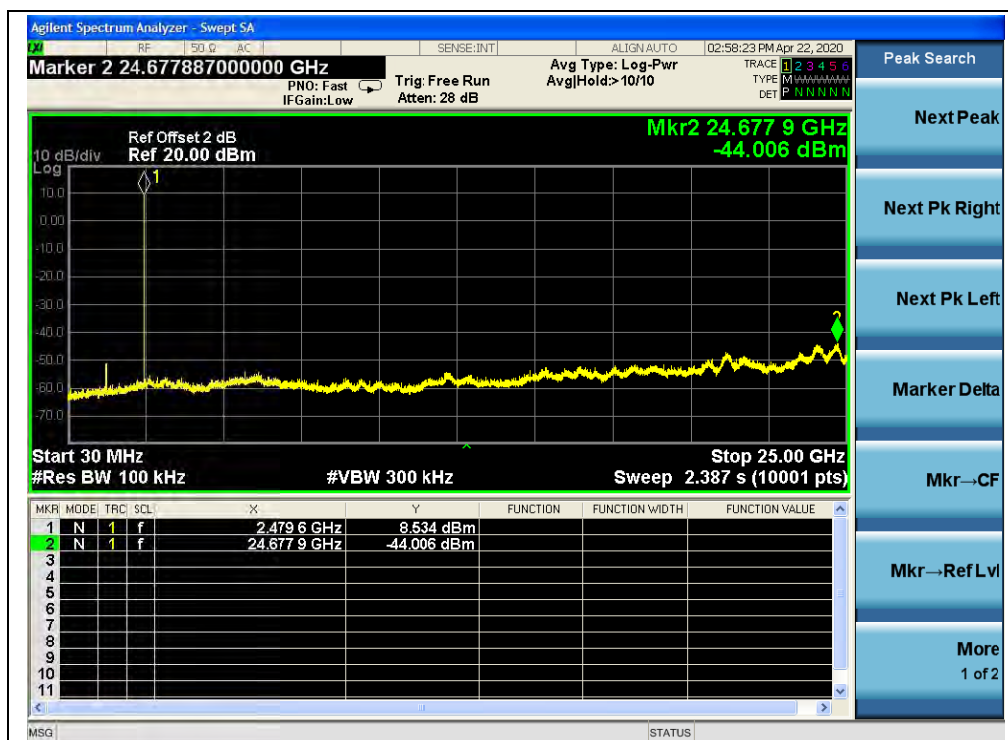

(Channel = 78, 30MHz to 25GHz, GFSK Mode)

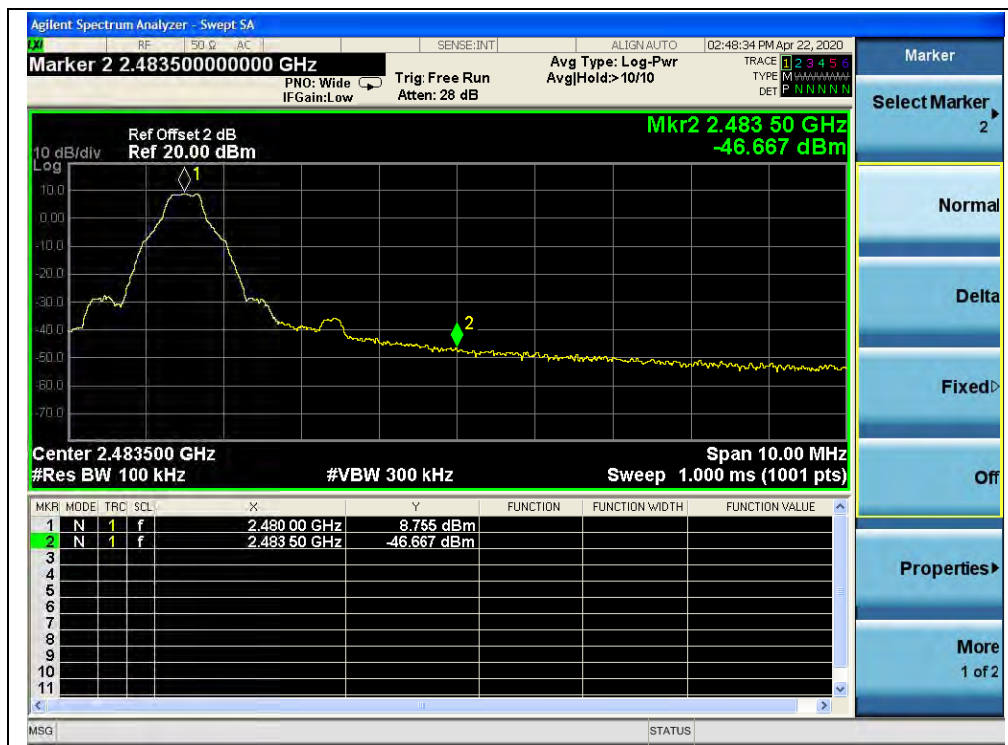

(Channel = 78, Band edge, GFSK Mode)



(Channel = 78, Band edge with hopping on, GFSK Mode)




$\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-44.27	3.33	-16.67	PASS
39	2441	-44.02	9.67	-10.33	PASS
78	2480	-44.34	3.07	-16.93	PASS


B. Test Plots:

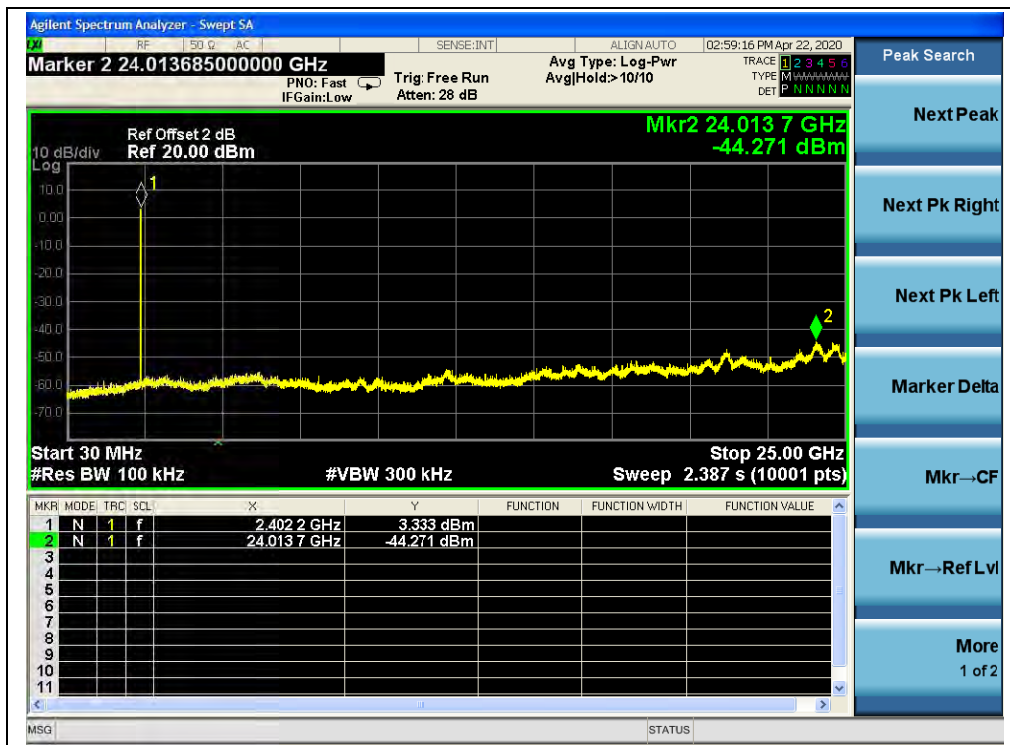



(Channel = 0, 30MHz to 25GHz, $\pi/4$ -DQPSK)

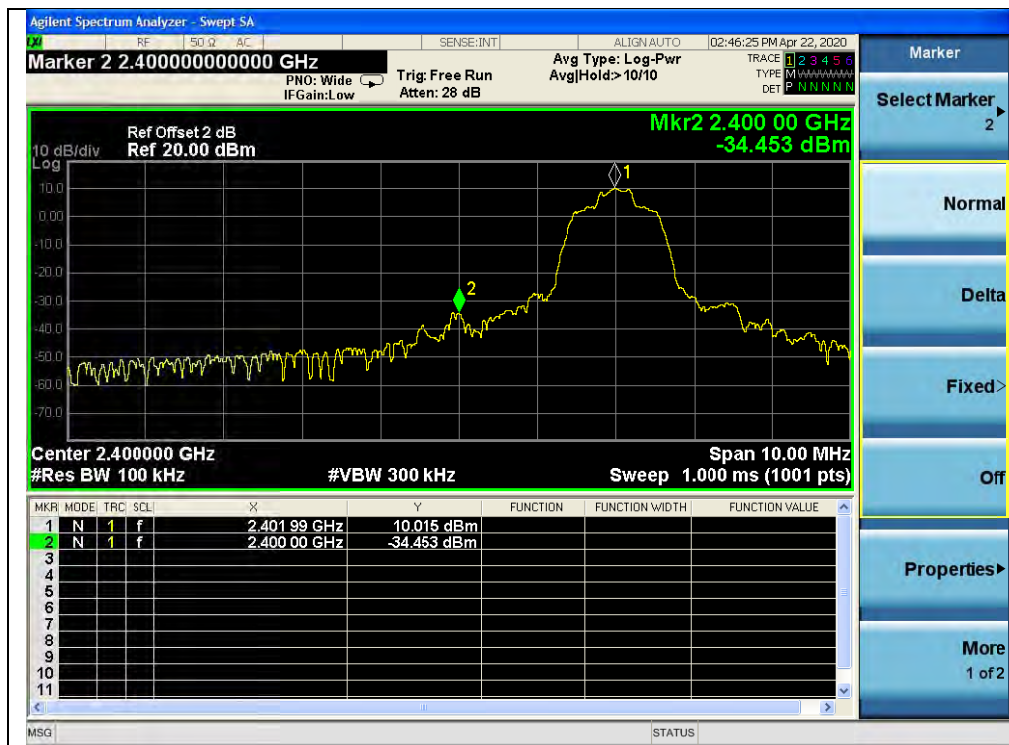


(Channel = 0, Band edge, $\pi/4$ -DQPSK)

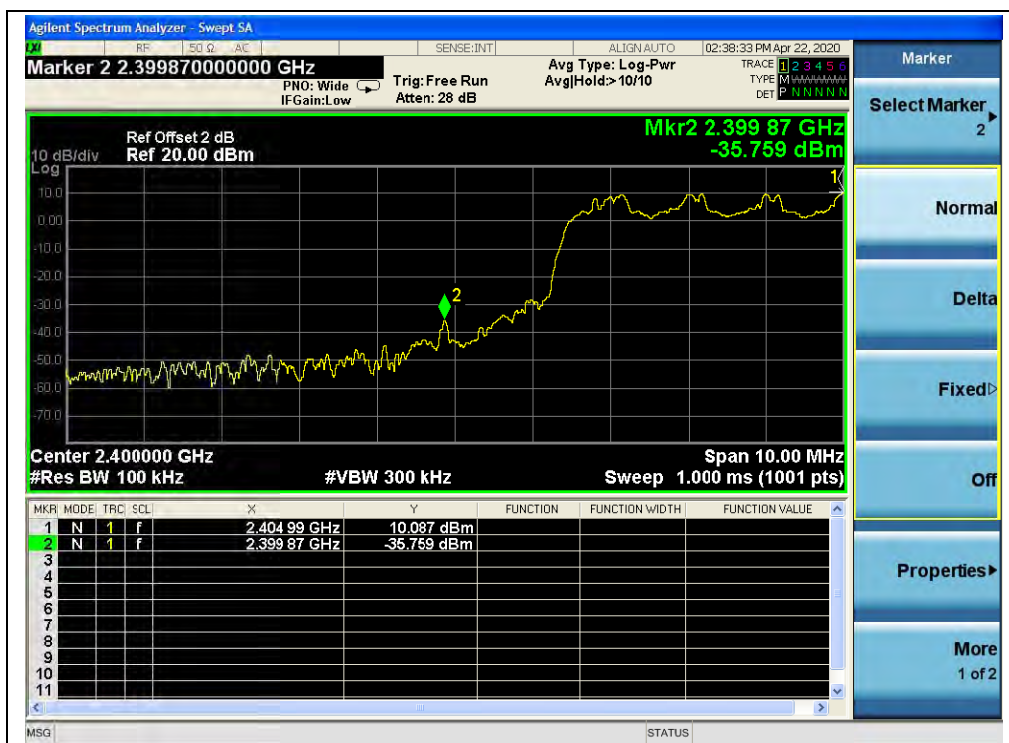


(Channel = 0, Band edge with hopping on, $\pi/4$ -DQPSK)

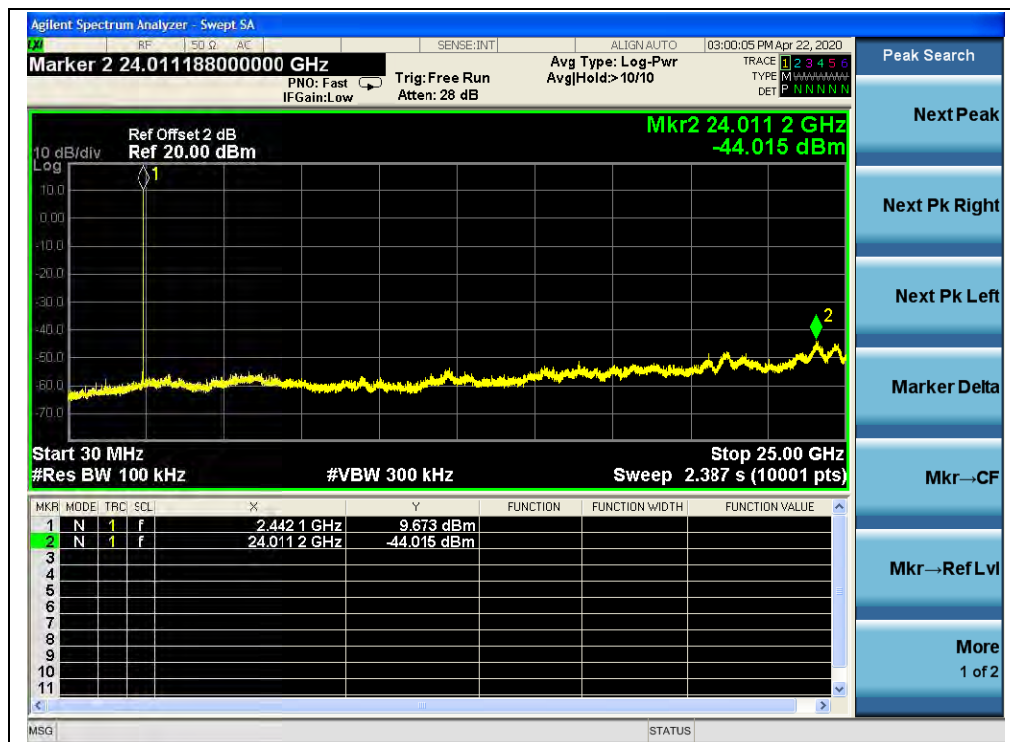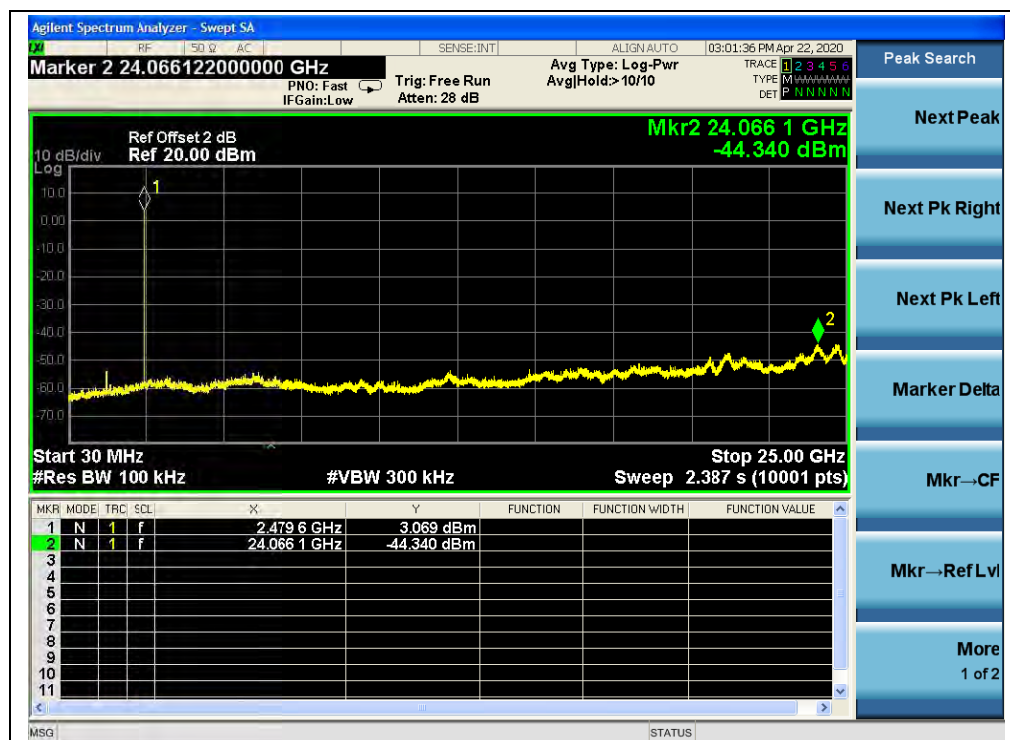(Channel = 39, 30MHz to 25GHz, $\pi/4$ -DQPSK)(Channel = 78, 30MHz to 25GHz, $\pi/4$ -DQPSK)

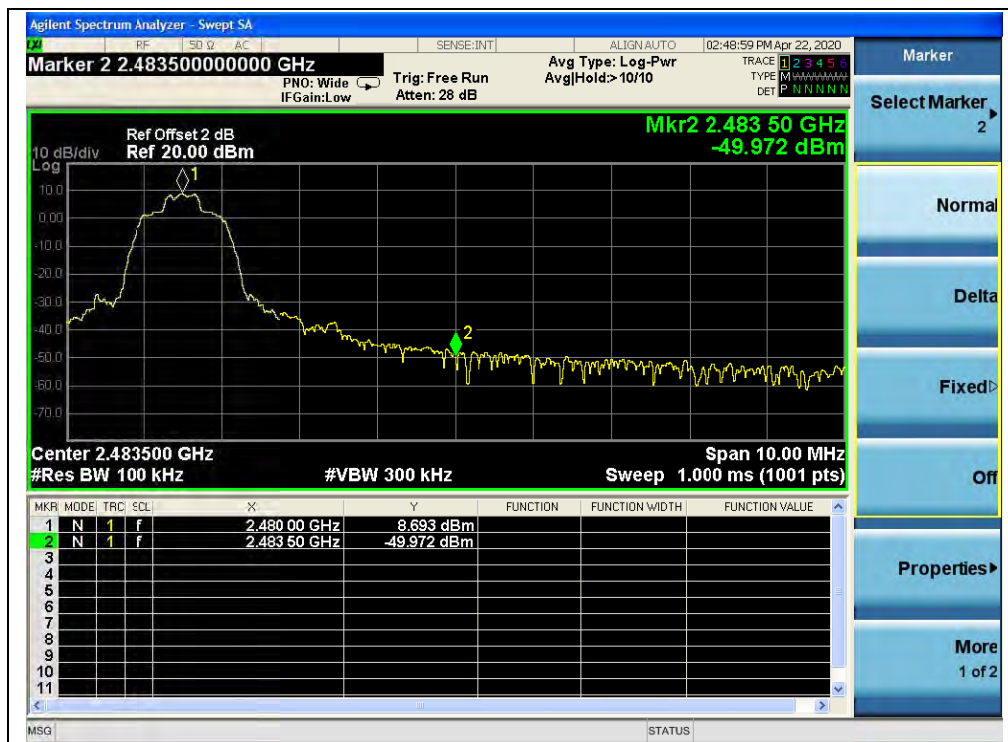

(Channel = 78, Band edge, $\pi/4$ -DQPSK)

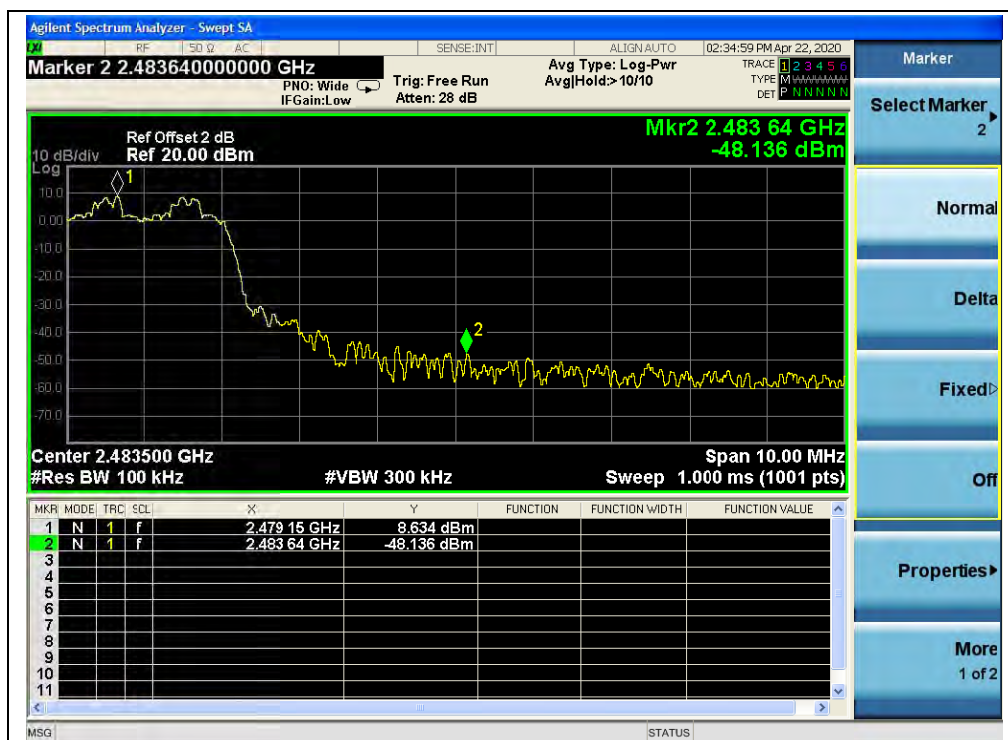

(Channel = 78, Band edge with hopping on, $\pi/4$ -DQPSK)




8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-43.65	4.02	-15.98	PASS
39	2441	-44.20	8.14	-11.86	PASS
78	2480	-43.73	3.05	-16.95	PASS

B. Test Plots:

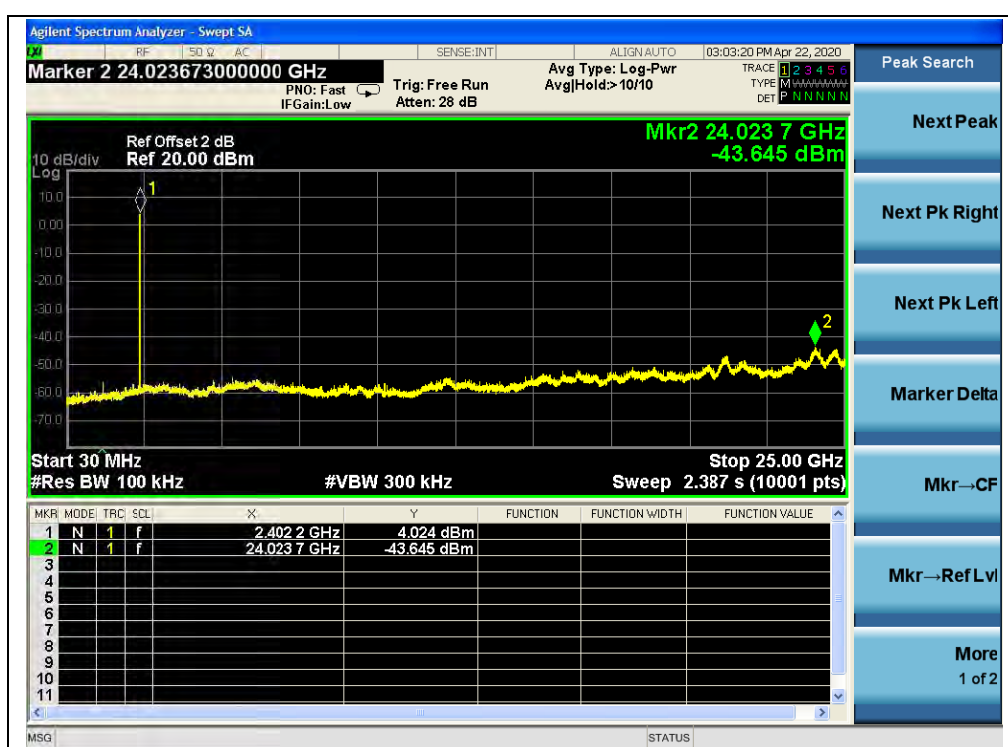


(Channel = 0, 30MHz to 25GH, 8-DPSK)




(Channel = 0, Band edge, 8-DPSK)




(Channel = 0, Band edge with hopping on, 8-DPSK)

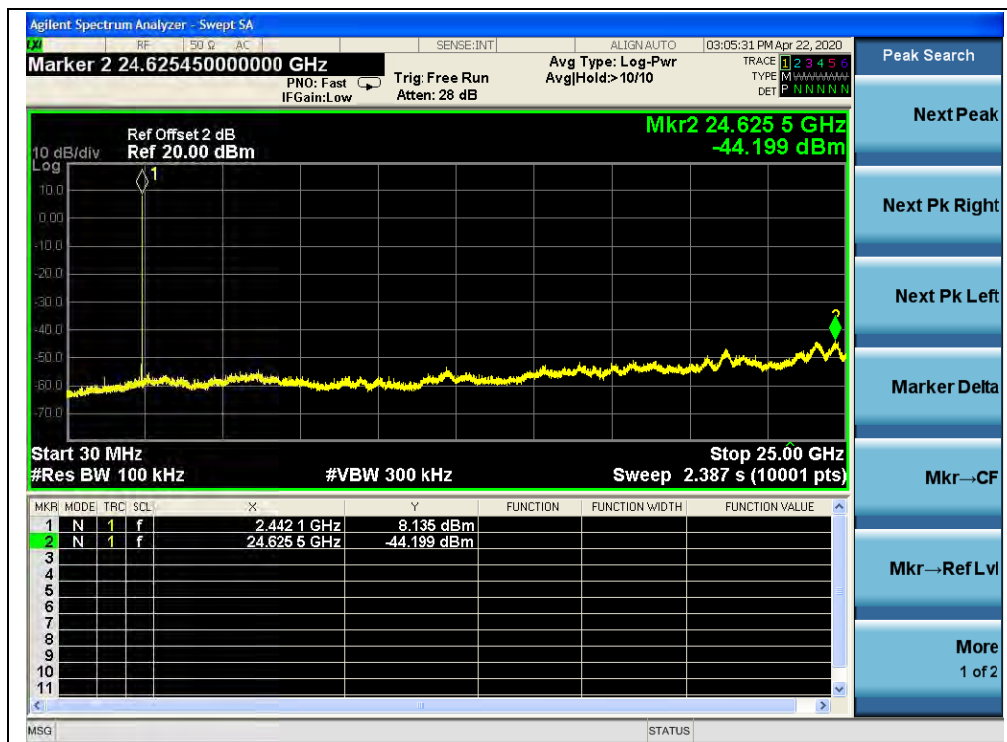

(Channel = 39, 30MHz to 25GHz, 8-DPSK)

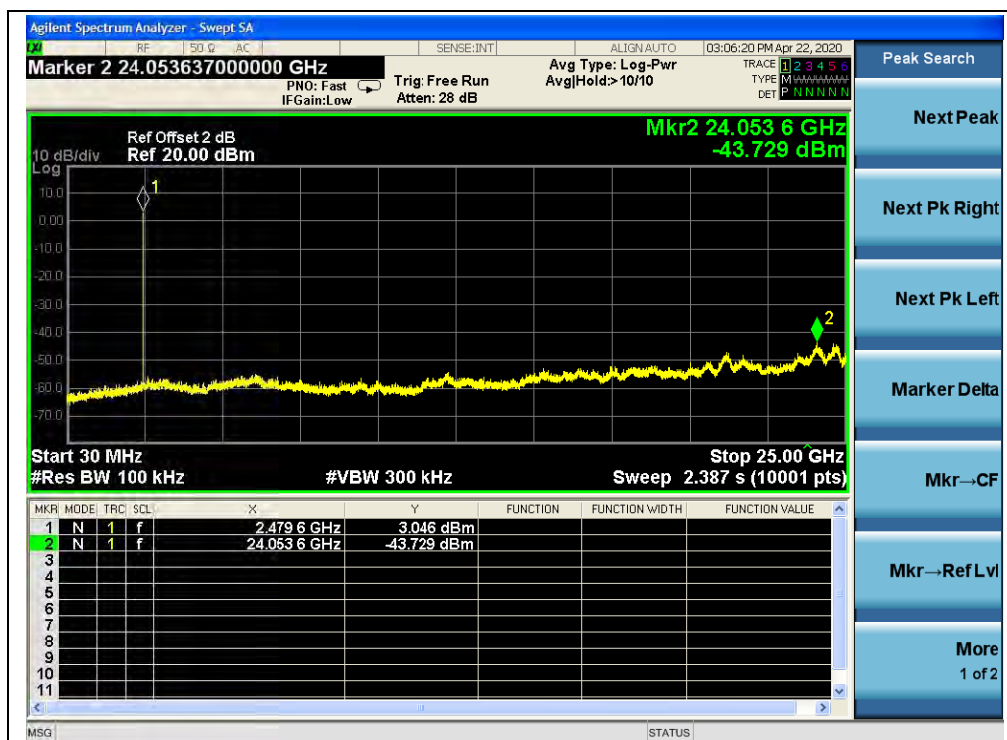

(Channel = 78, 30MHz to 25GH, 8-DPSK)

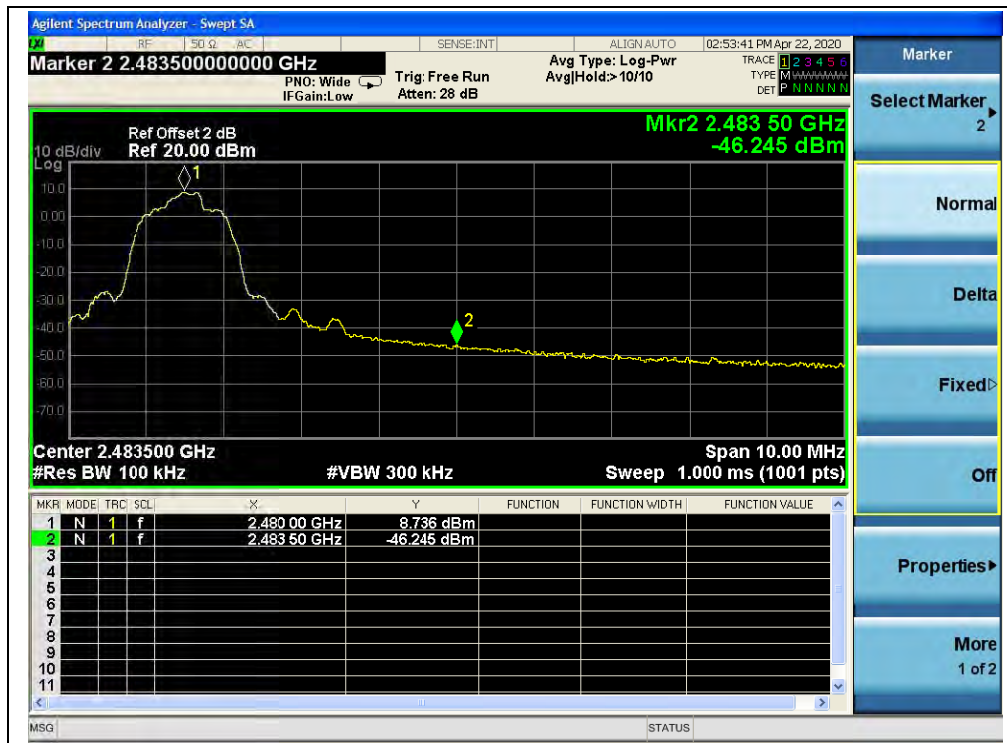

(Channel = 78, Band edge, 8-DPSK)



(Channel = 78, Band edge with hopping on, 8-DPSK)

2.11. Conducted Emission

2.11.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency (MHz)	range	Conducted Limit (dB μ V)	
		Quai-peak	Average
0.15 - 0.50		66 to 56	56 to 46
0.50 - 5		56	46
5- 30		60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.11.2. Test Description

Test Setup:

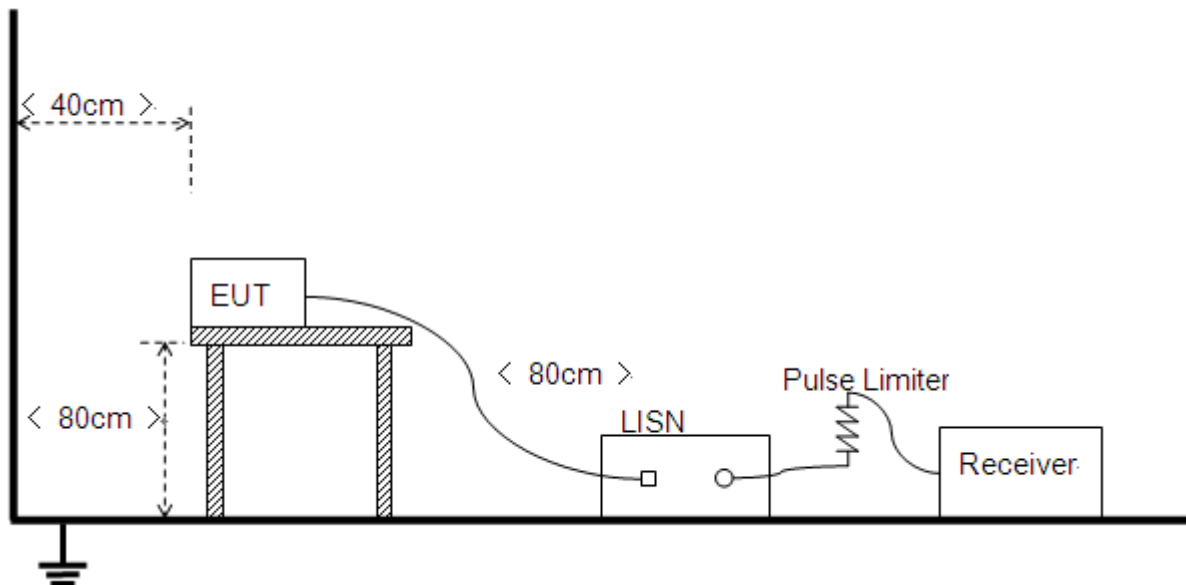

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



REPORT No.: SZ20070333W02

2.11.3. Test Result

Note: This test case does not apply this kind of EUT.


2.12. Restricted Frequency Bands

2.12.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.12.2. Test Description

Test Setup:

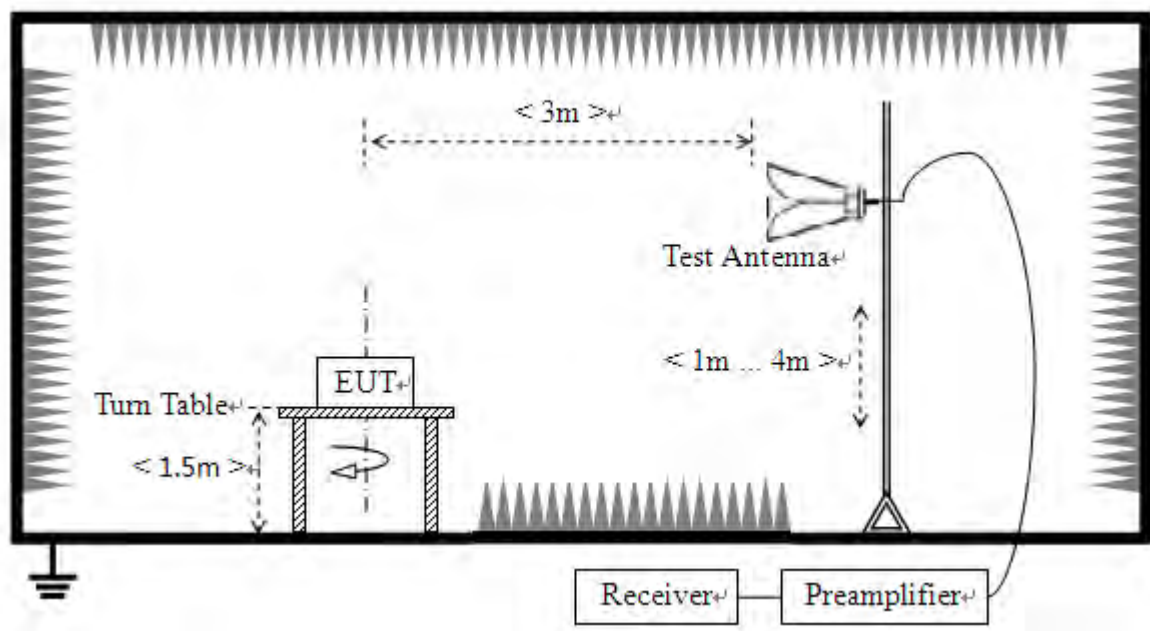

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.12.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.12.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Left


GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2387.95	PK	45.95	-29.67	32.56	48.84	74	PASS
0	2387.02	AV	43.46	-29.67	32.56	46.35	54	PASS
78	2484.70	PK	47.04	-29.67	32.56	49.93	74	PASS
78	2483.96	AV	45.17	-29.67	32.56	48.06	54	PASS




B. Test Plots:

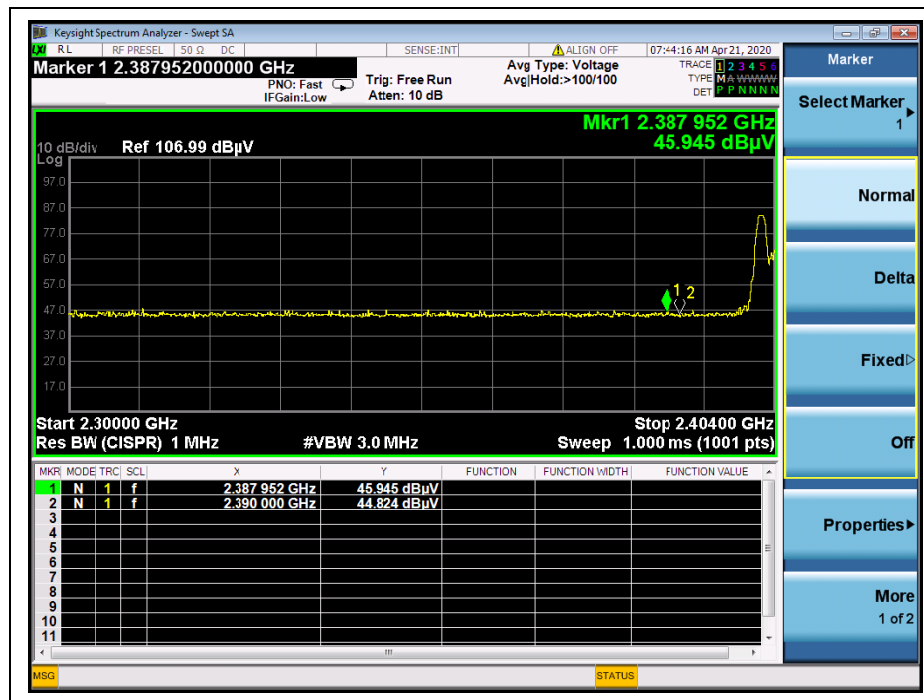


(PEAK, Channel = 0, GFSK)

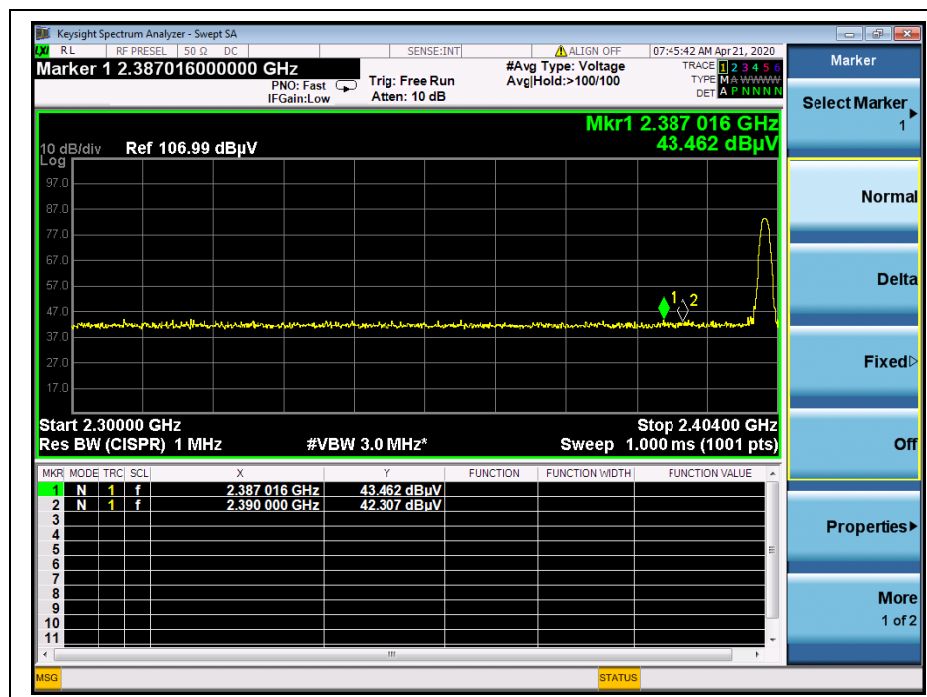

(AVERAGE, Channel = 0, GFSK)

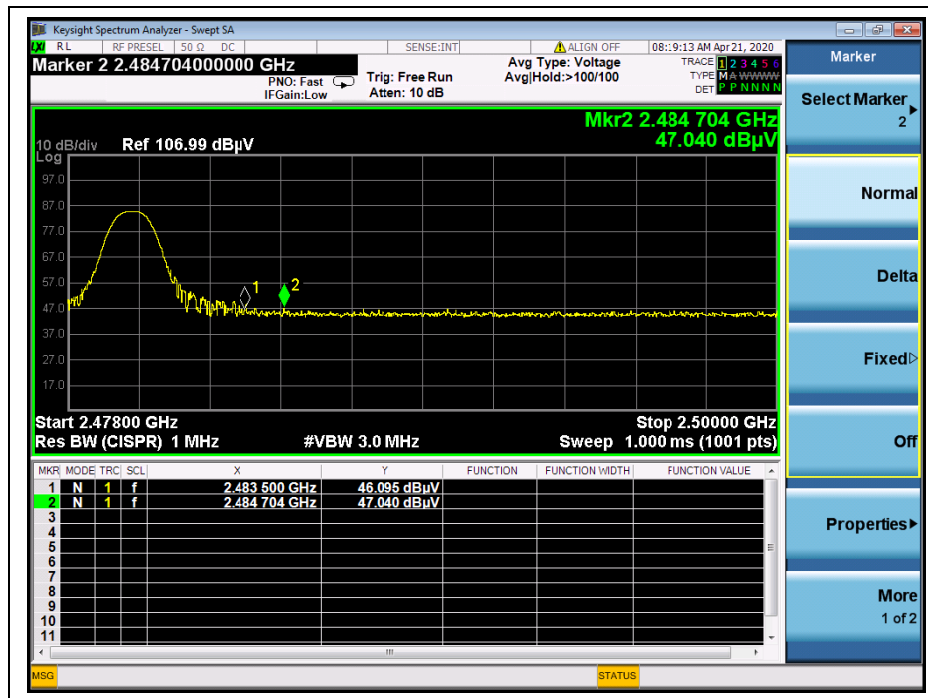

(PEAK, Channel = 78, GFSK)

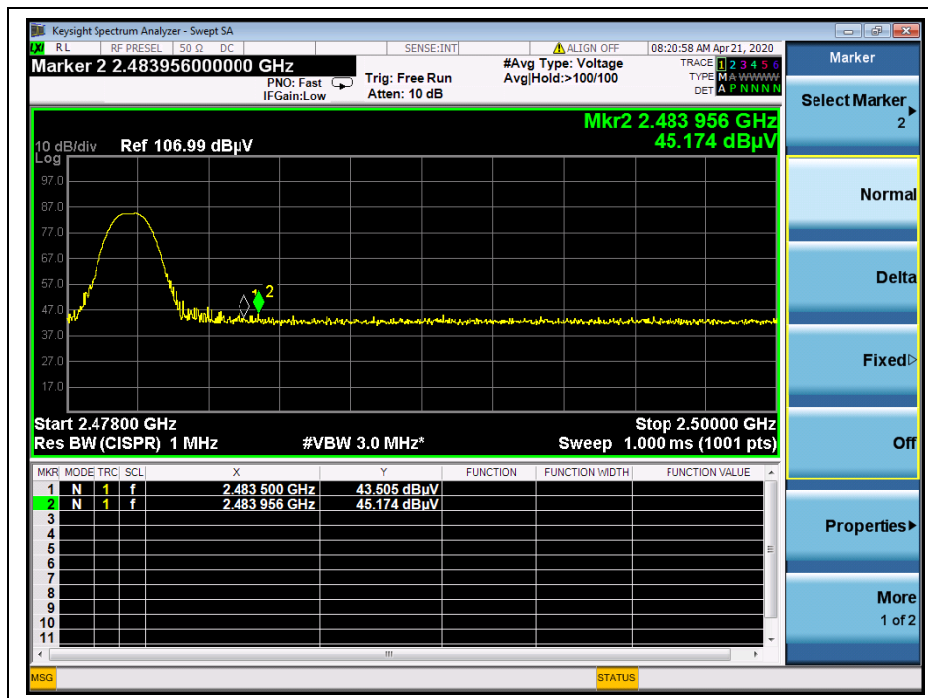

(AVERAGE, Channel = 78, GFSK)




$\pi/4$ -DQPSK Mode



A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2390.00	PK	44.33	-29.67	32.56	47.22	74	PASS
0	2383.90	AV	42.89	-29.67	32.56	45.78	54	PASS
78	2483.80	PK	48.03	-29.67	32.56	50.92	74	PASS
78	2486.16	AV	44.34	-29.67	32.56	47.23	54	PASS

B. Test Plots:

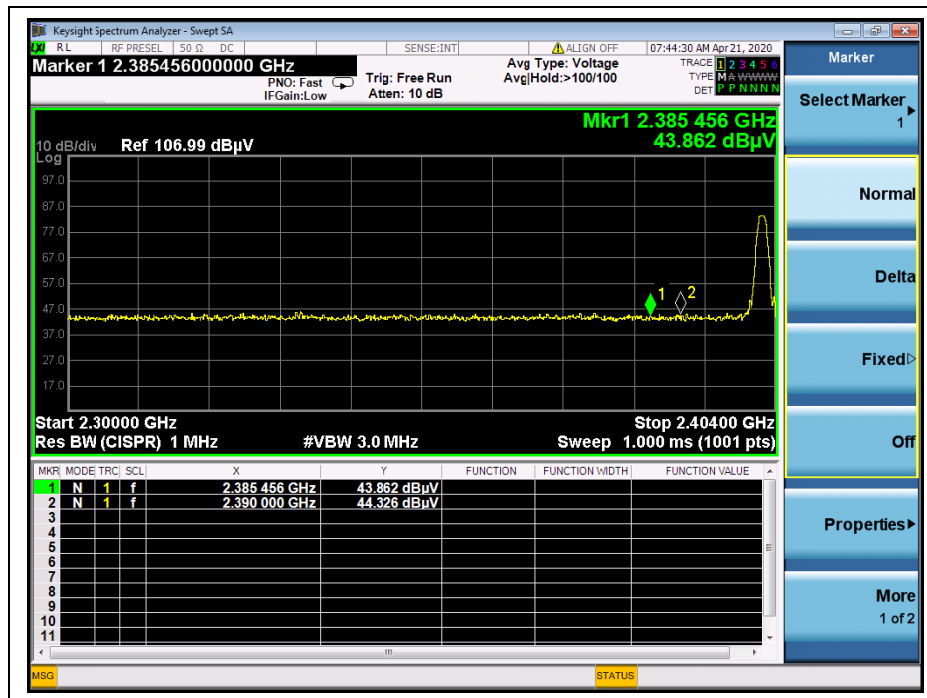

(PEAK, Channel = 0, $\pi/4$ -DQPSK)

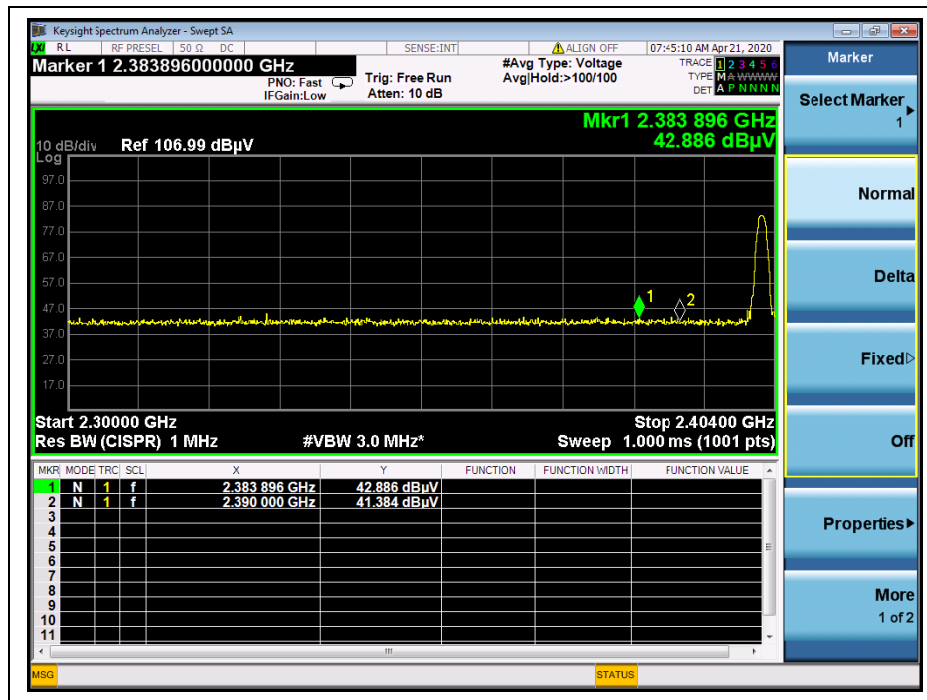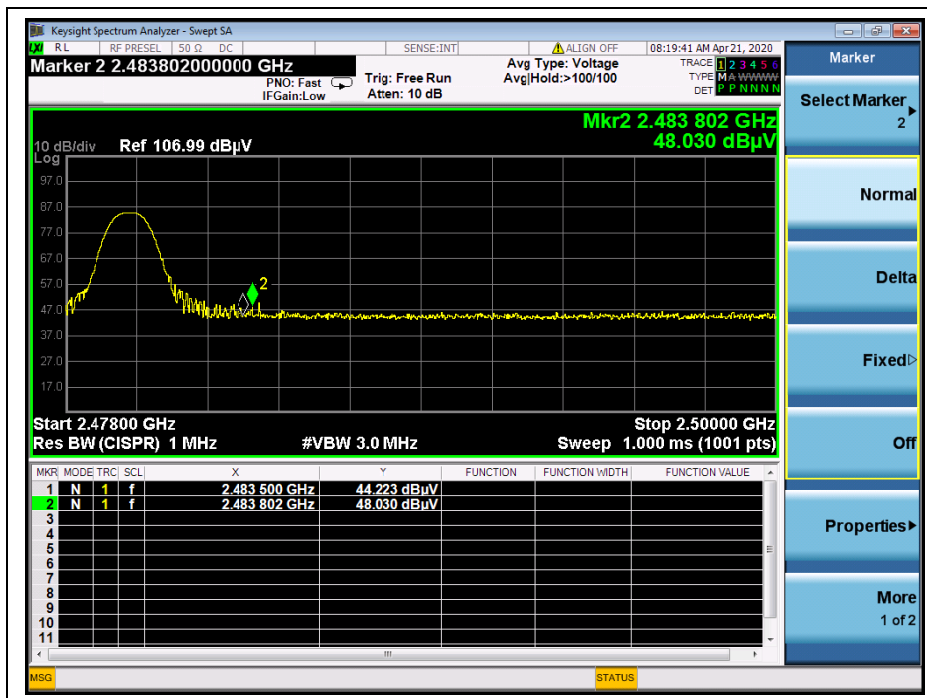(AVERAGE, Channel = 0, $\pi/4$ -DQPSK)(PEAK, Channel = 78, $\pi/4$ -DQPSK)

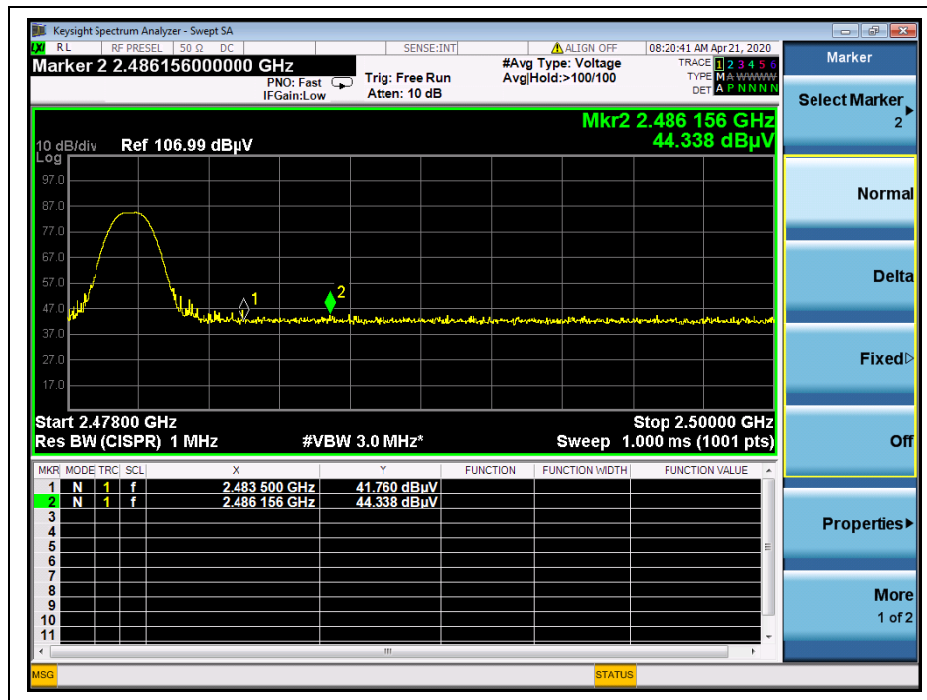(AVERAGE, Channel = 78, $\pi/4$ -DQPSK)




8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2377.34	PK	44.62	-29.67	32.56	47.51	74	PASS
0	2378.18	AV	41.62	-29.67	32.56	44.51	54	PASS
78	2484.33	PK	46.29	-29.67	32.56	49.18	74	PASS
78	2483.87	AV	44.31	-29.67	32.56	47.20	54	PASS


B. Test Plots:

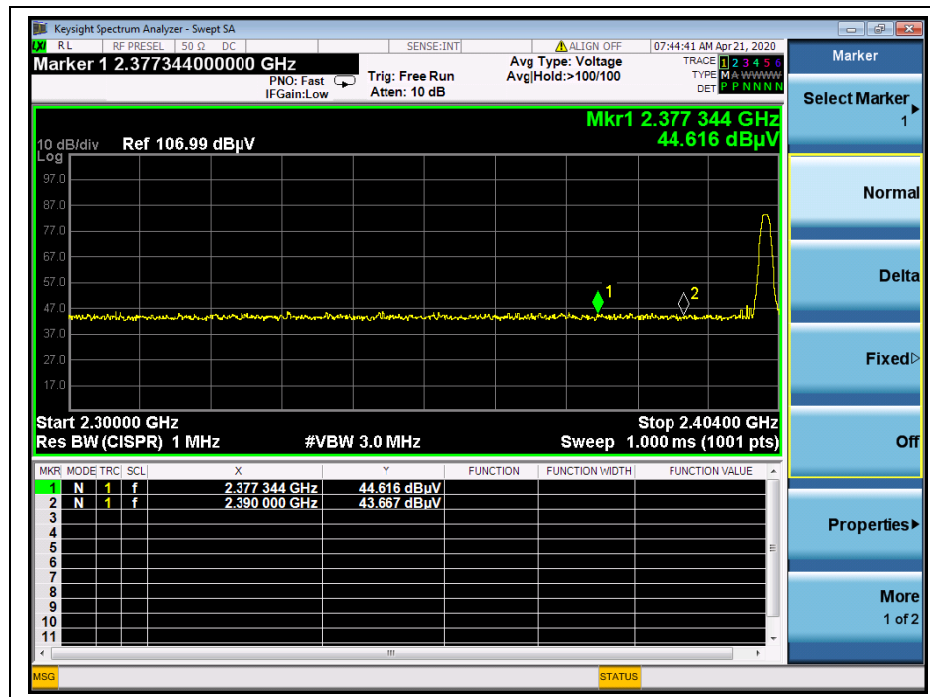


(PEAK, Channel = 0, 8-DPSK)

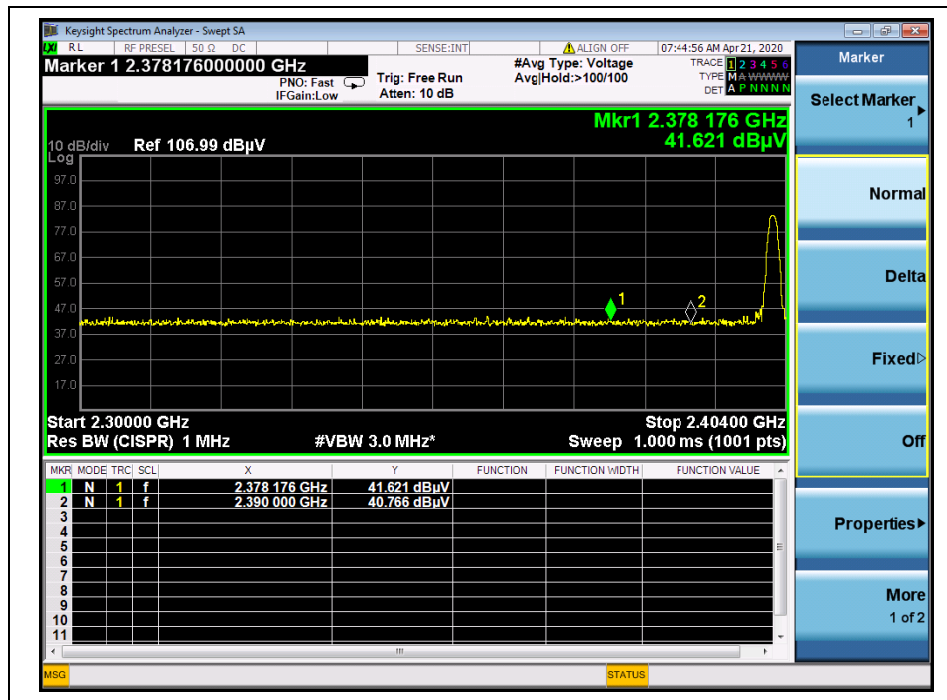

(AVERAGE, Channel = 0, 8-DPSK)

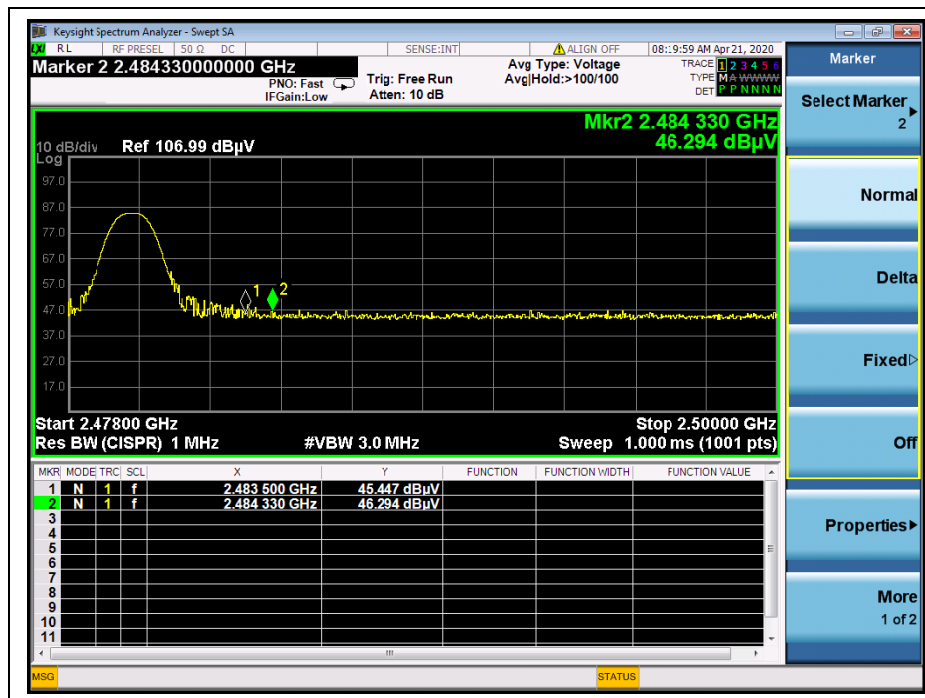

(PEAK, Channel = 78, 8-DPSK)

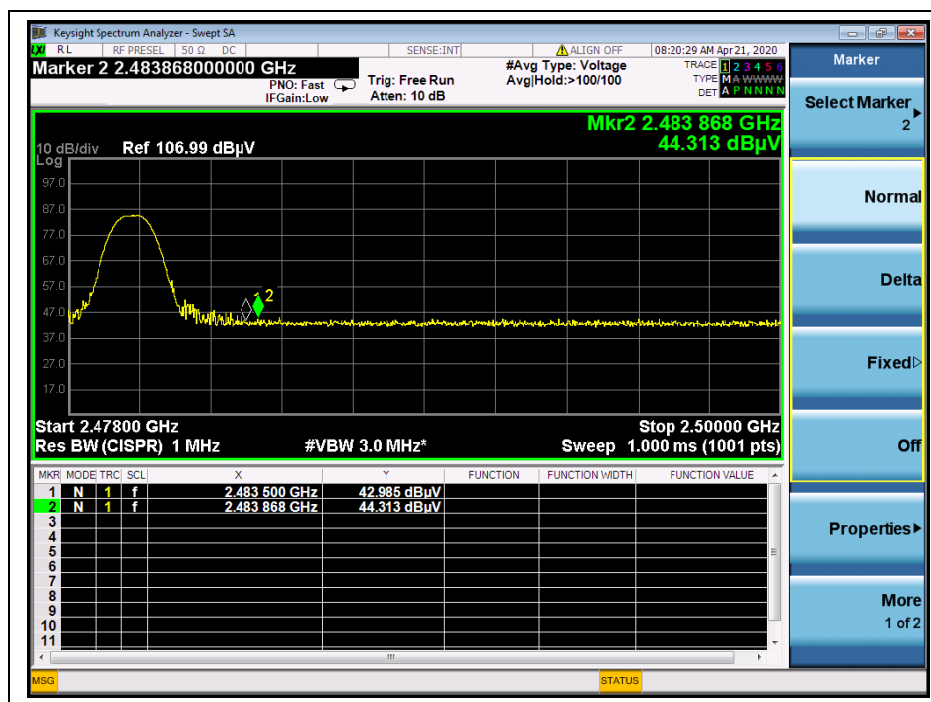

(AVERAGE, Channel = 78, 8-DPSK)




Right

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2390.00	PK	44.78	-29.67	32.56	47.67	74	PASS
0	2387.85	AV	43.16	-29.67	32.56	46.05	54	PASS
78	2485.41	PK	44.87	-29.67	32.56	47.76	74	PASS
78	2486.38	AV	42.90	-29.67	32.56	45.79	54	PASS


B. Test Plots:

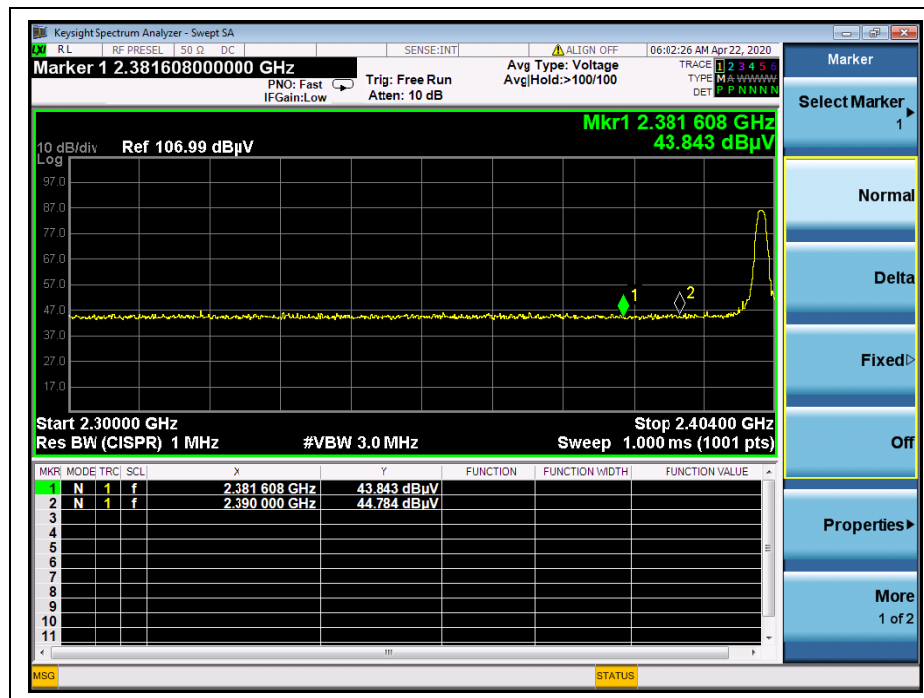


(PEAK, Channel = 0, GFSK)

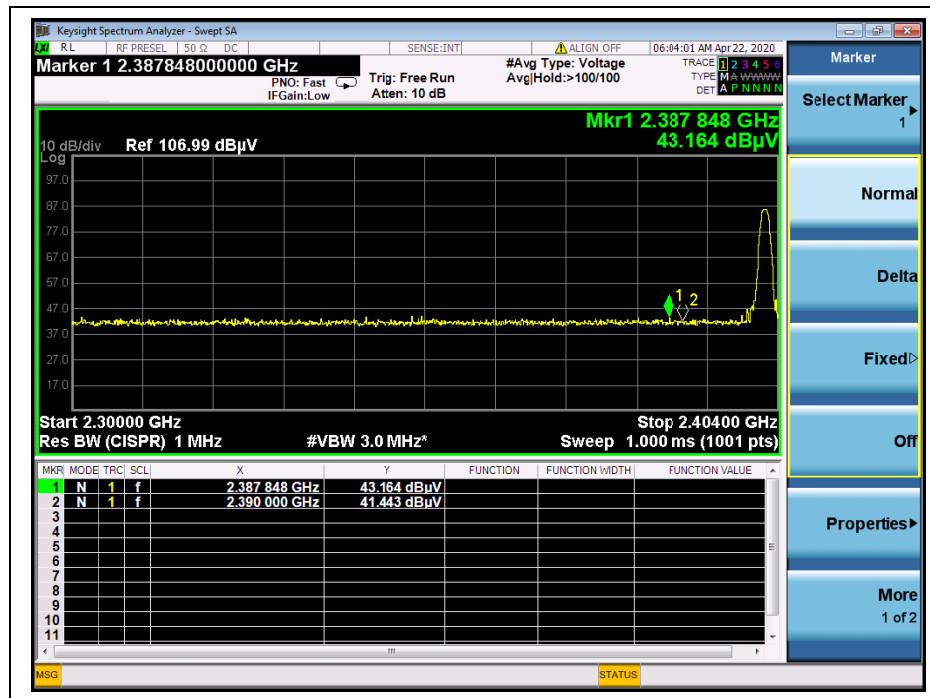

(AVERAGE, Channel = 0, GFSK)

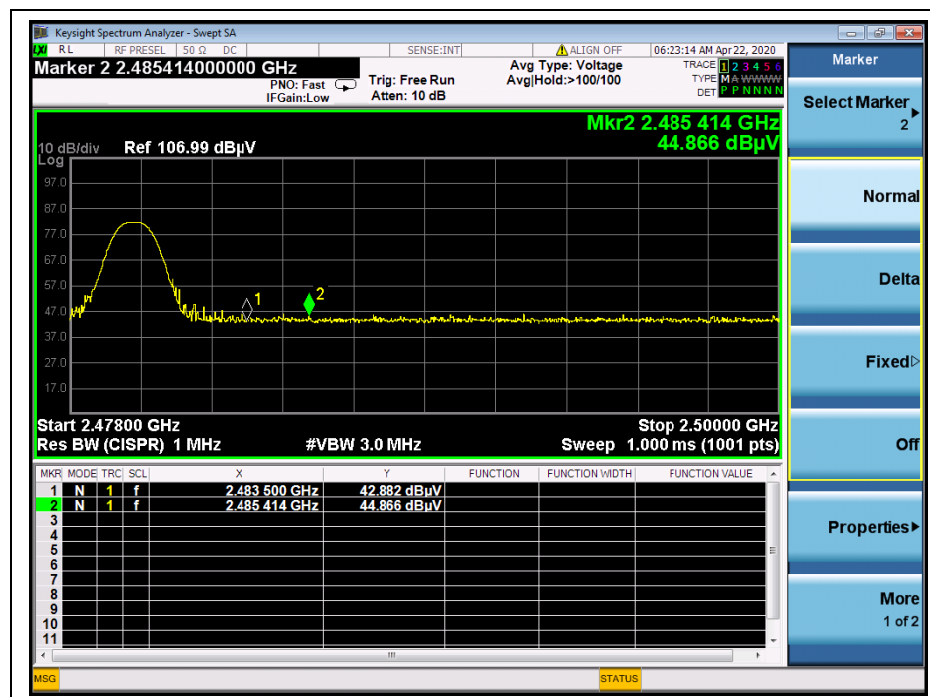

(PEAK, Channel = 78, GFSK)

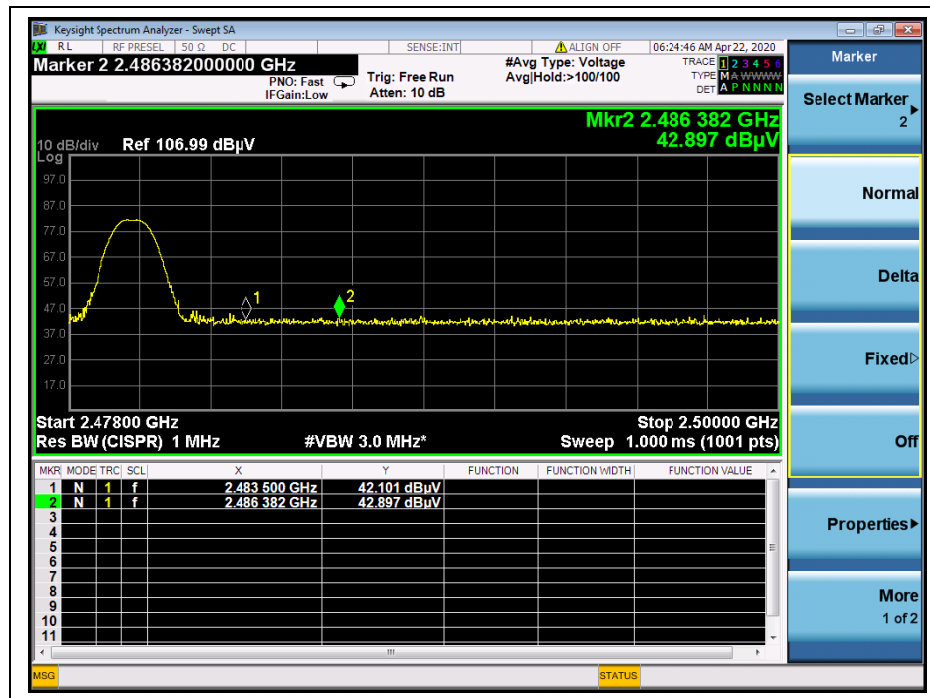

(AVERAGE, Channel = 78, GFSK)




$\pi/4$ -DQPSK Mode



A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2388.78	PK	44.72	-29.67	32.56	47.61	74	PASS
0	2386.29	AV	44.18	-29.67	32.56	47.07	54	PASS
78	2487.61	PK	45.13	-29.67	32.56	48.02	74	PASS
78	2484.34	AV	42.84	-29.67	32.56	45.73	54	PASS

B. Test Plots:

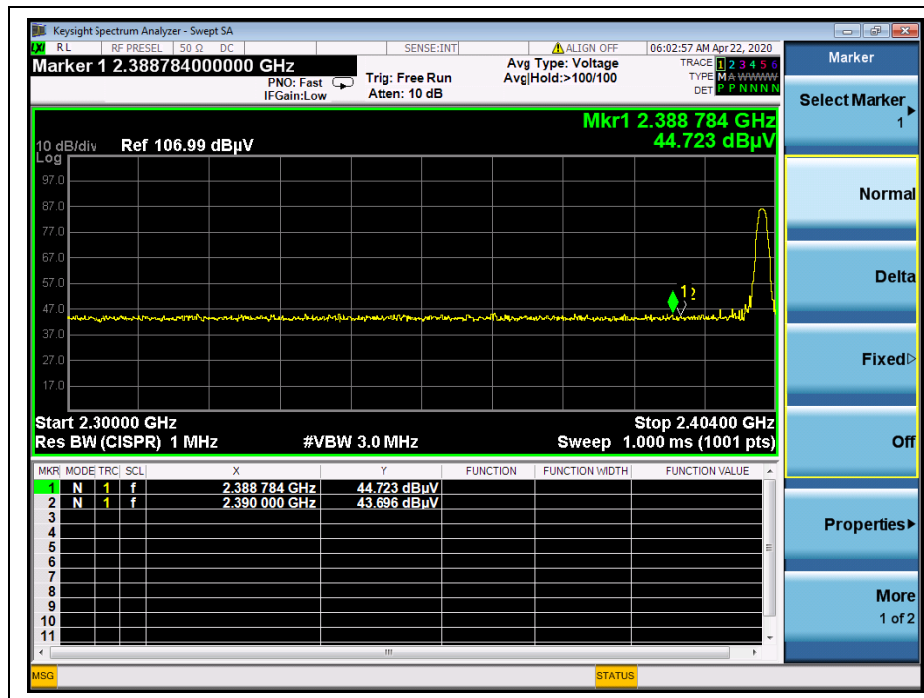

(PEAK, Channel = 0, $\pi/4$ -DQPSK)

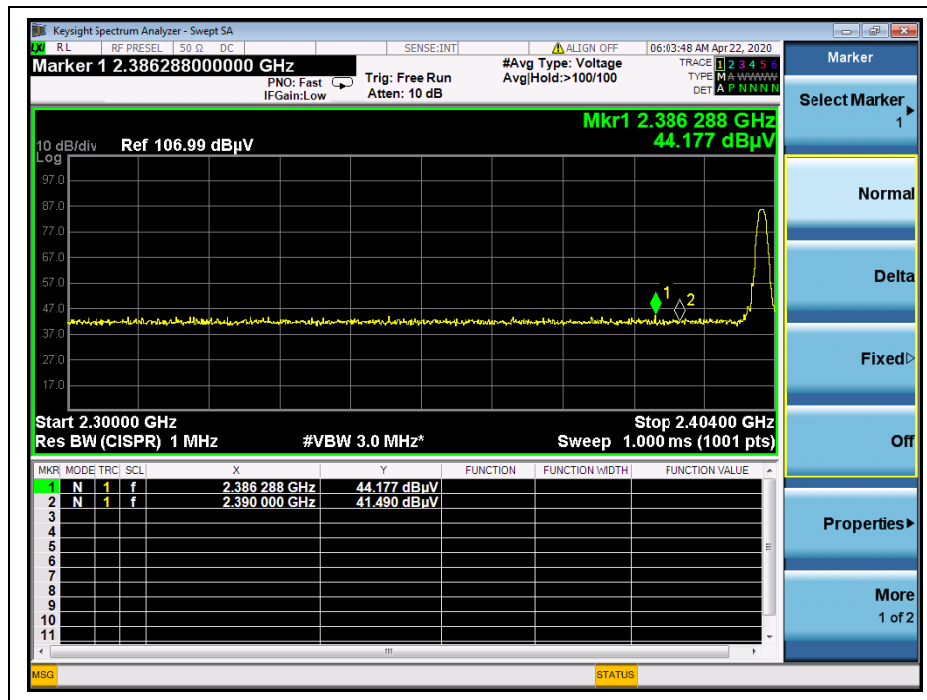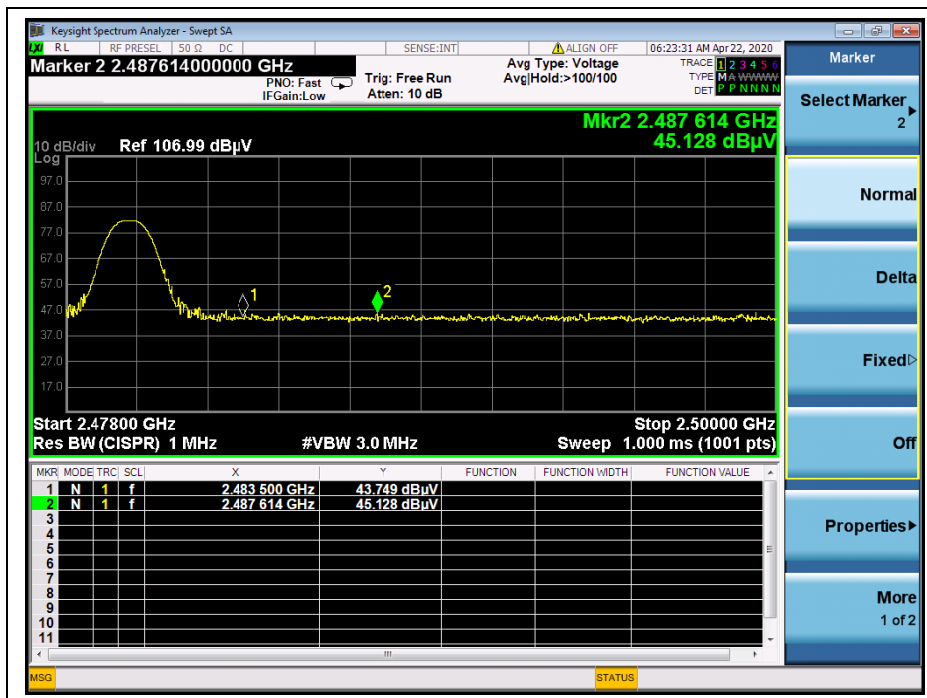(AVERAGE, Channel = 0, $\pi/4$ -DQPSK)(PEAK, Channel = 78, $\pi/4$ -DQPSK)

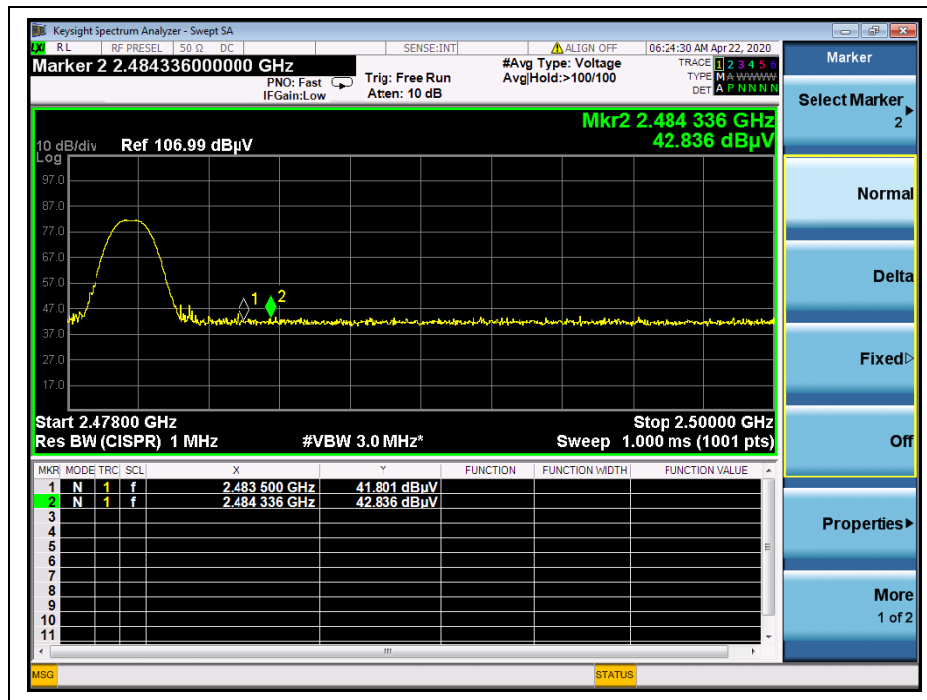(AVERAGE, Channel = 78, $\pi/4$ -DQPSK)




8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2382.65	PK	44.79	-29.67	32.56	47.68	74	PASS
0	2380.26	AV	43.45	-29.67	32.56	46.34	54	PASS
78	2485.46	PK	45.64	-29.67	32.56	48.53	74	PASS
78	2486.89	AV	43.29	-29.67	32.56	46.18	54	PASS


B. Test Plots:

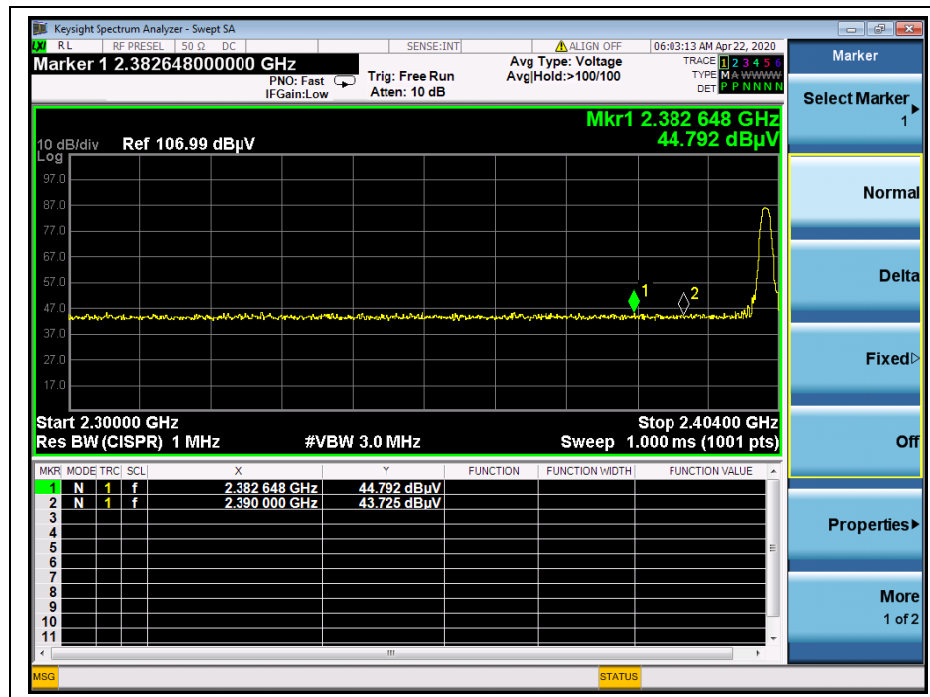


(PEAK, Channel = 0, 8-DPSK)

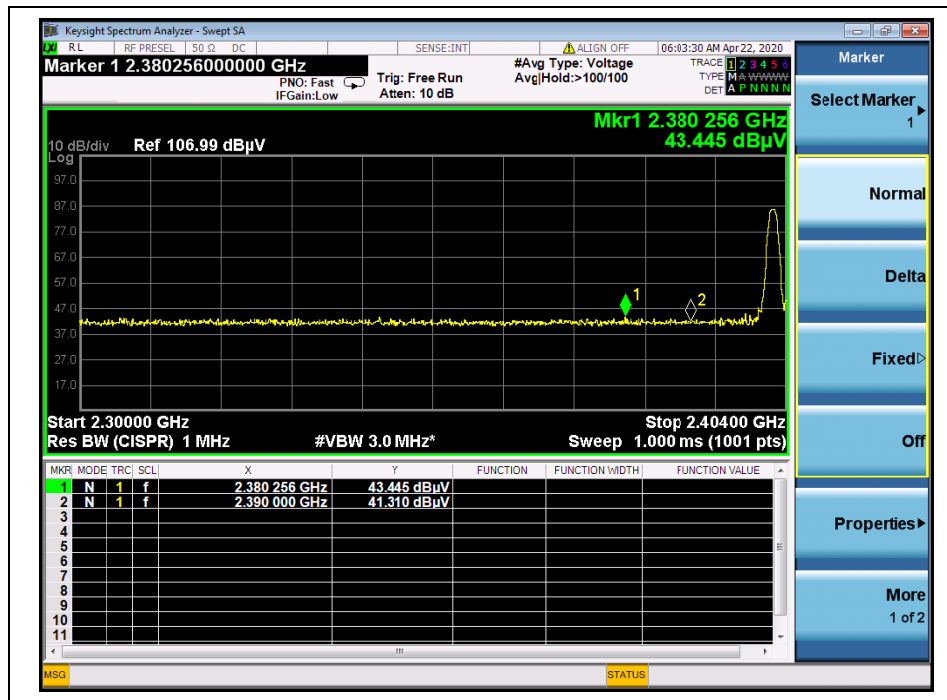

(AVERAGE, Channel = 0, 8-DPSK)

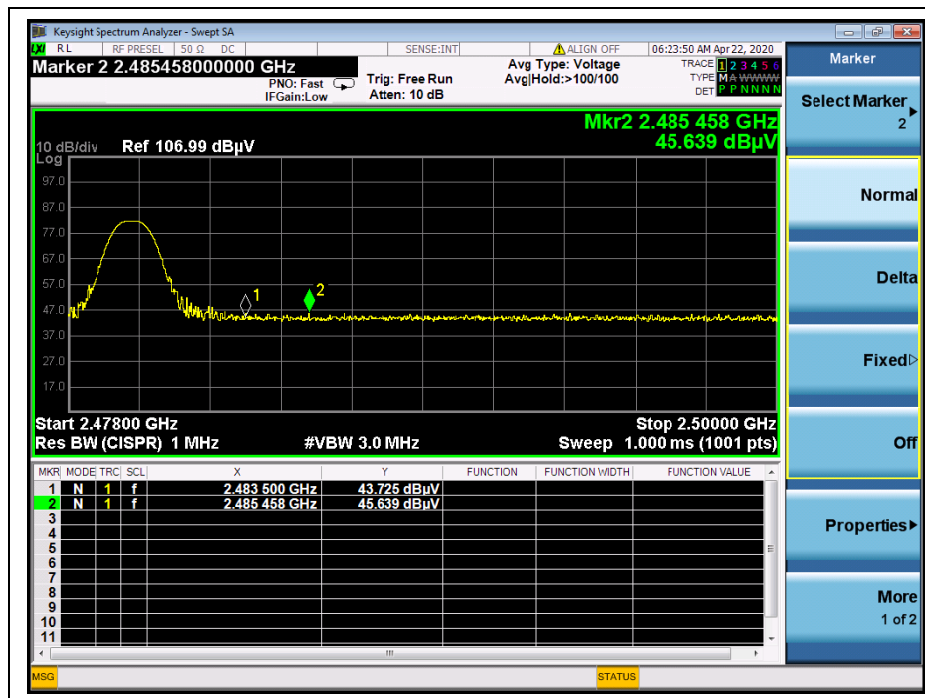

(PEAK, Channel = 78, 8-DPSK)

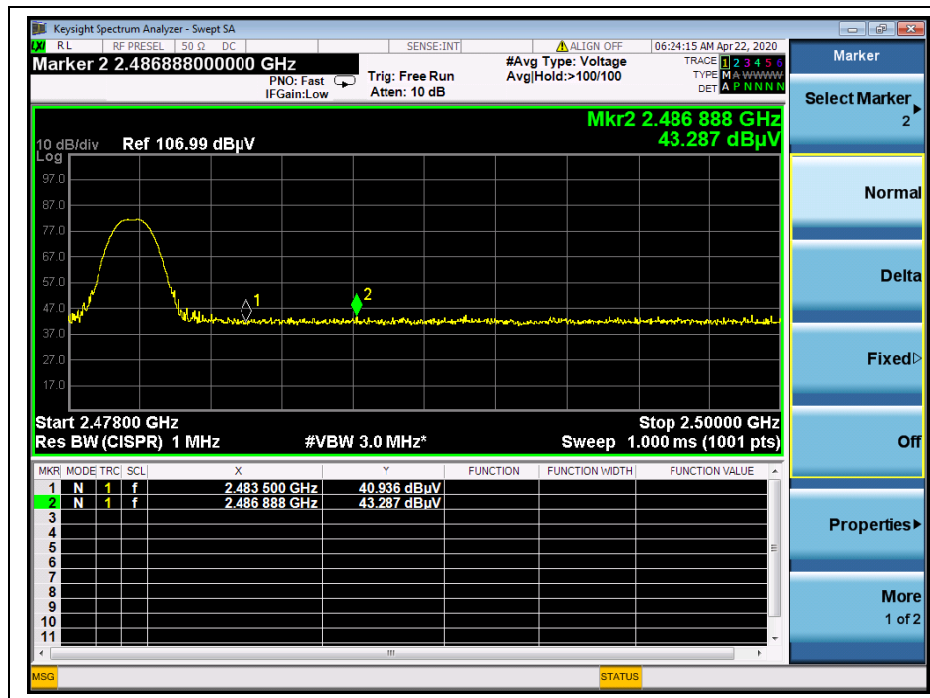

(AVERAGE, Channel = 78, 8-DPSK)

2.13. Radiated Emission

2.13.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note 1: For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


Note 2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.13.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

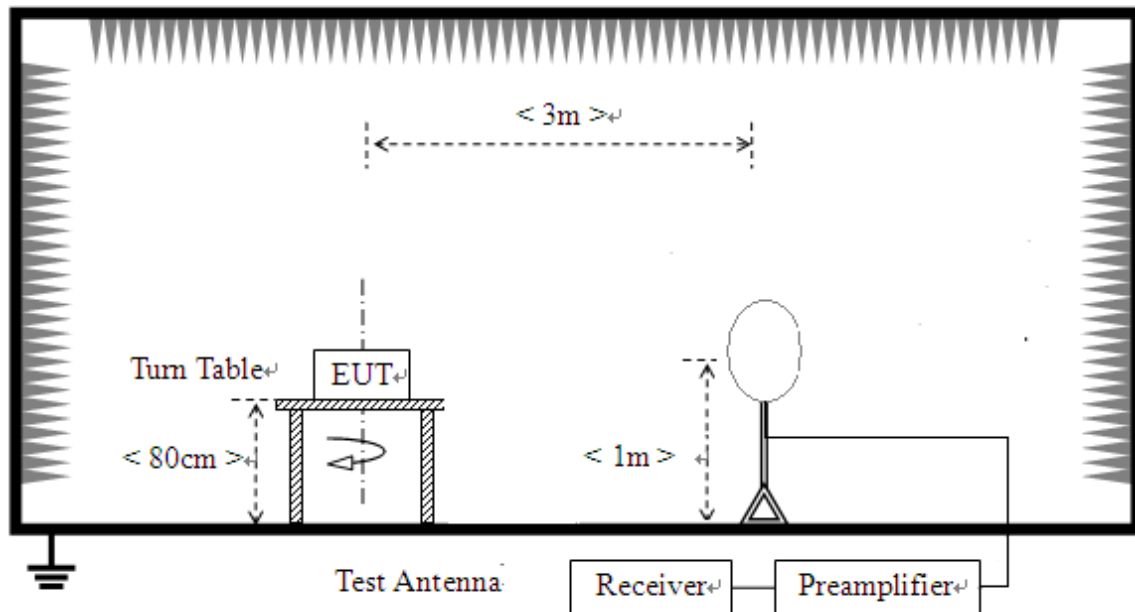

- 2) For radiated emissions from 30MHz to 1GHz

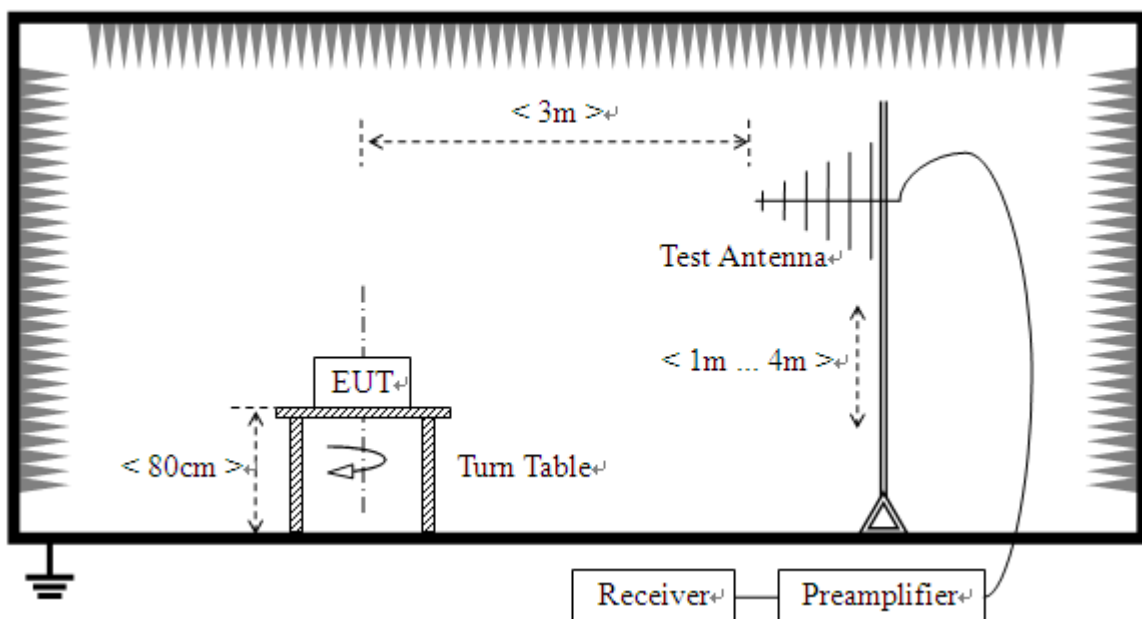

3) For radiated emissions above 1GHz

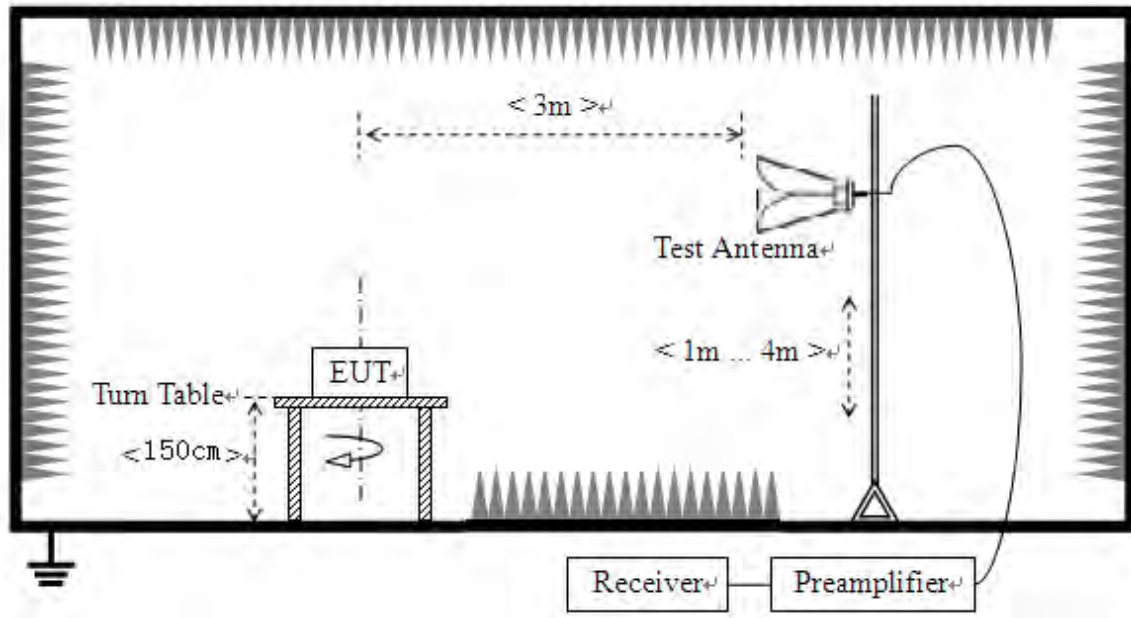

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be



higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

2.13.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.13.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**Left GFSK Mode**

Plots for Channel = 0

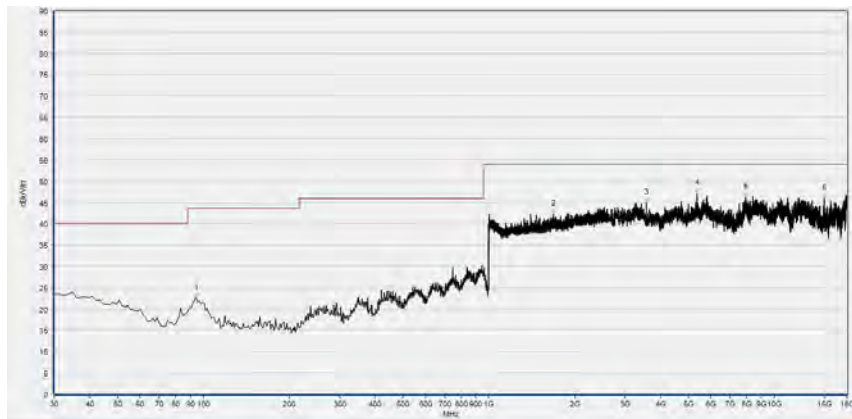

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
94.343	22.53	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1688.916	42.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3563.375	44.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5355.701	47.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7948.973	46.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14992.253	45.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 18GHz, Antenna Horizontal, GFSK, channel 0)

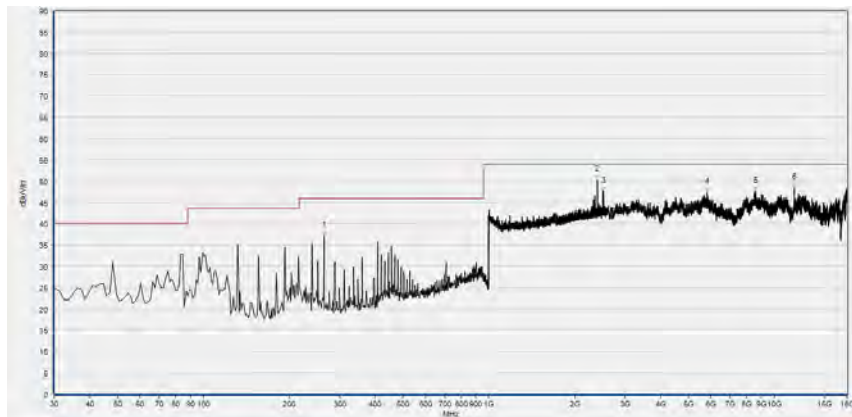


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
264.305	37.28	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2401.521	50.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2515.486	47.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5828.987	47.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8612.693	47.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11726.859	48.45	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, GFSK, channel 0)




Plot for Channel = 39

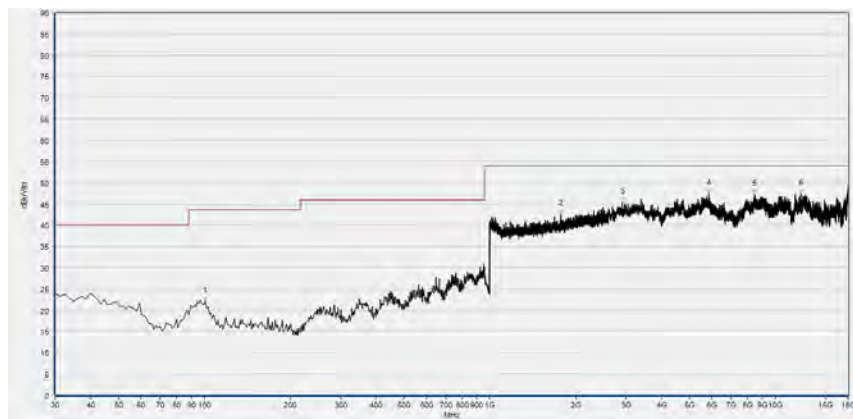

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.413	22.12	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1777.271	42.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2916.458	45.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5862.593	47.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8472.668	47.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12270.158	47.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, GFSK, channel 39)

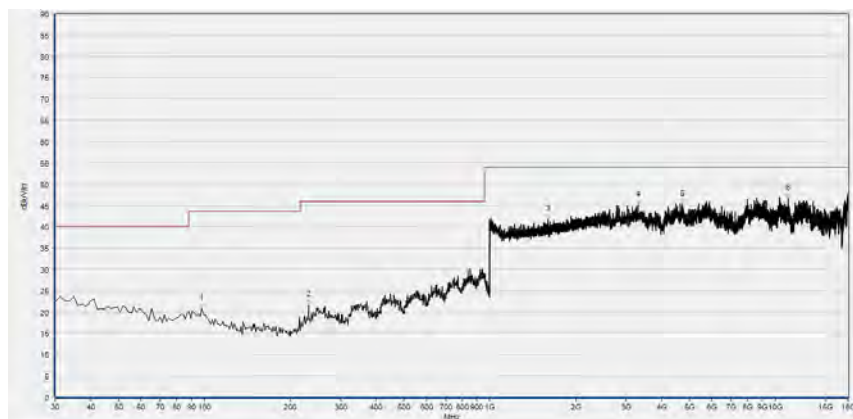

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.985	20.82	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
231.527	21.59	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1604.402	41.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3311.329	45.14	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4731.187	45.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11077.141	46.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, GFSK, channel 39)

Plot for Channel = 78

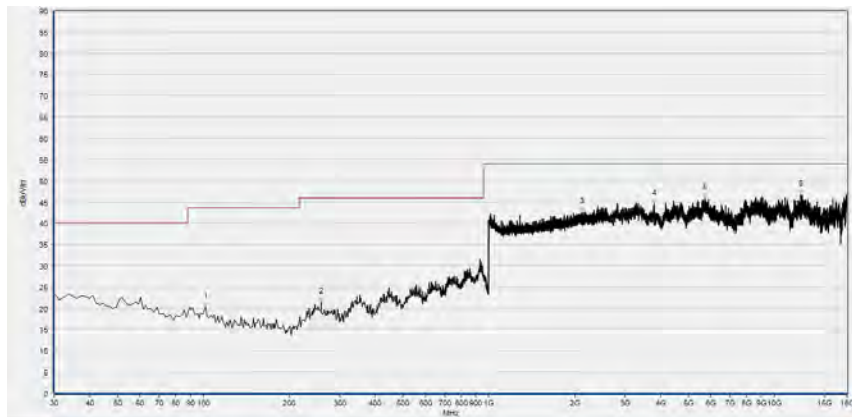

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
101.627	20.36	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
258.235	21.49	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2119.168	42.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3790.216	44.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5716.967	45.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12351.373	46.83	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 18GHz, Antenna Horizontal, GFSK, channel 78)

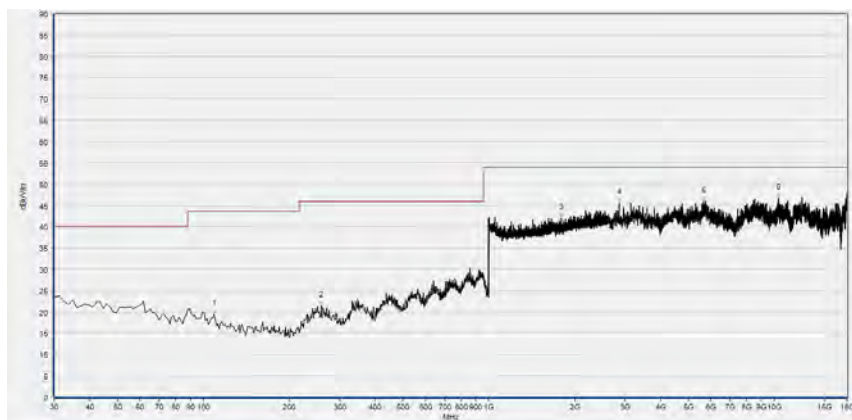


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.911	19.37	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
258.235	21.40	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1795.198	42.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2866.048	45.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5635.752	45.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10363.011	46.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, GFSK, channel 78)

 **$\pi/4$ -DQPSK Mode**

Plots for Channel = 0

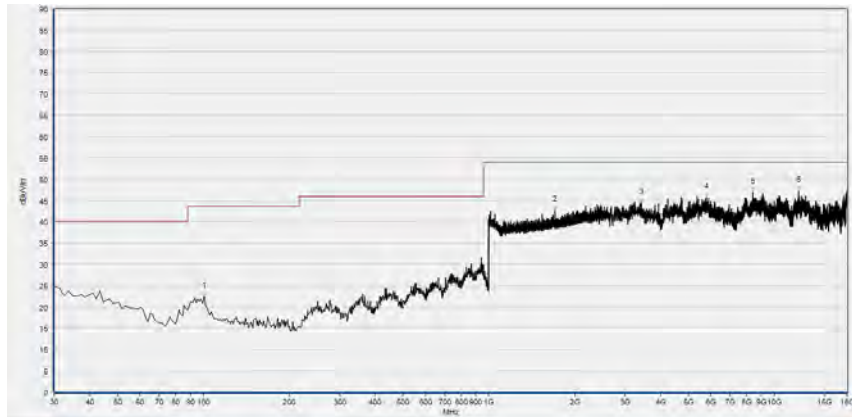


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.413	22.50	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1709.404	42.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3426.150	44.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5781.378	45.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8416.658	46.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12141.335	47.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

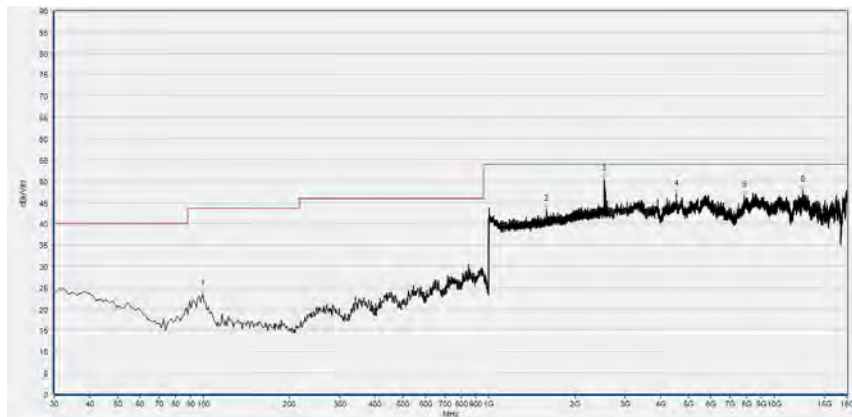(30MHz to 18GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 0)


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.199	23.38	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1594.158	43.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2540.456	50.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4543.553	46.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7856.556	46.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12609.020	47.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 0)

Plot for Channel = 39

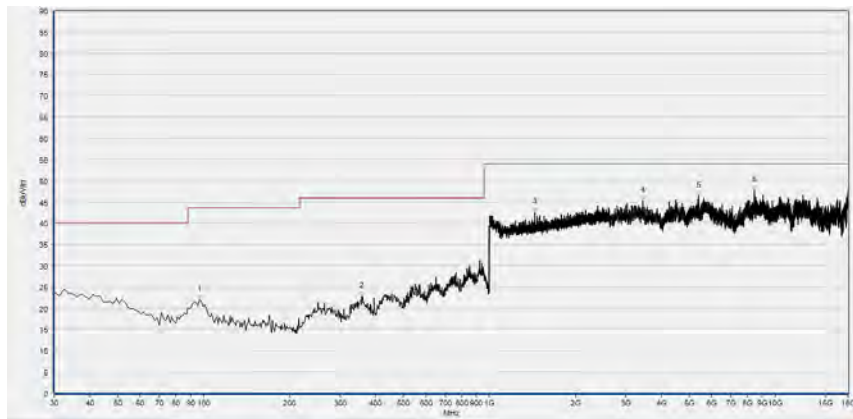


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
96.771	21.94	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
357.785	22.80	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1438.575	42.49	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3448.554	45.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5400.509	46.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8453.064	47.83	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

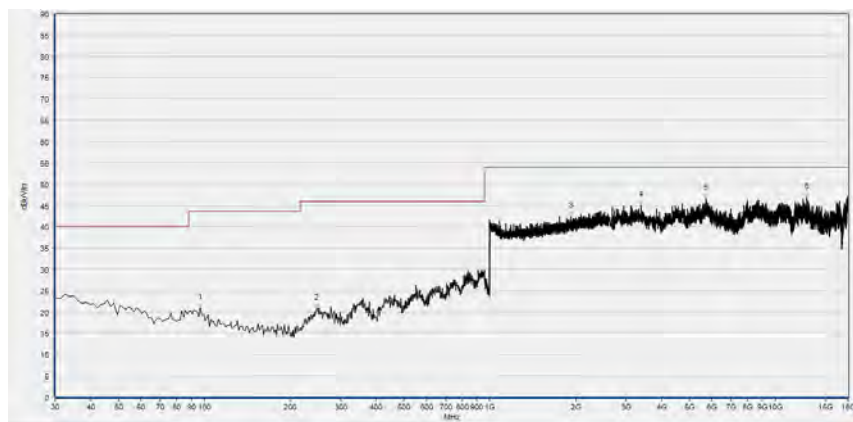(30MHz to 18GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 39)


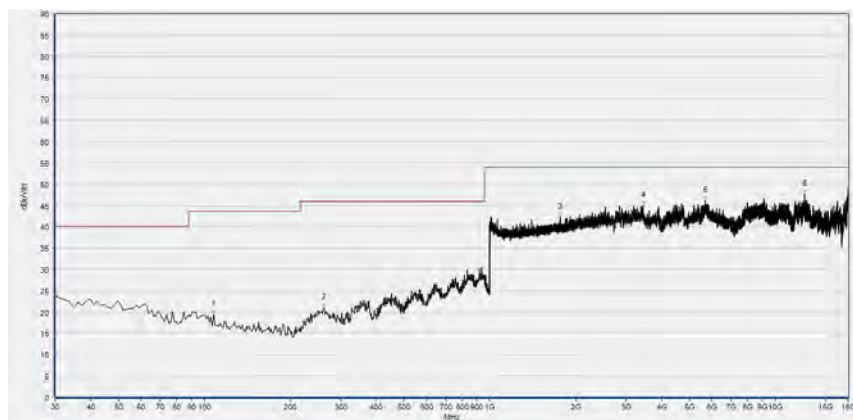
Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
96.771	21.00	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
247.309	20.75	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1925.170	42.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3392.544	45.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5714.166	46.63	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12883.470	46.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 39)

Plot for Channel = 78

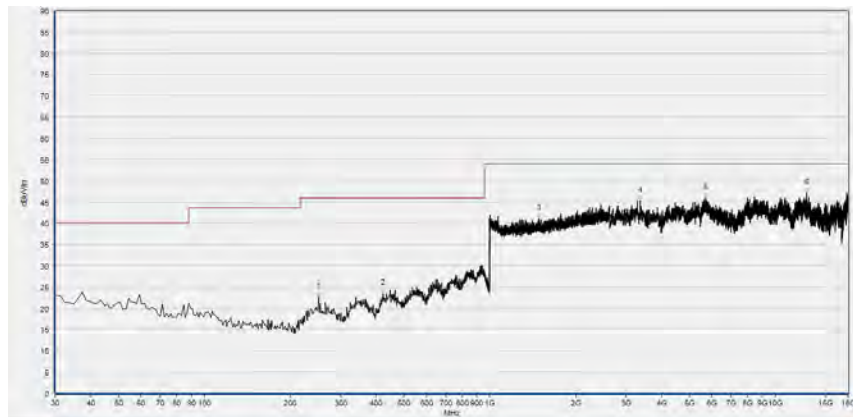

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
250.951	22.59	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
423.342	23.40	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1485.314	41.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3361.738	45.31	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5719.767	45.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12886.270	47.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 78)


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.697	19.33	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
261.877	20.87	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1764.466	42.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3440.153	44.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5680.560	46.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12667.831	47.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 78)


**8-DPSK Mode**

Plots for Channel = 0

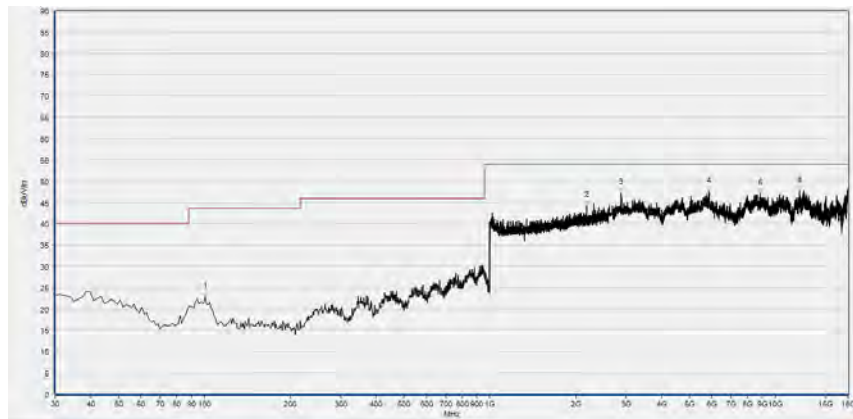

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.413	22.80	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2188.315	44.17	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2877.250	47.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5859.793	47.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8859.138	47.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12155.337	47.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, 8-DPSK, channel 0)

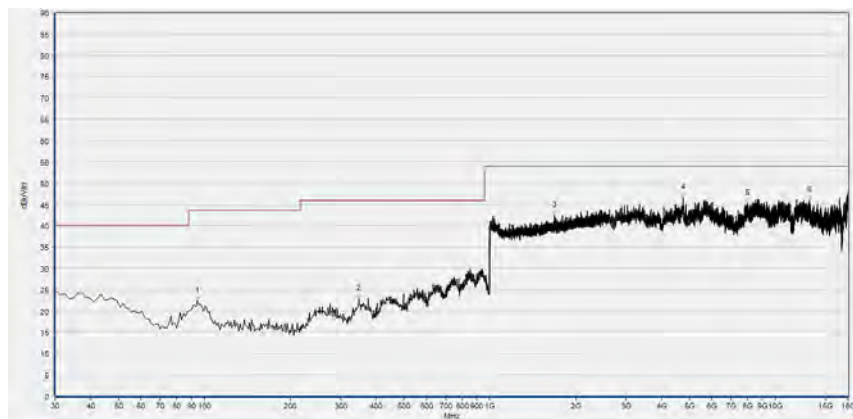

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
94.343	22.32	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
348.073	22.83	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1683.153	42.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4750.791	46.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7988.180	45.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13163.521	45.92	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, 8-DPSK, channel 0)

Plot for Channel = 39

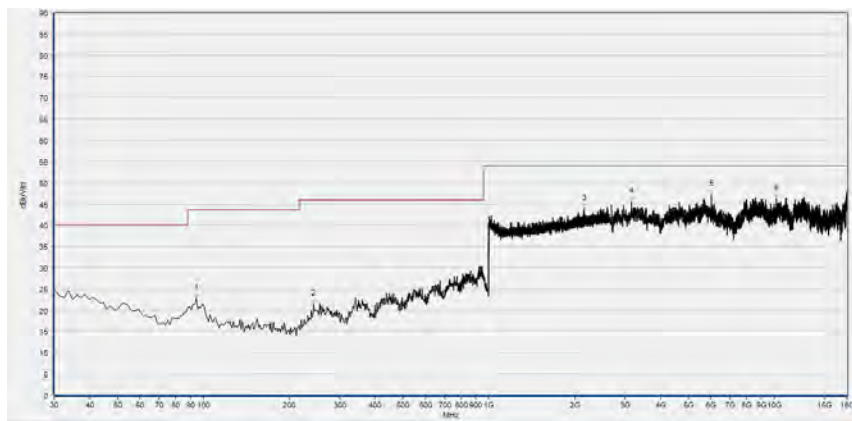

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
94.343	22.82	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
243.667	21.38	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2155.022	43.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3165.703	45.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6033.424	47.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10189.380	46.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, 8-DPSK, channel 39)

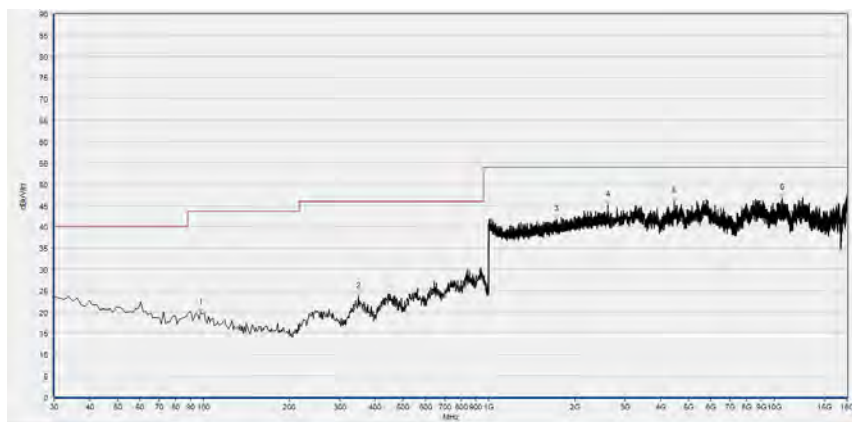

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.985	19.70	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
349.287	23.60	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1727.971	41.79	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2614.003	45.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4462.339	45.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10651.464	46.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, 8-DPSK, channel 39)

Plot for Channel = 78

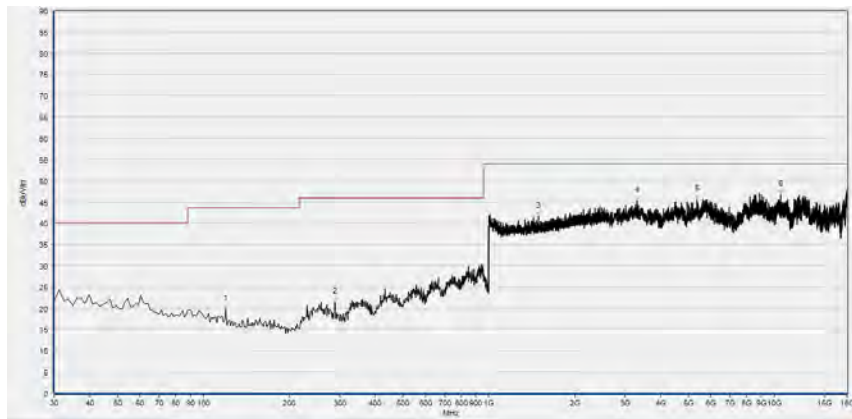

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
119.837	19.72	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
288.586	21.37	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1494.278	41.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3311.329	45.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5361.302	45.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10514.239	46.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 18GHz, Antenna Horizontal, 8-DPSK, channel 78)

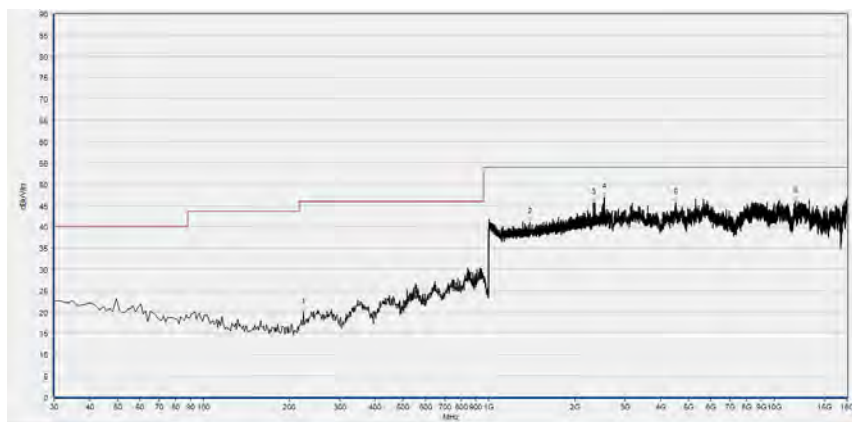


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
224.243	19.88	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1392.477	40.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2327.251	45.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2535.334	46.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4501.546	45.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11872.486	45.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, 8-DPSK, channel 78)




Right GFSK Mode

Plots for Channel = 0

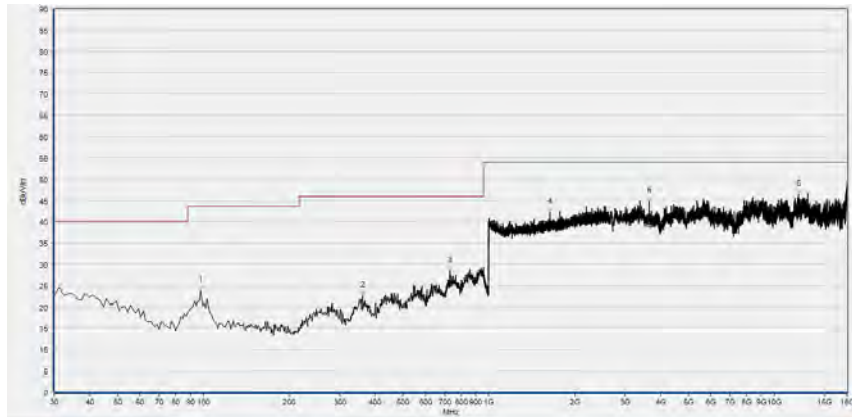

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.985	23.81	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
361.427	22.55	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
729.274	28.44	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1635.774	42.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3647.390	44.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12141.335	46.49	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 18GHz, Antenna Horizontal, GFSK, channel 0)

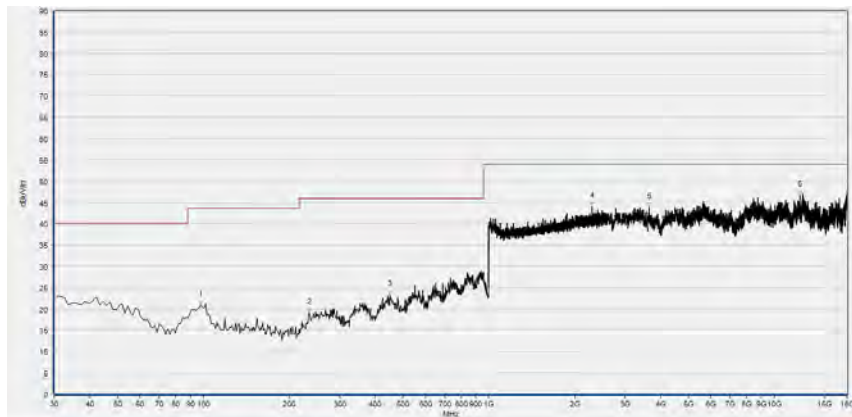


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.985	20.90	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
235.169	19.05	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
451.264	23.33	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2298.439	44.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3652.991	43.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12292.562	46.83	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, GFSK, channel 0)




Plot for Channel = 39

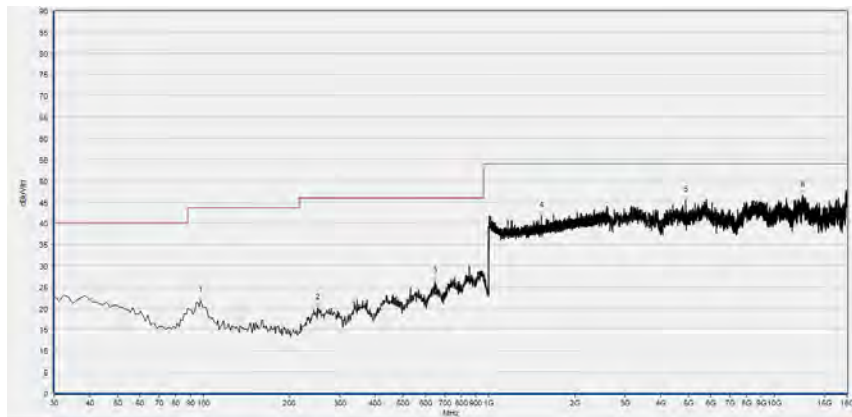

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.985	21.76	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
250.951	20.10	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
645.507	26.31	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1530.772	41.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4882.415	45.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12606.219	46.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, GFSK, channel 39)

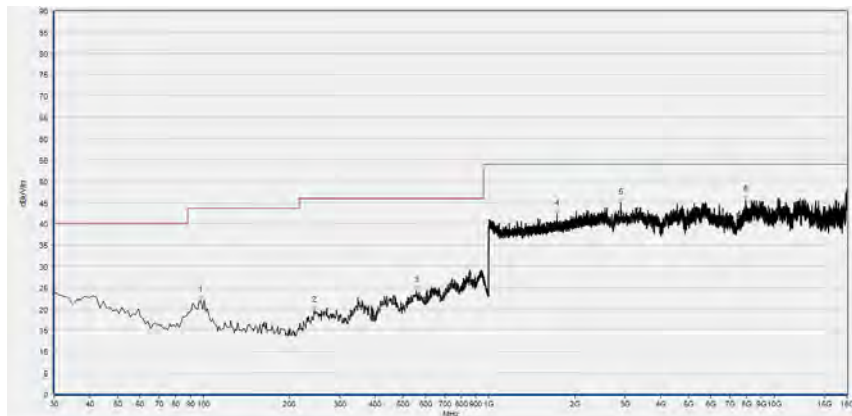

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.985	21.90	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
244.881	19.53	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
555.670	24.34	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1733.093	42.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2891.253	44.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7951.773	45.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, GFSK, channel 39)

Plot for Channel = 78

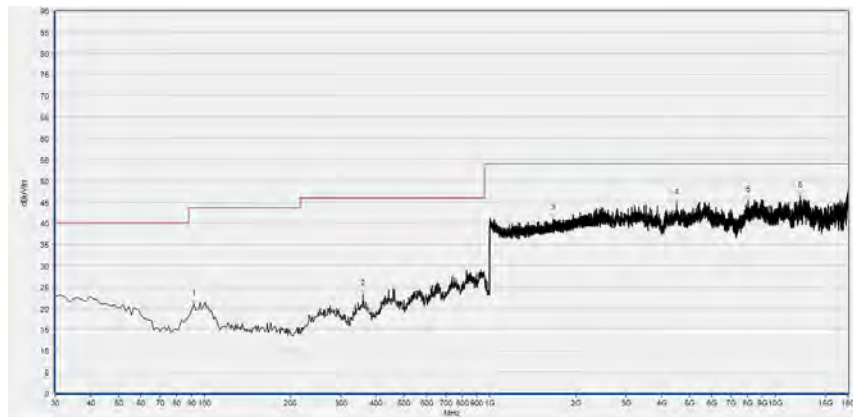

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
91.915	21.02	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
358.999	23.38	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1667.787	41.08	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4515.548	44.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8038.589	45.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12222.550	46.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 18GHz, Antenna Horizontal, GFSK, channel 78)

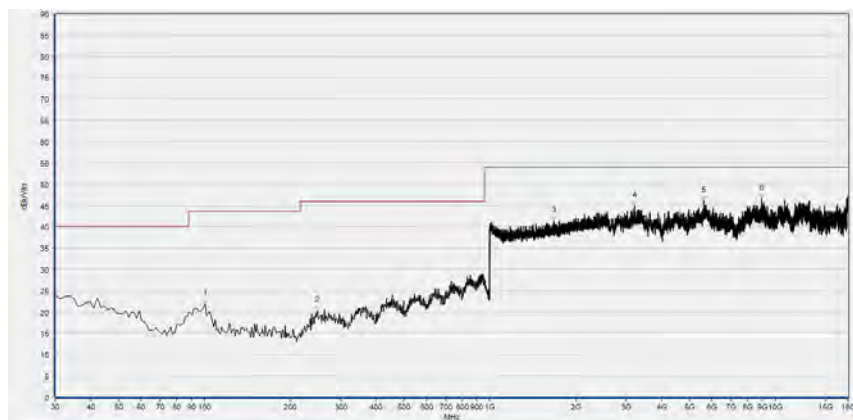


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.413	21.86	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
248.523	20.36	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1678.671	41.38	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3213.312	44.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5630.151	46.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8954.355	46.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, GFSK, channel 78)

 **$\pi/4$ -DQPSK Mode**

Plots for Channel = 0

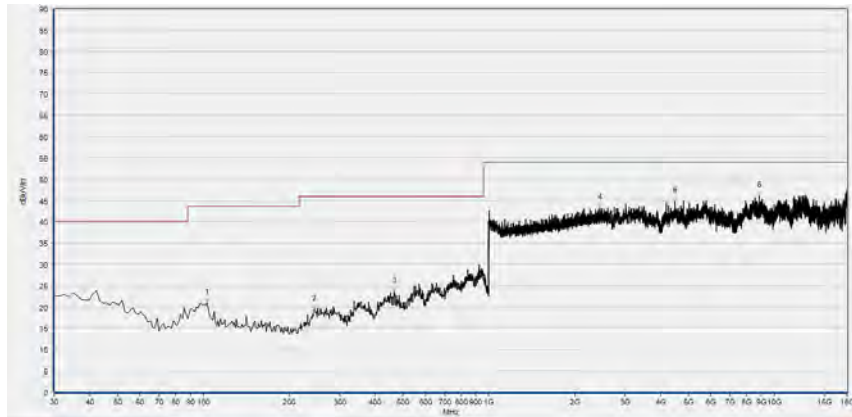


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.841	20.87	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
244.881	19.40	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
465.832	23.67	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2450.820	43.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4490.344	44.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8856.338	46.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

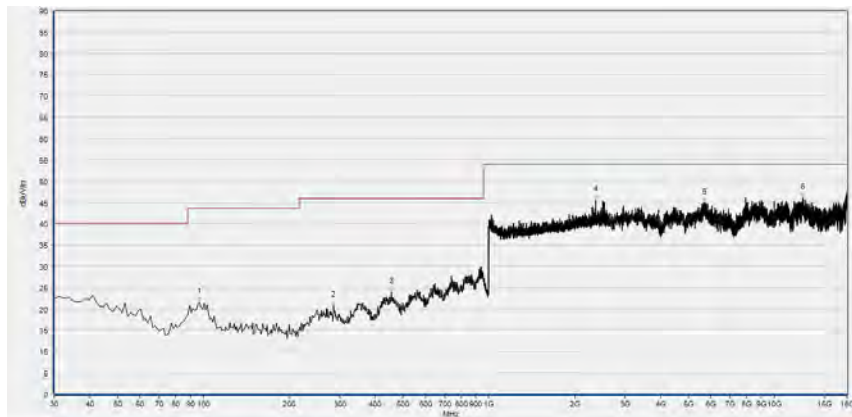(30MHz to 18GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 0)


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
96.771	21.63	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
286.158	20.79	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
456.120	24.03	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2361.825	45.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5686.161	44.83	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12609.020	46.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 0)

Plot for Channel = 39

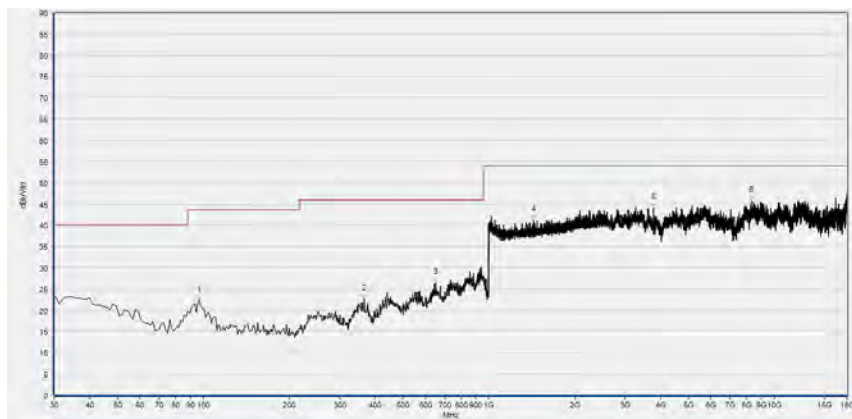


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
96.771	22.36	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
366.283	22.57	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
652.791	26.55	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1437.295	41.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3776.214	44.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8327.041	45.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

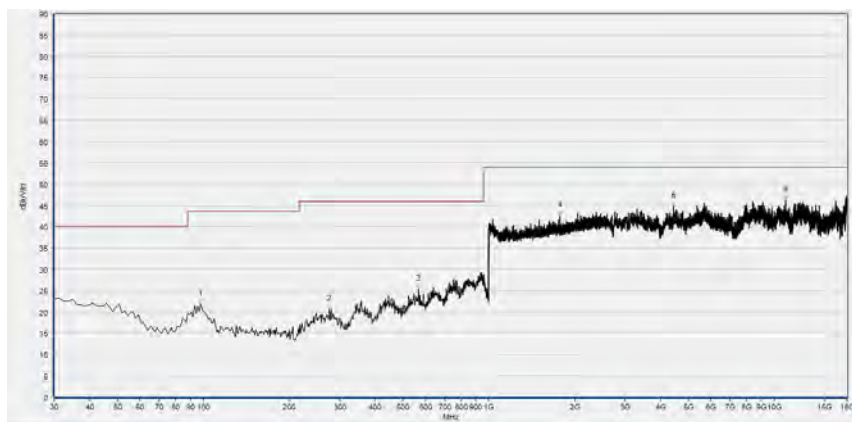(30MHz to 18GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 39)


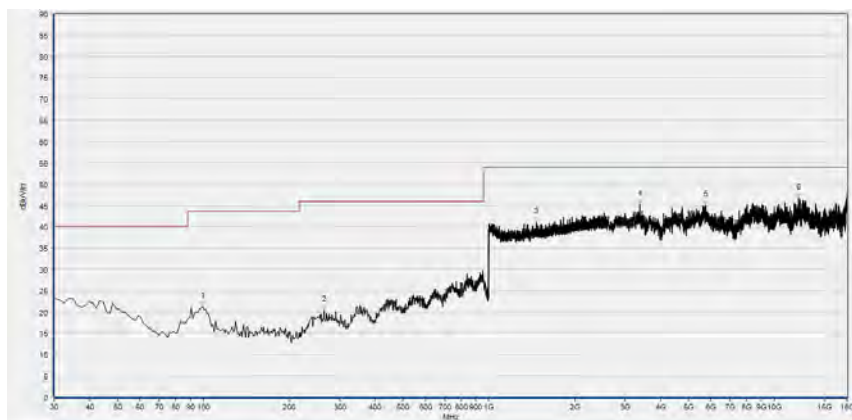
Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.985	21.81	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
276.446	20.55	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
567.810	25.23	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1776.631	42.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4428.732	44.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10981.924	46.28	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 39)

Plot for Channel = 78

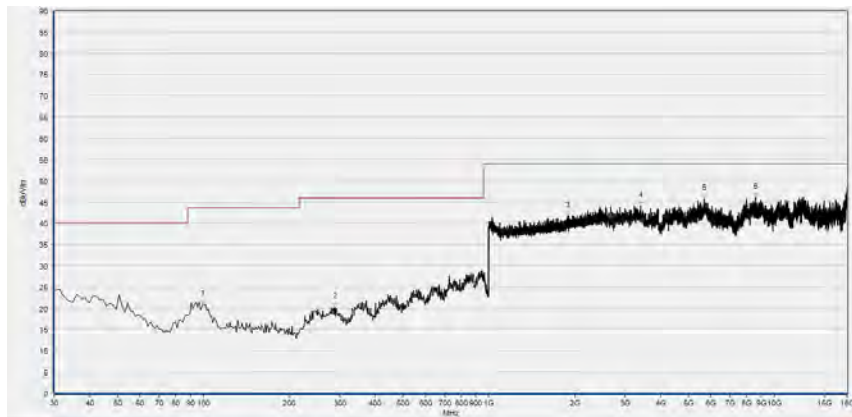

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.199	20.91	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
288.586	20.30	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1890.596	41.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3409.347	44.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5674.959	45.79	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8615.494	46.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, $\pi/4$ -DQPSK, channel 78)


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.199	21.25	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
264.305	20.44	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1467.387	41.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3375.741	45.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5758.974	45.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12138.534	46.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, $\pi/4$ -DQPSK, channel 78)


**8-DPSK Mode**

Plots for Channel = 0

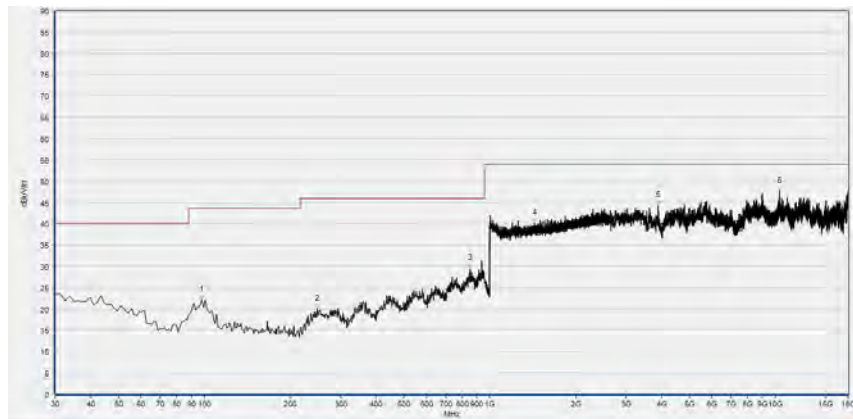

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.985	22.06	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
248.523	20.01	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
853.104	29.44	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1430.252	40.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3891.035	44.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10326.605	47.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, 8-DPSK, channel 0)

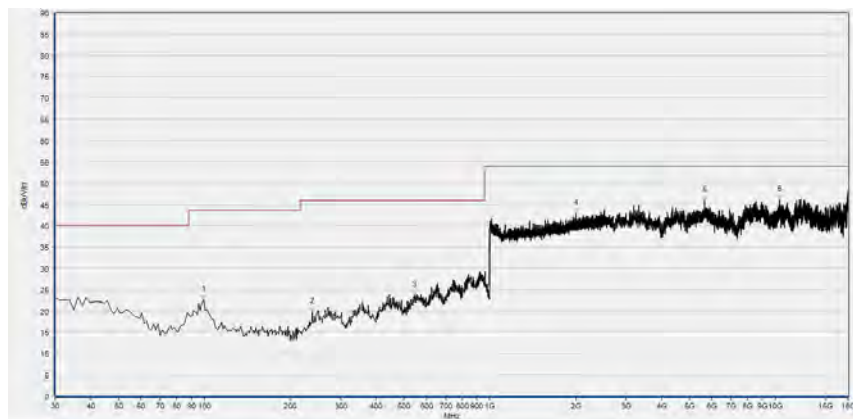

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.199	22.63	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
238.811	19.74	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
544.743	23.61	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1998.800	42.99	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5655.356	45.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10374.213	46.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, 8-DPSK, channel 0)

Plot for Channel = 39

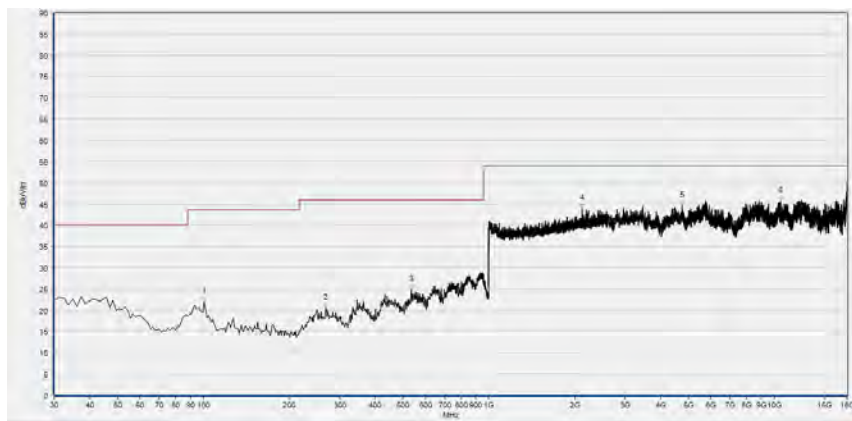

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.413	22.03	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
267.947	20.42	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
533.817	24.86	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2124.930	43.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4742.390	44.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10545.045	45.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(30MHz to 18GHz, Antenna Horizontal, 8-DPSK, channel 39)

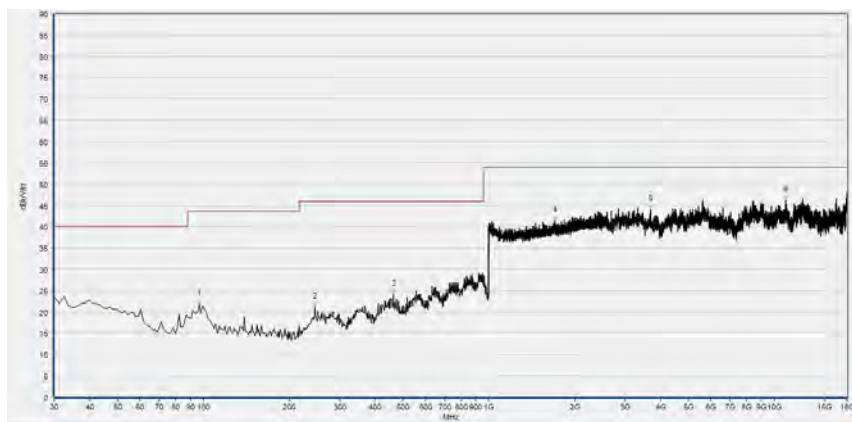

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
96.771	21.84	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
246.095	21.07	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
462.190	24.16	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1707.483	41.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3689.398	44.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10939.916	46.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(30MHz to 18GHz, Antenna Vertical, 8-DPSK, channel 39)

Plot for Channel = 78

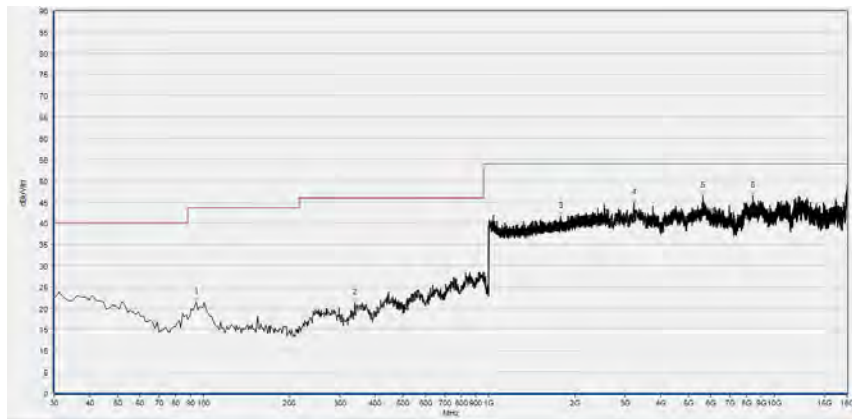

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
94.343	21.54	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
339.574	21.29	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1788.155	41.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3224.514	44.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5630.151	46.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8419.458	46.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(30MHz to 18GHz, Antenna Horizontal, 8-DPSK, channel 78)

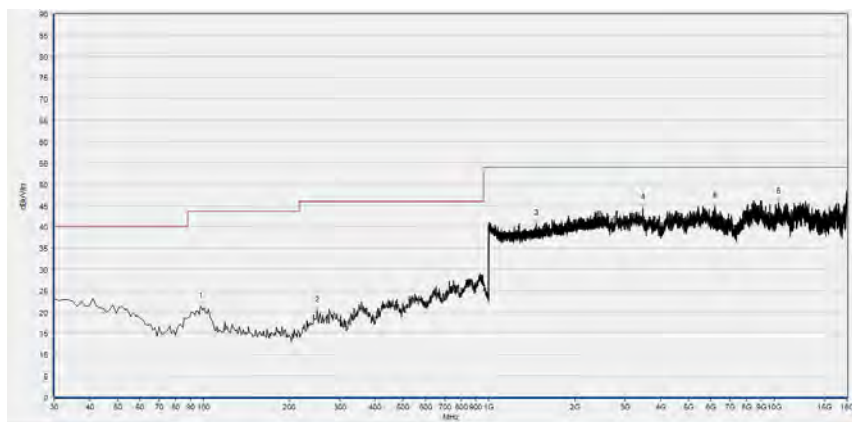

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.985	21.32	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
249.737	20.31	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1465.466	40.68	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3465.357	44.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6193.053	44.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10354.610	45.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(30MHz to 18GHz, Antenna Vertical, 8-DPSK, channel 78)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	$\pm 5\%$
Peak Output Power	$\pm 2.22\text{dB}$
20dB Bandwidth	$\pm 5\%$
Carrier Frequency Separation	$\pm 5\%$
Time of Occupancy (Dwell time)	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2020.04.01	2021.03.31
Directional coupler	17041703	DTO-5-30	ShangHai Huaxiang	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.2 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0

**4.3 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-520	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1520-022	FMZB1520	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2019.12.01	2020.12.01
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

————— END OF REPORT —————