



REPORT No. : SZ14100111S02

FCC SAR TEST REPORT

APPLICANT : Group Sense Mobile-Tech Ltd.

PRODUCT NAME : Wireless POS Handheld Terminal

MODEL NAME : DT-08

TRADE NAME : Group Sense Mobile-Tech Ltd.

BRAND NAME : Xplore

FCC ID : VRI-B203

STANDARD(S) : 47CFR 2.1093
IEEE 1528-2013

ISSUE DATE : 2015-03-04



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1 IDENTIFICATION OF APPLICANT	5
1.2 IDENTIFICATION OF MANUFACTURER	5
1.3 EQUIPMENT UNDER TEST (EUT)	5
1.3.1 PHOTOGRAPHS OF THE EUT	5
1.3.2 IDENTIFICATION OF ALL USED EUT	6
1.4 APPLIED REFERENCE DOCUMENTS	6
1.5 DEVICE CATEGORY AND SAR LIMITS	6
2. SPECIFIC ABSORPTION RATE (SAR)	7
2.1 INTRODUCTION	7
2.2 SAR DEFINITION	7
3. SAR MEASUREMENT SETUP	8
3.1 THE MEASUREMENT SYSTEM	8
3.2 PROBE	8
3.3 PROBE CALIBRATION PROCESS	10
3.3.1 DOSIMETRIC ASSESSMENT PROCEDURE	10
3.3.2 FREE SPACE ASSESSMENT PROCEDURE	10
3.3.3 TEMPERATURE ASSESSMENT PROCEDURE	10
3.4 PHANTOM	11
3.5 DEVICE HOLDER	11
4. TISSUE SIMULATING LIQUIDS	12
5. UNCERTAINTY ASSESSMENT	14
5.1 UNCERTAINTY EVALUATION FOR EUT SAR TEST	14
5.2 UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK	15



6. SAR MEASUREMENT EVALUATION	17
6.1 SYSTEM SETUP	17
6.2 VALIDATION RESULTS	18
7. OPERATIONAL CONDITIONS DURING TEST	19
7.1 BODY-WORN CONFIGURATIONS	19
7.2 MEASUREMENT PROCEDURE	19
7.3 DESCRIPTION OF INTERPOLATION/EXTRAPOLATION SCHEME	20
8. HOTSPOT MODE EVALUATION PROCEDURE	21
9. WIFI (5GHZ BANDS)	22
10. MEASUREMENT OF CONDUCTED OUTPUT POWER	23
11. TEST RESULTS LIST	24
12. MULTIPLE TRANSMITTERS EVALUATION	27
ANNEX A GRAPH TEST RESULTS	28
ANNEX B GENERAL INFORMATION	67

Change History		
Issue	Date	Reason for change
1.0	2015-03-04	First edition



REPORT No. : SZ14100111S02

TEST REPORT DECLARATION

Applicant	Group Sense Mobile-Tech Ltd.		
Applicant Address	Room 13-24, 2/F, Sino Industrial Plaza, 9 Kai Cheung Road, Kowloon Bay, Kowloon, Hong Kong		
Manufacturer	Group Sense Mobile-Tech Ltd.		
Manufacturer Address	Room 13-24, 2/F, Sino Industrial Plaza, 9 Kai Cheung Road, Kowloon Bay, Kowloon, Hong Kong		
Product Name	Wireless POS Handheld Terminal		
Model Name	DT-08		
Brand Name	Xplore		
HW Version	QA1		
SW Version	QA1		
Test Standards	47CFR 2.1093; IEEE 1528-2013		
Test Date	2015-1-13		
The Highest Reported 1g-SAR(W/kg)	Body	0.684W/kg	Limit(W/kg): 1.6W/kg

Tested by :

Liu Jun

Liu Jun

Reviewed by :

Peng Huarui

Peng Huarui

Approved by :

Zeng Dexin

Zeng Dexin



1. TECHNICAL INFORMATION

Note: the Following data is based on the information by the applicant.

1.1 Identification of Applicant

Company Name:	Group Sense Mobile-Tech Ltd.
Address:	Room 13-24, 2/F, Sino Industrial Plaza, 9 Kai Cheung Road, Kowloon Bay, Kowloon, Hong Kong

1.2 Identification of Manufacturer

Company Name:	Group Sense Mobile-Tech Ltd.
Address:	Room 13-24, 2/F, Sino Industrial Plaza, 9 Kai Cheung Road, Kowloon Bay, Kowloon, Hong Kong

1.3 Equipment Under Test (EUT)

Model Name:	DT-08
Trade Name:	Xplore
Brand Name:	Xplore
Hardware Version:	QA1
Software Version:	QA1
Tx Frequency Bands:	WIFI 802.11 b/g/n20 (2.4GHz);WIFI 802.11a/n20(5.2G/5.8G); Bluetooth;
Uplink Modulations:	WIFI802.11b: DSSS;WIFI802.11g: OFDM; WIFI802.11a/n20: OFDM; Bluetooth: GFSK/ π /4-DQPSK/8-DPSK;
Multislot Class:	Fixed Internal Antenna
GPRS Class:	Identical prototype
Antenna type:	Fixed Internal Antenna
Development Stage:	Identical prototype
Hotspot function:	Not Support

1.3.1 Photographs of the EUT

Please refer to the External Photos for the Photos of the EUT



1.3.2 Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the Following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	QA1	QA1

1.4 Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
3	KDB 447498 D01v05r02	General RF Exposure Guidance
4	KDB 248227 D01v02	SAR Measurement Guidance for IEEE 802.11 Transmitters
5	KDB 616217 D04v01r01	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
6	KDB 865664 D01v01r02	SAR Measurement 100 MHz to 6 GHz
7	KDB 865664 D02v01r01	SAR Reporting

1.5 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.



2. SPECIFIC ABSORPTION RATE (SAR)

2.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are High than the limits for general population/uncontrolled.

2.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. (p). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by,

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where σ is the conductivity of the tissue, ρ is the mass density of the tissue and $|E|$ is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

3. SAR MEASUREMENT SETUP

3.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the Following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The Following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2 Probe


For the measurements the Specific Dosimetric E-Field Probe SN 37/08 EP80 with Following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter: 6.5 mm

- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm
(repeatability better than +/- 1mm)
- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.25 dB
- Calibration range: 835to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with CENELEC EN 62209 and IEEE 1528 std, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 622091 annex technique using reference guide at the five frequencies.

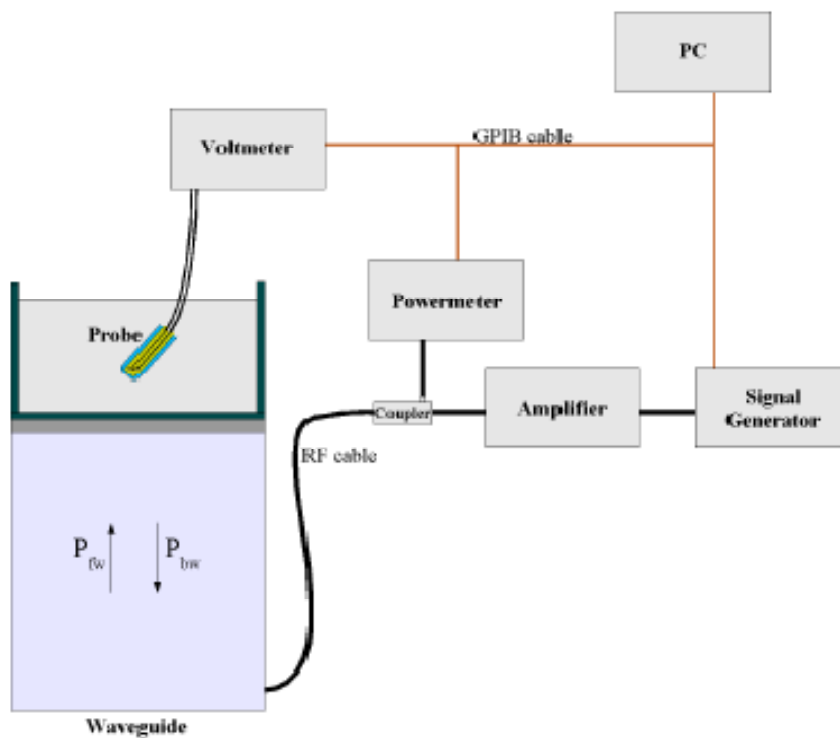

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) c \quad (2z/\delta)$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

l = Skin depth



Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N)=SAR(N)/Vlin(N) \quad (N=1,2,3)$$

The linearised output voltage Vlin(N) is obtained from the displayed output voltage V(N) using

$$Vlin(N)=V(N)*(1+V(N)/DCP(N)) \quad (N=1,2,3)$$

Where DCP is the diode compression point in mV.

3.3 Probe Calibration Process

3.3.1 Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm^2) using an with CALISAR, Antenna proprietary calibration system.

3.3.2 Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm^2 .

3.3.3 Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulating head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

δt = exposure time (30 seconds),



$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

C = heat capacity of tissue (brain or muscle),

δT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place.

The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

Where:

$$SAR = \frac{\sigma |E|^2}{\rho}$$

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

3.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

3.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is High than 1°.

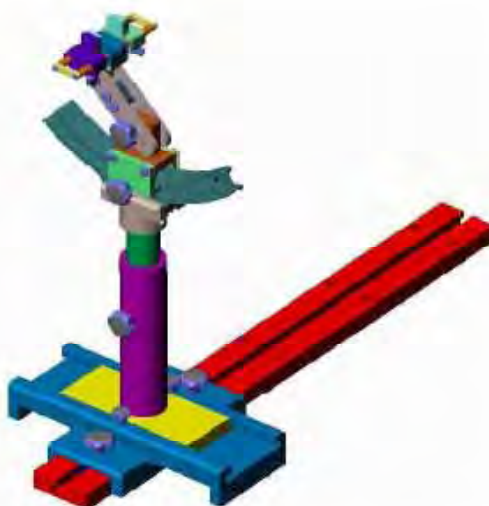

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005



4. TISSUE SIMULATING LIQUIDS

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

The following table gives the recipes for tissue simulating liquids

Ingredients (% by weight)	Frequency Band	Frequency Band
	2450MHz	5200-5800MHz
Tissue Type	Body	Body
Ingredients (% by weight)		
Deionised Water	73.20	78.60
Salt(NaCl)	0.10	0.00
Sugar	0.00	0.00
Tween 20	0.00	0.00
HEC	0.00	0.00
Bactericide	0.00	0.00
Triton X-100	0.00	10.70
DGBE	26.70	0.00
Diethylenglycol monohexylether	0.00	10.70
Measured dielectric parameters		
Dielectric Constant	52.70	Note
Conductivity (S/m)	1.95	

Recipes for Tissue Simulating Liquid

Note: Please refer to the validation results for dielectric parameters of each frequency band.

Note: Please refer to the validation results for dielectric parameters of each frequency band.



The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.

Table 1: Dielectric Performance of Tissue Simulating Liquid

Temperature: 22.0~23.8°C, humidity: 54~60%.						
Date	Freq.(MHz)	Liquid Parameters	Meas.	Target	Delta(%)	Limit±(%)
2015/1/13	Body 2450	Relative Permittivity(ϵ_r):	52.52	52.7	-0.34	5
		Conductivity(σ):	1.90	1.95	-2.56	5
2015/1/13	Body 5200	Relative Permittivity(ϵ_r):	49.2	49.0	0.41	5
		Conductivity(σ):	5.21	5.30	-0.57	5
2015/1/13	Body 5800	Relative Permittivity(ϵ_r):	48.09	48.2	-0.17	5
		Conductivity(σ):	5.93	6.00	-1.33	5



5. UNCERTAINTY ASSESSMENT

The Following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

5.1 UNCERTAINTY EVALUATION FOR EUT SAR TEST

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/ e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob . Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.7	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.0	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.6	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.8	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.0	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.1	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.1 5	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Extrapolation, interpolation and integration Algoritms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.8 9	∞
Test sample Related									
Test sample positioning	E.4.2. 1	0.03	N	1	1	1	0.03	0.0 3	N- 1
Device Holder Uncertainty	E.4.1.	5.00	N	1	1	1	5.00	5.0	N-



	1							0	1
Output power Power drift - SAR drift measurement	6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.3 3	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.1 3	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.1 5	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.0 4	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.0 0	N	1	0.6	0.49	6.00	4.9 0	M
Combined Standard Uncertainty			RSS				11.55	10. 67	
Expanded Uncertainty (95% Confidence interval)			K=2				23.11	21. 33	

5.2 UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/ e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.7	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.0	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.6	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.8	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.5	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.0	∞




Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.1	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.7	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.1 5	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.8 9	∞
Dipole									
Dipole axis to liquid Distance	8,E.4. 2	1.00	N	$\sqrt{3}$	1	1	0.58	0.5 8	∞
Input power and SAR drift measurement	8,6.6. 2	4.04	R	$\sqrt{3}$	1	1	2.33	2.3 3	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.0 3	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.1 3	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	$\sqrt{3}$	0.64	0.43	1.85	1.2 4	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.0 4	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.0 0	N	$\sqrt{3}$	0.6	0.49	3.46	2.8 3	M
Combined Standard Uncertainty			RSS				8.83	8.3 7	
Expanded Uncertainty (95% Confidence interval)			K=2				17.66	16. 73	

6. SAR MEASUREMENT EVALUATION

6.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below

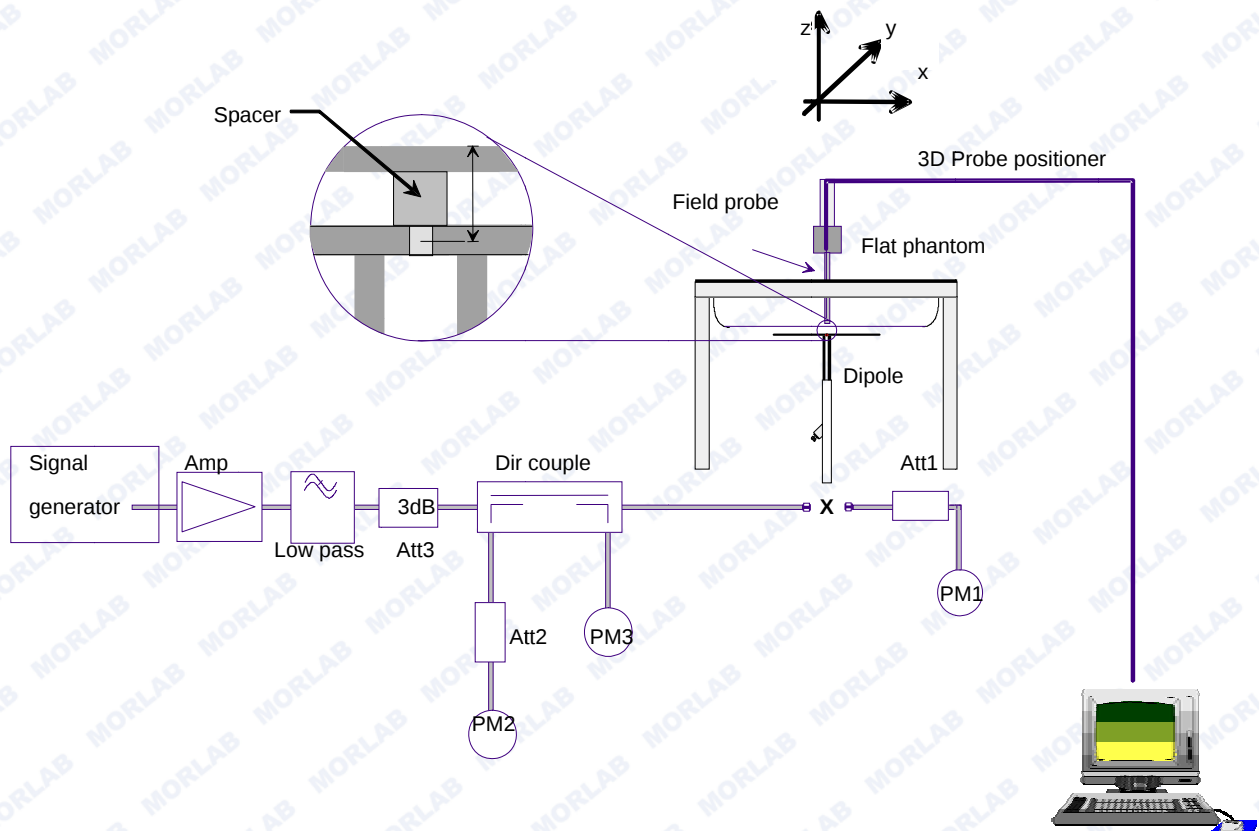

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The power meter PM1 measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to



6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

6.2 Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

Frequency	2450MHz(B)
Target value 1W (1g)	56.13 W/Kg
Test value 1g (250 mW input power)	13.981 W/Kg
Normalized to 1W value(1g)	55.924 W/Kg

Frequency	5200MHz(B)	5800MHz(B)
Target value 1W (1g)	169.140W/Kg	201.570 W/Kg
Test value 1g (100 mW input power)	15.762 W/Kg	21.537 W/Kg
Normalized to 1W value(1g)	157.620W/Kg	215.370 W/Kg

Note: System checks the specific test data please see 1~.

7. OPERATIONAL CONDITIONS DURING TEST

7.1 Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

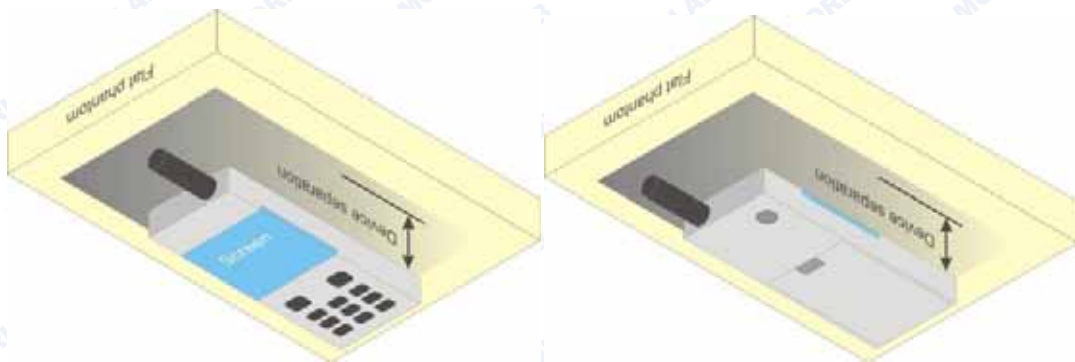


Illustration for Body Worn Position

7.2 Measurement procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.



7.3 Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.


The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

8. HOTSPOT MODE EVALUATION PROCEDURE

The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hot Spot SAR v01r01.

SAR must be tested for all surfaces and Edges (side) with a transmitting antenna with in 2.5 cm from that surface or edge, at a test separation distance of 10 mm, in the wireless mode that support wireless routing.

Edge configurations:

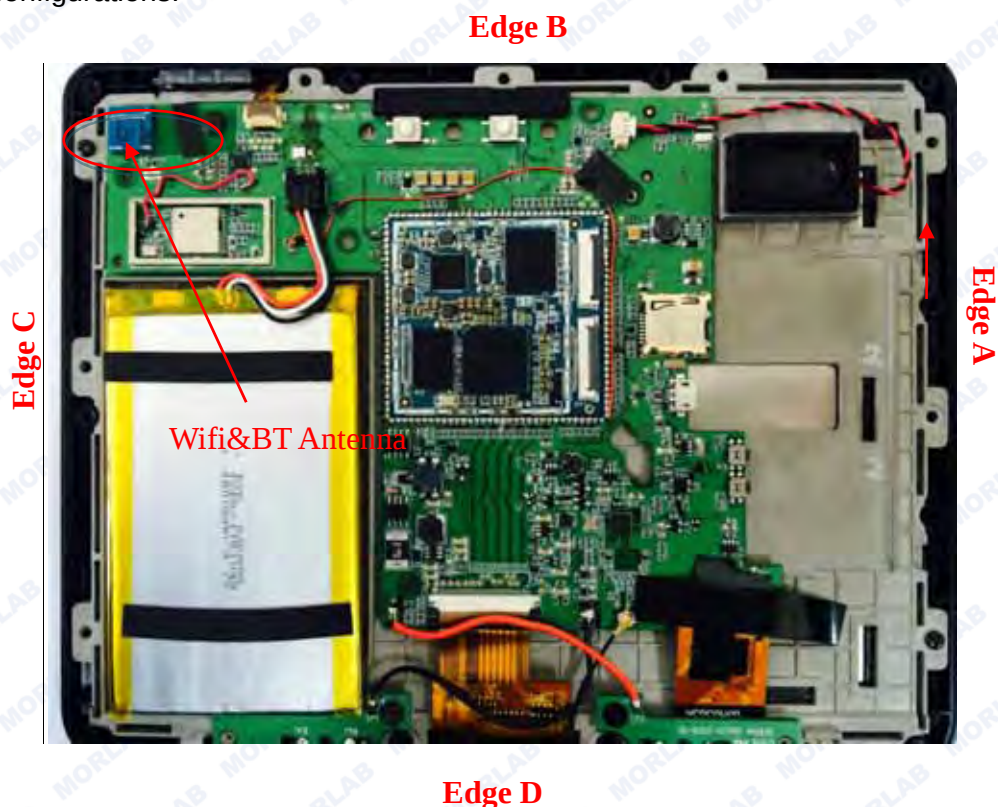

Assessment Hotspot side for SAR						
Test distance: 0mm						
Antennas	Back	Front	Edge A	Edge B	Edge C	Edge D
WLAN	Yes	Yes	No	Yes	Yes	No



9. WIFI (5GHz BANDS)

Required Test Channels per KDB 248227 D01

Mode		Band	GHz	Channel	“Default Test Channels”	
					802.11	
802.11a	UNII (15.407)	5.2GHz	5.18	36	√	
			5.20	40		*
			5.22	44		*
			5.24	48	√	
	DTS (15.247)	5.8GHz	5.745	149	√	
			5.765	153		*
			5.785	157	√	
			5.805	161		*
			5.825	165	√	

√ = “default test channels”
□ = possible 802.11a channels with maximum average output > the “default test channels”
= when output power is reduced for channel 1 and/or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested

Measured Results

Band	Channel	Frequency (MHz)	Output Power(dBm)	
			802.11a	802.11n20
Wi-Fi 5.2GHz	36	5180	13.28	12.19
	40	5200	13.37	12.54
	44	5220	14.32	13.03
	48	5240	14.88	13.82

Band	Channel	Frequency (MHz)	Output Power(dBm)	
			802.11a	802.11n20
Wi-Fi 5.8GHz (UNII)	149	5745	12.19	11.92
	153	5765	11.78	11.70
	157	5785	12.53	11.82
	161	5805	12.08	11.68
	165	5825	12.68	12.06



10. MEASUREMENT OF CONDUCTED OUTPUT POWER

1. WiFi Average output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			802.11b (DSSS)	802.11g (OFDM)	802.11n20 (OFDM)
WiFi	1	2412	15.03	13.98	12.92
	6	2437	15.23	14.21	13.04
	11	2462	15.34	14.32	13.23

2. Bluetooth Average output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			GFSK	$\pi/4$ -DQPSK	8-DPSK
BT	0	2402	12.71	11.92	12.35
	39	2441	13.23	12.77	12.97
	78	2480	12.73	12.40	12.78



11. TEST RESULTS LIST

Summary of Measurement Results (WLAN 802.11b Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Body (0mm Separation)	Back upward	11	0.660	1.037	0.684
	Front upward		0.519		0.538
	Edge B		0.505		0.524
	Edge C		0.510		0.529

Summary of Measurement Results (WLAN 802.11a-5.2G Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Body (0mm Separation)	Back upward	48	0.458	1.028	0.471
	Front upward		0.371		0.381
	Edge B		0.285		0.293
	Edge C		0.364		0.374

Summary of Measurement Results (WLAN 802.11a-5.8G Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Body (0mm Separation)	Back upward	165	0.237	1.076	0.255
	Front upward		0.224		0.241
	Edge B		0.118		0.127
	Edge C		0.210		0.226



Summary of Measurement Results (Bluetooth Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations	Device Test Positions	Device Test channel	SAR(W/Kg), 1g Peak	Scaling Factor	Scaled SAR (W/Kg), 1g
Body (0mm Separation)	Back upward	39-GFSK	0.124	1.064	0.132
	Front upward		0.087		0.093
	Edge B		0.059		0.063
	Edge C		0.064		0.068

Note:

- When the 1-g SAR for the mid-band channel or the channel with the highest output power satisfy the following conditions, testing of the other channels in the band is not required. (Per KDB 447498 D01 General RF Exposure Guidance v05r02)
 - ≤ 0.8 W/kg and transmission band ≤ 100 MHz
 - ≤ 0.6 W/kg and, 100 MHz $<$ transmission bandwidth ≤ 200 MHz
 - ≤ 0.4 W/kg and transmission band > 200 MHz
- BT & WiFi SAR test is conducted according to section 12 stand-alone SAR evaluation of this report.
- During 802.11 testing, engineering testing software installed on the EUT can provide continuous transmitting RF signal. The RF signal utilized in SAR measurement has almost 100% duty cycle, and its crest factor is 1.
- IEEE Std 1528-2013 require the High channel to be tested first. This generally applies to wireless devices that are designed to operate in technologies with tight tolerances for maximum output power variations across channels in the band. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the High channel, the highest output power channel must be used.
- Per KDB 447498, when the SAR procedures require multiple channels to be tested and the 1-g SAR for the highest output channel is less than 0.8 W/kg and peak SAR is less than 1.6W/kg, where the transmission band corresponding to all channels is ≤ 100 MHz, testing for the other channels is not required.




REPORT No. : SZ14100111S02

5. Scaling Factor calculation

Band	Tune-up power tolerance(dBm)	SAR test channel Power (dBm)	Scaling Factor
802.11b	Max output power =15+-0.5	15.34	1.037
802.11a-5.2G	Max output power =14.5+-0.5	14.88	1.028
802.11a-5.8G	Max output power =12.5+-0.5	12.68	1.076
Bluetooth	Max output power =13+-0.5	13.23	1.064

12. MULTIPLE TRANSMITTERS EVALUATION

The are three transmitters build in EUT, as following:

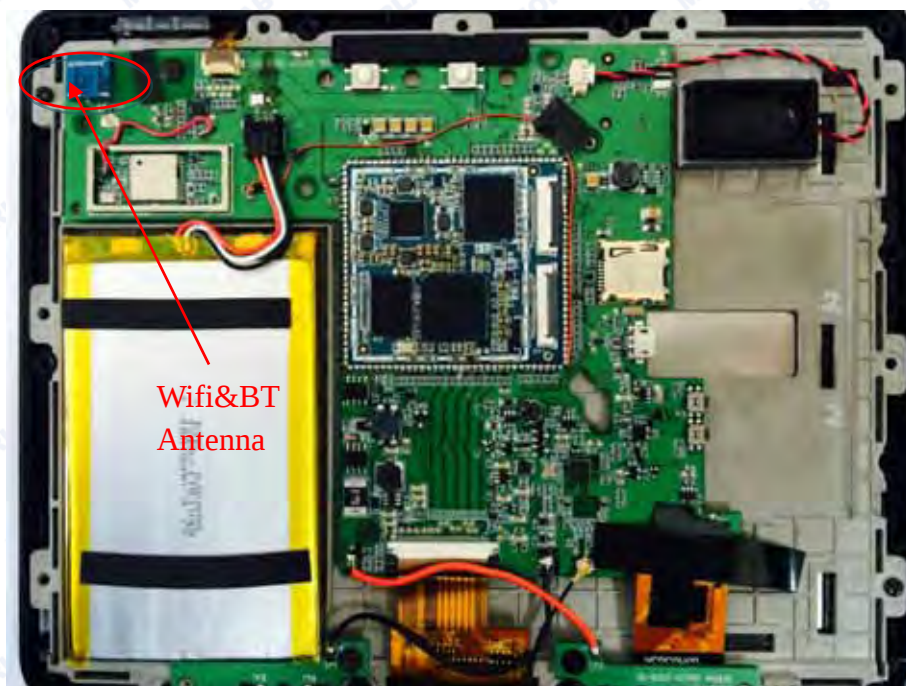

Stand-alone SAR

Test distance: 5mm			
Band	Highest power(mW) per tune up	1-g SAR test threshold	Test required?
WIFI(2.4G)	35.48	$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR}$	Yes
WIFI(5.2G)	31.62		Yes
WIFI(5.8G)	19.95		Yes
BT	22.28		Yes

The Body SAR test for BT is required for highest power exceed the power threshold for 2450MHz at the test distance of 0 mm.

The Body SAR test for WIFI required. 802.11g/HT20 is not required, for the maximum average output power is less than 1/4 dB Higher than measured on the corresponding 802.11b channels.

As per KDB 248227

**ANNEX A GRAPH TEST RESULTS**

BAND	<u>PARAMETERS</u>
<u>802.11b</u>	<u>Measurement 1:</u> Flat Plane with Body device position on High Channel in DSSS mode <u>Measurement 2:</u> Flat Plane with Body device position on High Channel in DSSS mode <u>Measurement 3:</u> Flat Plane with Body device position on High Channel in DSSS mode <u>Measurement 4:</u> Flat Plane with Body device position on High Channel in DSSS mode.
<u>802.11a-5.2G</u>	<u>Measurement 5:</u> Flat Plane with Body device position on High Channel in OFDM mode <u>Measurement 6:</u> Flat Plane with Body device position on High Channel in OFDM mode <u>Measurement 7:</u> Flat Plane with Body device position on High Channel in OFDM mode <u>Measurement 8:</u> Flat Plane with Body device position on High Channel in OFDM mode
<u>802.11a-5.8G</u>	<u>Measurement 9:</u> Flat Plane with Body device position on High Channel in OFDM mode <u>Measurement 10:</u> Flat Plane with Body device position on High Channel in OFDM mode <u>Measurement 11:</u> Flat Plane with Body device position on High Channel in OFDM mode <u>Measurement 12:</u> Flat Plane with Body device position on High Channel in OFDM mode.
<u>Bluetooth</u>	<u>Measurement 13:</u> Flat Plane with Body device position on Middle Channel in GFSK mode <u>Measurement 14:</u> Flat Plane with Body device position on Middle Channel in GFSK mode <u>Measurement 15:</u> Flat Plane with Body device position on Middle Channel in GFSK mode <u>Measurement 16:</u> Flat Plane with Body device position on Middle Channel in GFSK mode



REPORT No. : SZ14100111S02

MEASUREMENT 1

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 37 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11b
Channels	High
Signal	DSSS

B. SAR Measurement Results


High Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	52.520628
Conductivity (S/m)	1.958675
Power drift (%)	-3.420000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

SURFACE SAR

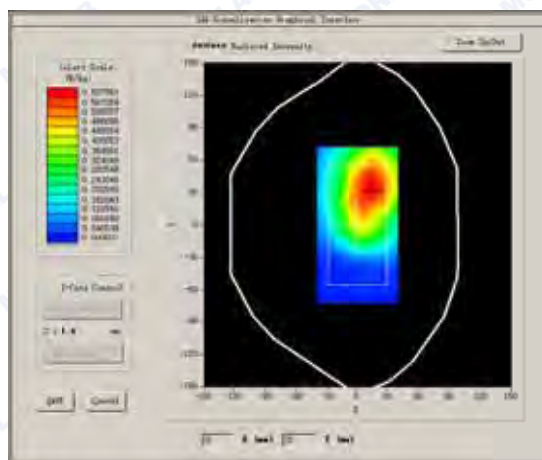

VOLUME SAR

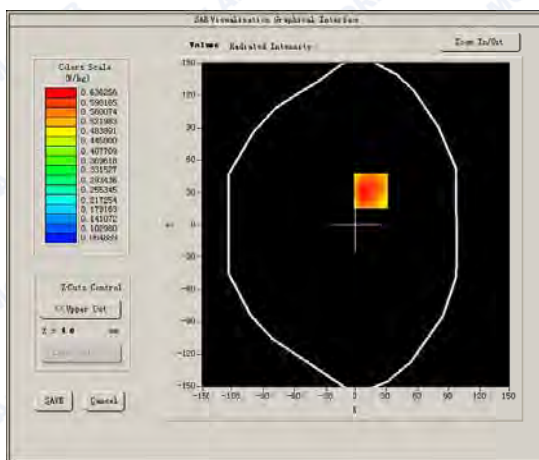




REPORT No. : SZ14100111S02

Maximum location: X=15.00, Y=32.00


SAR Peak: 0.91 W/kg

SAR 10g (W/Kg)	0.465007
SAR 1g (W/Kg)	0.659645


Z axis scan

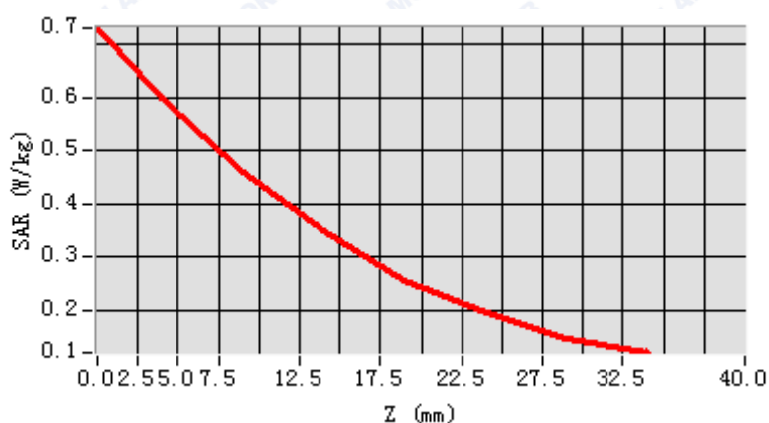

3D screen shot

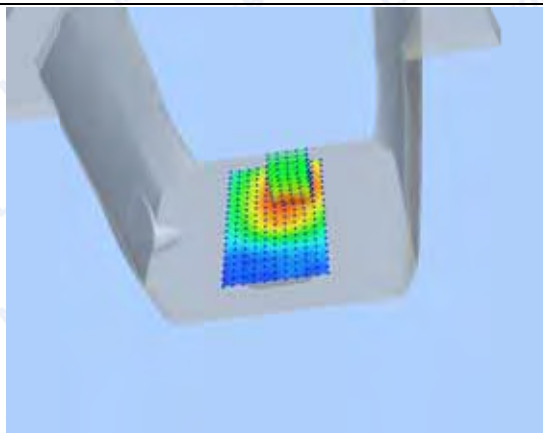

Hot spot position

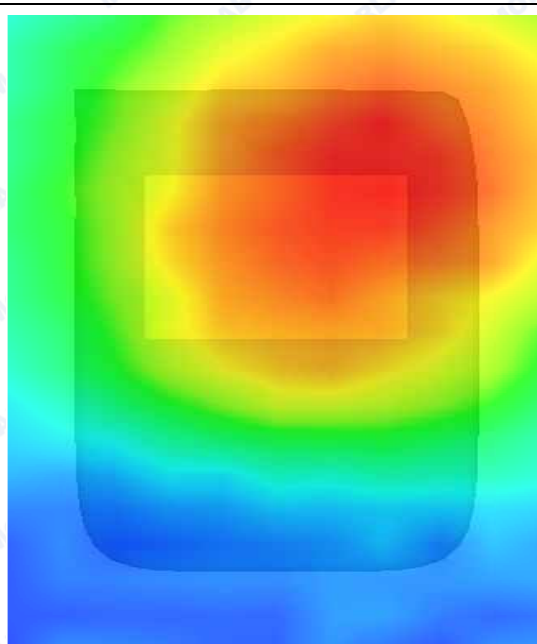

**MEASUREMENT 2**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 29 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11b
Channels	High
Signal	DSSS

B. SAR Measurement Results

High Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	52.520628
Conductivity (S/m)	1.958675
Power drift (%)	-2.360000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

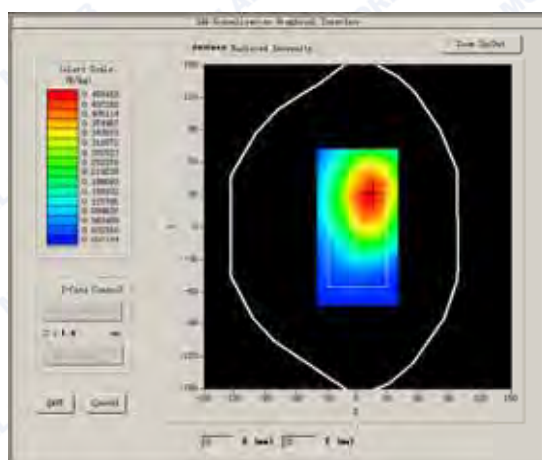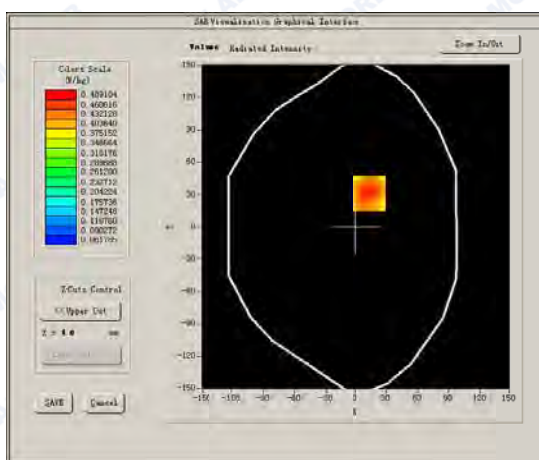SURFACE SAR**VOLUME SAR**




REPORT No. : SZ14100111S02

Maximum location: X=13.00, Y=31.00


SAR Peak: 0.74 W/kg

SAR 10g (W/Kg)	0.359376
SAR 1g (W/Kg)	0.518636


Z axis scan

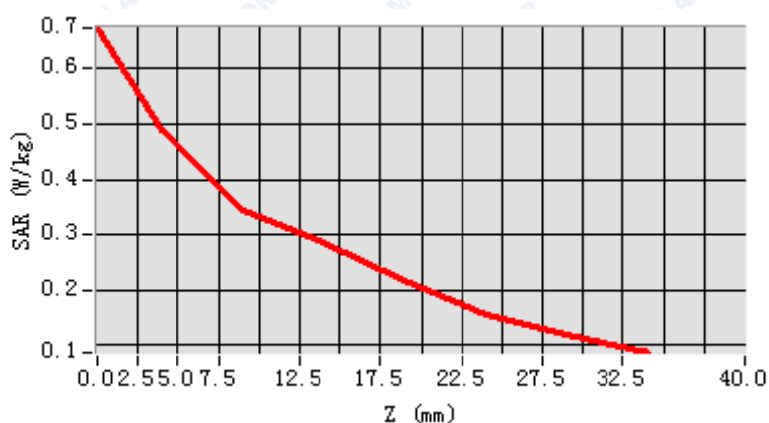

3D screen shot

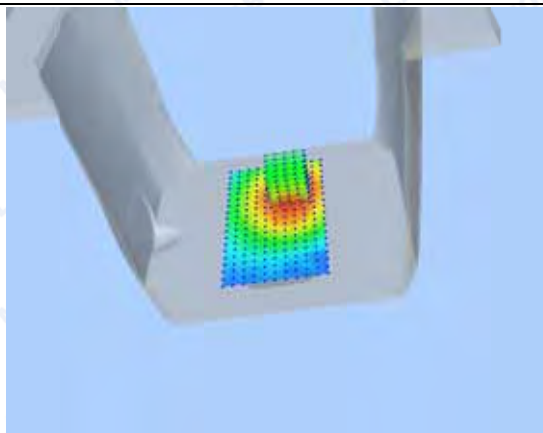

Hot spot position

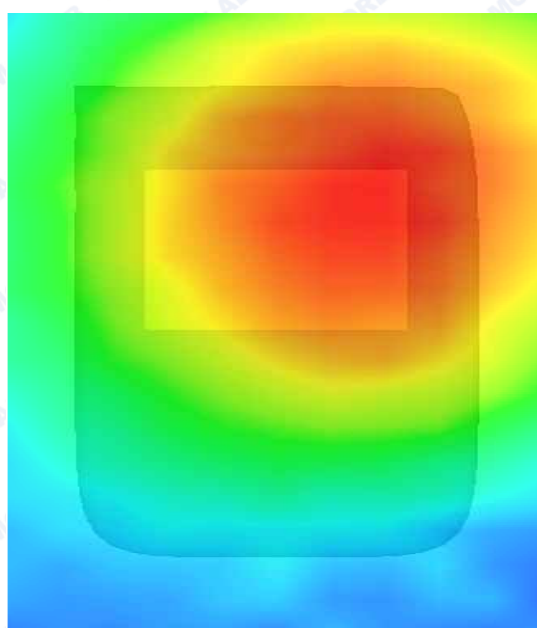



REPORT No. : SZ14100111S02

MEASUREMENT 3

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 31 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11b
Channels	High
Signal	DSSS

B. SAR Measurement Results


High Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	52.520628
Conductivity (S/m)	1.958675
Power drift (%)	-2.740000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

SURFACE SAR

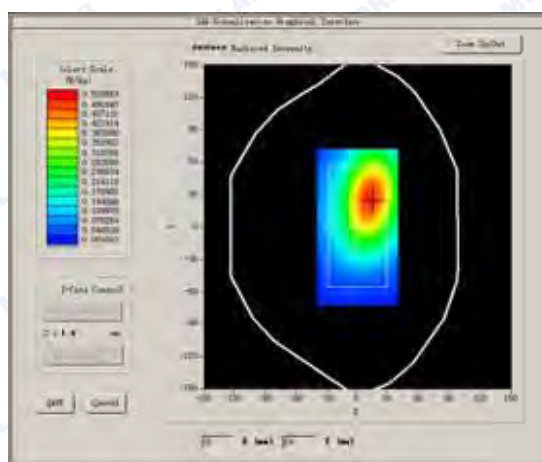

VOLUME SAR

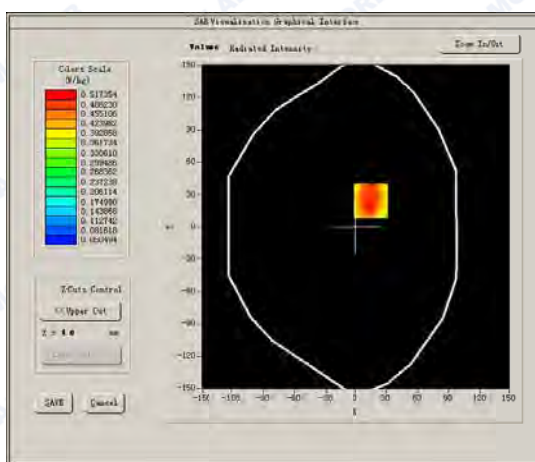




REPORT No. : SZ14100111S02

Maximum location: X=15.00, Y=24.00


SAR Peak: 0.74 W/kg

SAR 10g (W/Kg)	0.330238
SAR 1g (W/Kg)	0.504966


Z axis scan

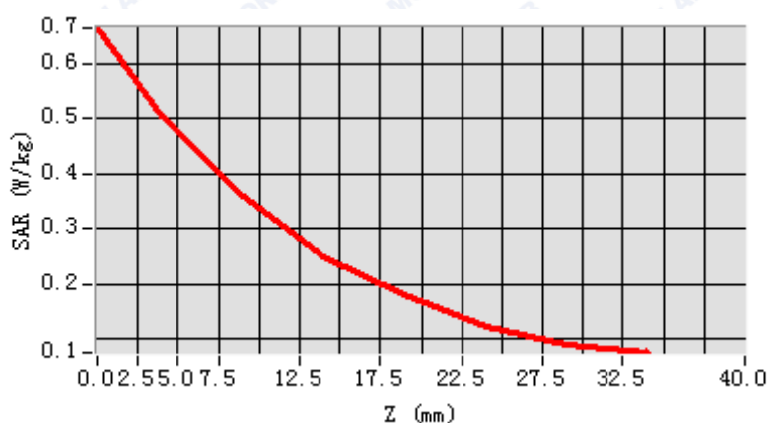

3D screen shot

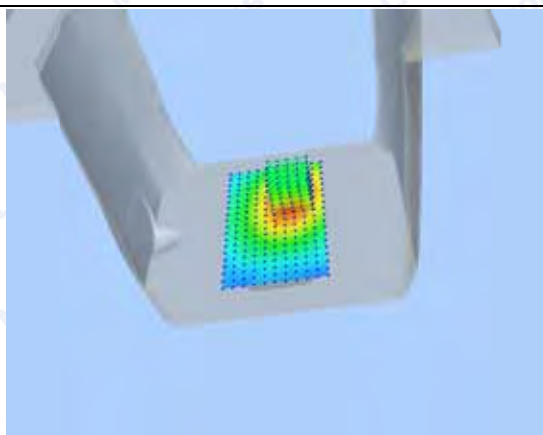

Hot spot position

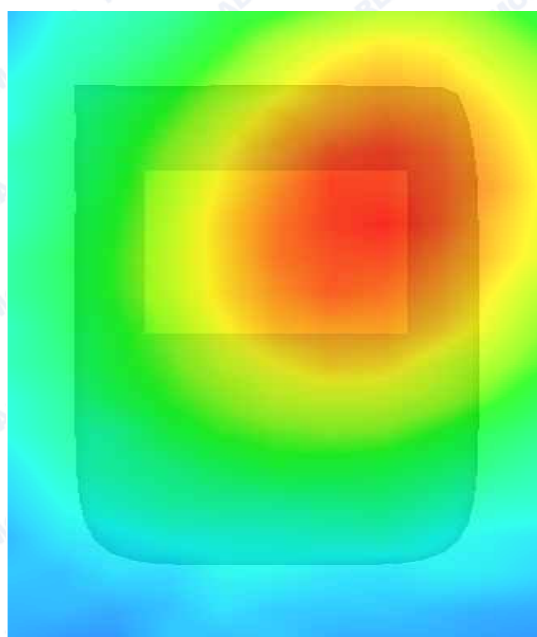



REPORT No. : SZ14100111S02

MEASUREMENT 4

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 31 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11b
Channels	High
Signal	DSSS

B. SAR Measurement Results

High Band SAR (Channel 11)

Frequency (MHz)	2462.000000
Relative permittivity (real part)	52.520628
Conductivity (S/m)	1.958675
Power drift (%)	3.340000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

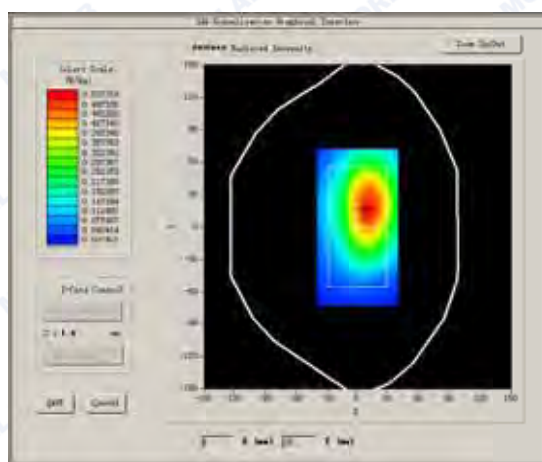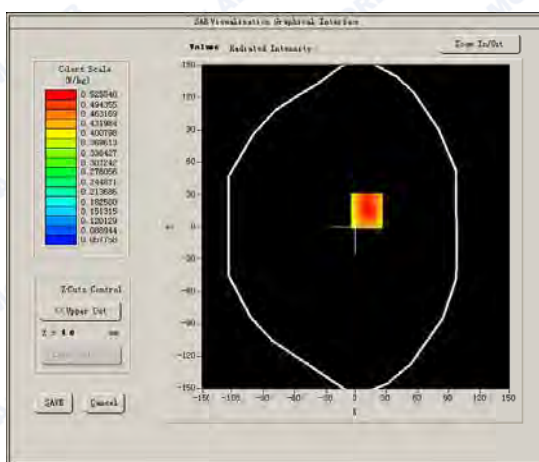SURFACE SAR**VOLUME SAR**




REPORT No. : SZ14100111S02

Maximum location: X=10.00, Y=15.00


SAR Peak: 0.71 W/kg

SAR 10g (W/Kg)	0.343383
SAR 1g (W/Kg)	0.510492


Z axis scan

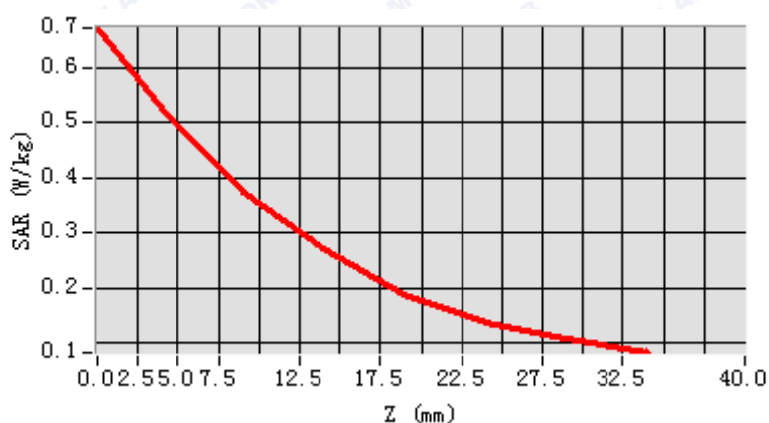

3D screen shot

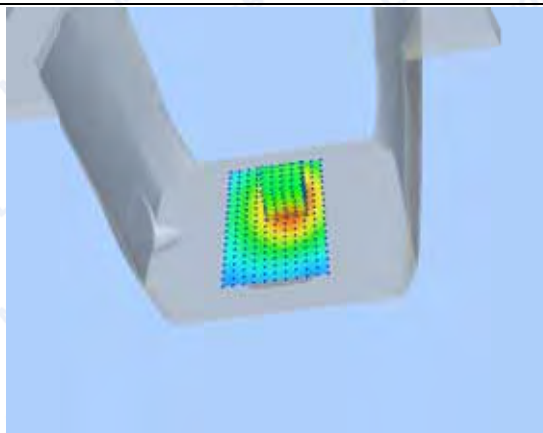

Hot spot position

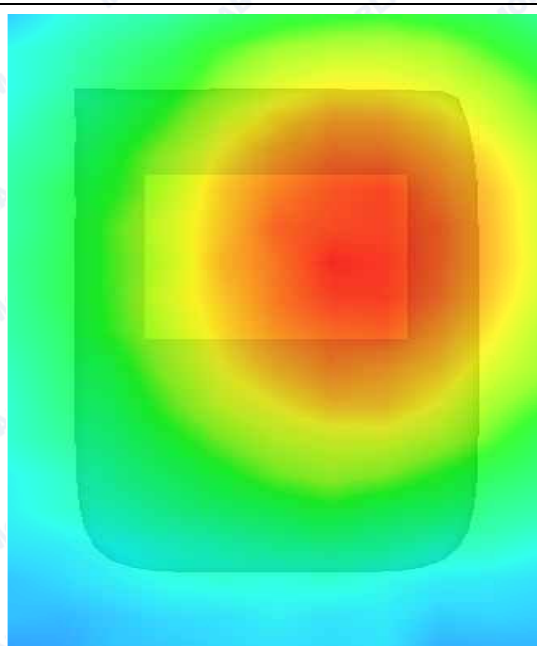



REPORT No. : SZ14100111S02

MEASUREMENT 5

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 37 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11a
Channels	High
Signal	OFDM

B. SAR Measurement Results


High Band SAR (Channel 48)

Frequency (MHz)	5240.000000
Relative permittivity (real part)	49.201241
Conductivity (S/m)	5.212451
Power drift (%)	-3.420000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

SURFACE SAR

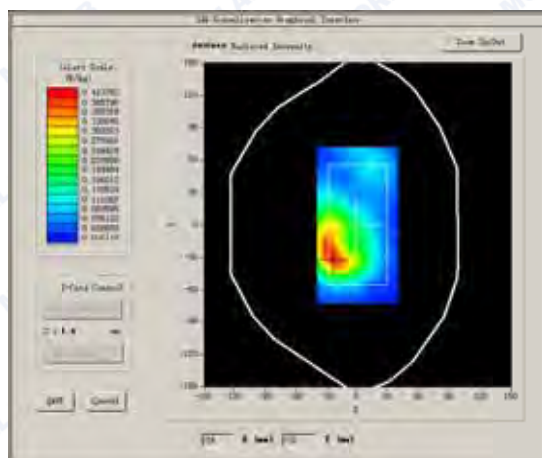

VOLUME SAR

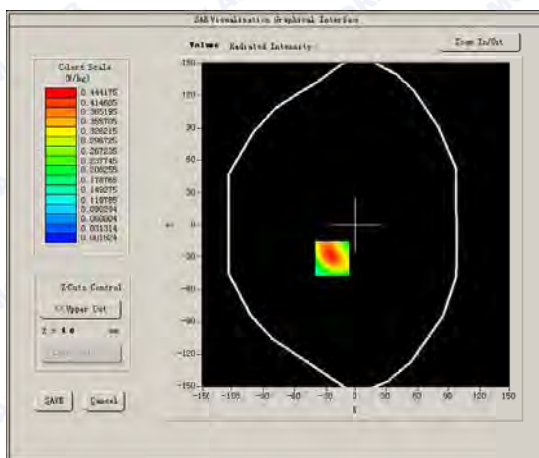




REPORT No. : SZ14100111S02

Maximum location: X=-24.00, Y=-31.00


SAR Peak: 0.80 W/kg

SAR 10g (W/Kg)	0.231230
SAR 1g (W/Kg)	0.458328


Z axis scan

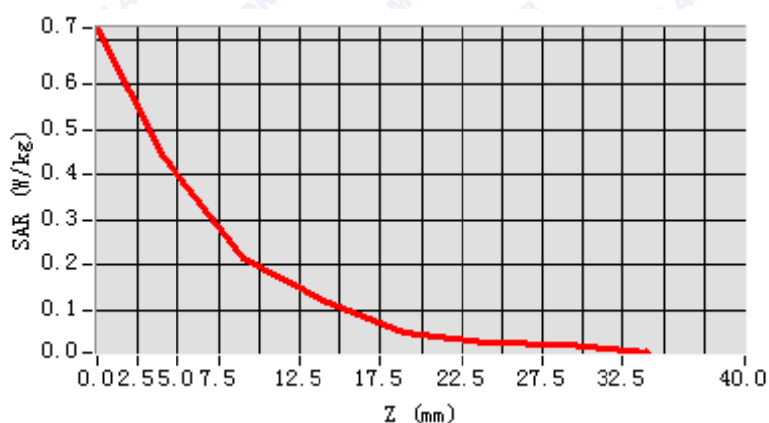

3D screen shot

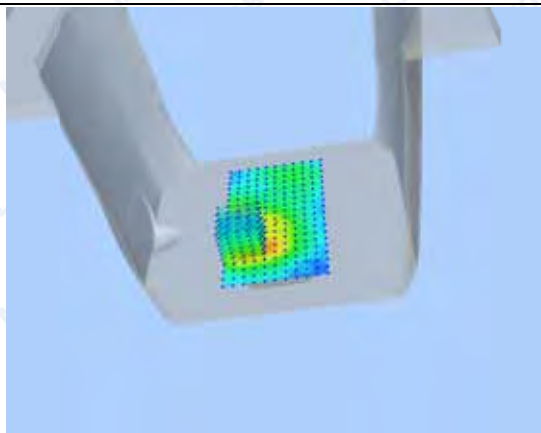

Hot spot position

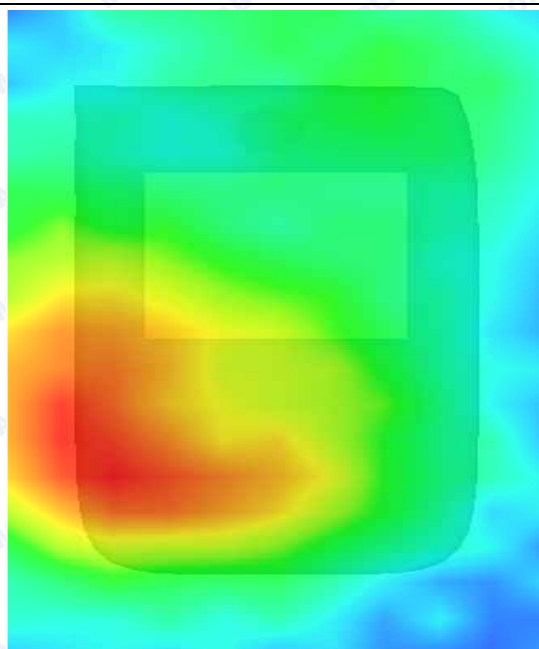

**MEASUREMENT 6**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 29 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11a
Channels	High
Signal	OFDM

B. SAR Measurement Results

High Band SAR (Channel 48)

Frequency (MHz)	5240.000000
Relative permittivity (real part)	49.201241
Conductivity (S/m)	5.212451
Power drift (%)	-2.360000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

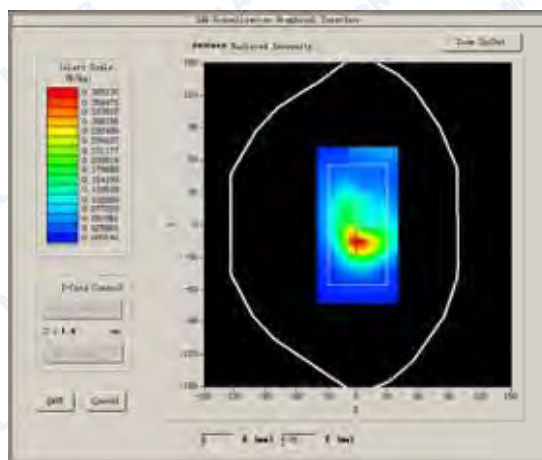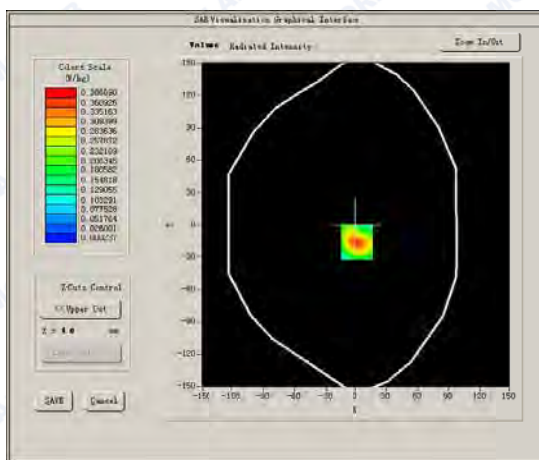SURFACE SAR**VOLUME SAR**




REPORT No. : SZ14100111S02

Maximum location: X=1.00, Y=-16.00


SAR Peak: 0.63 W/kg

SAR 10g (W/Kg)	0.185191
SAR 1g (W/Kg)	0.370852


Z axis scan

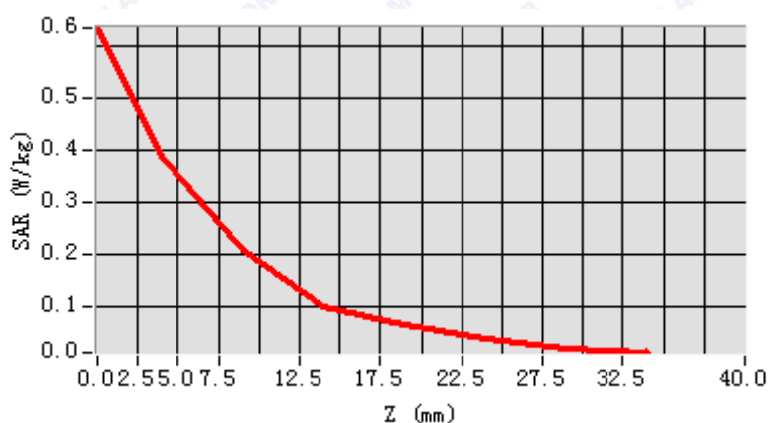

3D screen shot

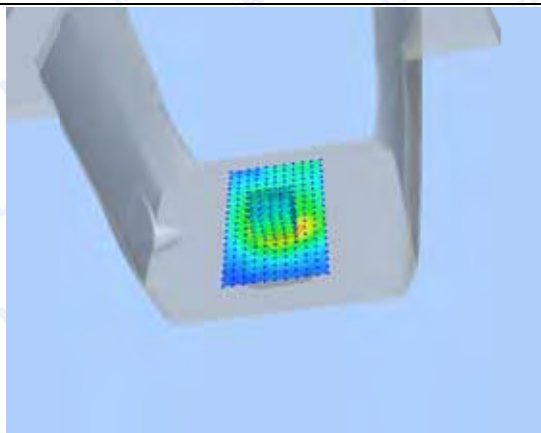

Hot spot position

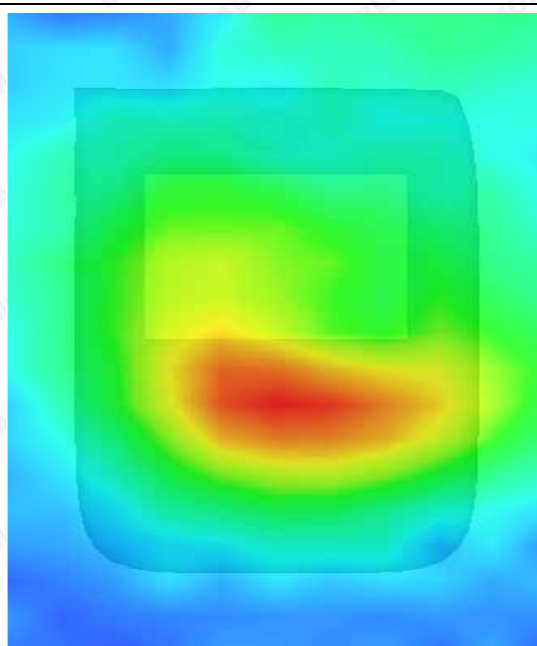



MEASUREMENT 7

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 31 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11a
Channels	High
Signal	OFDM

B. SAR Measurement Results


High Band SAR (Channel 48)

Frequency (MHz)	5240.000000
Relative permittivity (real part)	49.201241
Conductivity (S/m)	5.212451
Power drift (%)	-2.740000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

SURFACE SAR

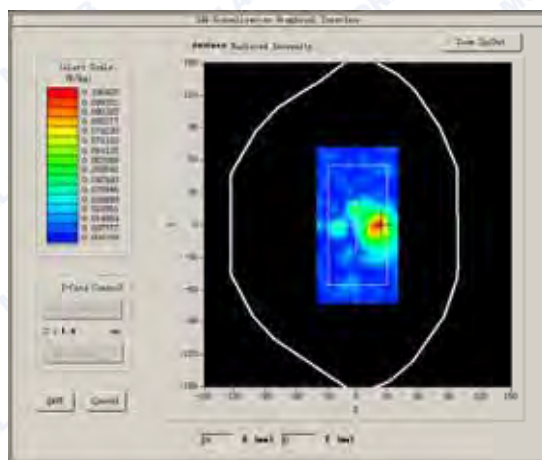

VOLUME SAR

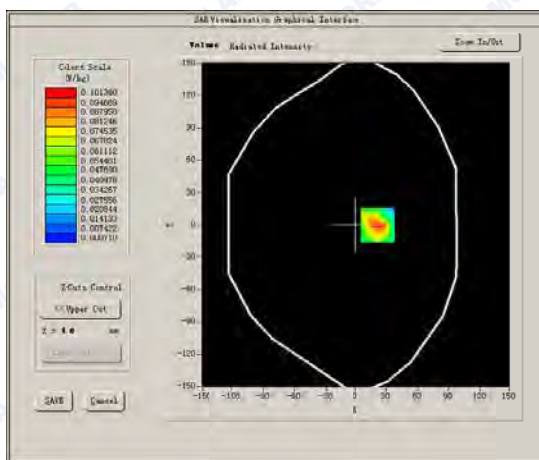




REPORT No. : SZ14100111S02

Maximum location: X=-56.00, Y=-57.00


SAR Peak: 0.52 W/kg

SAR 10g (W/Kg)	0.151171
SAR 1g (W/Kg)	0.285056


Z axis scan

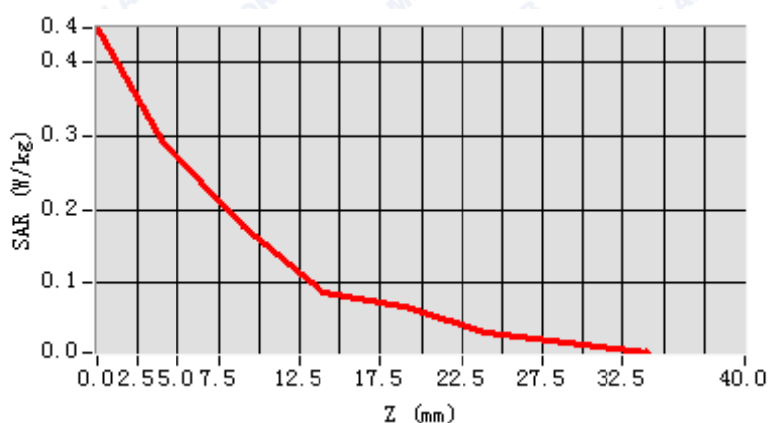

3D screen shot

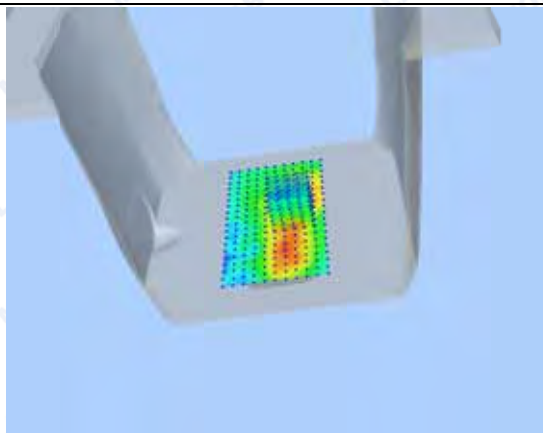

Hot spot position

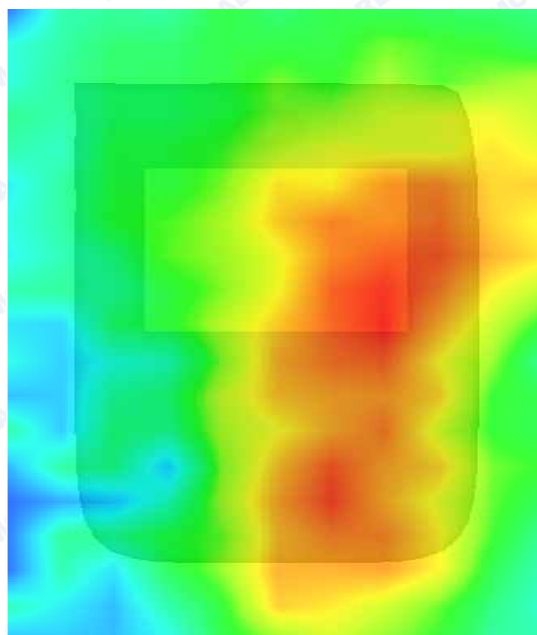



REPORT No. : SZ14100111S02

MEASUREMENT 8

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 31 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11a
Channels	High
Signal	OFDM

B. SAR Measurement Results


High Band SAR (Channel 48)

Frequency (MHz)	5240.000000
Relative permittivity (real part)	49.201241
Conductivity (S/m)	5.212451
Power drift (%)	3.340000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

SURFACE SAR

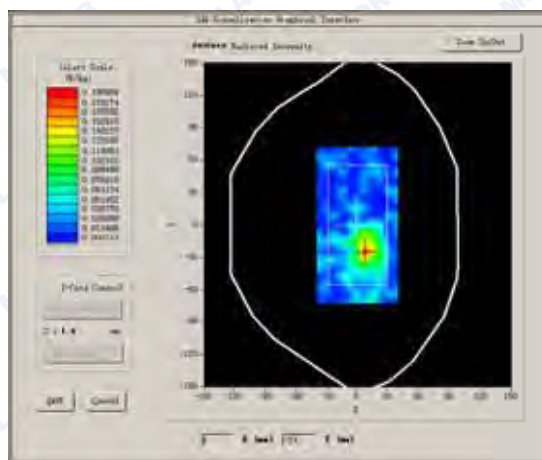

VOLUME SAR

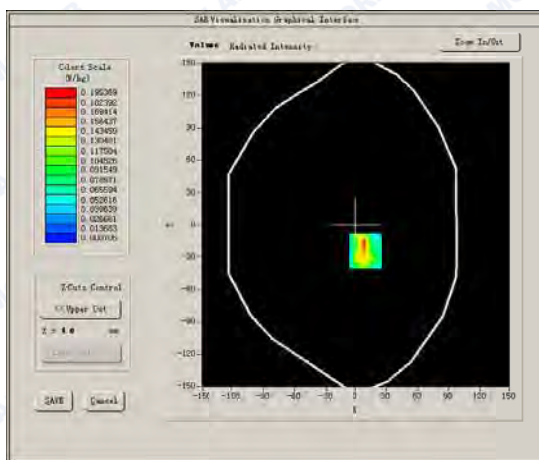




REPORT No. : SZ14100111S02

Maximum location: X=1.00, Y=-16.00


SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.173075
SAR 1g (W/Kg)	0.364052


Z axis scan

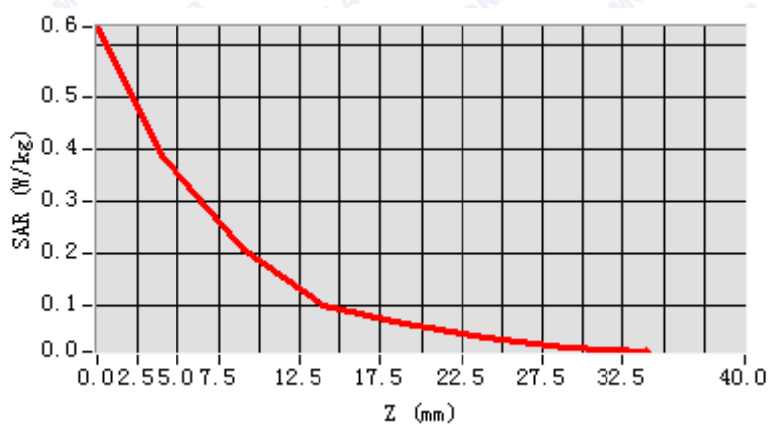

3D screen shot

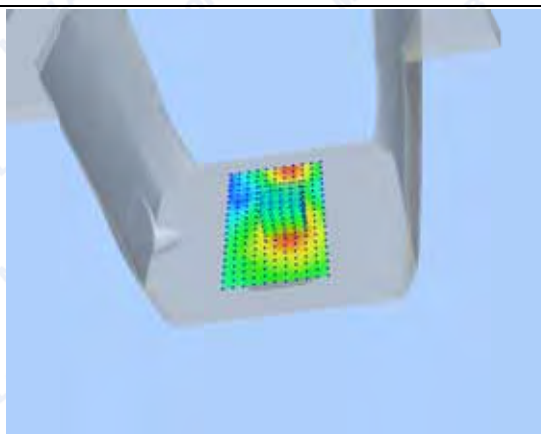

Hot spot position

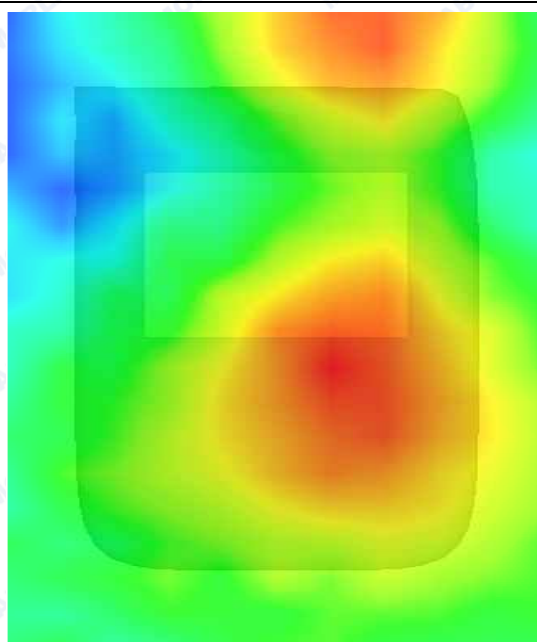



REPORT No. : SZ14100111S02

MEASUREMENT 9

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 37 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11a
Channels	High
Signal	OFDM

B. SAR Measurement Results


High Band SAR (Channel 165)

Frequency (MHz)	5825.000000
Relative permittivity (real part)	48.093428
Conductivity (S/m)	5.930716
Power drift (%)	-3.420000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

SURFACE SAR

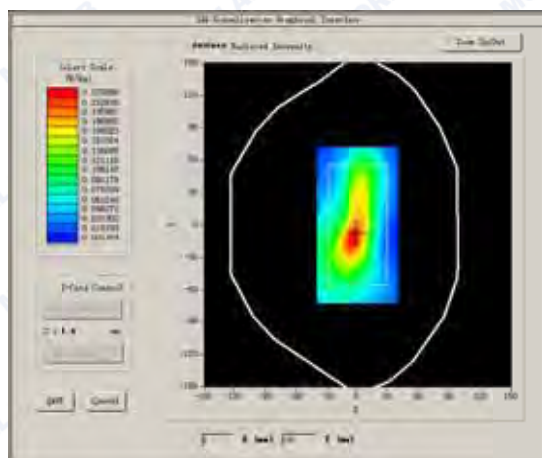

VOLUME SAR

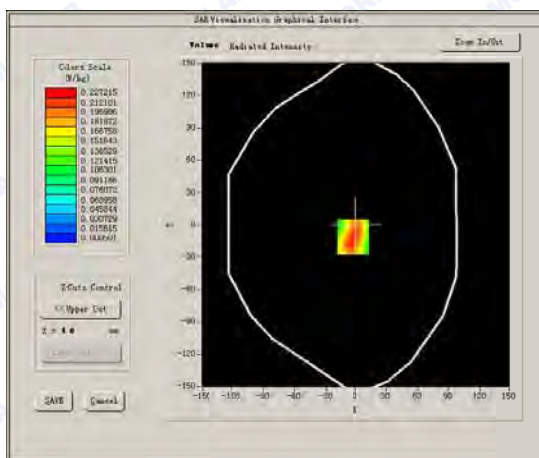




REPORT No. : SZ14100111S02

Maximum location: X=-3.00, Y=-11.00


SAR Peak: 0.42 W/kg

SAR 10g (W/Kg)	0.118883
SAR 1g (W/Kg)	0.236819


Z axis scan

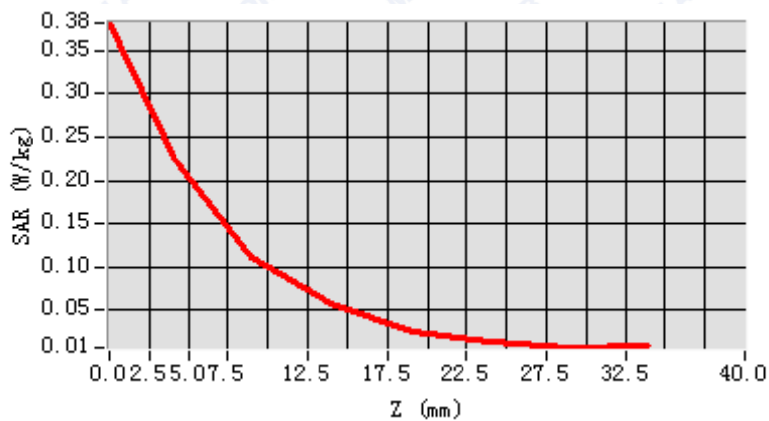

3D screen shot

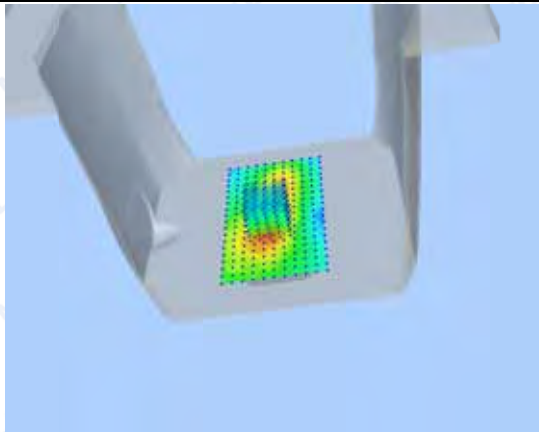

Hot spot position

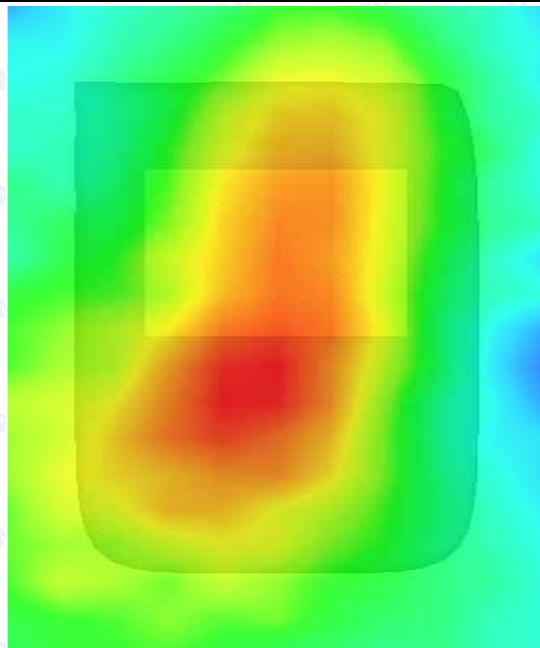



REPORT No. : SZ14100111S02

MEASUREMENT 10

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 29 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11a
Channels	High
Signal	OFDM

B. SAR Measurement Results


High Band SAR (Channel 165)

Frequency (MHz)	5825.000000
Relative permittivity (real part)	48.093428
Conductivity (S/m)	5.930716
Power drift (%)	-2.360000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

SURFACE SAR

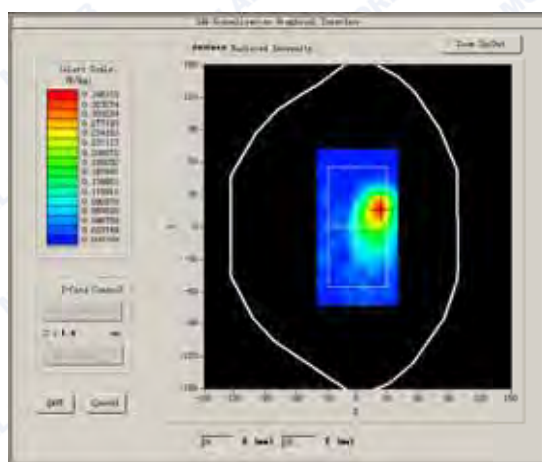

VOLUME SAR

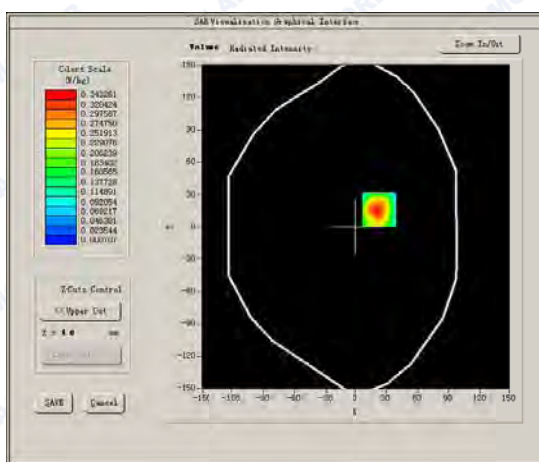




REPORT No. : SZ14100111S02

Maximum location: X=23.00, Y=16.00


SAR Peak: 0.70 W/kg

SAR 10g (W/Kg)	0.152166
SAR 1g (W/Kg)	0.224060


Z axis scan

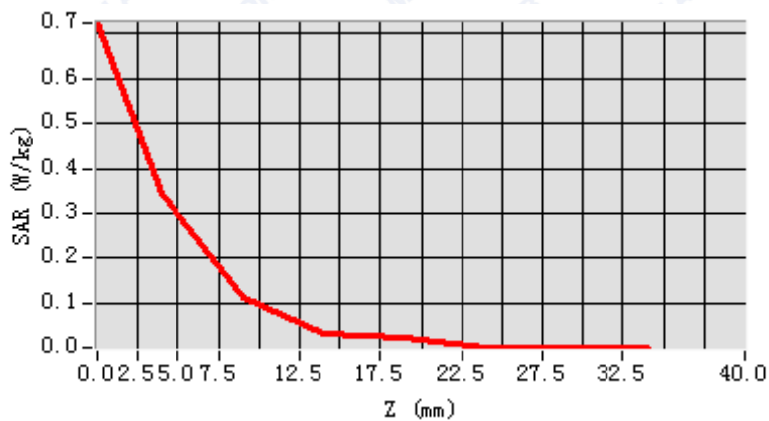

3D screen shot

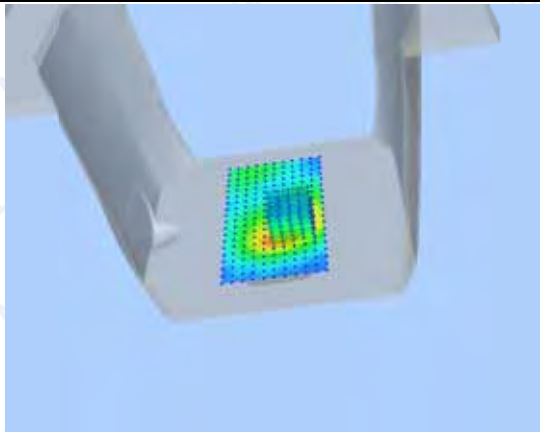

Hot spot position

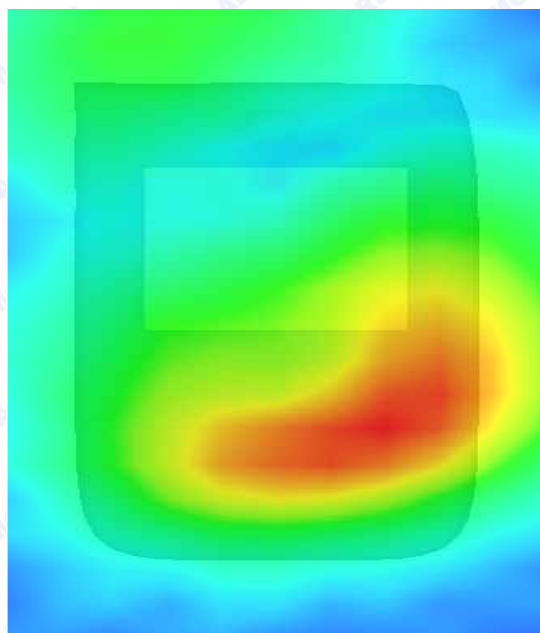



REPORT No. : SZ14100111S02

MEASUREMENT 11

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 31 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11a
Channels	High
Signal	OFDM

B. SAR Measurement Results


High Band SAR (Channel 165)

Frequency (MHz)	5825.000000
Relative permittivity (real part)	48.093428
Conductivity (S/m)	5.930716
Power drift (%)	-2.740000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

SURFACE SAR

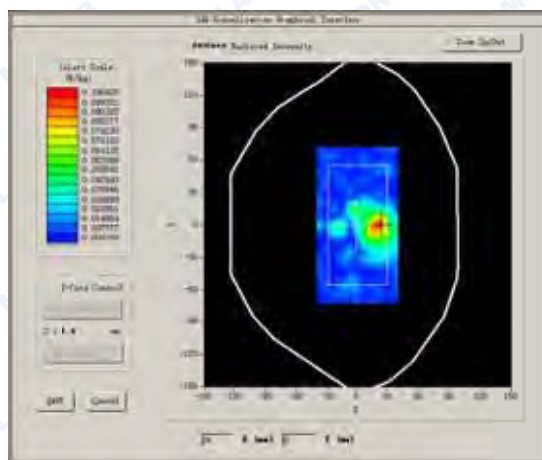

VOLUME SAR

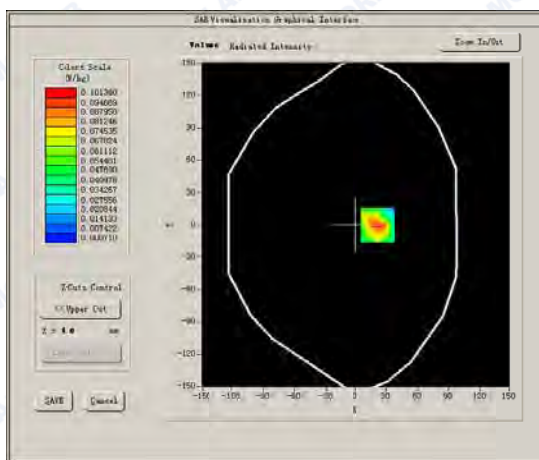




REPORT No. : SZ14100111S02

Maximum location: X=22.00, Y=0.00


SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.081240
SAR 1g (W/Kg)	0.118599


Z axis scan

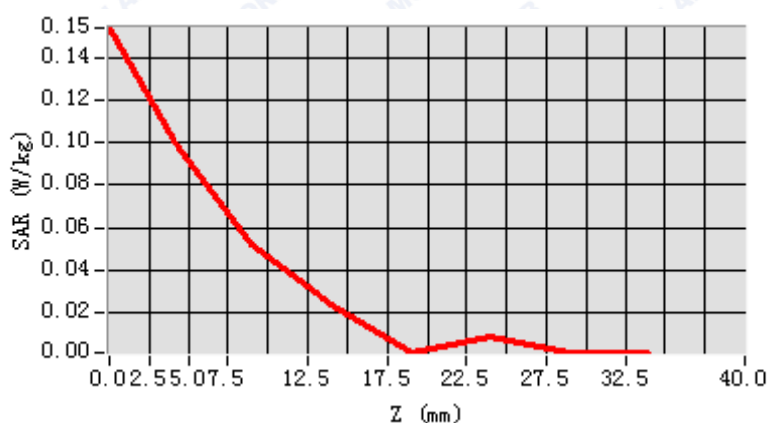

3D screen shot

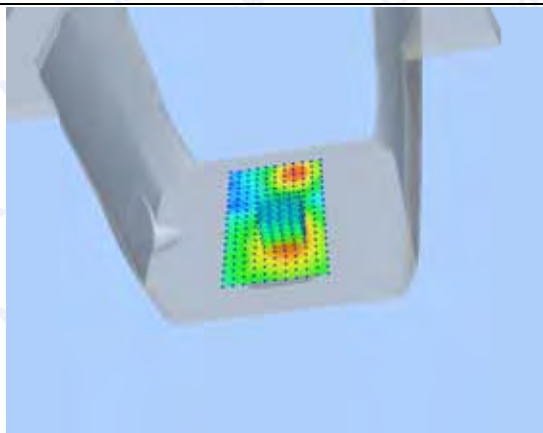

Hot spot position

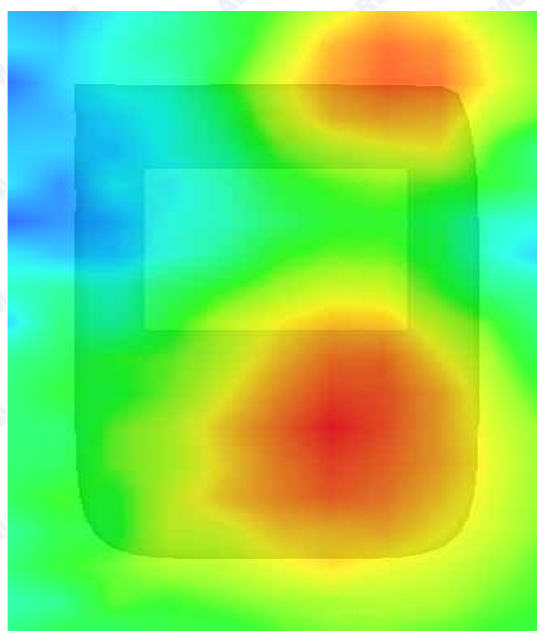



MEASUREMENT 12

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 31 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11a
Channels	High
Signal	OFDM

B. SAR Measurement Results


High Band SAR (Channel 165)

Frequency (MHz)	5825.000000
Relative permittivity (real part)	48.093428
Conductivity (S/m)	5.930716
Power drift (%)	3.340000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

SURFACE SAR

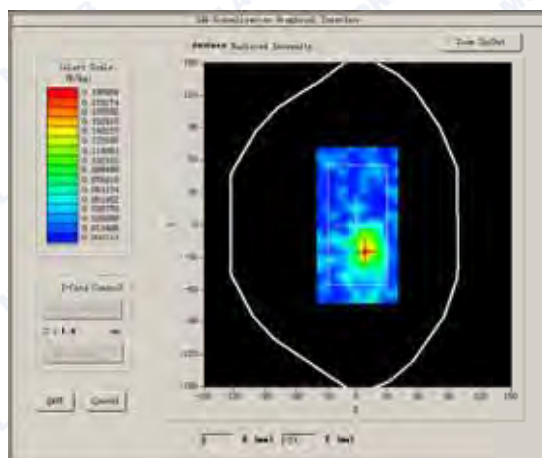

VOLUME SAR

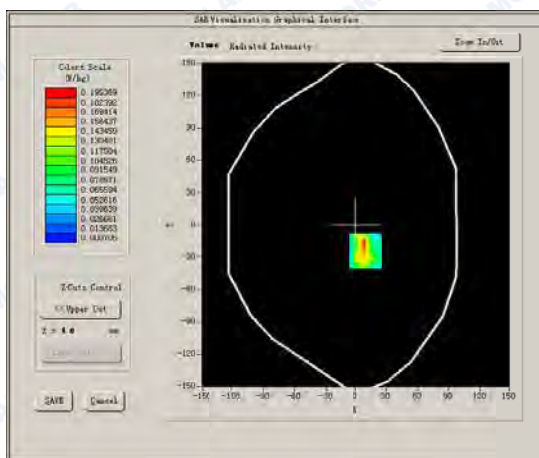




REPORT No. : SZ14100111S02

Maximum location: X=9.00, Y=-24.00


SAR Peak: 0.43 W/kg

SAR 10g (W/Kg)	0.101884
SAR 1g (W/Kg)	0.210130


Z axis scan

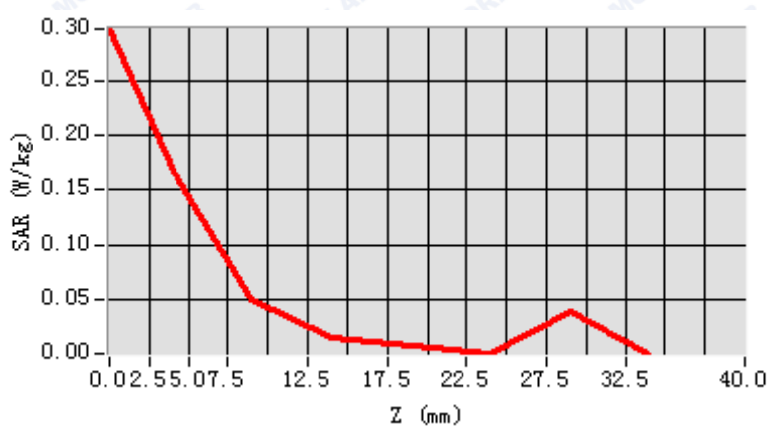

3D screen shot

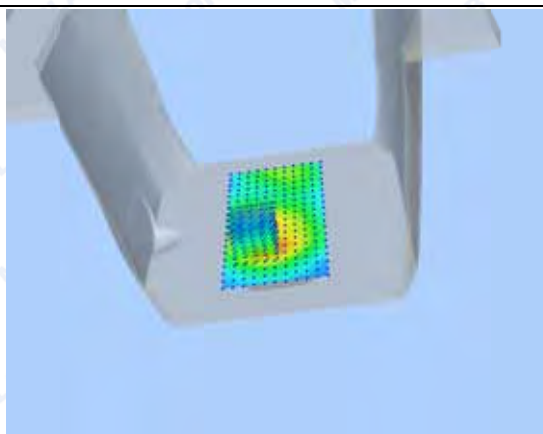

Hot spot position

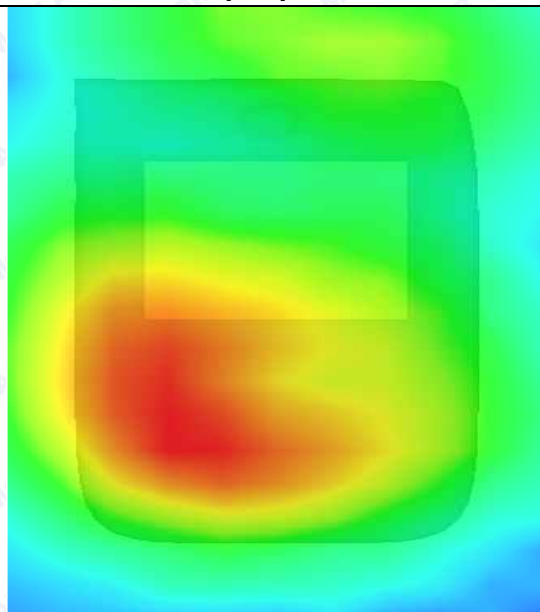



REPORT No. : SZ14100111S02

MEASUREMENT 13

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 37 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	Bluetooth
Channels	Middle
Signal	GFSK

B. SAR Measurement Results


Middle Band SAR (Channel 39)

Frequency (MHz)	2441.000000
Relative permittivity (real part)	52.520628
Conductivity (S/m)	1.958675
Power drift (%)	-3.420000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

SURFACE SAR

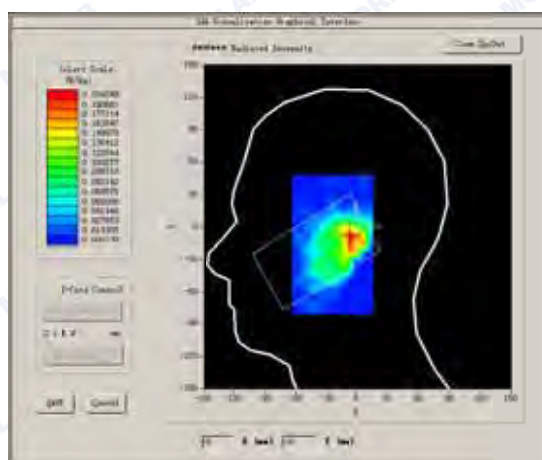

VOLUME SAR

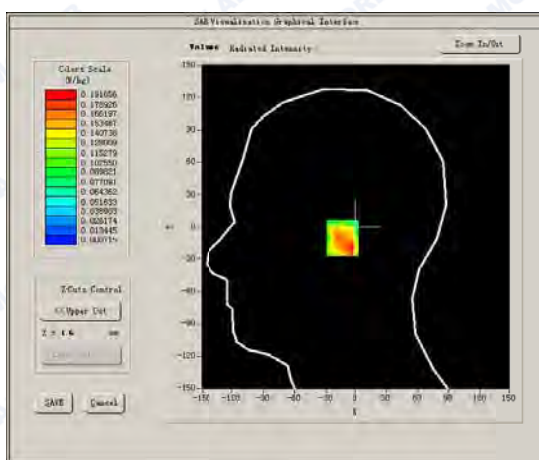




REPORT No. : SZ14100111S02

Maximum location: X=-6.00, Y=-10.00


SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.080738
SAR 1g (W/Kg)	0.123948


Z axis scan

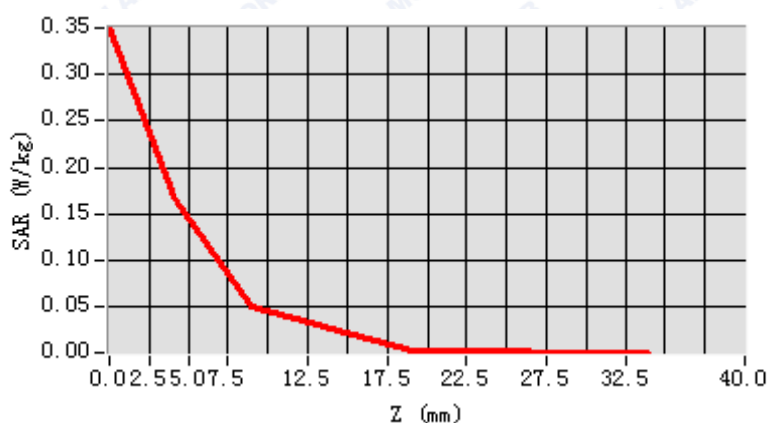

3D screen shot

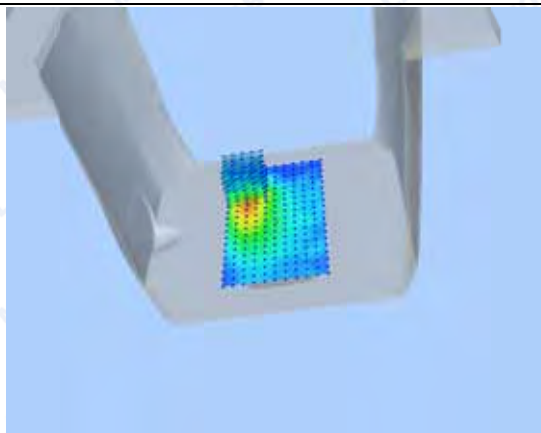

Hot spot position

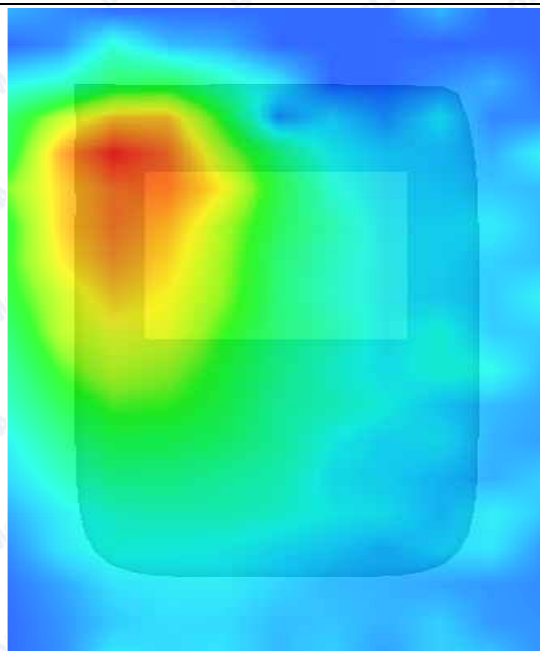

**MEASUREMENT 14**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 29 seconds



A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	Bluetooth
Channels	Middle
Signal	GFSK

B. SAR Measurement Results

Middle Band SAR (Channel 39)

Frequency (MHz)	2441.000000
Relative permittivity (real part)	52.520628
Conductivity (S/m)	1.958675
Power drift (%)	-2.360000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

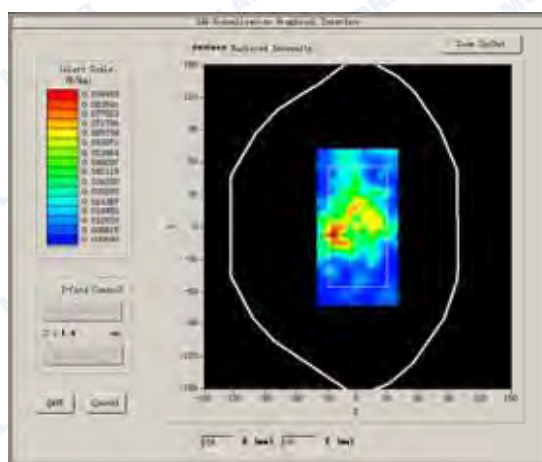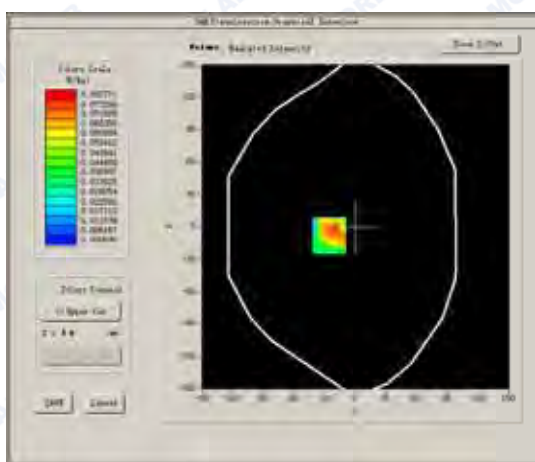SURFACE SAR**VOLUME SAR**




REPORT No. : SZ14100111S02

Maximum location: X=-26.00, Y=-8.00


SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)	0.037246
SAR 1g (W/Kg)	0.086668


Z axis scan

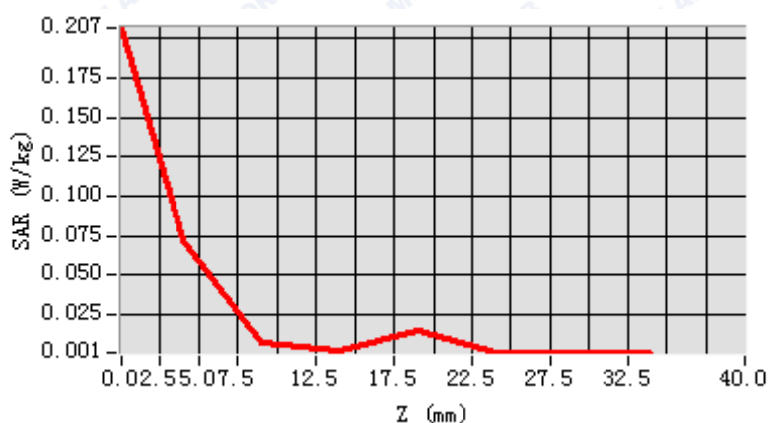

3D screen shot

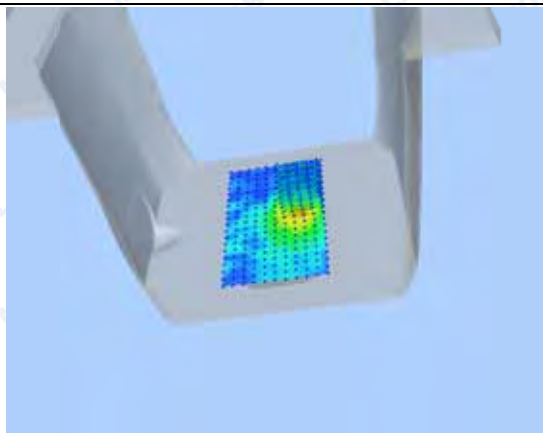

Hot spot position

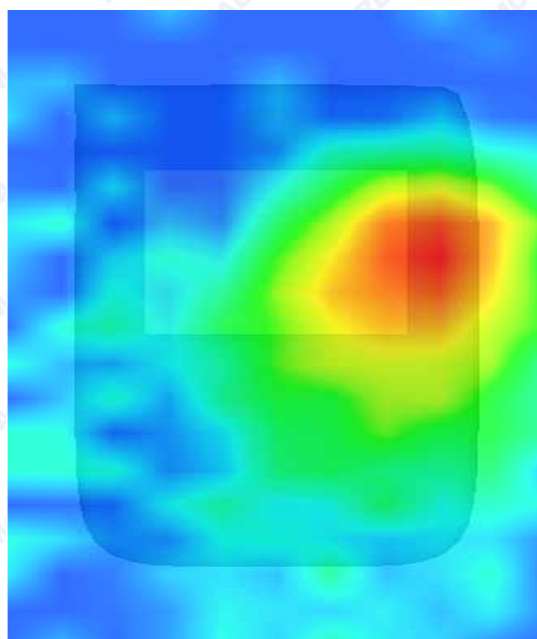



REPORT No. : SZ14100111S02

MEASUREMENT 15

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 31 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	Bluetooth
Channels	Middle
Signal	GFSK

B. SAR Measurement Results


Middle Band SAR (Channel 39)

Frequency (MHz)	2441.000000
Relative permittivity (real part)	52.520628
Conductivity (S/m)	1.958675
Power drift (%)	-2.740000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

SURFACE SAR

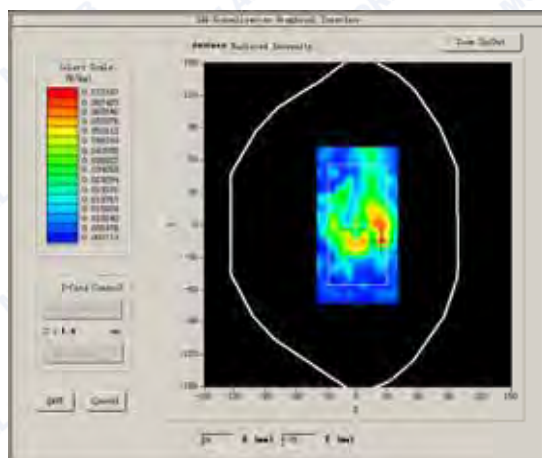

VOLUME SAR

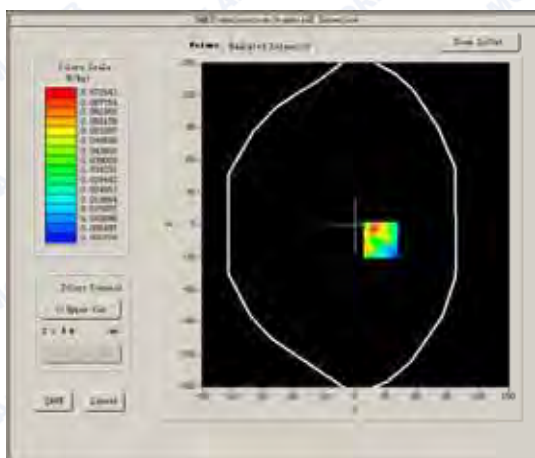




REPORT No. : SZ14100111S02

Maximum location: X=25.00, Y=-14.00


SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.027589
SAR 1g (W/Kg)	0.059352


Z axis scan

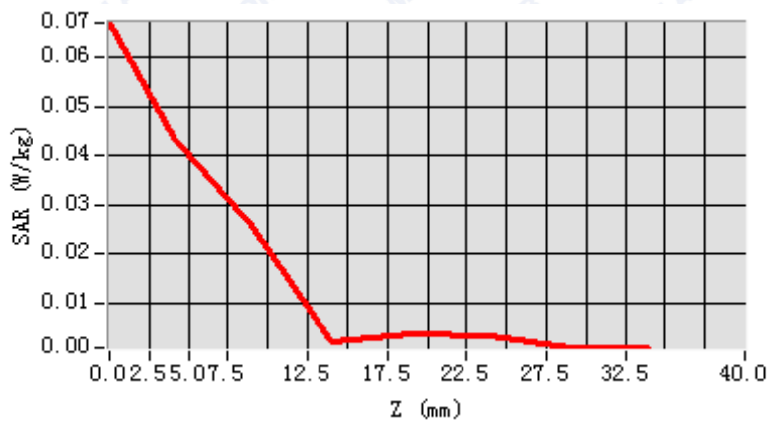

3D screen shot

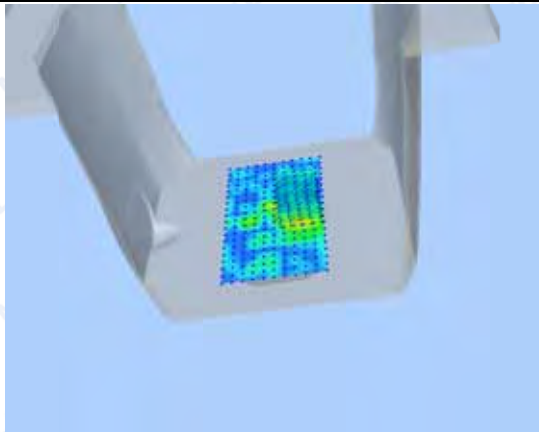

Hot spot position

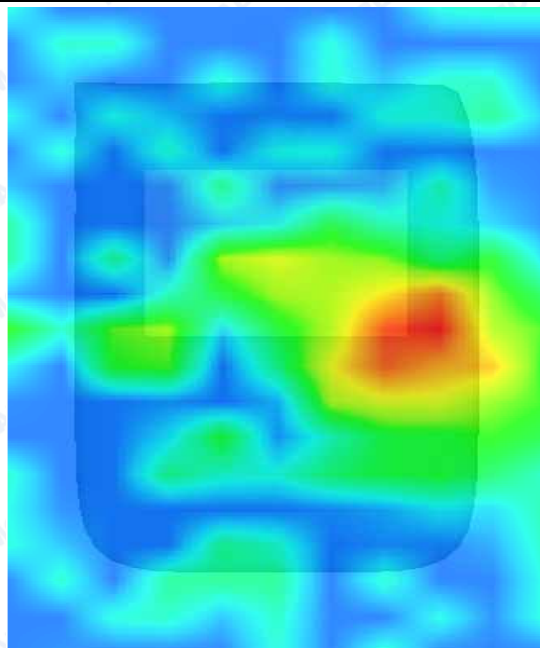



REPORT No. : SZ14100111S02

MEASUREMENT 16

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2014.11.3

Measurement duration: 9 minutes 31 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	Bluetooth
Channels	Middle
Signal	GFSK

B. SAR Measurement Results


Middle Band SAR (Channel 39)

Frequency (MHz)	2441.000000
Relative permittivity (real part)	52.520628
Conductivity (S/m)	1.958675
Power drift (%)	3.340000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

SURFACE SAR

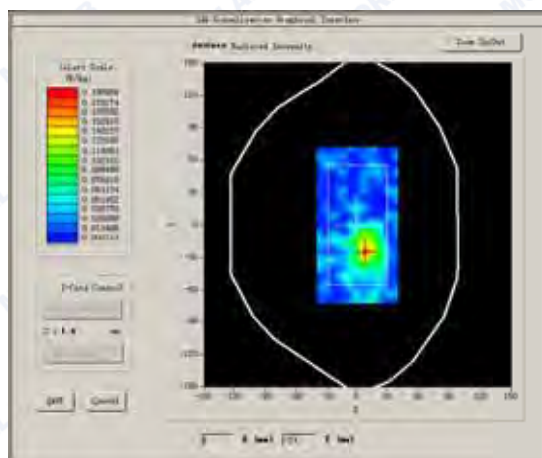

VOLUME SAR

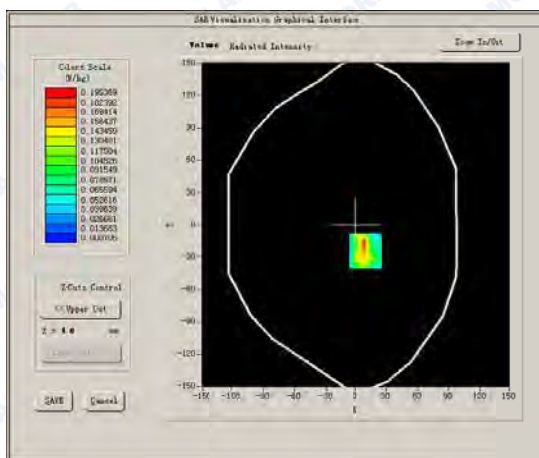




REPORT No. : SZ14100111S02

Maximum location: X=9.00, Y=-24.00


SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.061884
SAR 1g (W/Kg)	0.064130


Z axis scan

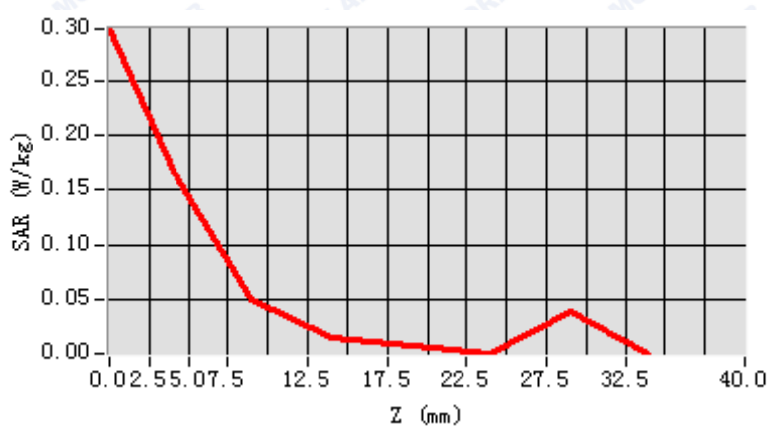

3D screen shot

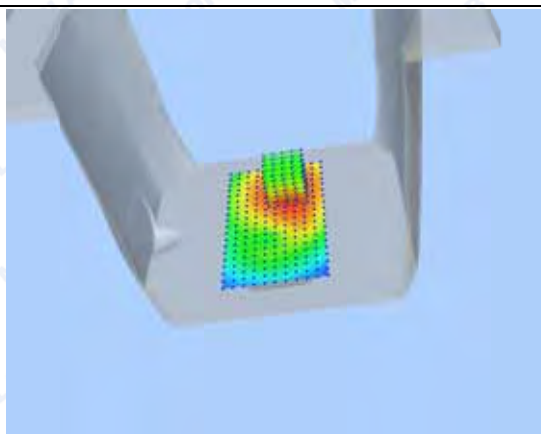

Hot spot position

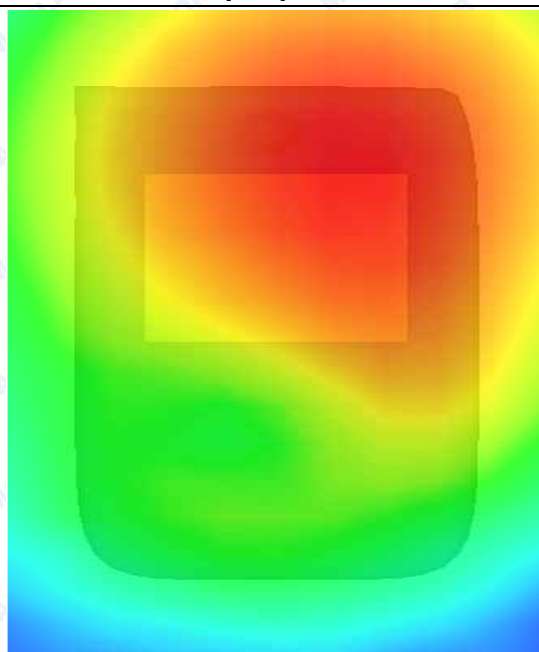



REPORT No. : SZ14100111S02

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=5mm

Date of measurement: 2015.1.13

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.520628
Conductivity (S/m)	1.958675
Power Drift (%)	0.630000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	4.96
Crest factor:	1:1

SURFACE SAR

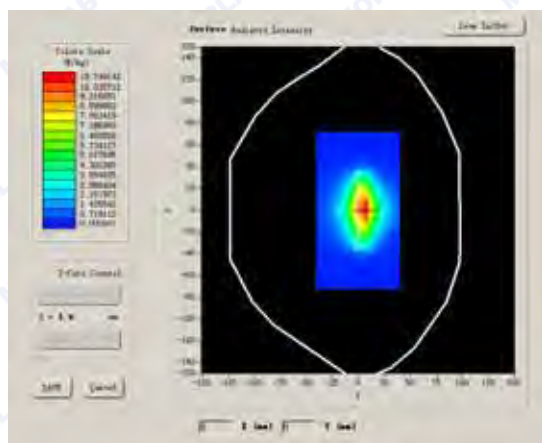

VOLUME SAR

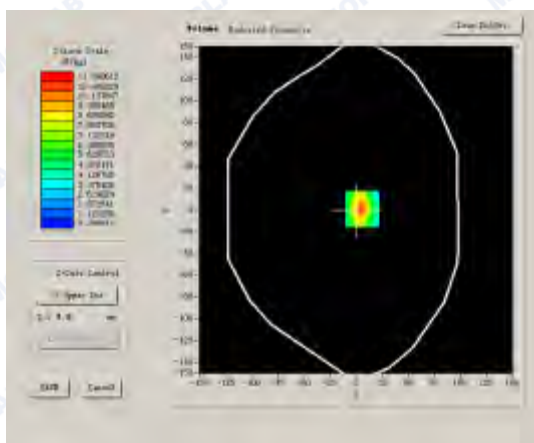



REPORT No. : SZ14100111S02


Maximum location: X=-1.00, Y=-50.00

SAR 10g (W/Kg)	7.285412
SAR 1g (W/Kg)	13.286857


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	13.1279	6.8312	3.5991	1.3473


SAR, Z Axis Scan (X = -1, Y = -50)

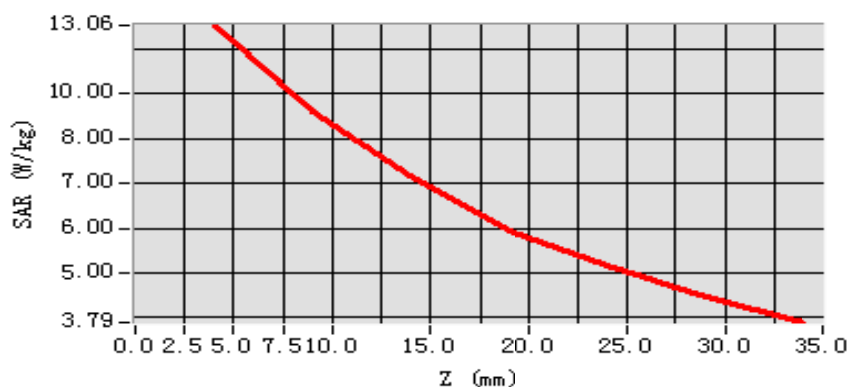

3D scene shot

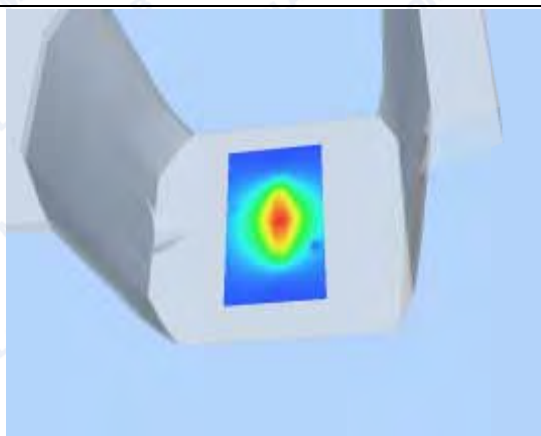

Hot spot position

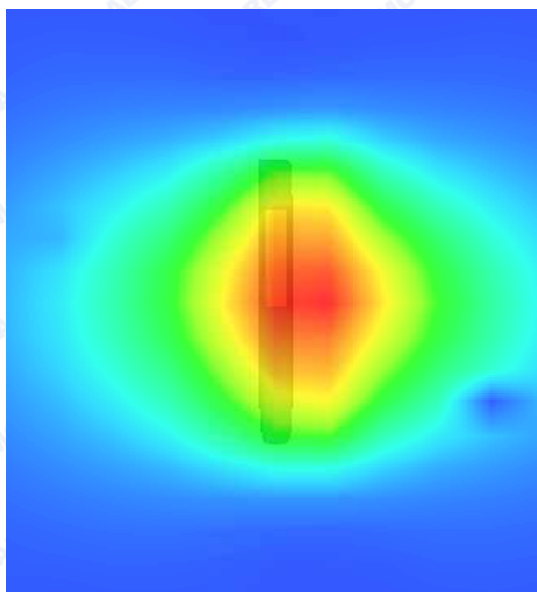



System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2015.1.13

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	5200MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	5200.000000
Relative permittivity (real part)	49.201241
Conductivity (S/m)	5.212451
Power Drift (%)	2.310000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	23.71
Crest factor:	1:1

SURFACE SAR

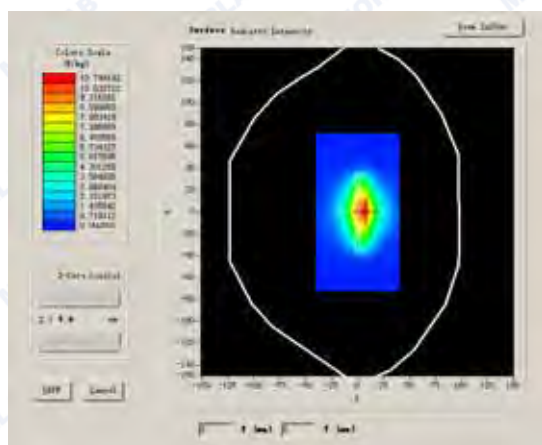

VOLUME SAR

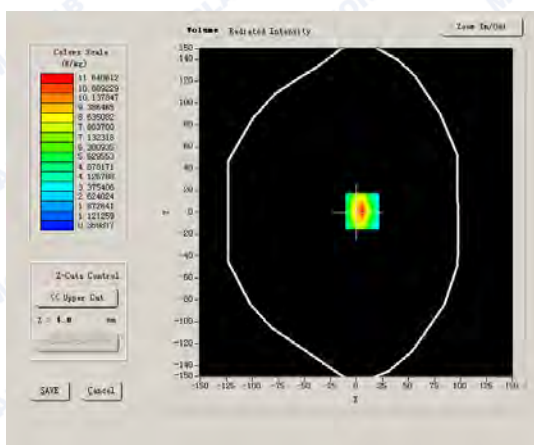



REPORT No. : SZ14100111S02


Maximum location: X=1.00, Y=3.00

SAR 10g (W/Kg)	5.6724078
SAR 1g (W/Kg)	15.762408


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	16.0864	10.0347	5.8794	3.6485	2.0015	1.5297


SAR, Z Axis Scan (X = 1, Y = 3)

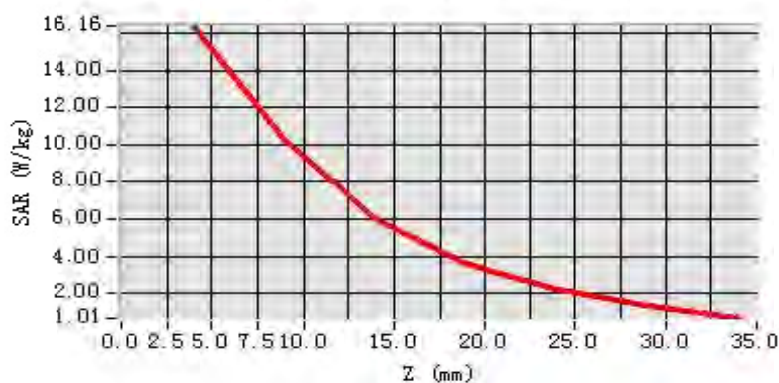

3D scene shot

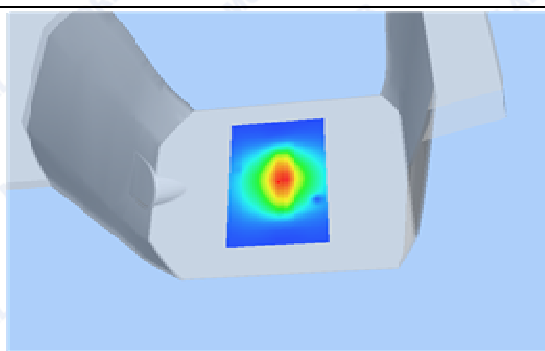

Hot spot position

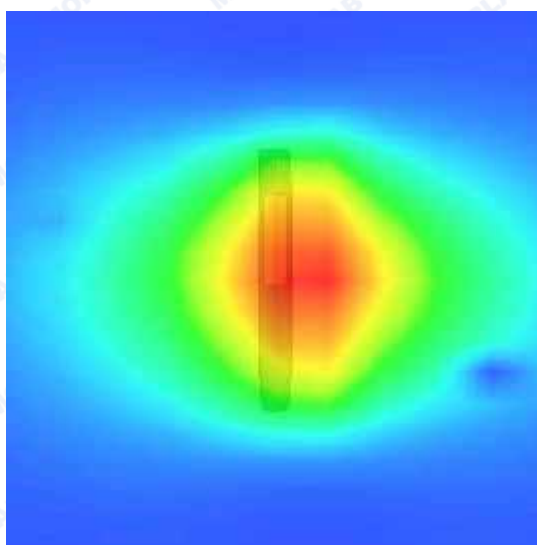



REPORT No. : SZ14100111S02

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2015.1.13

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	5800MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	5800.000000
Relative permittivity (real part)	48.093428
Conductivity (S/m)	5.930716
Power Drift (%)	1.260000
Ambient Temperature:	22.9°C
Liquid Temperature:	22.1°C
ConvF:	26.47
Crest factor:	1:1

SURFACE SAR

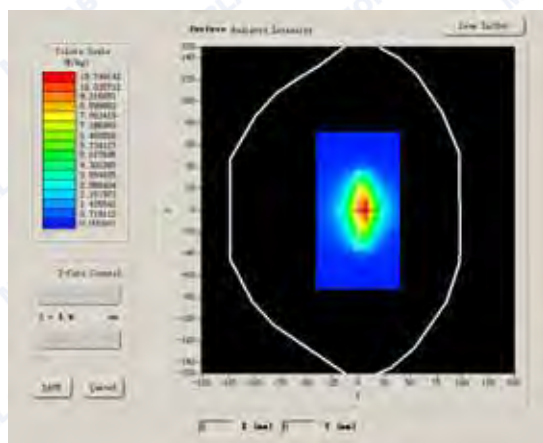

VOLUME SAR

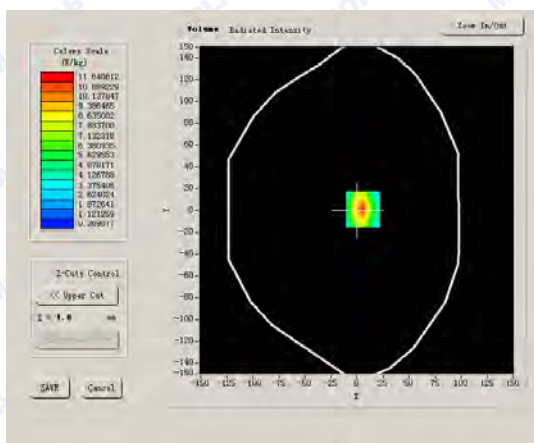





REPORT No. : SZ14100111S02

Maximum location: X=-6.00, Y=-1.00

SAR 10g (W/Kg)	6.782634
SAR 1g (W/Kg)	21.537290

Z Axis Scan

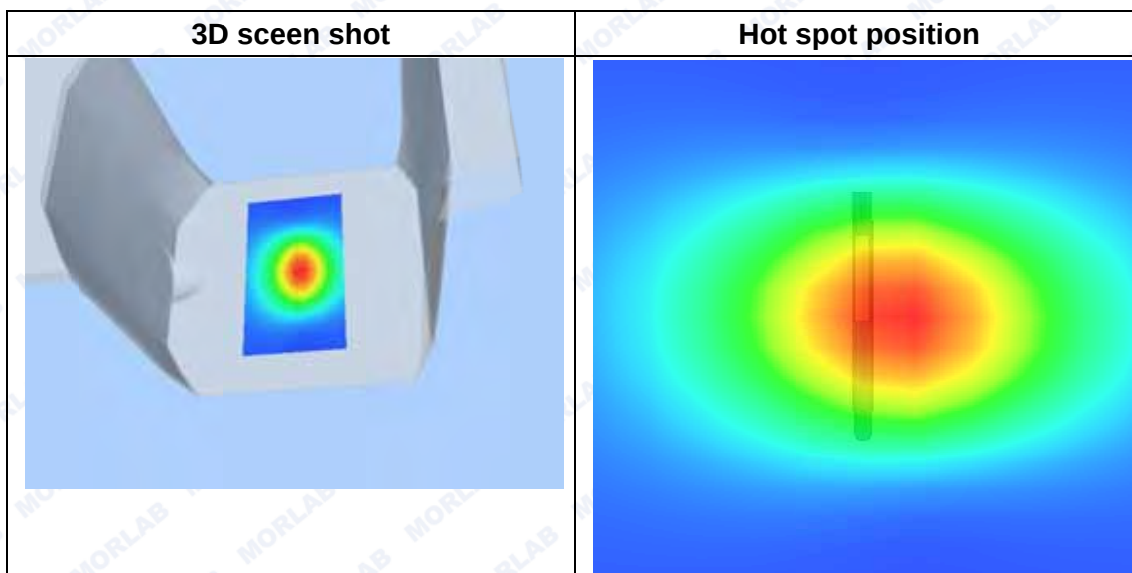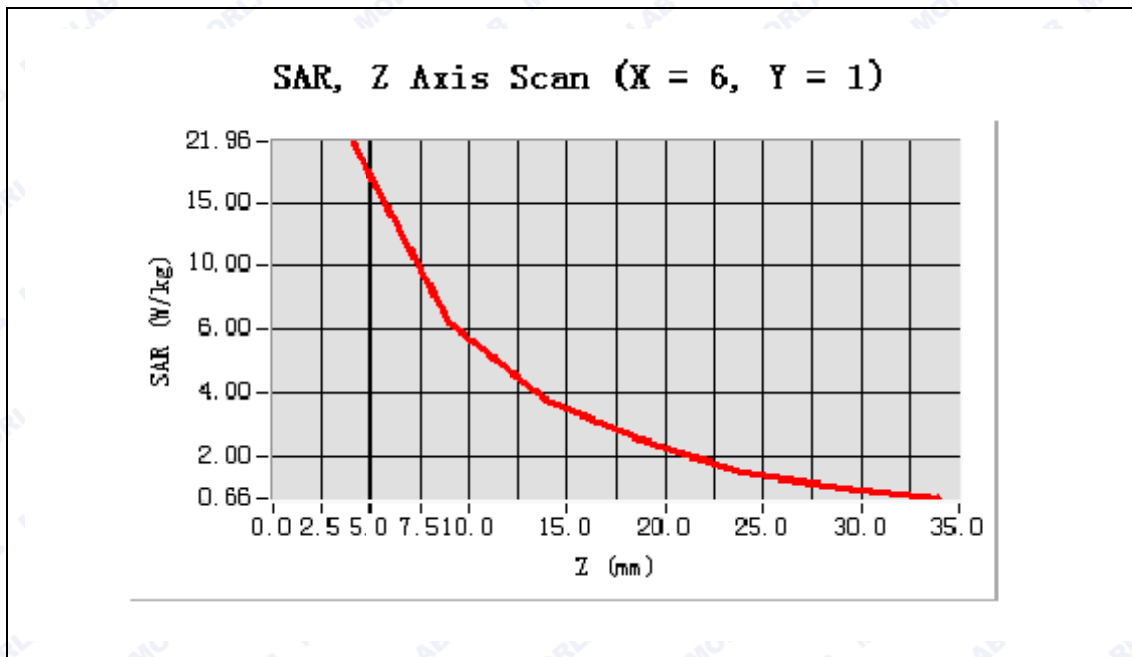



REPORT No. : SZ14100111S02

ANNEX B GENERAL INFORMATION

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



REPORT No. : SZ14100111S02

4. List of Test Equipments

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Aglient (8960, SN:10752)	2014-2-21	1year
3	Network Analyzer	Agilent(E5071B ,SN:MY42404762)	2014-9-24	1year
4	Voltmeter	Keithley (2000, SN:1000572)	2014-9-24	1year
5	Signal Generator	Rohde&Schwarz (SMP_02)	2014-9-24	1year
6	Power Amplifier	PRANA (Ap32 SV125AZ)	2014-9-24	1year
7	Power Meter	Agilent (E4416A, SN:MY45102093)	2014-5-07	1year
8	Power Sensor	Agilent (N8482A, SN:MY41091706)	2014-5-07	1year
9	Directional coupler	Giga-tronics(SN:1829112)	2014-9-24	1year
10	Probe	Satimo (SN:SN 37/08 EP80)	2014-9-22	1year
11	Probe 5-6GHz	Satimo (SN:SN 27/13 EPG193)	2014-9-22	1year
12	Dielectric Probe Kit	Agilent (85033E)	2014-9-24	1year
13	Phantom	Satimo (SN:SN_36_08_SAM62)	2014-9-24	1year
14	Liquid	Satimo(Last Calibration: 2015-1-13)	N/A	N/A
15	Dipole 2450MHz	Satimo (SN 30/13 DIP2G450-263)	2014-9-22	1year
16	Waveguide 5-6GHz	Satimo (SN 41/12 WGA21)	2014-9-22	1year

***** END OF REPORT *****