

**PARTIAL TEST REPORT**  
**No.: 17-1-0231003T01a**

According to:  
**Title 47 CFR, Chapter I**  
**FCC Regulations, Subchapter B**  
Part 22, Part 24 Part 27

for

**IPETRONIK GmbH & Co KG**

**µCROS SL**  
**Data Logger**

**FCC ID: 2ARF8UCROS-SL**

**Laboratory Accreditation and Listings**



**accredited according to DIN EN ISO/IEC 17025**

**CETECOM GmbH**

Laboratory Radio Communications & Electromagnetic Compatibility  
Im Teelbruch 116 • 45219 Essen • Germany  
Registered in Essen, Germany, Reg. No.: HRB Essen 8984  
Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964  
E-mail: [info@cetecom.com](mailto:info@cetecom.com) • Internet: [www.cetecom.com](http://www.cetecom.com)

## Table of contents

|                                                                                |           |
|--------------------------------------------------------------------------------|-----------|
| <b>1. SUMMARY OF TEST RESULTS.....</b>                                         | <b>3</b>  |
| 1.1. TX mode, Test overview of FCC Standards.....                              | 3         |
| <b>2. ADMINISTRATIVE DATA .....</b>                                            | <b>4</b>  |
| 2.1. Identification of the testing laboratory.....                             | 4         |
| 2.2. Test location .....                                                       | 4         |
| 2.3. Organizational items .....                                                | 4         |
| 2.4. Applicant's details .....                                                 | 4         |
| 2.5. Manufacturer's details .....                                              | 4         |
| <b>3. EQUIPMENT UNDER TEST (EUT).....</b>                                      | <b>5</b>  |
| 3.1. Technical GSM/GPRS/E-GPRS data of main EUT declared by applicant.....     | 5         |
| 3.2. EUT: Type, S/N etc. and short descriptions used in this test report ..... | 6         |
| 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions .....     | 6         |
| 3.4. EUT set-ups .....                                                         | 6         |
| 3.5. GSM/GPRS/E-GPRS EUT operating modes.....                                  | 7         |
| 3.6. Test system set-up for radiated spurious emission measurements .....      | 8         |
| <b>4. MEASUREMENTS .....</b>                                                   | <b>9</b>  |
| 4.1. RF-Parameter - Radiated out of Band RF emissions .....                    | 9         |
| 4.2. Measurement uncertainties .....                                           | 11        |
| <b>5. ABBREVIATIONS USED IN THIS REPORT .....</b>                              | <b>12</b> |
| <b>6. ACCREDITATION DETAILS OF CETECOM'S LABORATORIES AND TEST SITES .....</b> | <b>12</b> |
| <b>7. INSTRUMENTS AND ANCILLARY.....</b>                                       | <b>13</b> |
| 7.1. Used equipment "CTC" .....                                                | 13        |
| <b>8. VERSIONS OF TEST REPORTS (CHANGE HISTORY) .....</b>                      | <b>17</b> |

| Table of Annex                                             |                             |                               |             |
|------------------------------------------------------------|-----------------------------|-------------------------------|-------------|
| Annex No.                                                  | Contents                    | Reference Description         | Total Pages |
| Annex 1                                                    | Test results                | CETECOM_TR17-1-0231003T01a-A1 | 9           |
| Annex 2                                                    | Internal photographs of EUT | CETECOM_TR17-1-0231003T01a-A2 | 8           |
| Annex 3                                                    | External photographs of EUT | CETECOM_TR17-1-0231003T01a-A3 | 7           |
| Annex 4                                                    | Test set-up photographs     | CETECOM_TR17-1-0231003T01a-A4 | 3           |
| The listed attachments are an integral part of this report |                             |                               |             |

## 1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests. Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

The Equipment Under Test (in this report, hereinafter referred as EUT) supports radiofrequency technologies. Delta tests apply to check for conformance against valid standards due already approved cellular wireless module **LISA-U200** from **ublox** with **FCC-ID: XPYLISAU200** and **ISED: 8595A-LISAU200**. Due no modifications on the GSM/GPRS/E-GPRS RF-Part of the module, only radiated tests have been performed.

The presented Equipment Under Test (in this report, hereinafter referred as EUT) supports radiofrequency technologies with WLAN technology and operating frequency range at 2.412 to 2.462 GHz according to IEE 802.11 b/g/n. The EUT integrates a **Intel** WLAN transmitter of pre-certified module **8265NG (FCC ID: PD98265NG and ISED: 1000M-8265NG)**. Due no modifications on the WLAN RF-Part of the module, only radiated tests have been performed. Test report shows results for GSM + WLAN 2.4GHz technology only. Other implemented wireless technologies were not considered within this test report.

Following tests have been performed to show compliance with applicable FCC Part 22, Subpart H and Part 24, Subpart E (Broadband PCS) of the CFR Title 47 FCC Rules, Edition 2018 standards. .

### 1.1. TX mode, Test overview of FCC Standards

| No. of Diagram group | Test Cases                                                                           | Port                                           | References & Limits            |             |                                                       | EUT set-up | EUT op-mode | Result |
|----------------------|--------------------------------------------------------------------------------------|------------------------------------------------|--------------------------------|-------------|-------------------------------------------------------|------------|-------------|--------|
|                      |                                                                                      |                                                | FCC Standard                   | RSS Section | Test limit                                            |            |             |        |
| 8                    | Spurious emissions radiated (30 MHz to... *tenth-times of the fundamental frequency) | Enclosure + Inter-connecting cables (radiated) | §22.917(a)(b)<br>§24.238(a)(b) | --          | Required attenuation below P(dBW):<br>43+10log(P) dBc | 1          | 1 + 2       | Passed |

Remark: 1.) Please refer to modular FCC test reports(Cellular) of FCC ID: XPYLISAU200

[https://apps.fcc.gov/oetcf/tcb/reports/Tcb731GrantForm.cfm?mode=COPY&RequestTimeout=500&tcb\\_code=&application\\_id=mka%2FQOeS4d7b4gwntenUHQ%3D%3D&fcc\\_id=XPYLISAU200](https://apps.fcc.gov/oetcf/tcb/reports/Tcb731GrantForm.cfm?mode=COPY&RequestTimeout=500&tcb_code=&application_id=mka%2FQOeS4d7b4gwntenUHQ%3D%3D&fcc_id=XPYLISAU200)

Remark 2) Please refer to separate FCC RF Test Report(WLAN 2.4GHz) for FCC-ID: PD98265NG

[https://apps.fcc.gov/oetcf/tcb/reports/Tcb731GrantForm.cfm?mode=COPY&RequestTimeout=500&tcb\\_code=&application\\_id=6130iJArjJkfzH1TryP1DQ%3D%3D&fcc\\_id=PD98265NG](https://apps.fcc.gov/oetcf/tcb/reports/Tcb731GrantForm.cfm?mode=COPY&RequestTimeout=500&tcb_code=&application_id=6130iJArjJkfzH1TryP1DQ%3D%3D&fcc_id=PD98265NG)

.....  
Dipl.-Ing. Ch. Lorenz  
Responsible for test section

.....  
B.Sc. Al-Amin Hossain  
Responsible for test report

## 2. Administrative Data

### 2.1. Identification of the testing laboratory

|                                     |                                                      |
|-------------------------------------|------------------------------------------------------|
| Company name:                       | CETECOM GmbH                                         |
| Address:                            | Im Teelbruch 116<br>45219 Essen - Kettwig<br>Germany |
| Responsible for testing laboratory: | Mr. Volker Wittmann                                  |
| Deputy:                             | Dipl.-Ing. Niels Jeß                                 |

### 2.2. Test location

#### 2.2.1. Test laboratory “CTC”

|               |                                                           |
|---------------|-----------------------------------------------------------|
| Company name: | see chapter 2.1. Identification of the testing laboratory |
|---------------|-----------------------------------------------------------|

### 2.3. Organizational items

|                                       |                          |
|---------------------------------------|--------------------------|
| Responsible for test and test report: | B.Sc. Al-Amin Hossain    |
| Project leader:                       | Cleem Carsten            |
| Receipt of EUT:                       | 2019-07-25               |
| Date(s) of test:                      | 2019-09-02 to 2019-09-09 |
| Date of report:                       | 2019-10-02               |
| -----                                 |                          |
| Version of template:                  | 13.02                    |

### 2.4. Applicant's details

|                   |                                                 |
|-------------------|-------------------------------------------------|
| Applicant's name: | IPETRONIK GmbH & Co KG                          |
| Address:          | Im Rollfeld 28<br>76532, Baden-Baden<br>Germany |
| Contact person:   | Mr. Peter Hütt                                  |

### 2.5. Manufacturer's details

|                      |                        |
|----------------------|------------------------|
| Manufacturer's name: | see applicant's detail |
| Address:             | see applicant's detail |

### 3. Equipment under test (EUT)

#### 3.1. Technical GSM/GPRS/E-GPRS data of main EUT declared by applicant

|                                        |                                                                                                                                                                                                                                                                                                                                                                                                                     |  |  |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| Main function                          | Data logger                                                                                                                                                                                                                                                                                                                                                                                                         |  |  |
| Type                                   | μCROS SL                                                                                                                                                                                                                                                                                                                                                                                                            |  |  |
| Module                                 | LISA-U200 from ublox                                                                                                                                                                                                                                                                                                                                                                                                |  |  |
| Module FCC ID                          | FCC-ID: XPYLISAU200                                                                                                                                                                                                                                                                                                                                                                                                 |  |  |
| Type of modulation                     | <input checked="" type="checkbox"/> GSM,GPRS, GMSK<br><input checked="" type="checkbox"/> EGPRS-Mode: 8-PSK                                                                                                                                                                                                                                                                                                         |  |  |
| Number of channels (USA/Canada -bands) | <input checked="" type="checkbox"/> GSM 850: 128 – 251, 125 channels<br><input checked="" type="checkbox"/> GSM1900: 512 – 810, 300 channels                                                                                                                                                                                                                                                                        |  |  |
| Test Channel frequencies               | <input checked="" type="checkbox"/> GSM/E-GPRS 850 MHz Band: Channel 128/192/251<br><input checked="" type="checkbox"/> GSM/E-GPRS 1900 MHz Band: Channel 512/661/810                                                                                                                                                                                                                                               |  |  |
| TX-frequency range WLAN 2.4GHz         | <input checked="" type="checkbox"/> 2412 MHz (Channel 1) to 2462 MHz (Channel 11) for 20MHz BW                                                                                                                                                                                                                                                                                                                      |  |  |
| Emission designator(s) Cellular        | See original module's grant:<br><a href="https://apps.fcc.gov/oetcf/tcb/reports/Tcb731GrantForm.cfm?mode=COPY&amp;RequestTimeout=500&amp;tcb_code=&amp;application_id=mka%2FQOeS4d7b4gwntenUHQ%3D%3D&amp;fcc_id=XPYLISAU200">https://apps.fcc.gov/oetcf/tcb/reports/Tcb731GrantForm.cfm?mode=COPY&amp;RequestTimeout=500&amp;tcb_code=&amp;application_id=mka%2FQOeS4d7b4gwntenUHQ%3D%3D&amp;fcc_id=XPYLISAU200</a> |  |  |
| Emission designator(s) WLAN 2.4GHz     | See original module's grant:<br><a href="https://apps.fcc.gov/oetcf/tcb/reports/Tcb731GrantForm.cfm?mode=COPY&amp;RequestTimeout=500&amp;tcb_code=&amp;application_id=6130iJAjJkFzH1TrvPIDQ%3D%3D&amp;fcc_id=PD98265NG">https://apps.fcc.gov/oetcf/tcb/reports/Tcb731GrantForm.cfm?mode=COPY&amp;RequestTimeout=500&amp;tcb_code=&amp;application_id=6130iJAjJkFzH1TrvPIDQ%3D%3D&amp;fcc_id=PD98265NG</a>           |  |  |
| Antenna Type                           | <input type="checkbox"/> Integrated (enclosure)<br><input type="checkbox"/> External - dedicated, no RF- connector<br><input checked="" type="checkbox"/> External, separate RF-connector                                                                                                                                                                                                                           |  |  |
| Antenna Model No.                      | 4G/3G/2G Antenna Taoglass Part Nr.: MA962.A.LBCG.003.ka<br>Datasheet: SPE-18-8-070-B/SC                                                                                                                                                                                                                                                                                                                             |  |  |
| Antenna Gain Tx *1) Cellular           | GSM 850 : 2.90 dBi<br>GSM 1900: 2.98 dBi                                                                                                                                                                                                                                                                                                                                                                            |  |  |
| Antenna Gain *1) WLAN 2.4GHz           | MIMO A 3.15 dBi<br>MIMO B 1.74 dBi                                                                                                                                                                                                                                                                                                                                                                                  |  |  |

|                                                                                                                 |                                                                                                                                                                                                                                                                   |                                                    |                                      |
|-----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|--------------------------------------|
| Installed option                                                                                                | <input checked="" type="checkbox"/> 802.11 a/n/ac (5GHZ WLAN, not tested within this report)<br><input checked="" type="checkbox"/> UMTS Band 2, 4, 5 (not tested within this report)<br><input checked="" type="checkbox"/> GNSS (not tested within this report) |                                                    |                                      |
| Power supply                                                                                                    | <input checked="" type="checkbox"/> DC power only: 24 V DC<br><input type="checkbox"/> Li-Io Battery: 3.7 V DC                                                                                                                                                    |                                                    |                                      |
| Special EMI components                                                                                          | --                                                                                                                                                                                                                                                                |                                                    |                                      |
| Does EUT contain devices susceptible to magnetic fields, e.g. Hall elements, electrodynamics microphones, etc.? | <input type="checkbox"/> yes<br><input checked="" type="checkbox"/> no                                                                                                                                                                                            |                                                    |                                      |
| EUT sample type                                                                                                 | <input type="checkbox"/> Production                                                                                                                                                                                                                               | <input checked="" type="checkbox"/> Pre-Production | <input type="checkbox"/> Engineering |
| FCC label attached                                                                                              | <input type="checkbox"/> yes                                                                                                                                                                                                                                      | <input checked="" type="checkbox"/> no             |                                      |

Remark: \*1)please refer to "Antenna Measurement Report of Taoglass Part Nr.: MA962.A.LBCG.003.ka

### 3.2. EUT: Type, S/N etc. and short descriptions used in this test report

| Short description*) | EUT      | Type        | S/N serial number | HW hardware status | SW software status |
|---------------------|----------|-------------|-------------------|--------------------|--------------------|
| EUT A<br>S21        | μCROS SL | Data Logger | 00061             | HW1.03             | SW1.30             |

\*) EUT short description is used to simplify the identification of the EUT in this test report.

### 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

| AE short description *) | Auxiliary Equipment                                                                              | Type                                 | S/N serial number | HW hardware status | SW software status |
|-------------------------|--------------------------------------------------------------------------------------------------|--------------------------------------|-------------------|--------------------|--------------------|
| AE 1                    | Power supply cable                                                                               | 100/50 PE                            | --                | --                 | --                 |
| AE 2                    | MA962 Guardian 4 in 1 Adhesive Mount Antenna LTE + Wi-Fi*2 + GNSS<br>(including 3m RG174 cables) | Part Nr.:<br>MA962.A.LBCG.003.<br>ka | --                | --                 | --                 |
| AE 3                    | WiFi Router                                                                                      | Netgear Nighthawk x4S                | 5K5188590067B     | --                 | --                 |

\*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

### 3.4. EUT set-ups

| EUT set-up no. *) | Combination of EUT and AE  | Remarks                         |
|-------------------|----------------------------|---------------------------------|
| set. 1            | EUT A + AE 1 + AE 2 + AE 3 | Used for radiated measurements. |

\*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

### 3.5. GSM/GPRS/E-GPRS EUT operating modes

| EUT operating mode no.<br>*1) | Description of operating modes                                                          | Additional information                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| op. 1                         | GPRS 850<br>Data<br>Traffic channels<br>=<br>192<br><br>+<br>W-LAN<br>TX-Mode<br>20MHz  | <p>A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 33 dBm (power class 4; power control level 5). USF_Duty CYCLE set to 100%, coding scheme CS-1 for GMSK modulation, slot 3 active, uplink gamma: 3 (33 dBm).</p> <p>The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.</p> <p>With a commercial W-LAN 802.11 compatible Router (AE 03) a communication link via Iperf on certain channel (CH no.7) have been established.</p> |
| op. 2                         | GPRS 1900<br>Data<br>Traffic channels<br>=<br>661<br><br>+<br>W-LAN<br>TX-Mode<br>20MHz | <p>A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 30 dBm (power class 1; power control level 0). USF_Duty CYCLE set to 100%, coding scheme CS-1 for GMSK modulation, slot 3 active, uplink gamma: 3 (30 dBm).</p> <p>The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.</p> <p>With a commercial W-LAN 802.11 compatible Router (AE 03) a communication link via Iperf on certain channel (CH no.7) have been established.</p> |


\*1) EUT operating mode no. is used to simplify the test report.

### 3.6. Test system set-up for radiated spurious emission measurements

**Specification:** ANSI C63.26:2015

**General Description:** Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

**Schematic:**

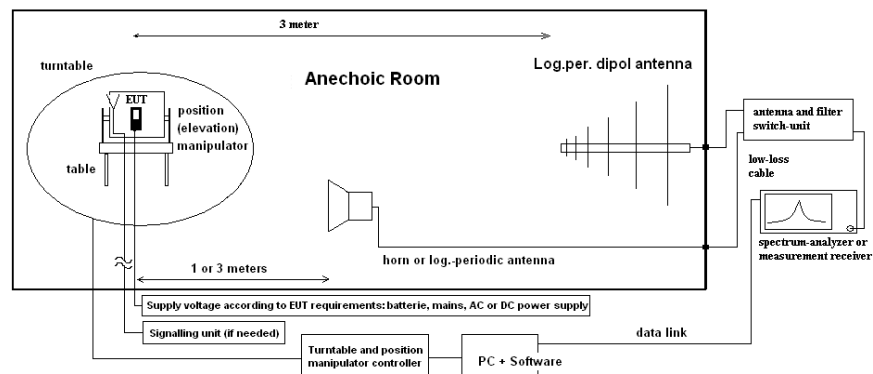

**Testing method:**

#### Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.50 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 45°) and the EUT itself on 3-orthogonal axis (the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software. The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

#### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined. Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out. The readings on the spectrum analyzer are corrected with conversion value between field strength and E(I)RP, so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603 C/D

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$E_{C(I)RP} = E_C - 95.2 \text{ dB}$$

$$M = L_T - E_{C(I)RP}$$

$E_C$  = Electrical field – corrected value

$E_R$  = Receiver reading

$M$  = Margin

$L_T$  = Limit

$AF$  = Antenna factor

$C_L$  = Cable loss

$D_F$  = Distance correction factor (if used)

$G_A$  = Gain of pre-amplifier (if used)

$E_{C(I)RP}$  = Electrical field corrected for E(I)RP

All units are dB-units, positive margin means value is below limit.

## 4. Measurements

### 4.1. RF-Parameter - Radiated out of Band RF emissions

#### 4.1.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

|                 |                                                                    |                                                    |                                                    |
|-----------------|--------------------------------------------------------------------|----------------------------------------------------|----------------------------------------------------|
| test location   | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1) | <input type="checkbox"/> Please see Chapter. 2.2.2 | <input type="checkbox"/> Please see Chapter. 2.2.3 |
| test site       | <input type="checkbox"/> 441 EMI SAR                               | <input type="checkbox"/> 487 SAR NSA               | <input checked="" type="checkbox"/> 443 FAR        |
| receiver        | <input type="checkbox"/> 377 ESCS30                                | <input type="checkbox"/> 001 ESS                   | <input type="checkbox"/> 489 ESU 40                |
| spectr. analys. | <input checked="" type="checkbox"/> 747 FSU                        | <input checked="" type="checkbox"/> 714 FSW67      | <input type="checkbox"/> 264 FSEK                  |
| antenna         | <input checked="" type="checkbox"/> 439 HL 562                     | <input checked="" type="checkbox"/> 549 HL 025     | <input checked="" type="checkbox"/> 302 BBHA9170   |
| signaling       | <input type="checkbox"/> 017 CMD 65                                | <input type="checkbox"/> 323 CMD 55                | <input type="checkbox"/> 340 CMD 55                |
| signaling       | <input type="checkbox"/> 392 MT8820A                               | <input checked="" type="checkbox"/> 670 CMU        | <input type="checkbox"/> 547 CMU                   |
| power supply    | <input checked="" type="checkbox"/> 611 E3636A                     | <input type="checkbox"/> 457 EA 3013A              | <input type="checkbox"/> 459 EA 2032-50            |
| otherwise       | <input type="checkbox"/> 529 6dB divider                           | <input type="checkbox"/> 530 6dB Att.              | <input type="checkbox"/> 110 USB LWL               |
| Supply voltage  | <input type="checkbox"/> 230 V 50 Hz via public mains              | <input checked="" type="checkbox"/> 24 V DC        |                                                    |

#### 4.1.2. Requirements and limits (Variante RF-Parameter)

|       |                                                                                                                                                                                                                                                                                                         |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC   | <input checked="" type="checkbox"/> Part 2.1053(a), Part2.1057(a)(1)<br><input checked="" type="checkbox"/> Part 22 Subpart H, §22.917(a)(b)<br><input checked="" type="checkbox"/> Part 24 Subpart E, §24.238(a)(b)                                                                                    |
| ISED  | <input type="checkbox"/> RSS-132, Issue 3: 5.5(i)(ii)<br><input type="checkbox"/> RSS-133, Issue 6: 6.5.1(i)(ii)                                                                                                                                                                                        |
| Limit | <b>§22.917(a) &amp; §24.238(a):</b><br>"The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB"<br><b>Limit:</b> -13dBm for all Power Control Levels of the cellular equipment |

#### 4.1.3. Test condition and test set-up

|                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| link to test system (if used): | <input type="checkbox"/> air link<br><input type="checkbox"/> cable connection<br><input checked="" type="checkbox"/> none                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| EUT-grounding                  | <input checked="" type="checkbox"/> none<br><input type="checkbox"/> with power supply<br><input type="checkbox"/> additional connection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Equipment set up               | <input checked="" type="checkbox"/> table top 1.5m height<br><input type="checkbox"/> floor standing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Climatic conditions            | Temperature: (22±3°C)<br>Rel. humidity: (40±20)%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test system set-up             | Please see chapter "Test system set-up for radiated spurious emission measurements up to 40 GHz"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Measurement method             | According chapter "Test system set-up for electric field measurement in the range 30-1000MHz and 1 to 40GHz" and additionally: the readings on the spectrum analyzer are corrected with annually performed chamber path calibration values so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603.                                                                                                                                                                                                            |
| EUT settings                   | A call was established with settings according chapter "Parameter settings on mobile phone and base station CMU200"<br><br>The UE and used accessories (if any used) were set to work according their intended use/specification stated as by the applicant<br><br>The measurements were made at the carrier frequencies of each of the supported operating band. Choosing TX-carrier frequencies of the wireless device, should be sufficient to demonstrate compliance and with a commercial W-LAN 802.11 compatible Router (AE 03) a communication link via Iperf on certain channel (CH no.7) have been established. |

### Spectrum-Analyzer settings for GSM/GPRS/E-GPRS 850 Mode + WLAN 2.4 GHz

| Sweep no.            | Start freq. MHz | Stop freq. MHz | R-BW MHz | V-BW MHz | Sweep time sec. | Att. [dB] | Detector |
|----------------------|-----------------|----------------|----------|----------|-----------------|-----------|----------|
| Sweep 1 (subrange 1) | 30              | 1000           | 0.1      | 1        | 10              | 10        | MaxH-PK  |
| Sweep 2 (subrange 2) | 1000            | 2800           | 0.1      | 1        | 15              | 5         | MaxH-PK  |
| Sweep 3 (subrange 3) | 2800            | 9000           | 0.1      | 1        | 60              | 5         | MaxH-PK  |
| Sweep 4 (subrange 3) | 9000            | 18000          | 0.1      | 1        | 60              | 5         | MaxH-PK  |
| Sweep 5 (subrange 3) | 18000           | 25000          | 0.1      | 1        | 60              | 5         | MaxH-PK  |

### Spectrum-analyzer settings for GSM/GPRS/E-GPRS 1900 Mode + WLAN 2.4GHz

| Sweep no.            | Start freq. MHz | Stop freq. MHz | R-BW MHz | V-BW MHz | Sweep time sec. | Att. | Detector |
|----------------------|-----------------|----------------|----------|----------|-----------------|------|----------|
| Sweep 1 (subrange 1) | 30              | 1000           | 1        | 10       | 10              | 10   | MaxH-PK  |
| Sweep 2 (subrange 2) | 1000            | 2800           | 1        | 10       | 15              | 0    | MaxH-PK  |
| Sweep 3 (subrange 3) | 2800            | 18000          | 1        | 10       | 160             | 5    | MaxH-PK  |
| Sweep 4 (subrange 3) | 18000           | 25000          | 0.1      | 10       | 60              | 5    | MaxH-PK  |

#### 4.1.4. Measurement results

The results are presented below in summary form only. For more information please see each diagram enclosed in annex 1.

##### 4.1.4.1. Spurious Emissions

| Diagram no. | Carrier Channel        |                    | Frequency range | Set – up no. | OP-mode no. | Remark                                               | Used detector                       |                          |                                     | Result |
|-------------|------------------------|--------------------|-----------------|--------------|-------------|------------------------------------------------------|-------------------------------------|--------------------------|-------------------------------------|--------|
|             | Band                   | No.                |                 |              |             |                                                      | PK                                  | AV                       | QP                                  |        |
| 8.01a       | GSM 850 + WLAN 2.4GHz  | Ch.192 + WLAN Ch-7 | 30 MHz to 9GHz  | 1            | 1           | Carrier visible on diagram. Not relevant for results | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | passed |
| 8.01b       | GSM 850 + WLAN 2.4GHz  | Ch.192 + WLAN Ch-7 | 9GHz to 18GHz   | 1            | 1           | --                                                   | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | passed |
| 8.01c       | GSM 850 + WLAN 2.4GHz  | Ch.192 + WLAN Ch-7 | 18GHz to 25GHz  | 1            | 1           | --                                                   | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | passed |
| 8.02a       | GSM 1900 + WLAN 2.4GHz | Ch.661 + WLAN Ch-7 | 30 MHz to 18GHz | 1            | 2           | Carrier visible on diagram. Not relevant for results | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | passed |
| 8.02b       | GSM 1900 + WLAN 2.4GHz | Ch.661 + WLAN Ch-7 | 18GHz to 25GHz  | 1            | 2           | --                                                   | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>            | passed |

## 4.2. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according to its statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

| RF-Measurement                            | Reference    | Frequency range                     | Calculated uncertainty based on a confidence level of 95% |        |      |      |      |    |                      | Remarks                                   |
|-------------------------------------------|--------------|-------------------------------------|-----------------------------------------------------------|--------|------|------|------|----|----------------------|-------------------------------------------|
| Conducted emissions (U <sub>CISPR</sub> ) | CISPR 16-2-1 | 9 kHz - 150 kHz<br>150 kHz - 30 MHz | 4.0 dB<br>3.6 dB                                          |        |      |      |      |    |                      | -                                         |
| Radiated emissions Enclosure              | CISPR 16-2-3 | 30 MHz - 1 GHz<br>1 GHz - 18 GHz    | 4.2 dB<br>5.1 dB                                          |        |      |      |      |    |                      | E-Field                                   |
| Disturbance power                         | CISPR 16-2-2 | 30 MHz - 300 MHz                    | -                                                         |        |      |      |      |    |                      | -                                         |
|                                           |              |                                     |                                                           |        |      |      |      |    |                      |                                           |
| Power Output radiated                     | -            | 30 MHz - 4 GHz                      | 3.17 dB                                                   |        |      |      |      |    |                      | Substitution method                       |
| Power Output conducted                    | -            | Set-up No.                          | Cel-C1                                                    | Cel-C2 | BT1  | W1   | W2   | -- |                      |                                           |
|                                           |              | 9 kHz - 12.75 GHz                   | N/A                                                       | 0.60   | 0.7  | 0.25 | N/A  | -- | -                    |                                           |
|                                           |              | 12.75 - 26.5GHz                     | N/A                                                       | 0.82   | --   | N/A  | N/A  | -- |                      |                                           |
| Conducted emissions on RF-port            | -            | 9 kHz - 2.8 GHz                     | 0.70                                                      | N/A    | 0.70 | N/A  | 0.69 | -- | N/A - not applicable |                                           |
|                                           |              | 2.8 GHz - 12.75GHz                  | 1.48                                                      | N/A    | 1.51 | N/A  | 1.43 | -- |                      |                                           |
|                                           |              | 12.75 GHz - 18GHz                   | 1.81                                                      | N/A    | 1.83 | N/A  | 1.77 | -- |                      |                                           |
|                                           |              | 18 GHz - 26.5GHz                    | 1.83                                                      | N/A    | 1.85 | N/A  | 1.79 | -- |                      |                                           |
| Occupied bandwidth                        | -            | 9 kHz - 4 GHz                       | 0.1272 ppm (Delta Marker)                                 |        |      |      |      |    |                      | Frequency error                           |
|                                           |              |                                     | 1.0 dB                                                    |        |      |      |      |    |                      | Power                                     |
| Emission bandwidth                        | -            | 9 kHz - 4 GHz                       | 0.1272 ppm (Delta Marker)                                 |        |      |      |      |    |                      | Frequency error                           |
|                                           | -            |                                     | See above: 0.70 dB                                        |        |      |      |      |    |                      | Power                                     |
| Frequency stability                       | -            | 9 kHz - 20 GHz                      | 0.0636 ppm                                                |        |      |      |      |    |                      | -                                         |
| Radiated emissions Enclosure              | -            | 150 kHz - 30 MHz                    | 5.0 dB                                                    |        |      |      |      |    |                      | Magnetic field<br>E-field<br>Substitution |
|                                           |              | 30 MHz - 1 GHz                      | 4.2 dB                                                    |        |      |      |      |    |                      |                                           |
|                                           |              | 1 GHz - 20 GHz                      | 3.17 dB                                                   |        |      |      |      |    |                      |                                           |

**Table: measurement uncertainties, valid for conducted/radiated measurements**

## 5. Abbreviations used in this report

| The abbreviations |                                                                                   |
|-------------------|-----------------------------------------------------------------------------------|
| ANSI              | American National Standards Institute                                             |
| AV , AVG, CAV     | Average detector                                                                  |
| EIRP              | Equivalent isotropically radiated power, determined within a separate measurement |
| EGPRS             | Enhanced General Packet Radio Service                                             |
| EUT               | Equipment Under Test                                                              |
| FCC               | Federal Communications Commission, USA                                            |
| IC                | Industry Canada                                                                   |
| n.a.              | not applicable                                                                    |
| Op-Mode           | Operating mode of the equipment                                                   |
| PK                | Peak                                                                              |
| RBW               | resolution bandwidth                                                              |
| RF                | Radio frequency                                                                   |
| RSS               | Radio Standards Specification, Dokuments from Industry Canada                     |
| Rx                | Receiver                                                                          |
| TCH               | Traffic channel                                                                   |
| Tx                | Transmitter                                                                       |
| QP                | Quasi peak detector                                                               |
| VBW               | Video bandwidth                                                                   |
| ERP               | Effective radiated power                                                          |

## 6. Accreditation details of CETECOM's laboratories and test sites

| Ref.-No.                                                                        | Accreditation Certificate                                | Valid for laboratory area or test site                                                                                                                                                                                                                                      | Accreditation Body                                                                          |
|---------------------------------------------------------------------------------|----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| -                                                                               | D-PL-12047-01-01<br>D-PL-12047-01-03<br>D-PL-12047-01-05 | All laboratories and test sites of CETECOM GmbH, Essen                                                                                                                                                                                                                      | DAkkS, Deutsche Akkreditierungsstelle GmbH                                                  |
| 337<br>487<br>558<br>348<br>348                                                 | 736496                                                   | Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS)<br>Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR)<br>Radiated Measurements above 1 GHz, 3 m (FAR)<br>Mains Ports Conducted Interference Measurements<br>Telecommunication Ports Conducted Interference Measurem. | FCC, Federal Communications Commission<br>Laboratory Division, USA<br>(MRA US-EU 0003)      |
| 337<br>487<br>550<br>558                                                        | 3462D-1<br>3462D-2<br>3462D-2<br>3462D-3                 | Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS)<br>Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR)<br>Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR)<br>Radiated Measurements above 1 GHz, 3 m (FAR)                                                             | ISED, Industry Canada<br>Certification and Engineering Bureau                               |
| 487<br>550<br>348<br>348                                                        | R-2666<br>G-301<br>C-2914<br>T-1967                      | Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR)<br>Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR)<br>Mains Ports Conducted Interference Measurements<br>Telecommunication Ports Conducted Interference Measurem.                                                          | VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan |
| OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room |                                                          |                                                                                                                                                                                                                                                                             |                                                                                             |

## 7. Instruments and Ancillary

### 7.1. Used equipment “CTC”

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

#### 7.1.1. Test software and firmware of equipment

| Ref.-No. | Equipment                               | Type                   | Serial-No.     | Version of Firmware or Software during the test                                                |
|----------|-----------------------------------------|------------------------|----------------|------------------------------------------------------------------------------------------------|
| 012      | Signal Generator (EMS-cond.)            | SMY 01                 | 839069/027     | Firm.= V 2.02                                                                                  |
| 013      | Power Meter (EMS cond.)                 | NRVD                   | 839111/003     | Firm.= V 1.51                                                                                  |
| 017      | Digital Radiocommunication Tester       | CMD 60 M               | 844365/014     | Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99                                             |
| 119      | RT Harmonics Analyzer dig. Flickermeter | B10                    | G60547         | Firm.= V 3.1DHG                                                                                |
| 261      | Thermal Power Sensor                    | NRV-Z55                | 825083/0008    | EPROM-Datum 02.12.04, SE EE 1 B                                                                |
| 262      | Power Meter                             | NRV-S                  | 825770/0010    | Firm.= 2.6                                                                                     |
| 295      | Racal Digital Radio Test Set            | 6103                   | 1572           | UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02      |
| 298      | Univ. Radio Communication Tester        | CMU 200                | 832221/091     | R&S Test Firmware =3.53 /3.54 (current Testsoft. f. all band used                              |
| 323      | Digital Radiocommunication Tester       | CMD 55                 | 825878/0034    | Firm.= 3.52 .22.01.99                                                                          |
| 335      | CTC-EMS-Conducted                       | System EMS Conducted   | -              | EMC 32 V 8.52                                                                                  |
| 340      | Digital Radiocommunication Tester       | CMD 55                 | 849709/037     | Firm.= 3.52 .22.01.99                                                                          |
| 366      | Ultra Compact Simulator                 | UCS 500 M4             | V0531100594    | Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10                                                   |
| 371      | Bluetooth Tester                        | CBT32                  | 100153         | CBT V5.30+ SW-Option K55, K57                                                                  |
| 377      | EMI Test Receiver                       | ESCS 30                | 100160         | Firm.= 2.30, OTP= 02.01, GRA= 02.36                                                            |
| 378      | Broadband RF Field Monitor              | RadiSense III          | 03D00013SNO-08 | Firm.= V.03D13                                                                                 |
| 389      | Digital Multimeter                      | Keithley 2000          | 0583926        | Firm. = A13 (Mainboard) A02 (Display)                                                          |
| 392      | Radio Communication Tester              | MT8820A                | 6K00000788     | Firm.= 4.50 #005, IPL=4.01#001, OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario=         |
| 436      | Univ. Radio Communication Tester        | CMU 200                | 103083         | R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoft. F. all band |
| 441      | CTC-SAR-EMI Cable Loss                  | System EMI field (SAR) | -              | EMC 32 Version 8.52                                                                            |
| 442      | CTC-SAR-EMS                             | System EMS field (SAR) | -              | EMC 32 Version 8.40                                                                            |
| 443      | CTC-FAR-EMI-RSE                         | System CTC-FAR-EMI-RSE | -              | Spuri 7.2.5 or EMC 32 Ver. 9.15.00                                                             |
| 444      | CTC-FAR-EMS field                       | System-EMS-Field (FAR) | -              | EMC 32 Version 9.15.00                                                                         |
| 460      | Univ. Radio Communication Tester        | CMU 200                | 108901         | R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoft.,f. all band to be used,    |
| 489      | EMI Test Receiver                       | ESU40                  | 1000-30        | Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00                                                |
| 491      | ESD Simulator dito                      | ESD dito               | dito307022     | V 2.30                                                                                         |
| 524      | Voltage Drop Simulator                  | VDS 200                | 0196-16        | Software Nr. 000037 Version V4.20a01                                                           |
| 526      | Burst Generator                         | EFT 200 A              | 0496-06        | Software Nr. 000034 Version V2.32                                                              |
| 527      | Micro Pulse Generator                   | MPG 200 B              | 0496-05        | Software-Nr. 000030 Version V2.43                                                              |
| 528      | Load Dump Simulator                     | LD 200B                | 0496-06        | Software-Nr. 000031 Version V2.35a01                                                           |
| 546      | Univ. Radio Communication Tester        | CMU 200                | 106436         | R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoft.,f. all band to be used     |
| 547      | Univ. Radio Communication Tester        | CMU 200                | 835390/014     | R&S Test Firmware Base=V5.1403 (current Testsoft., f. all band used, GSM = 5.14 WCDMA: = 5.14  |
| 584      | Spectrum Analyzer                       | FSU 8                  | 100248         | 2.82 SP3                                                                                       |
| 597      | Univ. Radio Communication Tester        | CMU 200                | 100347         | R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= μP1=V.850               |
| 607      | Signal Generator                        | SMR 20                 | 832033/011     | V1.25                                                                                          |
| 620      | EMI Test Receiver                       | ESU 26                 | 100362         | 4.43 SP3                                                                                       |
| 642      | Wideband Radio Communication Tester     | CMW 500                | 126089         | Setup V03.26, Test programm component V03.02.20                                                |
| 670      | Univ. Radio Communication Tester        | CMU 200                | 106833         | μP1 =V8.50, Firmware = V.20                                                                    |
| 689      | Vector Signal Generator                 | SMU200                 | 100970         | 02.20.360.142                                                                                  |
| 692      | Bluetooth Tester                        | CBT 32                 | 100236         | CBT V 5.40, FW: V.2.41 (FPGA Digital, V. 3.09 FPGA RF)                                         |
| 699      | Audio Analyzer                          | UPL16                  | 833494/005     | 3.06                                                                                           |

## 7.1.2. Single instruments and test systems

| Ref.-No. | Equipment                               | Type                      | Serial-No.             | Manufacturer                    | Interval of calibration | Remark | Cal due    |
|----------|-----------------------------------------|---------------------------|------------------------|---------------------------------|-------------------------|--------|------------|
| 005      | AC - LISN (50 Ohm/50µH, test site 1)    | ESH2-Z5                   | 861741/005             | Rohde & Schwarz                 | 12 M                    | -      | 23.05.2020 |
| 007      | Single-Line V-Network (50 Ohm/5µH)      | ESH3-Z6                   | 892563/002             | Rohde & Schwarz                 | 12 M                    | -      | 23.05.2020 |
| 009      | Power Meter (EMS-radiated)              | NRV                       | 863056/017             | Rohde & Schwarz                 | 24 M                    | -      | 23.05.2021 |
| 016      | Line Impedance Simulating Network       | Op. 24-D                  | B6366                  | Spitzenberger+Spies             | 36 M                    | -      | 22.05.2022 |
| 020      | Horn Antenna 18 GHz (Subst 1)           | 3115                      | 9107-3699              | EMCO                            | 36/12 M                 | -      | 31.07.2021 |
| 021      | Loop Antenna (H-Field)                  | 6502                      | 9206-2770              | EMCO                            | 36 M                    | -      | 30.05.2021 |
| 030      | Loop Antenna (H-field)                  | HFH-Z2                    | 879604/026             | Rohde & Schwarz                 | 36 M                    | -      | 30.04.2020 |
| 033      | RF-current probe (100kHz-30MHz)         | ESH2-Z1                   | 879581/18              | Rohde & Schwarz                 | 24 M                    | -      | 23.05.2021 |
| 057      | relay-switch-unit (EMS system)          | RSU                       | 494440/002             | Rohde & Schwarz                 | pre-m                   | 1a     |            |
| 060      | power amplifier (DC-2kHz)               | PAS 5000                  | B6363                  | Spitzenberger+Spies             | -                       | 3      |            |
| 066      | notch filter (WCDMA; FDD1)              | WRCT 1900/2200-5/40-10EEK | 5                      | Wainwright GmbH                 | 12 M                    | 1g     | 16.11.2019 |
| 086      | DC - power supply, 0 -10 A              | LNG 50-10                 | -                      | Heinzinger Electronic           | pre-m                   | 2      |            |
| 087      | DC - power supply, 0 -5 A               | EA-3013 S                 | -                      | Elektro Automatik               | pre-m                   | 2      |            |
| 091      | USB-LWL-Converter                       | OLS-1                     | 007/2006               | Ing. Büro Scheiba               | -                       | 4      |            |
| 099      | passive voltage probe                   | ESH2-Z3                   | 299.7810.52            | Rohde & Schwarz                 | 36 M                    | -      | 30.05.2021 |
| 100      | passive voltage probe                   | Probe TK 9416             | without                | Schwarzbeck                     | 36 M                    | -      | 30.05.2021 |
| 110      | USB-LWL-Converter                       | OLS-1                     | -                      | Ing. Büro Scheiba               | -                       | 4      |            |
| 119      | RT Harmonics Analyzer dig. Flickermeter | B10                       | G60547                 | BOCONSULT                       | 36 M                    | -      | 22.05.2022 |
| 133      | horn antenna 18 GHz (Meas 1)            | 3115                      | 9012-3629              | EMCO                            | 36 M                    | 1c     | 10.03.2020 |
| 134      | horn antenna 18 GHz (Subst 2)           | 3115                      | 9005-3414              | EMCO                            | 36 M                    | -      | 10.03.2020 |
| 136      | adjustable dipole antenna (Dipole 1)    | 3121C-DB4                 | 9105-0697              | EMCO                            | 36 M                    | -      | 30.04.2020 |
| 248      | attenuator                              | SMA 6dB 2W                | -                      | Radiall                         | pre-m                   | 2      |            |
| 249      | attenuator                              | SMA 10dB 10W              | -                      | Radiall                         | pre-m                   | 2      |            |
| 252      | attenuator                              | N 6dB 12W                 | -                      | Radiall                         | pre-m                   | 2      |            |
| 256      | attenuator                              | SMA 3dB 2W                | -                      | Radiall                         | pre-m                   | 2      |            |
| 257      | hybrid                                  | 4031C                     | 04491                  | Narda                           | pre-m                   | 2      |            |
| 260      | hybrid coupler                          | 4032C                     | 11342                  | Narda                           | pre-m                   | 2      |            |
| 261      | Thermal Power Sensor                    | NRV-Z55                   | 825083/0008            | Rohde & Schwarz                 | 24 M                    | -      | 30.05.2020 |
| 262      | Power Meter                             | NRV-S                     | 825770/0010            | Rohde & Schwarz                 | 24 M                    | -      | 30.05.2020 |
| 265      | peak power sensor                       | NRV-Z33, Model 04         | 840414/009             | Rohde & Schwarz                 | 24 M                    | -      | 30.05.2020 |
| 266      | Peak Power Sensor                       | NRV-Z31, Model 04         | 843383/016             | Rohde & Schwarz                 | 24 M                    | -      | 30.05.2020 |
| 267      | notch filter GSM 850                    | WRCA 800/960-6EEK         | 9                      | Wainwright GmbH                 | pre-m                   | 2      |            |
| 270      | termination                             | 1418 N                    | BB6935                 | Weinschel                       | pre-m                   | 2      |            |
| 271      | termination                             | 1418 N                    | BE6384                 | Weinschel                       | pre-m                   | 2      |            |
| 272      | attenuator (20 dB) 50 W                 | Model 47                  | BF6239                 | Weinschel                       | pre-m                   | 2      |            |
| 273      | attenuator (10 dB) 100 W                | Model 48                  | BF9229                 | Weinschel                       | pre-m                   | 2      |            |
| 274      | attenuator (10 dB) 50 W                 | Model 47 (10 dB) 50 W     | BG0321                 | Weinschel                       | pre-m                   | 2      |            |
| 275      | DC-Block                                | Model 7003 (N)            | C5129                  | Weinschel                       | pre-m                   | 2      |            |
| 276      | DC-Block                                | Model 7006 (SMA)          | C7061                  | Weinschel                       | pre-m                   | 2      |            |
| 279      | power divider                           | 1515 (SMA)                | LH855                  | Weinschel                       | pre-m                   | 2      |            |
| 287      | pre-amplifier 25MHz - 4GHz              | AMF-2D-100M4G-35-10P      | 379418                 | Miteq                           | 12 M                    | 1c     | 16.11.2019 |
| 291      | high pass filter GSM 850/900            | WHJ 2200-4EE              | 14                     | Wainwright GmbH                 | 12 M                    | 1c     | 16.11.2019 |
| 298      | Univ. Radio Communication Tester        | CMU 200                   | 832221/091             | Rohde & Schwarz                 | pre-m                   | 3      |            |
| 300      | AC LISN (50 Ohm/50µH, 1-phase)          | ESH3-Z5                   | 892 239/020            | Rohde & Schwarz                 | 12 M                    | -      | 22.05.2020 |
| 301      | attenuator (20 dB) 50W, 18GHz           | 47-20-33                  | AW0272                 | Lucas Weinschel                 | pre-m                   | 2      |            |
| 302      | horn antenna 40 GHz (Meas 1)            | BBHA9170                  | 155                    | Schwarzbeck                     | 36 M                    | -      | 14.03.2020 |
| 303      | horn antenna 40 GHz (Subst 1)           | BBHA9170                  | 156                    | Schwarzbeck                     | 36 M                    | -      | 20.03.2020 |
| 331      | Climatic Test Chamber -40/+180 Grad     | HC 4055                   | 43146                  | Heraeus Vötsch                  | 24 M                    | -      | 10.01.2021 |
| 341      | Digital Multimeter                      | Fluke 112                 | 81650455               | Fluke                           | 24 M                    | -      | 30.05.2020 |
| 342      | Digital Multimeter                      | Voltcraft M-4660A         | IB 255466              | Voltcraft                       | 24 M                    | -      | 23.05.2021 |
| 347      | laboratory site                         | radio lab.                | -                      | -                               | -                       | 5      |            |
| 348      | laboratory site                         | EMI conducted             | -                      | -                               | -                       | 5      |            |
| 354      | DC - Power Supply 40A                   | NGPE 40/40                | 448                    | Rohde & Schwarz                 | pre-m                   | 2      |            |
| 357      | power sensor                            | NRV-Z1                    | 861761/002             | Rohde & Schwarz                 | 24 M                    | -      | 21.05.2021 |
| 371      | Bluetooth Tester                        | CBT32                     | 100153                 | R&S                             | 36 M                    | -      | 30.05.2020 |
| 373      | Single-Line V-Network (50 Ohm/5µH)      | ESH3-Z6                   | 100535                 | Rohde & Schwarz                 | 12 M                    | -      | 22.05.2020 |
| 377      | EMI Test Receiver                       | ESCS 30                   | 100160                 | Rohde & Schwarz                 | 12 M                    | -      | 22.05.2020 |
| 389      | Digital Multimeter                      | Keithley 2000             | 0583926                | Keithley                        | pre-m                   | -      |            |
| 392      | Radio Communication Tester              | MT8820A                   | 6K00000788             | Anritsu                         | 12 M                    | -      | 01.07.2020 |
| 396      | Thermo/Hygrometer                       | Thermo/Hygrometer         | -                      | Conrad                          | 24 M                    | -      | 09.01.2021 |
| 405      | Thermo/Hygrometer                       | OPUS 10 THI               | 126.0604.0003.3.3.3.22 | LUFFT Mess u. Regeltechnik GmbH | 24 M                    | -      | 30.03.2020 |
| 431      | Model 7405                              | Near-Field Probe Set      | 9305-2457              | EMCO                            | -                       | 4      |            |
| 436      | Univ. Radio Communication Tester        | CMU 200                   | 103083                 | Rohde & Schwarz                 | 12 M                    | -      | 25.05.2020 |
| 439      | UltraLog-Antenna                        | HL 562                    | 100248                 | Rohde & Schwarz                 | 36 M                    | -      | 10.03.2020 |

| Ref.-No. | Equipment                               | Type                          | Serial-No.   | Manufacturer                | Interval of calibration | Remark | Cal due    |
|----------|-----------------------------------------|-------------------------------|--------------|-----------------------------|-------------------------|--------|------------|
| 441      | CTC-SAR-EMI Cable Loss                  | System EMI field (SAR) Cable  | -            | CETECOM                     | 12 M                    | 5      | 05.06.2020 |
| 443      | CTC-FAR-EMI-RSE                         | System CTC-FAR-EMI-RSE        | -            | ETS-Lindgren / CETECOM      | 12 M                    | 5      | 16.11.2019 |
| 448      | notch filter WCDMA_FDD II               | WRCT 1850.0/2170.0-5/40-10SSK | 5            | Wainwright Instruments GmbH | 12 M                    | 1c     | 16.11.2019 |
| 449      | notch filter WCDMA FDD V                | WRCT 824.0/894.0-5/40-8SSK    | 1            | Wainwright                  | 12 M                    | 1c     | 16.11.2019 |
| 454      | Oscilloscope                            | HM 205-3                      | 9210 P 29661 | Hameg                       | -                       | 4      |            |
| 456      | DC-Power supply 0-5 A                   | EA 3013 S                     | 207810       | Elektro Automatik           | pre-m                   | 2      |            |
| 459      | DC -Power supply 0-5 A , 0-32 V         | EA-PS 2032-50                 | 910722       | Elektro Automatik           | pre-m                   | 2      |            |
| 460      | Univ. Radio Communication Tester        | CMU 200                       | 108901       | Rohde & Schwarz             | 12 M                    | -      | 30.05.2020 |
| 463      | Universal source                        | HP3245A                       | 2831A03472   | Agilent                     | -                       | 4      |            |
| 466      | Digital Multimeter                      | Fluke 112                     | 89210157     | Fluke USA                   | 24 M                    | -      | 30.05.2020 |
| 467      | Digital Multimeter                      | Fluke 112                     | 89680306     | Fluke USA                   | 36 M                    | -      | 30.05.2021 |
| 468      | Digital Multimeter                      | Fluke 112                     | 90090455     | Fluke USA                   | 36 M                    | -      | 30.04.2021 |
| 477      | ReRadiating GPS-System                  | AS-47                         | -            | Automotive Cons. Fink       | -                       | 3      |            |
| 480      | power meter (Fula)                      | NRVS                          | 838392/031   | Rohde & Schwarz             | 24 M                    | -      | 30.05.2021 |
| 482      | filter matrix                           | Filter matrix SAR 1           | -            | CETECOM (Brl)               | -                       | 1d     |            |
| 484      | pre-amplifier 2,5 - 18 GHz              | AMF-5D-02501800-25-10P        | 1244554      | Miteq                       | 12 M                    | -      | 16.11.2019 |
| 487      | System CTC NSA-Verification SAR-EMI     | System EMI field (SAR) NSA    | -            | ETS Lindgren / CETECOM      | 24 M                    | -      | 16.04.2021 |
| 489      | EMI Test Receiver                       | ESU40                         | 1000-30      | Rohde & Schwarz             | 12 M                    | -      | 30.06.2020 |
| 502      | band reject filter                      | WRCG 1709/1786-1699/1796-     | SN 9         | Wainwright                  | pre-m                   | 2      |            |
| 503      | band reject filter                      | WRCG 824/849-814/859-60/10SS  | SN 5         | Wainwright                  | pre-m                   | 2      |            |
| 512      | notch filter GSM 850                    | WRCA 800/960-02/40-6EEK       | SN 24        | Wainwright                  | 12 M                    | 1c     | 16.11.2019 |
| 517      | relais switch matrix                    | HF Relais Box Keithley System | SE 04        | Keithley                    | pre-m                   | 2      |            |
| 523      | Digital Multimeter                      | L4411A                        | MY46000154   | Agilent                     | 24 M                    | -      | 23.05.2021 |
| 529      | 6 dB Broadband resistive power divider  | Model 1515                    | LH 855       | Weinschel                   | pre-m                   | 2      |            |
| 530      | 10 dB Broadband resistive power divider | R 416110000                   | LOT 9828     | -                           | pre-m                   | 2      |            |
| 546      | Univ. Radio Communication Tester        | CMU 200                       | 106436       | R&S                         | 12 M                    | -      | 30.07.2020 |
| 547      | Univ. Radio Communication Tester        | CMU 200                       | 835390/014   | Rohde & Schwarz             | 12 M                    | -      | 30.07.2020 |
| 549      | Log.Per-Antenna                         | HL025                         | 1000060      | Rohde & Schwarz             | 36/12 M                 | -      | 31.07.2021 |
| 550      | System CTC S-VSWR Verification SAR-EMI  | System EMI Field SAR S-VSWR   | -            | ETS Lindgren/CETECOM        | 24 M                    | -      | 30.08.2020 |
| 552      | high pass filter 2,8-18GHz              | WHKX 2.8/18G-10SS             | 4            | Wainwright                  | 12 M                    | 1c     | 16.11.2019 |
| 557      | System CTC-OTA-2                        | R&S TS8991                    | -            | Rohde & Schwarz             | 12 M                    | 5      | 24.01.2020 |
| 558      | System CTC FAR S-VSWR                   | System CTC FAR S-VSWR         | -            | CTC                         | 24 M                    | -      | 08.08.2020 |
| 574      | Biconilog Hybrid Antenna                | BTA-L                         | 980026L      | Frankonia                   | 36/12 M                 | -      | 03.05.2022 |
| 584      | Spectrum Analyzer                       | FSU 8                         | 100248       | Rohde & Schwarz             | pre-m                   | -      |            |
| 594      | Wideband Radio Communication Tester     | CMW 500                       | 101757       | Rohde & Schwarz             | 12 M                    | -      | 26.06.2020 |
| 597      | Univ. Radio Communication Tester        | CMU 200                       | 100347       | Rohde & Schwarz             | pre-m                   | -      |            |
| 600      | power meter                             | NRVD (Reserve)                | 834501/018   | Rohde & Schwarz             | 24 M                    | -      | 30.05.2021 |
| 602      | peak power sensor                       | NRV-Z32 (Reserve)             | 835080       | Rohde & Schwarz             | 24 M                    | -      |            |
| 611      | DC power supply                         | E3632A                        | KR 75305854  | Agilent                     | pre-m                   | 2      |            |
| 612      | DC power supply                         | E3632A                        | MY 40001321  | Agilent                     | pre-m                   | 2      |            |
| 613      | Attenuator                              | R416120000 20dB 10W           | Lot. 9828    | Radiall                     | pre-m                   | 2      |            |
| 616      | Digitalmultimeter                       | Fluke 177                     | 88900339     | Fluke                       | 24 M                    | -      | 30.05.2020 |
| 617      | Power Splitter/Combiner                 | ZFSC-2-2-S+                   | S F987001108 | Mini Circuits               | -                       | 2      |            |
| 618      | Power Splitter/Combiner                 | 50PD-634                      | 600994       | JFW Industries USA          | -                       | 2      |            |
| 619      | Power Splitter/Combiner                 | 50PD-634                      | 600995       | JFW Industries, USA         | -                       | 3      |            |
| 620      | EMI Test Receiver                       | ESU 26                        | 100362       | Rohde-Schwarz               | 12 M                    | -      | 30.05.2020 |
| 621      | Step Attenuator 0-139 dB                | RSP                           | 100017       | Rohde & Schwarz             | pre-m                   | 2      |            |
| 625      | Generic Test Load USB                   | Generic Test Load USB         | -            | CETECOM                     | -                       | 2      |            |
| 634      | Spectrum Analyzer                       | FSM (HF-Unit)                 | 826188/010   | Rohde & Schwarz             | pre-m                   | 2      |            |
| 637      | High Speed HDMI with Ethernet 1m        | HDMI cable with Ethernet 1m   | -            | KogiLink                    | -                       | 2      |            |
| 638      | HDMI Kabel with Ethernet 1,5 m flach    | HDMI cable with Ethernet 1,5m | -            | Reichelt                    | -                       | 2      |            |
| 640      | HDMI cable 2m rund                      | HDMI cable 2m rund            | -            | Reichelt                    | -                       | 2      |            |
| 641      | HDMI cable with Ethernet                | Certified HDMI cable with     | -            | PureLink                    | -                       | 2      |            |
| 644      | Amplifierer                             | ZX60-2534M+                   | SN865701299  | Mini-Circuits               | -                       | -      |            |
| 670      | Univ. Radio Communication Tester        | CMU 200                       | 106833       | Rohde & Schwarz             | 24 M                    | -      | 30.05.2020 |
| 671      | DC-power supply 0-5 A                   | EA-3013S                      | -            | Elektro Automatik           | pre-m                   | 2      |            |

| Ref.-No. | Equipment                         | Type                           | Serial-No.             | Manufacturer                   | Interval of calibration | Remark | Cal due    |
|----------|-----------------------------------|--------------------------------|------------------------|--------------------------------|-------------------------|--------|------------|
| 678      | Power Meter                       | NRP                            | 101638                 | Rohde&Schwarz                  | pre-m                   | -      |            |
| 683      | Spectrum Analyzer                 | FSU 26                         | 200571                 | Rohde & Schwarz                | 12 M                    | -      | 30.05.2020 |
| 686      | Field Analyzer                    | EHP-200A                       | 160WX30702             | Narda Safety Test Solutions    | 24 M                    | -      | 29.09.2020 |
| 687      | Signal Generator                  | SMF 100A                       | 102073                 | Rohde&Schwarz                  | 12 M                    | -      | 30.05.2020 |
| 688      | Pre Amp                           | JS-18004000-40-8P              | 1750117                | Miteq                          | pre-m                   | -      |            |
| 690      | Spectrum Analyzer                 | FSU                            | 100302/026             | Rohde&Schwarz                  | 24 M                    | -      | 30.05.2021 |
| 691      | OSP120 Base Unit                  | OSP120                         | 106833                 | Rohde & Schwarz                | 12 M                    | -      | 30.05.2020 |
| 692      | Bluetooth Tester                  | CBT 32                         | 100236                 | Rohde & Schwarz                | 36 M                    | -      | 29.05.2020 |
| 693      | TS8997                            | CTC-Radio Lab 1 TS8997         | -                      | Rohde&Schwarz                  | 12 M                    | 5      | 07.01.2020 |
| 697      | Power Splitter                    | ZN4PD-642W-S+                  | 165001445              | Mini-Circuits                  | -                       | 2      |            |
| 701      | CMW500 wide. Radio Comm.          | CMW500                         | 158150                 | Rohde & Schwarz                | 24 M                    | -      | 30.07.2020 |
| 703      | INNCO Antennen Mast               | MA 4010-KT080-XPET-ZSS3        | MA4170-KT100-XPET-ZSS3 | INNCO                          | pre-m                   | -      |            |
| 704      | INNCON Controller                 | CO 3000-4port                  | CO3000/933/384105 16/L | INNCO Systems GmBh             | pre-m                   | -      |            |
| 711      | Harmonic Mixer 90 GHz - 140GHz    | RPG FS-Z140                    | 101004                 | RPG                            | 36 M                    | -      | 22.02.2020 |
| 712      | Harmonic Mixer 75 GHz - 110GHz    | FS-Z110                        | 101468                 | Rohde & Schwarz                | 36 M                    | -      | 22.02.2020 |
| 713      | Harmonic Mixer, 50 GHz - 75GHz    | FS-Z75                         | 101022                 | Rohde & Schwarz                | 24 M                    | -      | 05.07.2021 |
| 714      | Signal Analyzer 67GHz             | FSW67                          | 104023                 | Rohde & Schwarz                | 24 M                    | -      | 04.07.2021 |
| 715      | Harmonic Mixer, 140 GHz - 220GHz  | FS-Z220                        | 101009                 | RPG Radiometer Physics         | 36 M                    | -      | 03.08.2020 |
| 716      | Harmonic Mixer 220 GHz to 325 GHz | FS-Z325                        | 101005                 | RPG Radiometer Physics         | 36 M                    | -      | 13.02.2020 |
| 747      | Spectrum Analyzer                 | FSU 26                         | 200152                 | Rohde & Schwarz                | 12 M                    | -      | 30.05.2020 |
| 748      | Pickett-Potter Horn Antenna       | FH-PP 4060                     | 010001                 | Radiometer Physics             | 36 M                    | -      |            |
| 750      | Pickett-Potter Horn Antenna       | FH-PP 220                      | 010011                 | Radiometer Physics             | 36 M                    | -      |            |
| 751      | Digital Optical System            | optoCAN-FD Transceiver         | 17-010416              | mk-messtechnik GmbH            | -                       | -      |            |
| 752      | Digital Optical System            | optoCAN-FD Transceiver         | 17-010083              | mk-messtechnik GmbH            | -                       | -      |            |
| 753      | Digital Optical System            | optoCAN-FD Transceiver         | 17-010084              | mk-messtechnik GmbH            | -                       | -      |            |
| 754      | Digital Optical System            | optoCAN-FD Transceiver         | 17-010415              | mk-messtechnik GmbH            | -                       | -      |            |
| 755      | Digital Optical System            | optoLAN-100-MAX Transceiver    | 17-010795              | mk-messtechnik GmbH            | -                       | -      |            |
| 757      | WIDEBAND RADIO COMMUNICATION      | CMW500                         | 163673                 | Rohde&Schwarz                  | 12 M                    | -      | 30.05.2020 |
| 758      | Signal Generator                  | SMU 200A                       | 100754                 | Rohde & Schwarz                | 24 M                    | -      | 11.10.2019 |
| 781      | Power Supply                      | PS 2042-10 B                   | 2815450369             | Elektro-Automatik GmbH & Co.KG | -                       | -      |            |
| 782      | Power Supply                      | PS 2042-10 B                   | 2815450348             | Elektro-Automatik GmbH & Co.KG | -                       | -      |            |
| 783      | Spectrum Analyzer                 | FSU 26                         | 100414                 | Rohde & Schwarz                | 12 M                    | -      | 30.05.2020 |
| 784      | Power Supply                      | NGSM 32/10                     | 00196                  | Rohde & Schwarz                | 12 M                    | -      |            |
| 785      | RSP                               | RF Step Attenuator 0...139.9dB | 860712/012             | Rohde & Schwarz                | 12 M                    | -      |            |
| 786      | SAR Probe                         | ES3DV3                         | 3340                   | Speag                          | 36 M                    | -      | 14.02.2021 |
| 787      | OSP                               | OSP B157WX                     | 101264                 | Rohde & Schwarz                | 24 M                    | -      | 30.05.2020 |
| 788      | Precision Omnidirectional Dipole  | POD 618                        | 6182558/Q              | Seibersdorf Laboratories       | 36 M                    | -      | 30.06.2021 |
| 789      | Precision Omnidirectional Dipole  | POD 16                         | 162496/Q               | Seibersdorf Laboratories       | 36 M                    | -      | 30.06.2021 |
| 790      | Horn Antenna                      | ASY-SGH-124-SMA                | 29F14182337            | Antenna System Solutions       | 36 M                    | -      | 08.10.2021 |
| 791      | Pickett-Potter Horn Antenna       | FH-PP-325                      | 10024                  | Radiometer Physics             | 36 M                    | -      |            |
| 792      | Pickett-Potter Horn Antenna       | FH-PP 075                      | 10006                  | Radiometer Physics             | 36 M                    | -      |            |
| 793      | Pickett-Potter Horn Antenna       | FH-PP 140                      | 10008                  | Radiometer Physics             | 36 M                    | -      |            |
| 794      | Pickett-Potter Horn Antenna       | FH-PP 110                      | 10014                  | Radiometer Physics             | 36 M                    | -      |            |
| 795      | SGH Antenna                       | SGH-26-WR10                    | 1144                   | Antenal S.L.                   | 36 M                    | -      |            |
| 798      | WR-22 Rectangular Gain Horn       | SAR-2309-22-S2                 | 13254-01               | SAGE Millimeter, Inc.          | 36 M                    | -      |            |
| 799      | Transceiver                       | optoLAN-Gb                     | 18-014746              | mk messtechnik                 | pre-m                   | -      |            |
| 801      | Spectrum Analyzer                 | FSP 13                         | 100960                 | Rohde & Schwarz                | 24 M                    | -      | 14.01.2021 |
| 802      | Exposure Level Tester             | ELT-400                        | O-0026                 | NARDA Safety Solutions         | 24 M                    | -      | 30.01.2021 |
| 803      | Probe                             | ELT probe 3cm²                 | O-0026                 | Narda Safety Test Solution     | 24 M                    | -      | 30.01.2021 |
| 805      | Thermo-Hygrometer                 | Web-Thermo-Hygrometer          | 02749814               | W&T                            | 24 M                    | -      |            |
| 806      | AC2600 Smart Wifi Router          | Netgear Nighthawk x4S          | 5K5188590067B          | Netgear                        | -                       | -      |            |
| 807      | Direct Coupler                    | Direct Coupler C-05020-10      | 511                    | ET Industries                  | -                       | -      |            |
| 808      | Diode Power Sensor                | NRV-Z1                         | 829894/001             | Rohde & Schwarz                | 24 M                    | -      | 24.05.2021 |
| 809      | Standard gain Horn Antenna        | WR-159 Horn Antenna            | -                      | Pasternack Enterprises Inc.    | -                       | -      |            |

**7.1.3. Legend**

| Note / remarks |     | Calibrated during system calibration:                                                     |
|----------------|-----|-------------------------------------------------------------------------------------------|
|                | 1a  | System CTC-SAR-EMS (Ref.-No. 442)                                                         |
|                | 1b  | System-CTC-EMS-Conducted (Ref.-No. 335)                                                   |
|                | 1c  | System CTC-FAR-EMI-RSE (Ref.-No . 443)                                                    |
|                | 1d  | System CTC-SAR-EMI (Ref.-No . 441)                                                        |
|                | 1e  | System CTC-OATS (EMI radiated) (Ref.-No. 337)                                             |
|                | 1 f | System CTC-CTIA-OTA (Ref.-No . 420)                                                       |
|                | 1 g | System CTC-FAR-EMS (Ref.-No . 444)                                                        |
|                | 2   | Calibration or equipment check immediately before measurement                             |
|                | 3   | Regulatory maintained equipment for functional check or support purpose                   |
|                | 4   | Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment |
|                | 5   | Test System                                                                               |

|                         |         |                                                                               |
|-------------------------|---------|-------------------------------------------------------------------------------|
| Interval of calibration | 12 M    | 12 month                                                                      |
|                         | 24 M    | 24 month                                                                      |
|                         | 36 M    | 36 month                                                                      |
|                         | 24/12 M | Calibration every 24 months, between this every 12 months internal validation |
|                         | 36/12 M | Calibration every 36 months, between this every 12 months internal validation |
|                         | Pre-m   | Check before starting the measurement                                         |
|                         | -       | Without calibration                                                           |

**8. Versions of test reports (change history)**

| Version | Applied changes | Date of release |
|---------|-----------------|-----------------|
| --      | Initial release | 2019-10-02      |

# END OF TEST REPORT