

TEST REPORT

Reference No..... : WTX23X09198384W001
FCC ID : WF5-ST10
Applicant : Aroot Co., Ltd.
Address : 28-6, Gajangsaneopdong-ro, Osan-si, Gyeonggi-do, Republic of Korea
Manufacturer : Guangzhou Shangke Information Technology Co., LTD.
Address : Room 1205-1212, R&F To-Win Building, No.30 Huaxia Road, Tianhe District, Guangzhou, Guangdong Province, China
Product Name : Tablet PC
Model No..... : ST10
Standards : FCC Part 15.407
Date of Receipt sample : 2023-09-08
Date of Test..... : 2023-09-08 to 2023-09-22
Date of Issue : 2023-09-22
Test Report Form No. : WTX_Part 15_407W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:


Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:



Mike Shi



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING.....	6
1.5 EUT OPERATING DURING TEST.....	8
1.6 TEST FACILITY	8
1.7 EUT SETUP AND TEST MODE	9
1.8 MEASUREMENT UNCERTAINTY	11
1.9 TEST EQUIPMENT LIST AND DETAILS	12
2. SUMMARY OF TEST RESULTS.....	15
3. ANTENNA REQUIREMENT.....	16
3.1 STANDARD APPLICABLE	16
3.2 EVALUATION INFORMATION	16
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	17
4.1 STANDARD APPLICABLE	17
4.2 SUMMARY OF TEST RESULTS.....	17
5. POWER SPECTRAL DENSITY	18
5.1 STANDARD APPLICABLE	18
5.2 TEST PROCEDURE	18
5.3 SUMMARY OF TEST RESULTS/PLOTS.....	19
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	20
6.1 STANDARD APPLICABLE	20
6.2 TEST PROCEDURE	20
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	22
7. MAXIMUM CONDUCTED OUTPUT POWER	23
7.1 STANDARD APPLICABLE	23
7.2 TEST PROCEDURE	23
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	24
8. RADIATED SPURIOUS EMISSIONS	25
8.1 STANDARD APPLICABLE	25
8.2 TEST PROCEDURE	25
8.3 TEST RECEIVER SETUP	27
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	27
8.5 SUMMARY OF TEST RESULTS/PLOTS.....	27
9. FREQUENCY STABILITY	53
9.1 STANDARD APPLICABLE	53
9.2 TEST PROCEDURE	53
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	53
10. CONDUCTED EMISSIONS	54
10.1 TEST PROCEDURE.....	54
10.2 BASIC TEST SETUP BLOCK DIAGRAM	54
10.3 TEST RECEIVER SETUP	54
10.4 SUMMARY OF TEST RESULTS/PLOTS	54
APPENDIX SUMMARY	57
APPENDIX A.....	58
APPENDIX B.....	81
APPENDIX C.....	125
APPENDIX D.....	148

APPENDIX PHOTOGRAPHS.....150

Report version

Version No.	Date of issue	Description
Rev.00	2023-09-22	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Tablet PC
Trade Name:	/
Model No.:	ST10
Adding Model(s):	P30S, SPAD-10, ST30, SPAD-30, BPR-30
Rated Voltage:	3.8V
Battery Capacity:	6000mAh
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model ST10, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20), 802.11n-HT40, 802.11ac-VHT20, 802.11ac-VHT40,802.11ac-VHT80
Frequency Range:	5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
RF Output Power:	13.78dBm (Conducted)
Type of Modulation:	QPSK,16QAM,64QAM, 256QAM
Type of Antenna:	FPC Antenna
Antenna Gain:	2.49dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter !^3646633^! into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default
802.11n-HT20	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default
802.11ac-VH20	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	
802.11ac-VH40	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	Default	

Mode	NCB: 80MHz					
	5210	5290	5530	5610	5690	5775
802.11ac-VH80	Default	Default	Default	Default	Default	Default

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz, 5320MHz,5500MHz,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz, 5320MHz,5500MHz,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11ac-VH20	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz, 5320MHz,5500MHz,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM4	802.11n-HT40	5190MHz,5230MHz,5270MHz,5310MHz,5510MHz, 5590MHz,5670MHz,5755MHz,5795MHz
TM5	802.11ac-VH40	5190MHz,5230MHz,5270MHz,5310MHz,5510MHz, 5590MHz,5670MHz,5755MHz,5795MHz
TM6	802.11ac-VH80	5210MHz,5290MHz,5530MHz,5610MHz,5775MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Computer	Lenovo	L13 Yoga	/
Adapter	/	ASUC71w-050912300	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2023-02-25	2024-02-24
WTXE1022A 1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2023-02-25	2024-02-24
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2023-02-25	2024-02-24
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2023-02-25	2024-02-24
WTXE1044A 1001	Signal Generator	Agilent	83752A	3610A014 53	2023-02-25	2024-02-24
WTXE1045A 1001	Vector Signal Generator	Agilent	N5182A	MY470702 02	2023-02-25	2024-02-24
WTXE1018A 1001	Power Divider	Weinschel	1506A	PM204	2023-02-25	2024-02-24
WTXE1045A 1001	Power Divider	RF-Lambda	RFLT4W5M18G	14110400 027	2023-02-25	2024-02-24
☐ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2023-02-25	2024-02-24
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-20	2026-03-19
☐ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	14918	2023-02-25	2024-02-24
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2021-03-19	2024-03-18
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18

WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2024-04-08
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A101 79	2023-02-25	2024-02-24
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2023-02-25	2024-02-24
☒ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2023-02-25	2024-02-24
☒ Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1103A 1005	Horn Antenna	POAM	RTF-11A	LP228060 221	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2023-02-25	2024-02-24
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24
☒ Conducted Room 1#						
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2023-02-25	2024-02-24
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-02-25	2024-02-24
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-224	2023-02-25	2024-02-24
☐ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2023-02-25	2024-02-24
WTXE1003A	LISN	Rohde &	ENV 216	100097	2023-02-25	2024-02-24

Reference No.: WTX23X09198384W001

1003		Schwarz				
------	--	---------	--	--	--	--

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has an FPC Antenna, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500kHz, "provided that the measured power is integrated over the full

reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If measurements are performed using a reduced resolution bandwidth ($< 1\text{MHz}$, or $< 500\text{kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $\text{VBW} \geq 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500\text{kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1\text{MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $\text{RBW}=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.

- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 \times$ RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

Reference No.: WTX23X09198384W001

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or 11dBm + 10 log B, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that

narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

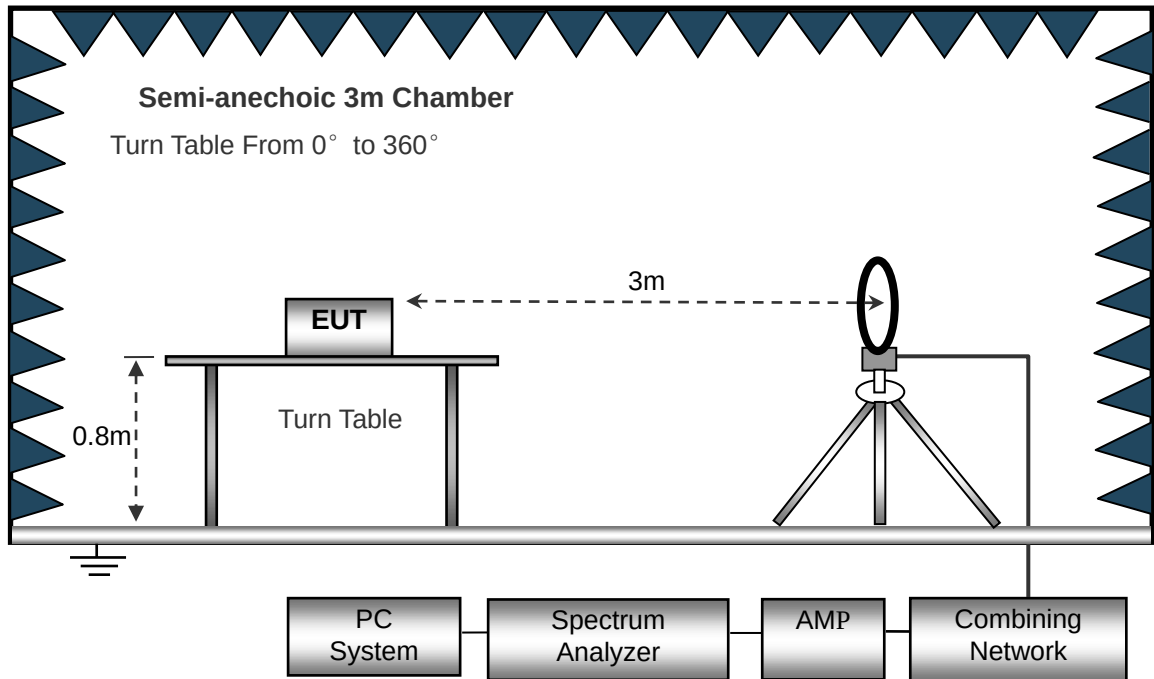
- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

8.2 Test Procedure

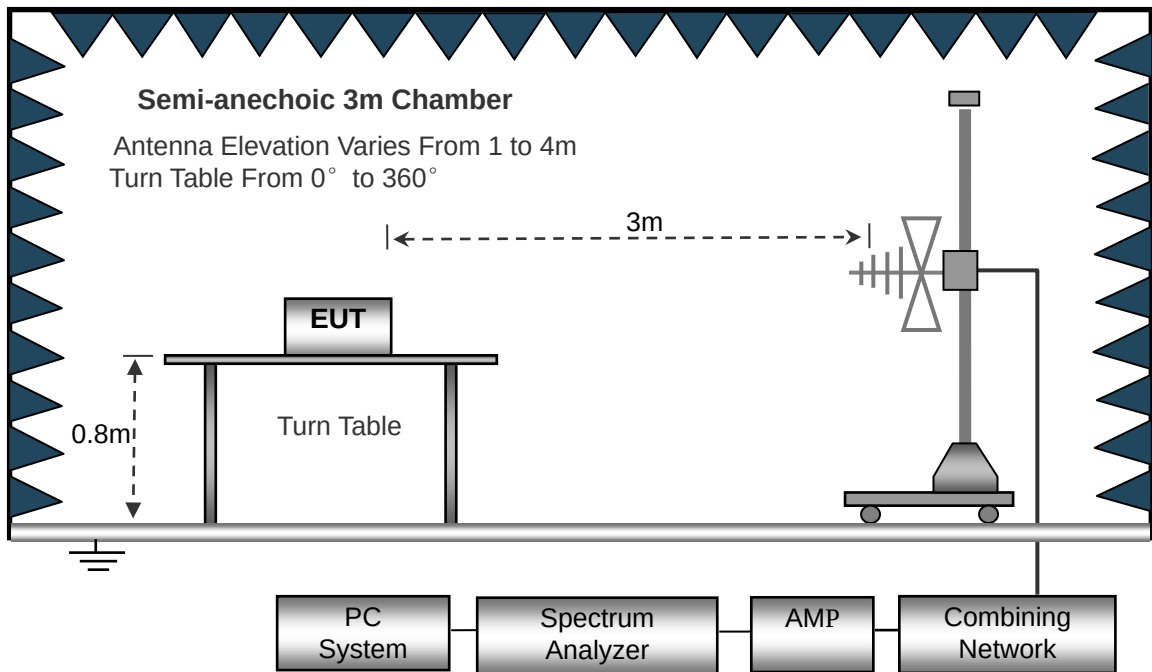
The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

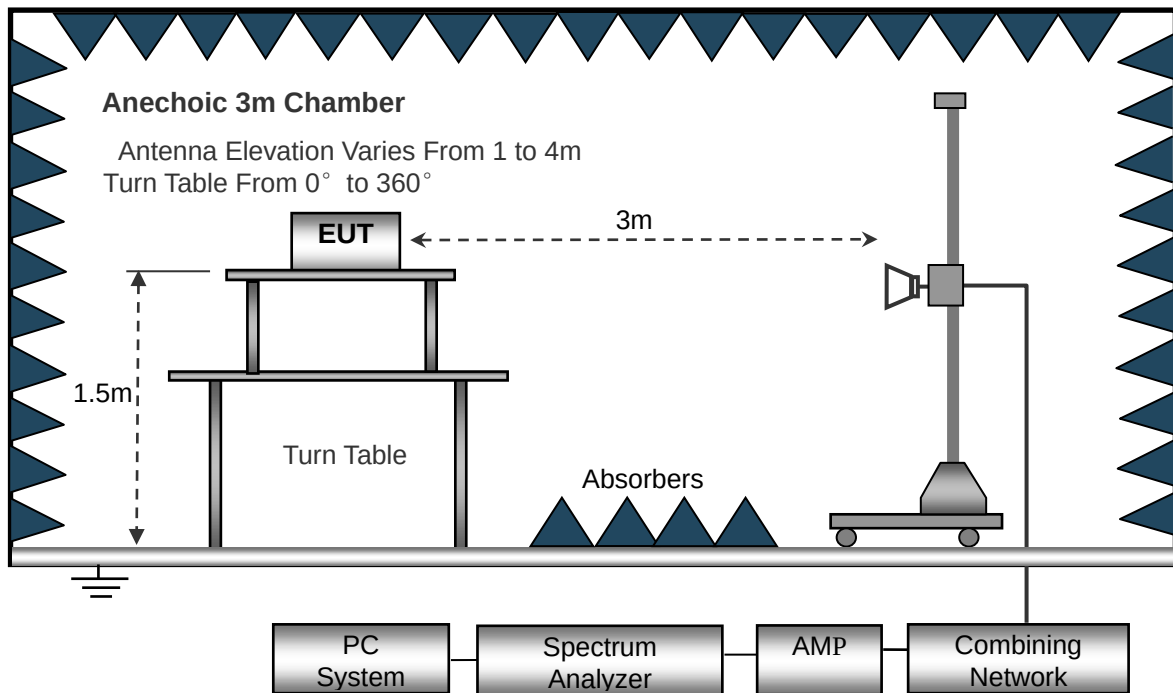
The test setup for emission measurement below 30MHz.



The test setup for emission measurement from 30MHz to 1GHz.



The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

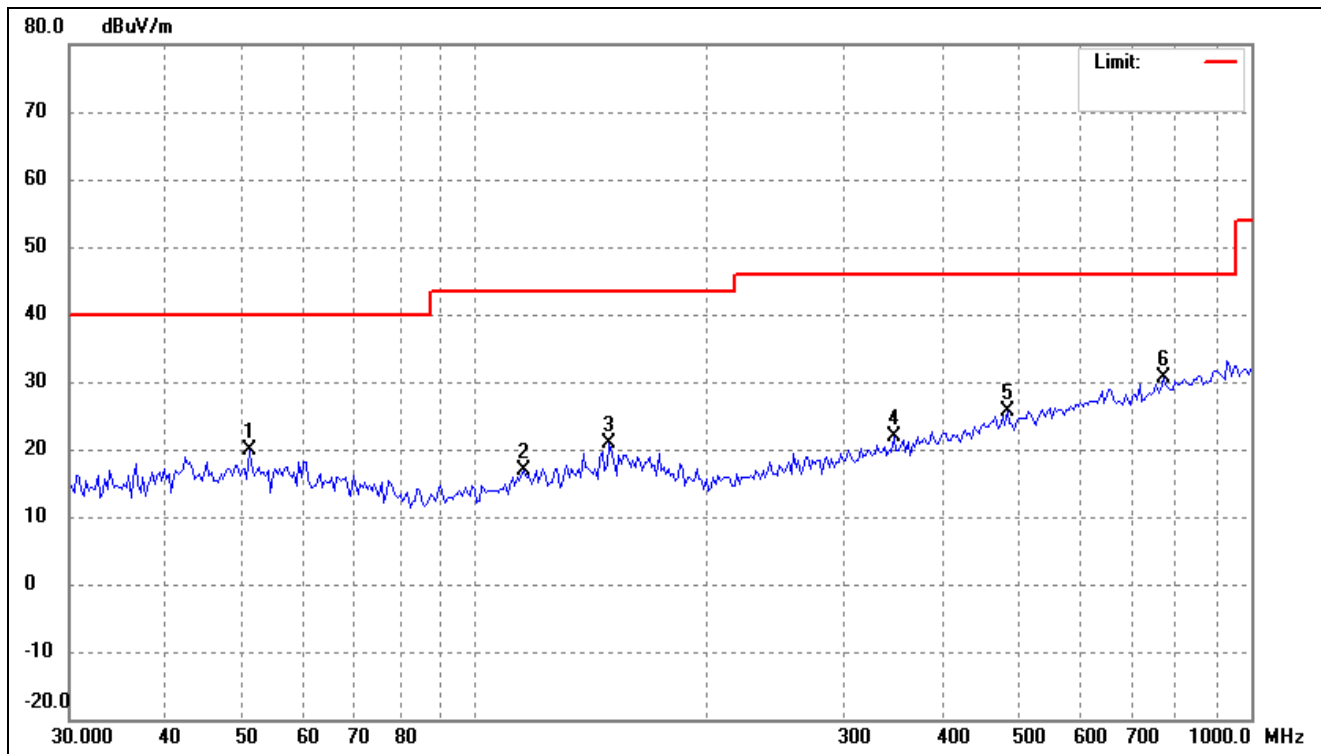
$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

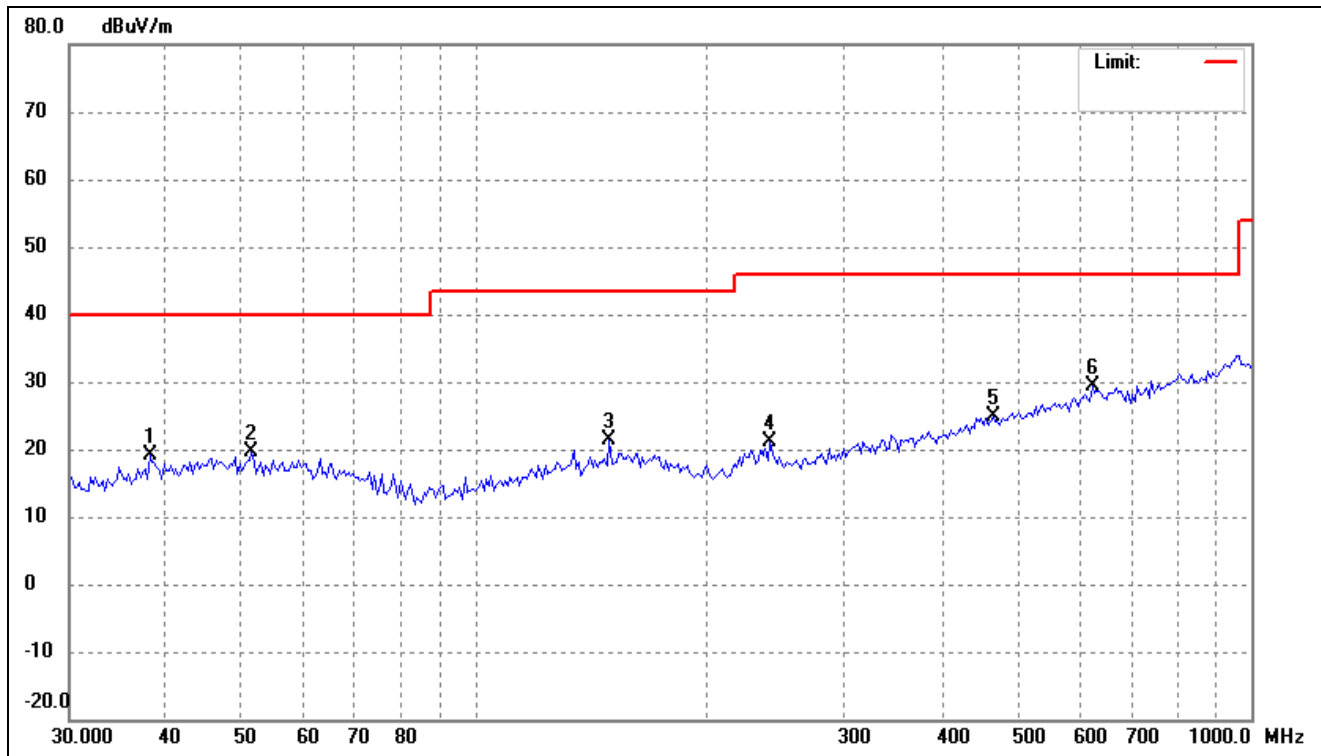
- Spurious Emission From 30MHz to 1GHz
- 5150-5250MHz

802.11a(Worst case)			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.1756	28.09	-8.22	19.87	40.00	-20.13	-	-	peak
2	115.6322	27.84	-10.99	16.85	43.50	-26.65	-	-	peak
3	148.9175	29.64	-8.68	20.96	43.50	-22.54	-	-	peak
4	346.0740	29.15	-7.18	21.97	46.00	-24.03	-	-	peak
5	484.9068	29.70	-4.11	25.59	46.00	-20.41	-	-	peak
6	771.0475	30.64	0.03	30.67	46.00	-15.33	-	-	peak

802.11a(Worst case)			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical

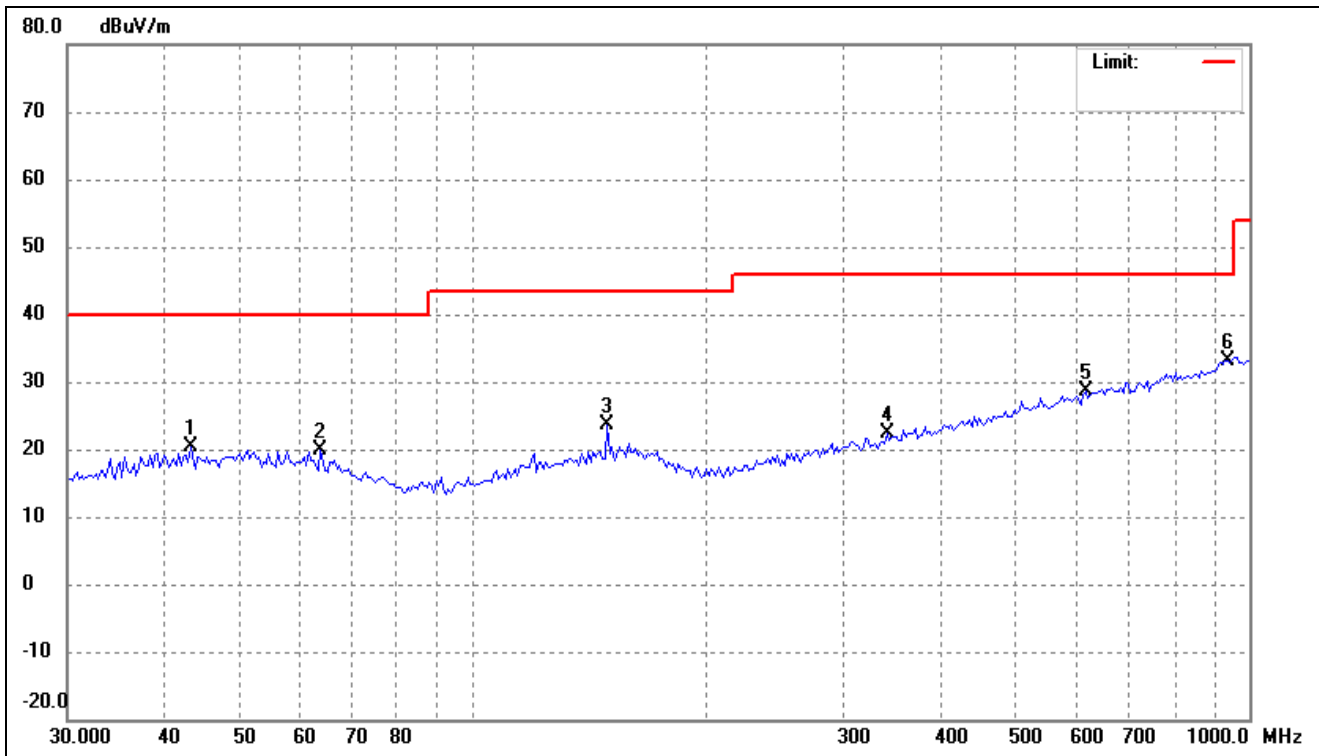


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.0965	28.03	-8.89	19.14	40.00	-20.86	-	-	peak
2	51.5365	27.89	-8.24	19.65	40.00	-20.35	-	-	peak
3	148.9175	30.09	-8.68	21.41	43.50	-22.09	-	-	peak
4	240.1442	31.74	-10.54	21.20	46.00	-24.80	-	-	peak
5	464.8867	29.18	-4.37	24.81	46.00	-21.19	-	-	peak
6	624.4897	30.67	-1.41	29.26	46.00	-16.74	-	-	peak

➤ 5250-5350MHz

802.11a(Worst case)

Test Channel	5320MHz(Worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.2333	28.91	-8.47	20.44	40.00	-19.56	-	-	peak
2	63.6312	29.55	-9.59	19.96	40.00	-20.04	-	-	peak
3	148.9175	32.22	-8.68	23.54	43.50	-19.96	-	-	peak
4	341.2442	29.72	-7.26	22.46	46.00	-23.54	-	-	peak
5	615.7743	30.20	-1.53	28.67	46.00	-17.33	-	-	peak
6	938.7139	31.15	2.01	33.16	46.00	-12.84	-	-	peak

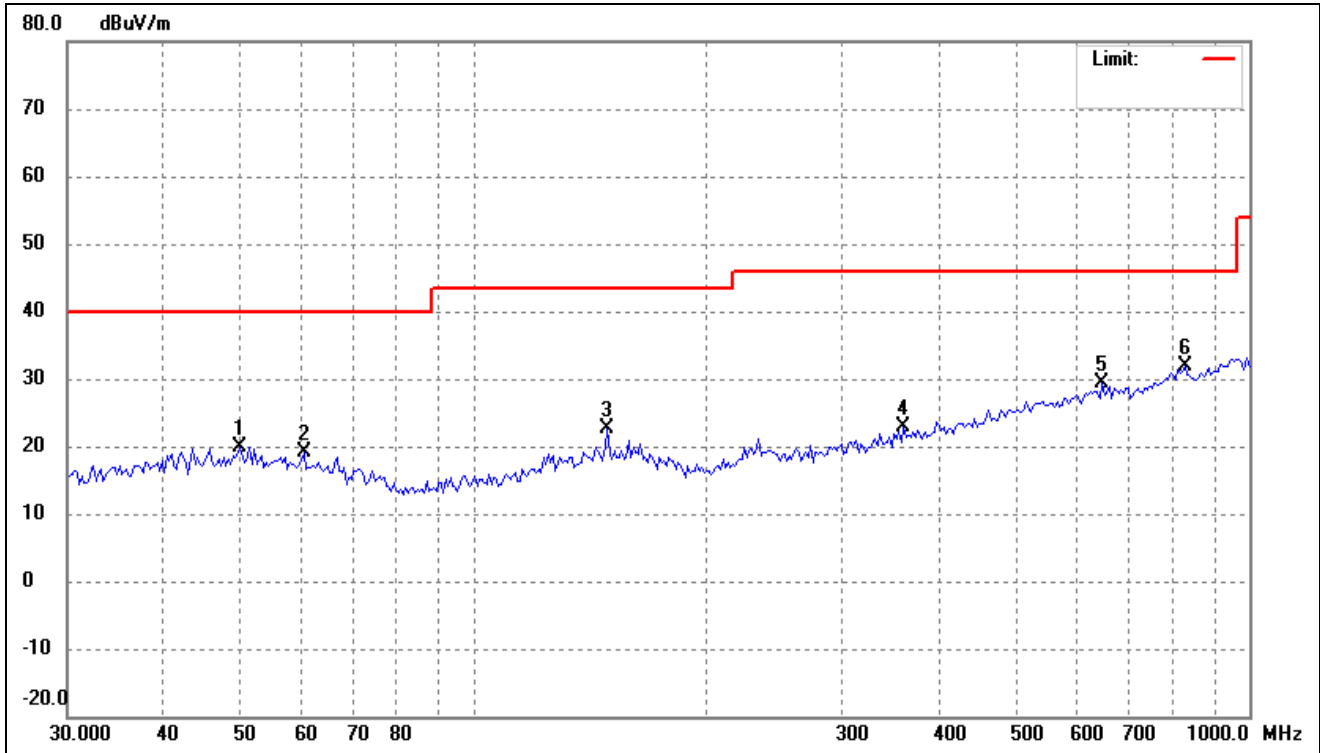
802.11a(Worst case)

Test Channel

5320MHz(Worst case)

Polarity:

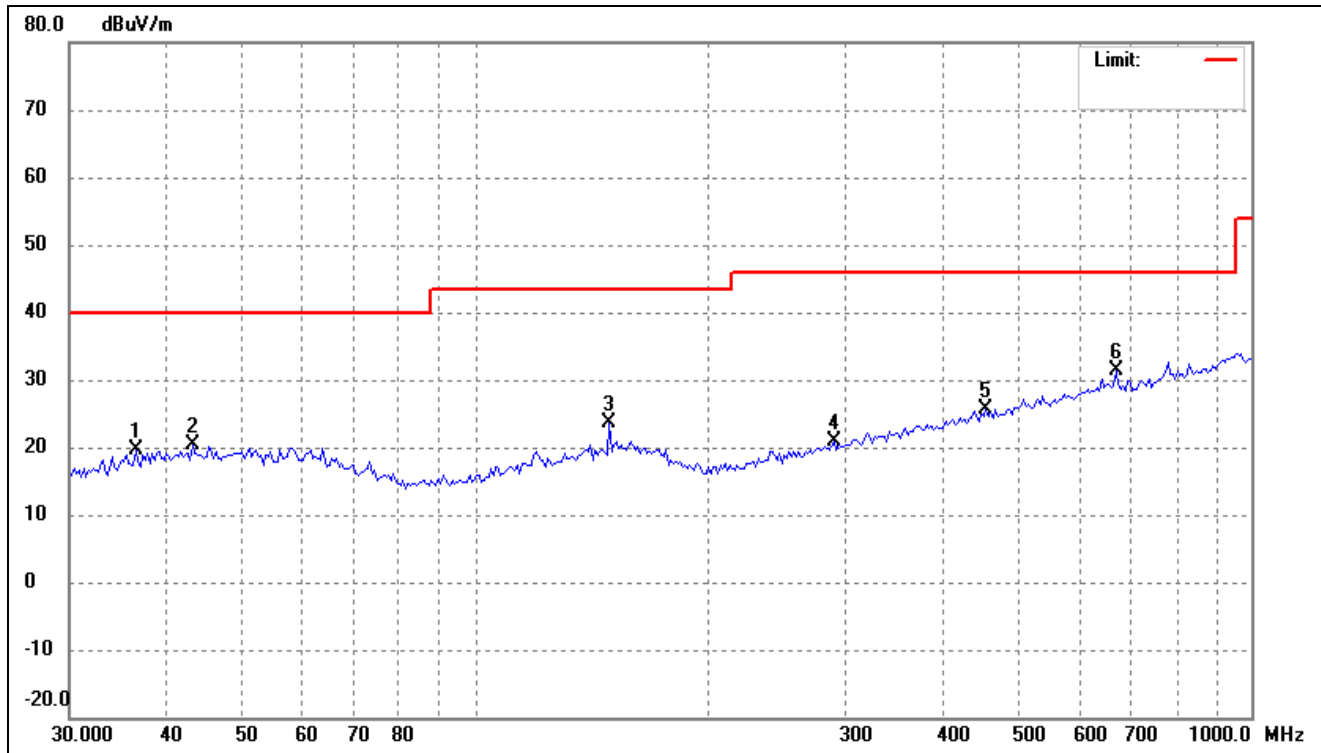
Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.1080	28.09	-8.09	20.00	40.00	-20.00	-	-	peak
2	60.5769	28.24	-9.04	19.20	40.00	-20.80	-	-	peak
3	148.9175	31.33	-8.68	22.65	43.50	-20.85	-	-	peak
4	358.4497	29.89	-6.89	23.00	46.00	-23.00	-	-	peak
5	646.8217	30.62	-1.32	29.30	46.00	-16.70	-	-	peak
6	827.1795	31.26	0.54	31.80	46.00	-14.20	-	-	peak

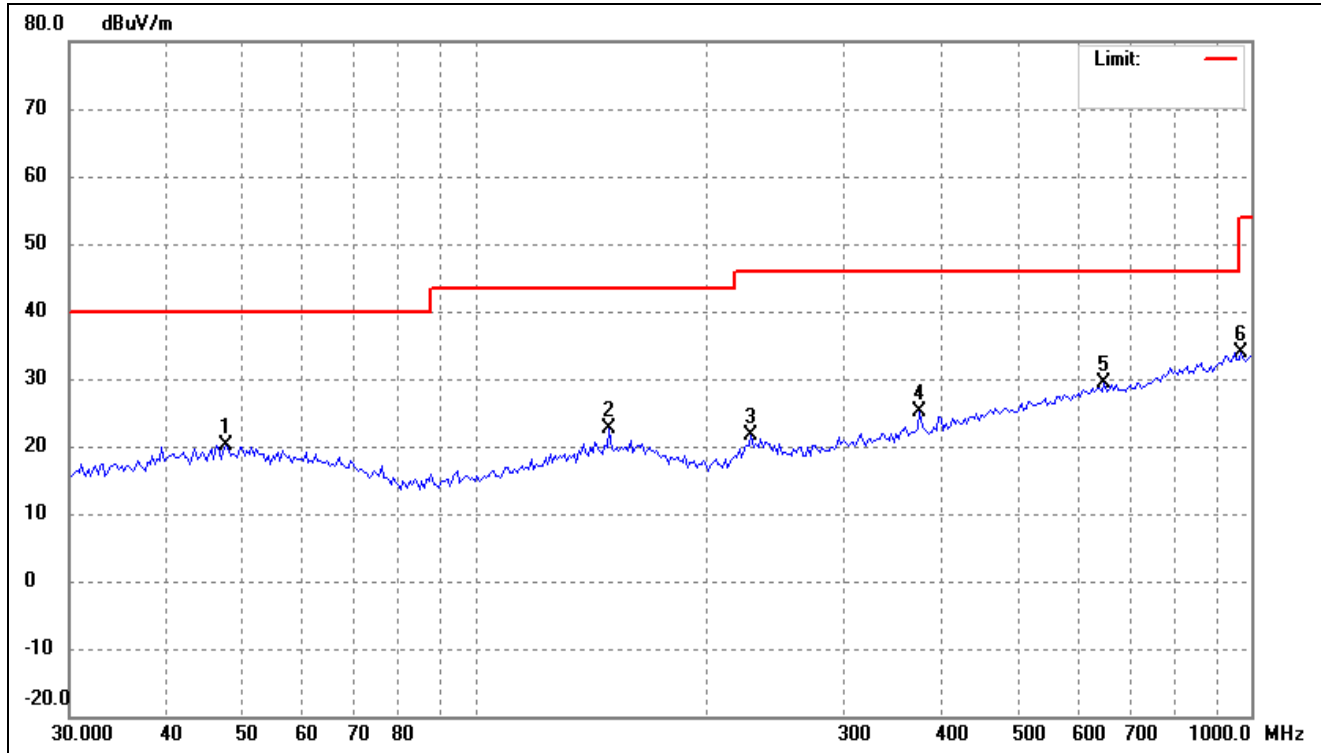
➤ 5470-5725MHz

802.11a(worst case)			
Test Channel	5500MHz(worst case)	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.5236	28.92	-9.22	19.70	40.00	-20.30	-	-	peak
2	43.2333	28.91	-8.47	20.44	40.00	-19.56	-	-	peak
3	148.9175	32.42	-8.68	23.74	43.50	-19.76	-	-	peak
4	290.3170	29.34	-8.58	20.76	46.00	-25.24	-	-	peak
5	455.1888	30.05	-4.52	25.53	46.00	-20.47	-	-	peak
6	669.9523	32.58	-1.27	31.31	46.00	-14.69	-	-	peak

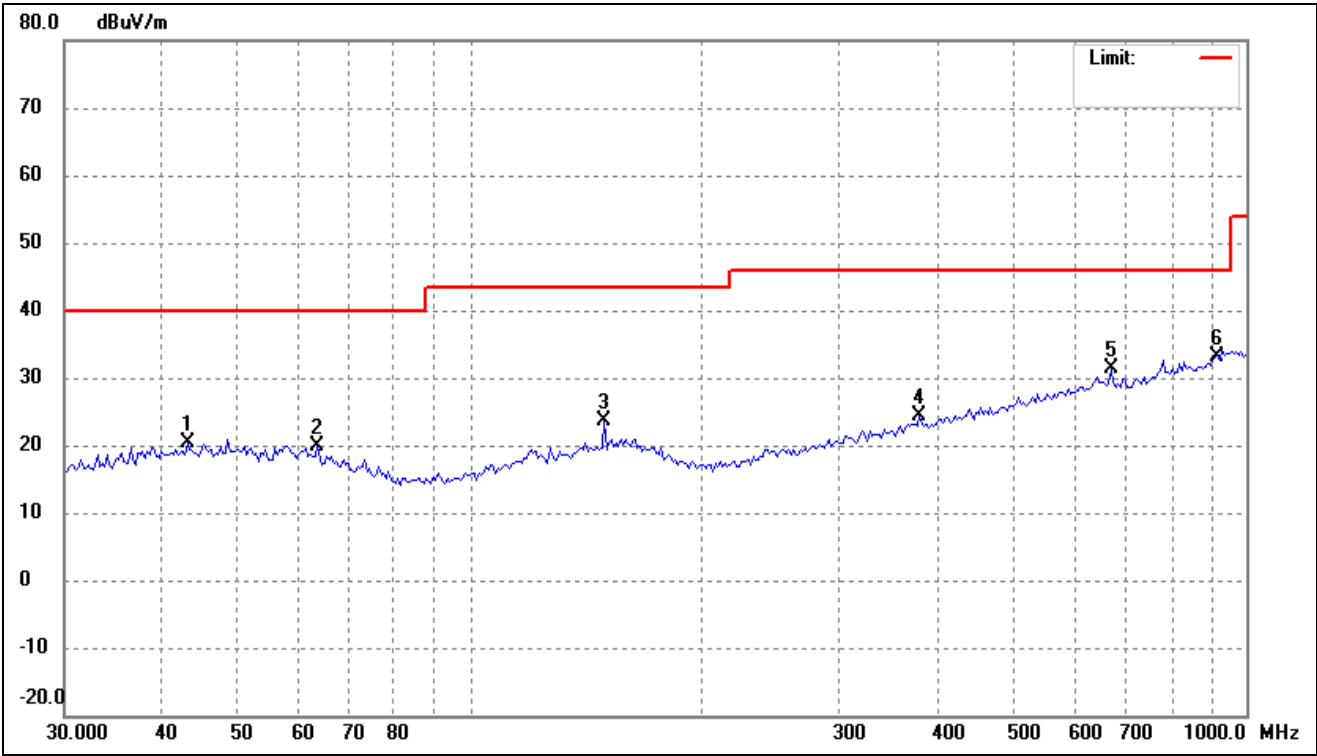
802.11a(worst case)			
Test Channel	5500MHz(worst case)	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	47.7028	28.43	-8.27	20.16	40.00	-19.84	-	-	peak
2	148.9175	31.33	-8.68	22.65	43.50	-20.85	-	-	peak
3	227.0164	33.32	-11.76	21.56	46.00	-24.44	-	-	peak
4	373.8862	31.63	-6.50	25.13	46.00	-20.87	-	-	peak
5	646.8217	30.62	-1.32	29.30	46.00	-16.70	-	-	peak
6	972.2827	31.66	2.27	33.93	54.00	-20.07	-	-	peak

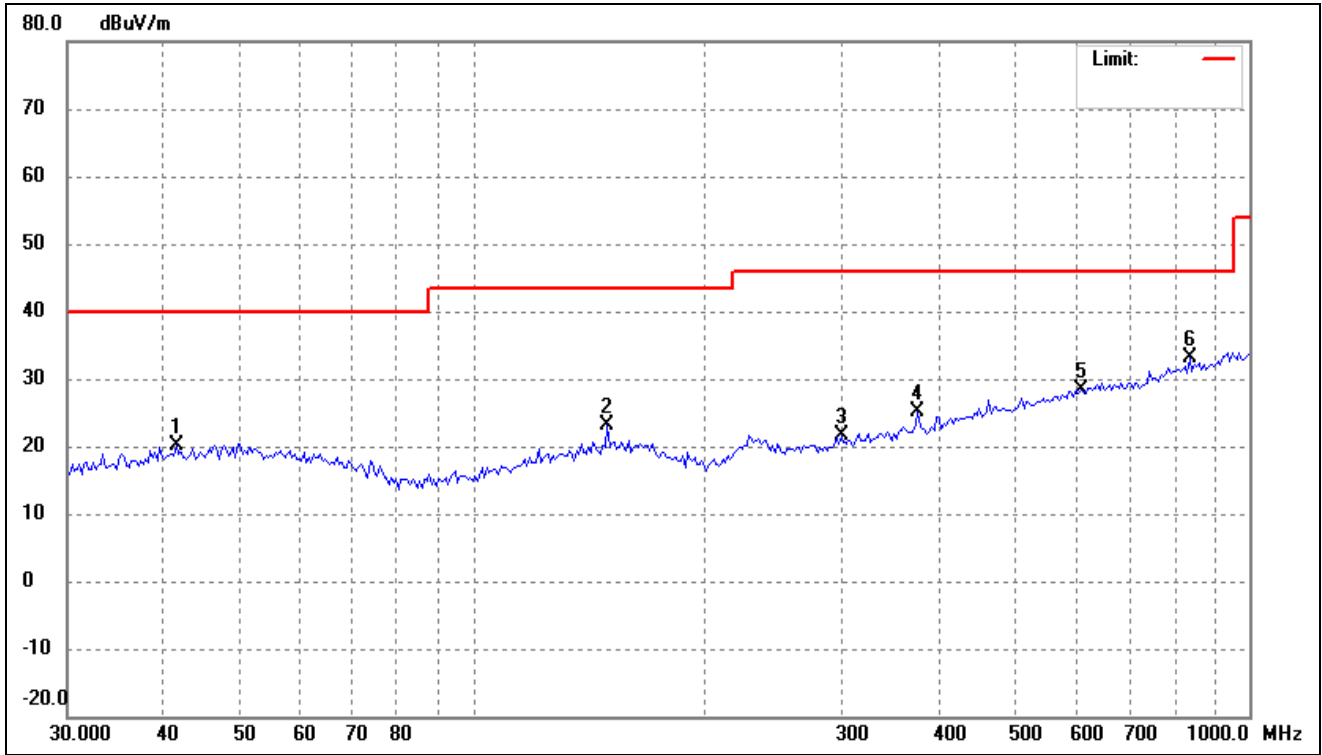
➤ 5725-5850MHz

802.11a(worst case)			
Test Channel	5825MHz(worst case)	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.2333	28.91	-8.47	20.44	40.00	-19.56	-	-	peak
2	63.6312	29.55	-9.59	19.96	40.00	-20.04	-	-	peak
3	148.9175	32.42	-8.68	23.74	43.50	-19.76	-	-	peak
4	379.1780	30.84	-6.38	24.46	46.00	-21.54	-	-	peak
5	669.9523	32.58	-1.27	31.31	46.00	-14.69	-	-	peak
6	912.6953	31.74	1.46	33.20	46.00	-12.80	-	-	peak

802.11a			
Test Channel	5825MHz(worst case)	Polarity:	Vertical

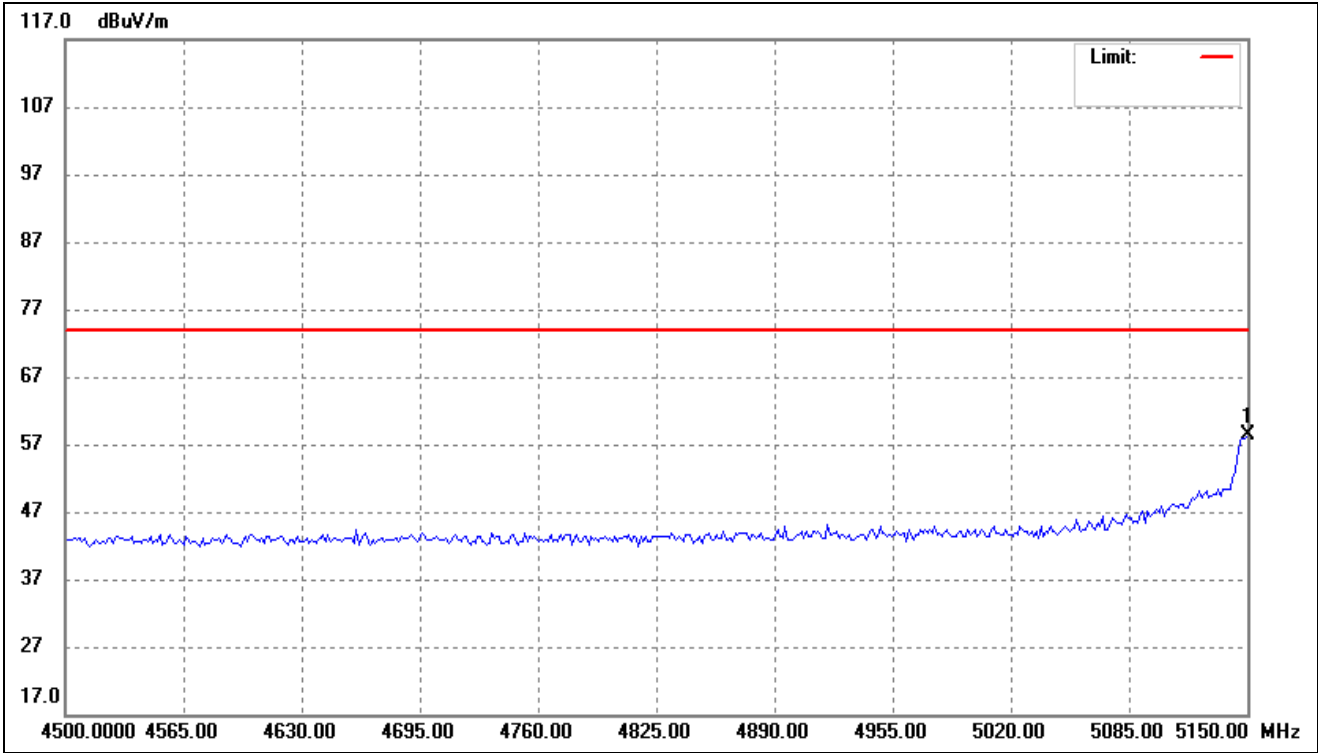


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.4483	28.69	-8.48	20.21	40.00	-19.79	-	-	peak
2	148.9175	31.86	-8.68	23.18	43.50	-20.32	-	-	peak
3	298.5932	29.98	-8.31	21.67	46.00	-24.33	-	-	peak
4	373.8862	31.63	-6.50	25.13	46.00	-20.87	-	-	peak
5	607.1806	30.09	-1.64	28.45	46.00	-17.55	-	-	peak
6	838.8870	32.37	0.64	33.01	46.00	-12.99	-	-	peak

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

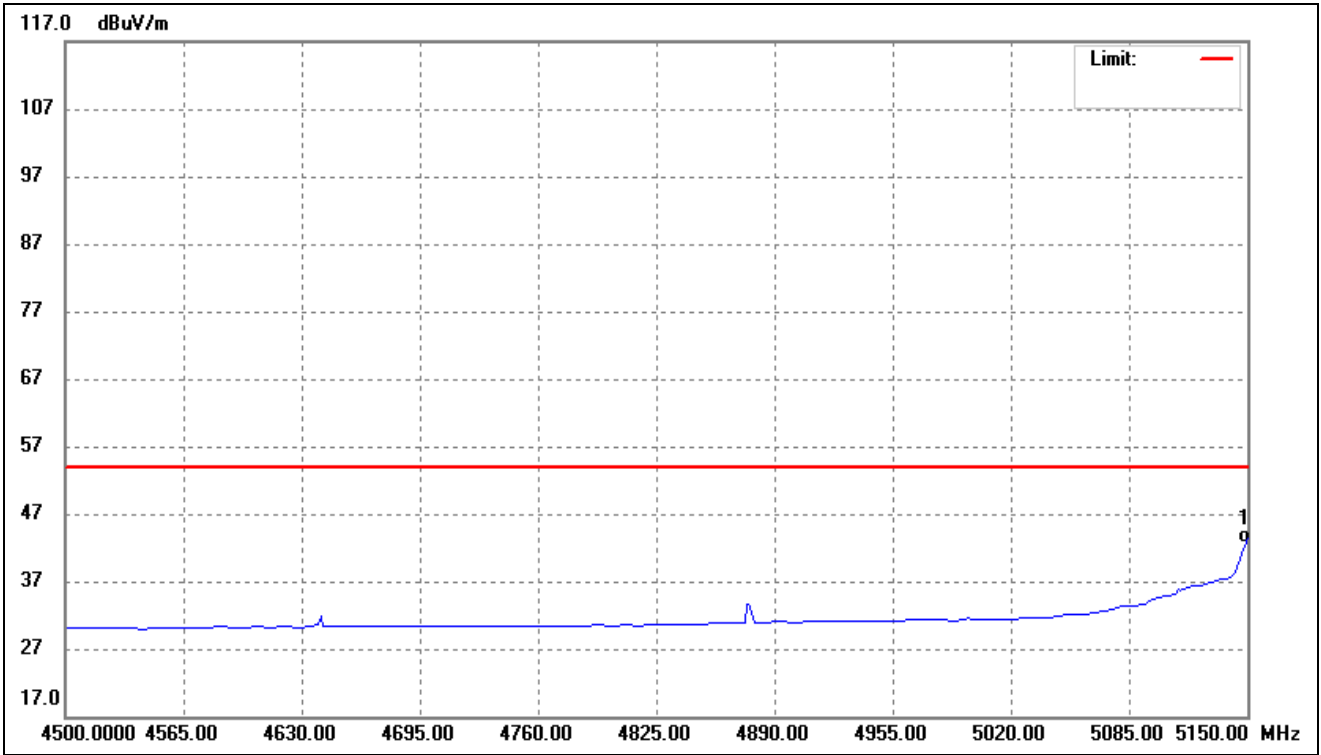
➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge			
Test Channel	Band 4.50-5.15GHz	Polarity:	Horizontal(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	70.15	-11.66	58.49	74.00	-15.51	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	Band 4.50-5.15GHz	Polarity:	Horizontal(worst case)

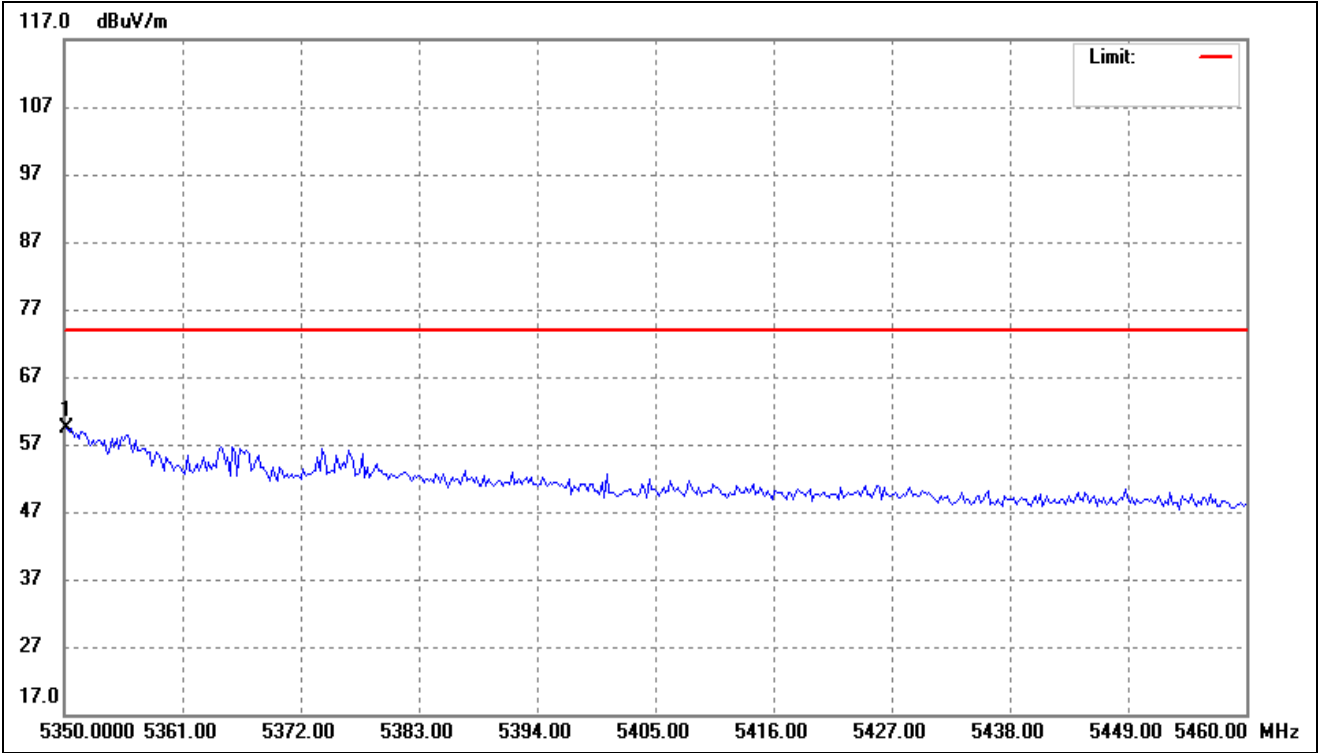


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	55.31	-11.66	43.65	54.00	-10.35	-	-	AVG

5250-5350MHz

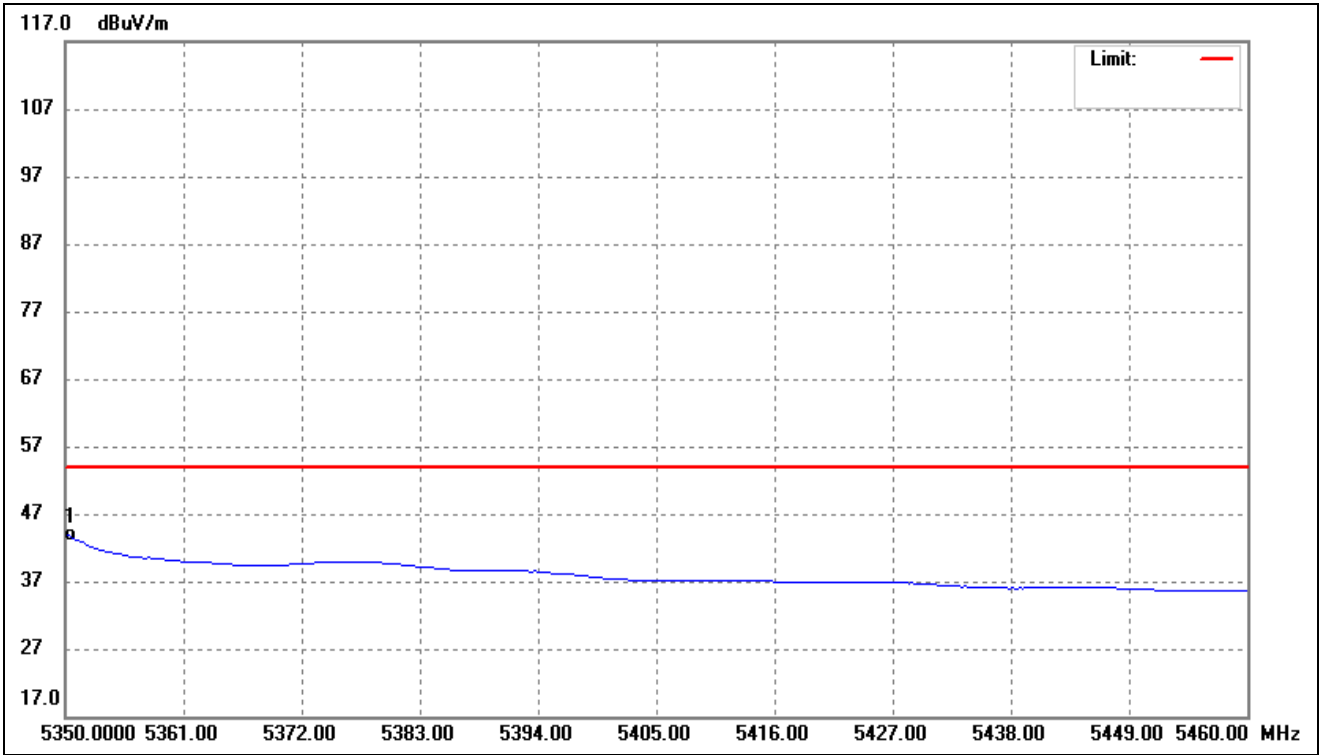
802.11a- Restricted Bandedge

Test Channel	band 5.35-5.46GHz	Polarity:	Horizontal(worst case)
--------------	-------------------	-----------	------------------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.220	70.13	-10.67	59.46	74.00	-14.54	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.35-5.46GHz	Polarity:	Horizontal(worst case)

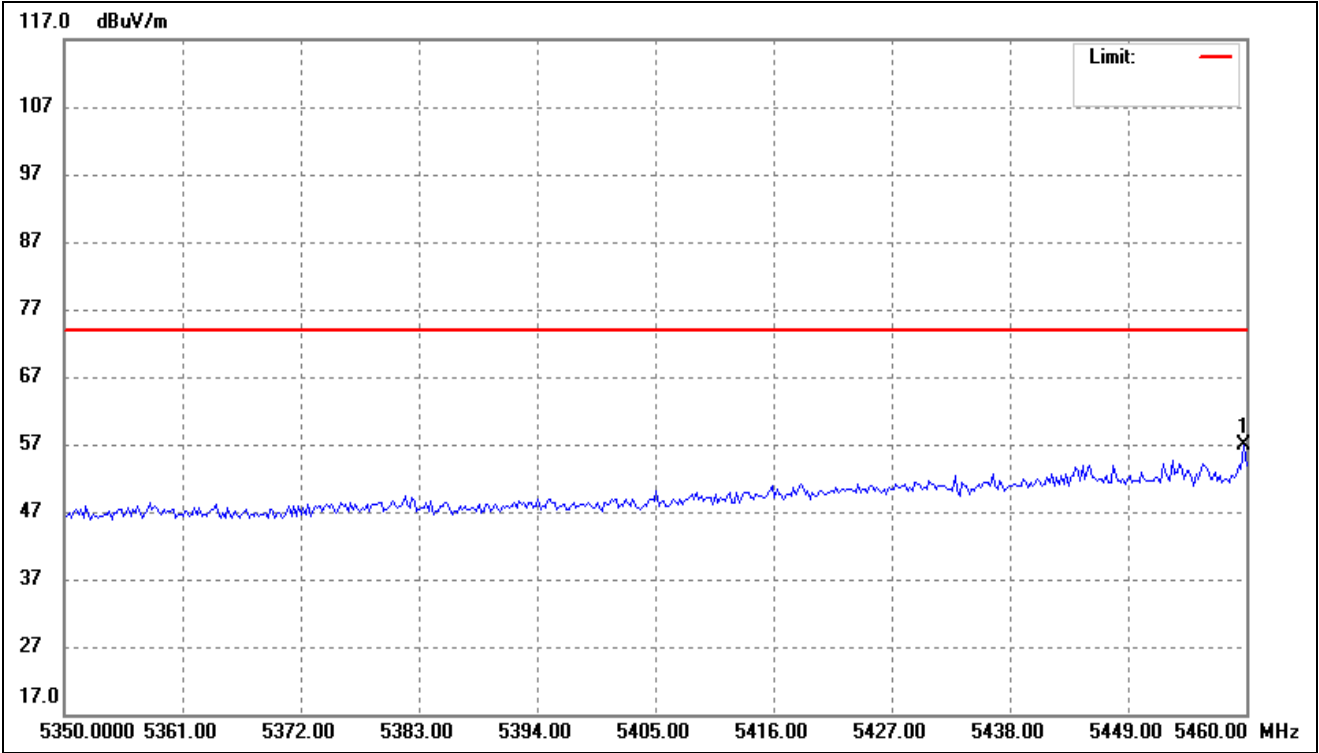


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5350.000	54.50	-10.67	43.83	54.00	-10.17	-	-	AVG

5470-5725MHz

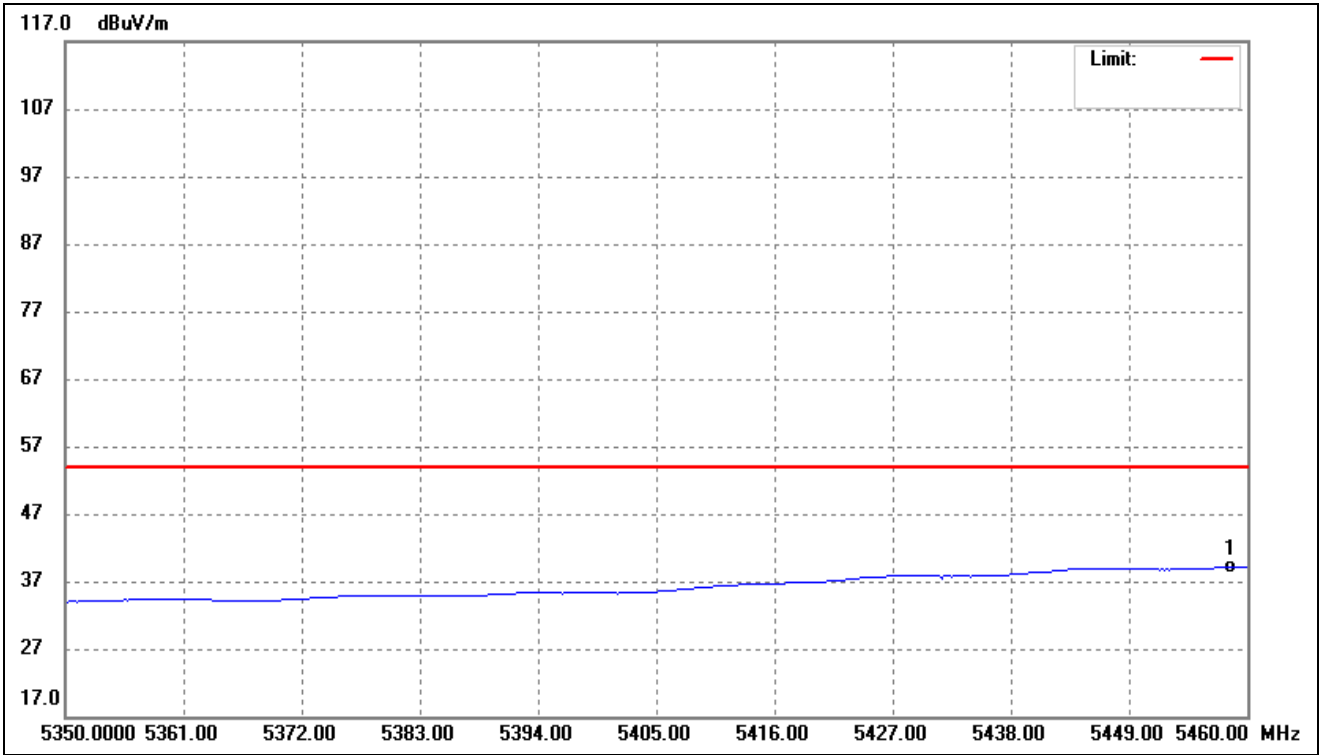
802.11a- Restricted Bandedge

Test Channel	band 5.35-5.46GHz	Polarity:	Horizontal(worst case)
--------------	-------------------	-----------	------------------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5459.780	67.00	-10.13	56.87	74.00	-17.13	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.35-5.46GHz	Polarity:	Horizontal(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5458.457	49.25	-10.13	39.12	54.00	-14.88	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: ‘-’Means’ the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	53.08	7.11	60.19	74	-13.81	H	PK
10360	39.05	7.11	46.16	54	-7.84	H	AV
10360	53.56	7.11	60.67	74	-13.33	V	PK
10360	39.69	7.11	46.80	54	-7.20	V	AV
Middle Channel (5200MHz)							
10400	53.29	7.22	60.51	74	-13.49	H	PK
10400	39.42	7.22	46.64	54	-7.36	H	AV
10400	54.14	7.22	61.36	74	-12.64	V	PK
10400	40.71	7.22	47.93	54	-6.07	V	AV
High Channel (5240MHz)							
10480	57.16	7.69	64.85	74	-9.15	H	PK
10480	41.07	7.69	48.76	54	-5.24	H	AV
10480	54.46	7.69	62.15	74	-11.85	V	PK
10480	40.64	7.69	48.33	54	-5.67	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5260MHz)							
10520	57.33	7.96	65.29	74	-8.71	H	PK
10520	39.17	7.96	47.13	54	-6.87	H	AV
10520	55.18	7.96	63.14	74	-10.86	V	PK
10520	36.77	7.96	44.73	54	-9.27	V	AV
Middle Channel (5280MHz)							
10560	56.40	8.02	64.42	74	-9.58	H	PK
10560	38.65	8.02	46.67	54	-7.33	H	AV
10560	52.71	8.02	60.73	74	-13.27	V	PK
10560	40.58	8.02	48.60	54	-5.40	V	AV
High Channel (5320MHz)							
10640	57.11	8.35	65.46	74	-8.54	H	PK
10640	37.94	8.35	46.29	54	-7.71	H	AV
10640	51.78	8.35	60.13	74	-13.87	V	PK
10640	37.89	8.35	46.24	54	-7.76	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	55.31	8.82	64.13	74	-9.87	H	PK
11000	38.07	8.82	46.89	54	-7.11	H	AV
11000	53.19	8.82	62.01	74	-11.99	V	PK
11000	38.10	8.82	46.92	54	-7.08	V	AV
Middle Channel (5600MHz)							
11200	54.47	8.92	63.39	74	-10.61	H	PK
11200	37.72	8.92	46.64	54	-7.36	H	AV
11200	51.34	8.92	60.26	74	-13.74	V	PK
11200	39.60	8.92	48.52	54	-5.48	V	AV
High Channel (5700MHz)							
11400	54.58	9.36	63.94	74	-10.06	H	PK
11400	37.96	9.36	47.32	54	-6.68	H	AV
11400	53.10	9.36	62.46	74	-11.54	V	PK
11400	37.94	9.36	47.30	54	-6.70	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	52.26	9.45	61.71	74	-12.29	H	PK
11490	37.66	9.45	47.11	54	-6.89	H	AV
11490	52.46	9.45	61.91	74	-12.09	V	PK
11490	37.03	9.45	46.48	54	-7.52	V	AV
Middle Channel (5785MHz)							
11570	53.40	9.62	63.02	74	-10.98	H	PK
11570	39.41	9.62	49.03	54	-4.97	H	AV
11570	53.18	9.62	62.80	74	-11.20	V	PK
11570	37.66	9.62	47.28	54	-6.72	V	AV
High Channel (5825MHz)							
11650	53.91	9.84	63.75	74	-10.25	H	PK
11650	34.75	9.84	44.59	54	-9.41	H	AV
11650	51.68	9.84	61.52	74	-12.48	V	PK
11650	37.51	9.84	47.35	54	-6.65	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-41.69	-27
Highest	Above 5350	-39.64	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-42.48	-27
Highest	Above 5350	-42.29	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-39.90	-27
Highest	Above 5725	-41.84	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-45.63	-27
	5650 to 5700	-34.15	-27 to -17
	5700 to 5720	-26.13	-17 to 15.6
	5720 to 5725	-16.78	15.6 to 27
Highest	5850 to 5855	-15.31	27 to 15.6
	5855 to 5875	-26.32	15.6 to -17
	5875 to 5925	-36.08	-17 to -27
	Above 5925	-39.97	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	54.27	7.11	61.38	74	-12.62	H	PK
10360	38.33	7.11	45.44	54	-8.56	H	AV
10360	54.74	7.11	61.85	74	-12.15	V	PK
10360	41.21	7.11	48.32	54	-5.68	V	AV
Middle Channel (5200MHz)							
10400	55.24	7.22	62.46	74	-11.54	H	PK
10400	38.57	7.22	45.79	54	-8.21	H	AV
10400	52.66	7.22	59.88	74	-14.12	V	PK
10400	39.77	7.22	46.99	54	-7.01	V	AV
High Channel (5240MHz)							
10480	50.84	7.69	58.53	74	-15.47	H	PK
10480	37.32	7.69	45.01	54	-8.99	H	AV
10480	54.34	7.69	62.03	74	-11.97	V	PK
10480	37.39	7.69	45.08	54	-8.92	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5260MHz)							
10520	52.61	7.96	60.57	74	-13.43	H	PK
10520	39.28	7.96	47.24	54	-6.76	H	AV
10520	52.30	7.96	60.26	74	-13.74	V	PK
10520	39.81	7.96	47.77	54	-6.23	V	AV
Middle Channel (5280MHz)							
10560	56.27	8.02	64.29	74	-9.71	H	PK
10560	38.74	8.02	46.76	54	-7.24	H	AV
10560	53.91	8.02	61.93	74	-12.07	V	PK
10560	39.87	8.02	47.89	54	-6.11	V	AV
High Channel (5320MHz)							
10640	53.76	8.35	62.11	74	-11.89	H	PK
10640	37.42	8.35	45.77	54	-8.23	H	AV
10640	54.67	8.35	63.02	74	-10.98	V	PK
10640	38.40	8.35	46.75	54	-7.25	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5500MHz)							
11000	54.53	8.82	63.35	74	-10.65	H	PK
11000	37.81	8.82	46.63	54	-7.37	H	AV
11000	54.64	8.82	63.46	74	-10.54	V	PK
11000	39.00	8.82	47.82	54	-6.18	V	AV
Middle Channel (5600MHz)							
11200	55.45	8.92	64.37	74	-9.63	H	PK
11200	35.88	8.92	44.80	54	-9.20	H	AV
11200	54.46	8.92	63.38	74	-10.62	V	PK
11200	37.91	8.92	46.83	54	-7.17	V	AV
High Channel (5700MHz)							
11400	54.23	9.84	64.07	74	-9.93	H	PK
11400	37.68	9.84	47.52	54	-6.48	H	AV
11400	53.99	9.84	63.83	74	-10.17	V	PK
11400	36.92	9.84	46.76	54	-7.24	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	55.22	9.45	64.67	74	-9.33	H	PK
11490	39.35	9.45	48.80	54	-5.20	H	AV
11490	53.73	9.45	63.18	74	-10.82	V	PK
11490	38.28	9.45	47.73	54	-6.27	V	AV
Middle Channel (5785MHz)							
11570	54.72	9.62	64.34	74	-9.66	H	PK
11570	38.21	9.62	47.83	54	-6.17	H	AV
11570	54.03	9.62	63.65	74	-10.35	V	PK
11570	37.46	9.62	47.08	54	-6.92	V	AV
High Channel (5825MHz)							
11650	53.20	9.84	63.04	74	-10.96	H	PK
11650	38.02	9.84	47.86	54	-6.14	H	AV
11650	54.02	9.84	63.86	74	-10.14	V	PK
11650	35.46	9.84	45.30	54	-8.70	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.49	-27
Highest	Above 5350	-40.01	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-42.03	-27
Highest	Above 5350	-40.72	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-36.69	-27
Highest	Above 5725	-39.38	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-46.21	-27
	5650 to 5700	-34.45	-27 to -17
	5700 to 5720	-25.28	-17 to 15.6
	5720 to 5725	-17.83	15.6 to 27
Highest	5850 to 5855	-13.82	27 to 15.6
	5855 to 5875	-27.27	15.6 to -17
	5875 to 5925	-36.31	-17 to -27
	Above 5925	-39.36	-27
Note: the data just list the worst cases			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	56.22	7.89	64.11	74	-9.89	H	PK
10380	40.61	7.89	48.50	54	-5.50	H	AV
10380	55.18	7.89	63.07	74	-10.93	V	PK
10380	40.59	7.89	48.48	54	-5.52	V	AV
High Channel (5230MHz)							
10460	55.33	7.97	63.30	74	-10.70	H	PK
10460	39.18	7.97	47.15	54	-6.85	H	AV
10460	53.44	7.97	61.41	74	-12.59	V	PK
10460	38.59	7.97	46.56	54	-7.44	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5270MHz)							
10540	54.17	8.16	62.33	74	-11.67	H	PK
10540	38.28	8.16	46.44	54	-7.56	H	AV
10540	52.51	8.16	60.67	74	-13.33	V	PK
10540	37.85	8.16	46.01	54	-7.99	V	AV
High Channel (5310MHz)							
10620	55.69	8.57	64.26	74	-9.74	H	PK
10620	37.76	8.57	46.33	54	-7.67	H	AV
10620	56.02	8.57	64.59	74	-9.41	V	PK
10620	37.96	8.57	46.53	54	-7.47	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5510MHz)							
11020	56.14	9.16	65.30	74	-8.70	H	PK
11020	38.18	9.16	47.34	54	-6.66	H	AV
11020	52.34	9.16	61.50	74	-12.50	V	PK
11020	37.44	9.16	46.60	54	-7.40	V	AV
Middle Channel (5590MHz)							
11180	53.82	9.29	63.11	74	-10.89	H	PK
11180	39.09	9.29	48.38	54	-5.62	H	AV
11180	54.46	9.29	63.75	74	-10.25	V	PK
11180	37.96	9.29	47.25	54	-6.75	V	AV
High Channel (5670MHz)							
11340	53.45	9.43	62.88	74	-11.12	H	PK
11340	37.52	9.43	46.95	54	-7.05	H	AV
11340	54.33	9.43	63.76	74	-10.24	V	PK
11340	36.09	9.43	45.52	54	-8.48	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	55.53	9.45	64.98	74	-9.02	H	PK
11510	36.94	9.45	46.39	54	-7.61	H	AV
11510	53.87	9.45	63.32	74	-10.68	V	PK
11510	37.10	9.45	46.55	54	-7.45	V	AV
High Channel (5795MHz)							
11590	53.90	9.27	63.17	74	-10.83	H	PK
11590	38.26	9.27	47.53	54	-6.47	H	AV
11590	53.68	9.27	62.95	74	-11.05	V	PK
11590	37.49	9.27	46.76	54	-7.24	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-41.88	-27
Highest	Above 5350	-39.67	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.14	-27
Highest	Above 5350	-40.06	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-40.50	-27
Highest	Above 5725	-37.99	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-46.49	-27
	5650 to 5700	-36.32	-27 to -17
	5700 to 5720	-27.05	-17 to 15.6
	5720 to 5725	-16.27	15.6 to 27
Highest	5850 to 5855	-14.37	27 to 15.6
	5855 to 5875	-27.08	15.6 to -17
	5875 to 5925	-35.27	-17 to -27
	Above 5925	-38.57	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11ac-VHT80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	54.89	7.53	62.42	74	-11.58	H	PK
10420	38.06	7.53	45.59	54	-8.41	H	AV
10420	53.92	7.53	61.45	74	-12.55	V	PK
10420	37.52	7.53	45.05	54	-8.95	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5290MHz							
10580	56.23	7.95	64.18	74	-9.82	H	PK
10580	37.02	7.95	44.97	54	-9.03	H	AV
10580	53.71	7.95	61.66	74	-12.34	V	PK
10580	37.83	7.95	45.78	54	-8.22	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5530MHz)							
11060	54.25	9.42	63.67	74	-10.33	H	PK
11060	38.12	9.42	47.54	54	-6.46	H	AV
11060	55.34	9.42	64.76	74	-9.24	V	PK
11060	37.85	9.42	47.27	54	-6.73	V	AV
High Channel (5610MHz)							
11220	54.69	9.69	64.38	74	-9.62	H	PK
11220	36.94	9.69	46.63	54	-7.37	H	AV
11220	53.74	9.69	63.43	74	-10.57	V	PK
11220	37.57	9.69	47.26	54	-6.74	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	54.36	9.93	64.29	74	-9.71	H	PK
11550	35.76	9.93	45.69	54	-8.31	H	AV
11550	52.67	9.93	62.60	74	-11.40	V	PK
11550	37.81	9.93	47.74	54	-6.26	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-41.49	-27
Highest	Above 5350	-37.49	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-41.59	-27
Highest	Above 5350	-40.98	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5470-5725MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5470	-39.52	-27
Highest	Above 5725	-38.19	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5650	-45.97	-27
	5650 to 5700	-35.82	-27 to -17
	5700 to 5720	-27.84	-17 to 15.6
	5720 to 5725	-18.28	15.6 to 27
Highest	5850 to 5855	-14.28	27 to 15.6
	5855 to 5875	-27.21	15.6 to -17
	5875 to 5925	-35.05	-17 to -27
	Above 5925	-37.69	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to 40Ghz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

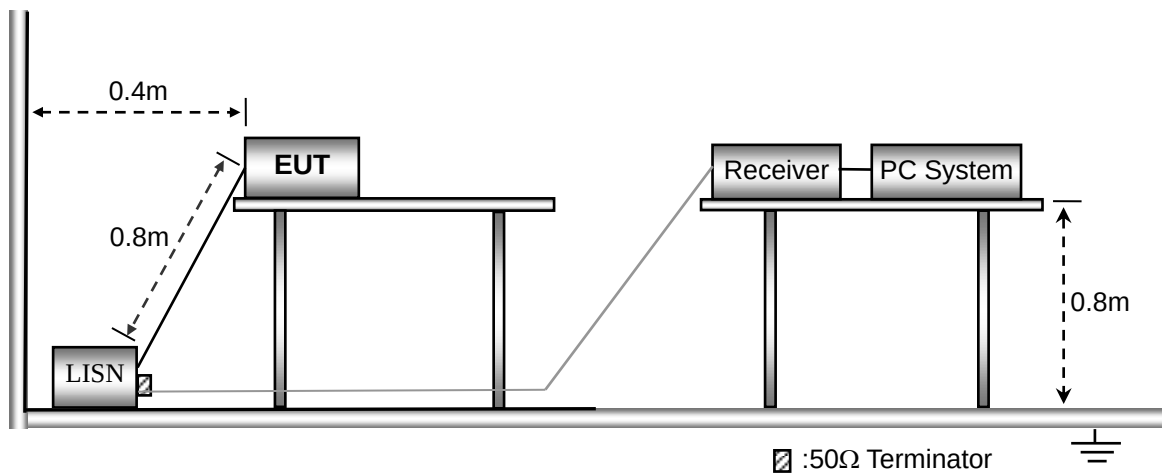
10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

10.2 Basic Test Setup Block Diagram



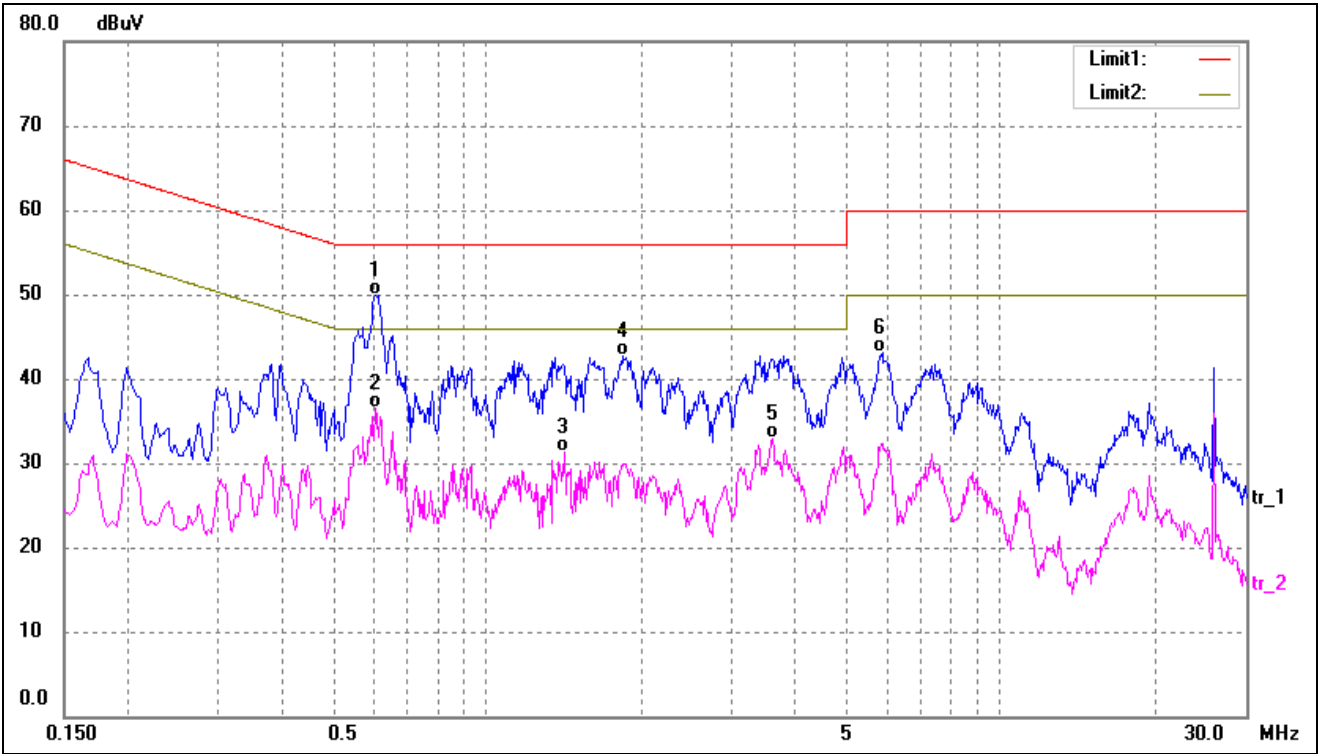
10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

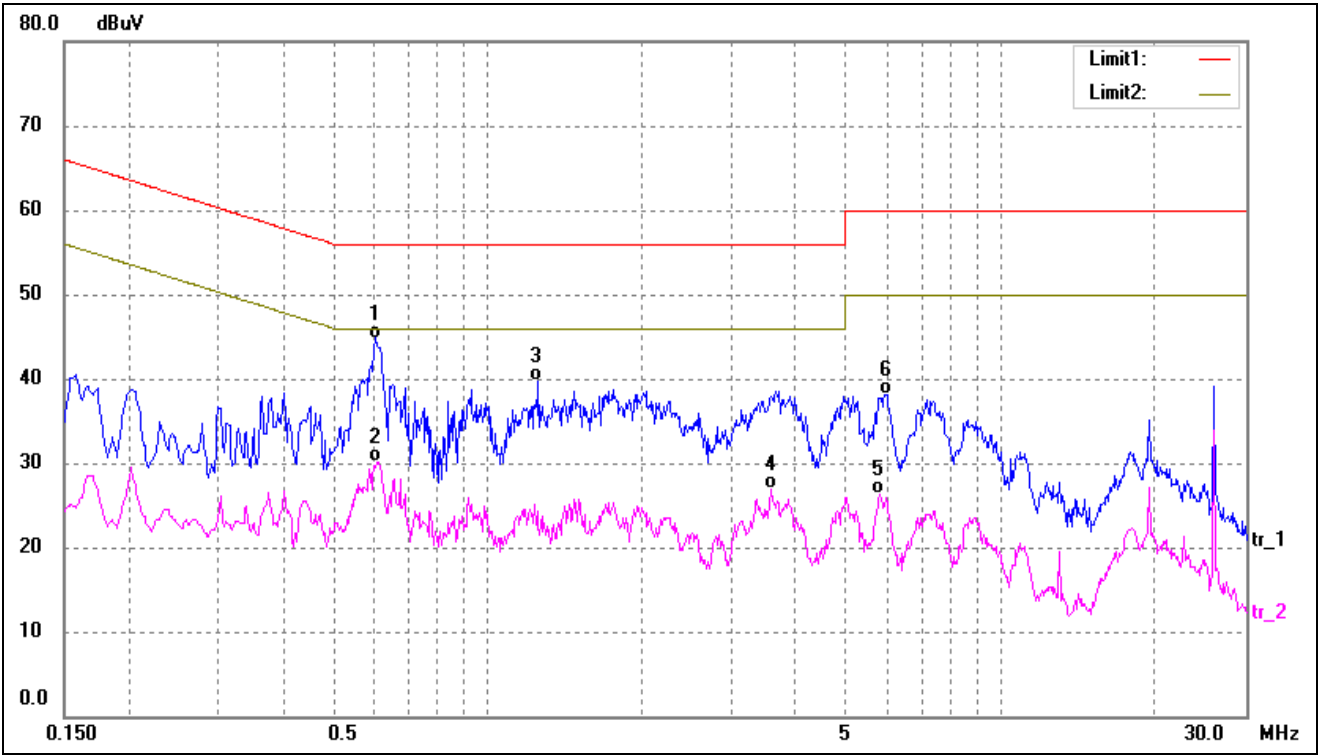
10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.6060	39.69	10.22	49.91	56.00	-6.09	QP
2	0.6060	26.37	10.22	36.59	46.00	-9.41	AVG
3	1.4140	21.14	10.22	31.36	46.00	-14.64	AVG
4	1.8300	32.40	10.29	42.69	56.00	-13.31	QP
5	3.5980	22.55	10.36	32.91	46.00	-13.09	AVG
6	5.8780	32.77	10.38	43.15	60.00	-16.85	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------



No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1*	0.6060	34.58	10.22	44.80	56.00	-11.20	QP
2	0.6100	19.87	10.22	30.09	46.00	-15.91	AVG
3	1.2620	29.42	10.19	39.61	56.00	-16.39	QP
4	3.5660	16.52	10.36	26.88	46.00	-19.12	AVG
5	5.8260	15.89	10.38	26.27	50.00	-23.73	AVG
6	5.9740	27.80	10.38	38.18	60.00	-21.82	QP

APPENDIX SUMMARY

Project No.	WTX23X09198384W	Test Engineer	Elin Su
Start date	2023/9/12	Finish date	2023/9/13
Temperature	23℃	Humidity	51%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A

Power Spectral Density			
U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	2.49	11
	5200	2.01	11
	5240	3.19	11
802.11n-HT20	5180	2.33	11
	5200	2.56	11
	5240	2.90	11
802.11n-HT40	5190	1.95	11
	5230	1.31	11
802.11ac-VHT20	5180	1.98	11
	5200	2.53	11
	5240	2.95	11
802.11ac-VHT40	5190	2.26	11
	5230	2.48	11
802.11ac-VHT80	5210	-3.80	11

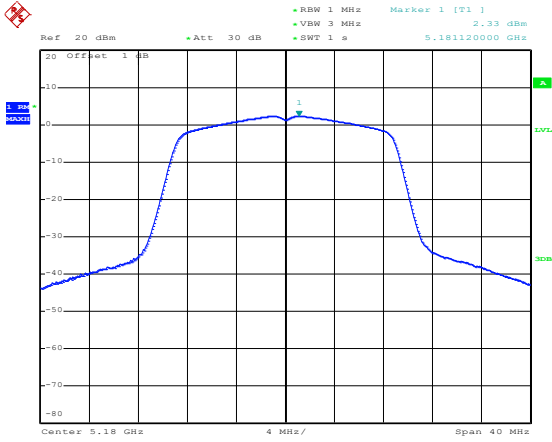
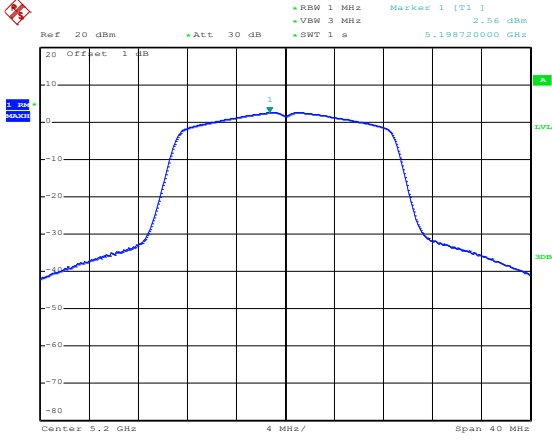
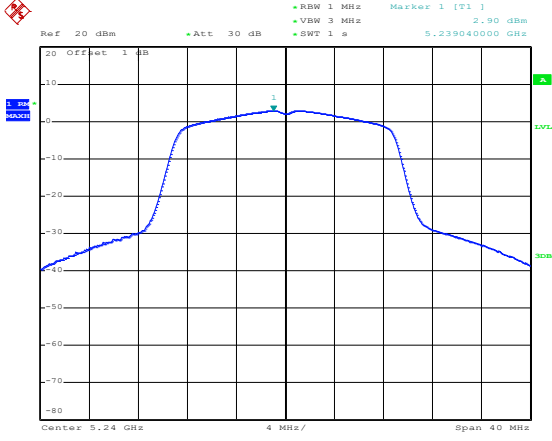
U-NII-2A: 5250-5350MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5260	2.11	11
	5280	2.02	11
	5320	1.53	11
802.11n-HT20	5260	1.89	11
	5280	2.04	11
	5320	1.22	11
802.11n-HT40	5270	1.35	11
	5310	1.55	11
802.11ac-VHT20	5260	1.91	11
	5280	1.83	11
	5320	1.29	11
802.11ac-VHT40	5270	1.61	11
	5310	1.21	11
802.11ac-VHT80	5290	-4.73	11

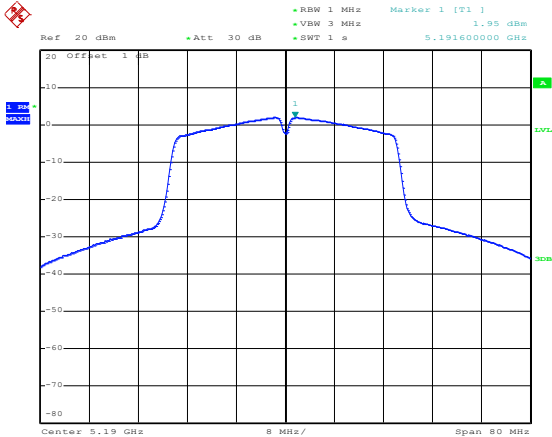
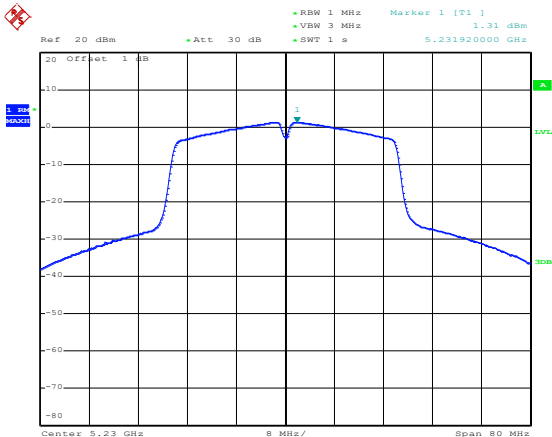
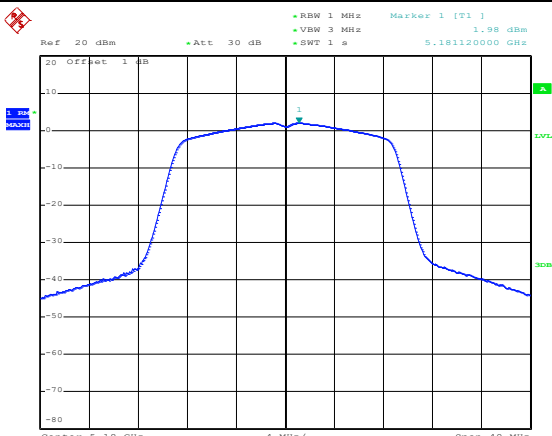
U-NII-2C: 5470-5725MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5500	-0.05	11
	5580	0.77	11
	5700	1.16	11
802.11n-HT20	5500	-0.49	11
	5580	0.27	11
	5700	0.77	11
802.11n-HT40	5510	0.82	11
	5550	1.47	11
	5670	1.24	11
802.11ac-VHT20	5500	-0.65	11
	5580	0.25	11
	5700	0.66	11
802.11ac-VHT40	5510	-0.81	11
	5550	0.03	11
	5670	0.78	11
802.11ac-VHT80	5530	-7.39	11
	5610	-5.96	11

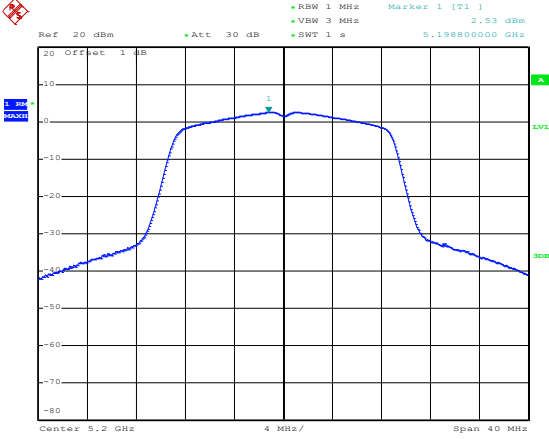
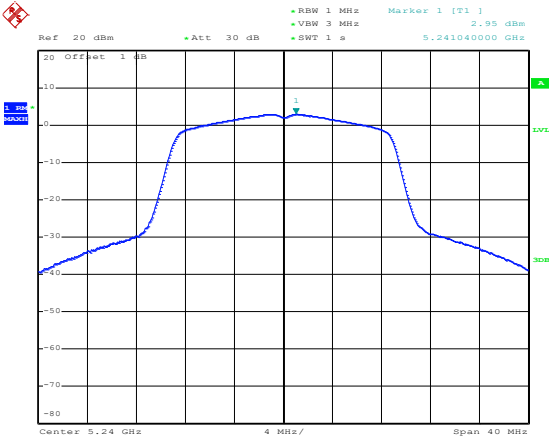
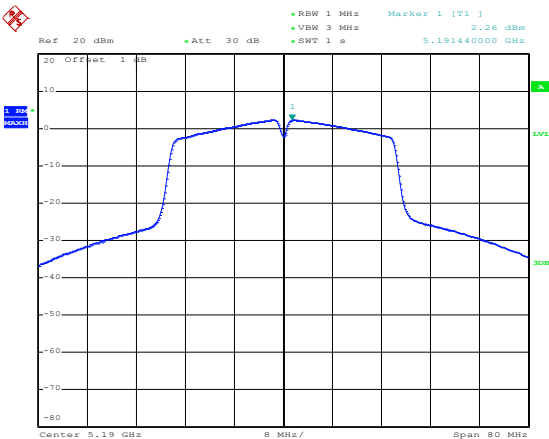
U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	0.30	2.22	2.52	30
	5785	0.02	2.22	2.24	30
	5825	-0.09	2.22	2.13	30
802.11n-HT20	5745	-0.08	2.22	2.14	30
	5785	-0.40	2.22	1.82	30
	5825	-0.52	2.22	1.70	30
802.11n HT40	5755	0.51	2.22	2.73	30
	5795	0.16	2.22	2.38	30
802.11ac-VHT20	5745	0.04	2.22	2.26	30
	5785	-0.42	2.22	1.80	30
	5825	0.01	2.22	2.23	30
802.11ac-VHT40	5755	-0.12	2.22	2.10	30
	5795	-0.47	2.22	1.75	30
802.11ac-VHT80	5775	-6.68	2.22	-4.46	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

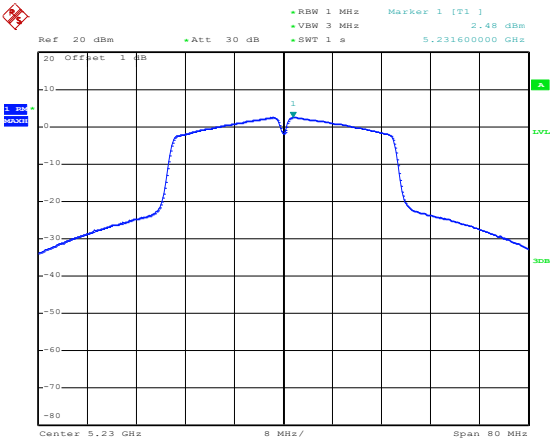
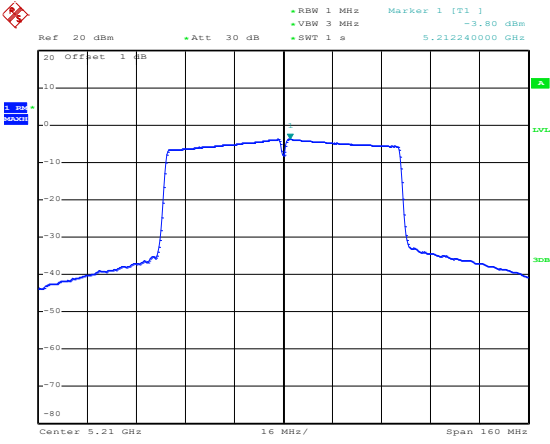
5150-5250MHz

Channel	Center Frequency (GHz)	Span (MHz)	Ref (dBm)	Att (dB)	RBW (MHz)	VBW (MHz)	SWT	Marker 1 [T1] (dBm)	Marker 1 (GHz)
802.11a-Low	5.18	40	20	30	1	3	1 a	2.49	5.181120000
802.11a-Middle	5.2	40	20	30	1	3	1 a	2.01	5.201040000
802.11a-High	5.24	40	20	30	1	3	1 a	3.19	5.241040000

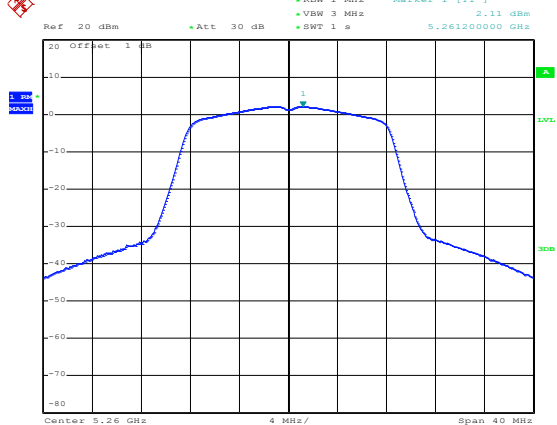
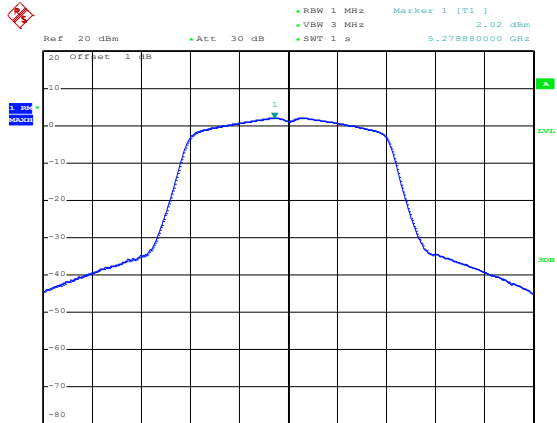
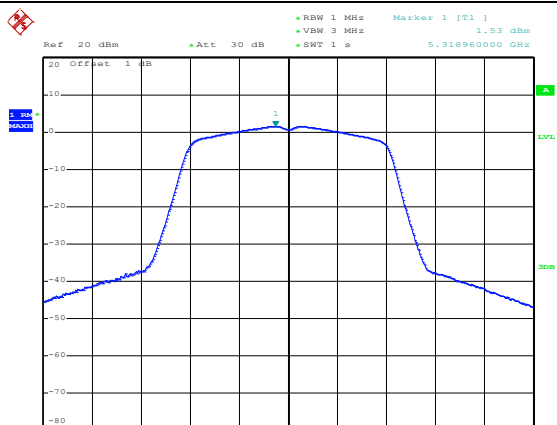
802.11n-HT20-Low	 Date: 12.SEP.2023 19:05:21
802.11n-HT20-Middle	 Date: 12.SEP.2023 19:05:35
802.11n-HT20-High	 Date: 12.SEP.2023 19:05:46

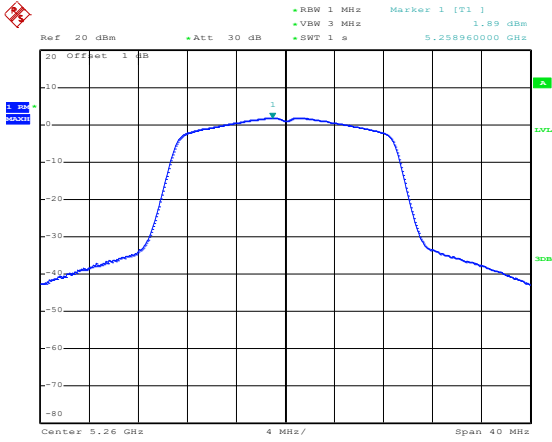
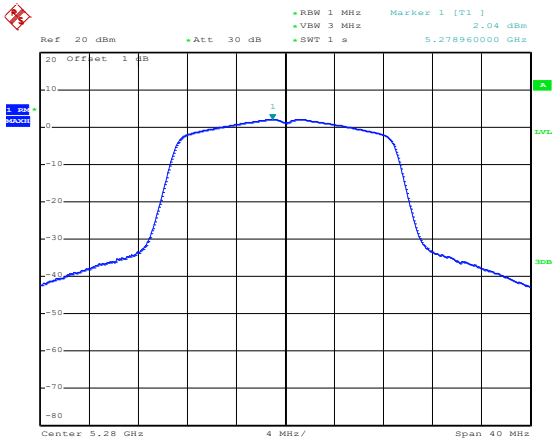
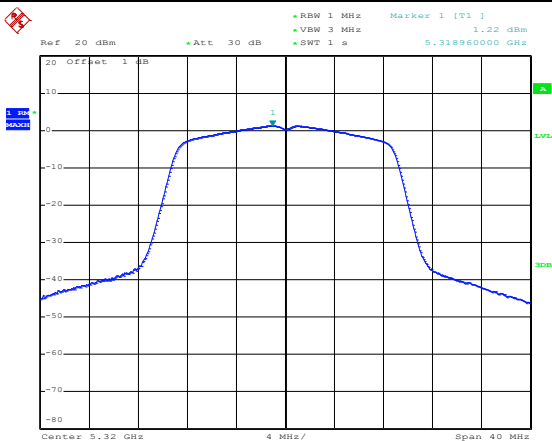
802.11n-HT40-Low	 Date: 12.SEP.2023 19:06:07
802.11n-HT40-High	 Date: 12.SEP.2023 19:06:24
802.11ac-VHT20-Low	 Date: 12.SEP.2023 19:07:01

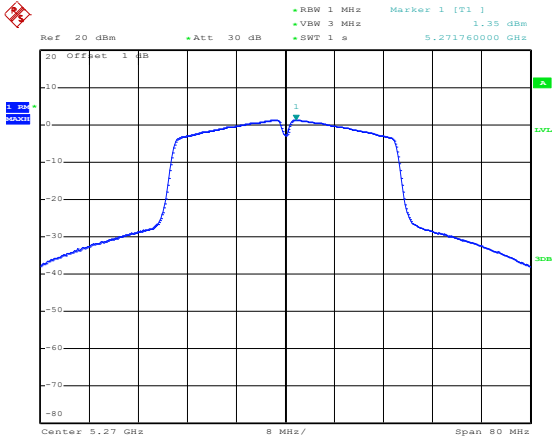
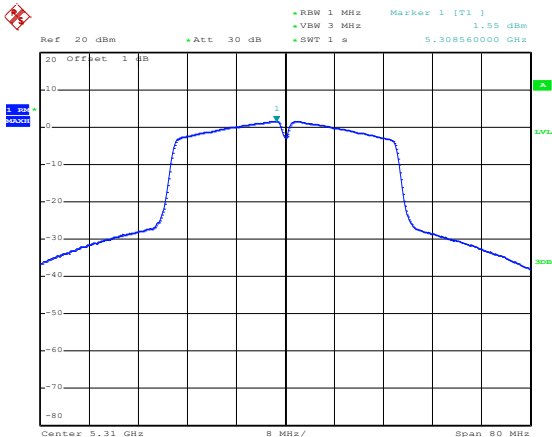
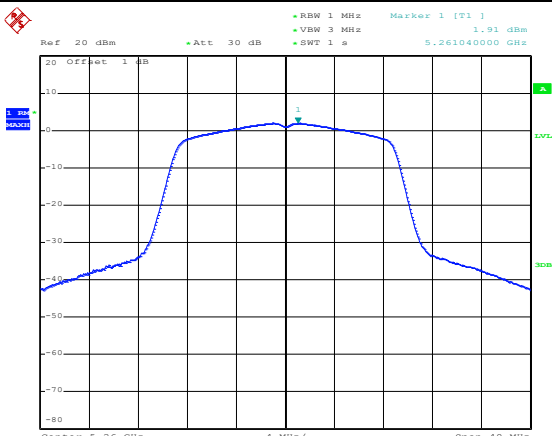
802.11ac-VHT20-Middle	 Date: 12.SEP.2023 19:07:12
802.11ac-VHT20-High	 Date: 12.SEP.2023 19:07:22
802.11ac-VHT40-Low	 Date: 12.SEP.2023 19:07:43

802.11ac-VHT40-High	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VSW: 3 MHz, SWT: 1 s, Marker 1 [T1]: 5.23160000 GHz, 2.48 dBm Center: 5.23 GHz, Span: 80 MHz Date: 12.SEP.2023 19:08:00
802.11ac-VHT80-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VSW: 3 MHz, SWT: 1 s, Marker 1 [T1]: 5.212240000 GHz, -3.80 dBm Center: 5.21 GHz, Span: 160 MHz Date: 12.SEP.2023 19:08:40

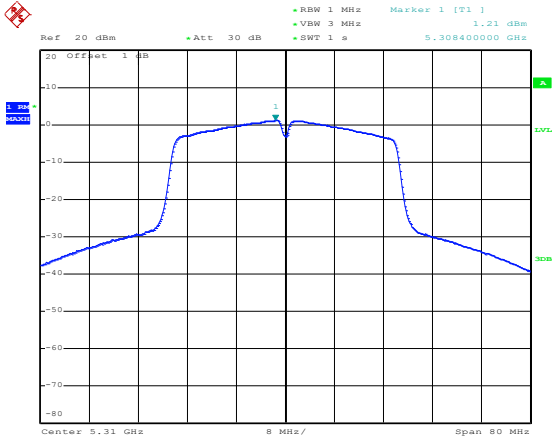
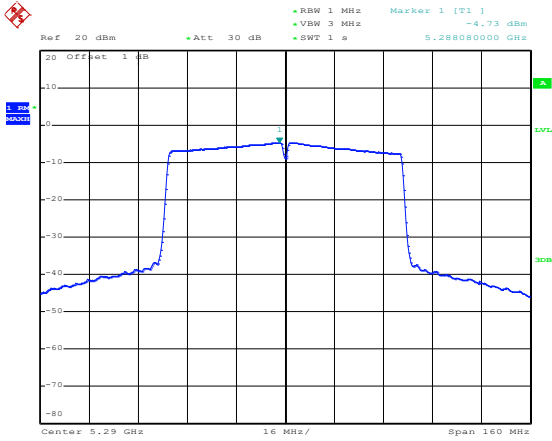
5250-5350MHz

802.11a-Low	 Ref: 20 dBm Att: 30 dB RBW 1 MHz VBW 3 MHz SWF 1 a Marker 1 [T1] 2.11 dBm 5.26120000 GHz 20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.26 GHz 4 MHz/ Span 40 MHz Date: 12.SEP.2023 20:04:02
802.11a-Middle	 Ref: 20 dBm Att: 30 dB RBW 1 MHz VBW 3 MHz SWF 1 a Marker 1 [T1] 2.02 dBm 5.27880000 GHz 20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.28 GHz 4 MHz/ Span 40 MHz Date: 12.SEP.2023 20:04:16
802.11a-High	 Ref: 20 dBm Att: 30 dB RBW 1 MHz VBW 3 MHz SWF 1 a Marker 1 [T1] 1.53 dBm 5.318960000 GHz 20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.32 GHz 4 MHz/ Span 40 MHz Date: 12.SEP.2023 20:04:25

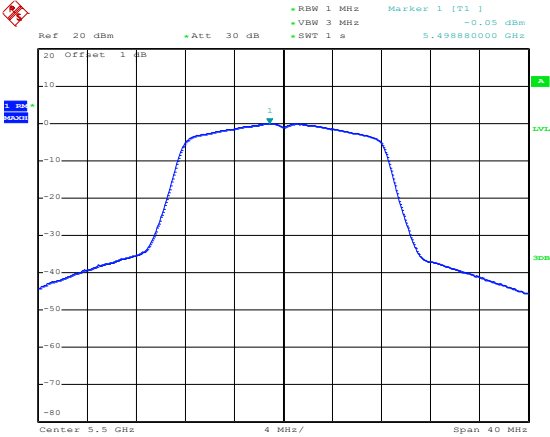
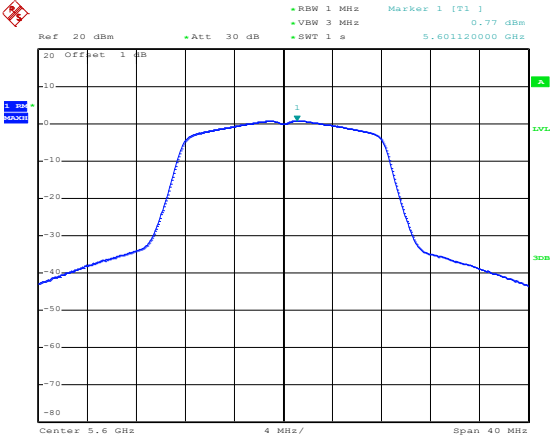
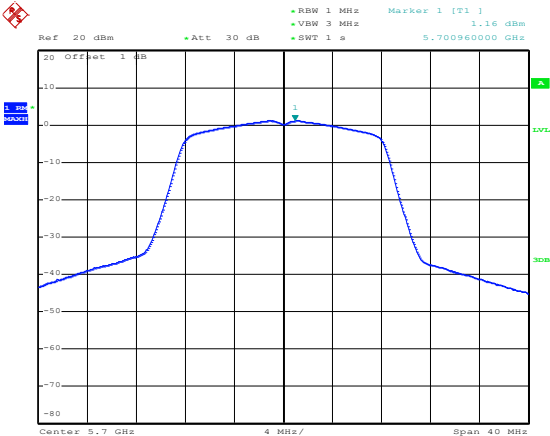
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] 1.89 dBm VBW 3 MHz SWT 1 s 5.258960000 GHz Center 5.26 GHz 4 MHz/ Span 40 MHz Date: 12.SEP.2023 20:04:43
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] 2.04 dBm VBW 3 MHz SWT 1 s 5.278960000 GHz Center 5.28 GHz 4 MHz/ Span 40 MHz Date: 12.SEP.2023 20:04:53
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] 1.22 dBm VBW 3 MHz SWT 1 s 5.318960000 GHz Center 5.32 GHz 4 MHz/ Span 40 MHz Date: 12.SEP.2023 20:05:07

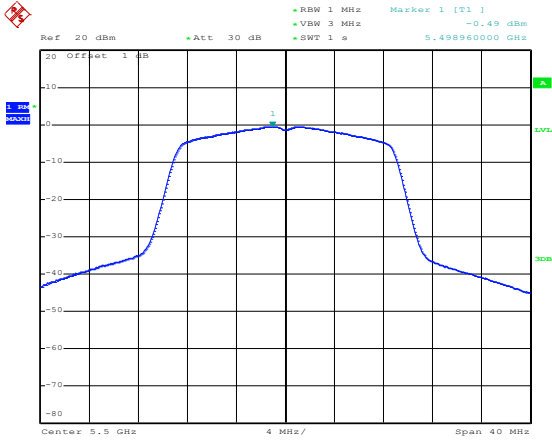
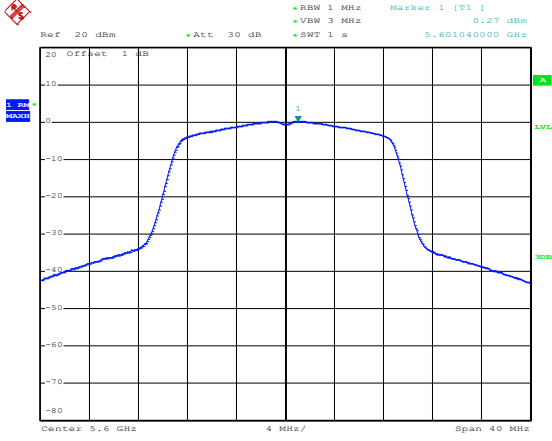
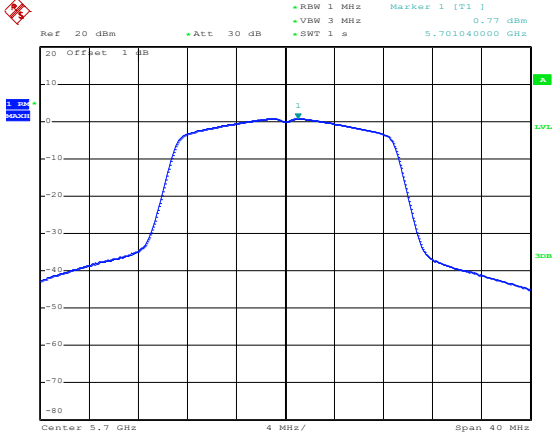
802.11n-HT40-Low	 Date: 12.SEP.2023 20:05:29
802.11n-HT40-High	 Date: 12.SEP.2023 20:05:44
802.11ac-VHT20-Low	 Date: 12.SEP.2023 20:06:06

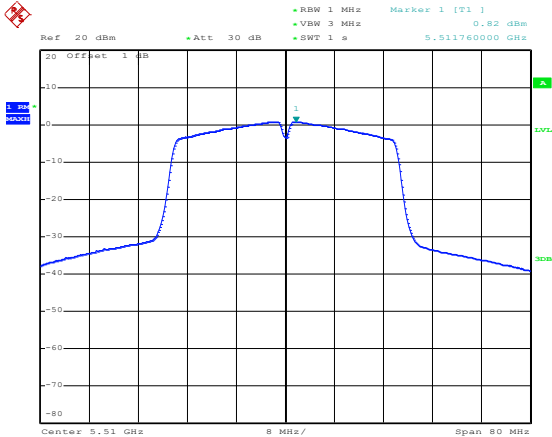
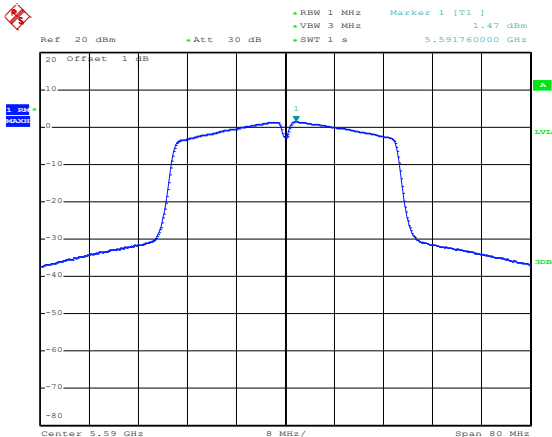
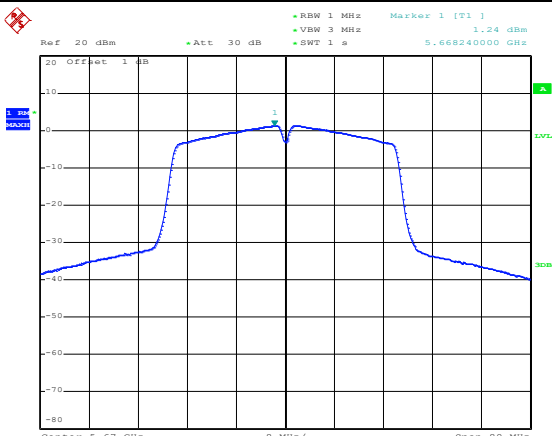
802.11ac-VHT20-Middle	Date: 12.SEP.2023 20:06:16
802.11ac-VHT20-High	Date: 12.SEP.2023 20:06:28
802.11ac-VHT40-Low	Date: 12.SEP.2023 20:06:50

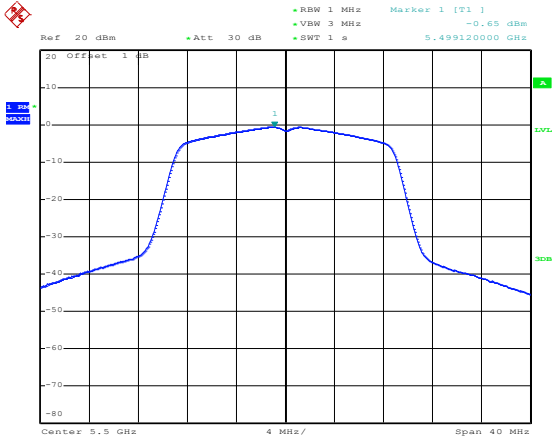
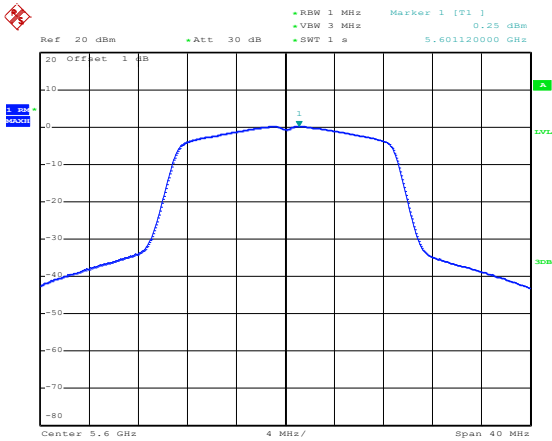
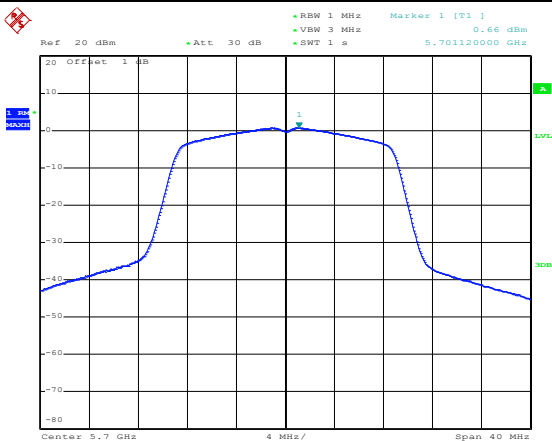
802.11ac-VHT40-High	 Date: 12.SEP.2023 20:07:00
802.11ac-VHT80-Low	 Date: 12.SEP.2023 20:07:21

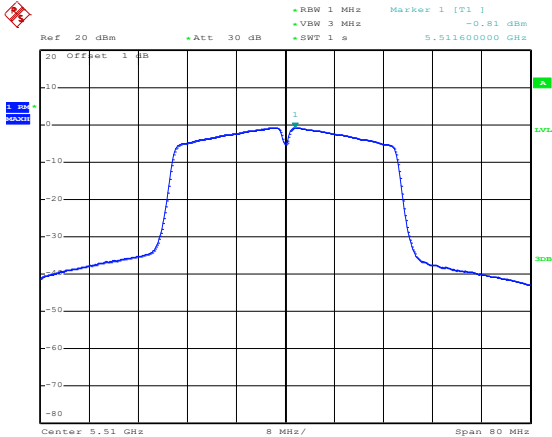
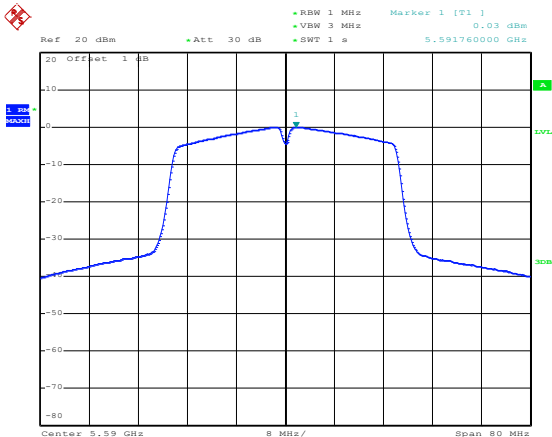
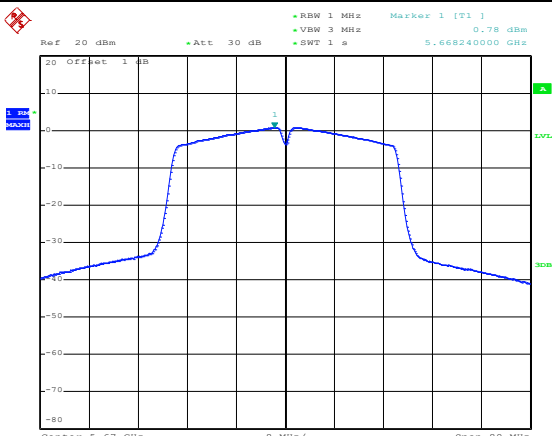
5470-5725MHz

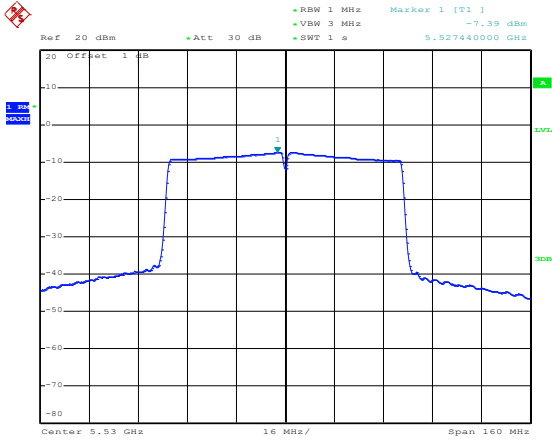
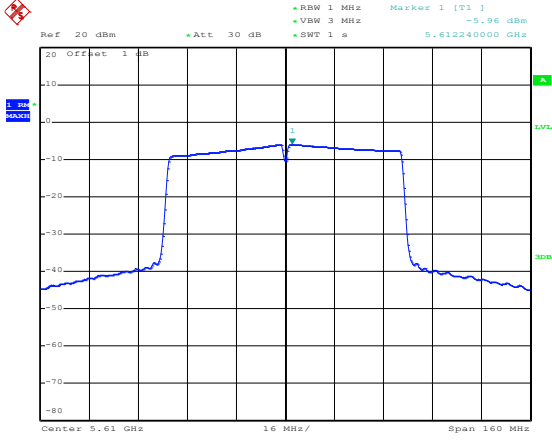
802.11a-Low	 Date: 13.SEP.2023 15:44:46
802.11a-Middle	 Date: 13.SEP.2023 15:45:00
802.11a-High	 Date: 13.SEP.2023 15:45:25

802.11n-HT20-Low	 Date: 13.SEP.2023 15:51:21
802.11n-HT20-Middle	 Date: 13.SEP.2023 15:51:47
802.11n-HT20-High	 Date: 13.SEP.2023 15:51:57

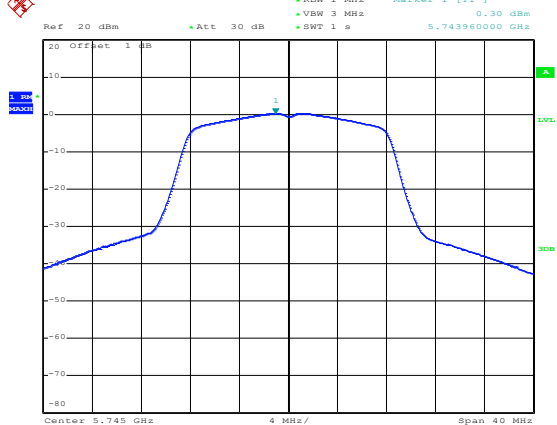
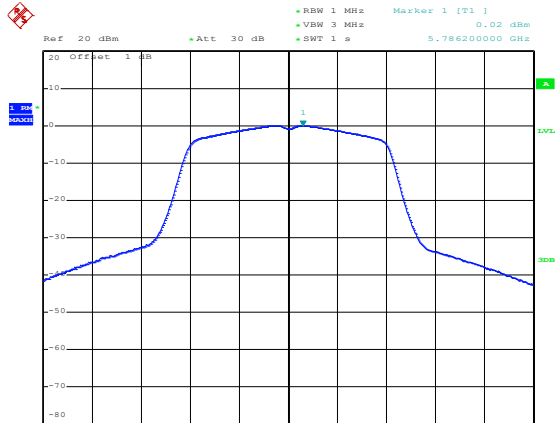
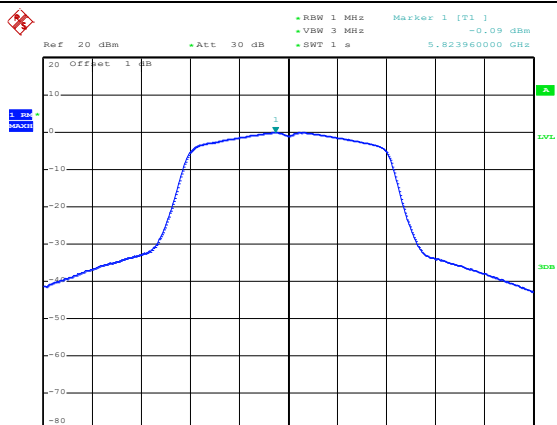
802.11n-HT40-Low	 Date: 13.SEP.2023 15:55:36
802.11n-HT40-Middle	 Date: 13.SEP.2023 15:55:52
802.11n-HT40-High	 Date: 13.SEP.2023 15:56:04

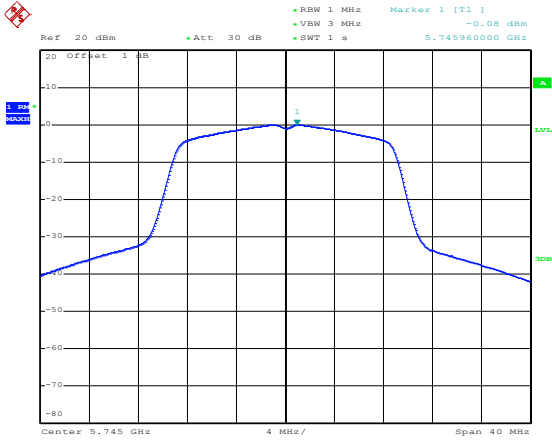
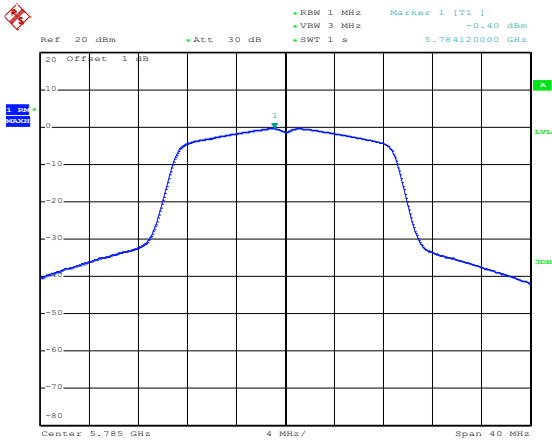
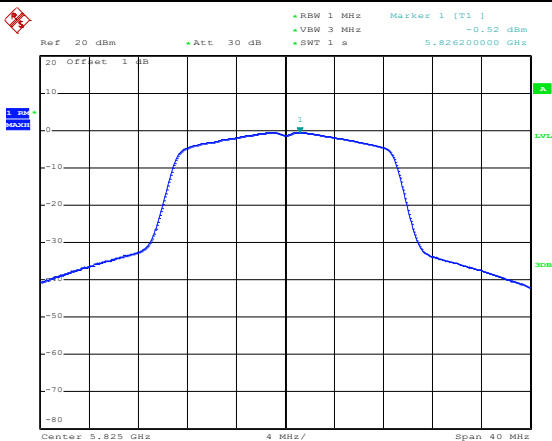
802.11ac-VHT20-Low	 Date: 13.SEP.2023 15:56:30
802.11ac-VHT20-Middle	 Date: 13.SEP.2023 15:56:43
802.11ac-VHT20-High	 Date: 13.SEP.2023 15:57:03

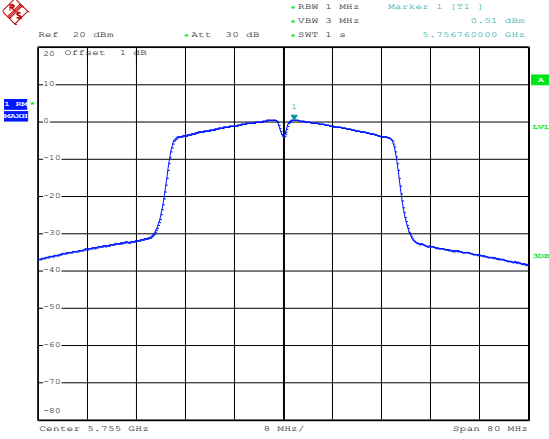
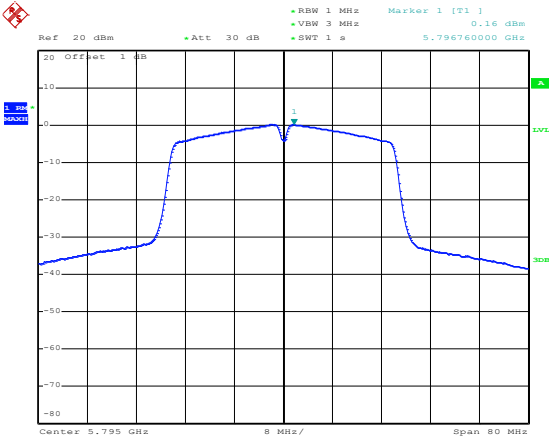
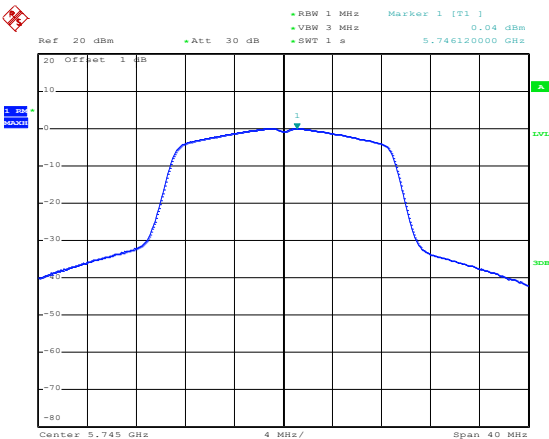
802.11ac-VHT40-Low	 Date: 13.SEP.2023 15:57:33
802.11ac-VHT40-Middle	 Date: 13.SEP.2023 15:57:52
802.11ac-VHT40-High	 Date: 13.SEP.2023 15:58:08

802.11ac-VHT80-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -7.39 dBm VSW 3 MHz SWT 1 s 5.527440000 GHz 20 Offset 1 dB Center 5.53 GHz 16 MHz/ Span 160 MHz Date: 13.SEP.2023 15:58:32
802.11ac-VHT80-High	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -5.96 dBm VSW 3 MHz SWT 1 s 5.612240000 GHz 20 Offset 1 dB Center 5.61 GHz 16 MHz/ Span 160 MHz Date: 13.SEP.2023 15:58:47

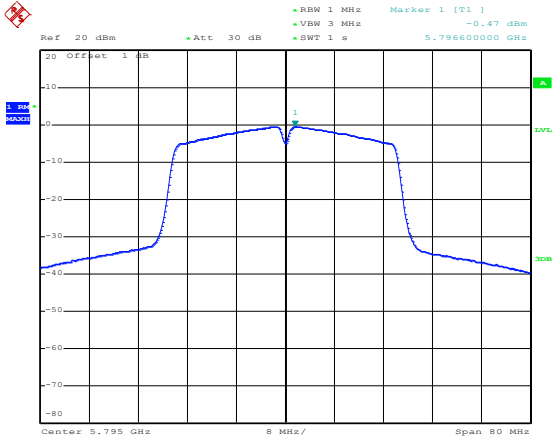
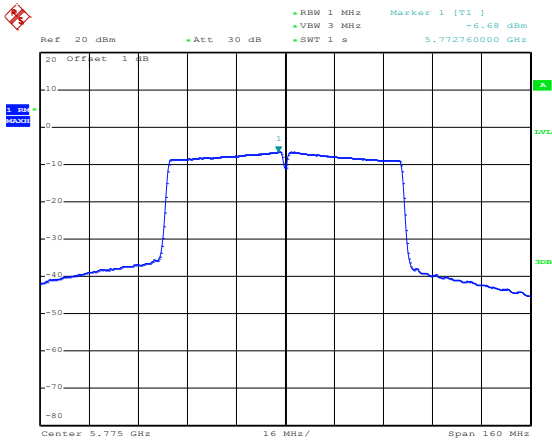
5725-5850MHz

802.11a-Low	 Ref: 20 dBm Att: 30 dB RBW 1 MHz VBW 3 MHz SWF 1 a Marker 1 [T1] 0.30 dBm 5.74396000 GHz Center 5.745 GHz 4 MHz/ Span 40 MHz Date: 13.SEP.2023 16:07:03
802.11a-Middle	 Ref: 20 dBm Att: 30 dB RBW 1 MHz VBW 3 MHz SWF 1 a Marker 1 [T1] 0.02 dBm 5.78620000 GHz Center 5.785 GHz 4 MHz/ Span 40 MHz Date: 13.SEP.2023 16:07:20
802.11a-High	 Ref: 20 dBm Att: 30 dB RBW 1 MHz VBW 3 MHz SWF 1 a Marker 1 [T1] -0.09 dBm 5.82396000 GHz Center 5.825 GHz 4 MHz/ Span 40 MHz Date: 13.SEP.2023 16:07:34

802.11n-HT20-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -0.08 dBm, 5.745960000 GHz Center: 5.745 GHz, Span: 40 MHz Date: 13.SEP.2023 16:08:41
802.11n-HT20-Middle	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -0.40 dBm, 5.784120000 GHz Center: 5.785 GHz, Span: 40 MHz Date: 13.SEP.2023 16:08:05
802.11n-HT20-High	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -0.52 dBm, 5.826200000 GHz Center: 5.825 GHz, Span: 40 MHz Date: 13.SEP.2023 16:08:18

802.11n-HT40-Low	 Date: 13.SEP.2023 16:09:03
802.11n-HT40-High	 Date: 13.SEP.2023 16:09:14
802.11ac-VHT20-Low	 Date: 13.SEP.2023 16:09:37

802.11ac-VHT20-Middle	Date: 13.SEP.2023 16:09:47
802.11ac-VHT20-High	Date: 13.SEP.2023 16:09:56
802.11ac-VHT40-Low	Date: 13.SEP.2023 16:10:13

802.11ac-VHT40-High	 Date: 13.SEP.2023 16:10:28
802.11ac-VHT80-Low	 Date: 13.SEP.2023 16:10:57

APPENDIX B

Emission Bandwidth and Occupied Bandwidth

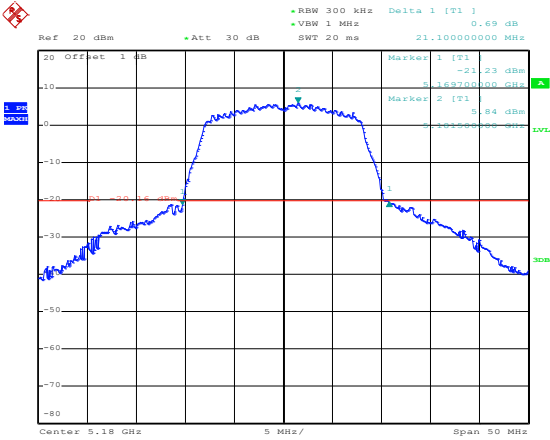
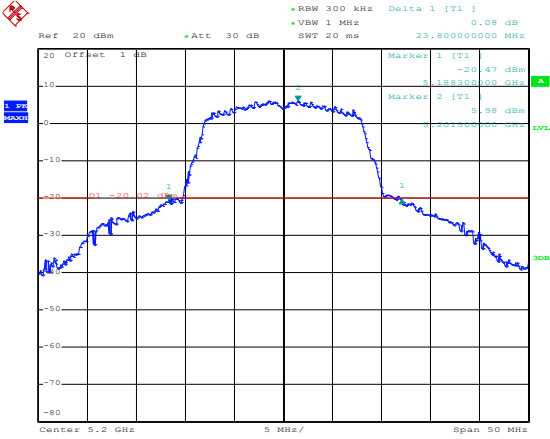
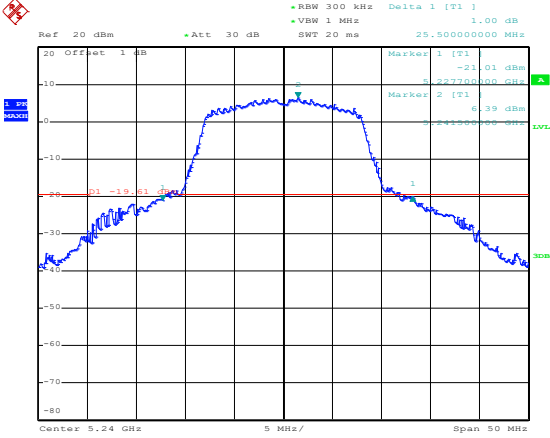
U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	21.10	17.10	Pass
	5200	23.80	17.20	Pass
	5240	25.50	17.10	Pass
802.11n-HT20	5180	21.60	17.90	Pass
	5200	23.50	17.90	Pass
	5240	26.60	18.00	Pass
802.11n-HT40	5190	41.00	37.20	Pass
	5230	57.80	37.60	Pass
802.11ac-VHT20	5180	20.60	17.90	Pass
	5200	20.70	17.90	Pass
	5240	24.20	17.80	Pass
802.11ac-VHT40	5190	48.40	37.20	Pass
	5230	63.40	37.80	Pass
802.11ac-VHT80	5210	110.40	76.40	Pass

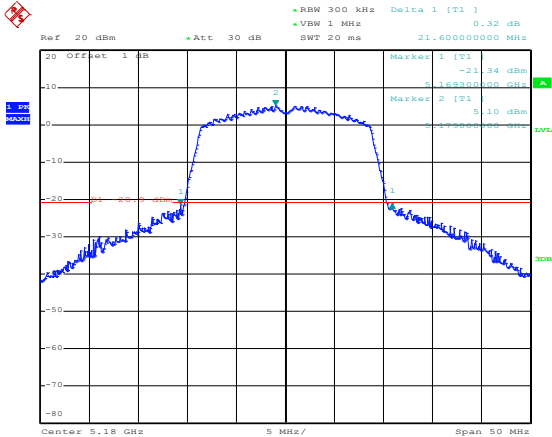
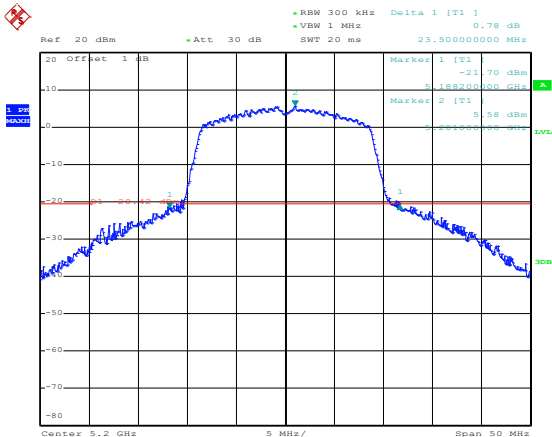
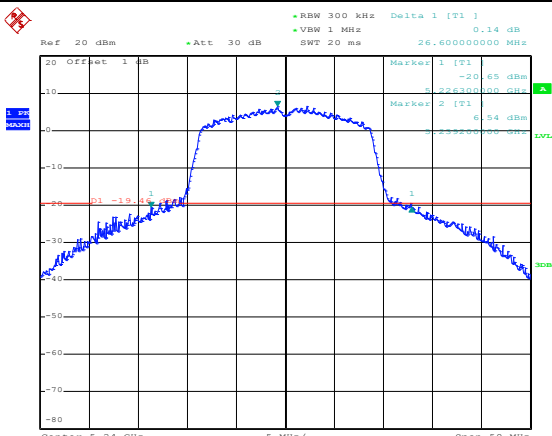
U-NII-2A: 5250-5350MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5260	22.20	17.10	Pass
	5280	21.60	16.90	Pass
	5320	20.60	16.80	Pass
802.11n-HT20	5260	23.50	17.90	Pass
	5280	22.20	17.80	Pass
	5320	21.80	17.80	Pass
802.11n-HT40	5270	50.20	37.20	Pass
	5310	43.00	36.80	Pass
802.11ac-VHT20	5260	22.50	17.80	Pass
	5280	22.80	17.80	Pass
	5320	20.90	17.80	Pass
802.11ac-VHT40	5270	40.80	37.20	Pass
	5310	44.20	36.80	Pass
802.11ac-VHT80	5290	99.20	76.40	Pass

U-NII-2C: 5470-5725MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5500	20.70	16.80	Pass
	5580	20.60	16.90	Pass
	5700	20.40	16.80	Pass
802.11n-HT20	5500	20.60	17.80	Pass
	5580	20.60	17.80	Pass
	5700	20.70	17.80	Pass
802.11n-HT40	5510	40.60	37.00	Pass
	5550	40.40	36.80	Pass
	5670	40.60	36.80	Pass
802.11ac-VHT20	5500	20.40	17.80	Pass
	5580	20.80	17.80	Pass
	5700	20.70	17.80	Pass
802.11ac-VHT40	5510	40.20	36.80	Pass
	5550	40.60	36.60	Pass
	5670	41.00	36.80	Pass
802.11ac-VHT80	5530	82.80	76.00	Pass
	5610	82.00	76.00	Pass

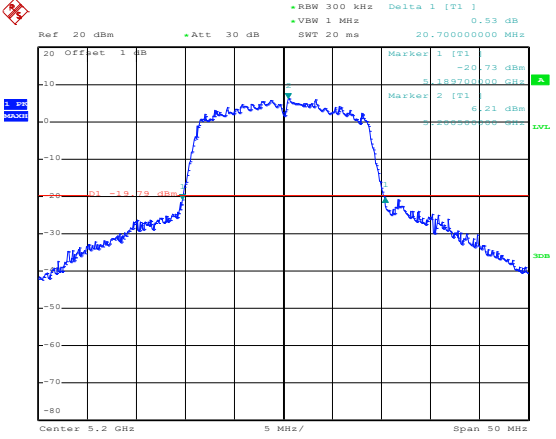
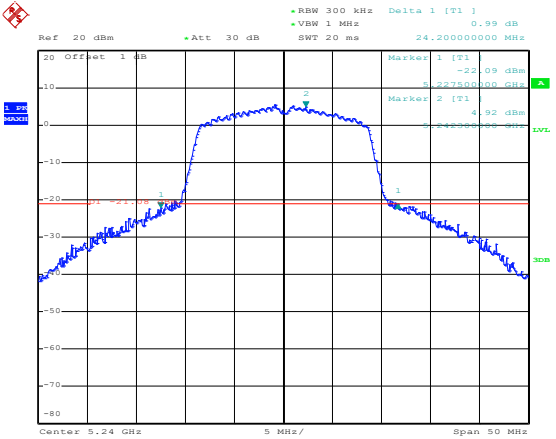
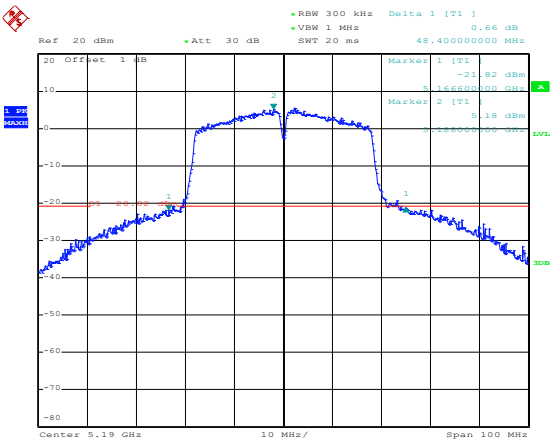
U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.60	17.00	≥500
	5785	16.50	16.90	≥500
	5825	16.60	17.00	≥500
802.11n-HT20	5745	17.80	17.80	≥500
	5785	17.80	17.90	≥500
	5825	17.80	17.80	≥500
802.11n-HT40	5755	36.40	36.80	≥500
	5795	36.40	36.80	≥500
802.11ac-VHT20	5745	17.70	17.80	≥500
	5785	17.60	17.80	≥500
	5825	17.80	17.90	≥500
802.11ac-VHT40	5755	36.40	36.60	≥500
	5795	36.40	36.60	≥500
802.11ac-VHT80	5775	77.60	76.00	≥500

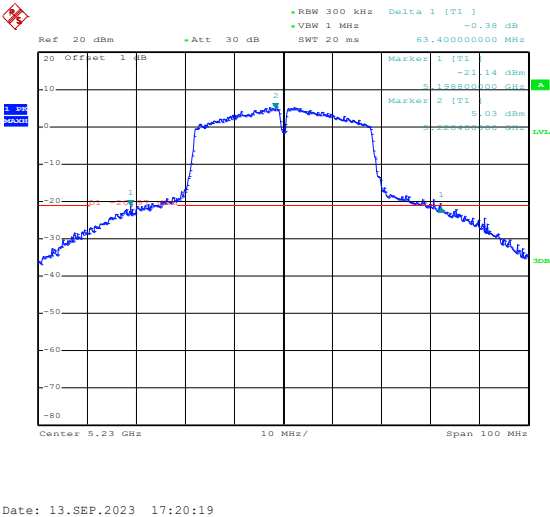
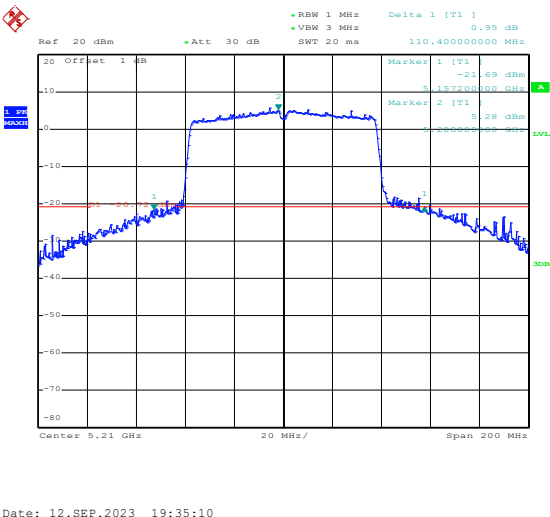
26 dB Bandwidth MHz
5150-5250MHz

802.11a-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 0.69 dB VBW 1 MHz SWT 20 ms 21.10000000 MHz Marker 1 [T1] -21.23 dBm Marker 2 [T1] 5.84 dBm Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 19:13:15
802.11a-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 0.08 dB VBW 1 MHz SWT 20 ms 23.80000000 MHz Marker 1 [T1] -20.47 dBm Marker 2 [T1] 5.98 dBm Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 19:15:17
802.11a-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 1.00 dB VBW 1 MHz SWT 20 ms 25.50000000 MHz Marker 1 [T1] -21.01 dBm Marker 2 [T1] 6.39 dBm Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 19:16:10

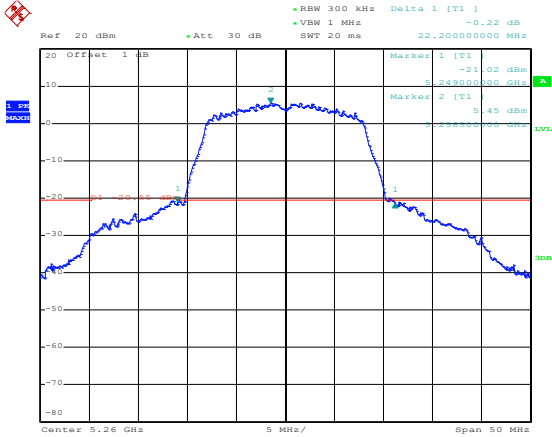
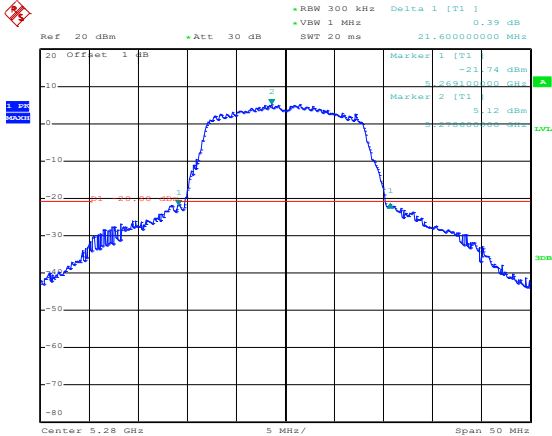
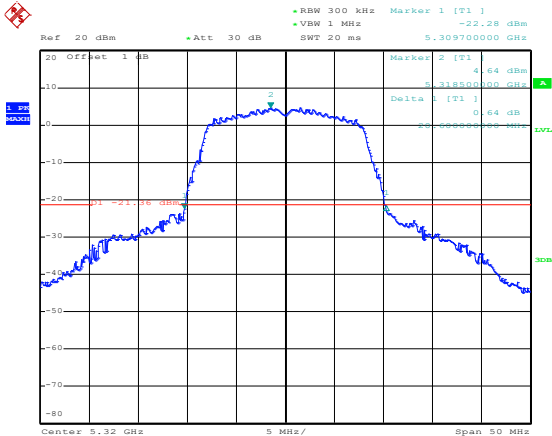
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 0.32 dB VSW 1 MHz SWT 20 ms 21.600000000 MHz Marker 1 [T1] -21.34 dBm 5.183000000 GHz Marker 2 [T1] -21.34 dBm 5.183000000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 19:19:35
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 0.78 dB VSW 1 MHz SWT 20 ms 23.500000000 MHz Marker 1 [T1] -21.70 dBm 5.188200000 GHz Marker 2 [T1] -21.70 dBm 5.188200000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 19:20:47
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 0.14 dB VSW 1 MHz SWT 20 ms 26.600000000 MHz Marker 1 [T1] -20.65 dBm 5.226300000 GHz Marker 2 [T1] -20.65 dBm 5.226300000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 19:21:43

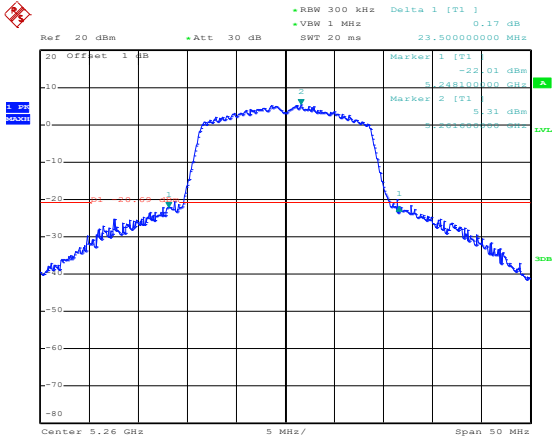
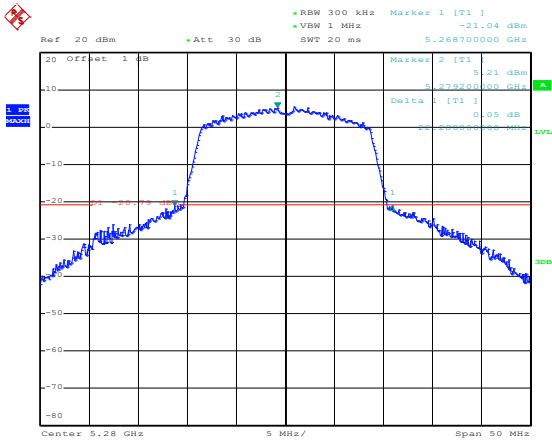
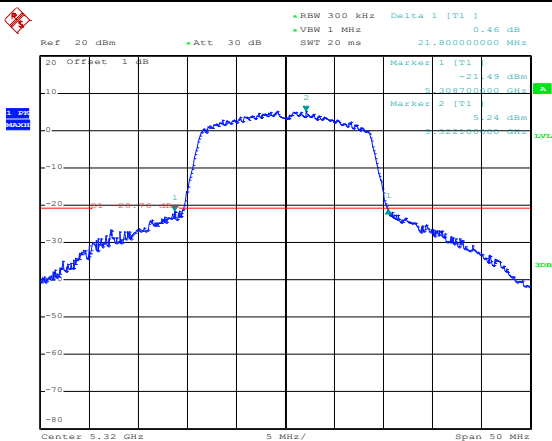
Channel	Frequency (GHz)	Power (dBm)	Bandwidth (MHz)	Attenuation (dB)	SWT (ms)	Delta 1 (T1) (dB)	Date	Time
802.11n-HT40-Low	5.19	-24.21	40	30	20	41.00000000	13.SEP.2023	17:21:13
802.11n-HT40-High	5.23	-21.43	40	30	20	57.80000000	13.SEP.2023	17:22:01
802.11ac-VHT20-Low	5.18	-19.49	20	30	20	20.60000000	12.SEP.2023	19:27:58

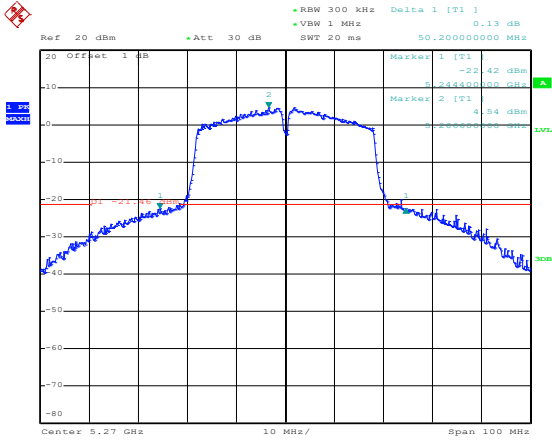
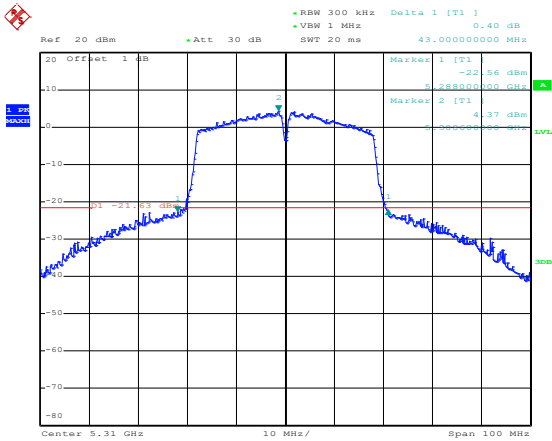
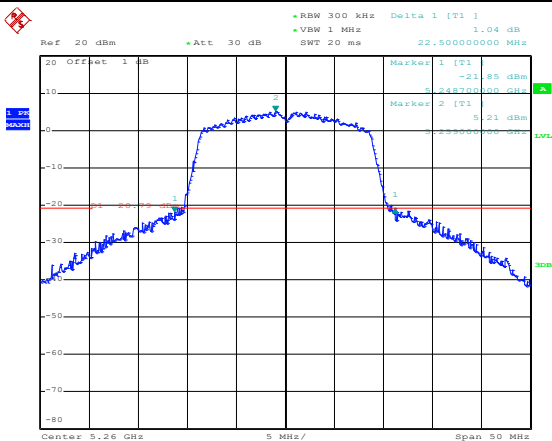
802.11ac-VHT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 0.53 dB VSW 1 MHz SWT 20 ms 20.70000000 MHz Marker 1 [T1] -20.73 dBm 20.70000000 GHz Marker 2 [T1] -20.73 dBm 20.70000000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 19:28:56
802.11ac-VHT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 0.99 dB VSW 1 MHz SWT 20 ms 24.20000000 MHz Marker 1 [T1] -22.09 dBm 24.20000000 GHz Marker 2 [T1] -22.09 dBm 24.20000000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 19:30:43
802.11ac-VHT40-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 0.66 dB VSW 1 MHz SWT 20 ms 48.40000000 MHz Marker 1 [T1] -21.82 dBm 48.40000000 GHz Marker 2 [T1] -21.82 dBm 48.40000000 GHz Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 17:19:11

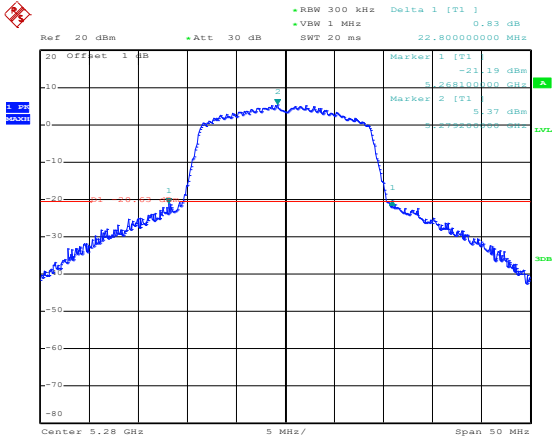
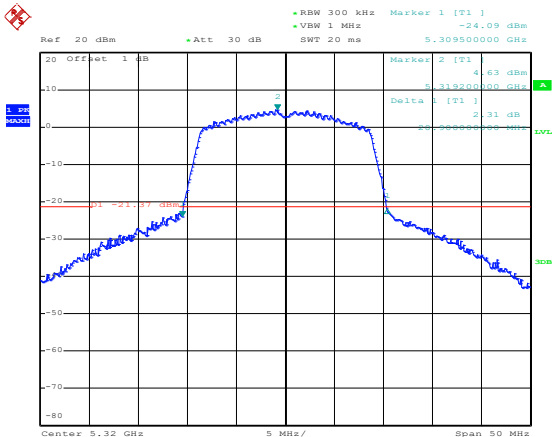
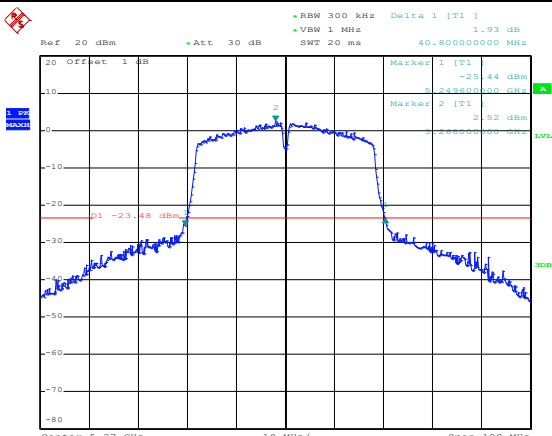
802.11ac-VHT40-High	 Date: 13.SEP.2023 17:20:19
802.11ac-VHT80-Low	 Date: 12.SEP.2023 19:35:10

5250-5350MHz

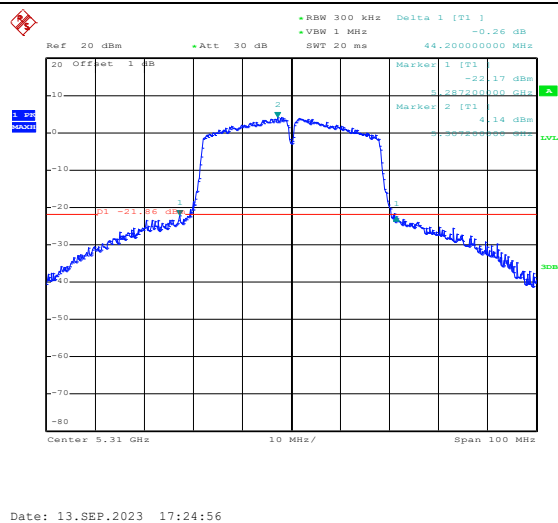
802.11a-Low	 Date: 13.SEP.2023 10:23:14
802.11a-Middle	 Date: 13.SEP.2023 10:24:20
802.11a-High	 Date: 13.SEP.2023 10:25:44

802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 0.17 dB VSW 1 MHz SWT 20 ms 23.500000000 MHz Marker 1 [T1] -22.01 dBm 5.268100000 GHz Marker 2 [T1] -30.31 dBm 5.268100000 GHz Delta 1 [T1] 0.17 dB Center 5.26 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 10:26:58
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 0.17 dB VSW 1 MHz SWT 20 ms 5.268700000 MHz Marker 1 [T1] -21.04 dBm 5.282000000 GHz Marker 2 [T1] -30.31 dBm 5.282000000 GHz Delta 1 [T1] 0.17 dB Center 5.28 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 10:28:37
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 0.46 dB VSW 1 MHz SWT 20 ms 21.800000000 MHz Marker 1 [T1] -21.49 dBm 5.328700000 GHz Marker 2 [T1] -30.31 dBm 5.328700000 GHz Delta 1 [T1] 0.46 dB Center 5.32 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 10:31:09

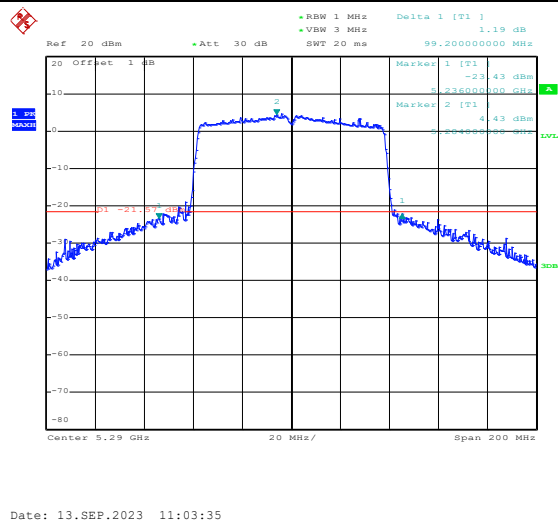
802.11n-HT40-Low	 Date: 13.SEP.2023 17:23:10
802.11n-HT40-High	 Date: 13.SEP.2023 17:23:42
802.11ac-VHT20-Low	 Date: 13.SEP.2023 10:50:09

802.11ac-VHT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 0.83 dB VSW 1 MHz SWT 20 ms 22.800000000 MHz Marker 1 [T1] -21.19 dBm Marker 2 [T1] -24.09 dBm Delta 1 [T1] 2.31 dB Center 5.28 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 10:51:15
802.11ac-VHT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] -24.09 dBm VSW 1 MHz SWT 20 ms 5.309500000 GHz Marker 2 [T1] 4.63 dBm Delta 1 [T1] 2.31 dB Delta 2 [T1] 2.31 dB Center 5.32 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 10:53:51
802.11ac-VHT40-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Delta 1 [T1] 1.93 dB VSW 1 MHz SWT 20 ms 40.800000000 MHz Marker 1 [T1] -25.44 dBm Marker 2 [T1] -23.48 dBm Delta 1 [T1] 1.93 dB Center 5.27 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 17:24:23

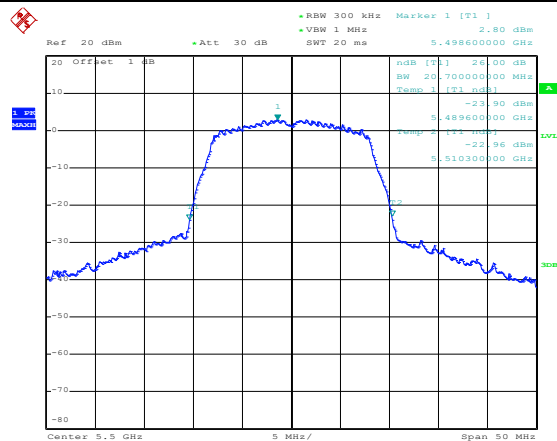

802.11ac-VHT40-High



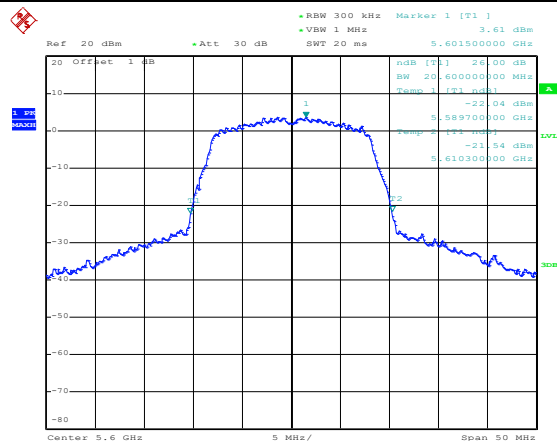

802.11ac-VHT80-Low



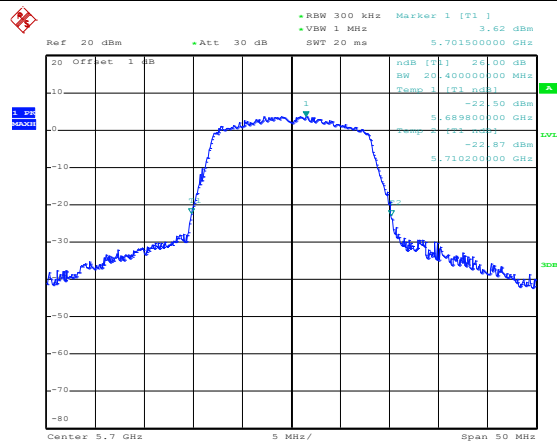

5470-5725MHz



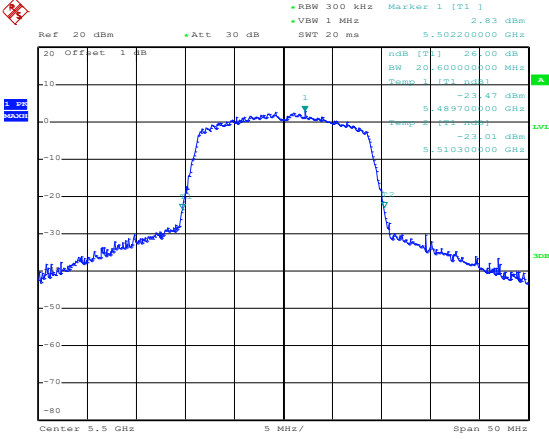
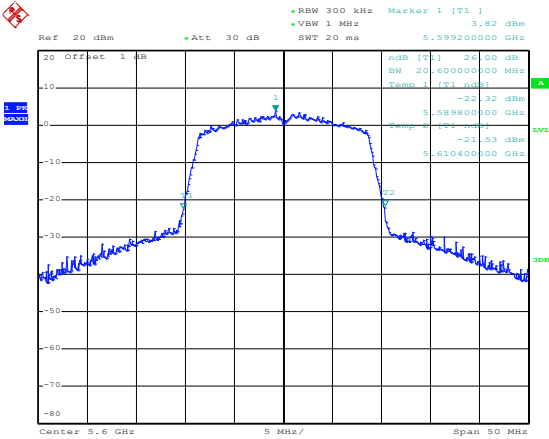
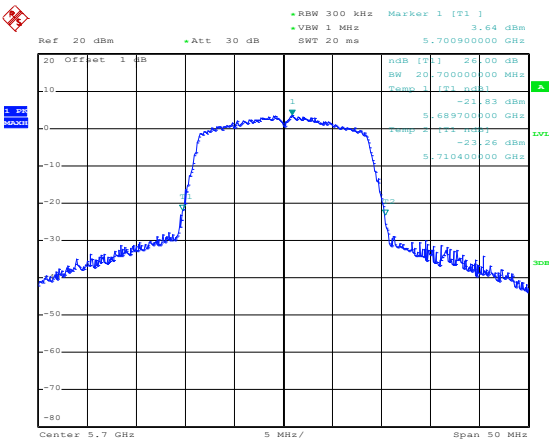
Date: 13.SEP.2023 16:42:27



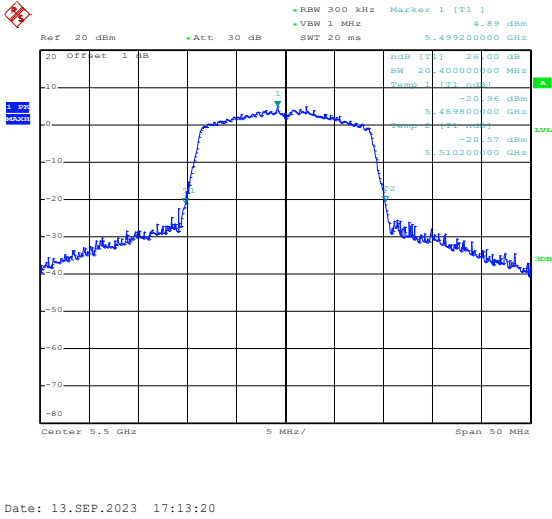
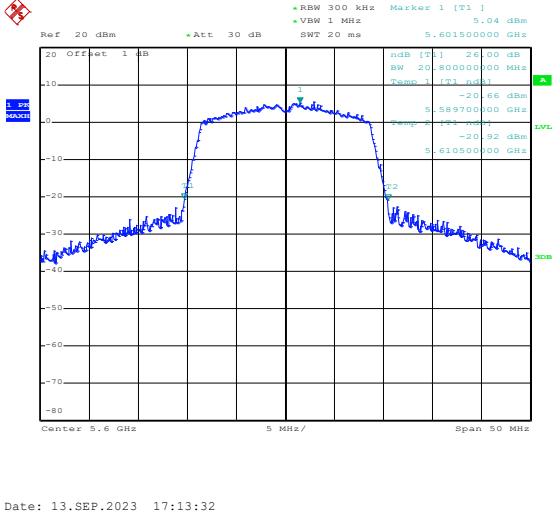
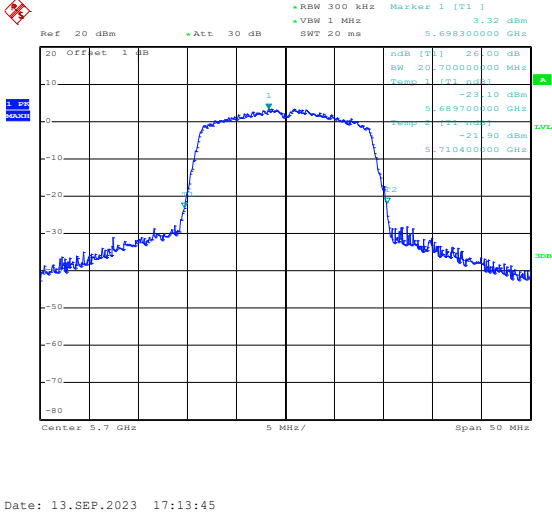
Date: 13.SEP.2023 16:58:39

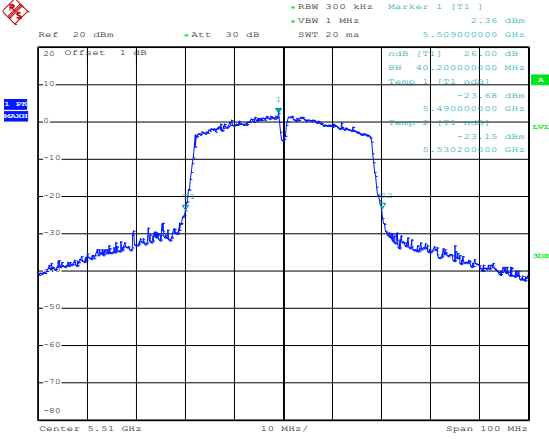
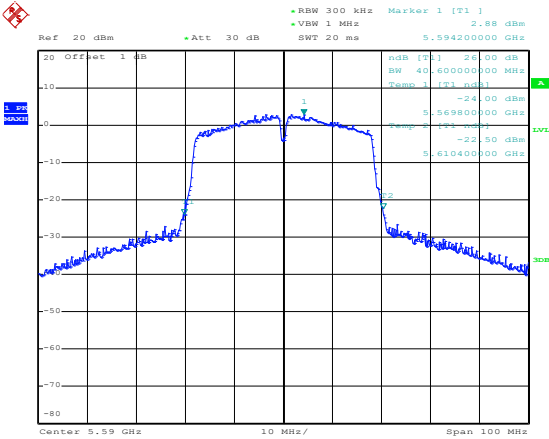
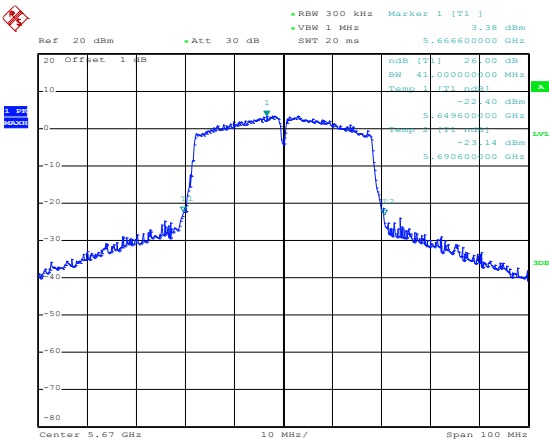


Date: 13.SEP.2023 16:59:02

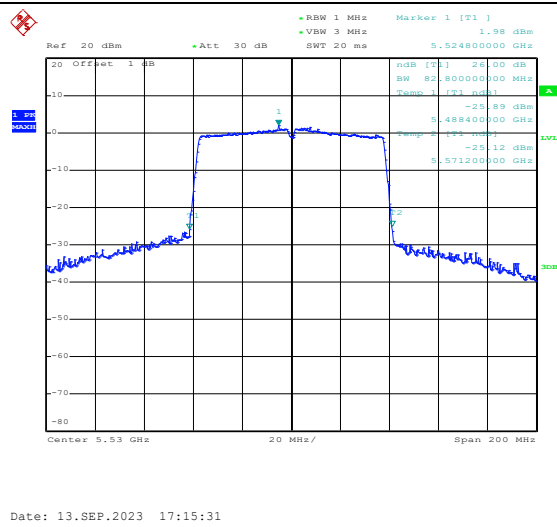
802.11n-HT20-Low	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 2.83 dBm VSW 1 MHz SWT 20 ms 5.502200000 GHz 20 Offset 1 dB 1 -23.47 dBm 5.489700000 GHz 2 -23.01 dBm 5.510300000 GHz Center 5.5 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 16:59:29
802.11n-HT20-Middle	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 3.82 dBm VSW 1 MHz SWT 20 ms 5.599200000 GHz 20 Offset 1 dB 1 -22.32 dBm 5.589800000 GHz 2 -21.53 dBm 5.610400000 GHz Center 5.6 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 16:59:42
802.11n-HT20-High	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 3.64 dBm VSW 1 MHz SWT 20 ms 5.700900000 GHz 20 Offset 1 dB 1 -21.83 dBm 5.689700000 GHz 2 -23.26 dBm 5.710400000 GHz Center 5.7 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 16:59:58

802.11n-HT40-Low	Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 0.36 dBm •VSW 1 MHz SWT 20 ms 5.507800000 GHz 20 Offset 1 dB n dB [T1] 24.00 dB BW 40.60000000 MHz Temp 1 [T1] n dB -24.80 dBm 5.489800000 GHz -25.11 dBm 5.530400000 GHz Center 5.51 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 17:12:02
802.11n-HT40-Middle	Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 3.03 dBm •VSW 1 MHz SWT 20 ms 5.592400000 GHz 20 Offset 1 dB n dB [T1] 24.00 dB BW 40.40000000 MHz Temp 1 [T1] n dB -23.30 dBm 5.569800000 GHz -22.98 dBm 5.610200000 GHz Center 5.59 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 17:12:21
802.11n-HT40-High	Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] 4.90 dBm •VSW 1 MHz SWT 20 ms 5.672200000 GHz 20 Offset 1 dB n dB [T1] 24.00 dB BW 40.60000000 MHz Temp 1 [T1] n dB -21.29 dBm 5.649800000 GHz -21.26 dBm 5.690400000 GHz Center 5.67 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 17:12:48

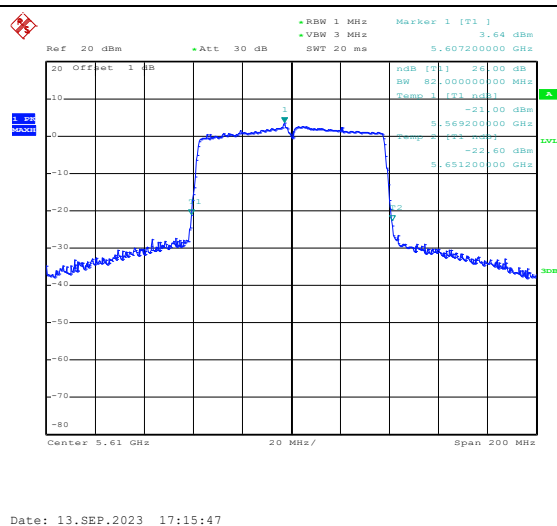
802.11ac-VHT20-Low	 Date: 13.SEP.2023 17:13:20
802.11ac-VHT20-Middle	 Date: 13.SEP.2023 17:13:32
802.11ac-VHT20-High	 Date: 13.SEP.2023 17:13:45

802.11ac-VHT40-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz SWT 20 ms Marker 1 [T1] 2.36 dBm <table><tr><td>ndB [T1]</td><td>-23.68 dBm</td></tr><tr><td>SW</td><td>40.20000000 MHz</td></tr><tr><td>Temp 1 [T1]</td><td>5.509000000 GHz</td></tr><tr><td>ndB [T1]</td><td>-23.68 dBm</td></tr><tr><td>SW</td><td>40.20000000 MHz</td></tr><tr><td>Temp 1 [T1]</td><td>5.509000000 GHz</td></tr><tr><td>ndB [T1]</td><td>-23.15 dBm</td></tr><tr><td>SW</td><td>40.20000000 MHz</td></tr><tr><td>Temp 1 [T1]</td><td>5.509000000 GHz</td></tr></table> Center 5.51 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 17:14:09	ndB [T1]	-23.68 dBm	SW	40.20000000 MHz	Temp 1 [T1]	5.509000000 GHz	ndB [T1]	-23.68 dBm	SW	40.20000000 MHz	Temp 1 [T1]	5.509000000 GHz	ndB [T1]	-23.15 dBm	SW	40.20000000 MHz	Temp 1 [T1]	5.509000000 GHz
ndB [T1]	-23.68 dBm																		
SW	40.20000000 MHz																		
Temp 1 [T1]	5.509000000 GHz																		
ndB [T1]	-23.68 dBm																		
SW	40.20000000 MHz																		
Temp 1 [T1]	5.509000000 GHz																		
ndB [T1]	-23.15 dBm																		
SW	40.20000000 MHz																		
Temp 1 [T1]	5.509000000 GHz																		
802.11ac-VHT40-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz SWT 20 ms Marker 1 [T1] 2.88 dBm <table><tr><td>ndB [T1]</td><td>-24.00 dBm</td></tr><tr><td>SW</td><td>40.60000000 MHz</td></tr><tr><td>Temp 1 [T1]</td><td>5.594200000 GHz</td></tr><tr><td>ndB [T1]</td><td>-24.00 dBm</td></tr><tr><td>SW</td><td>40.60000000 MHz</td></tr><tr><td>Temp 1 [T1]</td><td>5.594200000 GHz</td></tr><tr><td>ndB [T1]</td><td>-22.50 dBm</td></tr><tr><td>SW</td><td>40.60000000 MHz</td></tr><tr><td>Temp 1 [T1]</td><td>5.594200000 GHz</td></tr></table> Center 5.59 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 17:14:30	ndB [T1]	-24.00 dBm	SW	40.60000000 MHz	Temp 1 [T1]	5.594200000 GHz	ndB [T1]	-24.00 dBm	SW	40.60000000 MHz	Temp 1 [T1]	5.594200000 GHz	ndB [T1]	-22.50 dBm	SW	40.60000000 MHz	Temp 1 [T1]	5.594200000 GHz
ndB [T1]	-24.00 dBm																		
SW	40.60000000 MHz																		
Temp 1 [T1]	5.594200000 GHz																		
ndB [T1]	-24.00 dBm																		
SW	40.60000000 MHz																		
Temp 1 [T1]	5.594200000 GHz																		
ndB [T1]	-22.50 dBm																		
SW	40.60000000 MHz																		
Temp 1 [T1]	5.594200000 GHz																		
802.11ac-VHT40-High	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz SWT 20 ms Marker 1 [T1] 3.38 dBm <table><tr><td>ndB [T1]</td><td>-22.40 dBm</td></tr><tr><td>SW</td><td>41.00000000 MHz</td></tr><tr><td>Temp 1 [T1]</td><td>5.666600000 GHz</td></tr><tr><td>ndB [T1]</td><td>-22.40 dBm</td></tr><tr><td>SW</td><td>41.00000000 MHz</td></tr><tr><td>Temp 1 [T1]</td><td>5.666600000 GHz</td></tr><tr><td>ndB [T1]</td><td>-23.14 dBm</td></tr><tr><td>SW</td><td>41.00000000 MHz</td></tr><tr><td>Temp 1 [T1]</td><td>5.666600000 GHz</td></tr></table> Center 5.67 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 17:14:50	ndB [T1]	-22.40 dBm	SW	41.00000000 MHz	Temp 1 [T1]	5.666600000 GHz	ndB [T1]	-22.40 dBm	SW	41.00000000 MHz	Temp 1 [T1]	5.666600000 GHz	ndB [T1]	-23.14 dBm	SW	41.00000000 MHz	Temp 1 [T1]	5.666600000 GHz
ndB [T1]	-22.40 dBm																		
SW	41.00000000 MHz																		
Temp 1 [T1]	5.666600000 GHz																		
ndB [T1]	-22.40 dBm																		
SW	41.00000000 MHz																		
Temp 1 [T1]	5.666600000 GHz																		
ndB [T1]	-23.14 dBm																		
SW	41.00000000 MHz																		
Temp 1 [T1]	5.666600000 GHz																		

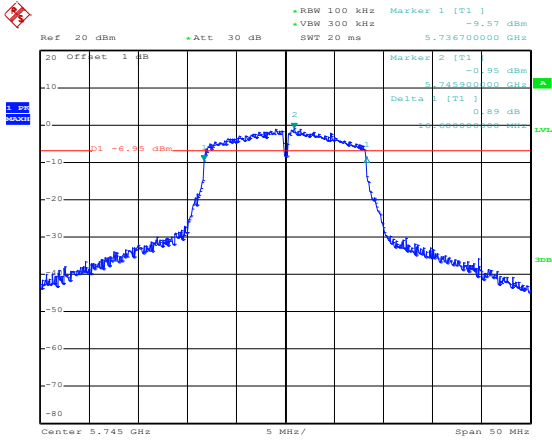
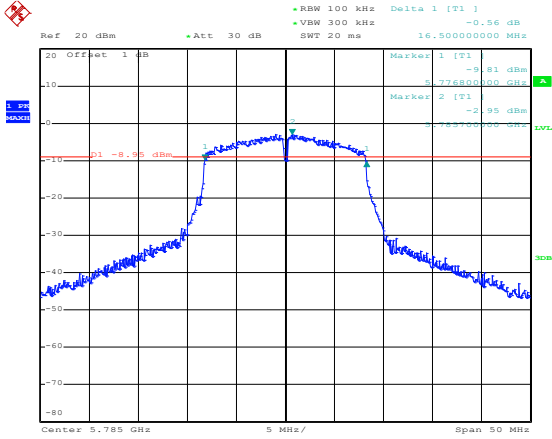
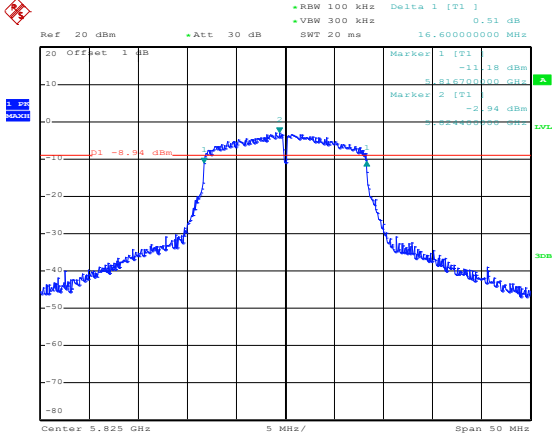
802.11ac-VHT80-Low

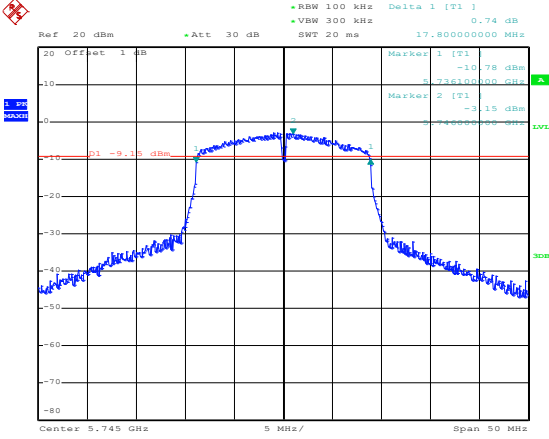
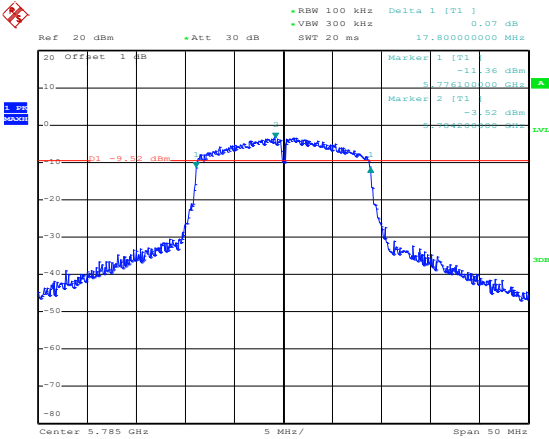
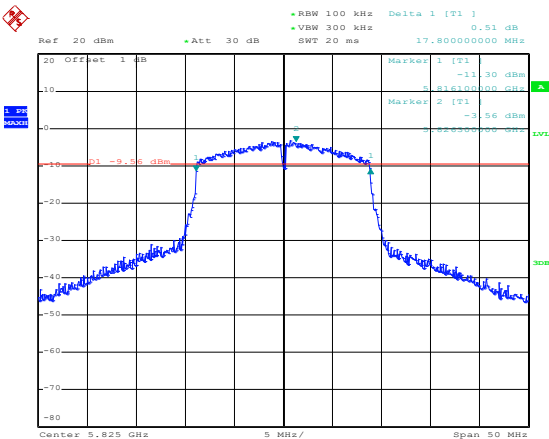


802.11ac-VHT80-High



6 dB Bandwidth MHz
5725-5850MHz

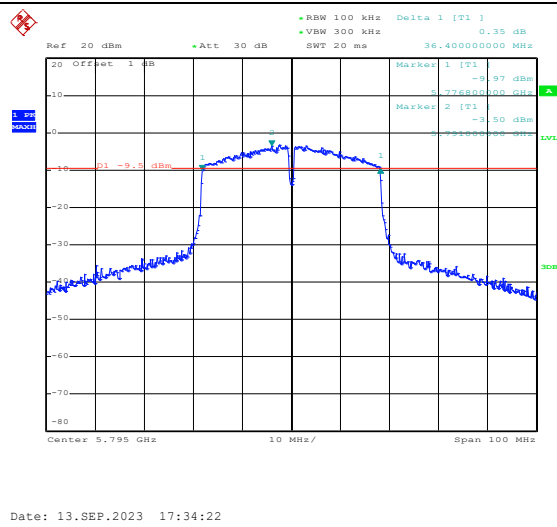
802.11a-Low	 Ref 20 dBm +Att 30 dB RBW 100 kHz VSW 300 kHz SWT 20 ms Delta 1 [T1] -9.57 dBm 5.736700000 GHz 20 Offset 1 dB Marker 2 [T1] -0.95 dBm 5.745900000 GHz A 10 Delta 1 [T1] 0.89 dB 16.500000000 MHz LVL 0 D1 -6.95 dBm -10 -20 -30 -40 -50 -60 -70 -80 Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 17:27:14
802.11a-Middle	 Ref 20 dBm +Att 30 dB RBW 100 kHz VSW 300 kHz SWT 20 ms Delta 1 [T1] -0.56 dBm 16.500000000 MHz 20 Offset 1 dB Marker 1 [T1] -9.81 dBm 5.776800000 GHz A 10 Marker 2 [T1] -2.95 dBm 5.840000000 GHz LVL 0 D1 -8.95 dBm -10 -20 -30 -40 -50 -60 -70 -80 Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 17:28:03
802.11a-High	 Ref 20 dBm +Att 30 dB RBW 100 kHz VSW 300 kHz SWT 20 ms Delta 1 [T1] 0.51 dBm 16.600000000 MHz 20 Offset 1 dB Marker 1 [T1] -11.18 dBm 5.816700000 GHz A 10 Marker 2 [T1] -2.94 dBm 5.840000000 GHz LVL 0 D1 -8.94 dBm -10 -20 -30 -40 -50 -60 -70 -80 Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 17:28:35

802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz SWT 20 ms Delta 1 [T1] 0.74 dB 17.800000000 MHz Marker 1 [T1] -10.78 dBm 5.736100000 GHz Marker 2 [T1] -13.15 dBm 5.736100000 GHz Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 17:29:03
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz SWT 20 ms Delta 1 [T1] 0.07 dB 17.800000000 MHz Marker 1 [T1] -11.36 dBm 5.776100000 GHz Marker 2 [T1] -13.52 dBm 5.776100000 GHz Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 17:29:38
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz SWT 20 ms Delta 1 [T1] 0.51 dB 17.800000000 MHz Marker 1 [T1] -11.30 dBm 5.816100000 GHz Marker 2 [T1] -13.56 dBm 5.816100000 GHz Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 17:30:00

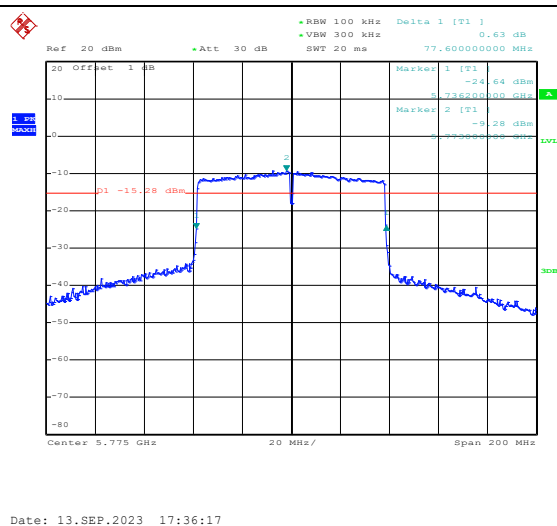
802.11n-HT40-Low	Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz SWT 20 ms Delta 1 [T1] -0.31 dB 36.40000000 MHz Marker 1 [T1] -7.86 dBm 5.75500000 GHz Marker 2 [T1] -11.97 dBm 5.75500000 GHz D1 -7.97 dBm Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 17:30:46
802.11n-HT40-High	Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz SWT 20 ms Delta 1 [T1] -0.21 dB 36.40000000 MHz Marker 1 [T1] -8.92 dBm 5.79500000 GHz Marker 2 [T1] -2.62 dBm 5.79500000 GHz D1 -8.62 dBm Center 5.795 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 17:31:14
802.11ac-VHT20-Low	Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz SWT 20 ms Delta 1 [T1] -0.83 dB 17.70000000 MHz Marker 1 [T1] -8.16 dBm 5.74500000 GHz Marker 2 [T1] -1.70 dBm 5.74500000 GHz D1 -7.7 dBm Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 17:31:54

802.11ac-VHT20-Middle	Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] 0.70 dB SWT 20 ms 17.600000000 MHz Marker 1 [T1] -9.62 dBm 5.785000000 GHz A Marker 2 [T1] -11.74 dBm 5.785000000 GHz LVL Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 17:32:25
802.11ac-VHT20-High	Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] 0.69 dB SWT 20 ms 17.800000000 MHz Marker 1 [T1] -9.45 dBm 5.825000000 GHz A Marker 2 [T1] -11.74 dBm 5.825000000 GHz LVL Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 17:32:54
802.11ac-VHT40-Low	Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] -0.18 dB SWT 20 ms 36.400000000 MHz Marker 1 [T1] -9.44 dBm 5.755000000 GHz A Marker 2 [T1] -11.96 dBm 5.755000000 GHz LVL Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 17:33:35

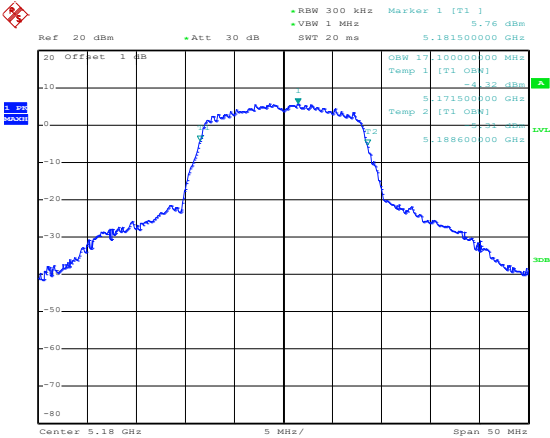
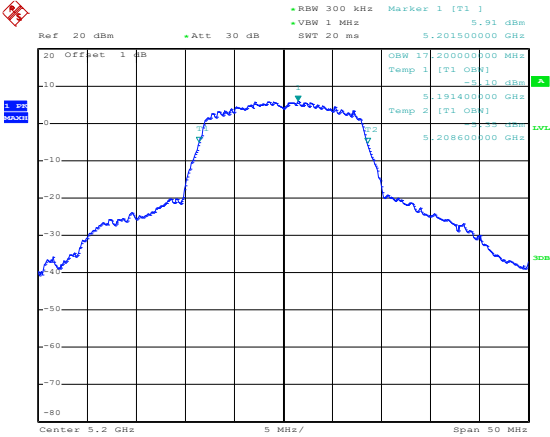
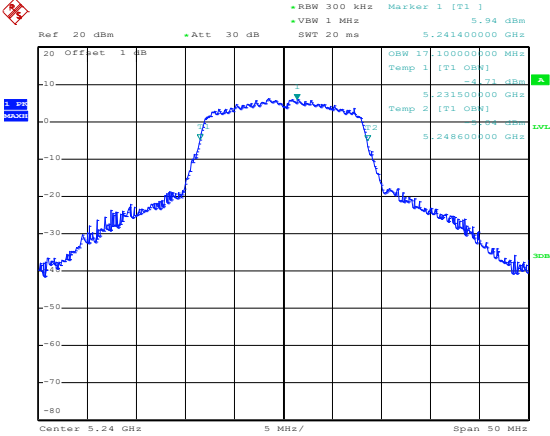
802.11ac-VHT40-High

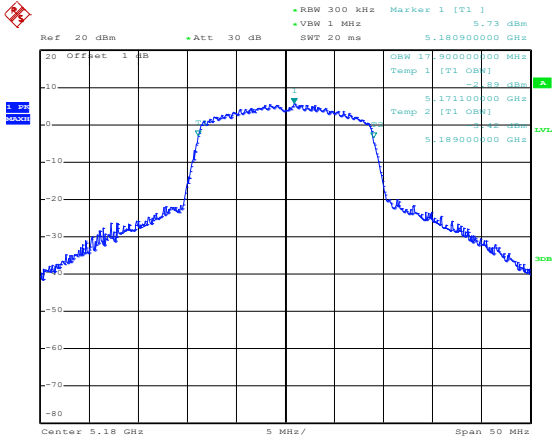
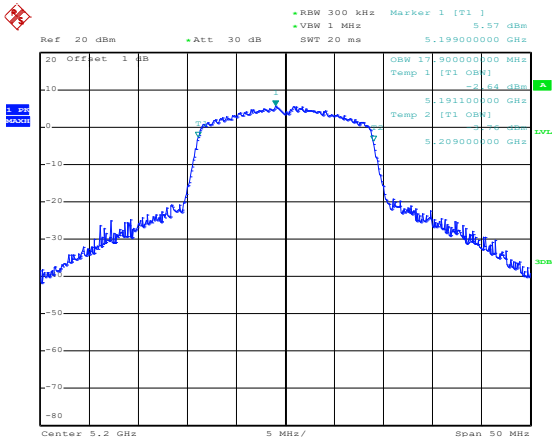
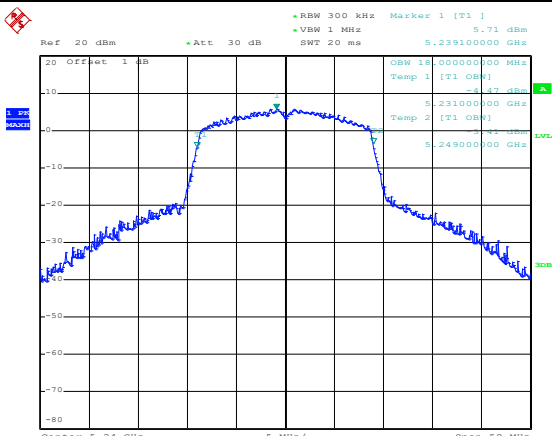


802.11ac-VHT80-Low

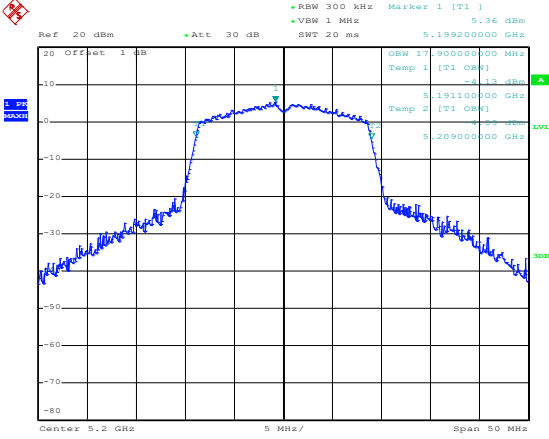
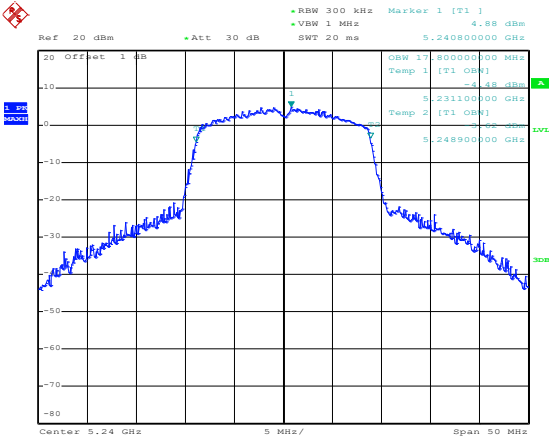
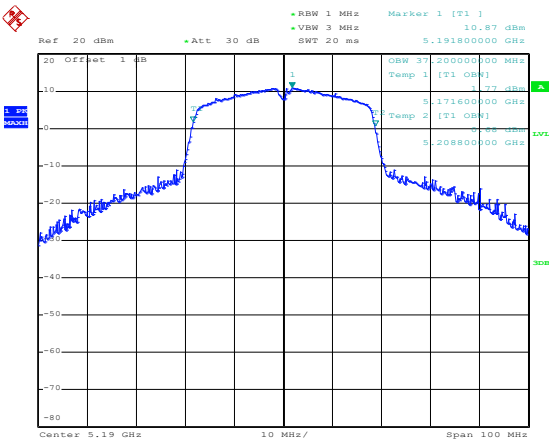


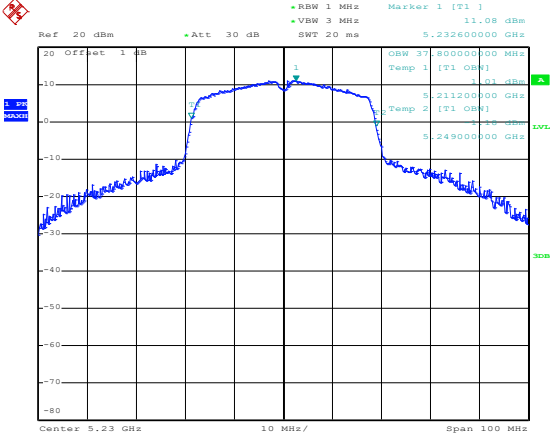
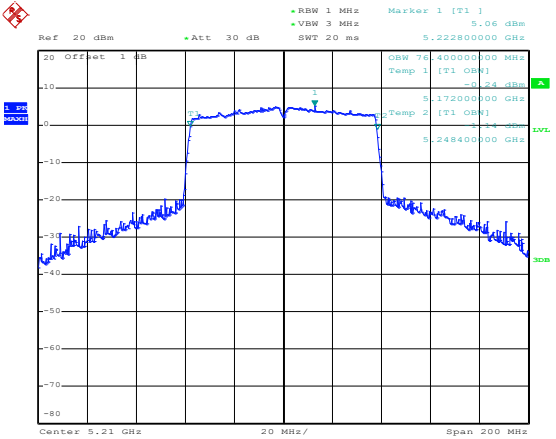
99% Bandwidth MHz
5150-5250MHz

802.11a-Low	 Date: 12.SEP.2023 19:38:23
802.11a-Middle	 Date: 12.SEP.2023 19:41:06
802.11a-High	 Date: 12.SEP.2023 19:41:33

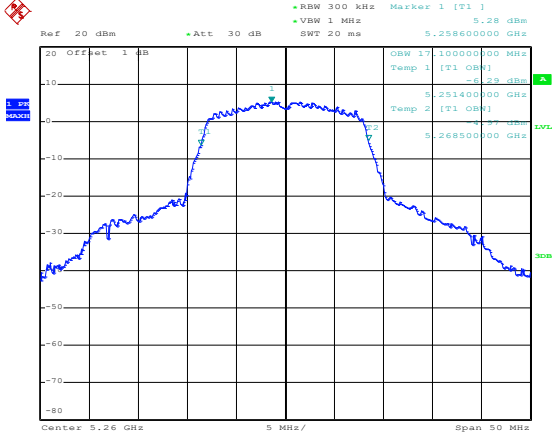
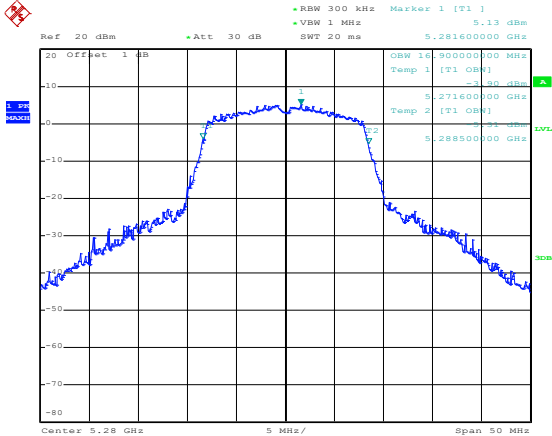
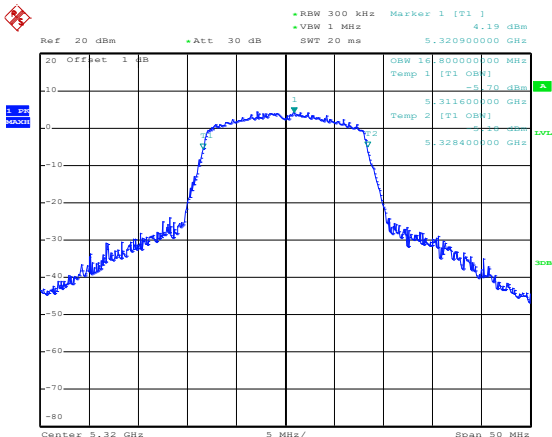
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz Marker 1 [T1] 5.73 dBm 5.180900000 GHz 5.180900000 GHz 5.171000000 GHz 5.171000000 GHz 5.189000000 GHz 5.189000000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 19:42:52
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz Marker 1 [T1] 5.57 dBm 5.199000000 GHz 5.199000000 GHz 5.191000000 GHz 5.191000000 GHz 5.209000000 GHz 5.209000000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 19:43:12
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz Marker 1 [T1] 5.71 dBm 5.239100000 GHz 5.239100000 GHz 5.231000000 GHz 5.231000000 GHz 5.249000000 GHz 5.249000000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 19:43:37

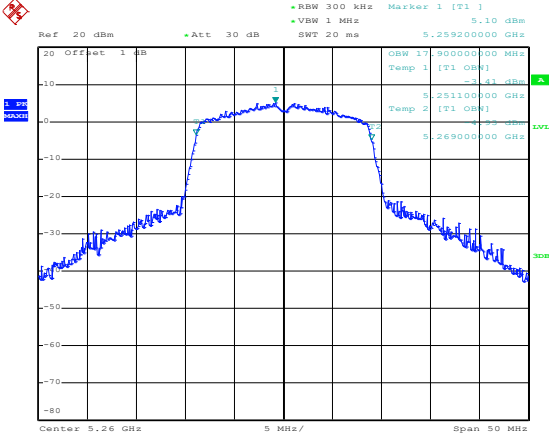
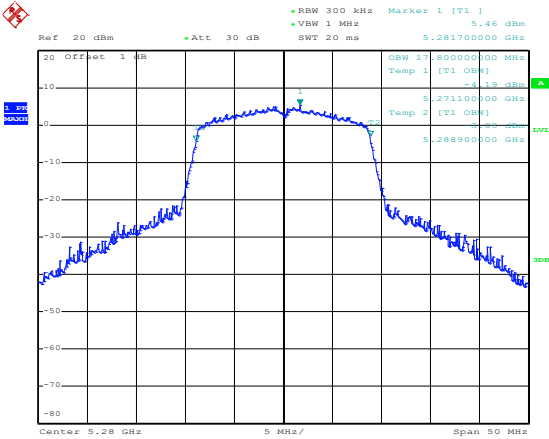
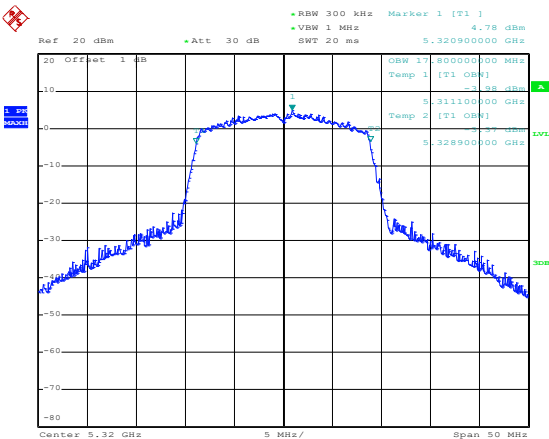
802.11n-HT40-Low	<
------------------	--

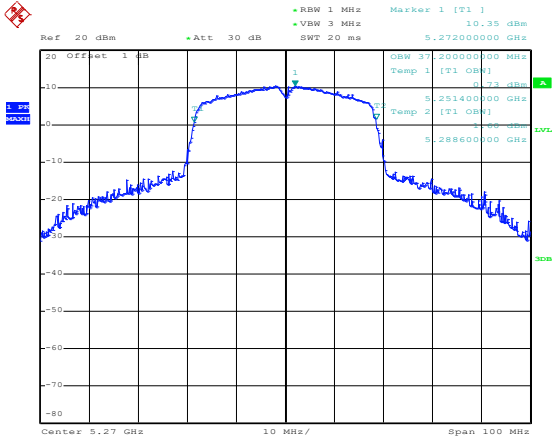
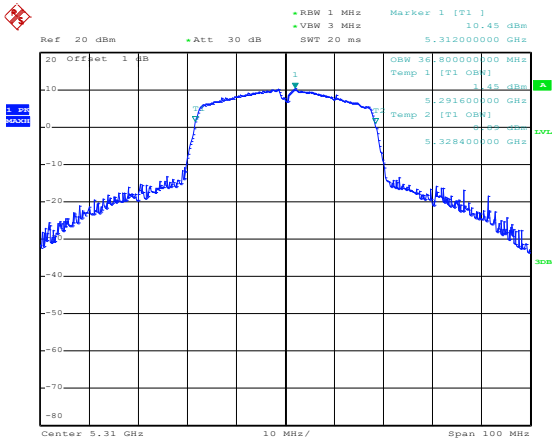
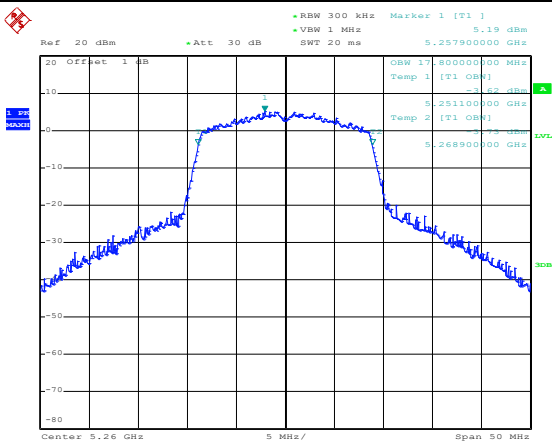
802.11ac-VHT20-Middle	 Date: 12.SEP.2023 19:45:33
802.11ac-VHT20-High	 Date: 12.SEP.2023 19:45:49
802.11ac-VHT40-Low	 Date: 12.SEP.2023 19:46:19

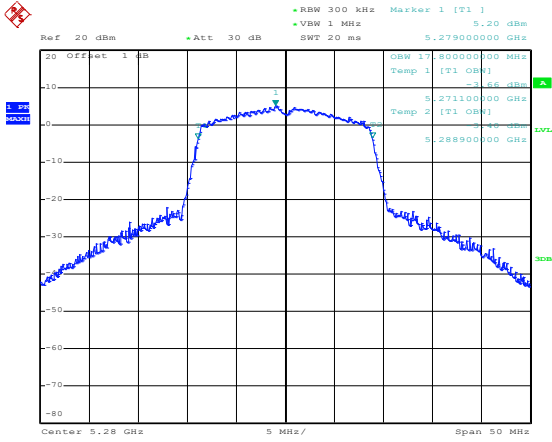
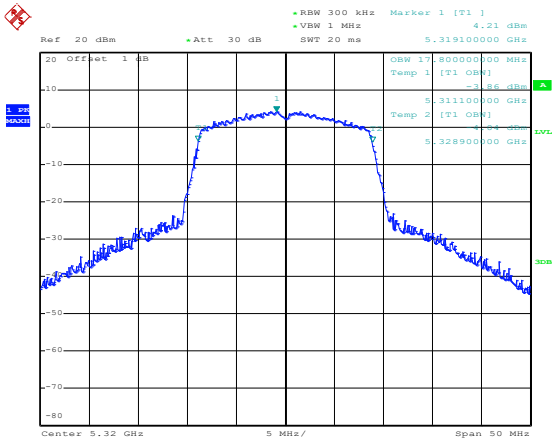
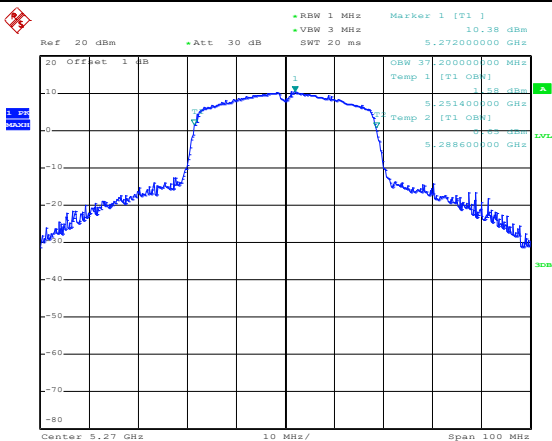
802.11ac-VHT40-High	 Ref 20 dBm +Att 30 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] 11.08 dBm 5.232600000 GHz Obs 37.800000000 MHz Temp 1 [T1 Obs] 1.01 dBm 5.211200000 GHz Temp 2 [T1 Obs] 1.18 dBm 5.249000000 GHz Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 12.SEP.2023 19:46:37
802.11ac-VHT80-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] 5.06 dBm 5.222800000 GHz Obs 76.400000000 MHz Temp 1 [T1 Obs] -0.64 dBm 5.172000000 GHz Temp 2 [T1 Obs] -1.44 dBm 5.248400000 GHz Center 5.21 GHz 20 MHz/ Span 200 MHz Date: 12.SEP.2023 19:47:27

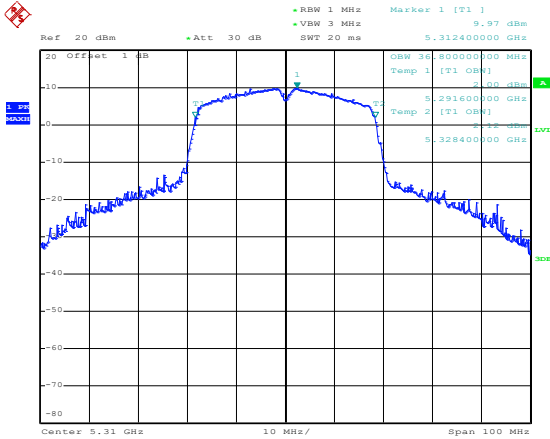
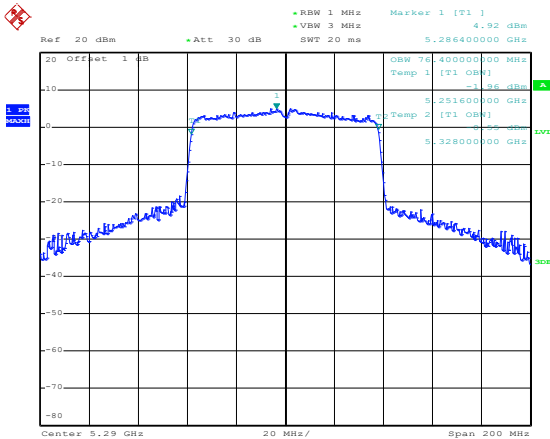
5250-5350MHz

802.11a-Low	 Date: 12.SEP.2023 20:11:08
802.11a-Middle	 Date: 12.SEP.2023 20:11:25
802.11a-High	 Date: 12.SEP.2023 20:11:38

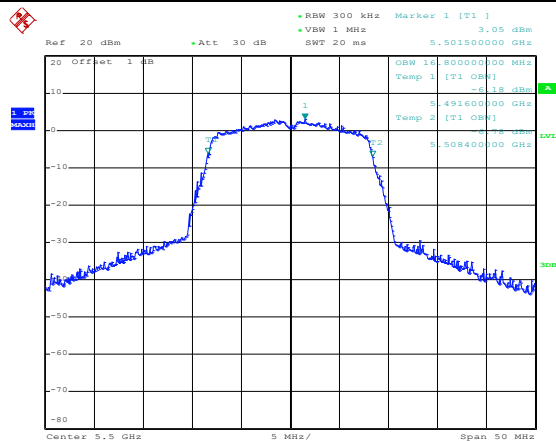

802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 5.10 dBm VSW 1 MHz SWT 20 ms 5.259200000 GHz 20 Offset 1 dB 1 0dBm 17.800000000 MHz 17.800000000 MHz Temp 1 [T1] 0dBm -3.41 dBm A 5.251100000 GHz 5.251100000 GHz Temp 2 [T1] 0dBm -3.41 dBm LVL 5.269000000 GHz 5.269000000 GHz Center 5.26 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 20:12:01
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 5.46 dBm VSW 1 MHz SWT 20 ms 5.281700000 GHz 20 Offset 1 dB 1 0dBm 17.800000000 MHz 17.800000000 MHz Temp 1 [T1] 0dBm -3.49 dBm A 5.271100000 GHz 5.271100000 GHz Temp 2 [T1] 0dBm -3.49 dBm LVL 5.288900000 GHz 5.288900000 GHz Center 5.28 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 20:12:18
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 4.78 dBm VSW 1 MHz SWT 20 ms 5.320900000 GHz 20 Offset 1 dB 1 0dBm 17.800000000 MHz 17.800000000 MHz Temp 1 [T1] 0dBm -3.88 dBm A 5.311100000 GHz 5.311100000 GHz Temp 2 [T1] 0dBm -3.88 dBm LVL 5.328900000 GHz 5.328900000 GHz Center 5.32 GHz 5 MHz/ Span 50 MHz Date: 12.SEP.2023 20:12:35

802.11n-HT40-Low	 Date: 12.SEP.2023 20:13:06
802.11n-HT40-High	 Date: 12.SEP.2023 20:13:20
802.11ac-VHT20-Low	 Date: 12.SEP.2023 20:13:57

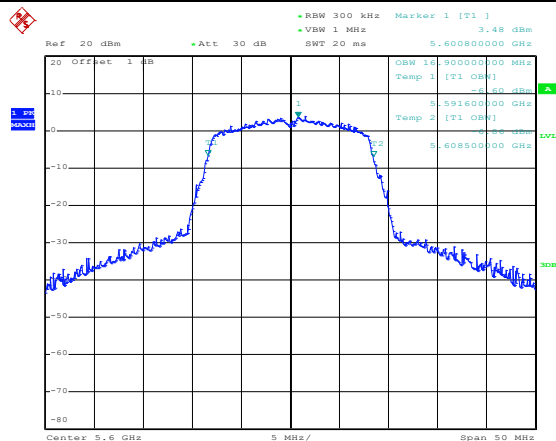

802.11ac-VHT20-Middle	 Date: 12.SEP.2023 20:14:17
802.11ac-VHT20-High	 Date: 12.SEP.2023 20:14:41
802.11ac-VHT40-Low	 Date: 12.SEP.2023 20:15:14

802.11ac-VHT40-High	 Ref 20 dBm Att 30 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] 9.97 dBm <table><tr><th>Obs</th><th>70.80000000 MHz</th><th>Temp 1 [T1] Obs</th></tr><tr><td>1</td><td>5.312400000 GHz</td><td>-10.97 dBm</td></tr><tr><td>2</td><td>5.291600000 GHz</td><td>-10.97 dBm</td></tr><tr><td>3</td><td>5.328400000 GHz</td><td>-10.97 dBm</td></tr></table> Center 5.31 GHz 10 MHz/ Span 100 MHz Date: 12.SEP.2023 20:15:31	Obs	70.80000000 MHz	Temp 1 [T1] Obs	1	5.312400000 GHz	-10.97 dBm	2	5.291600000 GHz	-10.97 dBm	3	5.328400000 GHz	-10.97 dBm
Obs	70.80000000 MHz	Temp 1 [T1] Obs											
1	5.312400000 GHz	-10.97 dBm											
2	5.291600000 GHz	-10.97 dBm											
3	5.328400000 GHz	-10.97 dBm											
802.11ac-VHT80-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] 4.92 dBm <table><tr><th>Obs</th><th>70.40000000 MHz</th><th>Temp 1 [T1] Obs</th></tr><tr><td>1</td><td>5.286400000 GHz</td><td>-11.86 dBm</td></tr><tr><td>2</td><td>5.251600000 GHz</td><td>-11.86 dBm</td></tr><tr><td>3</td><td>5.328000000 GHz</td><td>-11.86 dBm</td></tr></table> Center 5.29 GHz 20 MHz/ Span 200 MHz Date: 12.SEP.2023 20:18:49	Obs	70.40000000 MHz	Temp 1 [T1] Obs	1	5.286400000 GHz	-11.86 dBm	2	5.251600000 GHz	-11.86 dBm	3	5.328000000 GHz	-11.86 dBm
Obs	70.40000000 MHz	Temp 1 [T1] Obs											
1	5.286400000 GHz	-11.86 dBm											
2	5.251600000 GHz	-11.86 dBm											
3	5.328000000 GHz	-11.86 dBm											

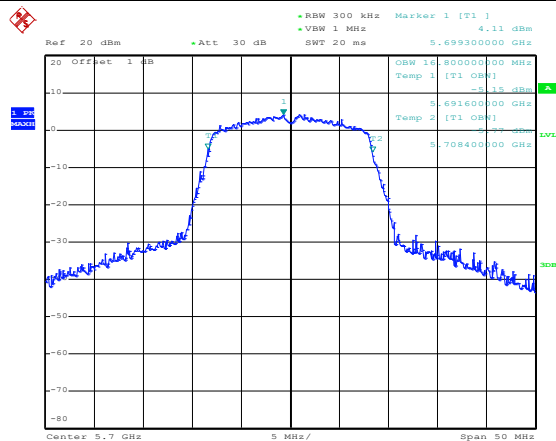

5470-5725MHz



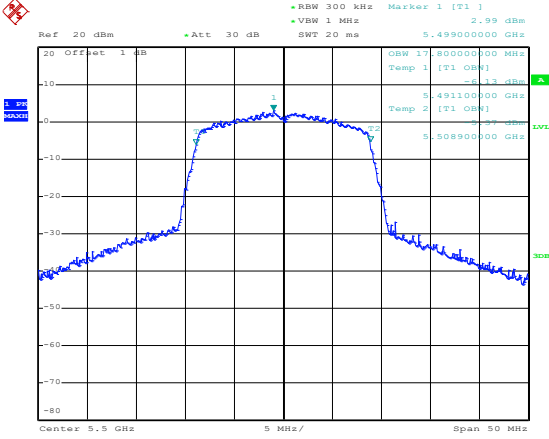
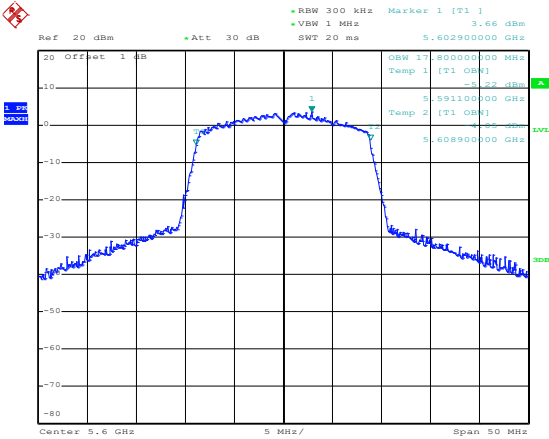
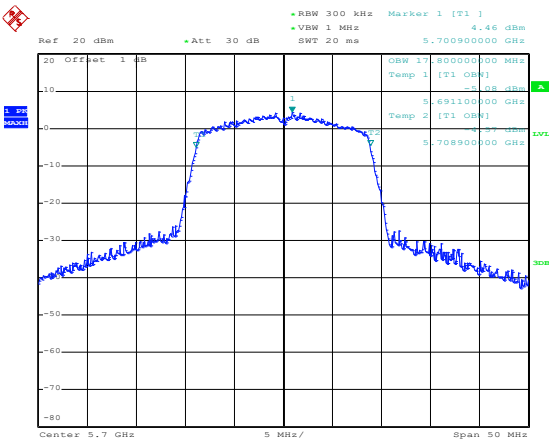
Date: 13.SEP.2023 16:24:36

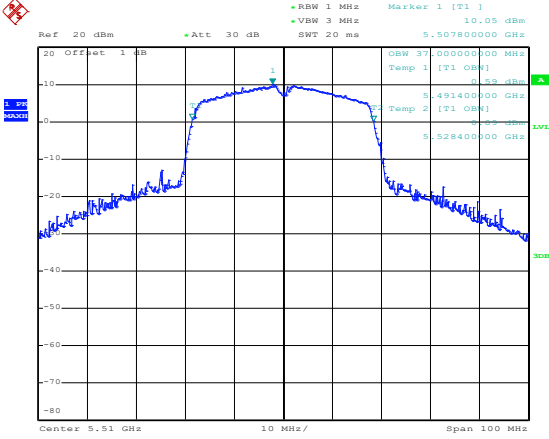
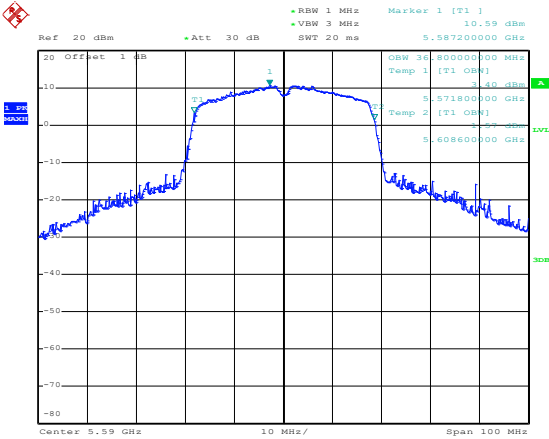
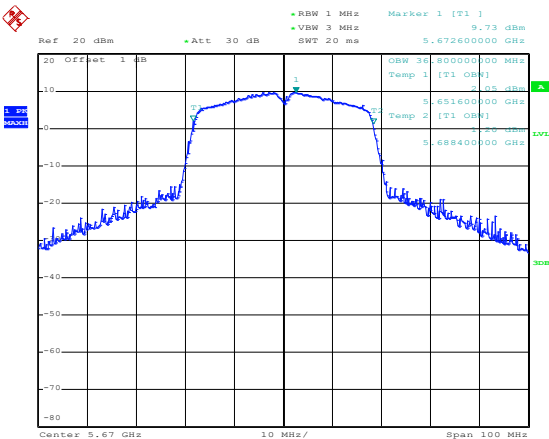


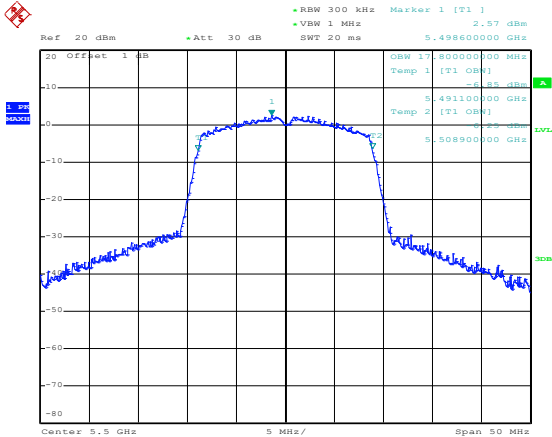
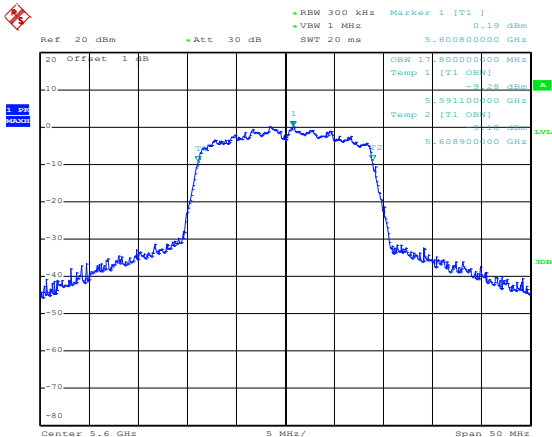
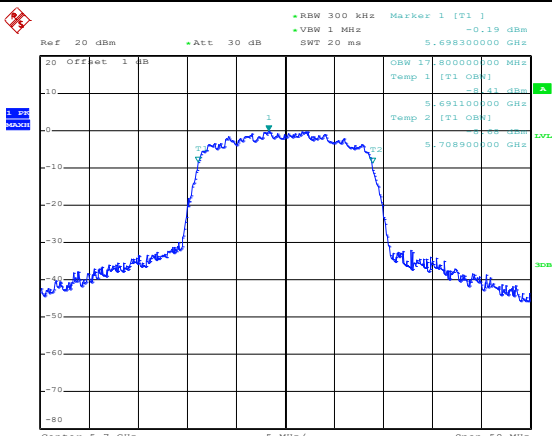
Date: 13.SEP.2023 16:24:51

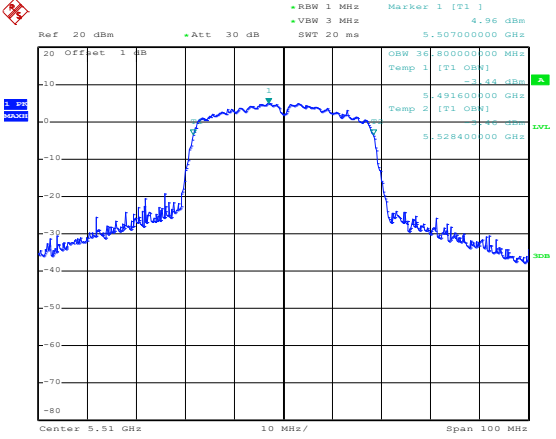
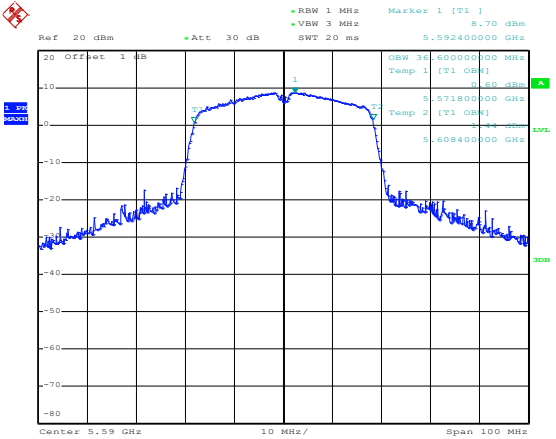
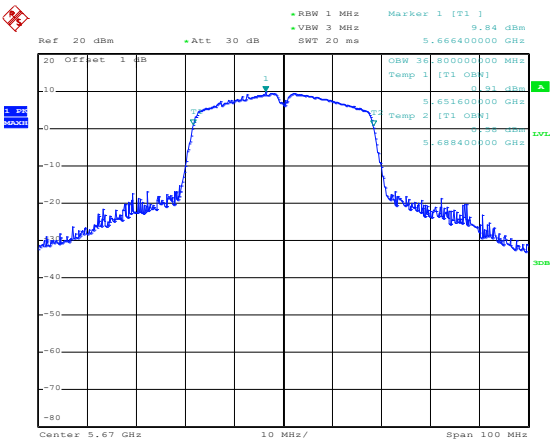


Date: 13.SEP.2023 16:25:03

802.11n-HT20-Low	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 2.99 dBm VSW 1 MHz SWT 20 ms 5.49900000 GHz 20 Offset 1 dB OSW 17.80000000 MHz Temp 1 [T1] 0.00 dBm 5.49110000 GHz Temp 2 [T1] 0.00 dBm 5.50890000 GHz Center 5.5 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 16:25:30
802.11n-HT20-Middle	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 3.66 dBm VSW 1 MHz SWT 20 ms 5.60290000 GHz 20 Offset 1 dB OSW 17.80000000 MHz Temp 1 [T1] 0.00 dBm 5.59110000 GHz Temp 2 [T1] 0.00 dBm 5.60890000 GHz Center 5.6 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 16:25:46
802.11n-HT20-High	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 4.46 dBm VSW 1 MHz SWT 20 ms 5.70090000 GHz 20 Offset 1 dB OSW 17.80000000 MHz Temp 1 [T1] 0.00 dBm 5.69110000 GHz Temp 2 [T1] 0.00 dBm 5.70890000 GHz Center 5.7 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 16:26:02

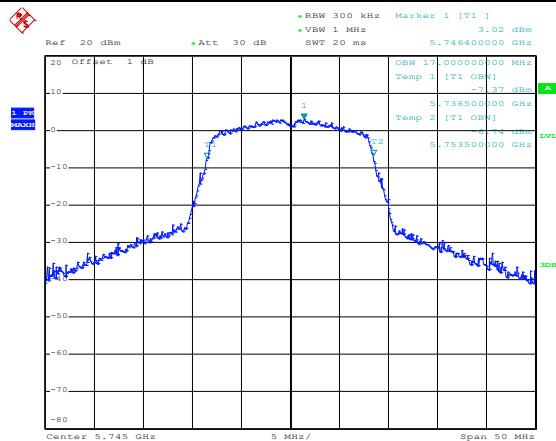

802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 10.05 dBm 5.507800000 GHz OSW 30.00000000 MHz Temp 1 [T1] 0.00 dBm 5.491400000 GHz Temp 2 [T1] 0.00 dBm 5.528400000 GHz Center 5.51 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 16:26:41
802.11n-HT40-Middle	 Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 10.59 dBm 5.587200000 GHz OSW 30.00000000 MHz Temp 1 [T1] 0.00 dBm 5.571800000 GHz Temp 2 [T1] 0.00 dBm 5.608600000 GHz Center 5.59 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 16:26:59
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 9.73 dBm 5.672600000 GHz OSW 30.00000000 MHz Temp 1 [T1] 0.00 dBm 5.651600000 GHz Temp 2 [T1] 0.00 dBm 5.688400000 GHz Center 5.67 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 16:27:17

802.11ac-VHT20-Low	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 2.57 dBm VSW 1 MHz SWT 20 ms 5.498600000 GHz OSW 17.800000000 MHz Temp 1 [T1] 0.85 dBm 5.491100000 GHz Temp 2 [T1] 0.85 dBm 5.508900000 GHz Center 5.5 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 16:27:45
802.11ac-VHT20-Middle	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] 0.19 dBm VSW 1 MHz SWT 20 ms 5.600800000 GHz OSW 17.800000000 MHz Temp 1 [T1] 0.68 dBm 5.591100000 GHz Temp 2 [T1] 0.68 dBm 5.608900000 GHz Center 5.6 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 16:27:57
802.11ac-VHT20-High	 Ref 20 dBm +Att 30 dB RBW 300 kHz Marker 1 [T1] -0.19 dBm VSW 1 MHz SWT 20 ms 5.698300000 GHz OSW 17.800000000 MHz Temp 1 [T1] 0.41 dBm 5.691100000 GHz Temp 2 [T1] 0.41 dBm 5.708900000 GHz Center 5.7 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 16:28:19

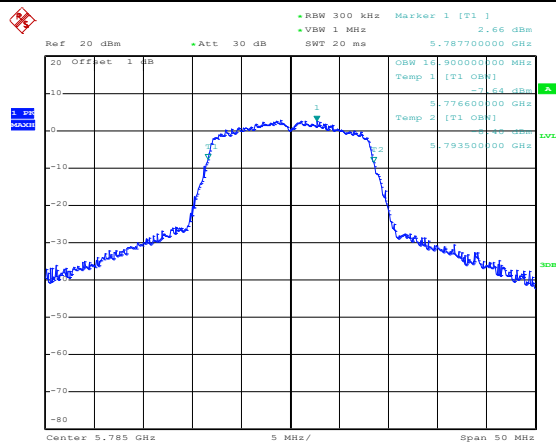

802.11ac-VHT40-Low	 Date: 13.SEP.2023 16:28:47
802.11ac-VHT40-Middle	 Date: 13.SEP.2023 16:29:04
802.11ac-VHT40-High	 Date: 13.SEP.2023 16:29:22

802.11ac-VHT80-Low	RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 1.32 dBm 5.526000000 GHz Ref 20 dBm Att 30 dB Offset 1 dB Obs 70.00000000 MHz Temp 1 [T1 OBW] -2.48 dBm 5.492000000 GHz Temp 2 [T1 OBW] -2.42 dBm 5.568000000 GHz 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 Center 5.53 GHz 20 MHz/ Span 200 MHz 13.SEP.2023 16:29:44
802.11ac-VHT80-High	RBW 1 MHz VBW 3 MHz SWT 20 ms Marker 1 [T1] 3.01 dBm 5.607200000 GHz Ref 20 dBm Att 30 dB Offset 1 dB Obs 70.00000000 MHz Temp 1 [T1 OBW] -2.64 dBm 5.572000000 GHz Temp 2 [T1 OBW] -2.58 dBm 5.648000000 GHz 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 Center 5.61 GHz 20 MHz/ Span 200 MHz 13.SEP.2023 16:29:57

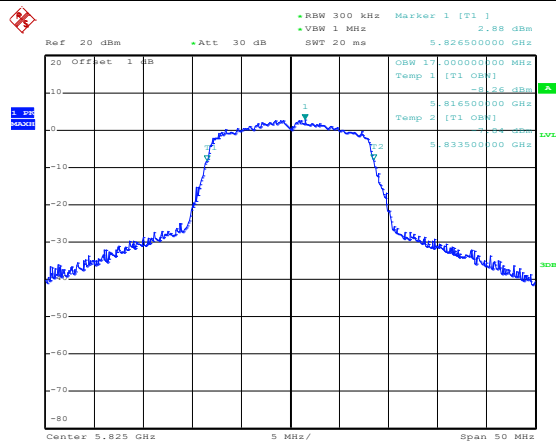

5725-5850MHz





Date: 13.SEP.2023 16:31:50

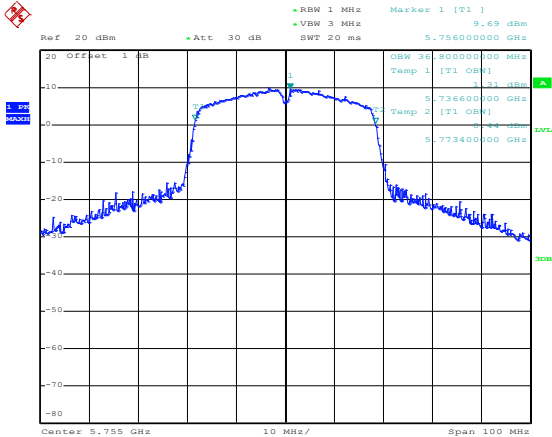
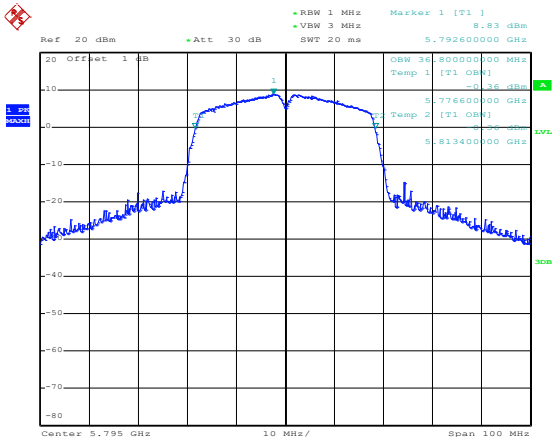
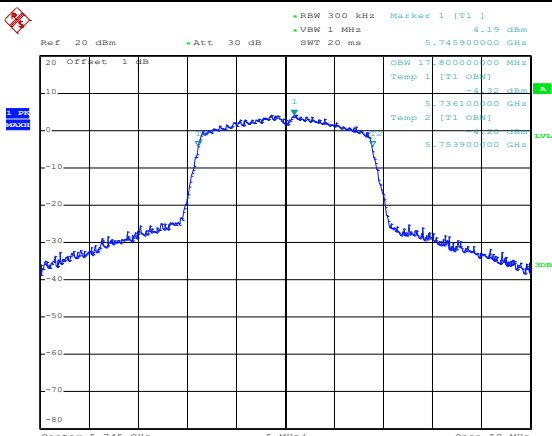


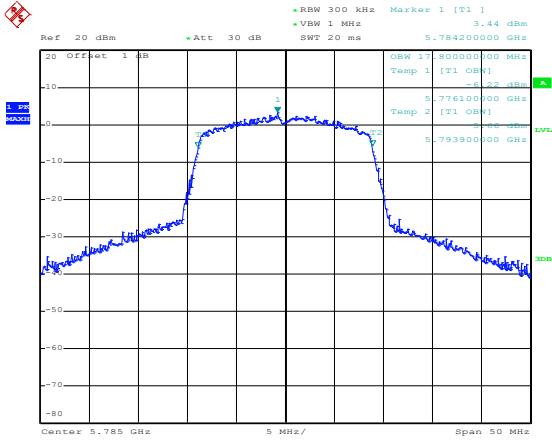
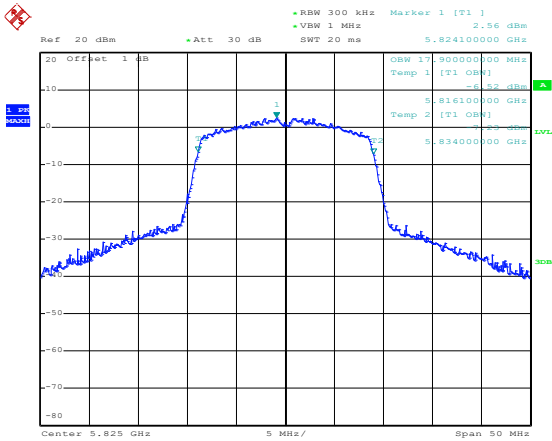
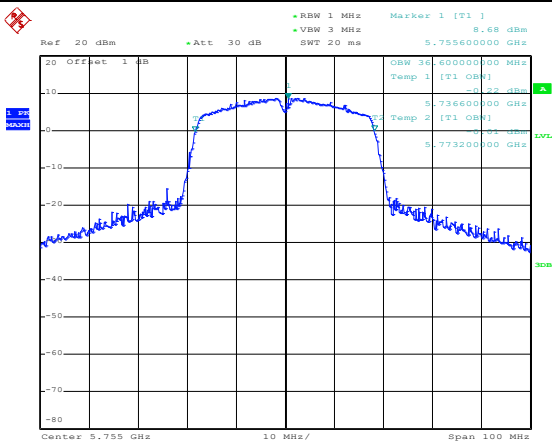
Date: 13.SEP.2023 16:32:06

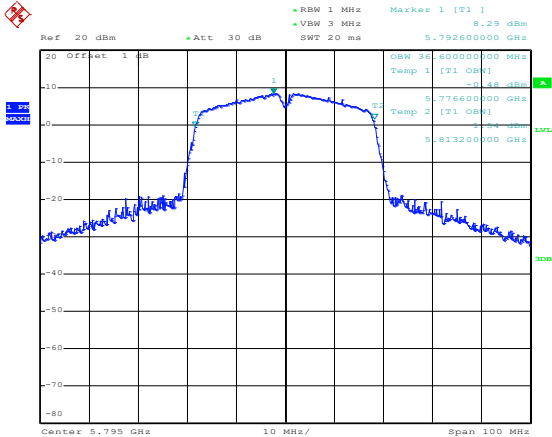
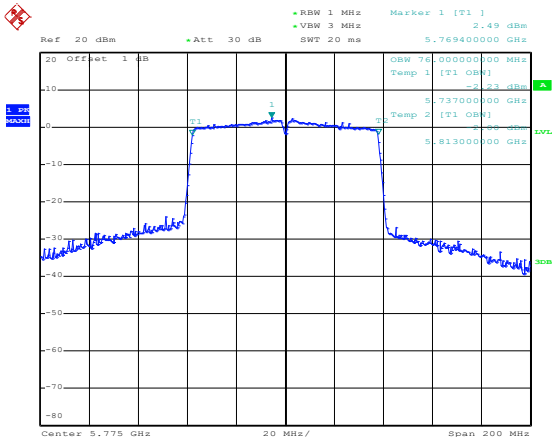


Date: 13.SEP.2023 16:32:24



802.11n-HT40-Low	 Date: 13.SEP.2023 16:33:40
802.11n-HT40-High	 Date: 13.SEP.2023 16:33:53
802.11ac-VHT20-Low	 Date: 13.SEP.2023 16:34:28

802.11ac-VHT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 3.44 dBm VSW 1 MHz SWT 20 ms 5.784200000 GHz OSW 17.800000000 MHz Temp 1 [T1] 0.00 dBm Temp 2 [T1] 0.00 dBm Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 16:34:44
802.11ac-VHT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] 2.56 dBm VSW 1 MHz SWT 20 ms 5.824100000 GHz OSW 17.800000000 MHz Temp 1 [T1] 0.00 dBm Temp 2 [T1] 0.00 dBm Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 13.SEP.2023 16:35:00
802.11ac-VHT40-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] 8.68 dBm VSW 3 MHz SWT 20 ms 5.755600000 GHz OSW 36.600000000 MHz Temp 1 [T1] 0.00 dBm Temp 2 [T1] 0.00 dBm Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 16:35:24

802.11ac-VHT40-High	 Ref 20 dBm +Att 30 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] 5.792600000 GHz -2.49 dBm Temp 1 [T1] 5.776600000 GHz -2.49 dBm Temp 2 [T1] 5.813200000 GHz -2.49 dBm Center 5.795 GHz 10 MHz/ Span 100 MHz Date: 13.SEP.2023 16:35:38
802.11ac-VHT80-Low	 Ref 20 dBm +Att 30 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] 5.769400000 GHz -2.49 dBm Temp 1 [T1] 5.737000000 GHz -2.49 dBm Temp 2 [T1] 5.813000000 GHz -2.49 dBm Center 5.775 GHz 20 MHz/ Span 200 MHz Date: 13.SEP.2023 16:36:03

APPENDIX C

Maximum Conducted Output Power

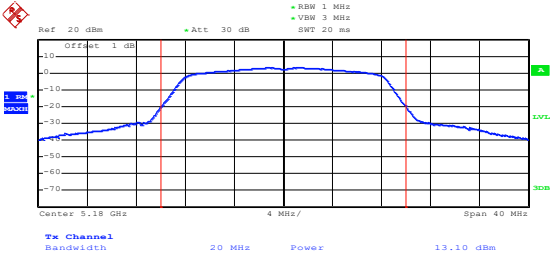
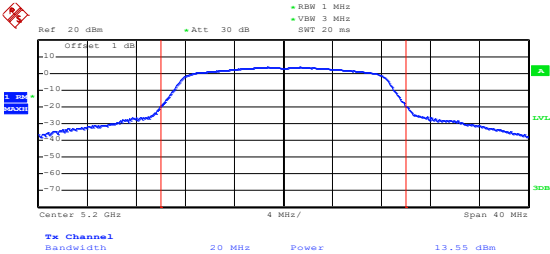
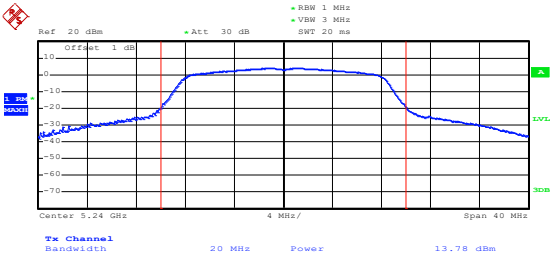
U-NII-1:5150-5250MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5180	13.10	23.98
	5200	13.55	23.98
	5240	13.78	23.98
802.11n-HT20	5180	12.81	23.98
	5200	12.90	23.98
	5240	12.63	23.98
802.11n-HT40	5190	12.75	23.98
	5230	12.71	23.98
802.11ac-VHT20	5180	12.92	23.98
	5200	12.92	23.98
	5240	12.73	23.98
802.11ac-VHT40	5190	12.11	23.98
	5230	11.96	23.98
802.11ac-VHT80	5210	12.20	23.98

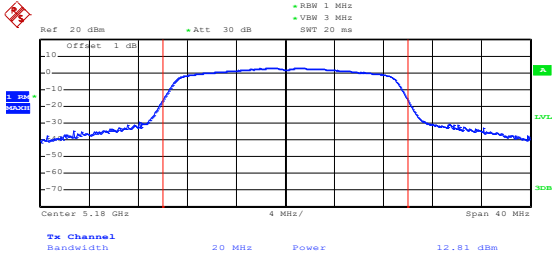
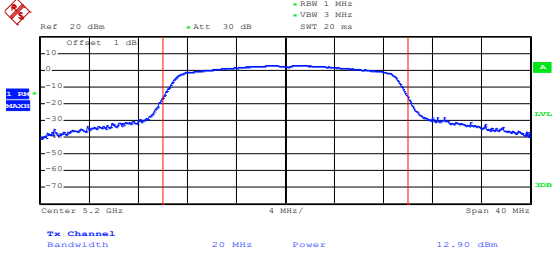
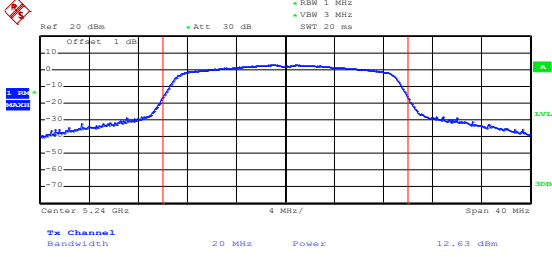
U-NII-2A: 5250-5350MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5260	12.53	23.98
	5280	12.54	23.98
	5320	12.18	23.98
802.11n-HT20	5260	12.48	23.98
	5280	12.57	23.98
	5320	11.86	23.98
802.11n-HT40	5270	12.40	23.98
	5310	11.92	23.98
802.11ac-VHT20	5260	12.45	23.98
	5280	12.42	23.98
	5320	11.78	23.98
802.11ac-VHT40	5270	12.16	23.98
	5310	12.48	23.98
802.11ac-VHT80	5290	12.41	23.98

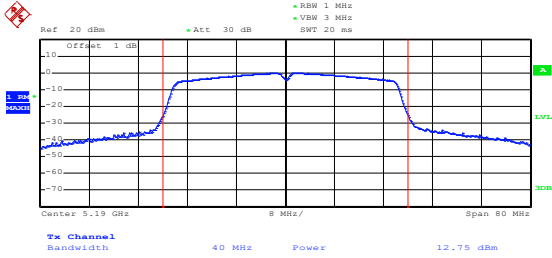
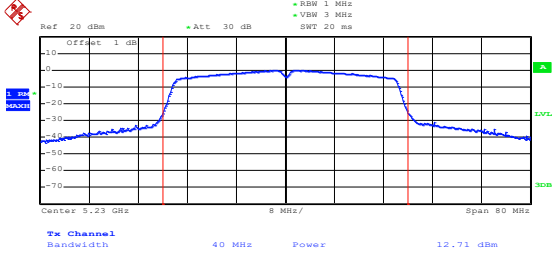
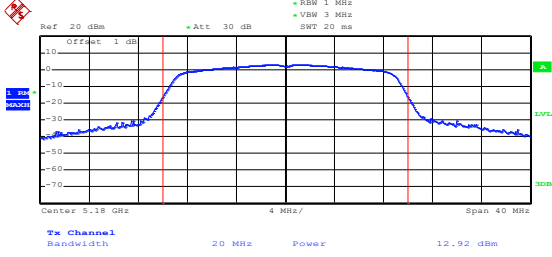
U-NII-2C: 5470-5725MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5500	12.00	23.98
	5580	12.76	23.98
	5700	11.53	23.98
802.11n-HT20	5500	11.33	23.98
	5580	10.88	23.98
	5700	11.36	23.98
802.11n-HT40	5510	11.82	23.98
	5550	11.95	23.98
	5670	11.77	23.98
802.11ac-VHT20	5500	11.60	23.98
	5580	12.00	23.98
	5700	11.48	23.98
802.11ac-VHT40	5510	11.73	23.98
	5550	12.10	23.98
	5670	12.11	23.98
802.11ac-VHT80	5530	10.16	23.98
	5610	11.58	23.98

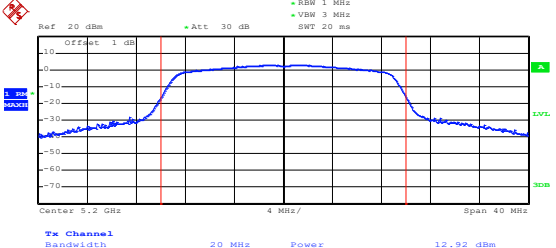
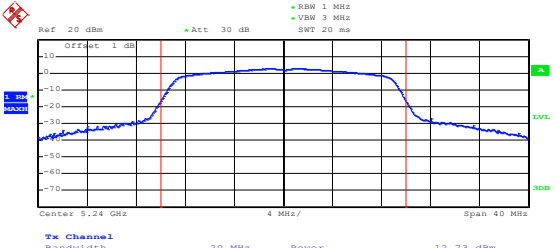
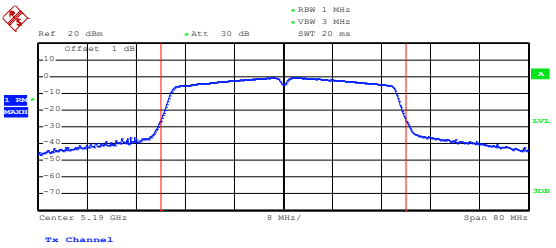
U-NII-3: 5725-5850MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5745	11.47	30.00
	5785	10.57	30.00
	5825	10.48	30.00
802.11n-HT20	5745	10.67	30.00
	5785	10.33	30.00
	5825	10.22	30.00
802.11n-HT40	5755	11.35	30.00
	5795	11.43	30.00
802.11n-HT20	5745	10.68	30.00
	5785	10.41	30.00
	5825	10.22	30.00
802.11n-HT40	5755	11.38	30.00
	5795	11.41	30.00
802.11ac-VHT80	5775	10.85	30.00

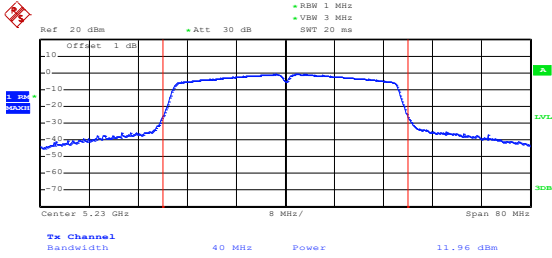
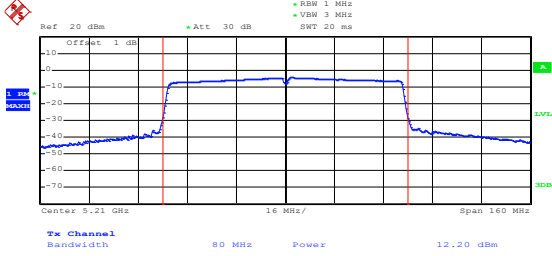
5150-5250MHz

802.11a-Low	 Date: 12.SEP.2023 18:42:21
802.11a-Middle	 Date: 12.SEP.2023 18:43:34
802.11a-High	 Date: 12.SEP.2023 18:44:06

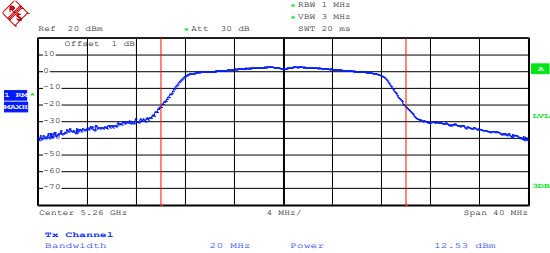
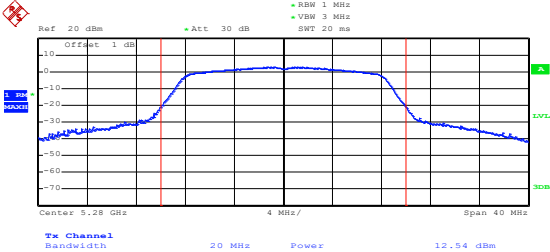
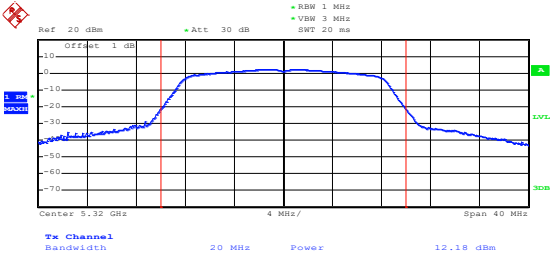
802.11n-HT20-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.18 GHz Span: 40 MHz 4 MHz/div Tx Channel Bandwidth: 20 MHz Power: 12.81 dBm Date: 12.SEP.2023 18:45:54
802.11n-HT20-Middle	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.2 GHz Span: 40 MHz 4 MHz/div Tx Channel Bandwidth: 20 MHz Power: 12.90 dBm Date: 12.SEP.2023 18:46:35
802.11n-HT20-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.24 GHz Span: 40 MHz 4 MHz/div Tx Channel Bandwidth: 20 MHz Power: 12.63 dBm Date: 12.SEP.2023 18:47:10

802.11n-HT40-Low	 Date: 12.SEP.2023 18:49:05
802.11n-HT40-High	 Date: 12.SEP.2023 18:49:52
802.11ac-VHT20-Low	 Date: 12.SEP.2023 18:50:55

802.11ac-VHT20-Middle	 Date: 12.SEP.2023 18:51:19
802.11ac-VHT20-High	 Date: 12.SEP.2023 18:52:04
802.11ac-VHT40-Low	 Date: 12.SEP.2023 18:53:38

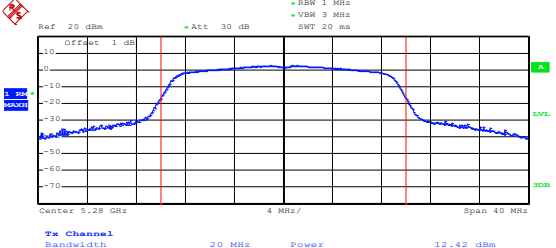
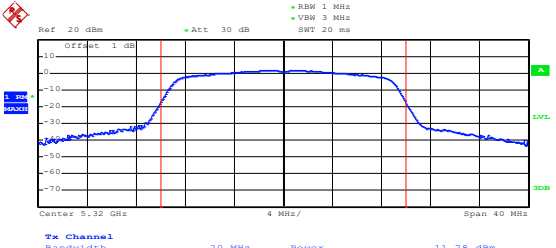
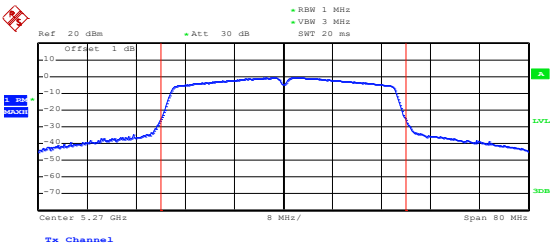
802.11ac-VHT40-High	 Date: 12.SEP.2023 18:54:45
802.11ac-VHT80-Low	 Date: 12.SEP.2023 18:56:35

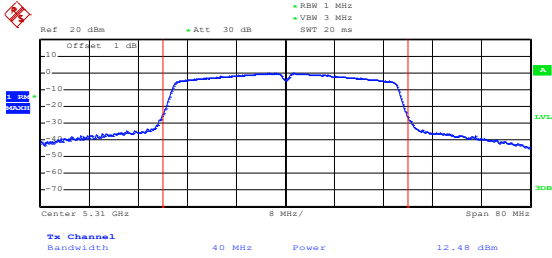
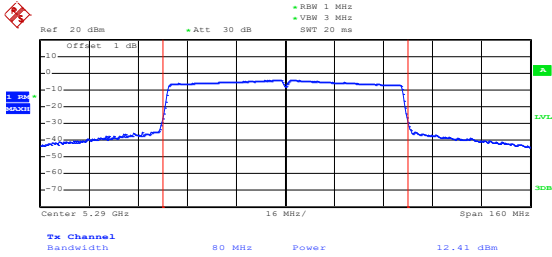
5250-5350MHz

802.11a-Low	 Date: 12.SEP.2023 19:50:23
802.11a-Middle	 Date: 12.SEP.2023 19:50:51
802.11a-High	 Date: 12.SEP.2023 19:52:36

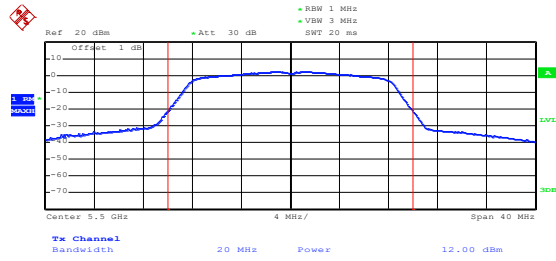

802.11n-HT20-Low	Date: 12.SEP.2023 19:53:53
802.11n-HT20-Middle	Date: 12.SEP.2023 19:54:46
802.11n-HT20-High	Date: 12.SEP.2023 19:56:37

802.11n-HT40-Low	Date: 12.SEP.2023 19:57:16
802.11n-HT40-High	Date: 12.SEP.2023 19:57:50
802.11ac-VHT20-Low	Date: 12.SEP.2023 19:58:33

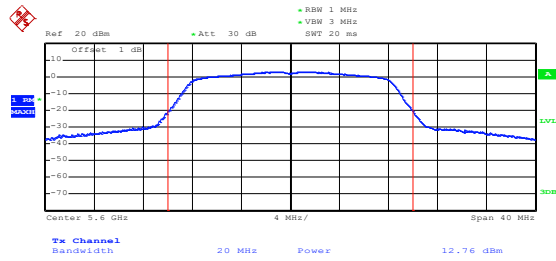

802.11ac-VHT20-Middle	 Date: 12.SEP.2023 19:58:45
802.11ac-VHT20-High	 Date: 12.SEP.2023 19:59:41
802.11ac-VHT40-Low	 Date: 12.SEP.2023 20:00:53

802.11ac-VHT40-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.31 GHz Bandwidth: 40 MHz Power: 12.48 dBm Date: 12.SEP.2023 20:01:19
802.11ac-VHT80-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.29 GHz Bandwidth: 80 MHz Power: 12.41 dBm Date: 12.SEP.2023 20:02:10

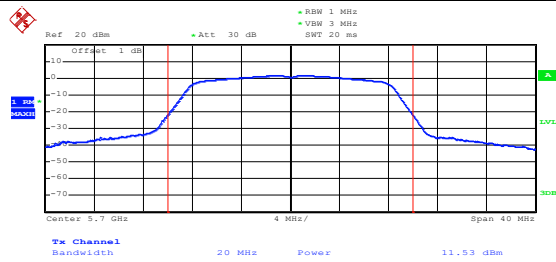

5470-5725MHz



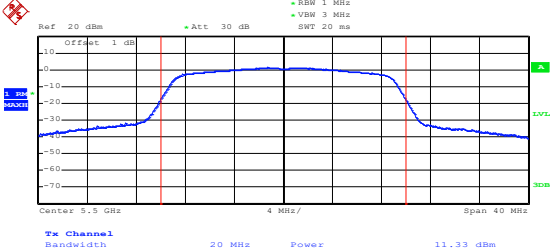
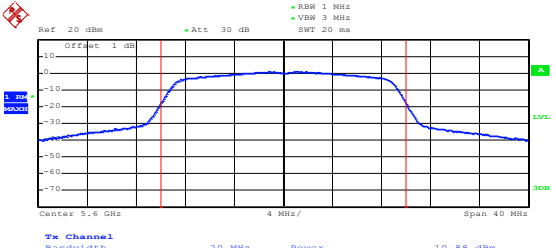
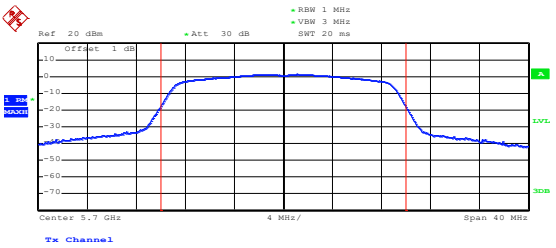
Date: 13.SEP.2023 11:06:57

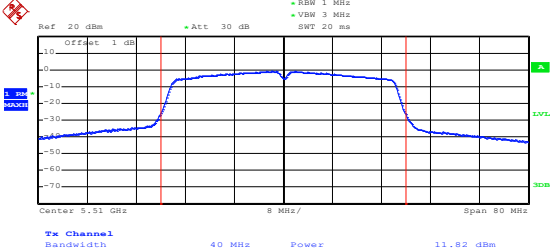
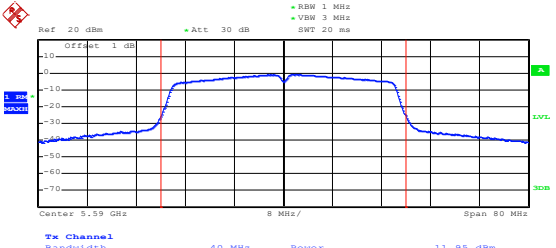
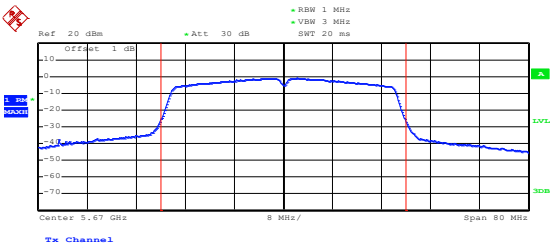


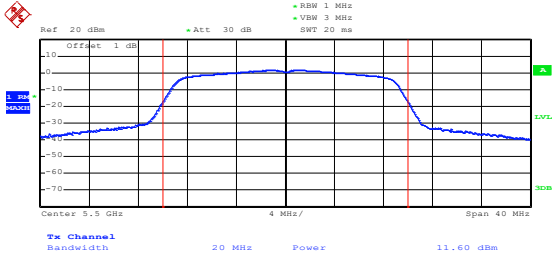
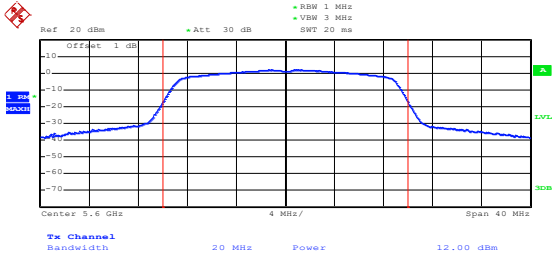
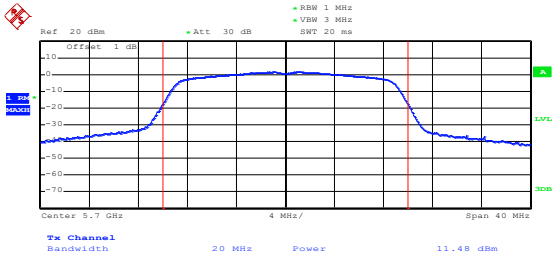
Date: 13.SEP.2023 11:07:27

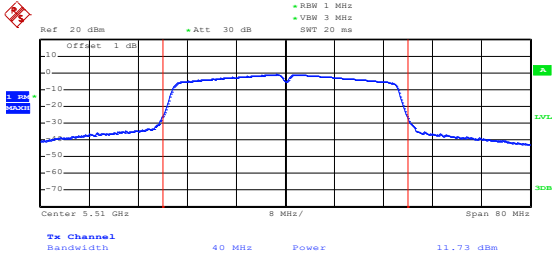
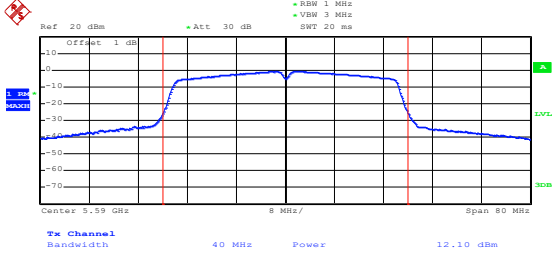
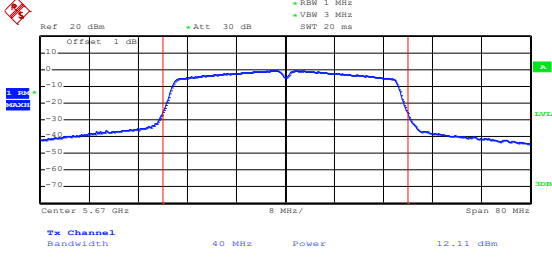


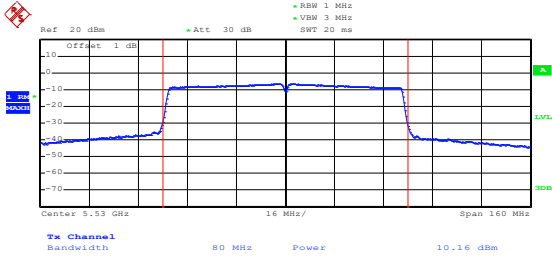
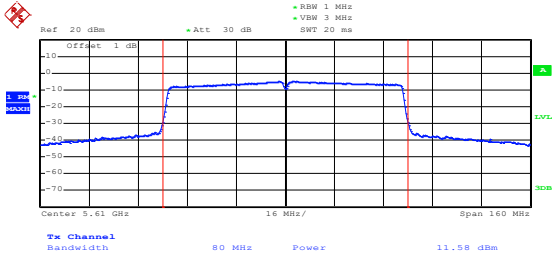
Date: 13.SEP.2023 11:10:51

802.11n-HT20-Low	 Date: 13.SEP.2023 11:11:47
802.11n-HT20-Middle	 Date: 13.SEP.2023 11:13:14
802.11n-HT20-High	 Date: 13.SEP.2023 11:14:15

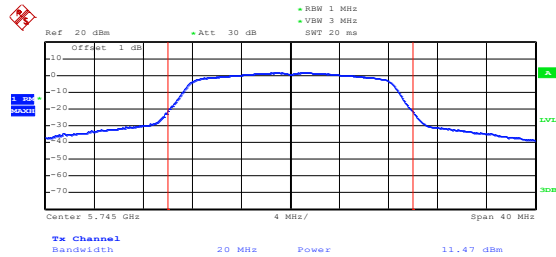

802.11n-HT40-Low	 Date: 13.SEP.2023 15:10:22
802.11n-HT40- Middle	 Date: 13.SEP.2023 15:11:28
802.11n-HT40-High	 Date: 13.SEP.2023 15:12:04

802.11ac-VHT20-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center 5.5 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth: 20 MHz Power: 11.60 dBm Date: 13.SEP.2023 15:13:08
802.11ac-VHT20-Middle	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center 5.6 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth: 20 MHz Power: 12.00 dBm Date: 13.SEP.2023 15:14:20
802.11ac-VHT20-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center 5.7 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth: 20 MHz Power: 11.48 dBm Date: 13.SEP.2023 15:14:39

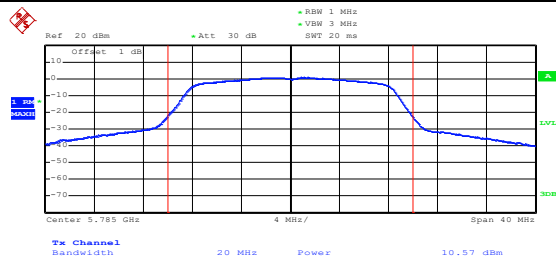

802.11ac-VHT40-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.51 GHz Span: 80 MHz TS Channel Bandwidth: 40 MHz Power: 11.73 dBm Date: 13.SEP.2023 15:15:19
802.11c-HT40- Middle	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.59 GHz Span: 80 MHz TS Channel Bandwidth: 40 MHz Power: 12.10 dBm Date: 13.SEP.2023 15:16:07
802.11ac-VHT40-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.67 GHz Span: 80 MHz TS Channel Bandwidth: 40 MHz Power: 12.11 dBm Date: 13.SEP.2023 15:17:37

802.11ac-VHT80-Low	 Date: 13.SEP.2023 15:18:37
802.11ac-VHT80-High	 Date: 13.SEP.2023 15:19:05

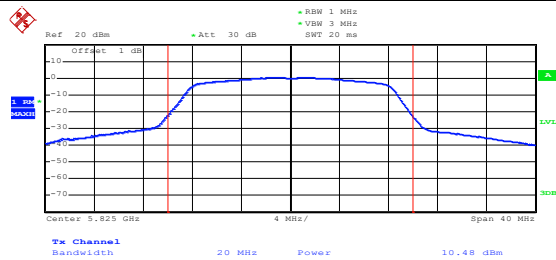

5725-5850MHz



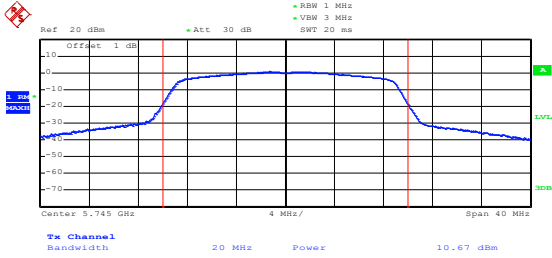
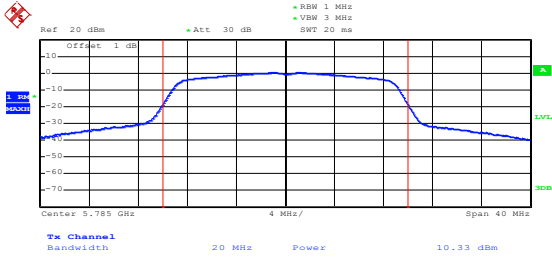
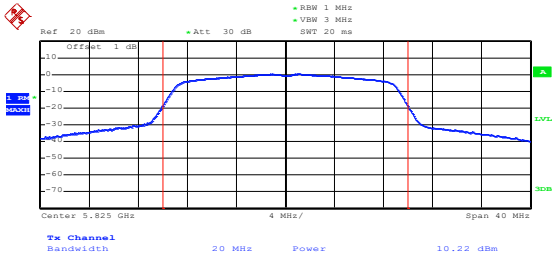
Date: 13.SEP.2023 15:22:58

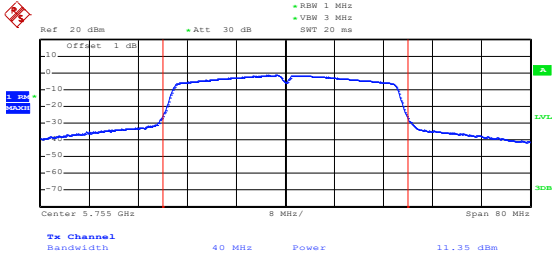
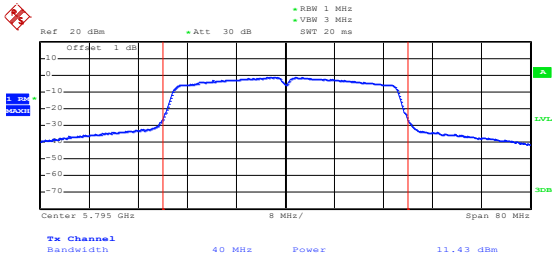
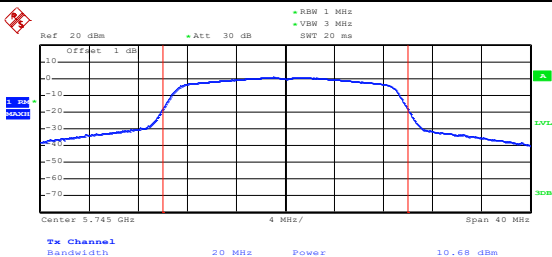


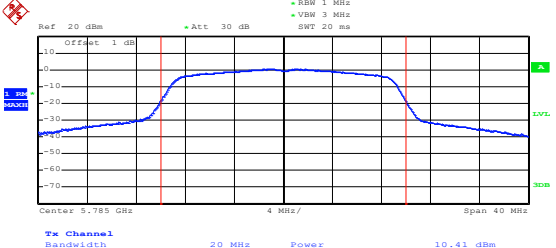
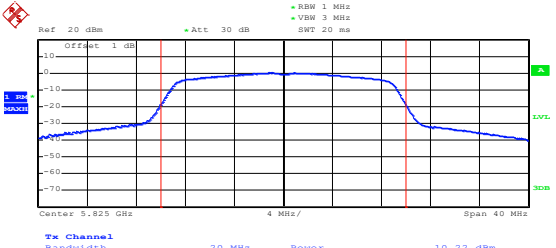
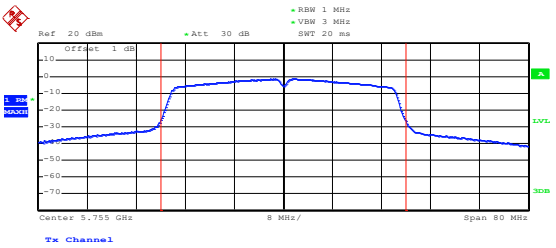
Date: 13.SEP.2023 15:24:14

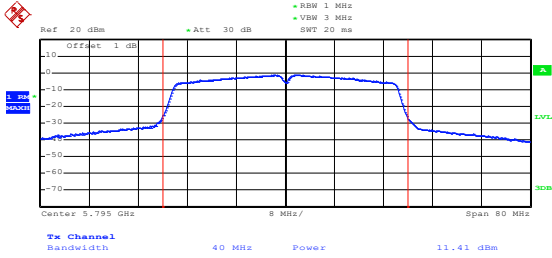
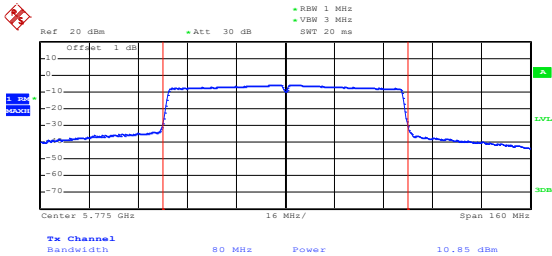


Date: 13.SEP.2023 15:27:42

802.11n-HT20-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center 5.745 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 10.67 dBm Date: 13.SEP.2023 15:28:21
802.11n-HT20-Middle	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center 5.785 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 10.33 dBm Date: 13.SEP.2023 15:28:41
802.11n-HT20-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center 5.825 GHz 4 MHz/ Span 40 MHz Tx Channel Bandwidth 20 MHz Power 10.22 dBm Date: 13.SEP.2023 15:29:18

802.11n-HT40-Low	 Date: 13.SEP.2023 15:30:00
802.11n-HT40-High	 Date: 13.SEP.2023 15:30:24
802.11ac-VHT20-Low	 Date: 13.SEP.2023 15:31:11

802.11ac-VHT20-Middle	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.785 GHz Span: 40 MHz Ts Channel Bandwidth: 20 MHz Power: 10.41 dBm Date: 13.SEP.2023 15:31:29
802.11ac-VHT20-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.825 GHz Span: 40 MHz Ts Channel Bandwidth: 20 MHz Power: 10.22 dBm Date: 13.SEP.2023 15:31:46
802.11ac-VHT40-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.755 GHz Span: 80 MHz Ts Channel Bandwidth: 40 MHz Power: 11.38 dBm Date: 13.SEP.2023 15:32:39

802.11ac-VHT40-High	 Date: 13.SEP.2023 15:33:11
802.11ac-VHT80-Low	 Date: 13.SEP.2023 15:33:38

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	502	0.097
100%		-20	501	0.096
100%		-10	503	0.097
100%		0	502	0.097
100%		+10	495	0.095
100%		+20	498	0.096
100%		+30	498	0.096
100%		+40	499	0.096
100%		+50	503	0.097
Low Battery power	3.4	+20	501	0.096
High Battery power	4.2	+20	497	0.096

U-NII-1: 5250-5350MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	504	0.096
100%		-20	502	0.095
100%		-10	499	0.095
100%		0	499	0.094
100%		+10	496	0.094
100%		+20	502	0.095
100%		+30	499	0.094
100%		+40	505	0.096
100%		+50	496	0.094
Low Battery power	3.4	+20	500	0.095
High Battery power	4.2	+20	502	0.095

U-NII-1: 5470-5725MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	496	0.089
100%		-20	498	0.089
100%		-10	498	0.089
100%		0	497	0.089
100%		+10	501	0.090
100%		+20	503	0.090
100%		+30	496	0.089
100%		+40	496	0.089
100%		+50	504	0.090
Low Battery power	3.4	+20	501	0.089
High Battery power	4.2	+20	496	0.088

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	500	0.086
100%		-20	499	0.086
100%		-10	503	0.087
100%		0	503	0.087
100%		+10	501	0.087
100%		+20	504	0.087
100%		+30	500	0.086
100%		+40	504	0.087
100%		+50	503	0.087
Low Battery power	3.4	+20	503	0.087
High Battery power	4.2	+20	501	0.087

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****