


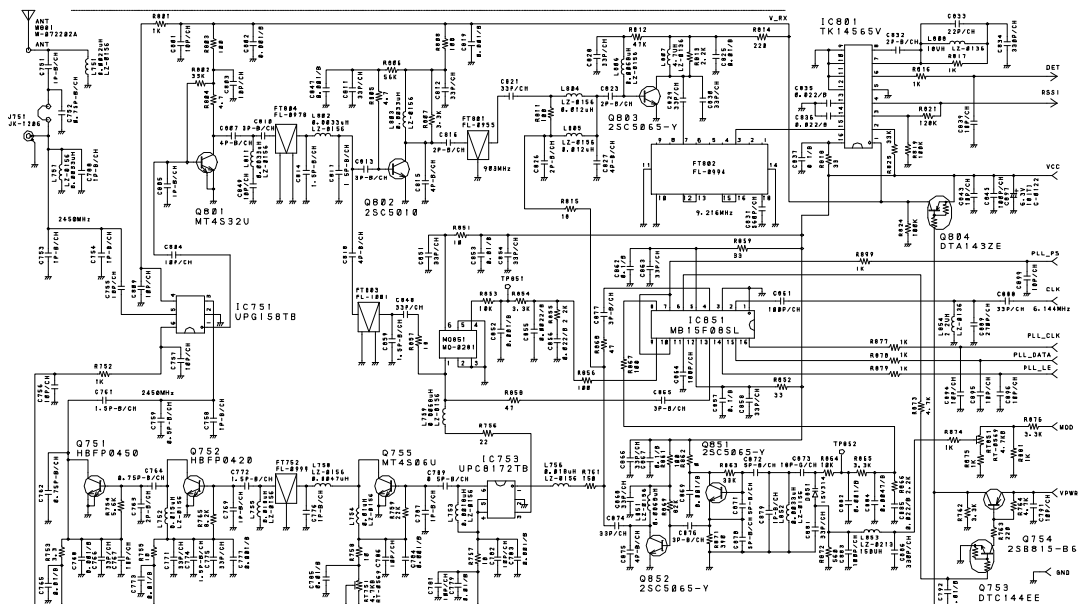

NOTES:
 1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (R=HOLD OHM, M=MEG OHM)
 2. RESISTOR WATTAGES ARE (1/16W) UNLESS OTHERWISE NOTED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=PICO-MICRO FARAD)
 4. CHIP PARTS ARE NOT SPECIFIED IN THIS DRAWING. PLEASE REFER TO THE PARTS LIST FOR THE CHIP PARTS.
 5. CHIP CAPACITORS TYPE ARE (1608) UNLESS OTHERWISE NOTED.

DESIGN	DRAWN BY	REVISED BY	MODEL NO.
	WMS BT-28	UCS010H	CLT-2428
CHECK BY	APPROD BY	TITLE	PORT RF
		SCHEMATIC DIAGRAM	
		REVISION #	
REV. NO.			UNIDEN CORP.