

TEST REPORT

Product : WIFI+BT Module
Trade mark : GSD
Model/Type reference : WCT1BR2201D, WCT1BR2701T
Serial Number : N/A
Report Number : EED32K00249902
FCC ID : 2AC23-WCT1B
Date of Issue : Nov. 16, 2018
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Hui Zhou Gaoshengda Technology Co., LTD
No. 75 Zhongkai Development Area Huizhou, Guangdong, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385



Tested By:

Peter

Peter

Reviewed by:

Tom - chen

Tom chen

Date:

Nov. 16, 2018

Compiled by:

Kevin Lan

Kevin Lan

Approved by:

Kevin Yang

Kevin yang

Check No.: 3096372854

2 Version

Version No.	Date	Description
00	Nov. 16, 2018	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.

Model No.: WCT1BR2201D, WCT1BR2701T

Only the model WCT1BR2701T was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being of the antenna connection.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	8
6.5 TEST LOCATION	8
6.6 DEVIATION FROM STANDARDS	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
Appendix A): 20dB Occupied Bandwidth	14
Appendix B): Carrier Frequency Separation	18
Appendix C): Dwell Time	22
Appendix D): Hopping Channel Number	26
Appendix E): Conducted Peak Output Power	28
Appendix F): Band-edge for RF Conducted Emissions	32
Appendix G): RF Conducted Spurious Emissions	37
Appendix H): Pseudorandom Frequency Hopping Sequence	44
Appendix I): Antenna Requirement	45
Appendix J): AC Power Line Conducted Emission	46
Appendix K): Restricted bands around fundamental frequency (Radiated)	49
Appendix L): Radiated Spurious Emissions	62
PHOTOGRAPHS OF TEST SETUP	69
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	72

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

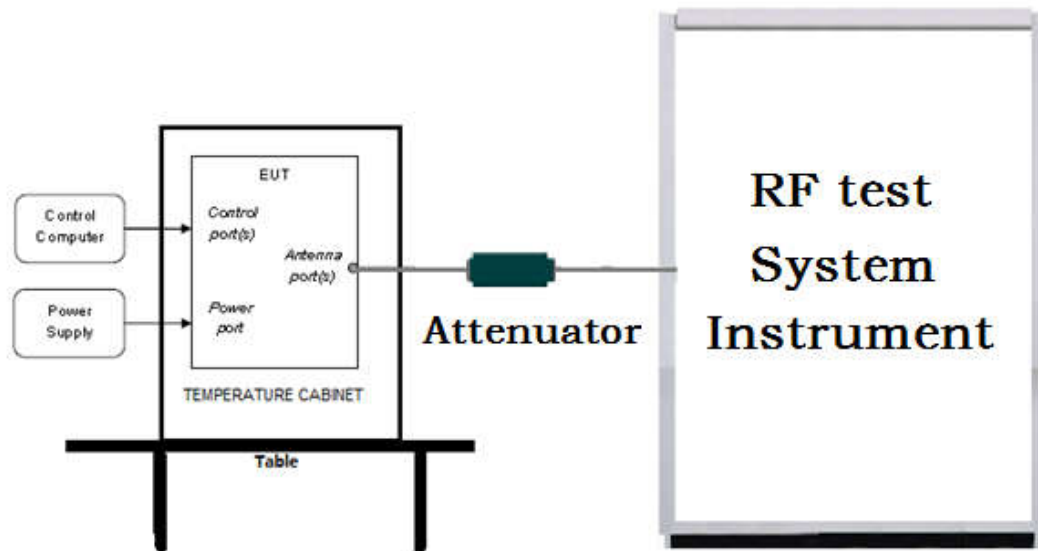

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

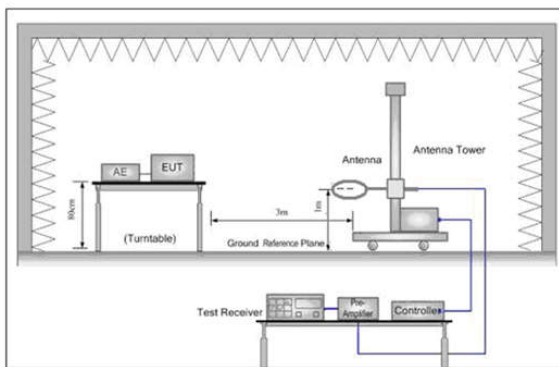


Figure 1. Below 30MHz

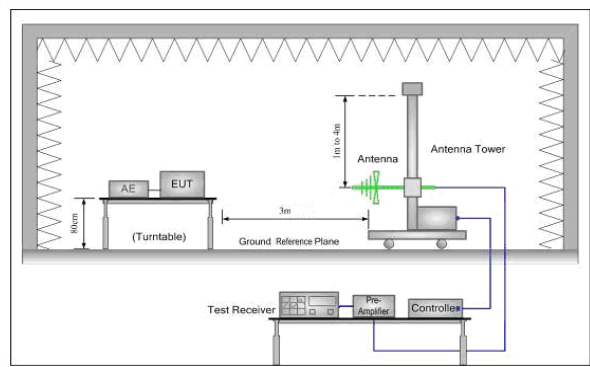


Figure 2. 30MHz to 1GHz


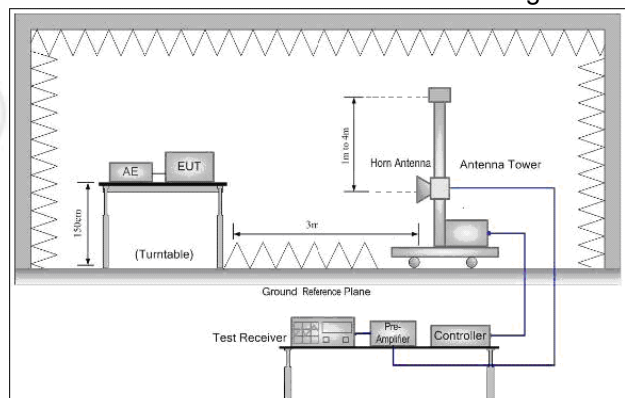


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

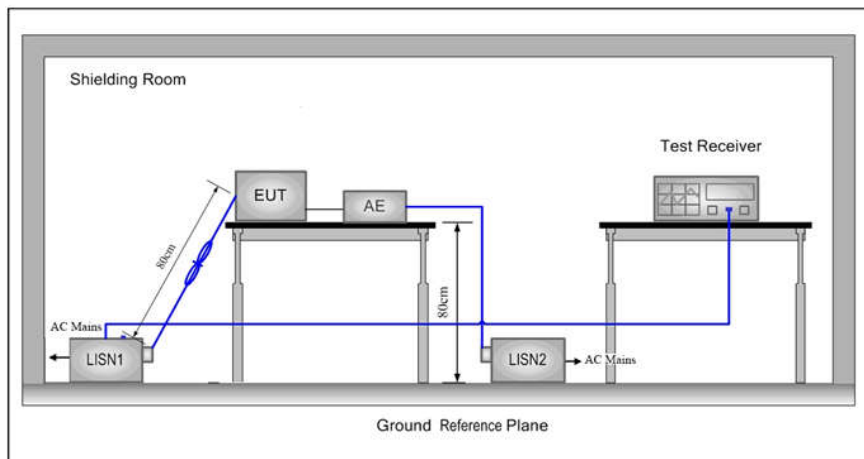

5.2 Test Environment

Operating Environment:	
Temperature:	24°C
Humidity:	56 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ π /4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

TX mode: The EUT transmitted the continuous signal at the specific channel(s).

Test mode:

Pre-scan under all rate at Lowest channel 1

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
Power(dBm)	5.845	6.124	6.281

Mode	π /4DQPSK		
packets	2-DH1	2-DH3	2-DH5
Power(dBm)	7.125	7.456	7.666
Mode	8DPSK		
packets	3-DH1	3-DH3	3-DH5
Power(dBm)	7.245	7.520	7.832

Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of π /4DQPSK, 3-DH5 packet the power is the worst case of 8DPSK.

6 General Information

6.1 Client Information

Applicant:	Hui Zhou Gaoshengda Technology Co., LTD
Address of Applicant:	No. 75 Zhongkai Development Area Huizhou, Guangdong, China
Manufacturer:	Hui Zhou Gaoshengda Technology Co., LTD
Address of Manufacturer:	No. 75 Zhongkai Development Area Huizhou, Guangdong, China
Factory:	Hui Zhou Gaoshengda Technology Co., LTD
Address of Factory:	No. 75 Zhongkai Development Area Huizhou, Guangdong, China

6.2 General Description of EUT

Product Name:	WIFI+BT Module
Model No.(EUT):	WCT1BR2201D, WCT1BR2701T
Test Model No.:	WCT1BR2701T
Trade mark:	GSD
EUT Supports Radios application:	BT 4.2 Dual mode, 2402-2480MHz 2.4G WiFi, 802.11b/g/n(20MHz)/n(40MHz) ,2412-2462MHz 5G WiFi, 802.11a/n(HT20)/n(HT40)/ac(HT20)/ac(HT40)/ac(HT80) 5G WiFi, 5150-5250MHz; 5725-5850MHz
Power Supply:	DC 3.3V
Sample Received Date:	Sep. 12, 2018
Sample tested Date:	Sep. 12, 2018 to Nov. 14, 2018

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	Other than BT 4.2
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Sample Type:	mobile production
Hopping Channel Type:	Adaptive Frequency Hopping systems
Firmware version of the sample:	V1.0(manufacturer declare)
Hardware version of the sample:	V1.0(manufacturer declare)
Test Power Grade:	N/A
Test Software of EUT:	Bluetooth RF Test Tool V2017.10.20(manufacturer declare)
Antenna Type:	PIFA Antenna
Antenna gain:	2.72dBi
Test Voltage:	DC 3.3V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name		Manufacture	model	serial number	Supplied by	Certification
AE1	Laptop	HP	430 G3	5CD6082JLC	CTI	FCC
AE2	Mouse	L.Selectron	OP-308	G1103000147VJKJ	CTI	FCC

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-13-2018	03-12-2019
Signal Generator	Keysight	N5182B	MY53051549	03-13-2018	03-12-2019
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-10-2018	01-09-2019
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-10-2018	01-09-2019
DC Power	Keysight	E3642A	MY54426035	03-13-2018	03-12-2019
PC-1	Lenovo	R4960d	---	03-13-2018	03-12-2019
BT&WI-FI Automatic control	R&S	OSP120	101374	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-2	15860006	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-1	15860004	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-4	158060007	03-13-2018	03-12-2019
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	03-13-2018	03-12-2019

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
Temperature/ Humidity Indicator	Defu	TH128	/	07-02-2018	07-01-2019
Communication test set	Agilent	E5515C	GB47050 534	03-16-2018	03-15-2019
Communication test set	R&S	CMW500	152394	03-16-2018	03-15-2019
LISN	R&S	ENV216	100098	05-10-2018	05-10-2019
LISN	schwarzbeck	NNLK8121	8121-529	05-10-2018	05-10-2019
Voltage Probe	R&S	ESH2-Z3 0299.7810.5 6	100042	06-13-2017	06-11-2020
Current Probe	R&S	EZ-17 816.2063.03	100106	05-30-2018	05-29-2019
ISN	TESEQ	ISN T800	30297	02-06-2018	02-05-2019
Barometer	changchun	DYM3	1188	07-02-2018	07-01-2019

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-04-2016	06-03-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	04-26-2018	04-25-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-30-2018	07-29-2019
Microwave Preamplifier	Agilent	8449B	3008A02425	08-21-2018	08-20-2019
Microwave Preamplifier	Tonscend	EMC051845 SE	980380	01-19-2018	01-18-2019
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-25-2018	04-23-2021
Loop Antenna	ETS	6502	00071730	06-22-2017	06-21-2019
Spectrum Analyzer	R&S	FSP40	100416	05-11-2018	05-10-2019
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
Multi device Controller	matur	NCD/070/10711112	---	01-10-2018	01-09-2019
LISN	schwarzbeck	NNBM8125	81251547	05-11-2018	05-10-2019
LISN	schwarzbeck	NNBM8125	81251548	05-11-2018	05-10-2019
Signal Generator	Agilent	E4438C	MY45095744	03-13-2018	03-12-2019
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Temperature/Humidity Indicator	TAYLOR	1451	1905	05-02-2018	05-01-2019
Communication test set	Agilent	E5515C	GB47050534	03-16-2018	03-15-2019
Cable line	Fulai(7M)	SF106	5219/6A	01-10-2018	01-09-2019
Cable line	Fulai(6M)	SF106	5220/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5216/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5217/6A	01-10-2018	01-09-2019
Communication test set	R&S	CMW500	104466	02-05-2018	02-04-2019
High-pass filter	Sinoscite	FL3CX03WG18NM12-0398-002	---	01-10-2018	01-09-2019
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA09CL12-0395-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA08CL12-0393-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA04CL12-0396-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA03CL12-0394-001	---	01-10-2018	01-09-2019

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

Appendix A): 20dB Occupied Bandwidth


Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
GFSK	LCH	0.9421	0.83935	PASS	Peak detector
GFSK	MCH	0.9448	0.83988	PASS	
GFSK	HCH	0.9455	0.84337	PASS	
$\pi/4$ DQPSK	LCH	1.285	1.1775	PASS	
$\pi/4$ DQPSK	MCH	1.286	1.1776	PASS	
$\pi/4$ DQPSK	HCH	1.284	1.1774	PASS	
8DPSK	LCH	1.295	1.1662	PASS	
8DPSK	MCH	1.294	1.1663	PASS	
8DPSK	HCH	1.293	1.1653	PASS	

Test Graph



<p>$\pi/4$DQPSK/LCH</p>	 <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1775 MHz</p> <p>Total Power 13.7 dBm</p> <p>Transmit Freq Error 12.922 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.285 MHz</p> <p>x dB -20.00 dB</p>
<p>$\pi/4$DQPSK/MCH</p>	 <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1776 MHz</p> <p>Total Power 13.7 dBm</p> <p>Transmit Freq Error 12.469 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.286 MHz</p> <p>x dB -20.00 dB</p>
<p>$\pi/4$DQPSK/HCH</p>	 <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1774 MHz</p> <p>Total Power 13.5 dBm</p> <p>Transmit Freq Error 12.820 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.284 MHz</p> <p>x dB -20.00 dB</p>

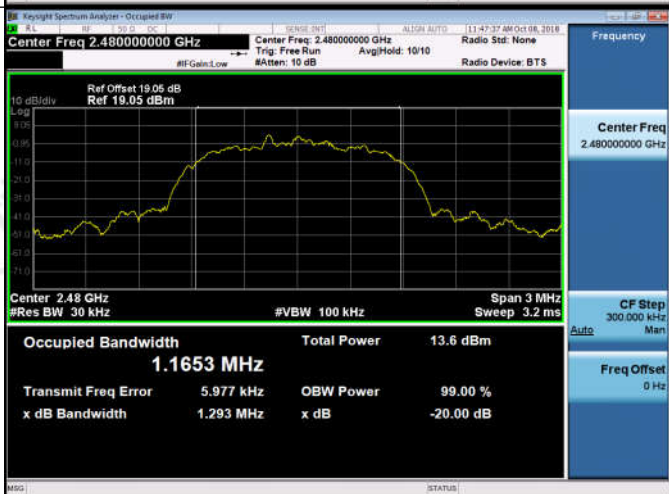
8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	




Appendix B): Carrier Frequency Separation


Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	0.980	PASS
GFSK	MCH	0.996	PASS
GFSK	HCH	1.090	PASS
$\pi/4$ DQPSK	LCH	1.022	PASS
$\pi/4$ DQPSK	MCH	0.948	PASS
$\pi/4$ DQPSK	HCH	0.912	PASS
8DPSK	LCH	0.994	PASS
8DPSK	MCH	1.006	PASS
8DPSK	HCH	1.144	PASS

Test Graph

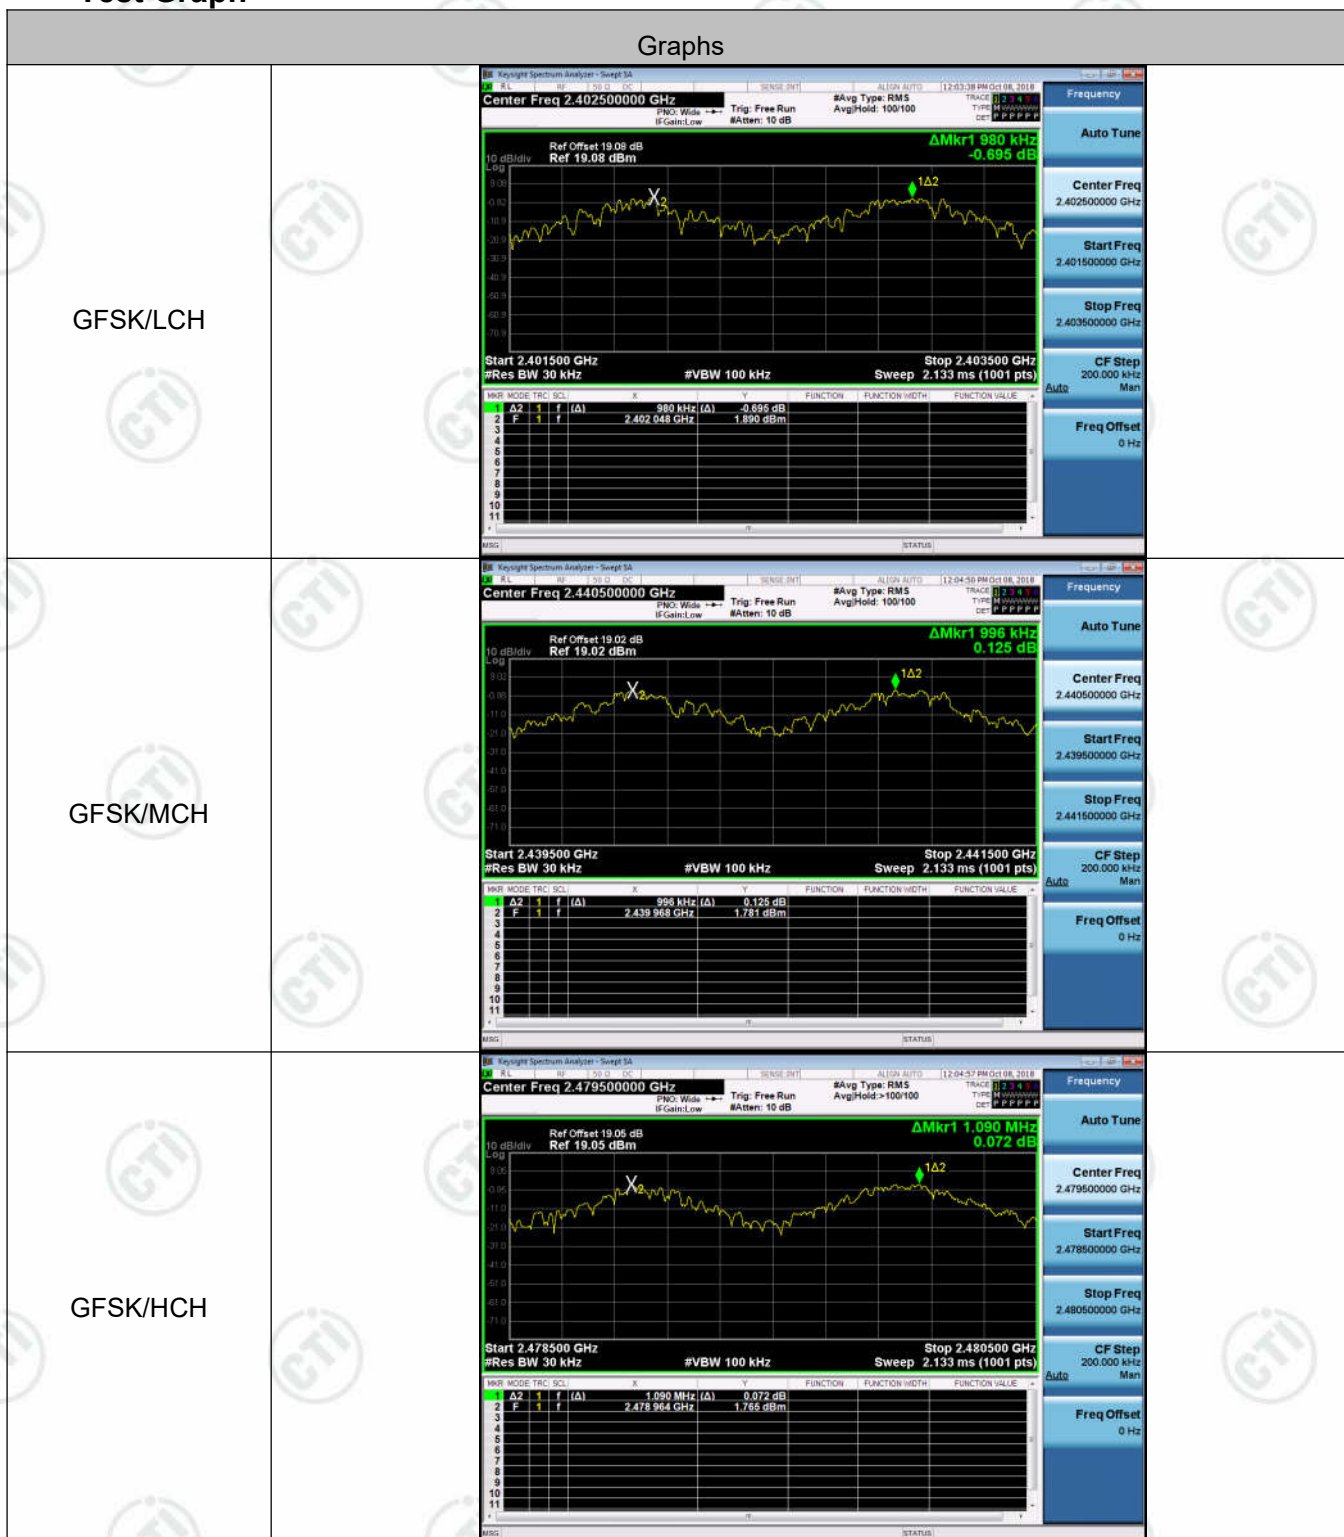

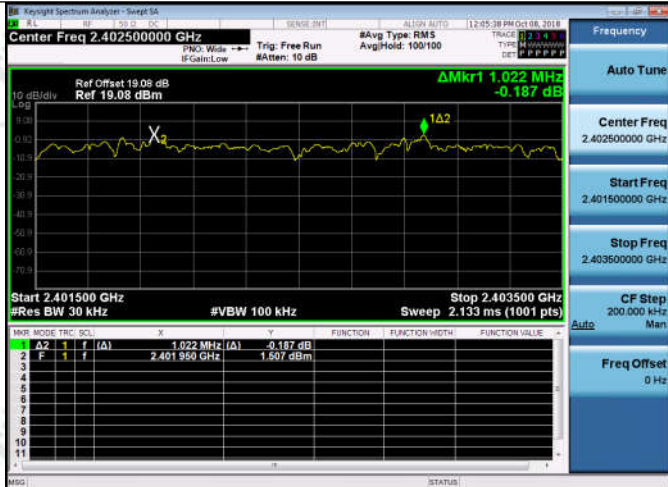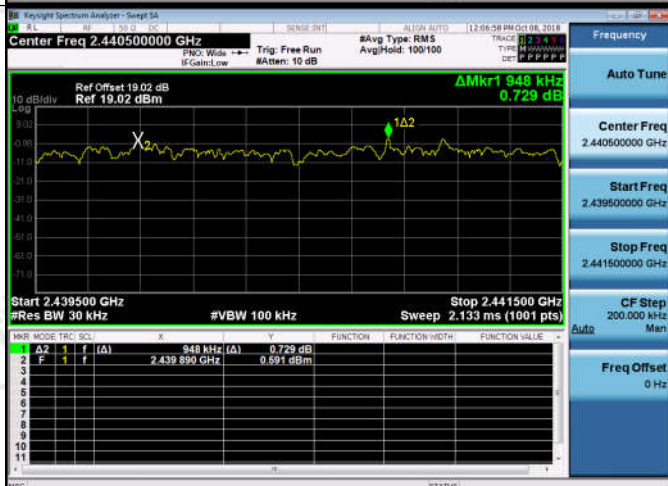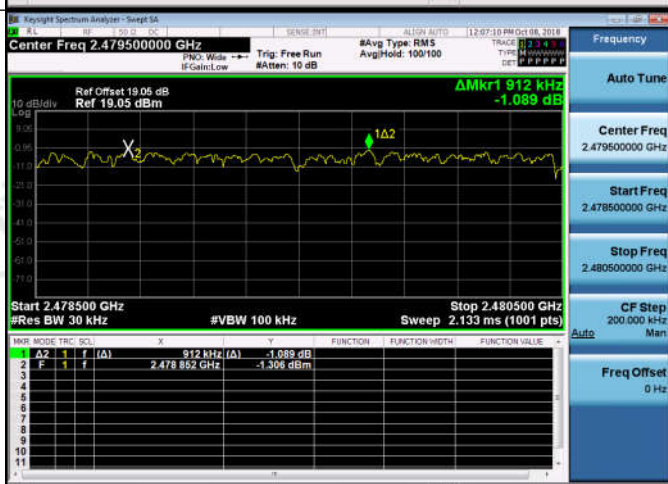$\pi/4$ DQPSK/LCH	 <p>Center Freq 2.402500000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Start 2.401500 GHz #Res BW 30 kHz</p> <p>Stop 2.403500 GHz #VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table><tr><th>MR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION-METH</th><th>FUNCTION-VALUE</th></tr><tr><td>1</td><td>ΔZ</td><td>1</td><td>f</td><td>(A)</td><td>1.022 MHz (A)</td><td>-0.187 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.401950 GHz</td><td>1.507 dBm</td><td></td><td></td></tr></table>	MR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION-METH	FUNCTION-VALUE	1	ΔZ	1	f	(A)	1.022 MHz (A)	-0.187 dB			2	F	1	f		2.401950 GHz	1.507 dBm		
MR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION-METH	FUNCTION-VALUE																				
1	ΔZ	1	f	(A)	1.022 MHz (A)	-0.187 dB																						
2	F	1	f		2.401950 GHz	1.507 dBm																						
$\pi/4$ DQPSK/MCH	 <p>Center Freq 2.440500000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>Start 2.439500 GHz #Res BW 30 kHz</p> <p>Stop 2.441500 GHz #VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table><tr><th>MR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION-METH</th><th>FUNCTION-VALUE</th></tr><tr><td>1</td><td>ΔZ</td><td>1</td><td>f</td><td>(A)</td><td>948 kHz (A)</td><td>0.729 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.439890 GHz</td><td>0.591 dBm</td><td></td><td></td></tr></table>	MR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION-METH	FUNCTION-VALUE	1	ΔZ	1	f	(A)	948 kHz (A)	0.729 dB			2	F	1	f		2.439890 GHz	0.591 dBm		
MR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION-METH	FUNCTION-VALUE																				
1	ΔZ	1	f	(A)	948 kHz (A)	0.729 dB																						
2	F	1	f		2.439890 GHz	0.591 dBm																						
$\pi/4$ DQPSK/HCH	 <p>Center Freq 2.479500000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Start 2.478500 GHz #Res BW 30 kHz</p> <p>Stop 2.480500 GHz #VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table><tr><th>MR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION-METH</th><th>FUNCTION-VALUE</th></tr><tr><td>1</td><td>ΔZ</td><td>1</td><td>f</td><td>(A)</td><td>912 kHz (A)</td><td>-1.089 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.478862 GHz</td><td>-1.306 dBm</td><td></td><td></td></tr></table>	MR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION-METH	FUNCTION-VALUE	1	ΔZ	1	f	(A)	912 kHz (A)	-1.089 dB			2	F	1	f		2.478862 GHz	-1.306 dBm		
MR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION-METH	FUNCTION-VALUE																				
1	ΔZ	1	f	(A)	912 kHz (A)	-1.089 dB																						
2	F	1	f		2.478862 GHz	-1.306 dBm																						

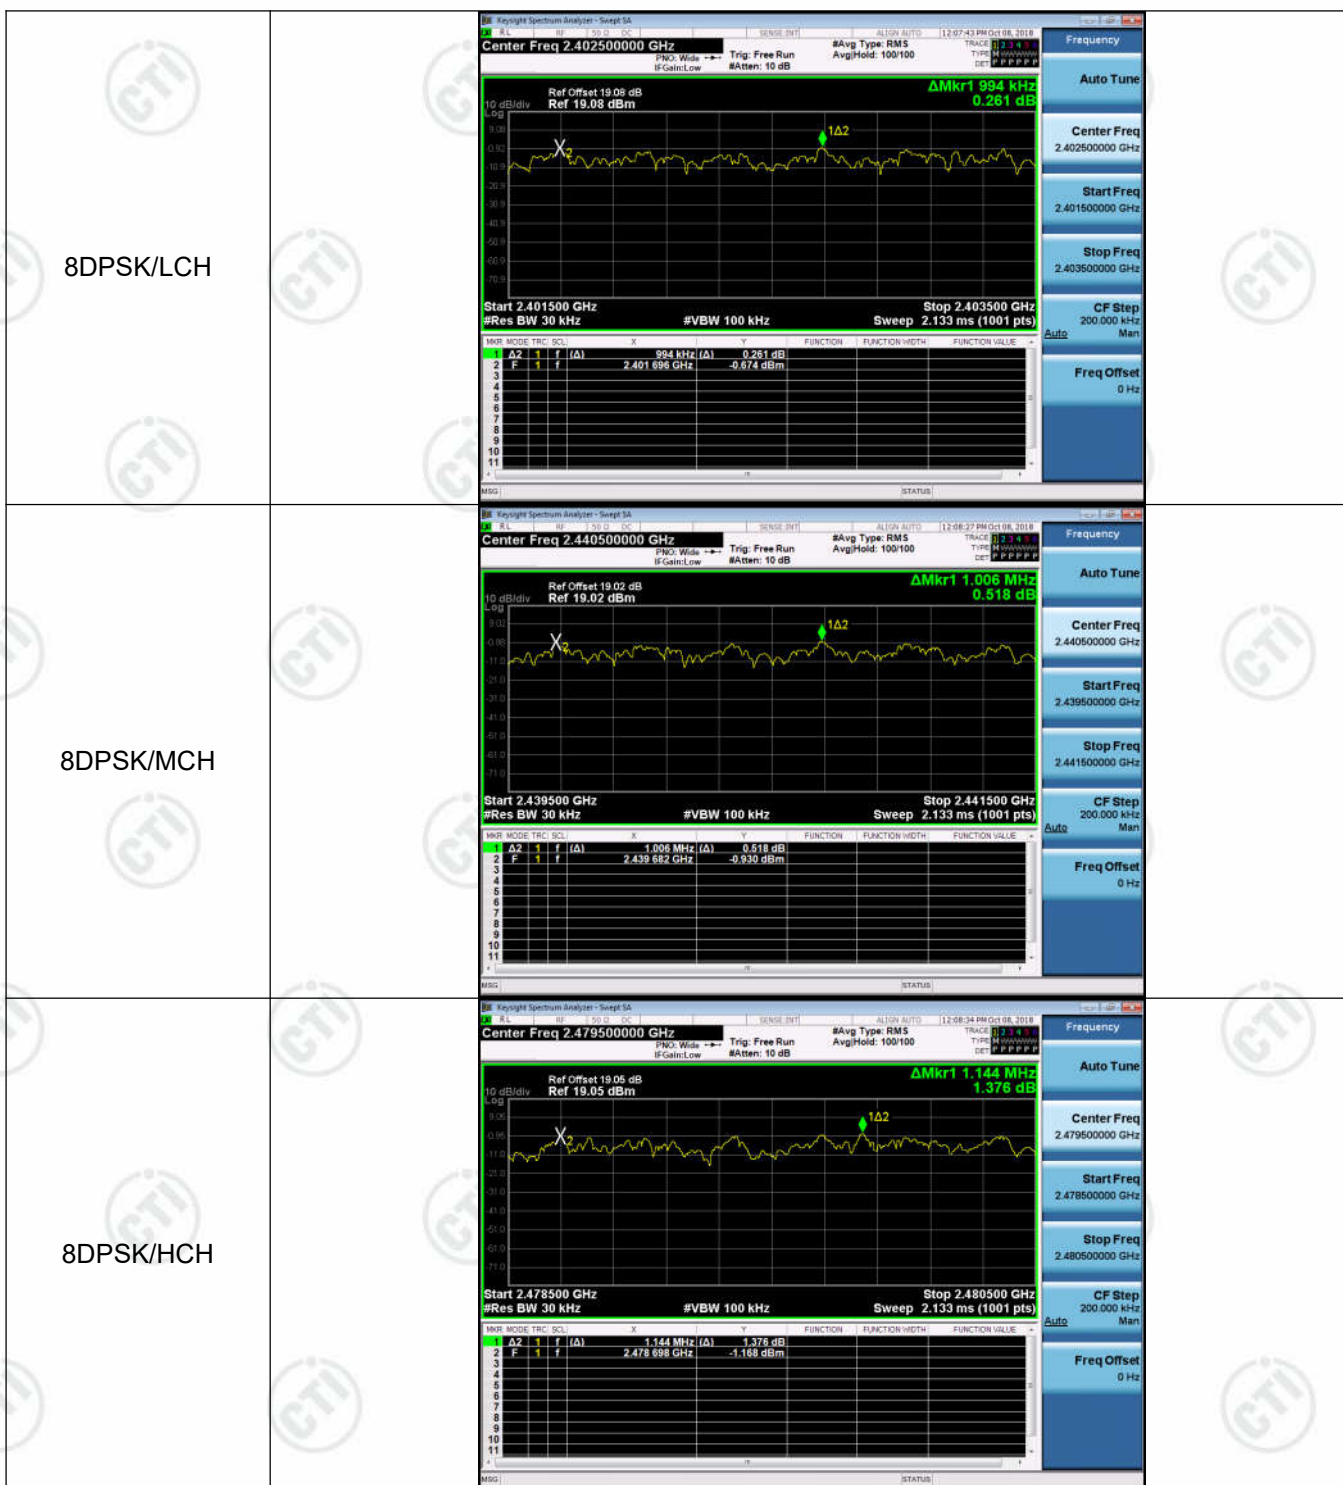

Appendix C): Dwell Time

Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.362267	320	0.116	0.78	PASS
GFSK	DH1	MCH	0.362266	320	0.116	0.78	PASS
GFSK	DH1	HCH	0.362267	320	0.116	0.78	PASS
GFSK	DH3	LCH	1.6188	160	0.259	0.94	PASS
GFSK	DH3	MCH	1.61754	160	0.259	0.94	PASS
GFSK	DH3	HCH	1.618797	160	0.259	0.94	PASS
GFSK	DH5	LCH	2.852	106.7	0.304	0.96	PASS
GFSK	DH5	MCH	2.852	106.7	0.304	0.96	PASS
GFSK	DH5	HCH	2.852	106.7	0.304	0.96	PASS


Test Graph

Graphs


GFSK_DH1/LCH





GFSK_DH1/MCH

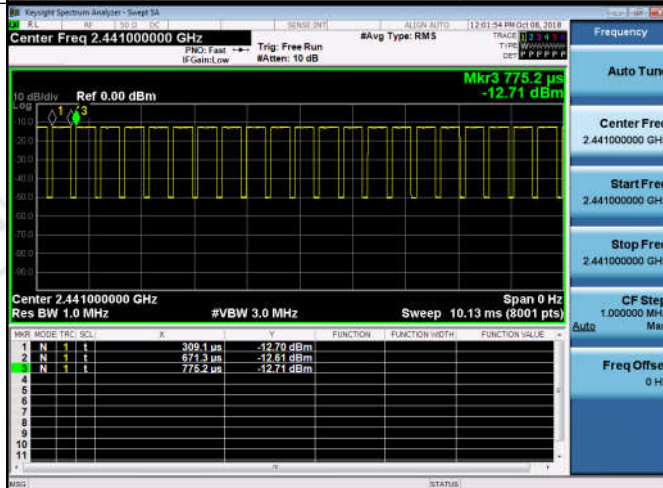

GFSK_DH1/HCH

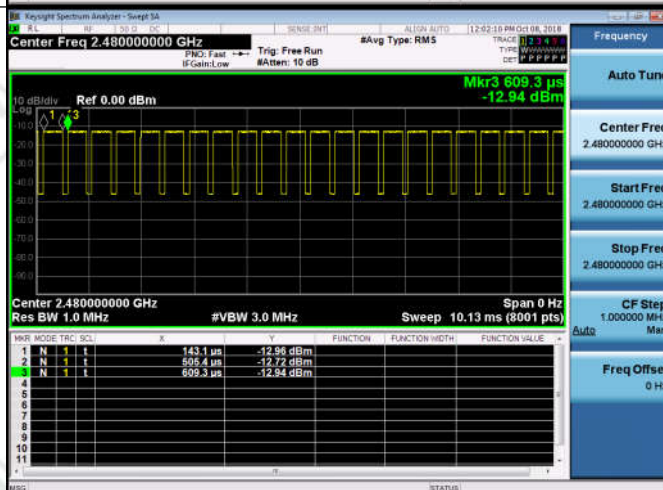

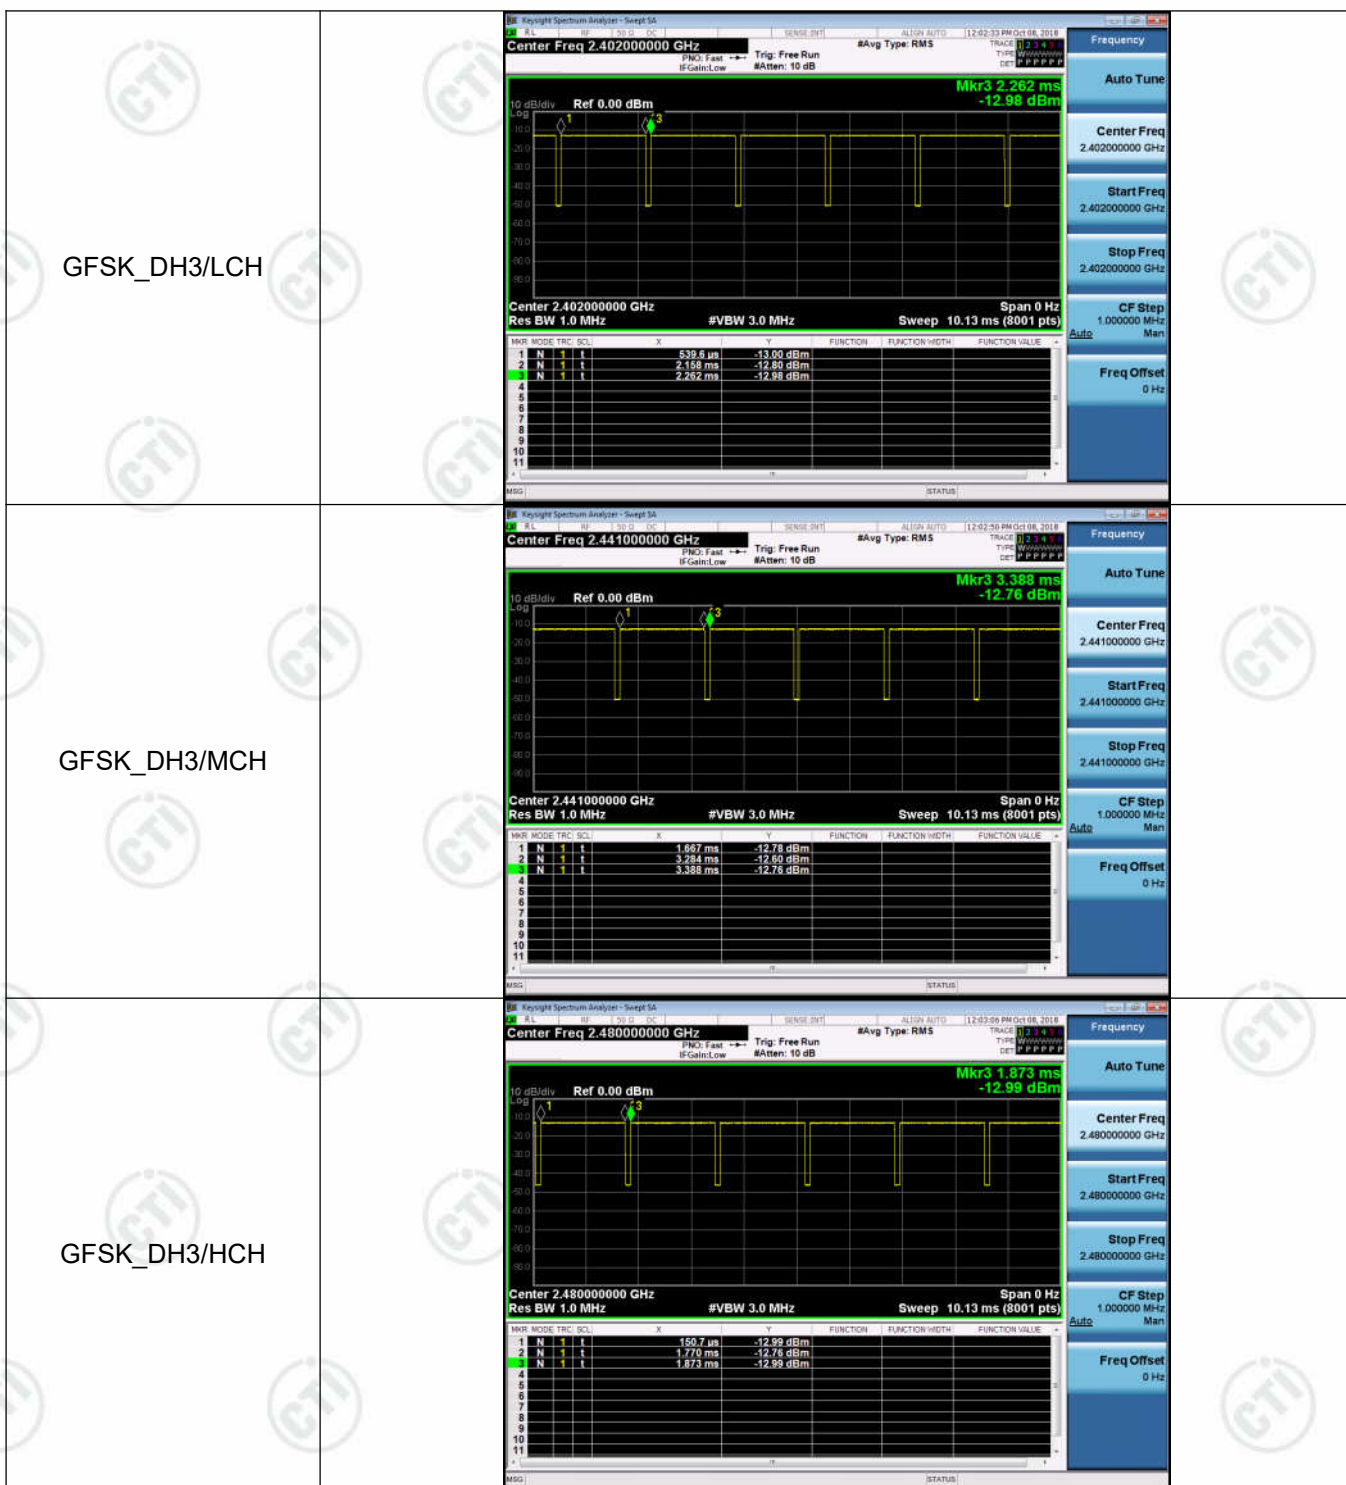

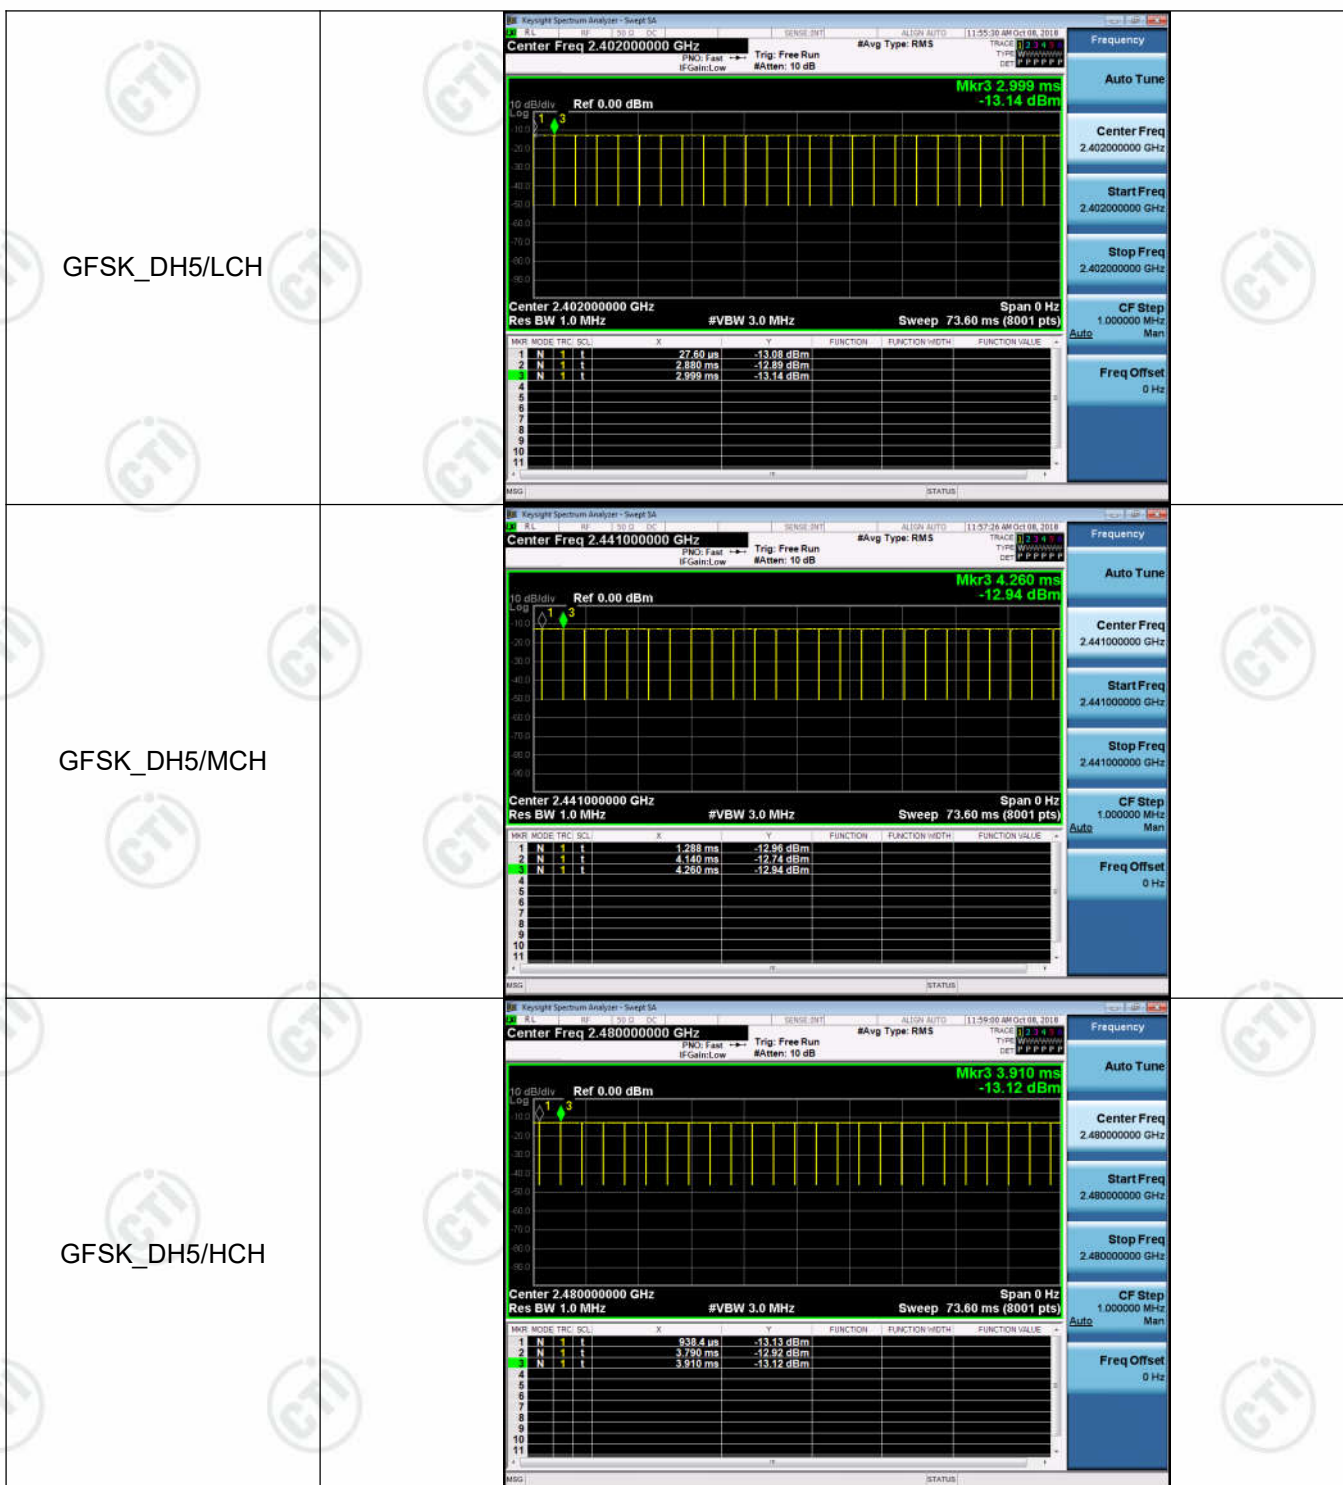


Appendix D): Hopping Channel Number

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

Graphs

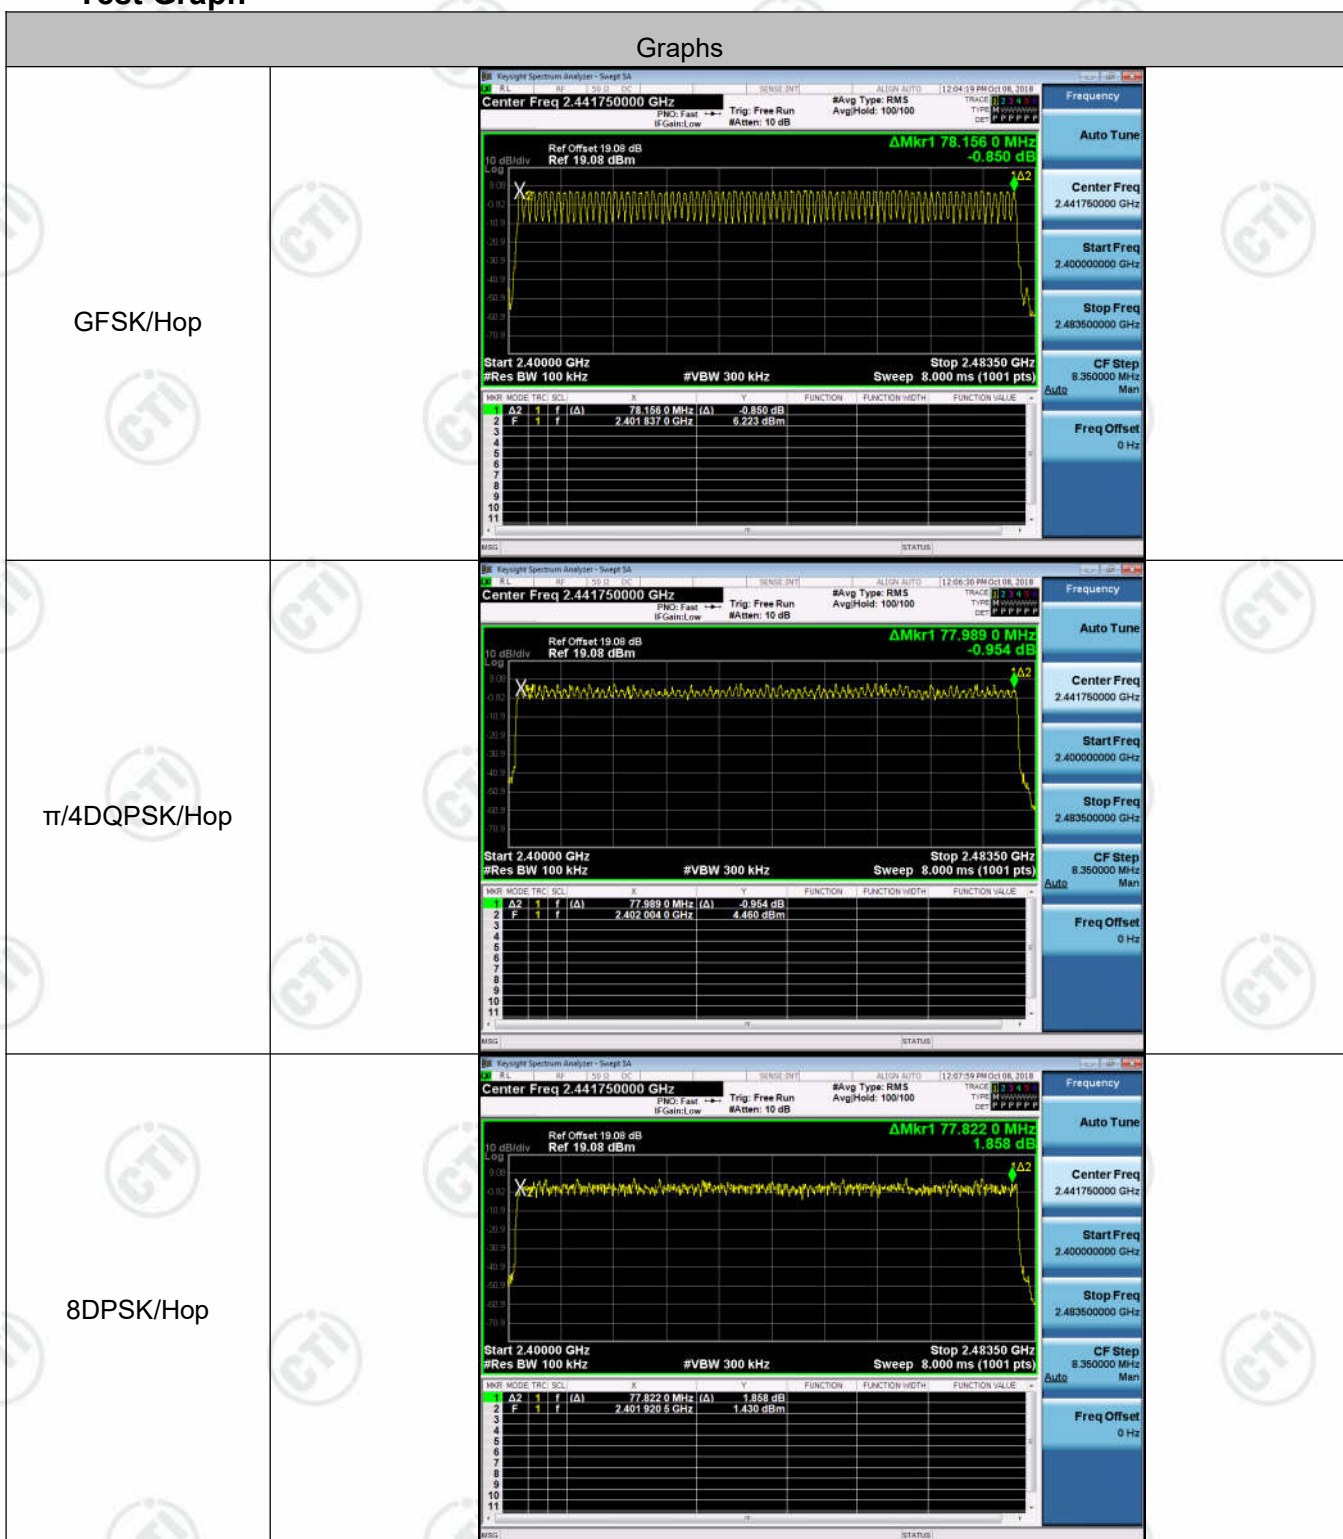


Appendix E): Conducted Peak Output Power

Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	6.281	PASS
GFSK	MCH	6.407	PASS
GFSK	HCH	6.313	PASS
$\pi/4$ DQPSK	LCH	7.666	PASS
$\pi/4$ DQPSK	MCH	7.771	PASS
$\pi/4$ DQPSK	HCH	7.648	PASS
8DPSK	LCH	7.832	PASS
8DPSK	MCH	8.140	PASS
8DPSK	HCH	7.974	PASS

Test Graph

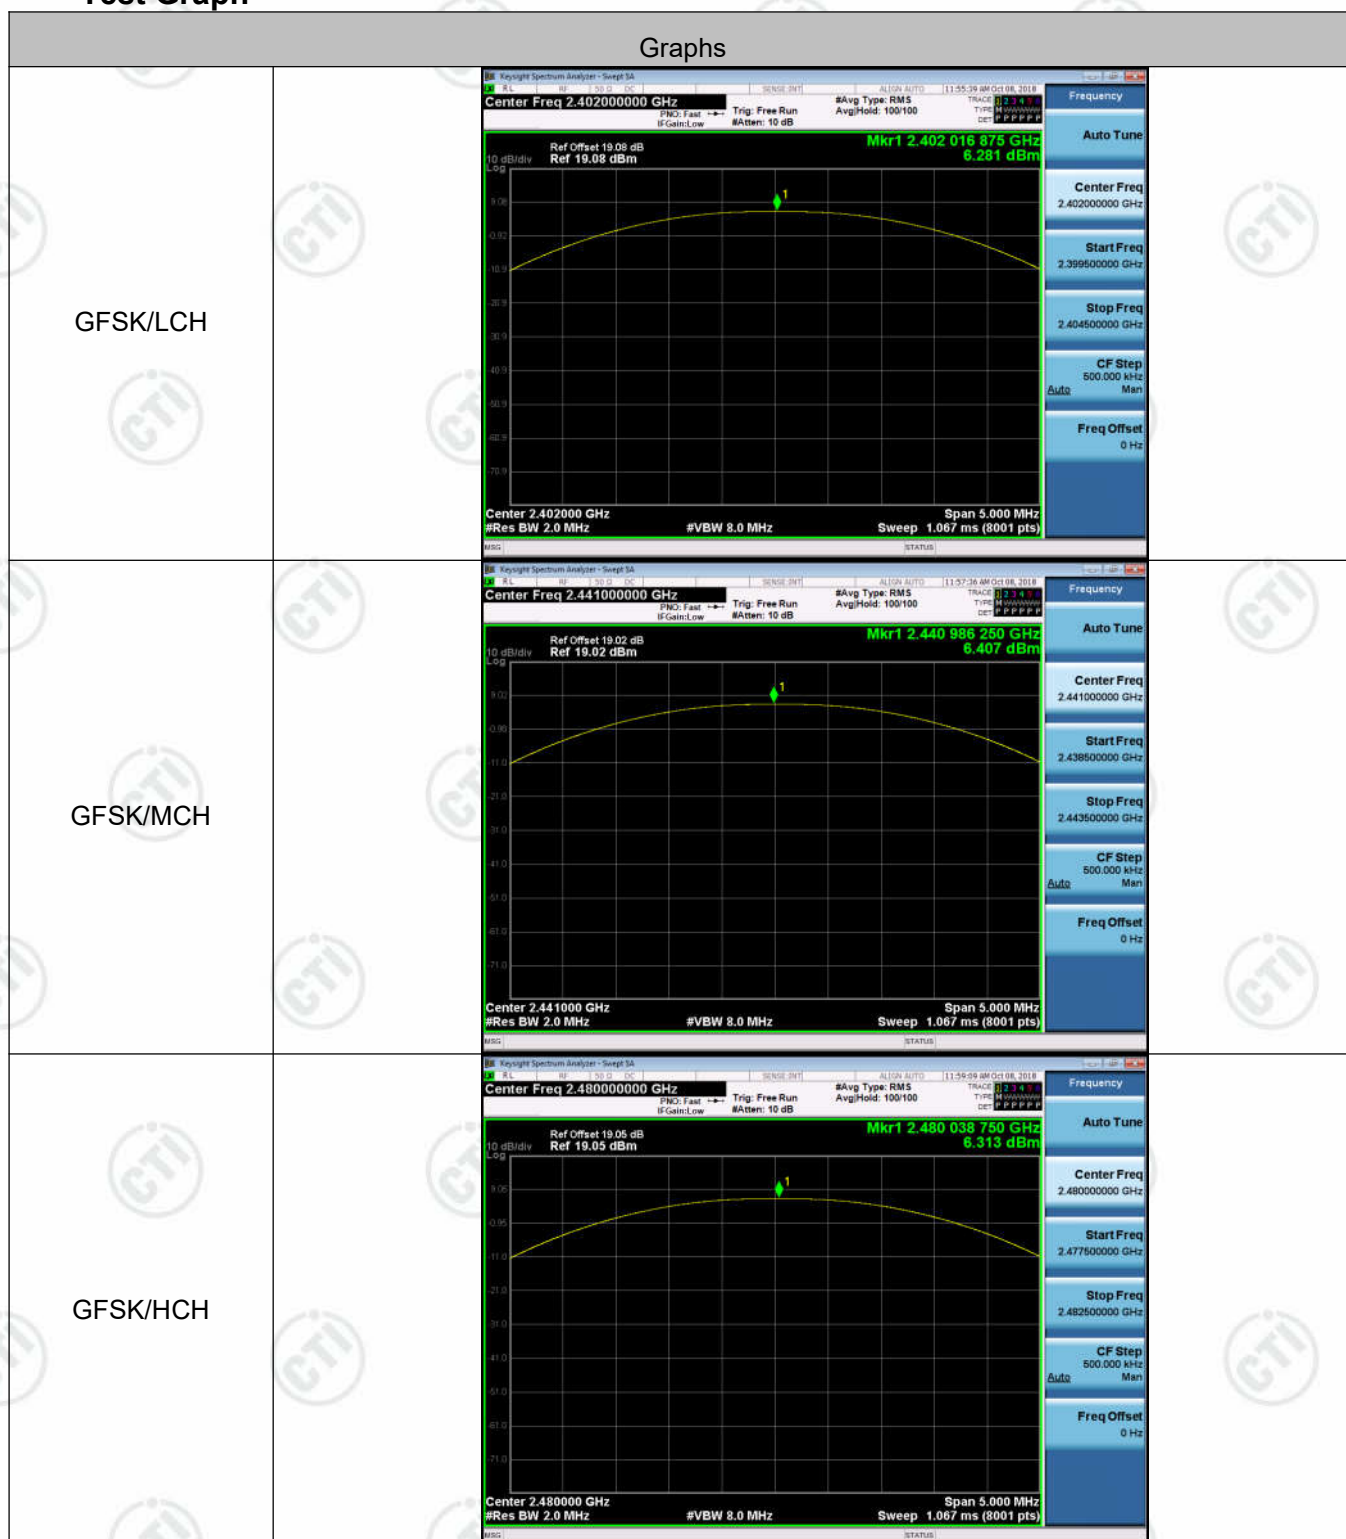






Appendix F): Band-edge for RF Conducted Emissions


Result Table




Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	6.047	Off	-60.031	-13.95	PASS
			6.174	On	-57.989	-13.83	PASS
GFSK	HCH	2480	6.039	Off	-56.948	-13.96	PASS
			5.990	On	-58.568	-14.01	PASS
$\pi/4$ DQPSK	LCH	2402	6.122	Off	-60.067	-13.88	PASS
			6.009	On	-59.570	-13.99	PASS
$\pi/4$ DQPSK	HCH	2480	5.956	Off	-57.174	-14.04	PASS
			5.285	On	-58.200	-14.72	PASS
8DPSK	LCH	2402	5.813	Off	-59.640	-14.19	PASS
			6.343	On	-59.058	-13.66	PASS
8DPSK	HCH	2480	6.036	Off	-57.207	-13.96	PASS
			6.144	On	-58.445	-13.86	PASS


Test Graph

Graphs

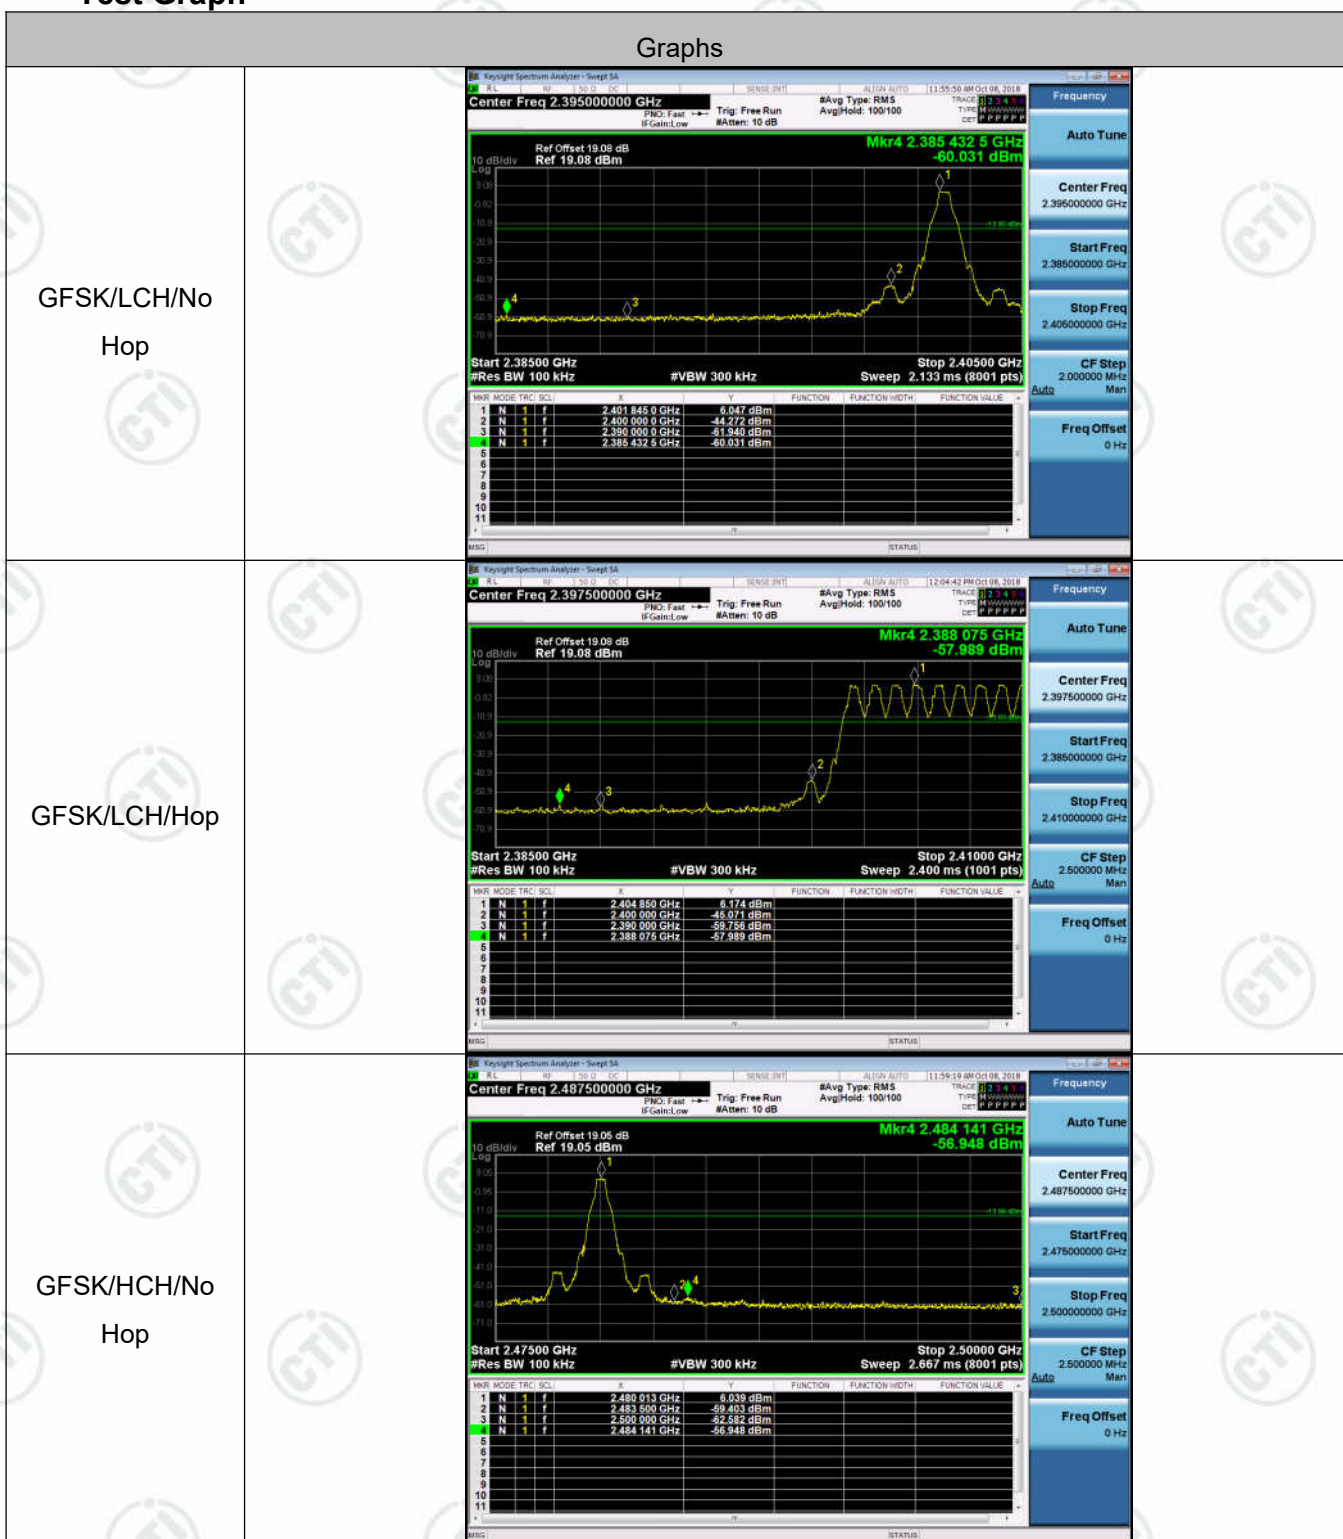

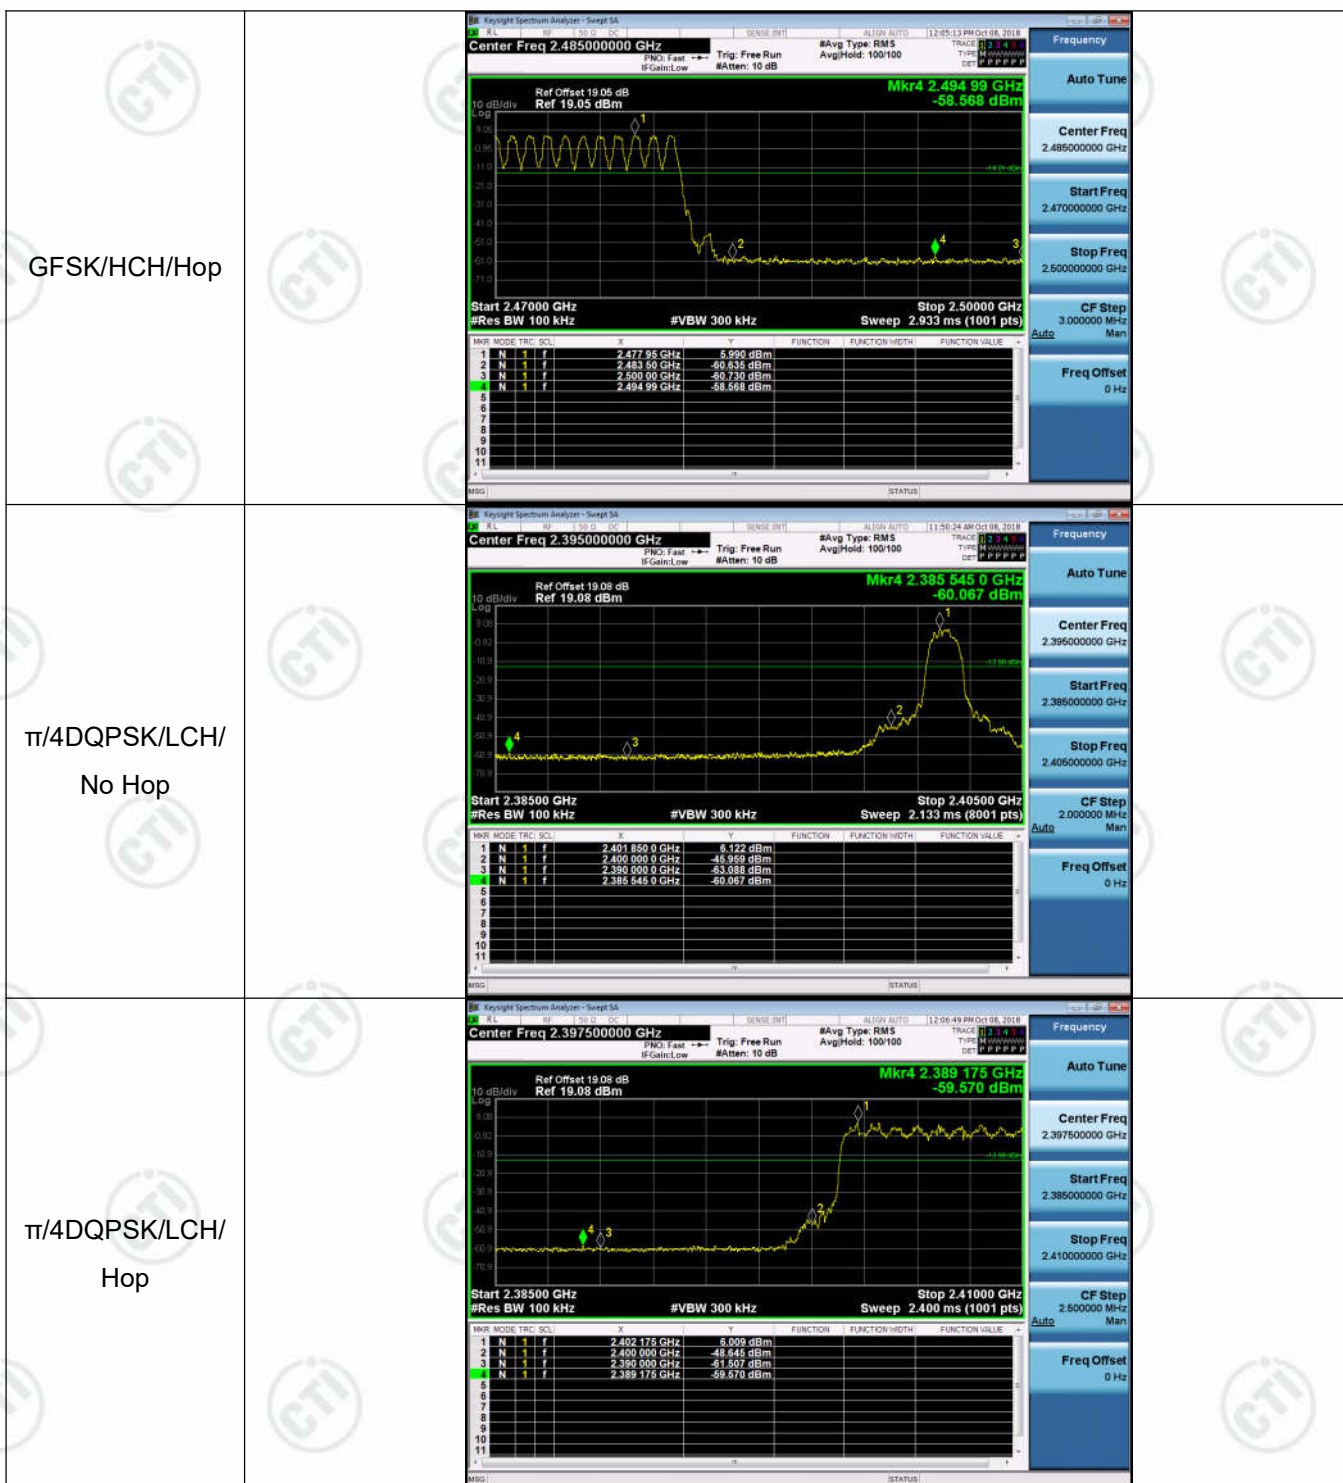

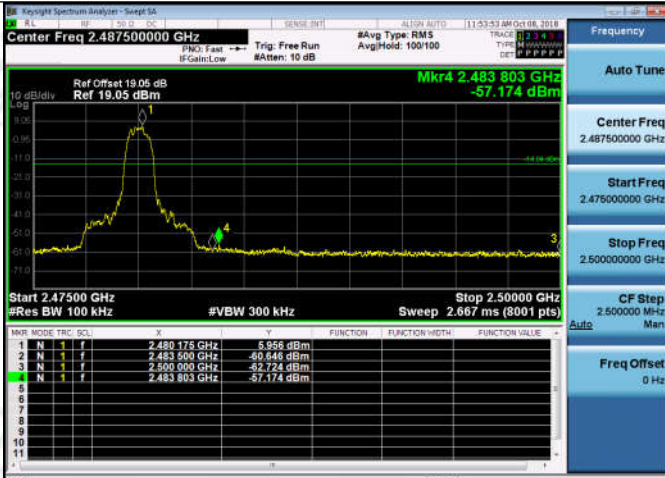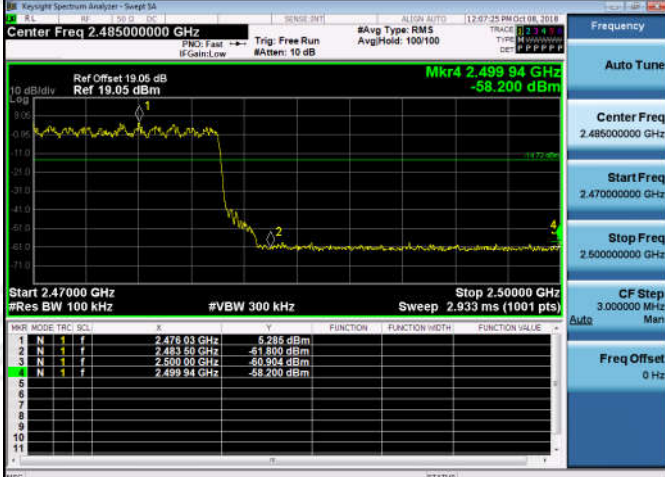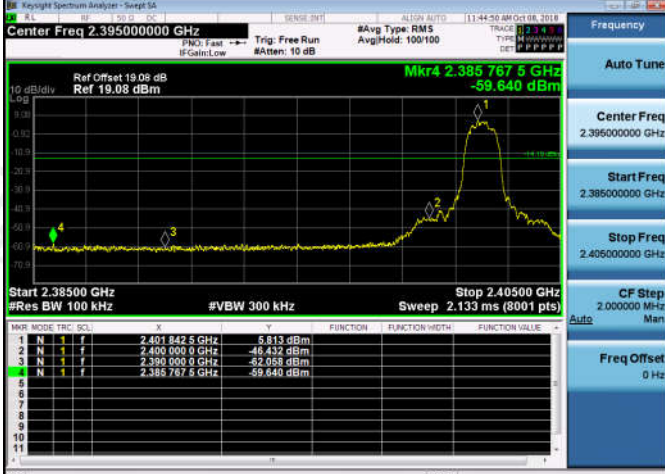$\pi/4$ DQPSK/HCH/ No Hop	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480175 GHz</td><td>5.956 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483500 GHz</td><td>-60.646 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500000 GHz</td><td>-62.724 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.483803 GHz</td><td>-57.174 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480175 GHz	5.956 dBm				2	N	1	f	2.483500 GHz	-60.646 dBm				3	N	1	f	2.500000 GHz	-62.724 dBm				4	N	1	f	2.483803 GHz	-57.174 dBm			
MNR	MODE	FREQ	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480175 GHz	5.956 dBm																																									
2	N	1	f	2.483500 GHz	-60.646 dBm																																									
3	N	1	f	2.500000 GHz	-62.724 dBm																																									
4	N	1	f	2.483803 GHz	-57.174 dBm																																									
$\pi/4$ DQPSK/HCH/ Hop	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.47603 GHz</td><td>5.288 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.48350 GHz</td><td>-61.600 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.50000 GHz</td><td>-60.904 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.49994 GHz</td><td>-58.200 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.47603 GHz	5.288 dBm				2	N	1	f	2.48350 GHz	-61.600 dBm				3	N	1	f	2.50000 GHz	-60.904 dBm				4	N	1	f	2.49994 GHz	-58.200 dBm			
MNR	MODE	FREQ	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.47603 GHz	5.288 dBm																																									
2	N	1	f	2.48350 GHz	-61.600 dBm																																									
3	N	1	f	2.50000 GHz	-60.904 dBm																																									
4	N	1	f	2.49994 GHz	-58.200 dBm																																									
8DPSK/LCH/No Hop	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4018425 GHz</td><td>5.813 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400000 GHz</td><td>-46.432 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.380000 GHz</td><td>-62.058 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.3857675 GHz</td><td>-59.640 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4018425 GHz	5.813 dBm				2	N	1	f	2.400000 GHz	-46.432 dBm				3	N	1	f	2.380000 GHz	-62.058 dBm				4	N	1	f	2.3857675 GHz	-59.640 dBm			
MNR	MODE	FREQ	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4018425 GHz	5.813 dBm																																									
2	N	1	f	2.400000 GHz	-46.432 dBm																																									
3	N	1	f	2.380000 GHz	-62.058 dBm																																									
4	N	1	f	2.3857675 GHz	-59.640 dBm																																									


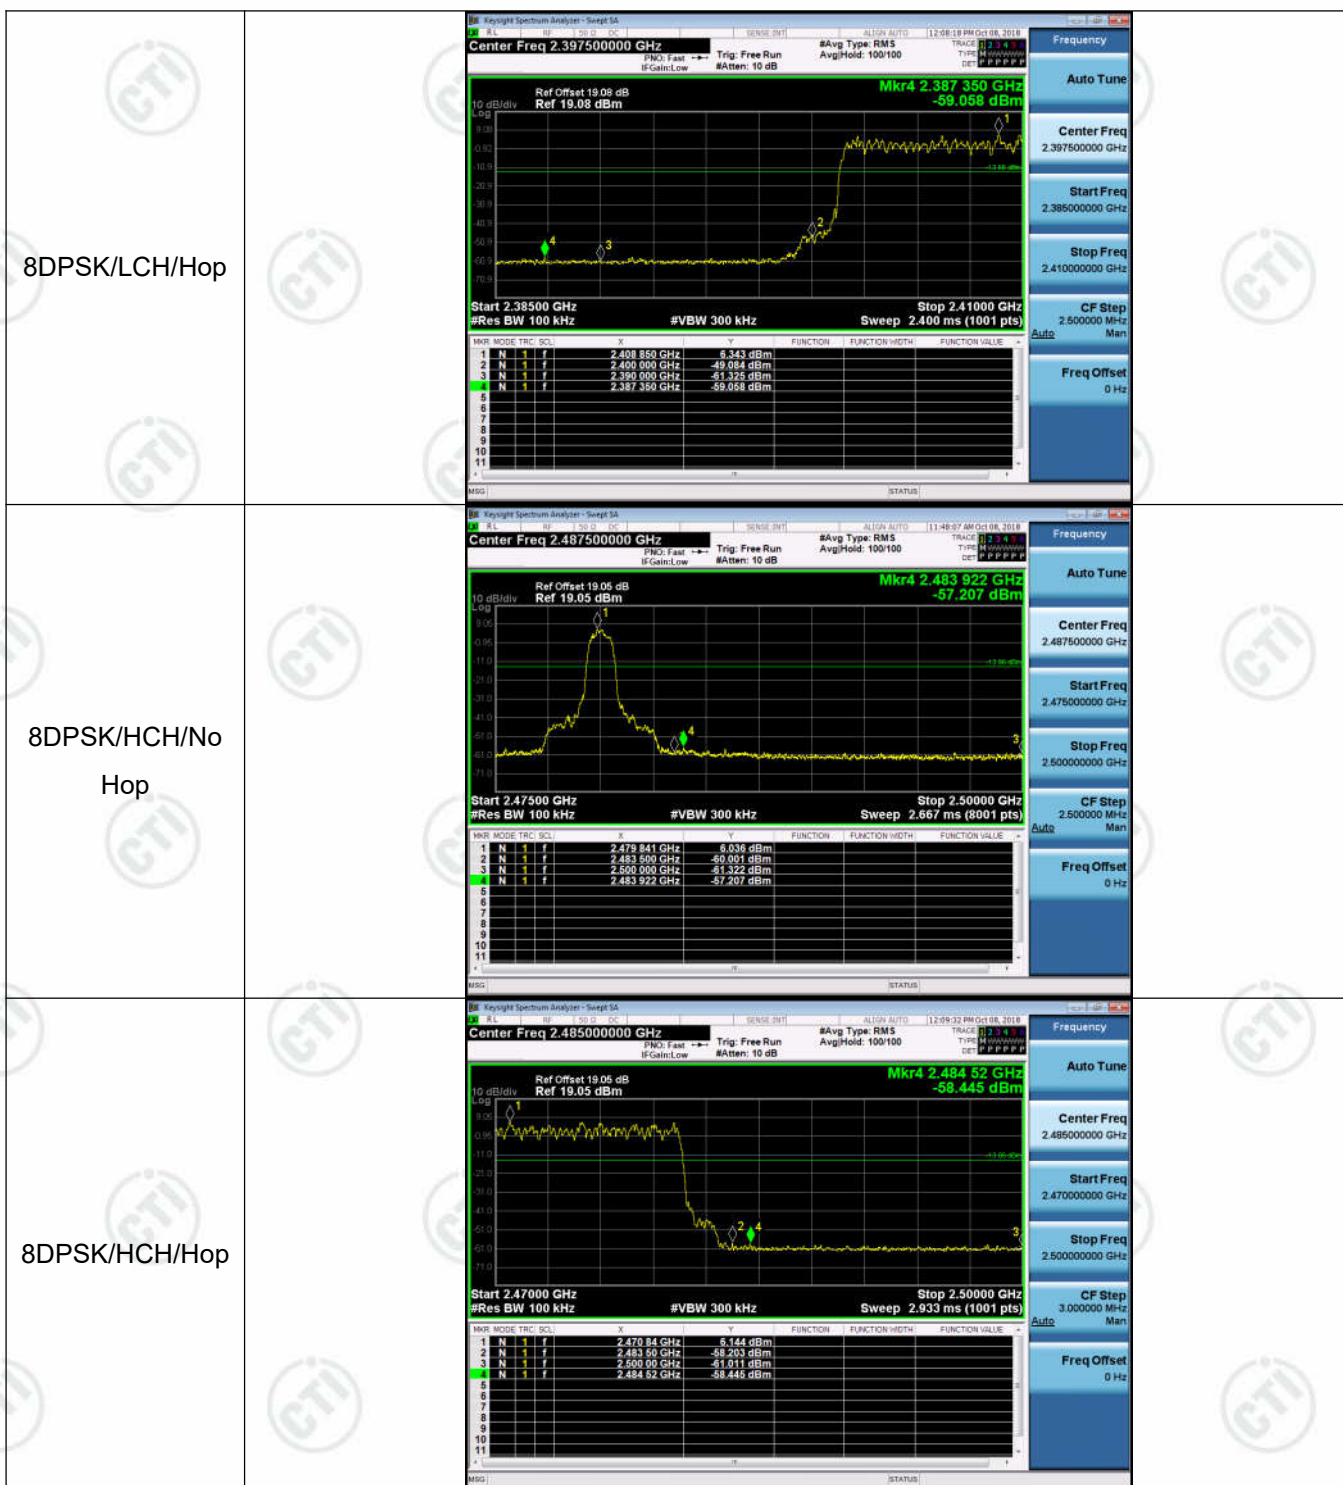



Appendix G): RF Conducted Spurious Emissions

Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	6.045	<Limit	PASS
GFSK	MCH	6.125	<Limit	PASS
GFSK	HCH	5.934	<Limit	PASS
$\pi/4$ DQPSK	LCH	6.085	<Limit	PASS
$\pi/4$ DQPSK	MCH	6.183	<Limit	PASS
$\pi/4$ DQPSK	HCH	5.911	<Limit	PASS
8DPSK	LCH	5.615	<Limit	PASS
8DPSK	MCH	6.126	<Limit	PASS
8DPSK	HCH	5.996	<Limit	PASS



Test Graph

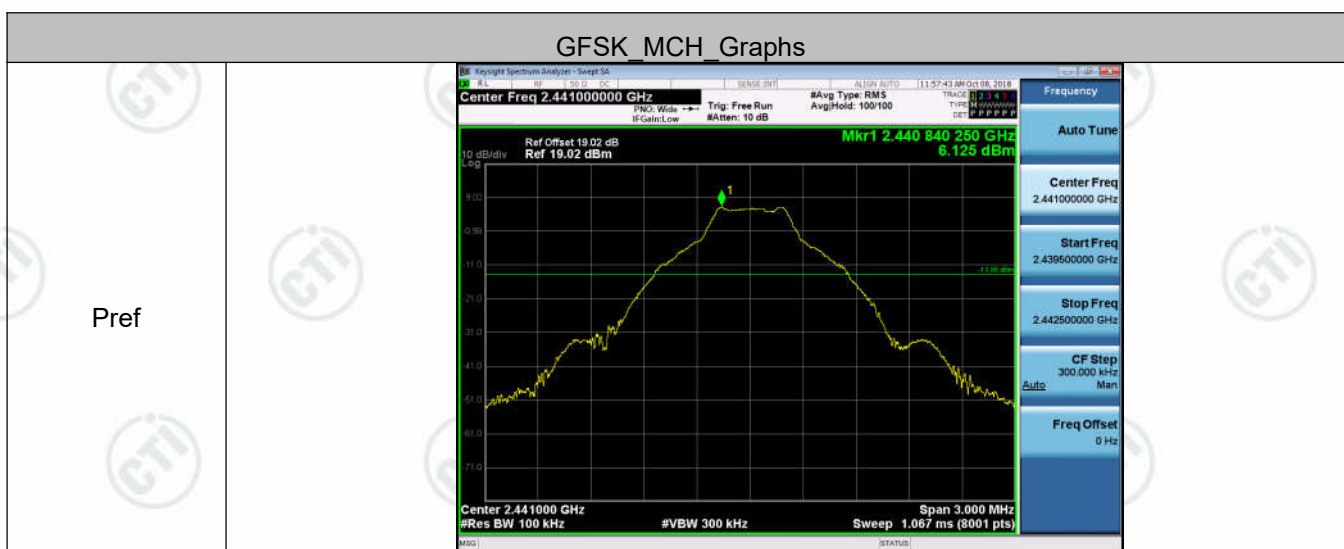
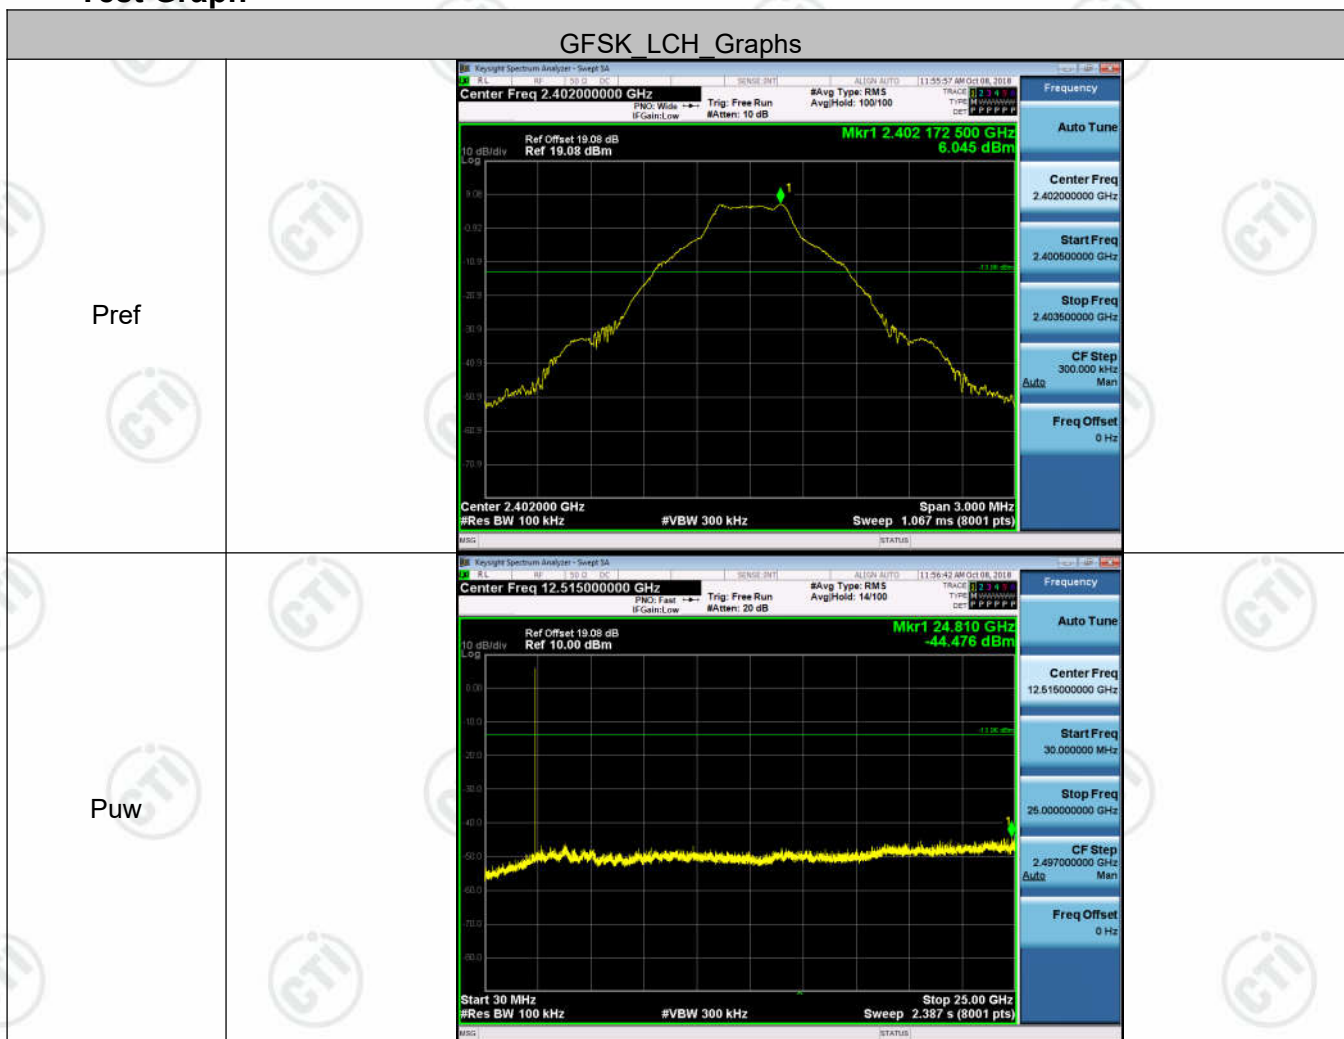



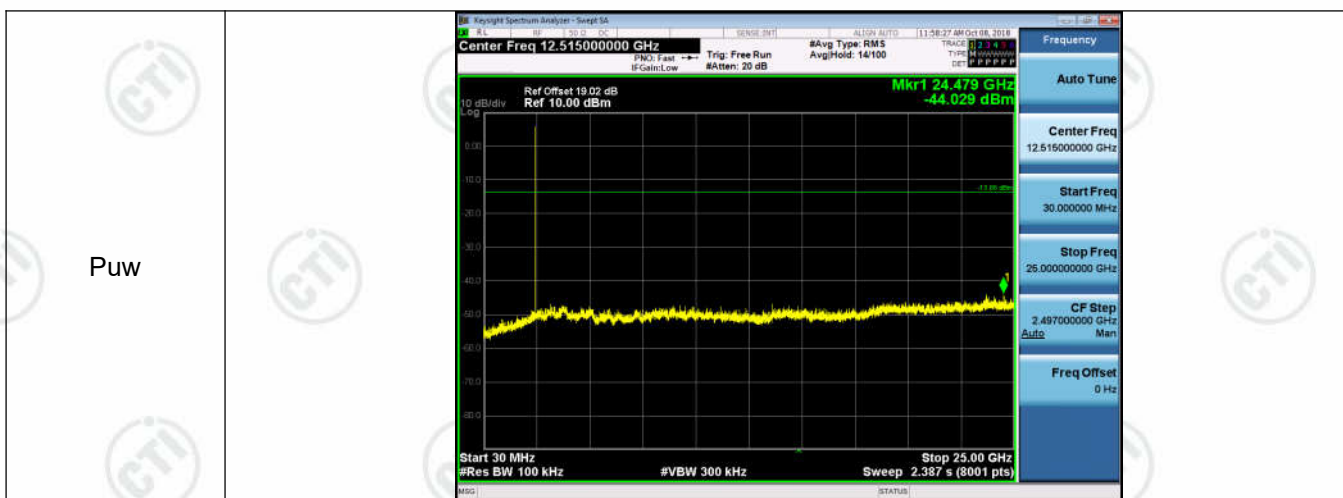




GFSK HCH Graphs

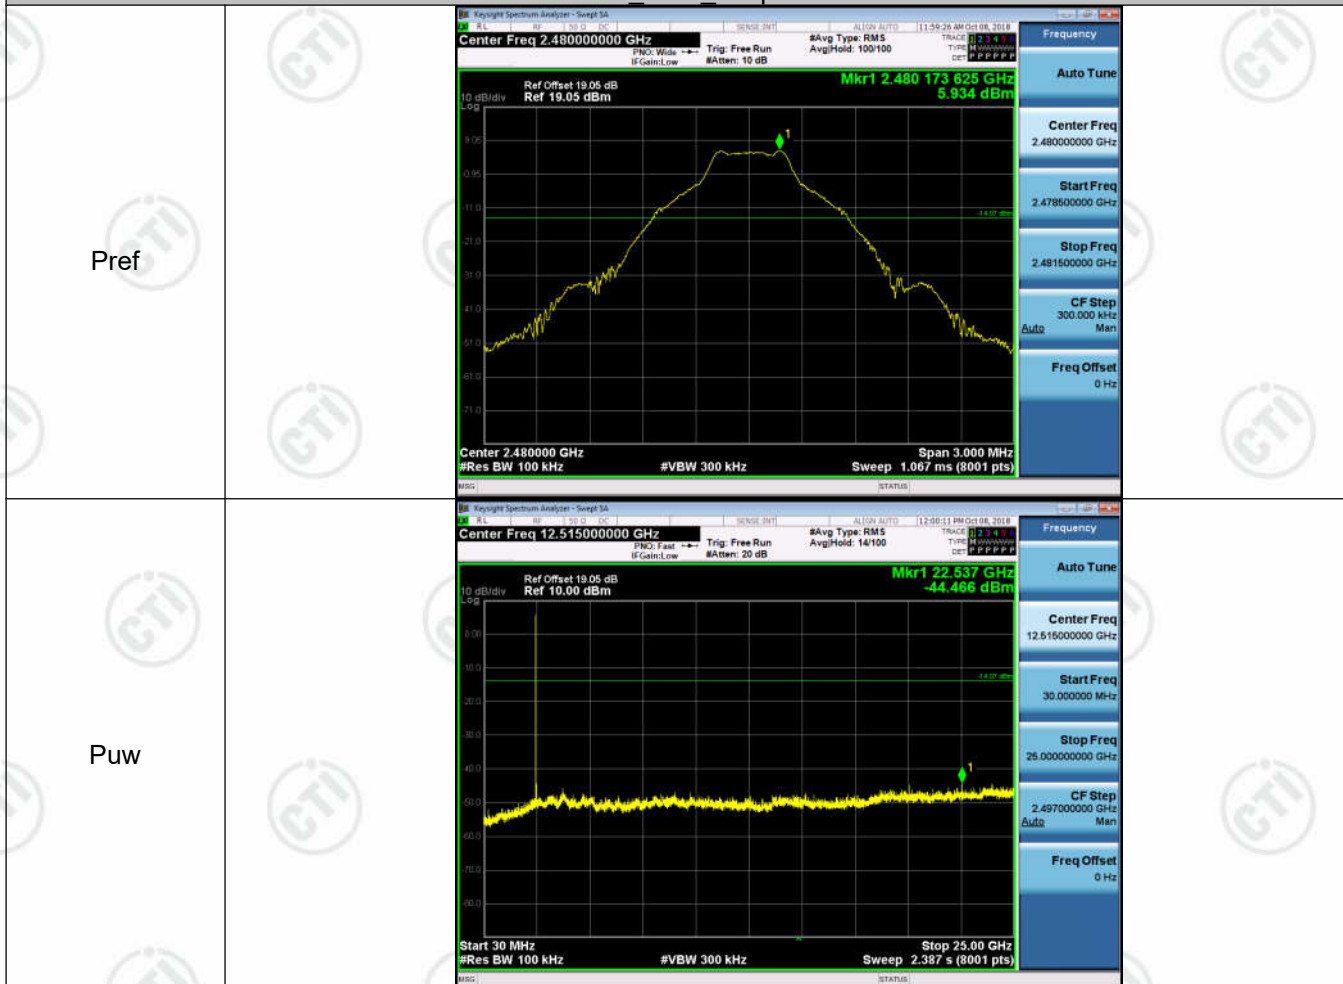

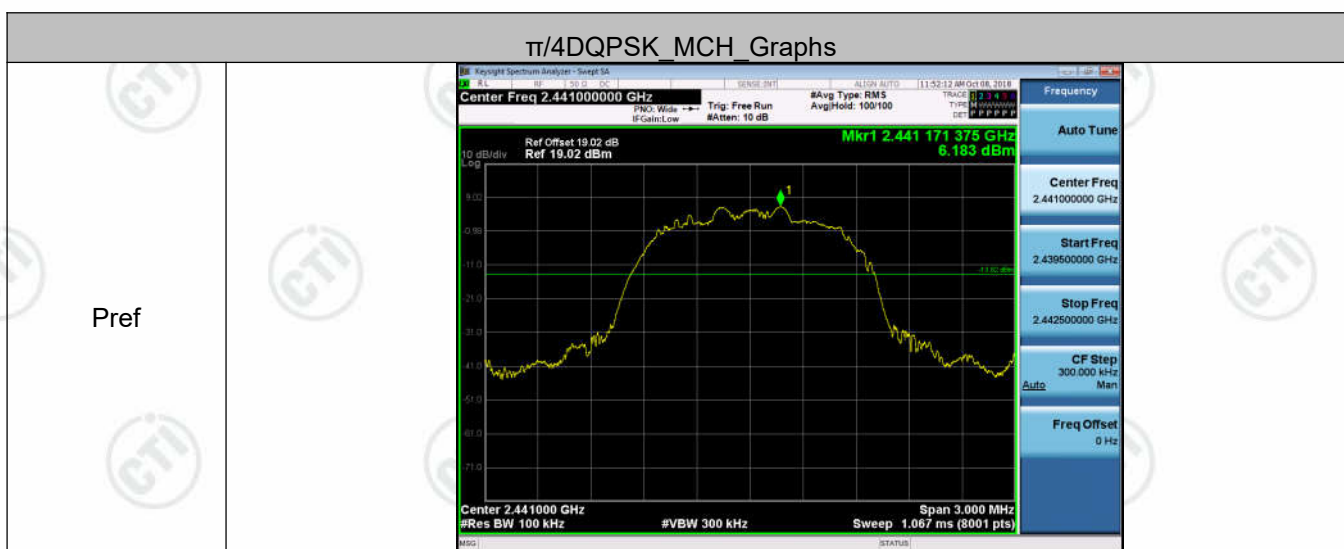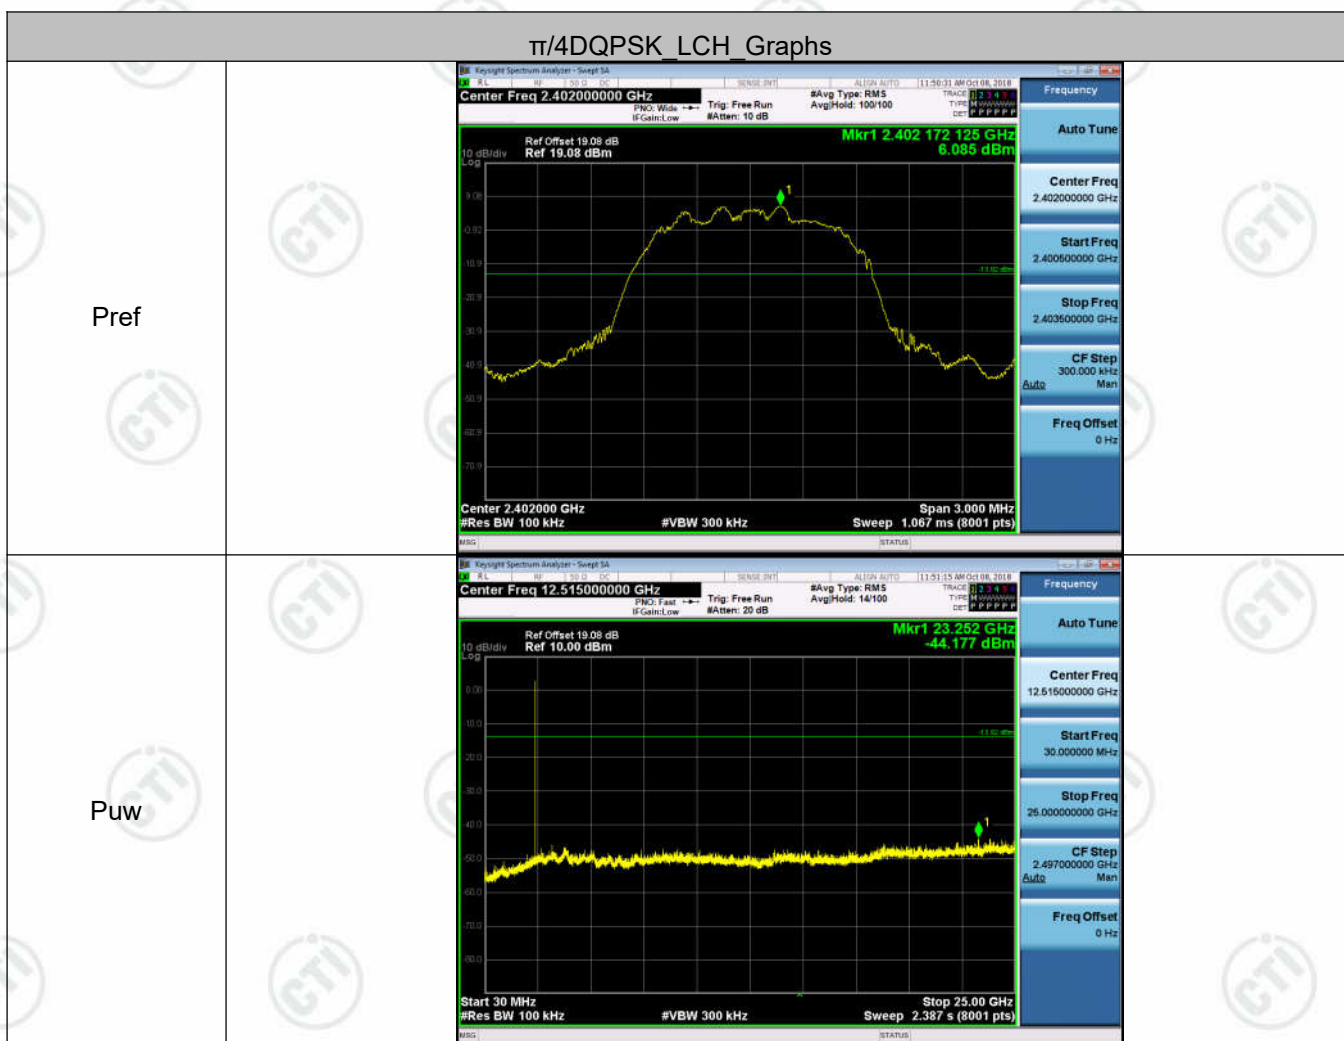

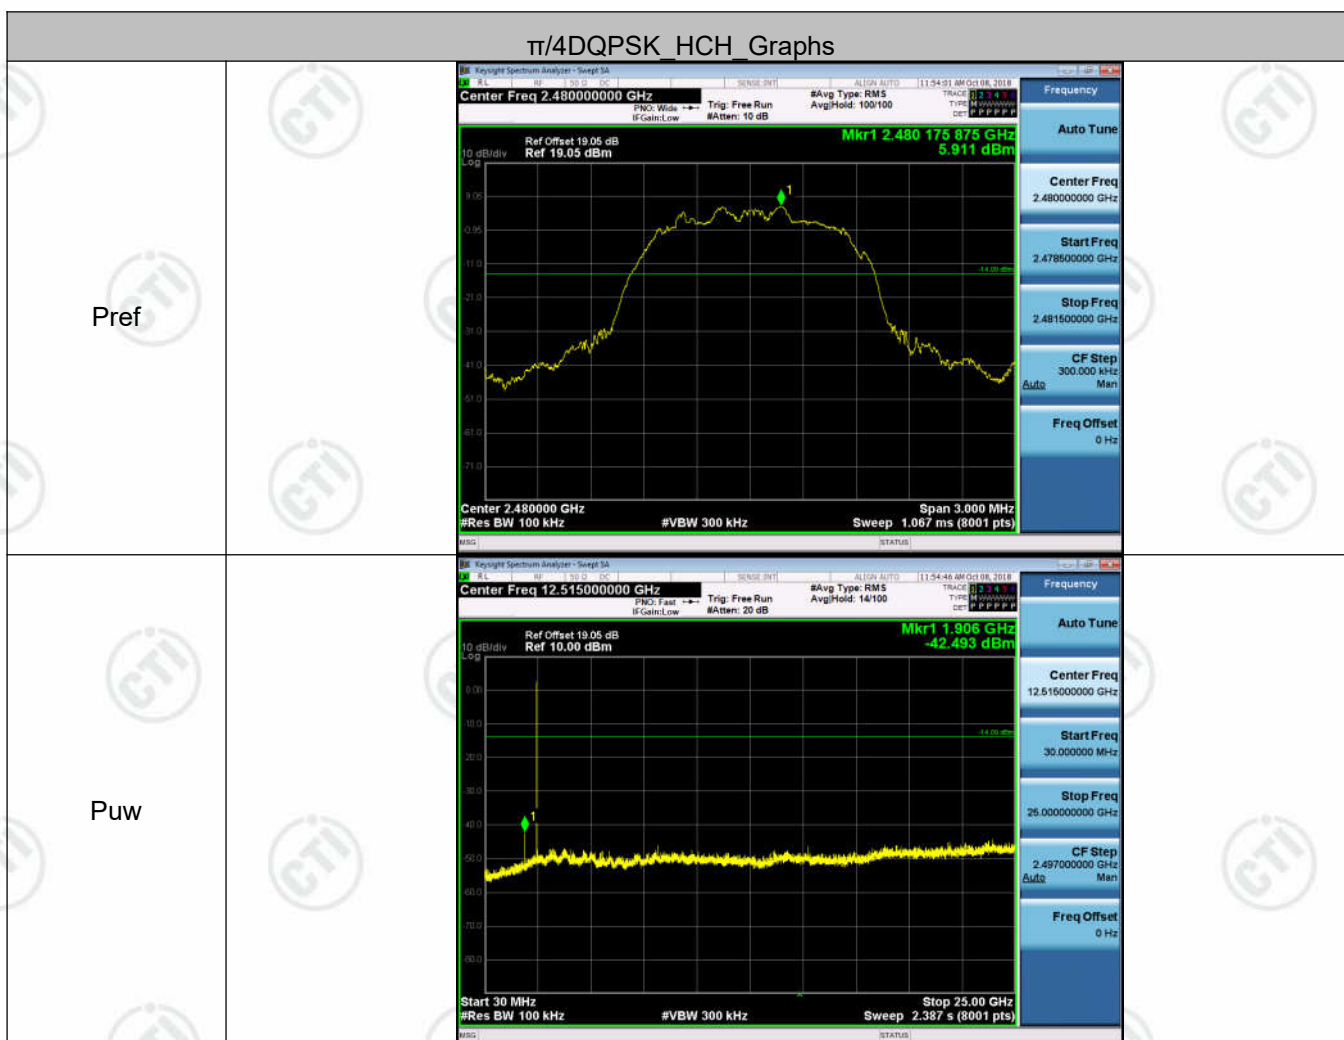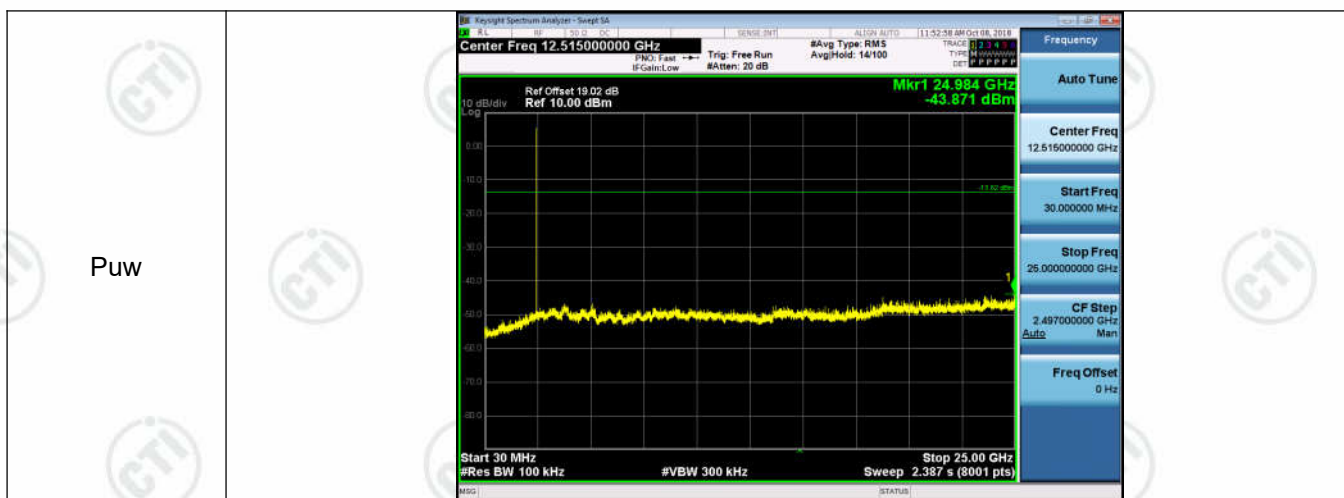

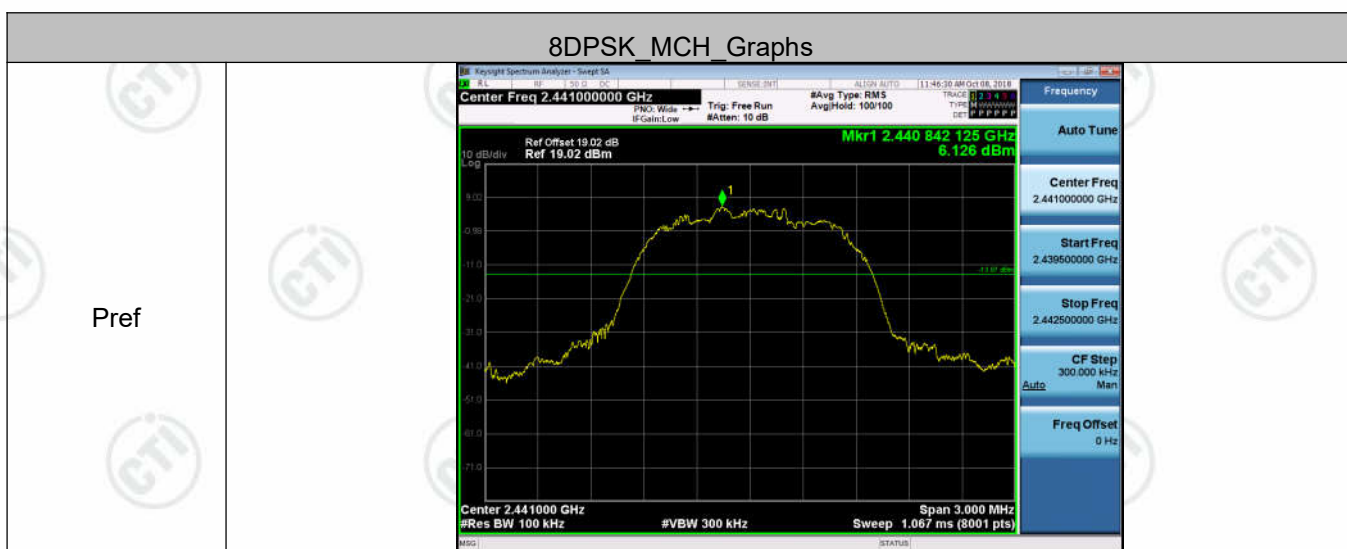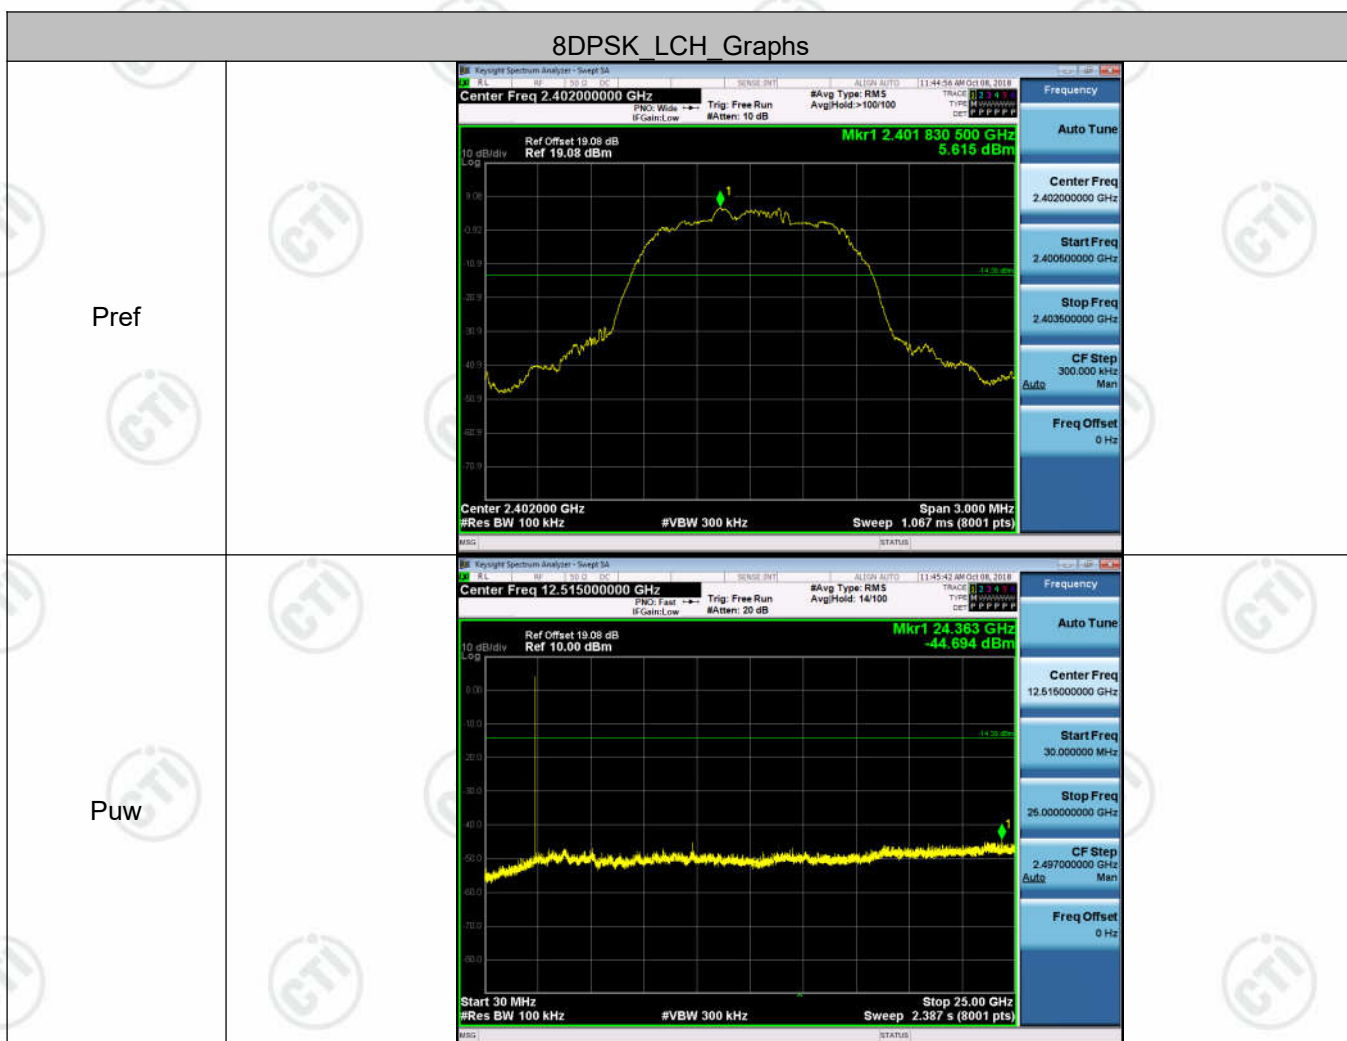

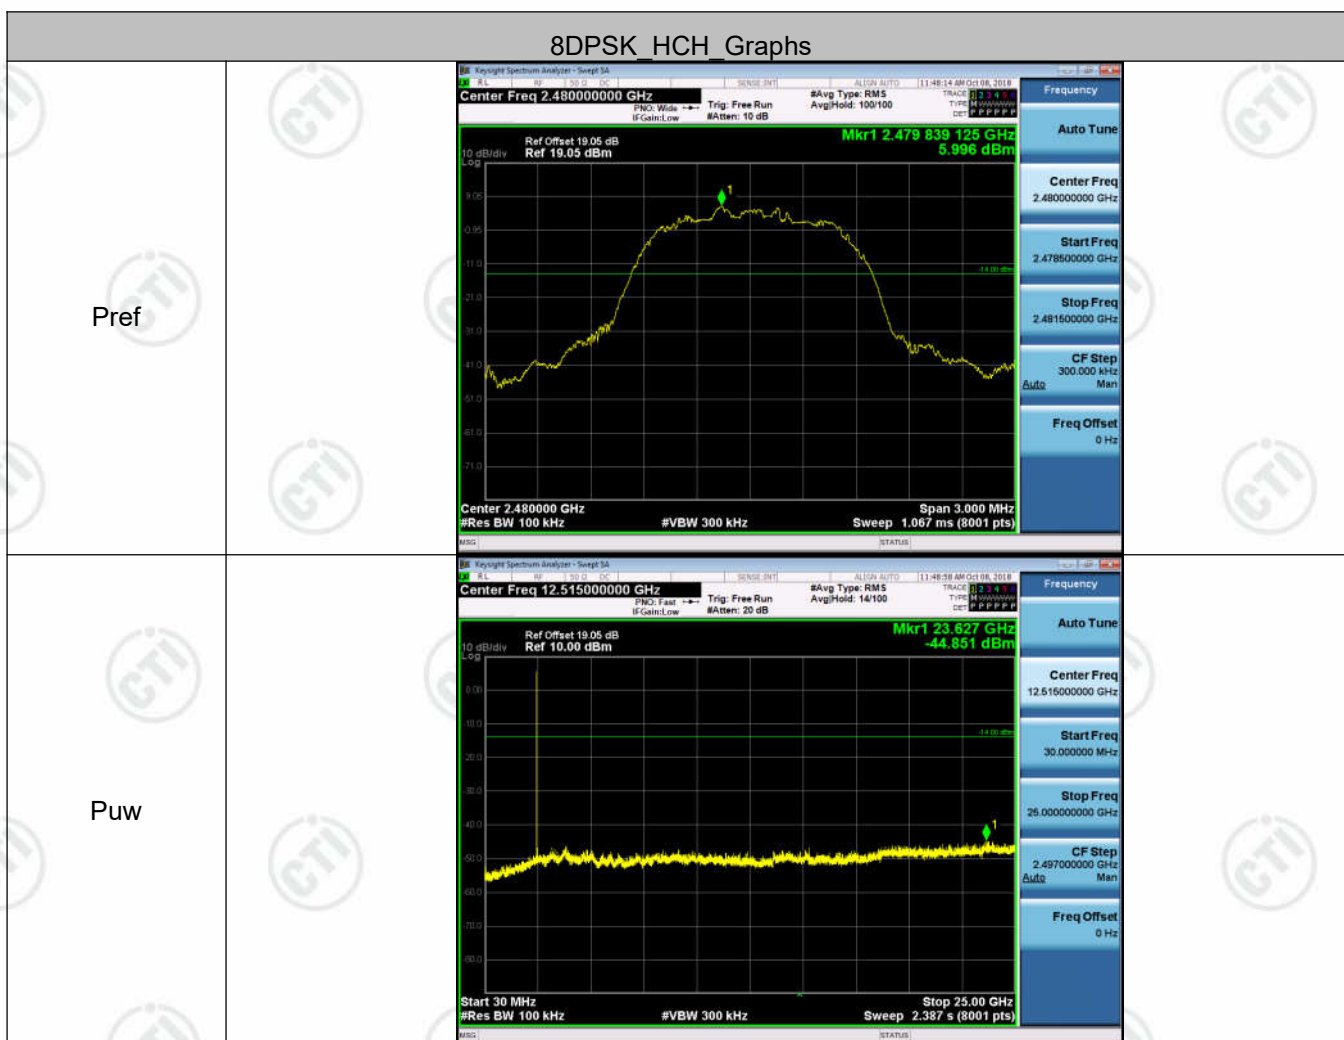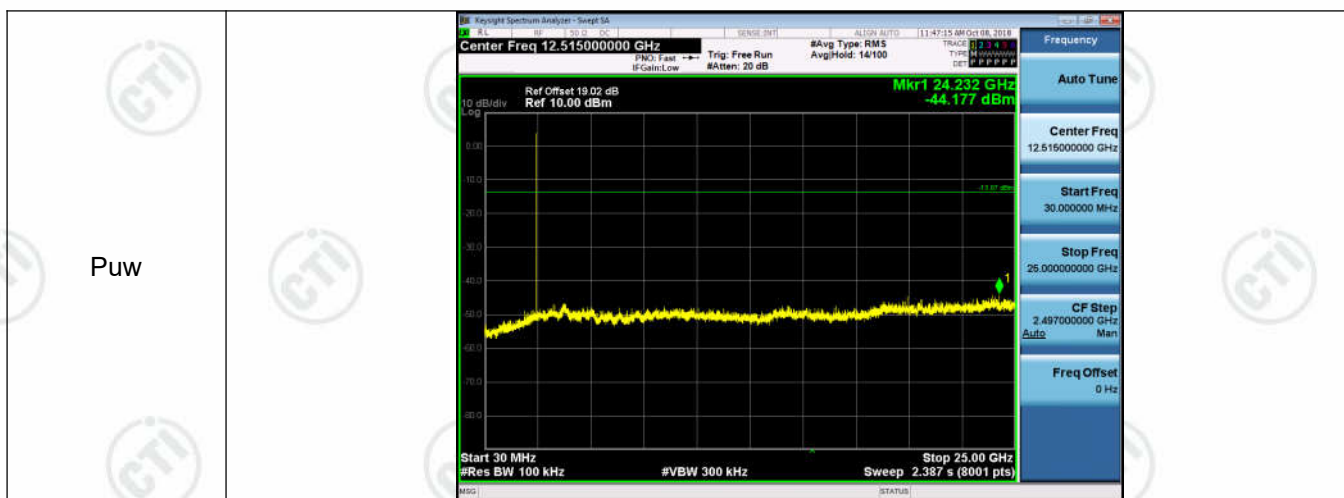

Appendix H): Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.</p> <p>The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div data-bbox="316 999 1370 1149"> </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="288 1245 1275 1395"> </div> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	
<p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

Appendix I): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PIFA Antenna and no consideration of replacement. The best case gain of the Bluetooth antenna is 2.72dBi.

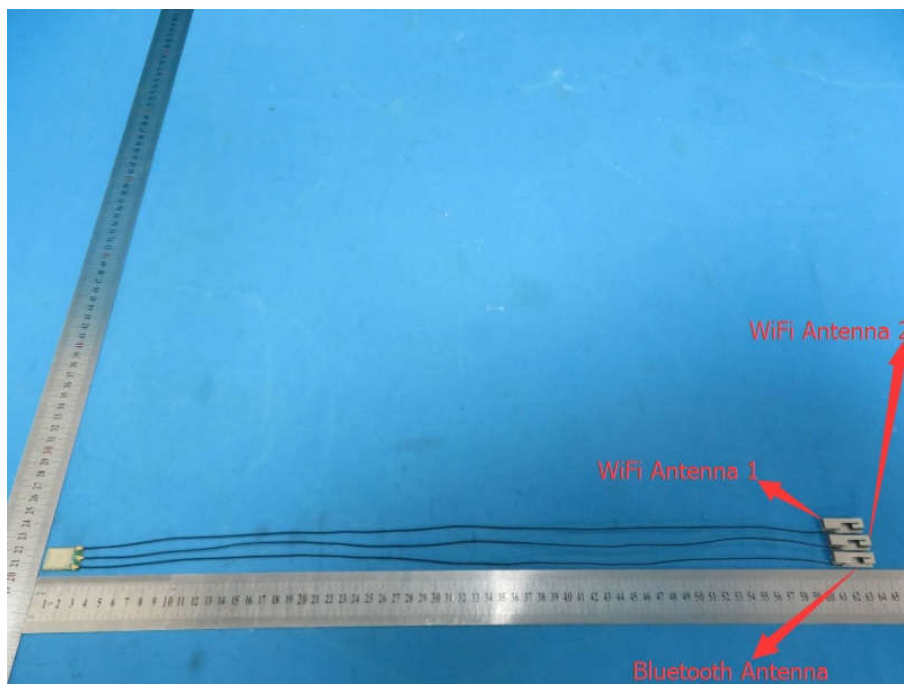

Appendix J): AC Power Line Conducted Emission

Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 															
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr> <tr> <th>Quasi-peak</th><th>Average</th></tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>		Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)															
	Quasi-peak	Average														
0.15-0.5	66 to 56*	56 to 46*														
0.5-5	56	46														
5-30	60	50														


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:


80.0 dBuV

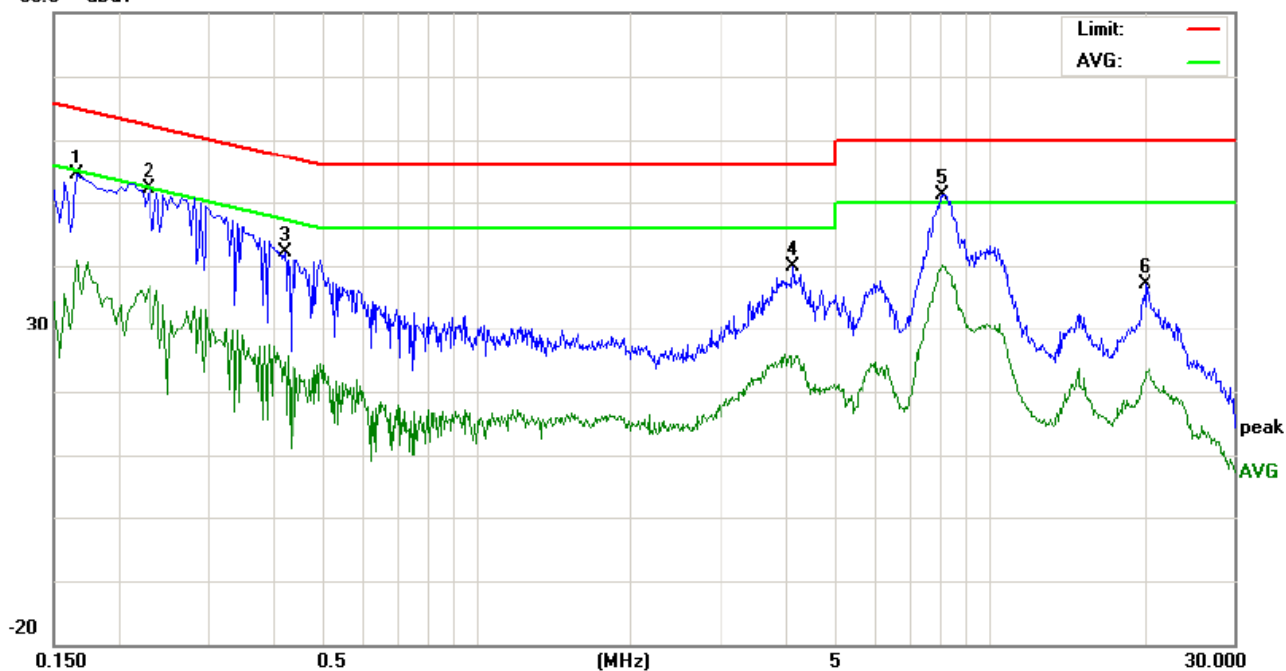

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	44.64	41.69	31.22	9.75	54.39	51.44	40.97	65.15	55.15	-13.71	-14.18	P	
2	0.2300	42.41	39.78	27.19	9.73	52.14	49.51	36.92	62.45	52.45	-12.94	-15.53	P	
3	0.4220	32.42	29.64	14.78	9.74	42.16	39.38	24.52	57.41	47.41	-18.03	-22.89	P	
4	4.1380	30.20	27.88	14.78	9.65	39.85	37.53	24.43	56.00	46.00	-18.47	-21.57	P	
5	8.1420	41.51	38.54	30.48	9.68	51.19	48.22	40.16	60.00	50.00	-11.78	-9.84	P	
6	20.2620	27.06	23.14	13.07	10.07	37.13	33.21	23.14	60.00	50.00	-26.79	-26.86	P	

Neutral line:

80.0 dBuV

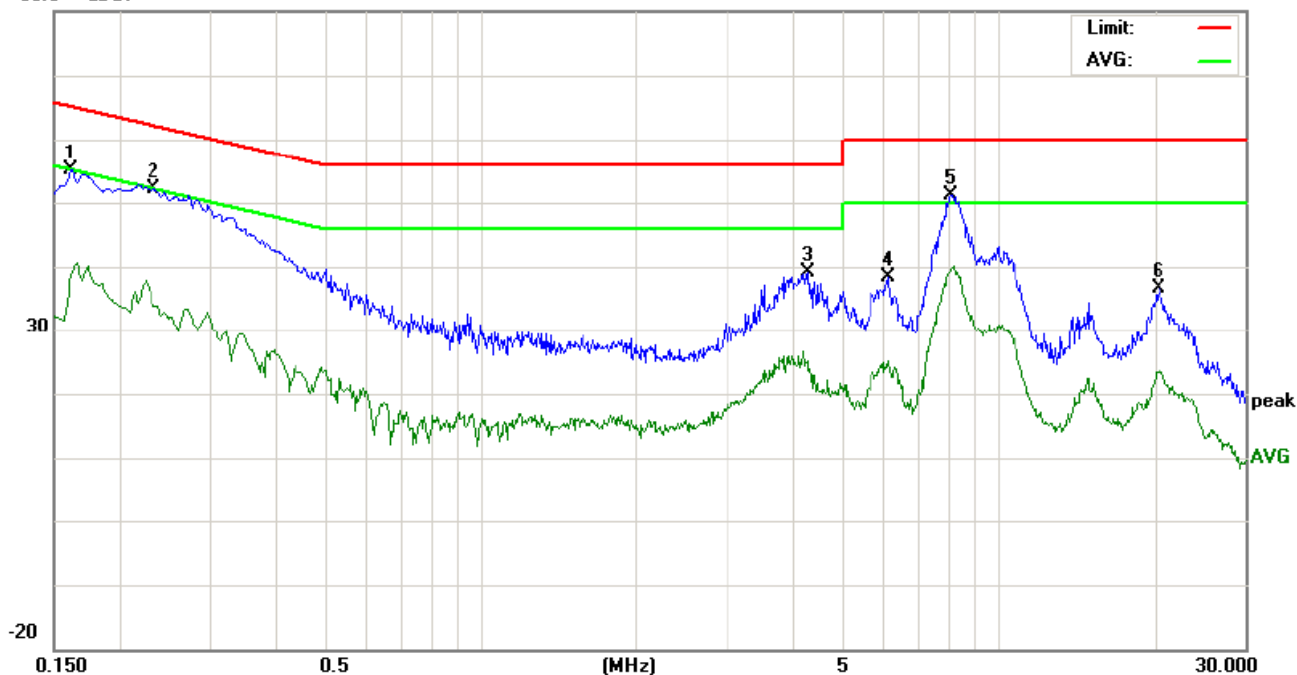

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	45.47	42.65	29.06	9.75	55.22	52.40	38.81	65.36	55.36	-12.96	-16.55	P	
2	0.2340	41.60	38.97	22.53	9.73	51.33	48.70	32.26	62.30	52.30	-13.60	-20.04	P	
3	4.3020	29.43	26.33	14.02	9.64	39.07	35.97	23.66	56.00	46.00	-20.03	-22.34	P	
4	6.1340	28.70	25.48	15.59	9.62	38.32	35.10	25.21	60.00	50.00	-24.90	-24.79	P	
5	8.0860	41.46	38.74	29.81	9.68	51.14	48.42	39.49	60.00	50.00	-11.58	-10.51	P	
6	20.3980	26.59	23.45	13.40	10.07	36.66	33.52	23.47	60.00	50.00	-26.48	-26.53	P	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


Appendix K): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). b. Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
-------	-------------------	----------	------


Test Graph

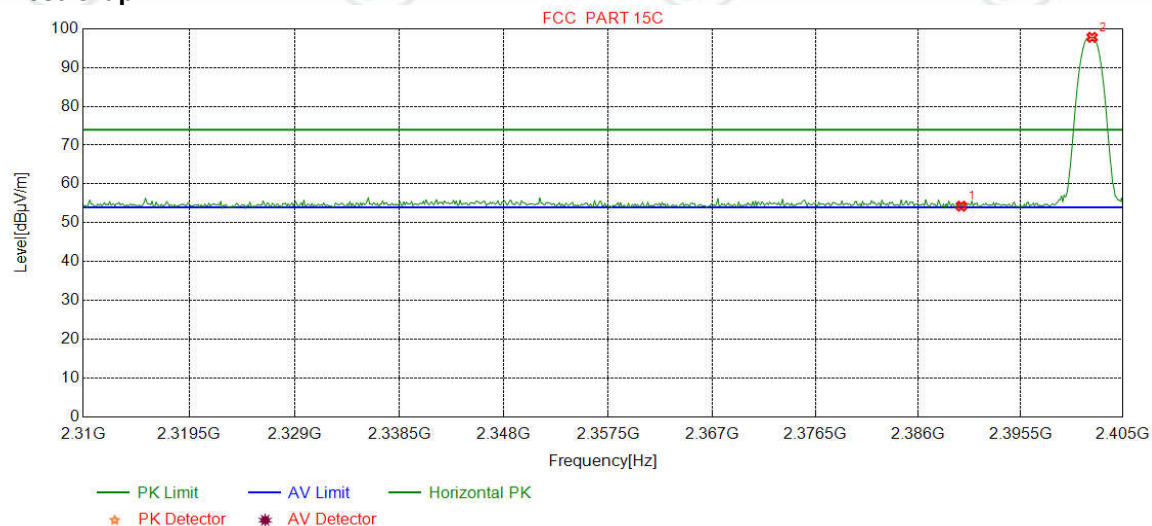

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	32.25	13.37	-36.62	45.27	54.27	74.00	19.73	Pass	H	Peak
2	2402.1464	32.26	13.31	-36.60	88.83	97.80	74.00	-23.80	Pass	H	Peak

Mode:	GFSK Transmitting	Channel:	2402
-------	-------------------	----------	------


Test Graph

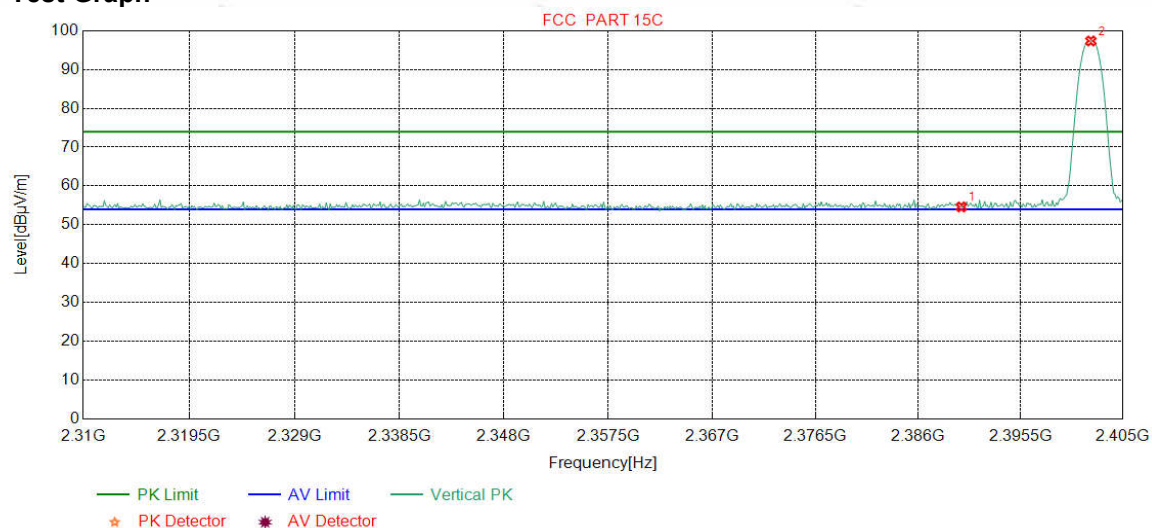

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	32.25	13.37	-36.62	45.60	54.60	74.00	19.40	Pass	V	Peak
2	2402.0275	32.26	13.31	-36.60	88.41	97.38	74.00	-23.38	Pass	V	Peak

Mode:	GFSK Transmitting	Channel:	2402
-------	-------------------	----------	------


Test Graph

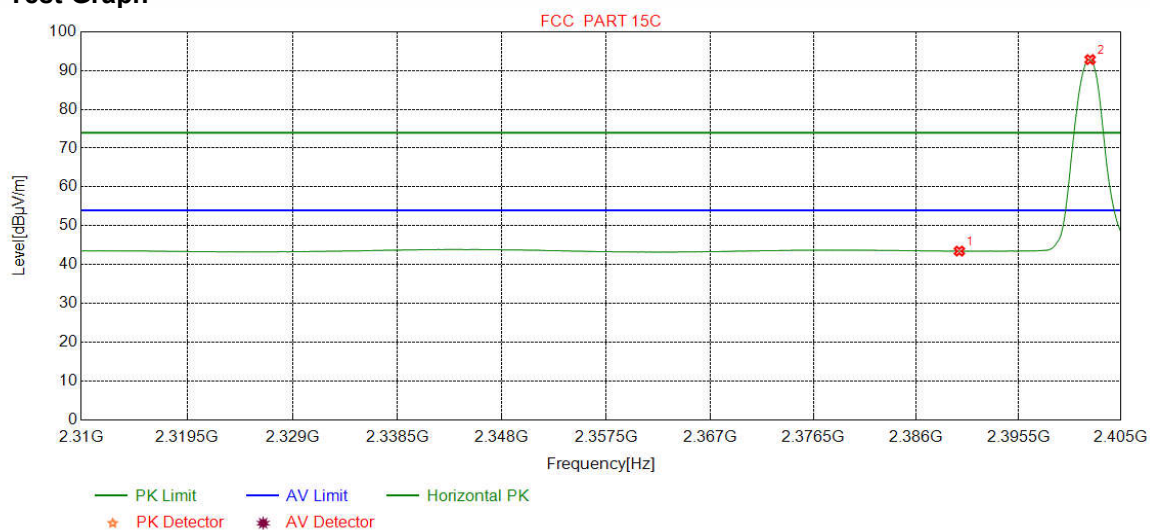


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	32.25	13.37	-36.62	34.46	43.46	54.00	10.54	Pass	H	AV
2	2402.1464	32.26	13.31	-36.60	83.87	92.84	54.00	-38.84	Pass	H	AV

Mode:	GFSK Transmitting	Channel:	2402
-------	-------------------	----------	------


Test Graph

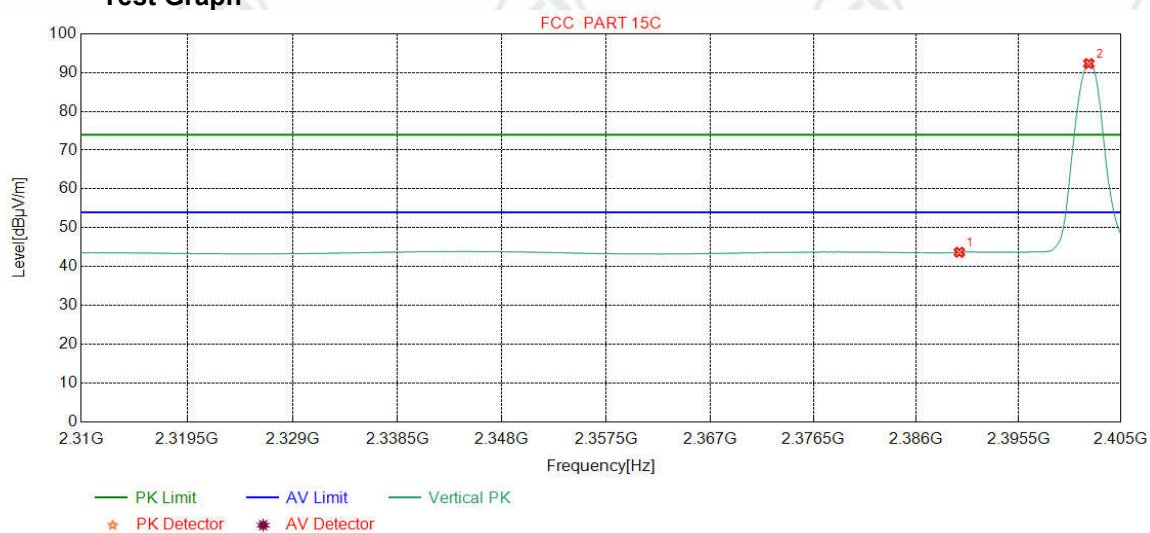

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	32.25	13.37	-36.62	34.67	43.67	54.00	10.33	Pass	V	AV
2	2402.0275	32.26	13.31	-36.60	83.37	92.34	54.00	-38.34	Pass	V	AV

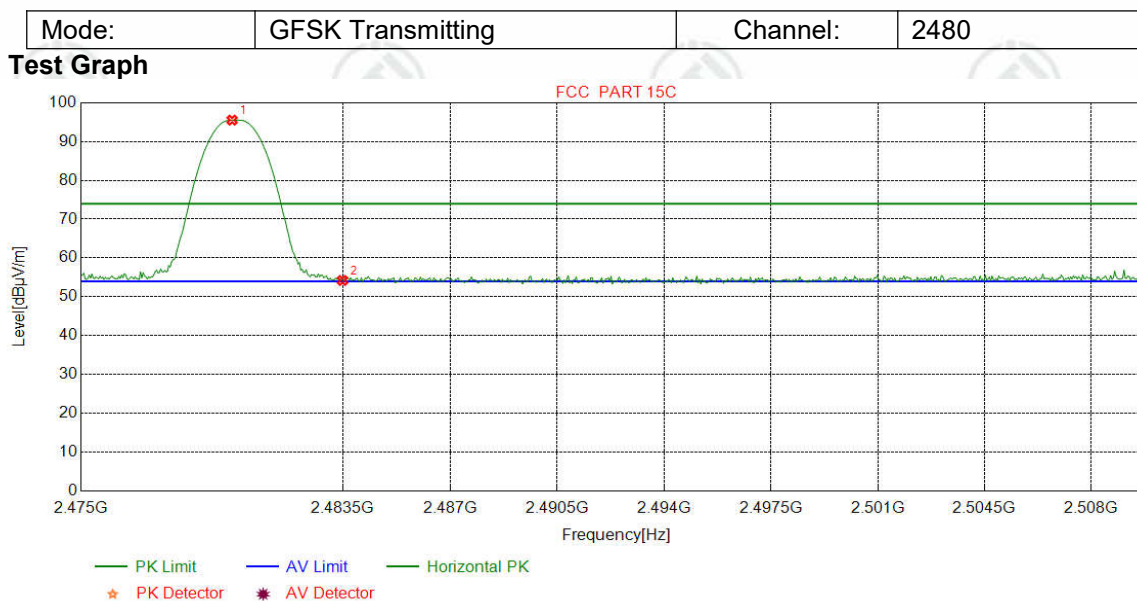

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2479.9061	32.37	13.39	-36.77	86.55	95.54	74.00	-21.54	Pass	H	Peak
2	2483.5000	32.38	13.38	-36.80	45.24	54.20	74.00	19.80	Pass	H	Peak

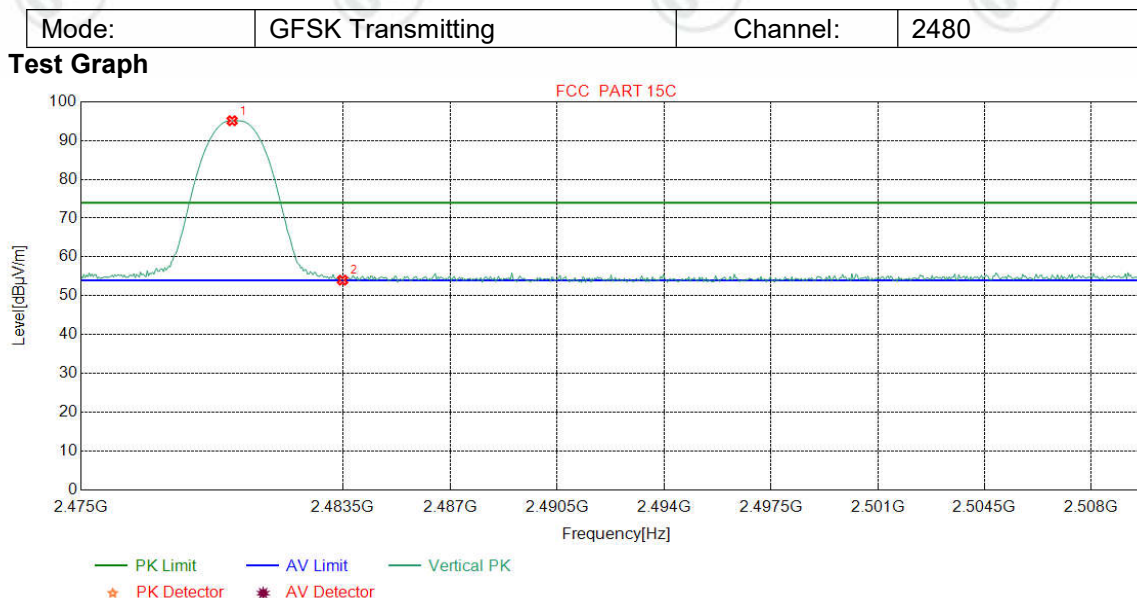

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2479.9061	32.37	13.39	-36.77	86.14	95.13	74.00	-21.13	Pass	V	Peak
2	2483.5000	32.38	13.38	-36.80	45.07	54.03	74.00	19.97	Pass	V	Peak