



**Shenzhen GTI Technology Co., Ltd.**

1F,2 Block, Jiaquan Building, Guanlan High-tech Park Baoan District,  
Shenzhen, Guangdong, China.

Tel: +86-755-27559792

Fax: +86-755-86116468

Report No.: GTI20140490F-3

Page 1 of 62

# TEST REPORT

**Product Name** .....: WCDMA Mobile Phone

**Trademark** .....: NUU

**Model/Type reference** .....: NU-3S

**Listed Model(s)** .....: NU-3S series

**Model difference** .....: NU-3S other series model No. are all the same with main model NU-3S, except for body color, RAM and LOGO to meet different customer requirements

**FCC ID**.....: 2ADINNUUNU3S

**Test Standards** .....: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

**Applicant** .....: Sun Cupid Technology (HK) Ltd.

**Address of applicant** .....: 16/F, CEO Tower, 77 Wing Hong St, Cheung Sha Wan,  
Kowloon, Hong Kong

**Date of Receipt** .....: Oct.20, 2014

**Date of Test Date**.....: Oct.20, 2014 - Nov.13, 2014

**Data of issue.** .....: Nov.14, 2014

|                    |               |
|--------------------|---------------|
| <b>Test result</b> | <b>Pass *</b> |
|--------------------|---------------|

\* In the configuration tested, the EUT complied with the standards specified above


| GENERAL DESCRIPTION OF EUT |                                                                                                                            |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Equipment:                 | WCDMA Mobile Phone                                                                                                         |
| Model Name:                | NU-3S                                                                                                                      |
| Manufacturer:              | Sun Cupid Technology (Shenzhen) Ltd.                                                                                       |
| Manufacturer Address:      | 10A, No.3 Bldg, China Academy of Sci & Tech Development,<br>No.1 High-Tech South St. Nanshan district, Shenzhen,<br>China. |
| Power Source:              | DC 3.7V from 2050mAh Li-ion battery                                                                                        |
| Power Rating:              | Input: 100-240VAC, 50/60Hz 0.2A MAX<br>Output: 5V---1.0A                                                                   |

Compiled By:




(Allen Wang)

Reviewed By:



(Tony Wang)

Approved By:



(Walter Chen)

This test report consists of 62 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by GTI. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to GTI within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

## Table of Contents

## Page

|                                                     |           |
|-----------------------------------------------------|-----------|
| <b>1. SUMMARY.....</b>                              | <b>4</b>  |
| 1.1. TEST STANDARDS.....                            | 4         |
| 1.2. TEST DESCRIPTION.....                          | 4         |
| 1.3. TEST FACILITY .....                            | 5         |
| 1.4. MEASUREMENT UNCERTAINTY .....                  | 5         |
| <b>2. GENERAL INFORMATION.....</b>                  | <b>6</b>  |
| 2.1. ENVIRONMENTAL CONDITIONS .....                 | 6         |
| 2.2. GENERAL DESCRIPTION OF EUT .....               | 6         |
| 2.3. DESCRIPTION OF TEST MODES .....                | 7         |
| 2.4. MEASUREMENT INSTRUMENTS LIST .....             | 7         |
| <b>3. TEST CONDITIONS AND RESULTS .....</b>         | <b>9</b>  |
| 3.1. CONDUCTED EMISSION (AC MAIN) .....             | 9         |
| 3.2. RADIATED EMISSION .....                        | 12        |
| 3.3. MAXIMUM PEAK OUTPUT POWER .....                | 17        |
| 3.4. 20dB BANDWIDTH.....                            | 21        |
| 3.5. BAND EDGE .....                                | 25        |
| 3.6. FREQUENCY SEPARATION .....                     | 41        |
| 3.7. NUMBER OF HOPPING FREQUENCY.....               | 43        |
| 3.8. TIME OF OCCUPANCY (DWEIL TIME).....            | 45        |
| 3.9. SPURIOUS RF CONDUCTED EMISSION.....            | 49        |
| 3.10. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE ..... | 53        |
| 3.11. ANTENNA REQUIREMENT.....                      | 60        |
| <b>4. EUT TEST PHOTO .....</b>                      | <b>61</b> |
| <b>5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL .....</b>   | <b>61</b> |

## 1. SUMMARY

### 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2009](#): American National Standard for Testing Unlicensed Wireless Devices

### 1.2. Test Description

| FCC PART 15 15.247            |                                                |      |
|-------------------------------|------------------------------------------------|------|
| FCC Part 15.207               | AC Power Conducted Emission                    | PASS |
| FCC Part 15.247(a)(1)(i)      | 20dB Bandwidth                                 | PASS |
| FCC Part 15.247(d)            | Spurious RF Conducted Emission                 | PASS |
| FCC Part 15.247(b)            | Maximum Peak Output Power                      | PASS |
| FCC Part 15.247(b)            | Pseudorandom Frequency Hopping Sequence        | PASS |
| FCC Part 15.247(a)(1)(iii)    | Number of hopping frequency& Time of Occupancy | PASS |
| FCC Part 15.247(a)(1)         | Frequency Separation                           | PASS |
| FCC Part 15.109/15.205/15.209 | Radiated Emissions                             | PASS |
| FCC Part 15.247(d)            | Band Edge Compliance of RF Emission            | PASS |
| FCC Part 15.203/15.247 (b)    | Antenna Requirement                            | PASS |

Remark: The measurement uncertainty is not included in the test result.

## 1.3. Test Facility

### 1.3.1 Address of the test laboratory

#### Shenzhen General Testing & Inspection Technology Co., Ltd.

Add: 1F, 2 Block, Jiaquan Building, Guanlan High-tech Park Baoan District, Shenzhen, Guangdong, China

### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### IC Registration No.: 9783A

The 3m alternate test site of Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Aug, 2011.

#### FCC-Registration No.: 214666

Shenzhen GTI Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 214666, Sep 19, 2011

## 1.4. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements and is documented in the Shenzhen General Testing & Inspection Technology Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for General Testing & Inspection laboratory is reported:

| Test Items                              | Measurement Uncertainty | Notes |
|-----------------------------------------|-------------------------|-------|
| Transmitter power conducted             | 0.57 dB                 | (1)   |
| Transmitter power Radiated              | 2.20 dB                 | (1)   |
| Conducted spurious emission 9KHz-40 GHz | 1.60 dB                 | (1)   |
| Radiated spurious emission 9KHz-40 GHz  | 2.20 dB                 | (1)   |
| Conducted Emission 9KHz-30MHz           | 3.39 dB                 | (1)   |
| Radiated Emission 30~1000MHz            | 4.24 dB                 | (1)   |
| Radiated Emission 1~18GHz               | 5.16 dB                 | (1)   |
| Radiated Emission 18-40GHz              | 5.54 dB                 | (1)   |
| Occupied Bandwidth                      | -----                   | (1)   |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                    |             |
|--------------------|-------------|
| Temperature:       | 15~35°C     |
| Relative Humidity: | 30~60 %     |
| Air Pressure:      | 950~1050mba |

### 2.2. General Description of EUT

|                       |                                                                                 |
|-----------------------|---------------------------------------------------------------------------------|
| Product Name:         | WCDMA Mobile Phone                                                              |
| Model/Type reference: | NU-3S                                                                           |
| Power supply:         | DC 3.7V from 2050mAh Li-ion battery                                             |
| Adapter information:  | Model: HNFG050100UU<br>Input: 100-240VAC, 50/60Hz 0.2A MAX<br>Output: 5V---1.0A |
| Hardware version:     | UA1209 VER.A                                                                    |
| Software version:     | 3S-US-01                                                                        |
| <b>Bluetooth 3.0</b>  |                                                                                 |
| Version:              | Supported BT3.0                                                                 |
| Modulation:           | GFSK, $\pi/4$ DQPSK, 8DPSK                                                      |
| Operation frequency:  | 2402MHz~2480MHz                                                                 |
| Channel number:       | 79                                                                              |
| Channel separation:   | 1MHz                                                                            |
| Antenna type:         | PIFA Antenna                                                                    |
| Antenna gain:         | 1.60dBi                                                                         |

Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 2.3. Description of Test Modes

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT. Channel 00/39/78 was selected to test.

### Operation Frequency :

| Channel   | Frequency (MHz) |
|-----------|-----------------|
| <b>00</b> | <b>2402</b>     |
| 2         | 2403            |
| :         | :               |
| 38        | 2440            |
| <b>39</b> | <b>2441</b>     |
| 40        | 2442            |
| :         | :               |
| 77        | 2479            |
| <b>78</b> | <b>2480</b>     |

## 2.4. Measurement Instruments List

| Maximum Peak Output Power / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission /Hoping Require/ 20dB bandwidth |                   |                 |           |            |                  |
|----------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------|-----------|------------|------------------|
| Item                                                                                                                             | Test Equipment    | Manufacturer    | Model No. | Serial No. | Calibrated until |
| 1                                                                                                                                | Spectrum Analyzer | Rohde & Schwarz | FSU       | 100105     | Dec. 27,2014     |

| Conducted Emission |                   |              |           |            |                 |
|--------------------|-------------------|--------------|-----------|------------|-----------------|
| Item               | Test Equipment    | Manufacturer | Model No. | Serial No. | Calibrate until |
| 1                  | LISN              | R&S          | ENV216    | 101112     | Dec. 26, 2014   |
| 2                  | LISN              | R&S          | ENV216    | 101113     | Dec. 26, 2014   |
| 3                  | EMI Test Receiver | R&S          | ESCI      | 100920     | Dec. 26, 2014   |
| 4                  | Cable             | Schwarzbeck  | Cable001  | --         | Dec. 26, 2014   |

| Radiated Emission |                         |                              |            |            |                  |
|-------------------|-------------------------|------------------------------|------------|------------|------------------|
| Item              | Test Equipment          | Manufacturer                 | Model No.  | Serial No. | Calibrated until |
| 1                 | EMI Test Receiver       | R&S                          | ESCI       | 100967     | Dec 27,2014      |
| 2                 | High pass filter        | Compliance Direction systems | BSU-6      | 34202      | Oct 25,2015      |
| 3                 | Log-Bicon Antenna       | Schwarzbeck                  | CBL6141A   | 4180       | Dec 27,2014      |
| 4                 | Ultra-Broadband Antenna | ShwarzBeck                   | BBHA9170   | 25841      | Dec 27,2014      |
| 5                 | Loop Antenna            | LAPLAC                       | RF300      | 9138       | Nov 15,2014      |
| 6                 | Spectrum Analyzer       | HP                           | 8563E      | 02052      | Dec 27,2014      |
| 7                 | Horn Antenna            | Schwarzbeck                  | BBHA 9120D | 648        | Dec 27,2014      |

|    |               |             |               |            |              |
|----|---------------|-------------|---------------|------------|--------------|
| 8  | Pre-Amplifier | HP          | 8447D         | 1937A03050 | Dec 26,2014  |
| 9  | Pre-Amplifier | EMCI        | EMC05183<br>5 | 980075     | Dec 27,2014  |
| 10 | Antenna Mast  | UC          | UC3000        | N/A        | N/A          |
| 11 | Turn Table    | UC          | UC3000        | N/A        | N/A          |
| 12 | Cable         | Schwarzbeck | Cable002      | --         | Dec. 26,2014 |
| 13 | Cable         | Schwarzbeck | Cable003      | --         | Dec. 26,2014 |

Note: 1. The Cal.Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.



### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Conducted Emission (AC Main)


##### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

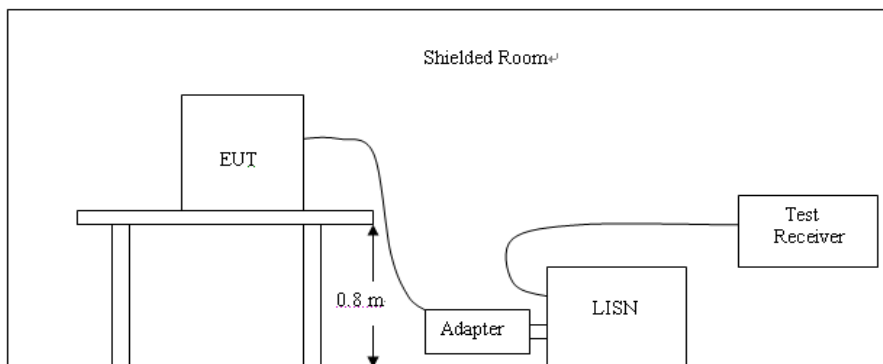

##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2009.
2. Support equipment, if needed, was placed as per ANSI C63.10-2009
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2009
4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.


## TEST RESULTS

LINE

L

### SCAN TABLE: "Voltage (9K-30M) FIN1"

Short Description: 150K-30M Voltage

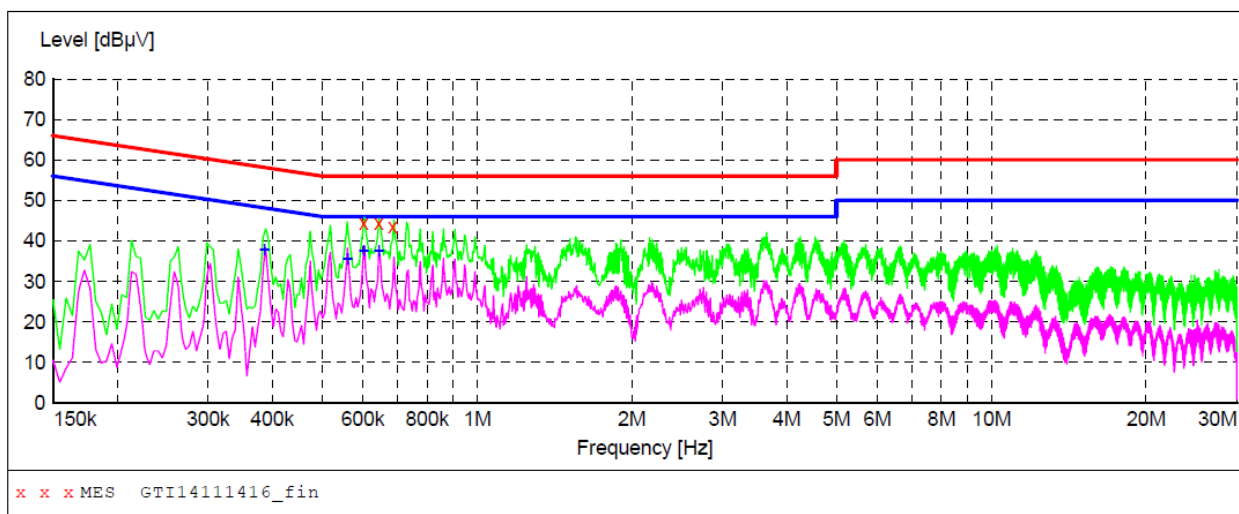

### MEASUREMENT RESULT: "GTI14111416\_fin"

11/14/2014 1:51PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.602000         | 44.30         | 9.9          | 56            | 11.7         | QP       | L1   | GND |
| 0.644000         | 44.50         | 10.0         | 56            | 11.5         | QP       | L1   | GND |
| 0.686000         | 43.40         | 10.0         | 56            | 12.6         | QP       | L1   | GND |

### MEASUREMENT RESULT: "GTI14111416\_fin2"

11/14/2014 1:51PM


| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.386000         | 37.90         | 9.9          | 48            | 10.2         | AV       | L1   | GND |
| 0.560000         | 35.50         | 9.9          | 46            | 10.5         | AV       | L1   | GND |
| 0.602000         | 37.40         | 9.9          | 46            | 8.6          | AV       | L1   | GND |
| 0.644000         | 37.70         | 10.0         | 46            | 8.3          | AV       | L1   | GND |

LINE

N

**SCAN TABLE: "Voltage (9K-30M)FIN1"**

Short Description: 150K-30M Voltage

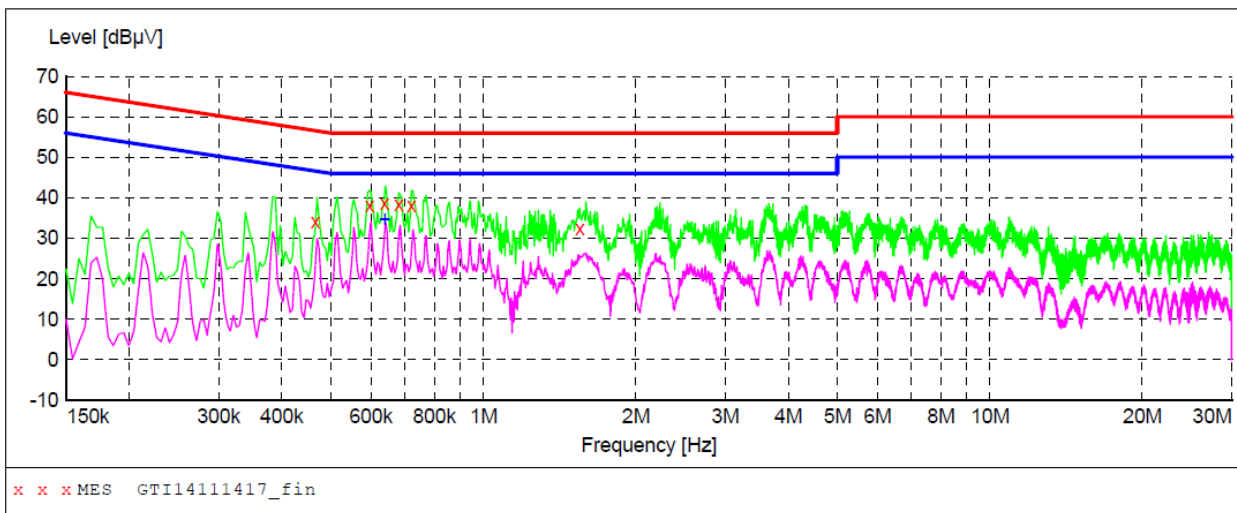
**MEASUREMENT RESULT: "GTI14111417\_fin"**

11/14/2014 1:54PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.466000         | 34.10         | 9.9          | 57            | 22.5         | QP       | N    | GND |
| 0.596000         | 38.00         | 9.9          | 56            | 18.0         | QP       | N    | GND |
| 0.638000         | 38.80         | 10.0         | 56            | 17.2         | QP       | N    | GND |
| 0.680000         | 38.30         | 10.0         | 56            | 17.7         | QP       | N    | GND |
| 0.722000         | 38.00         | 10.0         | 56            | 18.0         | QP       | N    | GND |
| 1.550000         | 32.30         | 10.3         | 56            | 23.7         | QP       | N    | GND |

**MEASUREMENT RESULT: "GTI14111417\_fin2"**

11/14/2014 1:54PM

| Frequency<br>MHz | Level<br>dBμV | Transd<br>dB | Limit<br>dBμV | Margin<br>dB | Detector | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|----------|------|-----|
| 0.638000         | 34.60         | 10.0         | 46            | 11.4         | AV       | N    | GND |

## 3.2. Radiated Emission

### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The frequency spectrum above 1 GHz for Transmitter was investigated. All emission not reported are much lower than the prescribed limits. Set the RBW=1MHz, VBW=3MHz for Peak Detector while the RBW=1MHz, VBW=10Hz for Average Detector, Readings are both peak and average values. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

| Frequency (MHz) | Distance (Meters) | Radiated (dBuV/m)                          | Radiated (μV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30)+40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |

### Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |


For example

| Frequency (MHz) | FS (dBμV/m) | RA (dBμV/m) | AF (dB) | CL (dB) | AG (dB) | Transd (dB) |
|-----------------|-------------|-------------|---------|---------|---------|-------------|
| 150.00          | 40          | 58.1        | 12.2    | 1.6     | 31.90   | -18.1       |


$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

## Test Configuration


Frequency range 9 KHz – 30MHz

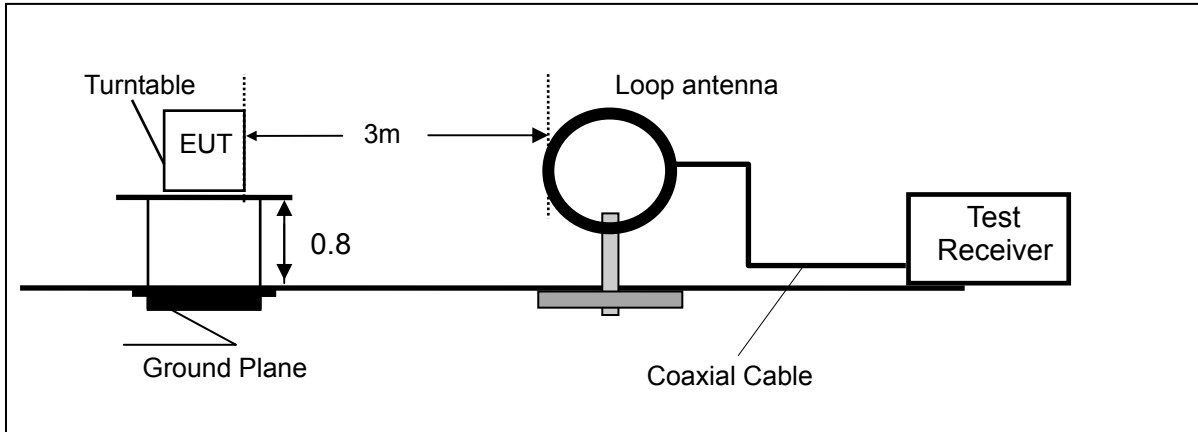

Frequency range 30MHz – 1000MHz

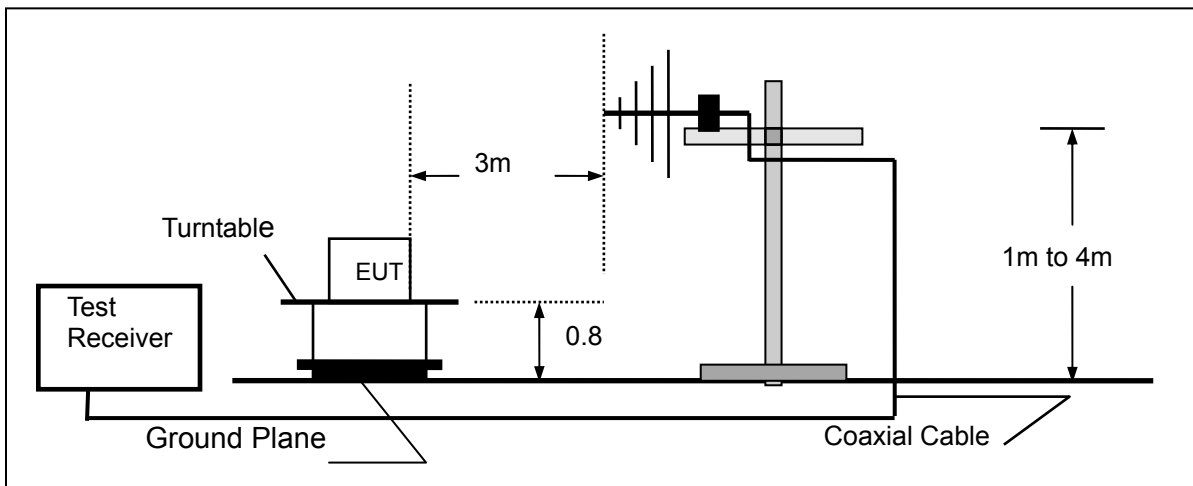

Frequency range above 1GHz-25GHz

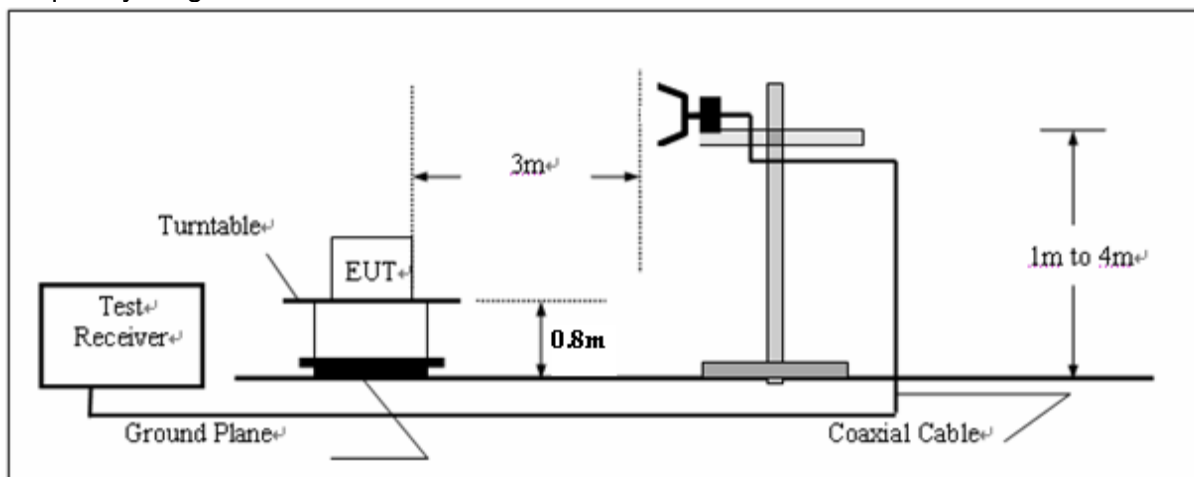

## Test Results

Remark: We measured Radiated Emission at GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK mode.

### For 9 KHz-30MHz


| Frequency (MHz) | Corrected Reading (dBuV/m)@3m | FCC Limit (dBuV/m) @3m | Margin (dB) | Detector | Result |
|-----------------|-------------------------------|------------------------|-------------|----------|--------|
| 0.38            | 47.66                         | 96.01                  | 48.35       | QP       | PASS   |
| 1.55            | 54.26                         | 63.80                  | 9.54        | QP       | PASS   |
| 19.68           | 59.38                         | 69.54                  | 10.16       | QP       | PASS   |
| 24.62           | 42.36                         | 69.54                  | 27.18       | QP       | PASS   |

### For 30MHz-1GHz

#### Horizontal

Data: 4

Level (dBuV/m)

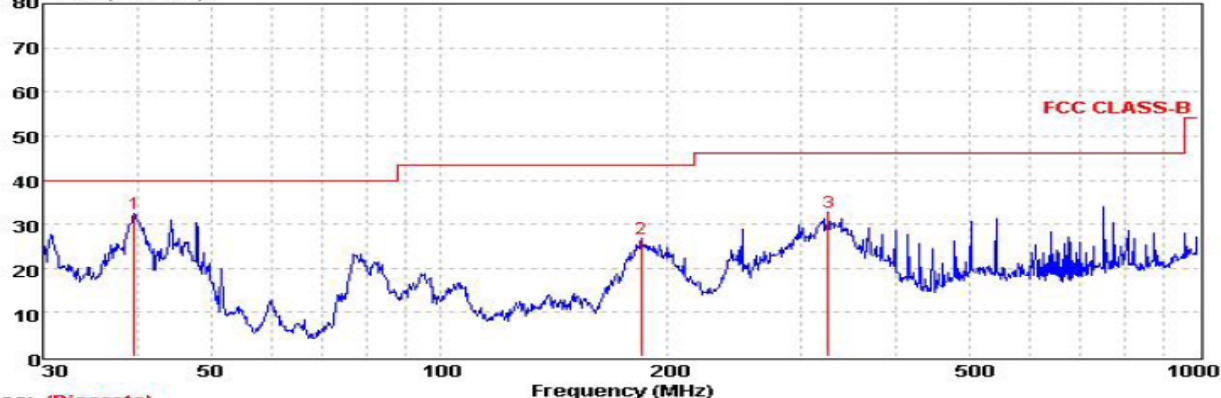


| Mark | Frequency MHz | Level dBm | Factor dB | Reading dBm | Limit dB | Margin dB | Polarization | Detector |
|------|---------------|-----------|-----------|-------------|----------|-----------|--------------|----------|
| 1    | 39.58         | 32.34     | -12.47    | 44.81       | 40.00    | 7.66      | HORIZONTAL   | Peak     |
| 2    | 184.49        | 26.87     | -19.42    | 46.29       | 43.50    | 16.63     | HORIZONTAL   | Peak     |
| 3    | 325.60        | 32.68     | -16.24    | 48.92       | 46.00    | 13.32     | HORIZONTAL   | Peak     |

#### Vertical

Data: 3

Level (dBuV/m)

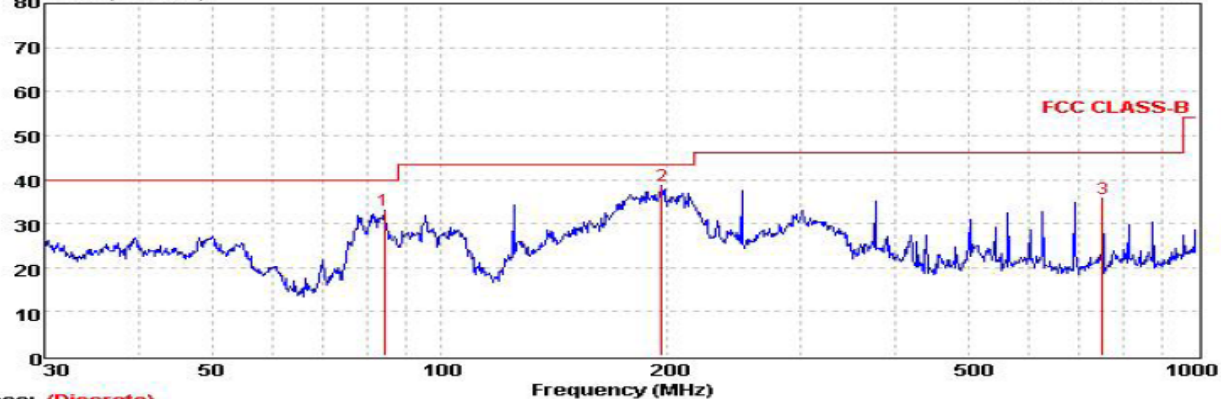

| Mark | Frequency MHz | Level dBm | Factor dB | Reading dBm | Limit dB | Margin dB | Polarization | Detector |
|------|---------------|-----------|-----------|-------------|----------|-----------|--------------|----------|
| 1    | 84.41         | 33.04     | -21.09    | 54.13       | 40.00    | 6.96      | VERTICAL     | Peak     |
| 2    | 196.51        | 38.63     | -18.16    | 56.79       | 43.50    | 4.87      | VERTICAL     | Peak     |
| 3    | 750.11        | 35.73     | -8.34     | 44.07       | 46.00    | 10.27     | VERTICAL     | Peak     |





## For 1GHz to 25GHz

## GFSK Mode (above 1GHz)

| Frequency(MHz): |                 |                         |    | 2402           |             |                    | Polarity:            |                  |                       | HORIZONTAL        |                    |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 4804.00         | 59.87                   | PK | 74.00          | 14.13       | 1.00 H             | 110                  | 57.97            | 31.42                 | 6.98              | 36.5               | 1.90                     |
| 1               | 4804.00         | 41.54                   | AV | 54.00          | 12.46       | 1.00 H             | 110                  | 39.64            | 31.42                 | 6.98              | 36.5               | 1.90                     |
| 2               | 7206.00         | 46.29                   | PK | 74.00          | 27.71       | 1.00 H             | 55                   | 35.69            | 37.03                 | 8.87              | 35.3               | 10.60                    |
| 2               | 7206.00         | --                      | AV | --             | --          | --                 | --                   | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                 |                         |    | 2402           |             |                    | Polarity:            |                  |                       | VERTICAL          |                    |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 4804.00         | 58.51                   | PK | 74.00          | 15.49       | 1.00 V             | 133                  | 56.61            | 31.42                 | 6.98              | 36.5               | 1.90                     |
| 1               | 4804.00         | 40.25                   | AV | 54.00          | 13.75       | 1.00 V             | 133                  | 38.35            | 31.42                 | 6.98              | 36.5               | 1.90                     |
| 2               | 7206.00         | 48.65                   | PK | 74.00          | 25.35       | 1.00 V             | 125                  | 38.05            | 37.03                 | 8.87              | 35.3               | 10.60                    |
| 2               | 7206.00         | --                      | AV | --             | --          | --                 | --                   | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                 |                         |    | 2440           |             |                    | Polarity:            |                  |                       | HORIZONTAL        |                    |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 4882.00         | 57.12                   | PK | 74.00          | 16.88       | 1.00 H             | 150                  | 55.06            | 30.98                 | 7.58              | 36.5               | 2.06                     |
| 1               | 4882.00         | 43.26                   | AV | 54.00          | 10.74       | 1.00 H             | 150                  | 41.20            | 30.98                 | 7.58              | 36.5               | 2.06                     |
| 2               | 7323.00         | 42.65                   | PK | 74.00          | 31.35       | 1.00 H             | 100                  | 31.73            | 37.66                 | 8.56              | 35.3               | 10.92                    |
| 2               | 7323.00         | --                      | AV | --             | --          | --                 | --                   | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                 |                         |    | 2440           |             |                    | Polarity:            |                  |                       | VERTICAL          |                    |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 4882.00         | 60.25                   | PK | 74.00          | 13.75       | 1.00 V             | 114                  | 58.19            | 30.98                 | 7.58              | 36.5               | 2.06                     |
| 1               | 4882.00         | 45.26                   | AV | 54.00          | 8.74        | 1.00 V             | 114                  | 43.20            | 30.98                 | 7.58              | 36.5               | 2.06                     |
| 2               | 7323.00         | 48.62                   | PK | 74.00          | 25.38       | 1.00 V             | 120                  | 37.70            | 37.66                 | 8.56              | 35.3               | 10.92                    |
| 2               | 7323.00         | --                      | AV | --             | --          | --                 | --                   | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                 |                         |    | 2480           |             |                    | Polarity:            |                  |                       | HORIZONTAL        |                    |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 4960.00         | 57.63                   | PK | 74.00          | 16.37       | 1.00 H             | 133                  | 54.56            | 31.47                 | 7.80              | 36.2               | 3.07                     |
| 1               | 4960.00         | 42.21                   | AV | 54.00          | 11.79       | 1.00 H             | 133                  | 39.14            | 31.47                 | 7.80              | 36.2               | 3.07                     |
| 2               | 7340.00         | 45.41                   | PK | 74.00          | 28.59       | 1.00 H             | 250                  | 33.67            | 38.32                 | 8.72              | 35.3               | 11.74                    |
| 2               | 7340.00         | --                      | AV | --             | --          | --                 | --                   | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                 |                         |    | 2480           |             |                    | Polarity:            |                  |                       | VERTICAL          |                    |                          |
|-----------------|-----------------|-------------------------|----|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| No.             | Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 1               | 4960.00         | 59.63                   | PK | 74.00          | 14.37       | 1.00 V             | 255                  | 56.56            | 31.47                 | 7.80              | -36.2              | 3.07                     |
| 1               | 4960.00         | 39.22                   | AV | 54.00          | 14.78       | 1.00 V             | 255                  | 36.15            | 31.47                 | 7.80              | -36.2              | 3.07                     |
| 2               | 7340.00         | 46.11                   | PK | 74.00          | 27.89       | 1.00 V             | 150                  | 34.37            | 38.32                 | 8.72              | -35.3              | 11.74                    |
| 2               | 7340.00         | --                      | AV | --             | --          | --                 | --                   | --               | --                    | --                | --                 | --                       |

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.



### 3.3. Maximum Peak Output Power


#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.

#### Test Configuration




#### Test Results

| Type     | Channel | Output power (dBm) | Limit (dBm) | Result |
|----------|---------|--------------------|-------------|--------|
| GFSK     | 00      | 1.91               | 30.00       | Pass   |
|          | 39      | 1.89               |             |        |
|          | 78      | 2.23               |             |        |
| π/4DQPSK | 00      | 1.25               | 30.00       | Pass   |
|          | 39      | 1.31               |             |        |
|          | 78      | 1.68               |             |        |
| 8DPSK    | 00      | 1.35               | 30.00       | Pass   |
|          | 39      | 1.31               |             |        |
|          | 78      | 1.16               |             |        |


Note: 1.The test results including the cable lose.

Test plot as follows:


### GFSK Modulation

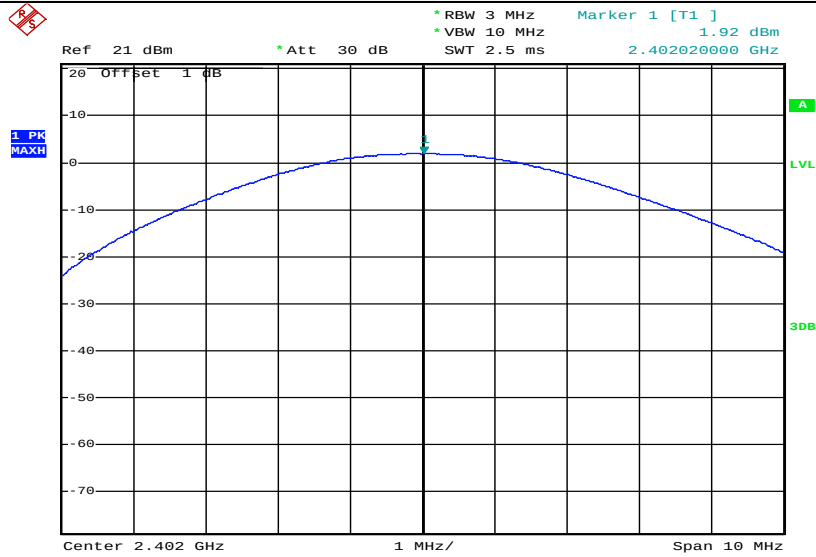

### CH00

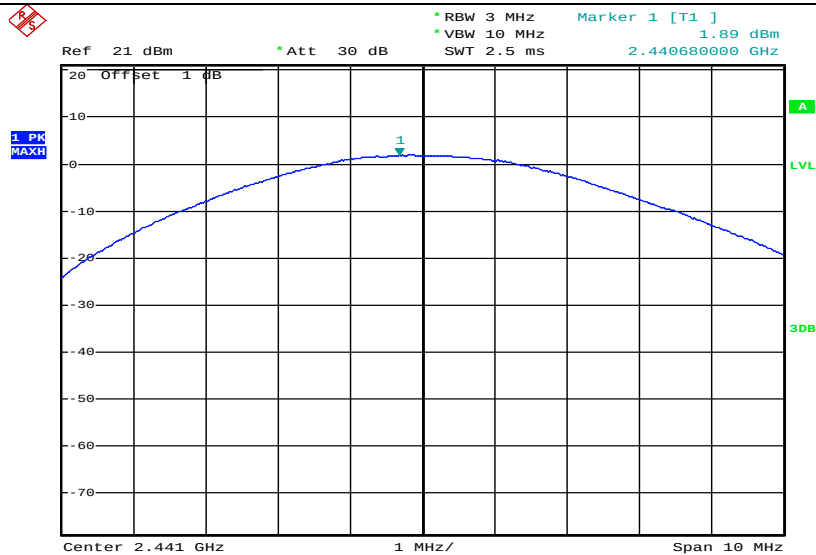


### CH39

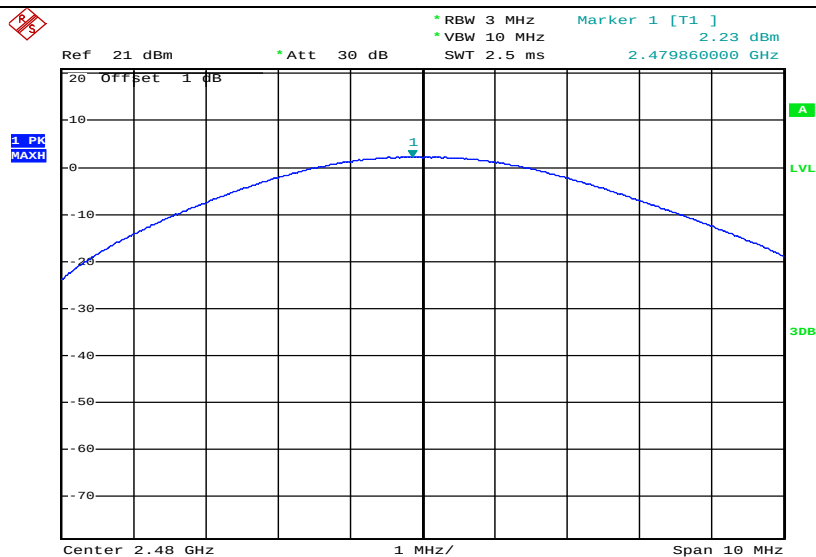


### CH78


### $\pi/4$ DQPSK Modulation

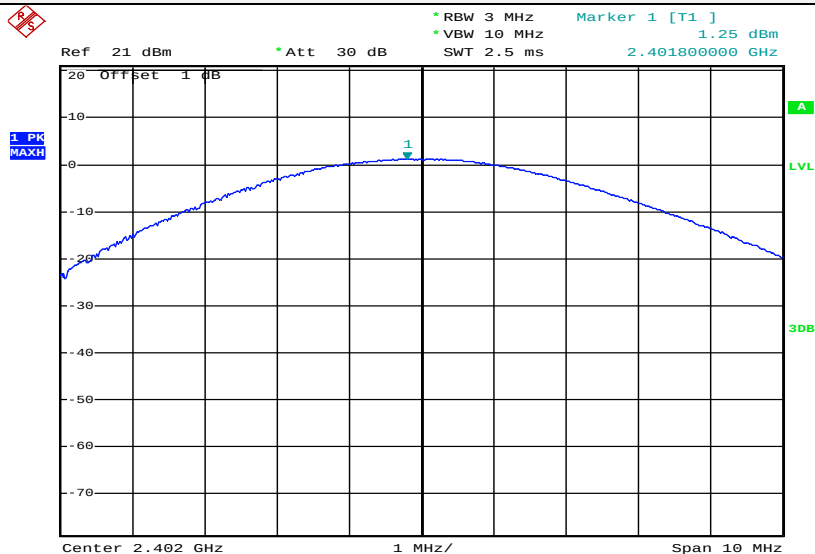

### CH00

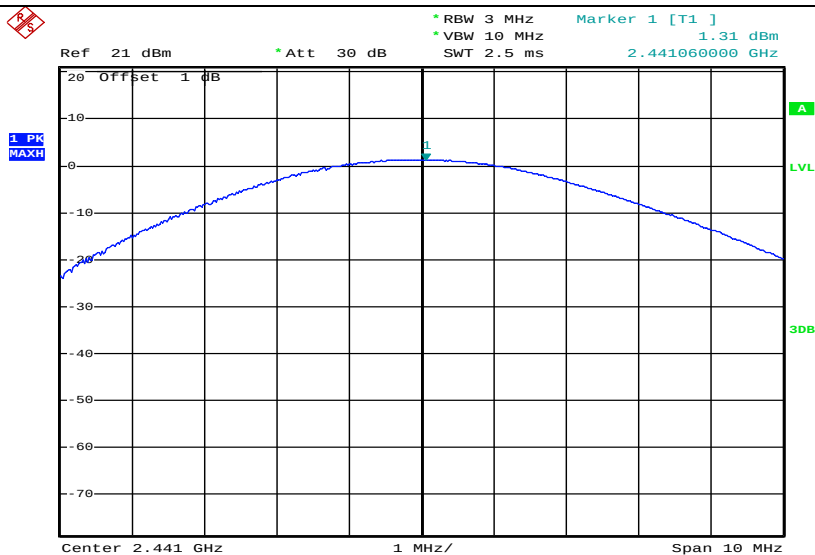


### CH39

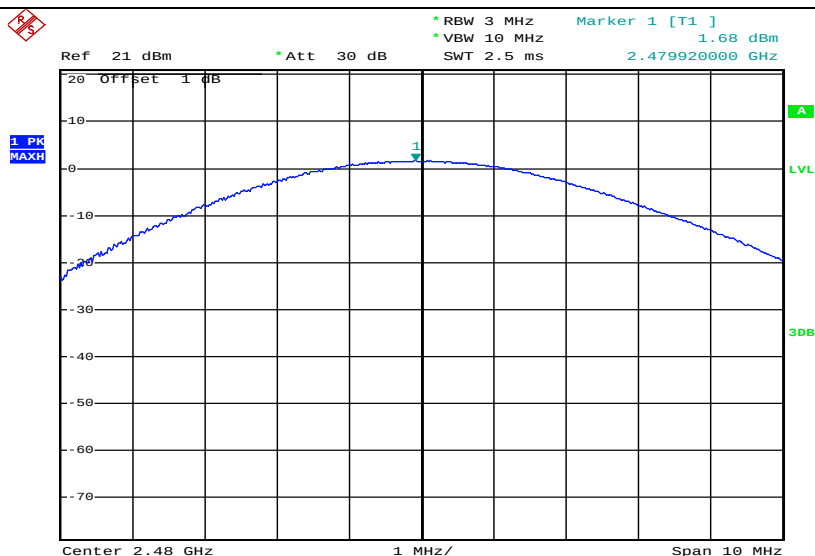


### CH78


### 8DPSK Modulation

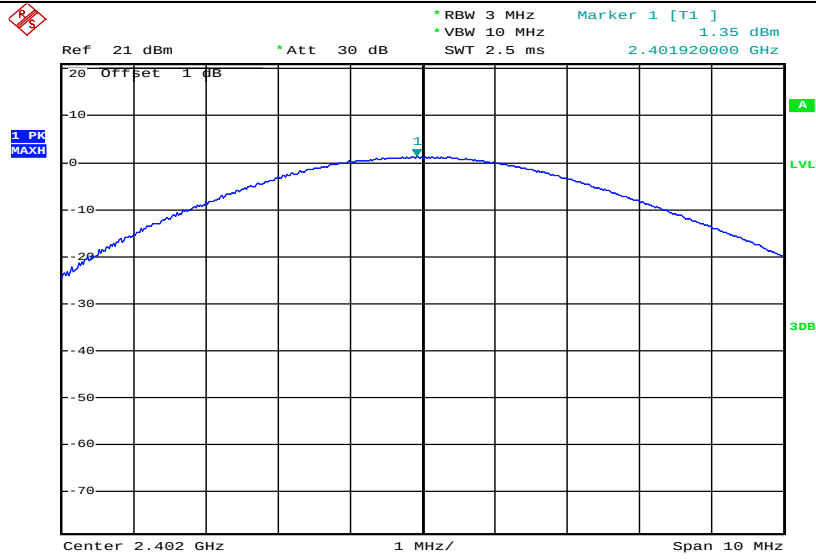

### CH00

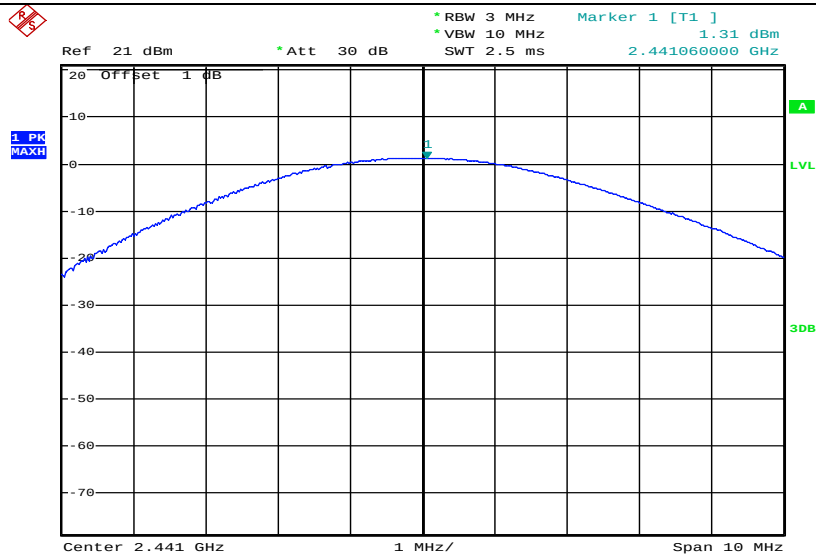

### CH39

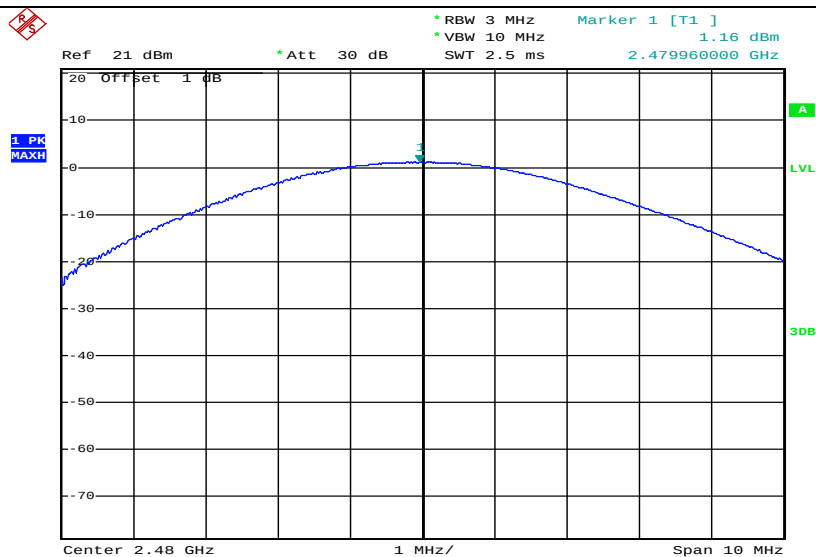

### CH78

### 3.4. 20dB Bandwidth

#### Limit


For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

#### Test Configuration




#### Test Results


| Modulation    | Channel | 20dB bandwidth (MHz) | Result |
|---------------|---------|----------------------|--------|
| GFSK          | CH00    | 0.888                | Pass   |
|               | CH39    | 0.900                |        |
|               | CH78    | 0.900                |        |
| $\pi/4$ DQPSK | CH00    | 1.128                |        |
|               | CH39    | 1.128                |        |
|               | CH78    | 1.128                |        |
| 8DPSK         | CH00    | 1.158                |        |
|               | CH39    | 1.158                |        |
|               | CH78    | 1.158                |        |

Test plot as follows:


### GFSK Modulation

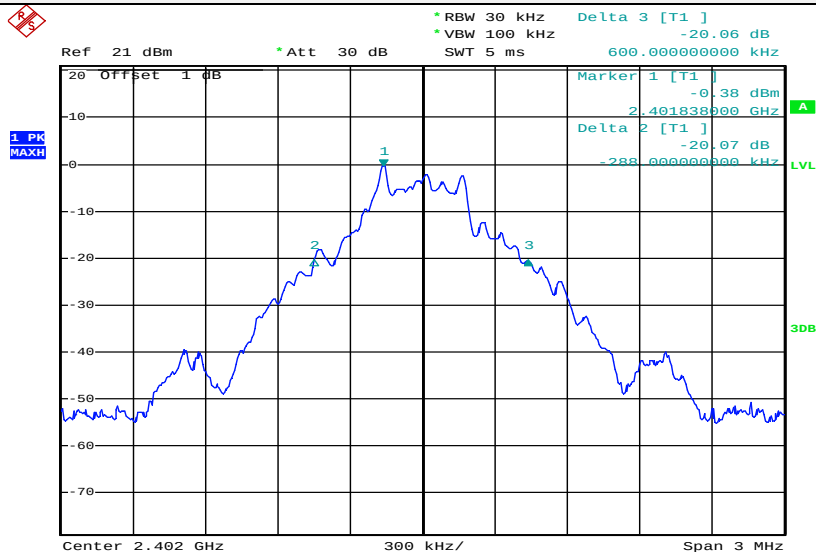

### CH00

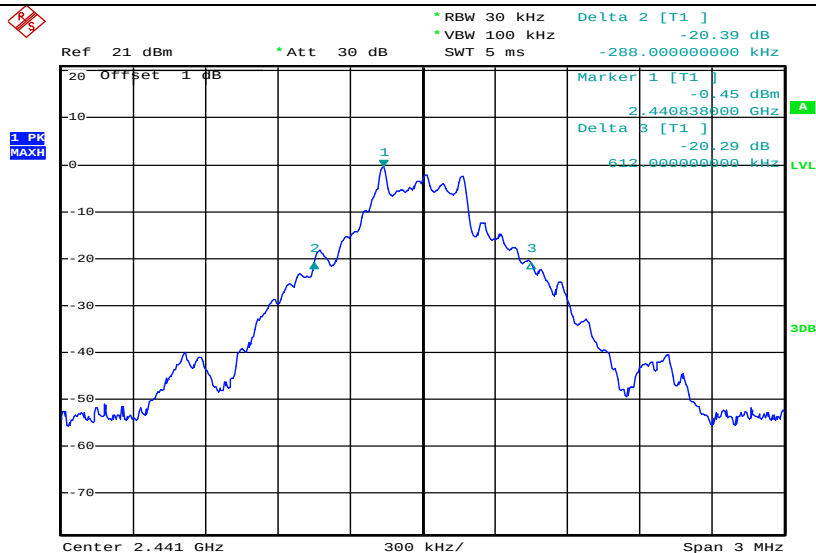


### CH39

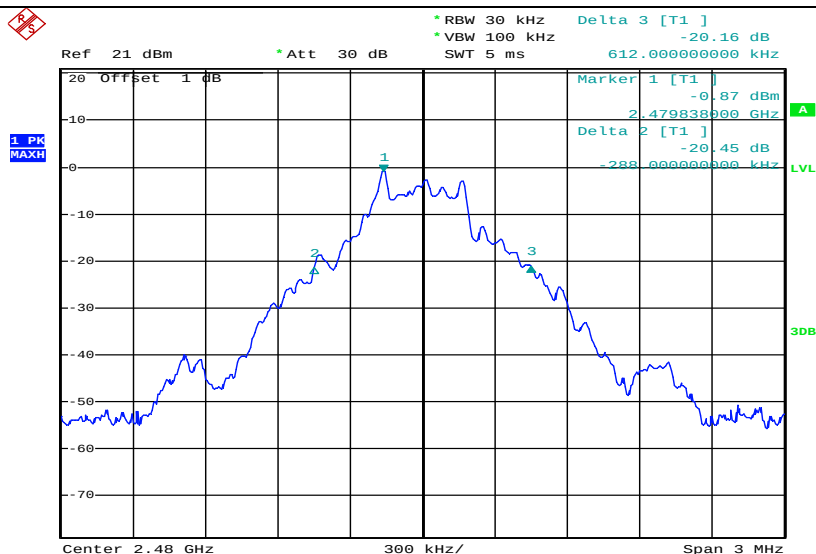

### CH78

### $\pi/4$ DQPSK Modulation

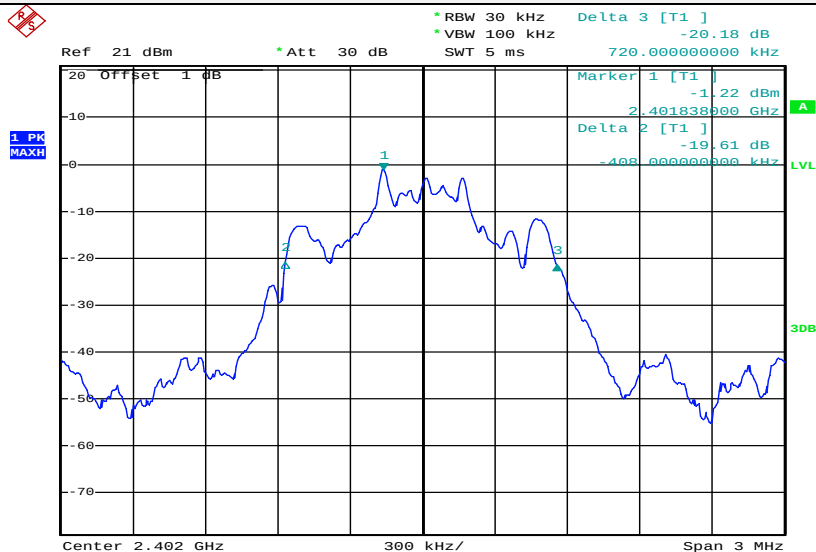

### CH00




### CH39




### CH78


### 8DPSK Modulation

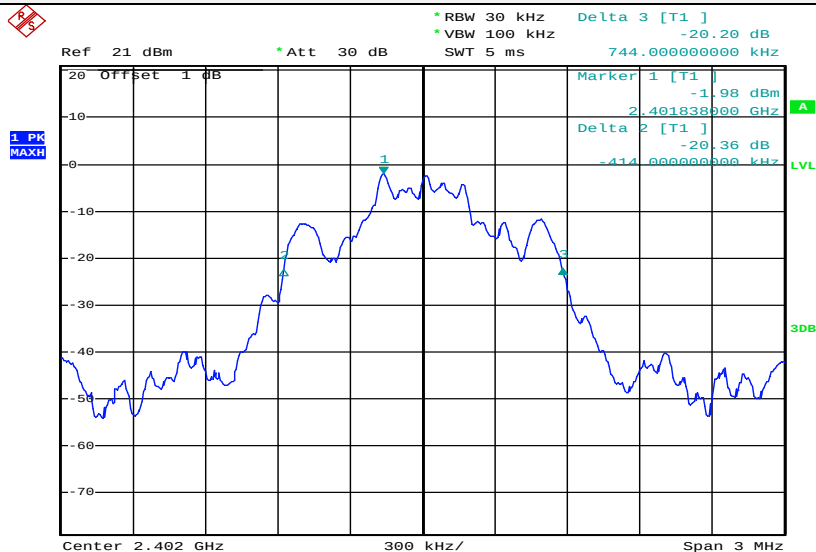

### CH00

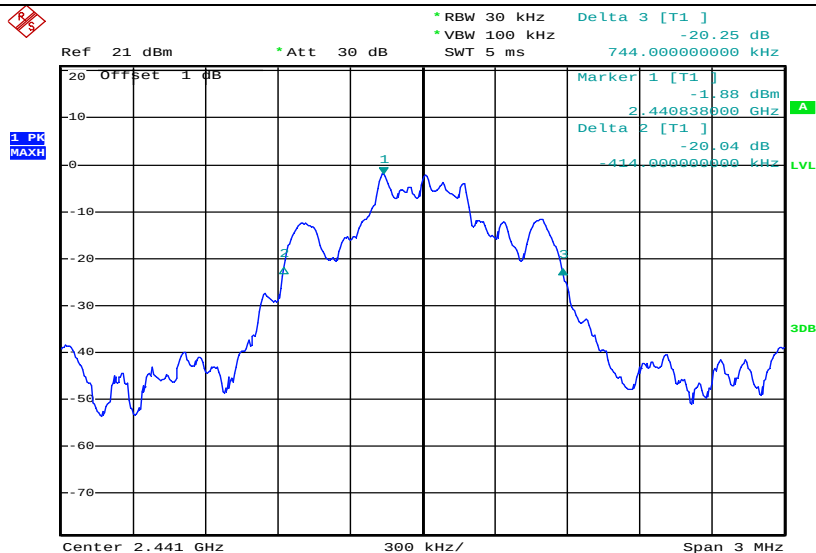

### CH39

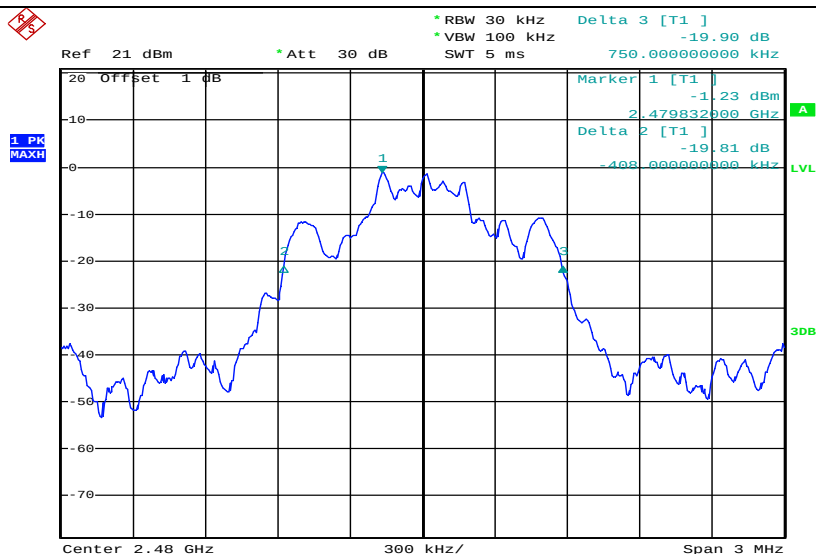

### CH78



### 3.5. Band Edge

#### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



#### Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to an EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


#### TEST RESULTS

Remark: we measured all conditions (DH1, DH3, DH5) and recorded worst case at DH1

# A. Radiated Bandedge Measurement

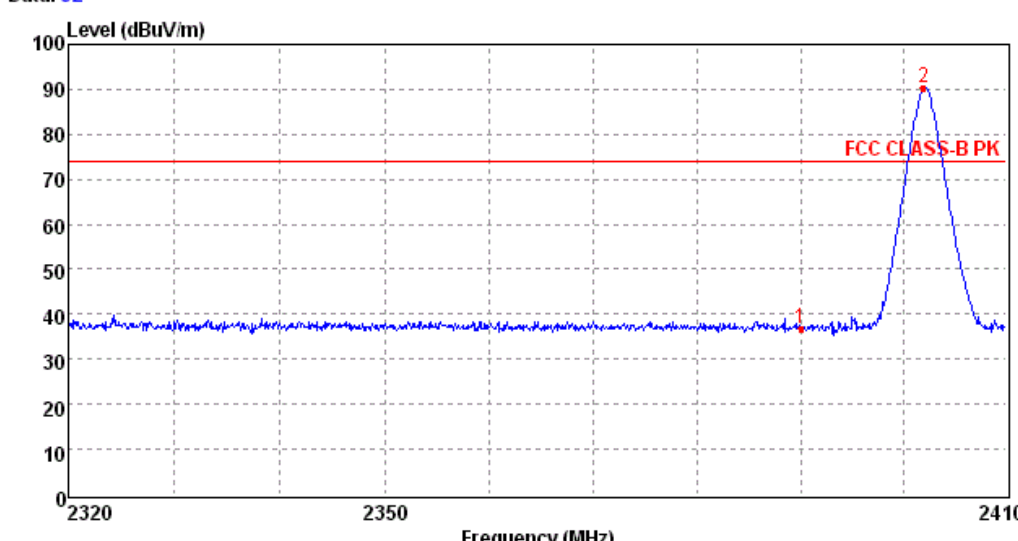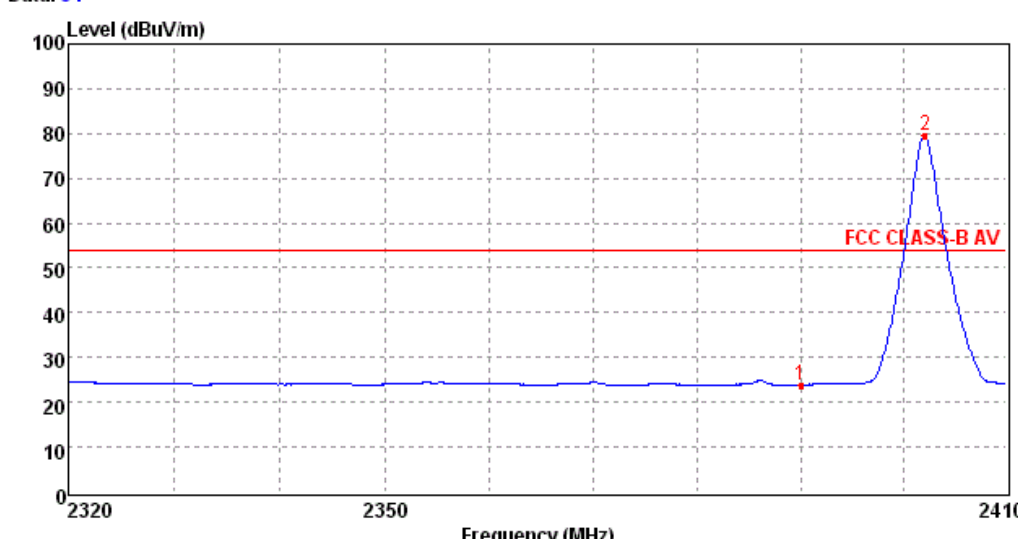
| Test Mode:                                                                           |                 | GFSK           |                 |                       | Polarization:      |                        | Horizontal     |             |          |
|--------------------------------------------------------------------------------------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
| Data: 32                                                                             |                 |                |                 |                       |                    |                        |                |             |          |
|    |                 |                |                 |                       |                    |                        |                |             |          |
| Mark                                                                                 | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1                                                                                    | 2390.00         | 36.83          | 3.32            | 27.49                 | 36.12              | 42.11                  | 74.00          | 37.17       | Peak     |
| 2                                                                                    | 2401.94         | 90.26          | 3.32            | 27.49                 | 36.12              | 95.57                  | 74.00          | -16.26      | Peak     |
| Data: 31                                                                             |                 |                |                 |                       |                    |                        |                |             |          |
|  |                 |                |                 |                       |                    |                        |                |             |          |
| Mark                                                                                 | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1                                                                                    | 2390.00         | 23.84          | 3.32            | 27.49                 | 36.12              | 29.12                  | 54.00          | 30.16       | Average  |
| 2                                                                                    | 2402.13         | 79.62          | 3.32            | 27.49                 | 36.12              | 84.93                  | 54.00          | -25.62      | Average  |
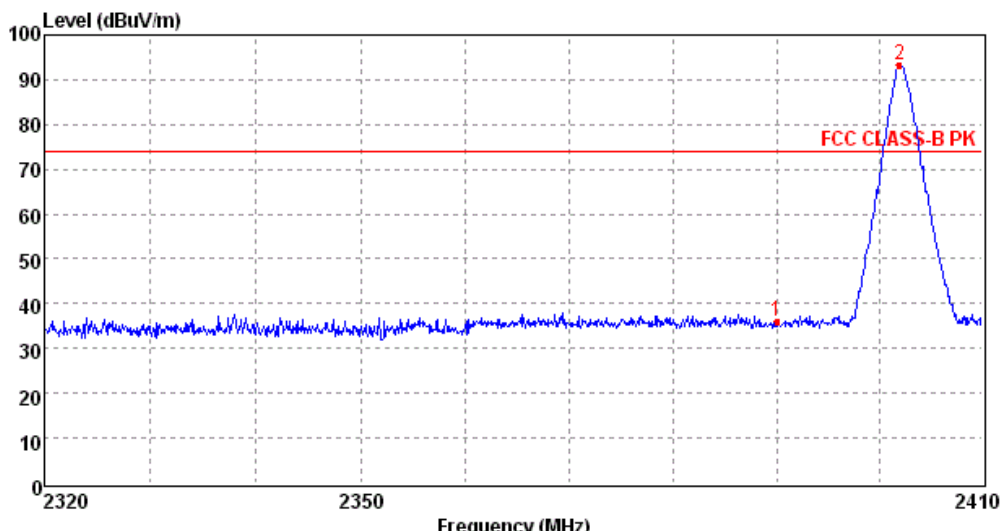
| Test Mode:                                                                         |                 | GFSK           |                 |                       | Polarization:      |                        |                | Vertical    |          |  |
|------------------------------------------------------------------------------------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|--|
| Data: 33                                                                           |                 |                |                 |                       |                    |                        |                |             |          |  |
|  |                 |                |                 |                       |                    |                        |                |             |          |  |
| Mark                                                                               | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |  |
| 1                                                                                  | 2390.00         | 35.93          | 3.32            | 27.49                 | 36.12              | 41.21                  | 74.00          | 38.07       | Peak     |  |
| 2                                                                                  | 2401.94         | 93.23          | 3.32            | 27.49                 | 36.12              | 98.54                  | 74.00          | -19.23      | Peak     |  |
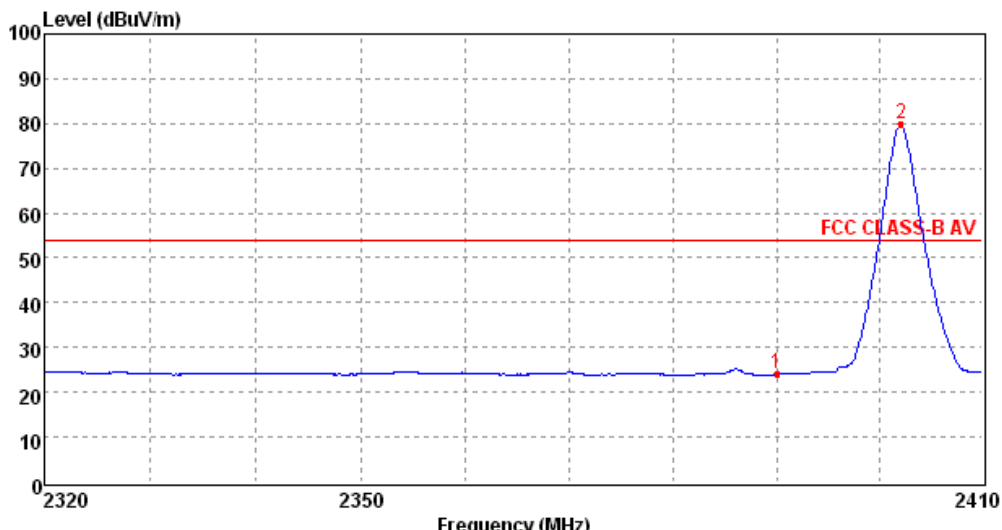
| Data: 24                                                                             |                 |                |                 |                       |                    |                        |                |             |          |  |
|--------------------------------------------------------------------------------------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|--|
|  |                 |                |                 |                       |                    |                        |                |             |          |  |
| Mark                                                                                 | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |  |
| 1                                                                                    | 2390.00         | 24.01          | 3.32            | 27.49                 | 36.12              | 29.29                  | 54.00          | 29.99       | Average  |  |
| 2                                                                                    | 2402.13         | 79.79          | 3.32            | 27.49                 | 36.12              | 85.10                  | 54.00          | -25.79      | Average  |  |


|            |      |               |            |
|------------|------|---------------|------------|
| Test Mode: | GFSK | Polarization: | Horizontal |
|------------|------|---------------|------------|

Data: 36

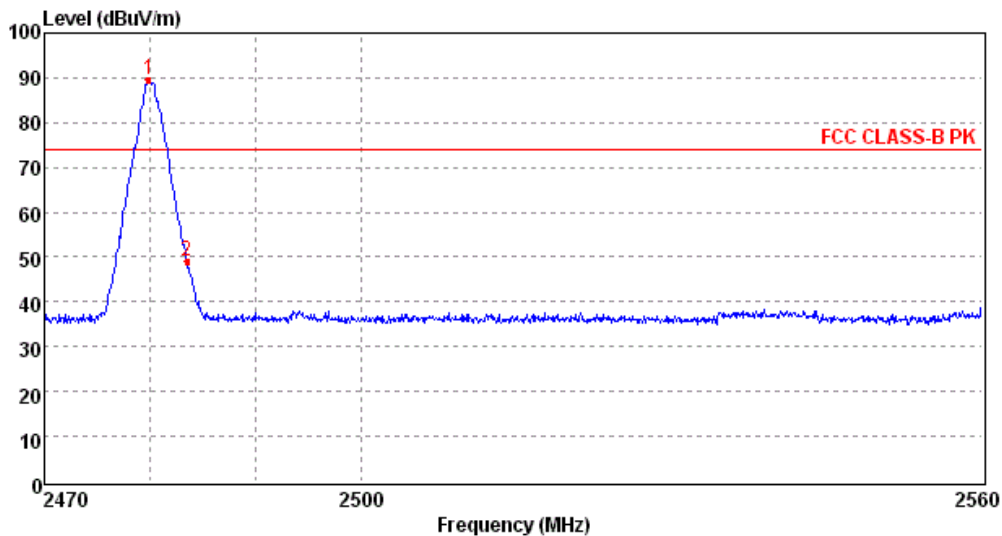

| Mark | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
| 1    | 2479.83         | 89.56          | 3.88            | 27.45                 | 36.55              | 94.78                  | 74.00          | -15.56      | Peak     |
| 2    | 2483.50         | 48.94          | 3.88            | 27.45                 | 36.55              | 54.16                  | 74.00          | 25.06       | Peak     |


Data: 34

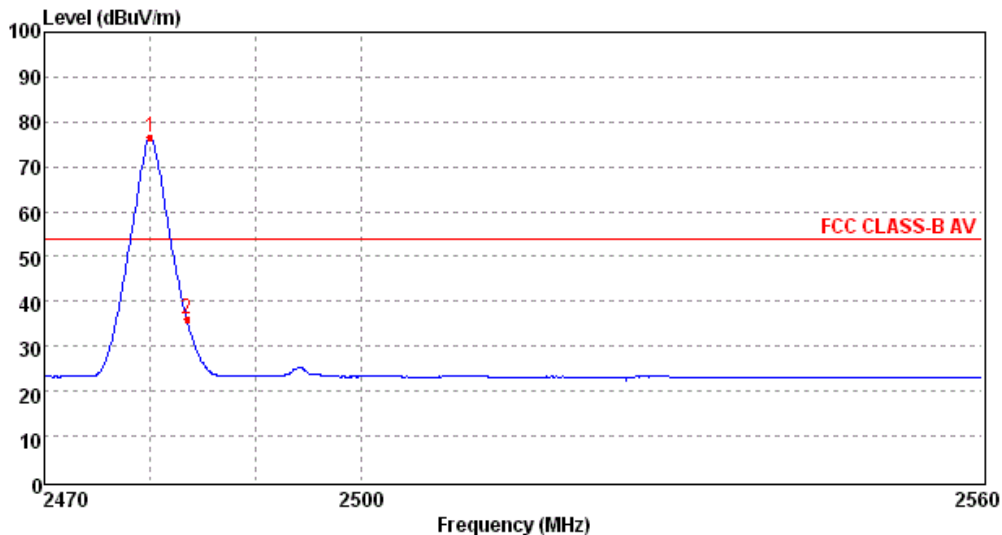

| Mark | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
| 1    | 2480.01         | 76.40          | 3.88            | 27.45                 | 36.55              | 81.62                  | 54.00          | -22.40      | Average  |
| 2    | 2483.50         | 36.10          | 3.88            | 27.45                 | 36.55              | 41.32                  | 54.00          | 17.90       | Average  |


|            |      |               |          |
|------------|------|---------------|----------|
| Test Mode: | GFSK | Polarization: | Vertical |
|------------|------|---------------|----------|

Data: 37

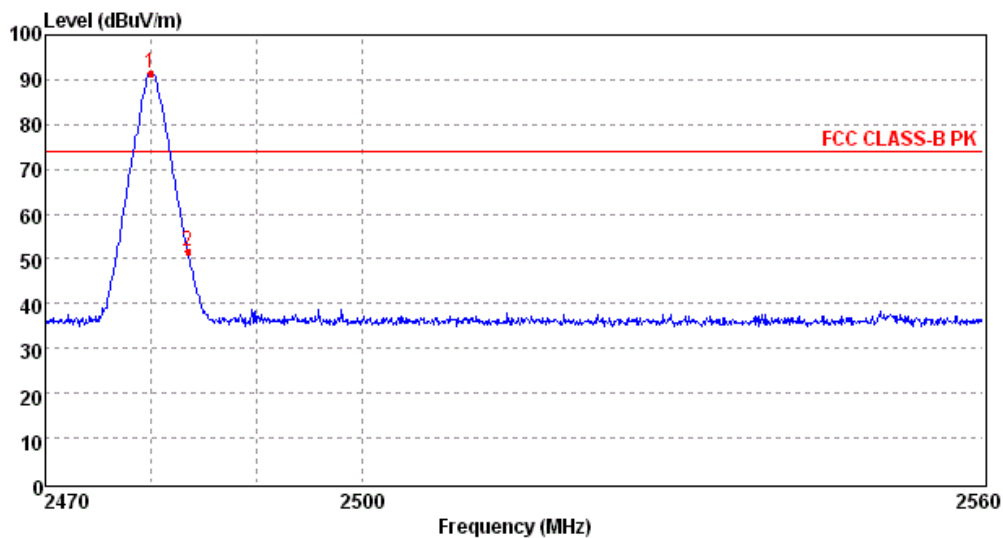

| Mark | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
| 1    | 2479.92         | 91.40          | 3.88            | 27.45                 | 36.55              | 96.62                  | 74.00          | -17.40      | Peak     |
| 2    | 2483.50         | 51.59          | 3.88            | 27.45                 | 36.55              | 56.81                  | 74.00          | 22.41       | Peak     |


Data: 35


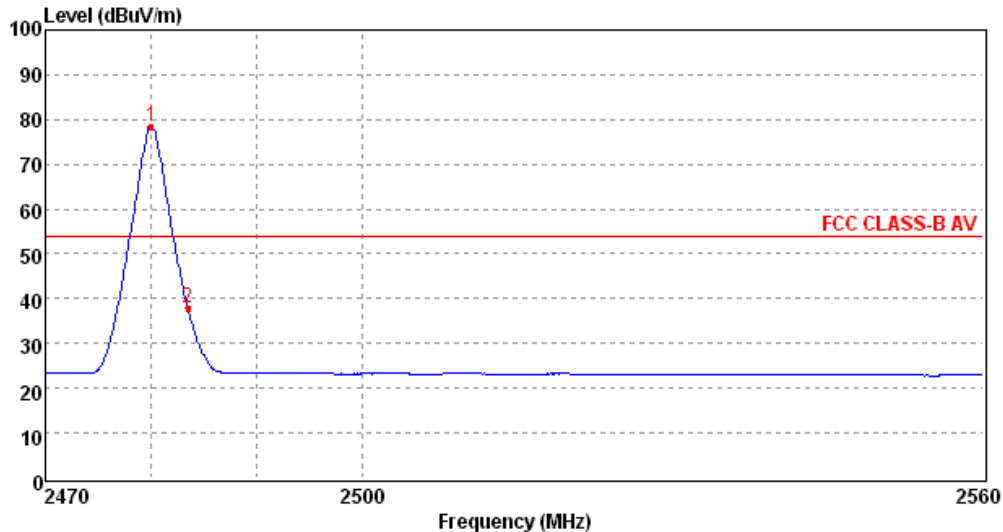


| Mark | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
| 1    | 2480.01         | 78.60          | 3.88            | 27.45                 | 36.55              | 83.82                  | 54.00          | -24.60      | Average  |
| 2    | 2483.50         | 37.93          | 3.88            | 27.45                 | 36.55              | 43.15                  | 54.00          | 16.07       | Average  |

| Test Mode: |                 | $\pi$ /4DQPSK  |                 |                       | Polarization:      |                        | Horizontal     |             |          |
|------------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
| Data: 40   |                 |                |                 |                       |                    |                        |                |             |          |
|            |                 |                |                 |                       |                    |                        |                |             |          |
| Mark       | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1          | 2390.00         | 38.97          | 3.32            | 27.49                 | 36.12              | 44.25                  | 74.00          | 35.03       | Peak     |
| 2          | 2401.94         | 92.27          | 3.32            | 27.49                 | 36.12              | 97.58                  | 74.00          | -18.27      | Peak     |

| Data: 38 |                 |                |                 |                       |                    |                        |                |             |          |
|----------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
|          |                 |                |                 |                       |                    |                        |                |             |          |
| Mark     | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1        | 2390.00         | 25.87          | 3.32            | 27.49                 | 36.12              | 31.15                  | 54.00          | 27.97       | Average  |
| 2        | 2402.25         | 79.86          | 3.32            | 27.49                 | 36.12              | 85.17                  | 54.00          | -25.86      | Average  |

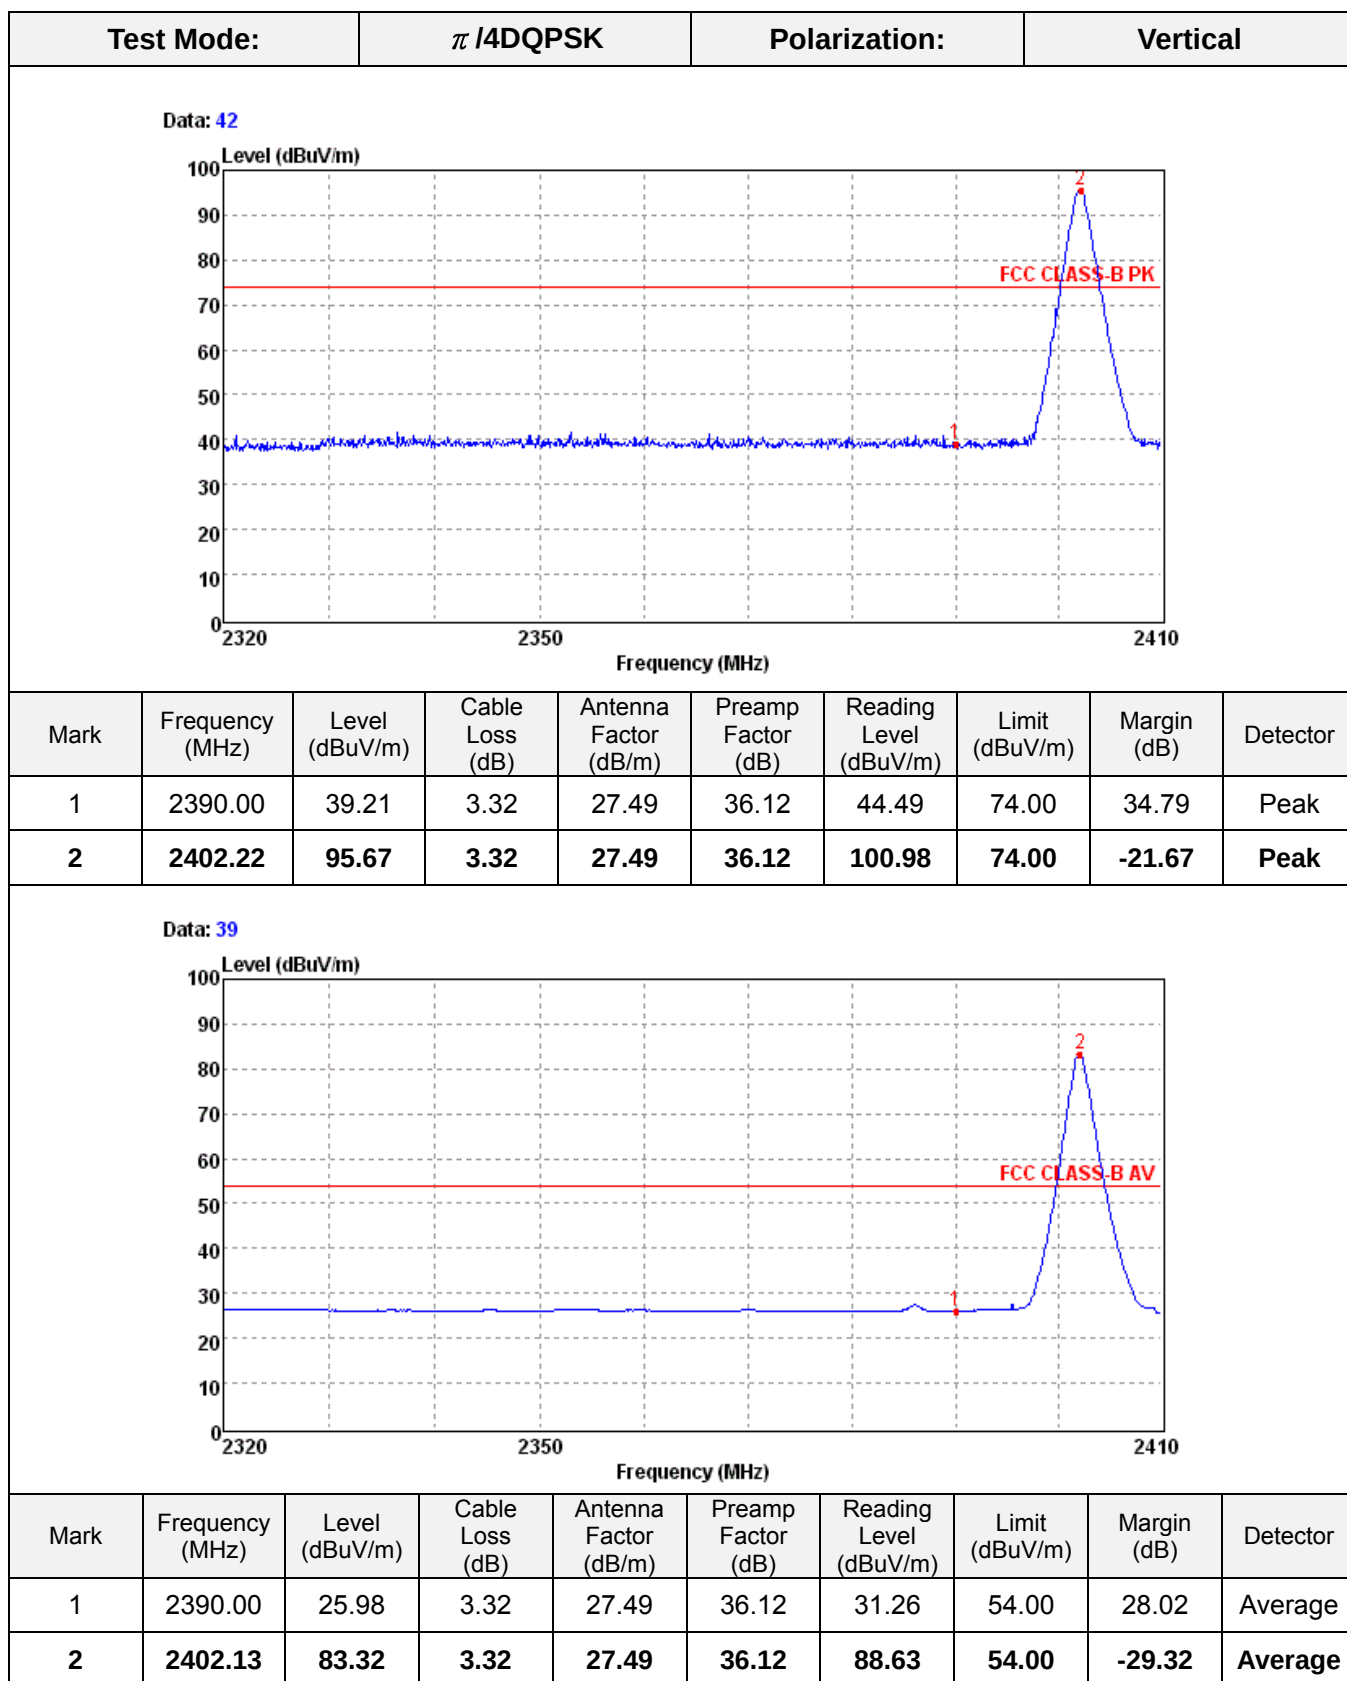

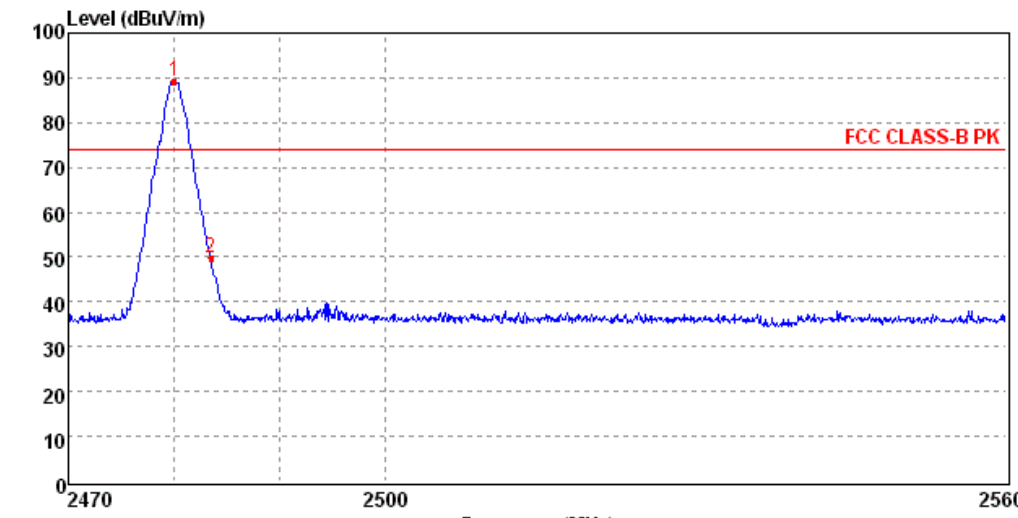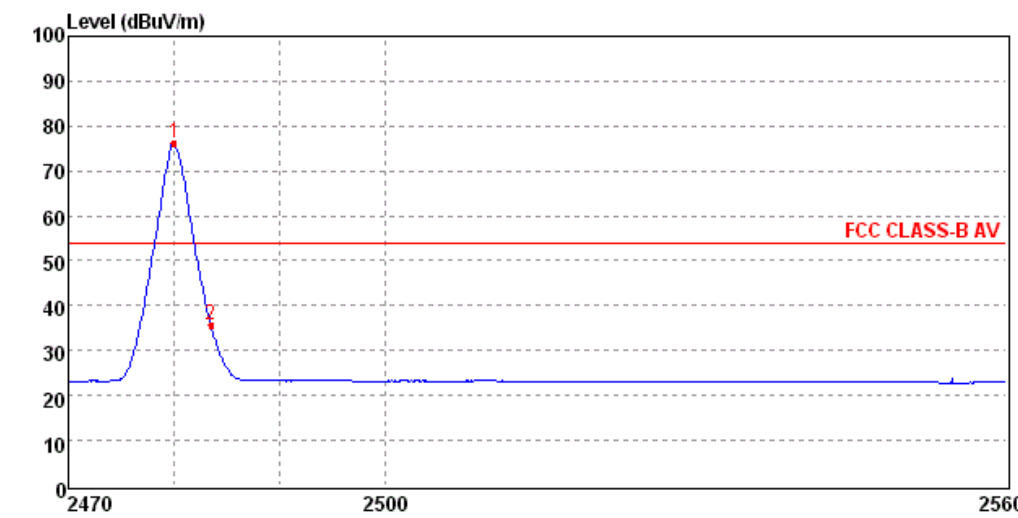
| Test Mode:                                                                           |                 | $\pi$ /4DQPSK  |                 |                       | Polarization:      |                        | Horizontal     |             |          |
|--------------------------------------------------------------------------------------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
| Data: 45                                                                             |                 |                |                 |                       |                    |                        |                |             |          |
|    |                 |                |                 |                       |                    |                        |                |             |          |
| Mark                                                                                 | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1                                                                                    | 2480.01         | 89.39          | 3.88            | 27.45                 | 36.55              | 94.61                  | 74.00          | -15.39      | Peak     |
| 2                                                                                    | 2483.50         | 49.82          | 3.88            | 27.45                 | 36.55              | 55.04                  | 74.00          | 24.18       | Peak     |
| Data: 43                                                                             |                 |                |                 |                       |                    |                        |                |             |          |
|  |                 |                |                 |                       |                    |                        |                |             |          |
| Mark                                                                                 | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1                                                                                    | 2480.01         | 76.24          | 3.88            | 27.45                 | 36.55              | 81.46                  | 54.00          | -22.24      | Average  |
| 2                                                                                    | 2483.50         | 35.82          | 3.88            | 27.45                 | 36.55              | 41.04                  | 54.00          | 18.18       | Average  |




|            |               |               |          |
|------------|---------------|---------------|----------|
| Test Mode: | $\pi/4$ DQPSK | Polarization: | Vertical |
|------------|---------------|---------------|----------|

Data: 46

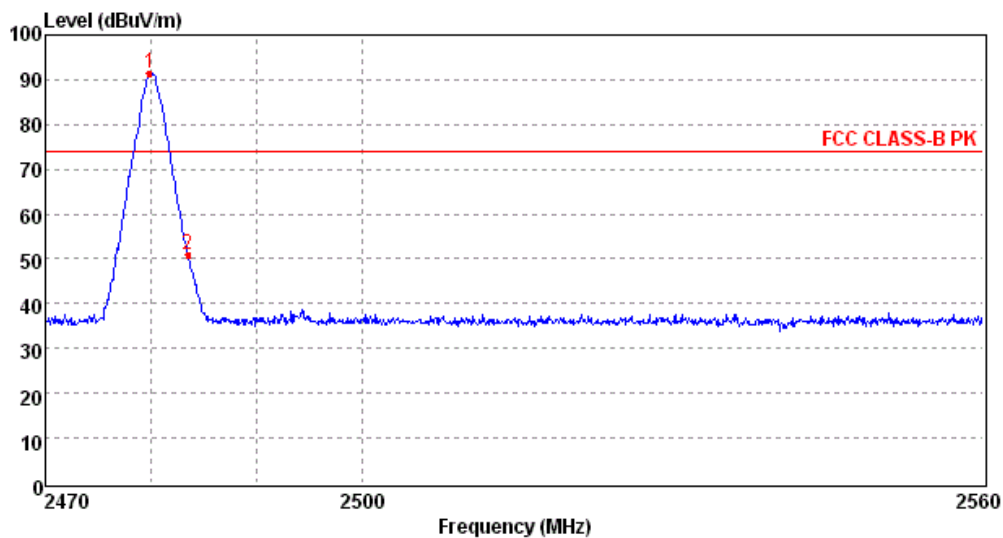



| Mark | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
| 1    | 2479.83         | 91.54          | 3.88            | 27.45                 | 36.55              | 96.76                  | 74.00          | -17.54      | Peak     |
| 2    | 2483.50         | 50.90          | 3.88            | 27.45                 | 36.55              | 56.12                  | 74.00          | 23.10       | Peak     |



Data: 44


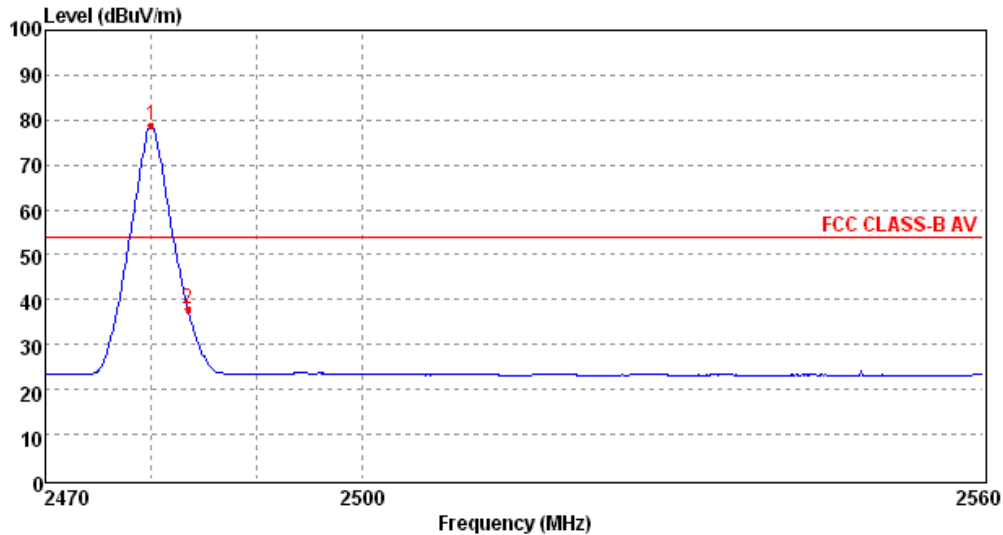




| Mark | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
| 1    | 2480.01         | 78.79          | 3.88            | 27.45                 | 36.55              | 84.01                  | 54.00          | -24.79      | Average  |
| 2    | 2483.50         | 38.04          | 3.88            | 27.45                 | 36.55              | 43.26                  | 54.00          | 15.96       | Average  |
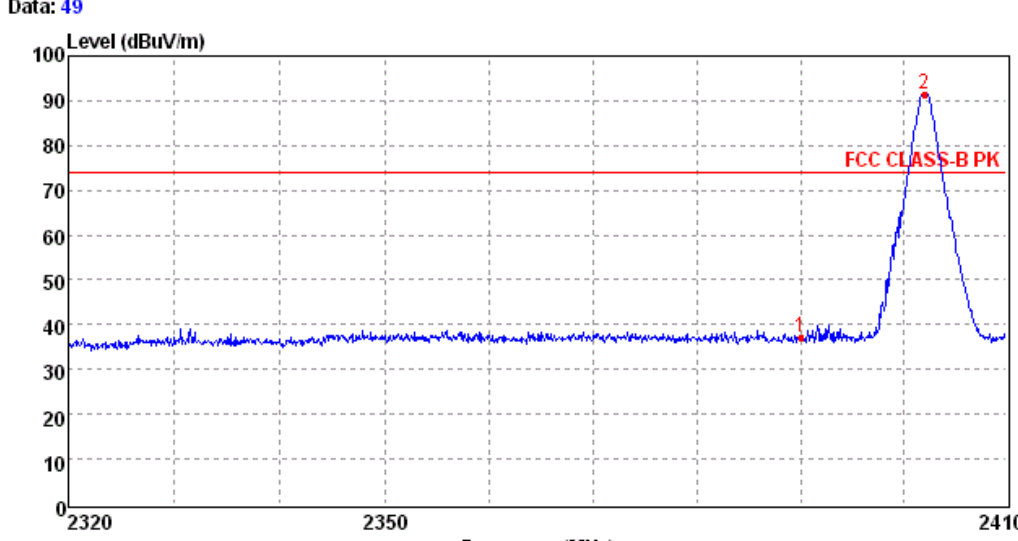
| Test Mode:                                                                         |                 | 8DPSK          |                 |                       | Polarization:      |                        | Horizontal     |             |          |
|------------------------------------------------------------------------------------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
| Data: 49                                                                           |                 |                |                 |                       |                    |                        |                |             |          |
|  |                 |                |                 |                       |                    |                        |                |             |          |
| Mark                                                                               | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1                                                                                  | 2390.00         | 37.35          | 3.32            | 27.49                 | 36.12              | 42.63                  | 74.00          | 36.65       | Peak     |
| 2                                                                                  | 2402.03         | 91.63          | 3.32            | 27.49                 | 36.12              | 96.94                  | 74.00          | -17.63      | Peak     |
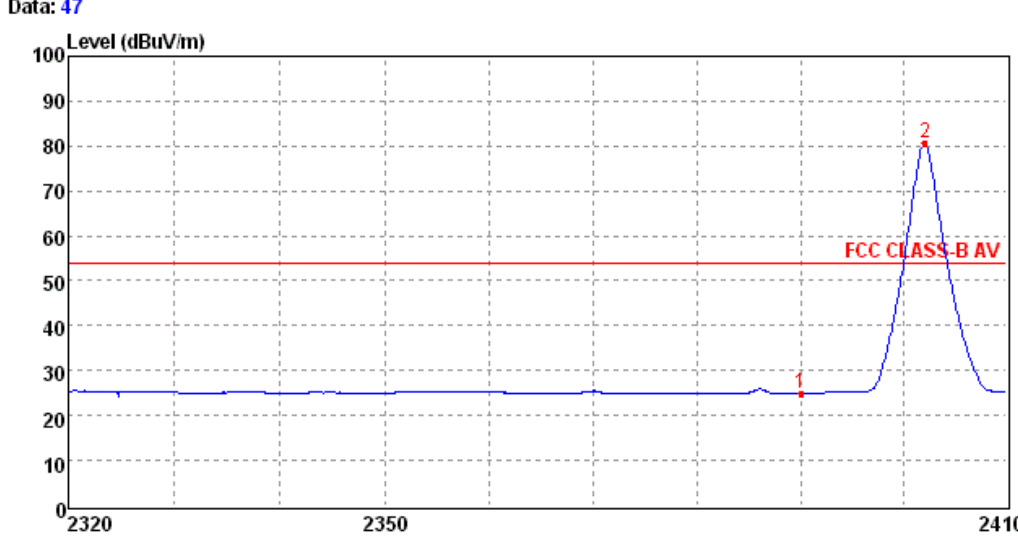
| Data: 47                                                                             |                 |                |                 |                       |                    |                        |                |             |          |
|--------------------------------------------------------------------------------------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
|  |                 |                |                 |                       |                    |                        |                |             |          |
| Mark                                                                                 | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1                                                                                    | 2390.00         | 24.84          | 3.32            | 27.49                 | 36.12              | 30.12                  | 54.00          | 29.16       | Average  |
| 2                                                                                    | 2402.13         | 80.62          | 3.32            | 27.49                 | 36.12              | 85.93                  | 54.00          | -26.62      | Average  |
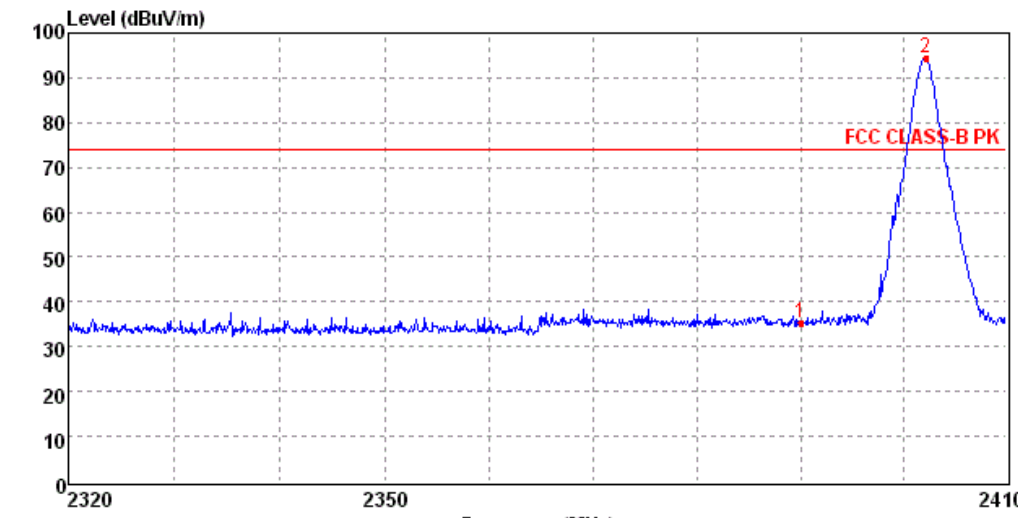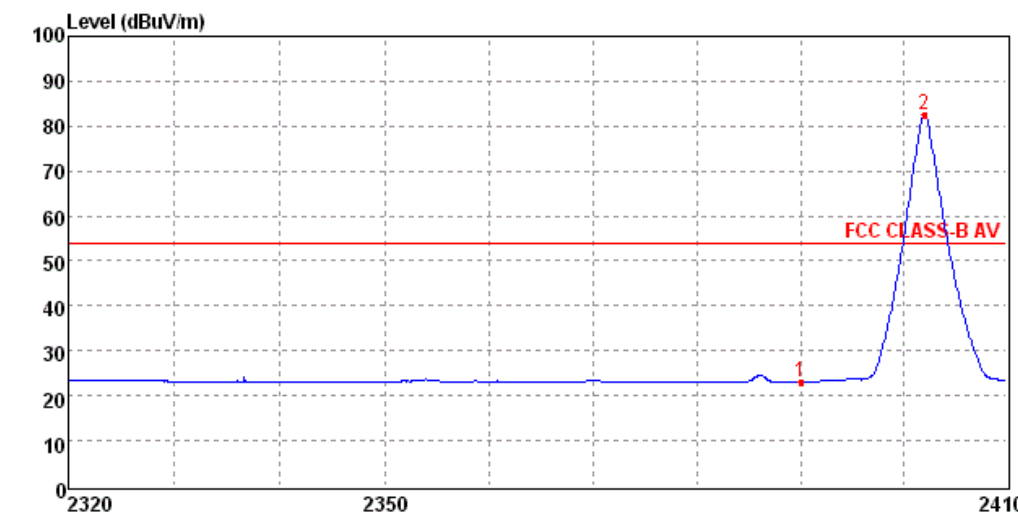
| Test Mode:                                                                           |                 | 8DPSK          |                 |                       | Polarization:      |                        | Vertical       |             |          |
|--------------------------------------------------------------------------------------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
| Data: 50                                                                             |                 |                |                 |                       |                    |                        |                |             |          |
|    |                 |                |                 |                       |                    |                        |                |             |          |
| Mark                                                                                 | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1                                                                                    | 2390.00         | 35.48          | 3.32            | 27.49                 | 36.12              | 40.76                  | 74.00          | 38.52       | Peak     |
| 2                                                                                    | 2402.22         | 94.47          | 3.32            | 27.49                 | 36.12              | 99.78                  | 74.00          | -20.47      | Peak     |
| Data: 48                                                                             |                 |                |                 |                       |                    |                        |                |             |          |
|  |                 |                |                 |                       |                    |                        |                |             |          |
| Mark                                                                                 | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1                                                                                    | 2390.00         | 23.04          | 3.32            | 27.49                 | 36.12              | 28.32                  | 54.00          | 30.96       | Average  |
| 2                                                                                    | 2402.03         | 82.55          | 3.32            | 27.49                 | 36.12              | 87.86                  | 54.00          | -28.55      | Average  |

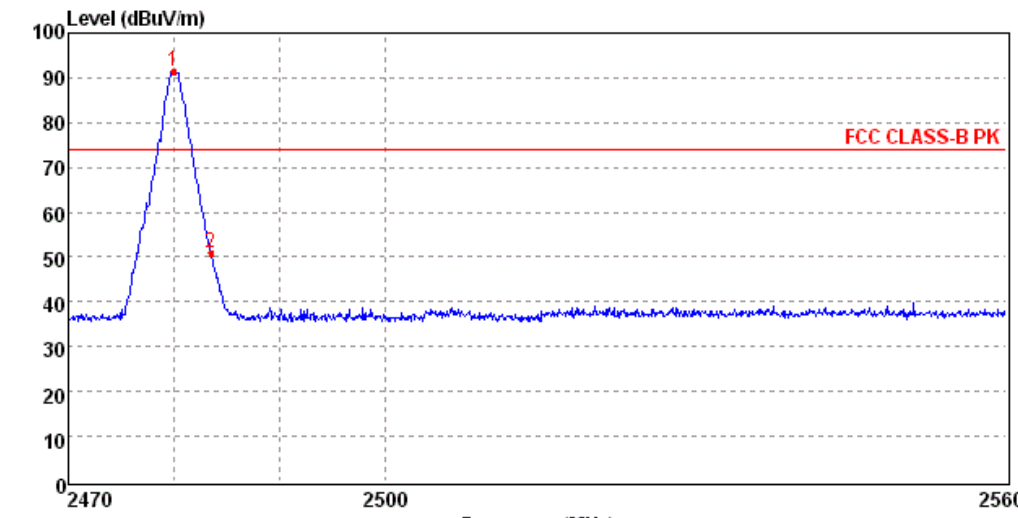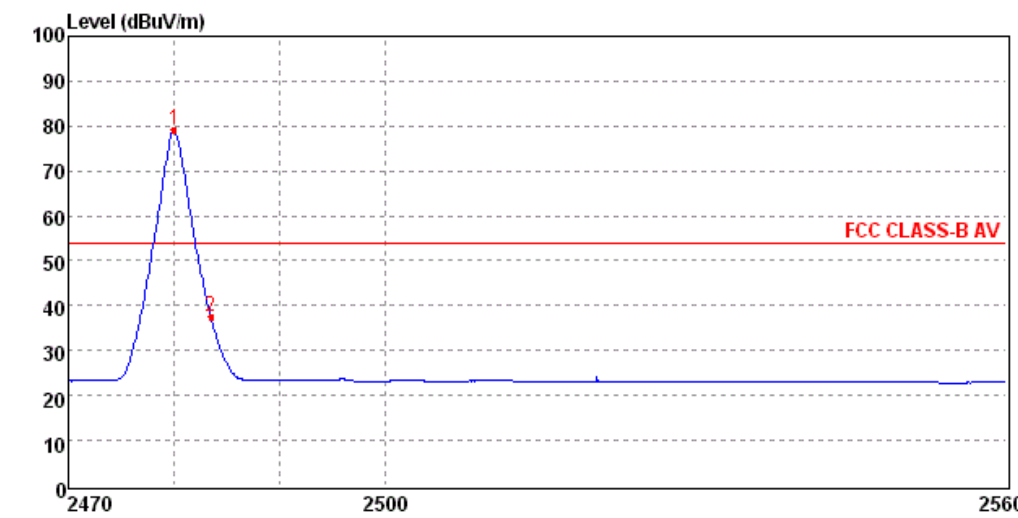
| Test Mode:                                                                           |                 | 8DPSK          |                 |                       | Polarization:      |                        | Horizontal     |             |          |
|--------------------------------------------------------------------------------------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
| Data: 53                                                                             |                 |                |                 |                       |                    |                        |                |             |          |
|    |                 |                |                 |                       |                    |                        |                |             |          |
| Mark                                                                                 | Frequency (MHz) | Level (dBUV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector |
| 1                                                                                    | 2479.92         | 91.50          | 3.88            | 27.45                 | 36.55              | 96.72                  | 74.00          | -17.50      | Peak     |
| 2                                                                                    | 2483.50         | 50.93          | 3.88            | 27.45                 | 36.55              | 56.15                  | 74.00          | 23.07       | Peak     |
| Data: 51                                                                             |                 |                |                 |                       |                    |                        |                |             |          |
|  |                 |                |                 |                       |                    |                        |                |             |          |
| Mark                                                                                 | Frequency (MHz) | Level (dBUV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector |
| 1                                                                                    | 2480.01         | 79.26          | 3.88            | 27.45                 | 36.55              | 84.48                  | 54.00          | -25.26      | Average  |
| 2                                                                                    | 2483.50         | 37.52          | 3.88            | 27.45                 | 36.55              | 42.74                  | 54.00          | 16.48       | Average  |
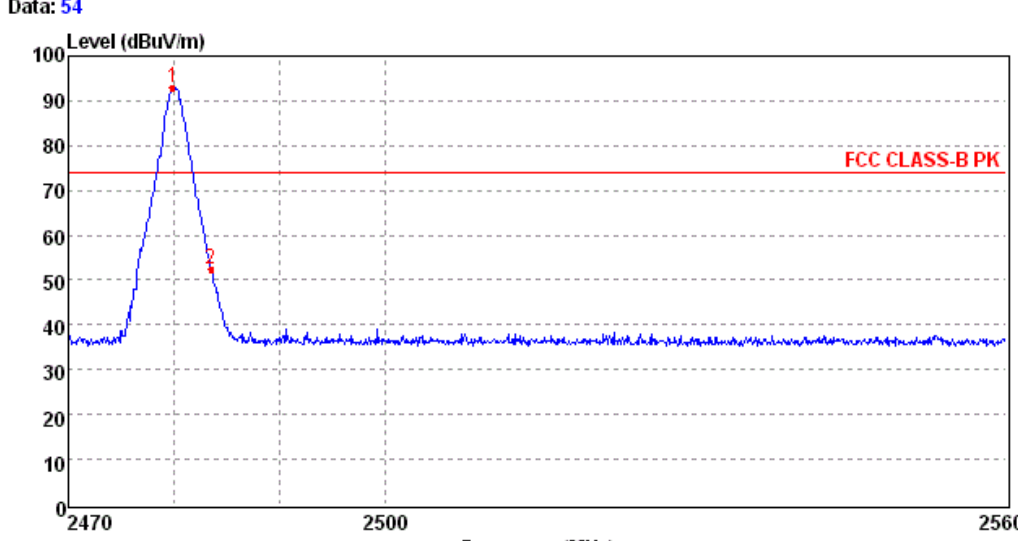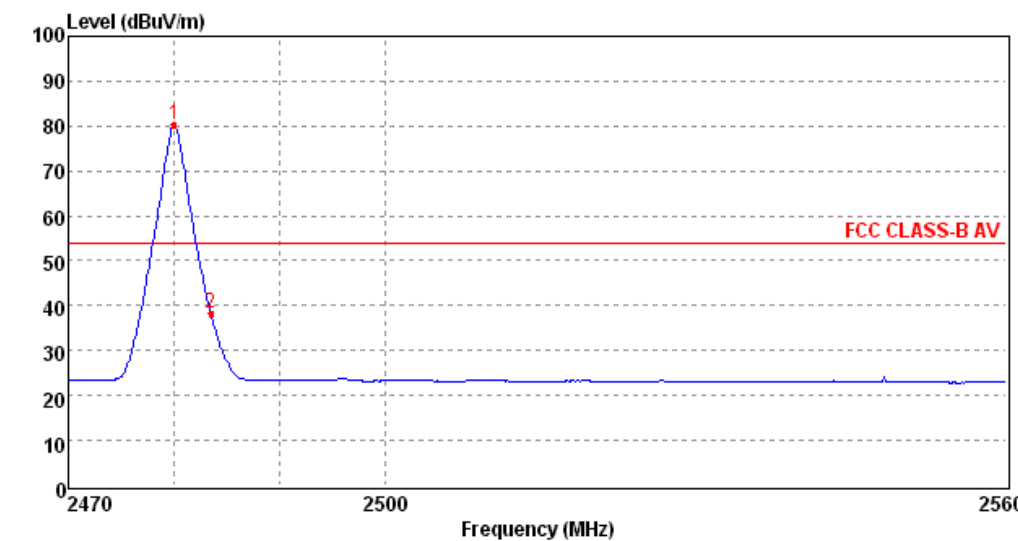
| Test Mode:                                                                           |                 | 8DPSK          |                 | Polarization:         |                    | Vertical               |                |             |          |
|--------------------------------------------------------------------------------------|-----------------|----------------|-----------------|-----------------------|--------------------|------------------------|----------------|-------------|----------|
| Data: 54                                                                             |                 |                |                 |                       |                    |                        |                |             |          |
|    |                 |                |                 |                       |                    |                        |                |             |          |
| Mark                                                                                 | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1                                                                                    | 2479.83         | 95.95          | 3.88            | 27.45                 | 36.55              | 98.17                  | 74.00          | -18.95      | Peak     |
| 2                                                                                    | 2483.50         | 52.36          | 3.88            | 27.45                 | 36.55              | 57.58                  | 74.00          | 21.64       | Peak     |
| Data: 52                                                                             |                 |                |                 |                       |                    |                        |                |             |          |
|  |                 |                |                 |                       |                    |                        |                |             |          |
| Mark                                                                                 | Frequency (MHz) | Level (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Reading Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
| 1                                                                                    | 2480.01         | 80.14          | 3.88            | 27.45                 | 36.55              | 85.36                  | 54.00          | -26.14      | Average  |
| 2                                                                                    | 2483.50         | 38.25          | 3.88            | 27.45                 | 36.55              | 43.47                  | 54.00          | 15.75       | Average  |

## B. Conducted Bandedge Measurement


### GFSK

| Frequency (MHz) | Delta Peak to Band emission (dBc) | Hopping Mode | Limit (dBc) | Verdict |
|-----------------|-----------------------------------|--------------|-------------|---------|
| 2400.00         | 51.17                             | OFF          | 20          | PASS    |
| 2400.00         | 51.38                             | ON           | 20          | PASS    |
| 2483.50         | 51.30                             | OFF          | 20          | PASS    |
| 2483.50         | 51.13                             | ON           | 20          | PASS    |

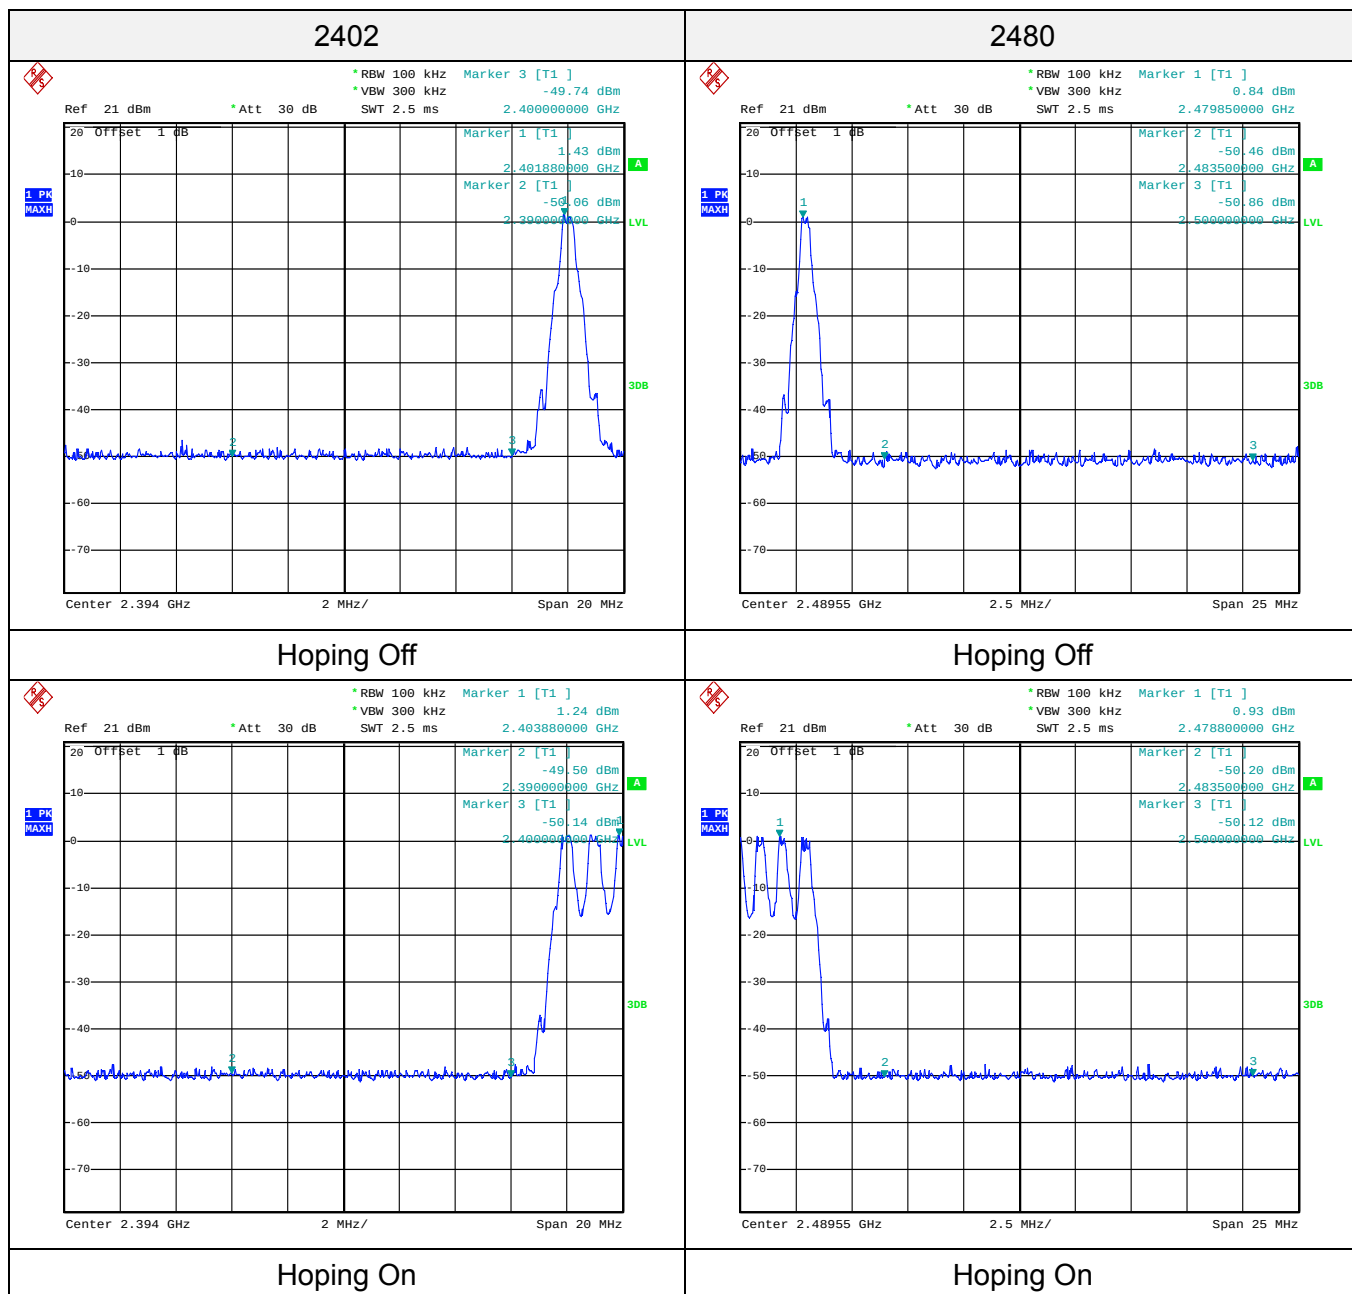


$\pi/4$ DQPSK

| Frequency (MHz) | Delta Peak to Band emission (dBc) | Hopping Mode | Limit (dBc) | Verdict |
|-----------------|-----------------------------------|--------------|-------------|---------|
| 2400.00         | 49.62                             | OFF          | 20          | PASS    |
| 2400.00         | 51.54                             | ON           | 20          | PASS    |
| 2483.50         | 49.39                             | OFF          | 20          | PASS    |
| 2483.50         | 49.41                             | ON           | 20          | PASS    |

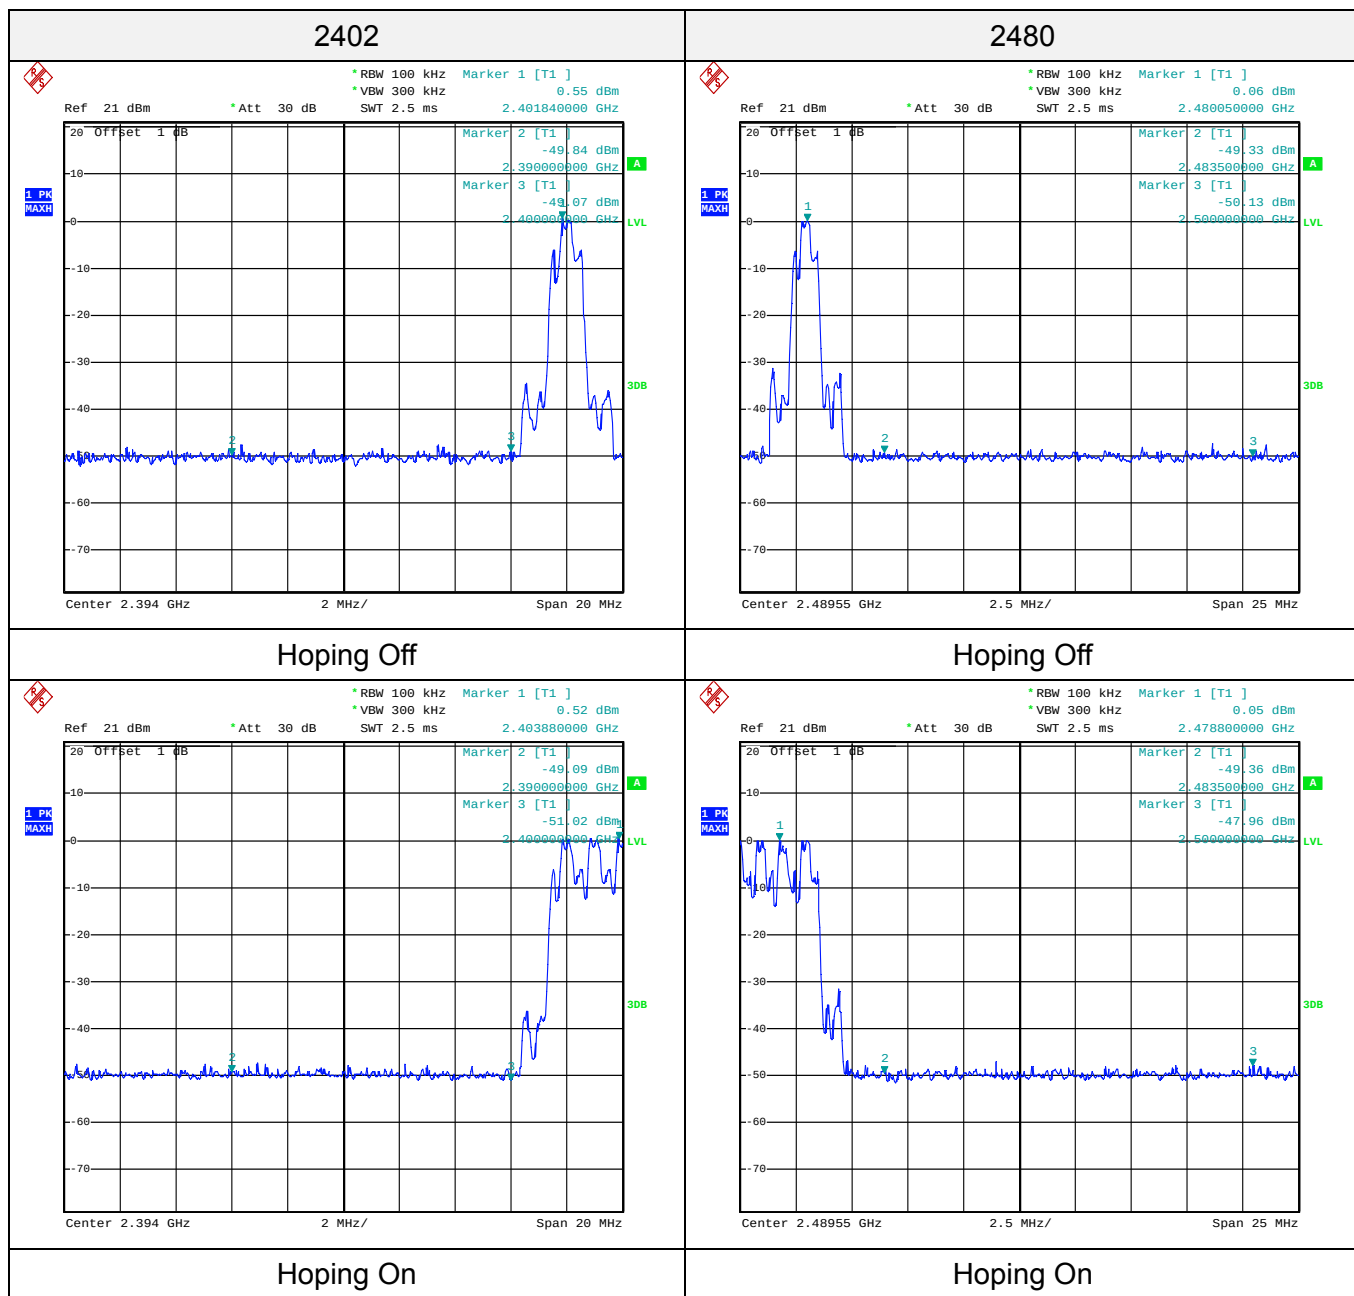

### 8DPSK

| Frequency (MHz) | Delta Peak to Band emission (dBc) | Hopping Mode | Limit (dBc) | Verdict |
|-----------------|-----------------------------------|--------------|-------------|---------|
| 2400.00         | 48.75                             | OFF          | 20          | PASS    |
| 2400.00         | 50.72                             | ON           | 20          | PASS    |
| 2483.50         | 48.54                             | OFF          | 20          | PASS    |
| 2483.50         | 49.95                             | ON           | 20          | PASS    |

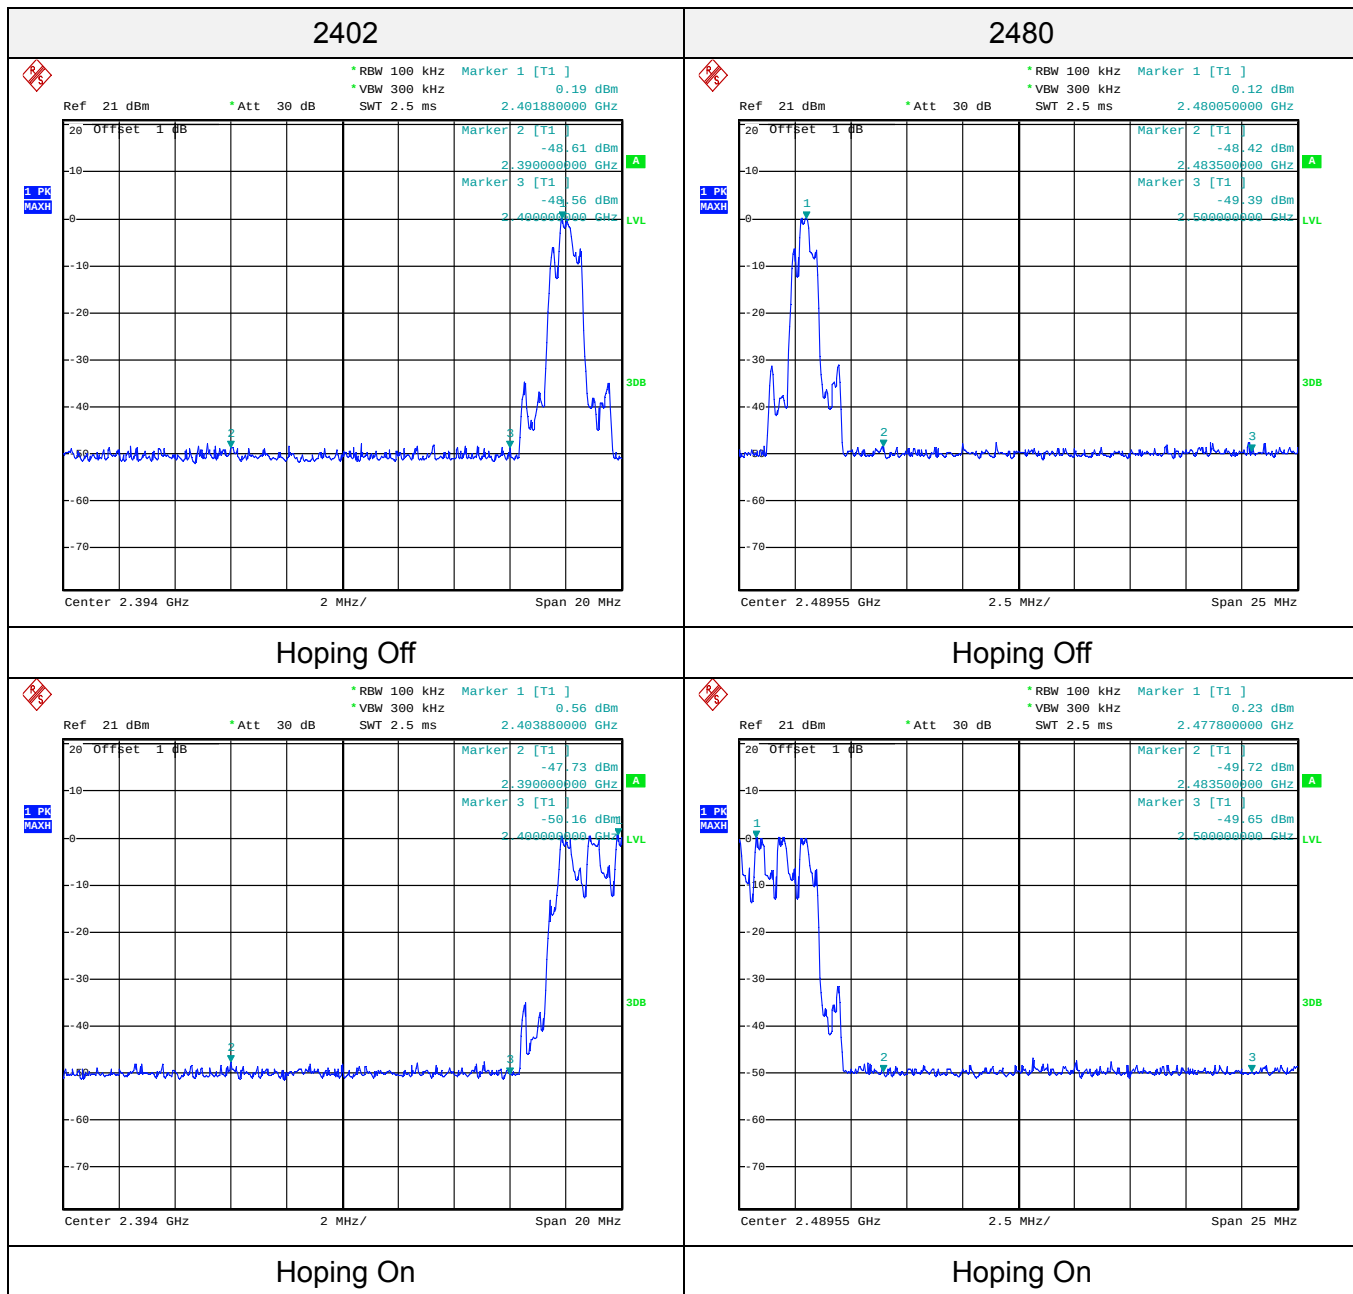



### 3.6. Frequency Separation


#### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $2/3 \times 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

#### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100KHz VBW.

#### TEST CONFIGURATION




#### TEST RESULTS

| Modulation    | Channel | Channel Separation (MHz) | Limit(MHz)                                  | Result |
|---------------|---------|--------------------------|---------------------------------------------|--------|
| GFSK          | CH40    | 1.004                    | 25KHz or $2/3 \times 20\text{dB}$ bandwidth | Pass   |
|               | CH41    |                          |                                             |        |
| $\pi/4$ DQPSK | CH40    | 1.004                    | 25KHz or $2/3 \times 20\text{dB}$ bandwidth | Pass   |
|               | CH41    |                          |                                             |        |
| 8DPSK         | CH40    | 1.004                    | 25KHz or $2/3 \times 20\text{dB}$ bandwidth | Pass   |
|               | CH41    |                          |                                             |        |


Note:

We have tested all mode at high, middle and low channel, and recorded worst case at middle


#### Test plot as follows:

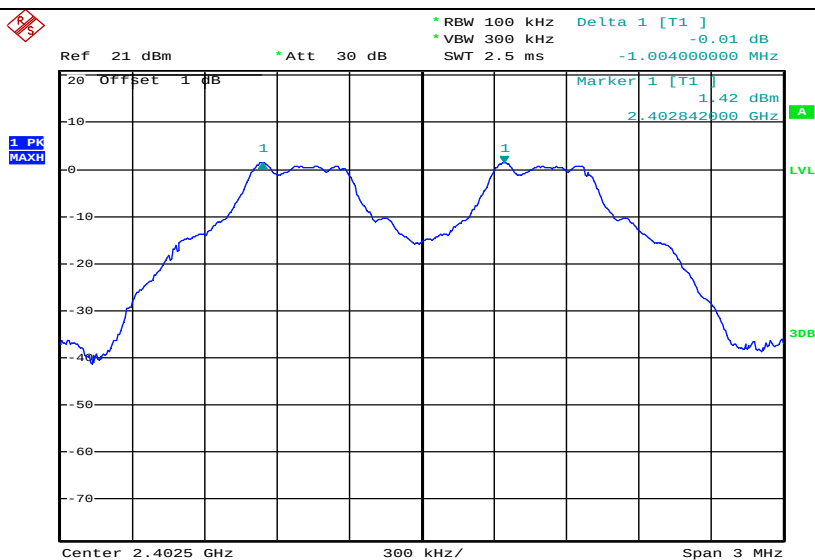

### GFSK

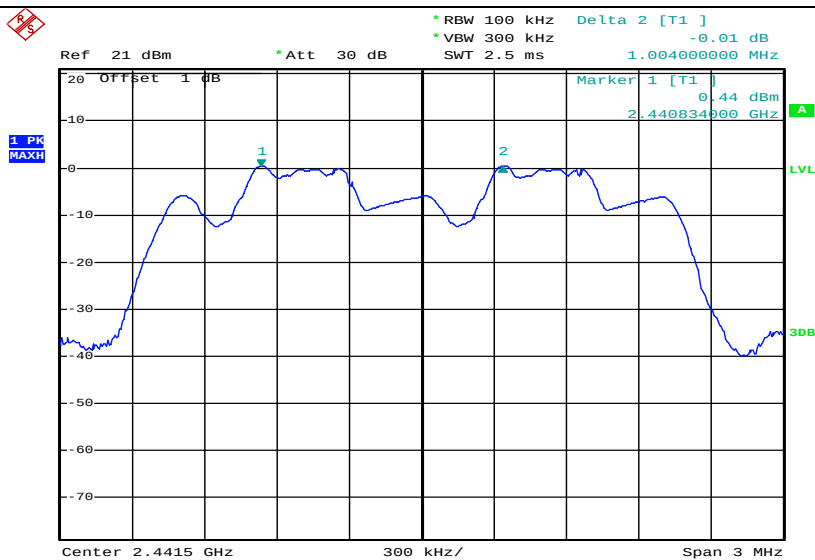

### 8DPSK

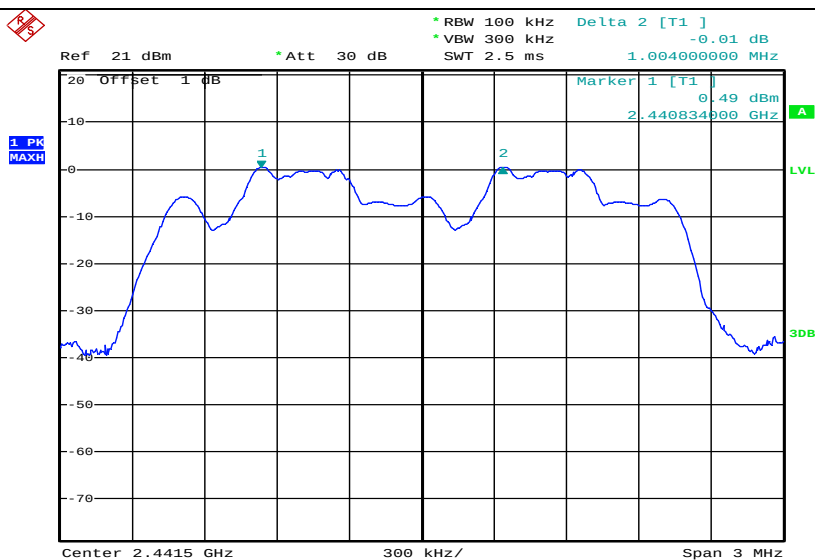

### $\pi/4$ DQPSK

### 3.7. Number of hopping frequency


#### Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.


#### Test Configuration




#### Test Results

| Modulation | Number of Hopping Channel | Limit | Result |
|------------|---------------------------|-------|--------|
| GFSK       | 79                        | ≥15   | Pass   |
| π/4DQPSK   | 79                        |       |        |
| 8DPSK      | 79                        |       |        |


#### Test plot as follows:

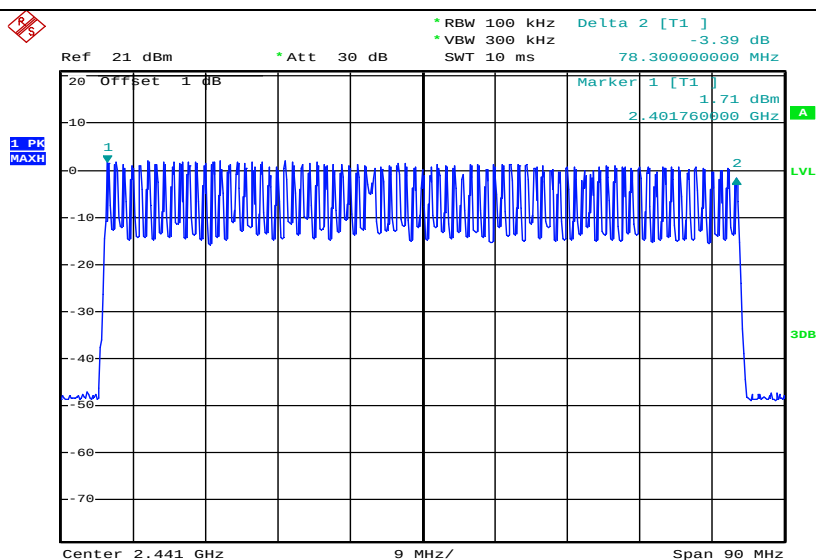

### GFSK Modulation

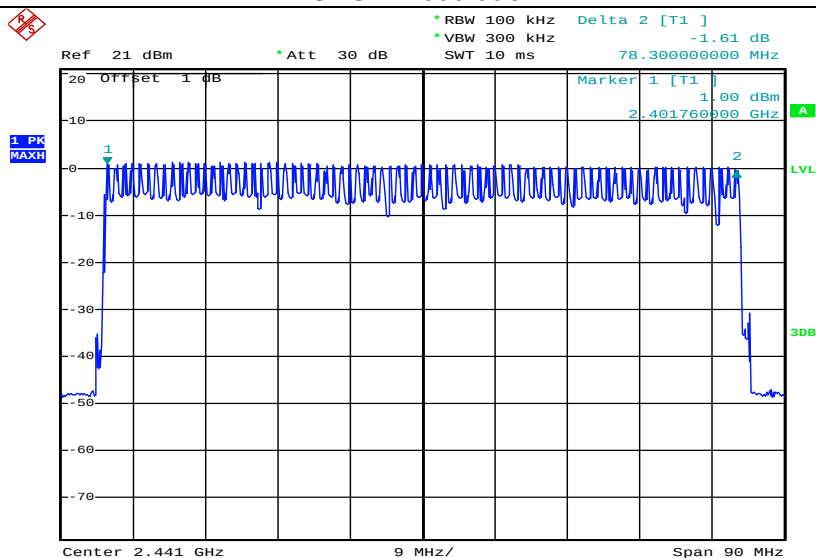

### $\pi/4$ DQPSK Modulation

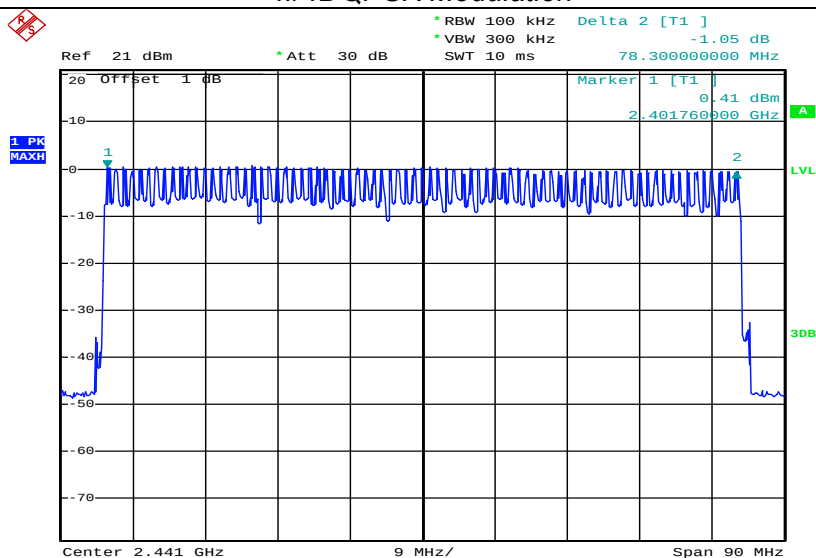

### 8DPSK Modulation

### 3.8. Time of Occupancy (Dwell Time)


#### Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 3MHz VBW,Span 0Hz.

#### Test Configuration



#### Test Results


| Modulation    | Packet | Dwell time (second) | Limit (second) | Result |
|---------------|--------|---------------------|----------------|--------|
| GFSK          | DH1    | 0.134               | 0.40           | Pass   |
|               | DH3    | 0.271               |                |        |
|               | DH5    | 0.315               |                |        |
| $\pi/4$ DQPSK | 2-DH1  | 0.138               | 0.40           | Pass   |
|               | 2-DH3  | 0.271               |                |        |
|               | 2-DH5  | 0.287               |                |        |
| 8DPSK         | 3-DH1  | 0.138               | 0.40           | Pass   |
|               | 3-DH3  | 0.271               |                |        |
|               | 3-DH5  | 0.315               |                |        |

Note:


1. We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
2. Dwell time=Pulse time (ms)  $\times$  (1600  $\div$  2  $\div$  79)  $\times$ 31.6 Second for DH1, 2-DH1, 3-DH1  
Dwell time=Pulse time (ms)  $\times$  (1600  $\div$  4  $\div$  79)  $\times$ 31.6 Second for DH3, 2-DH3, 3-DH3  
Dwell time=Pulse time (ms)  $\times$  (1600  $\div$  6  $\div$  79)  $\times$ 31.6 Second for DH5, 2-DH5, 3-DH5

#### Test plot as follows:


### GFSK Modulation

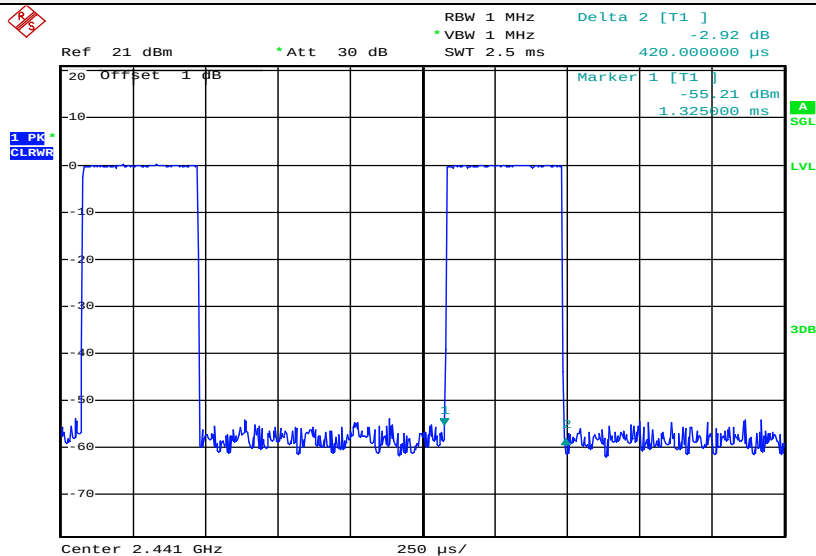

### DH1

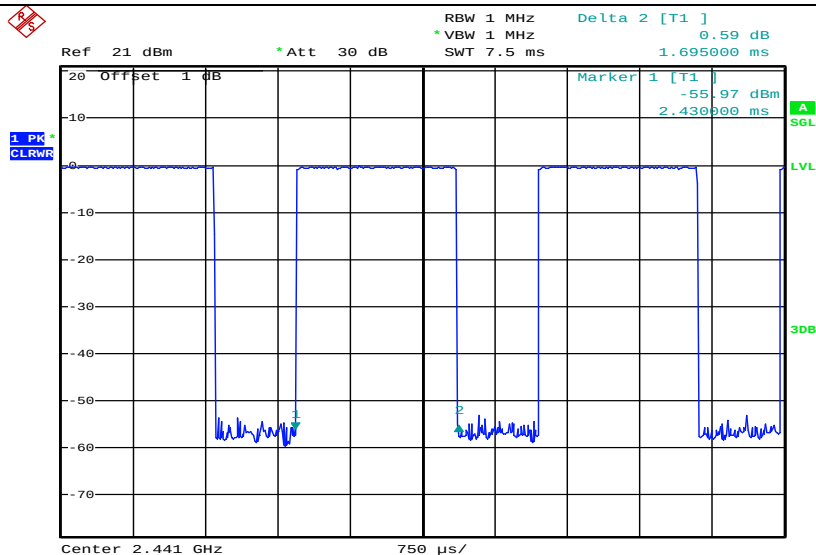


### DH3

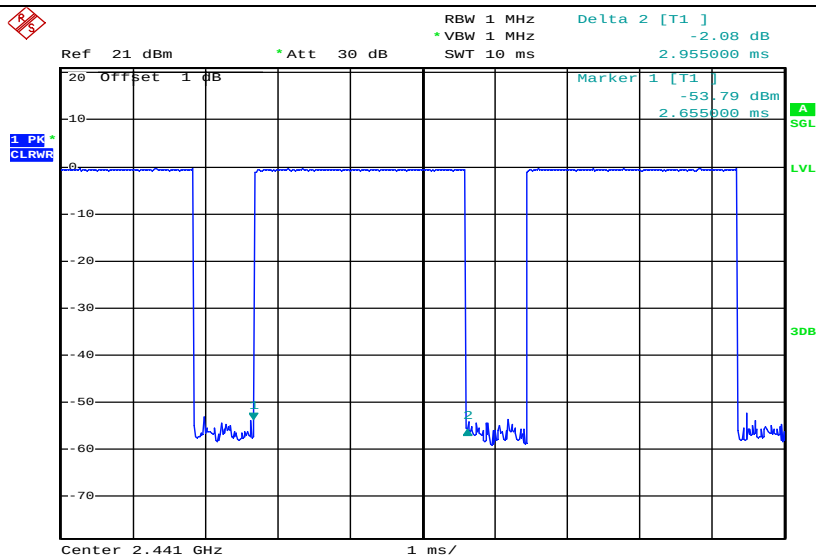


### DH5


### $\pi/4$ DQPSK Modulation

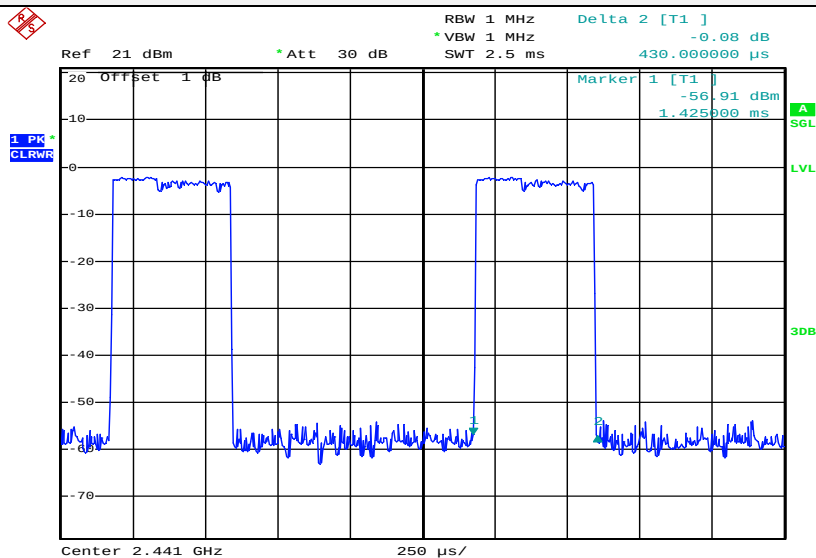

### 2-DH1

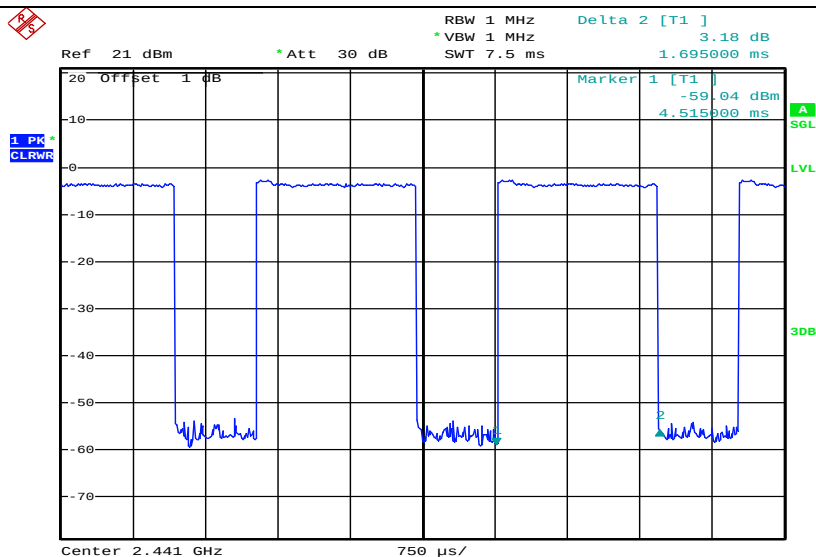


### 2-DH3

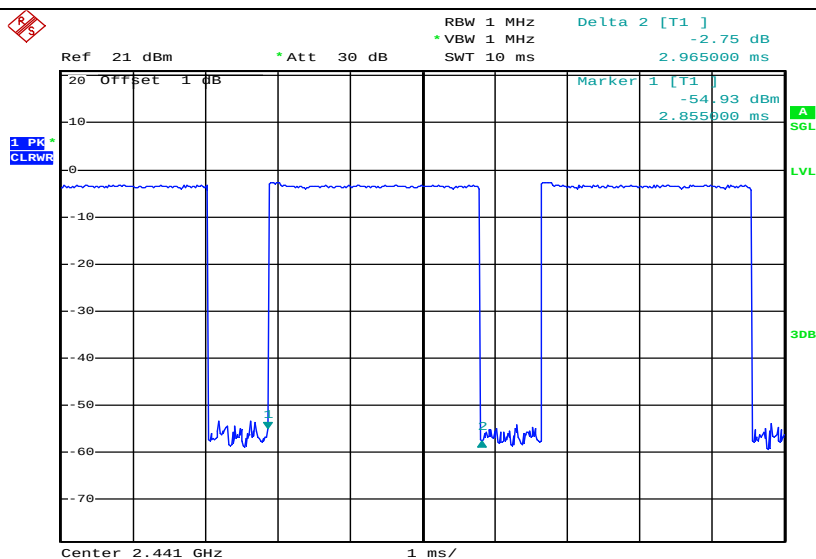


### 2-DH5


### 8DPSK Modulation

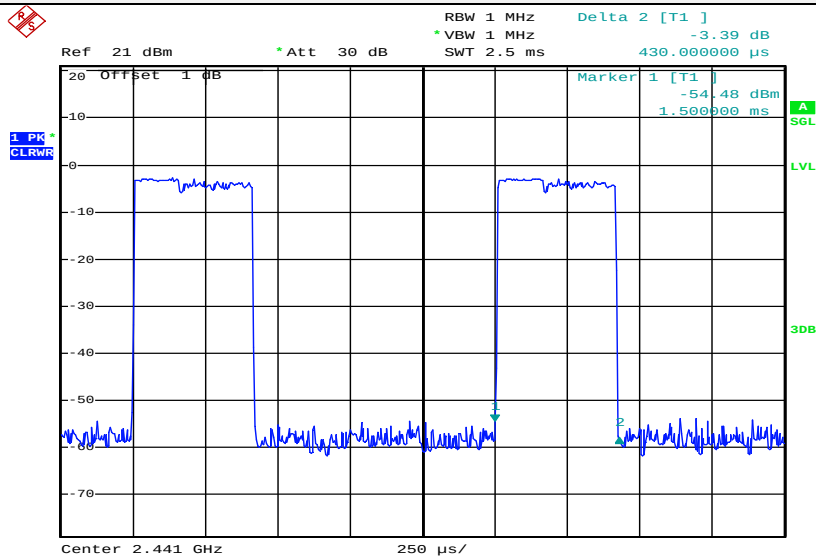

### 3-DH1

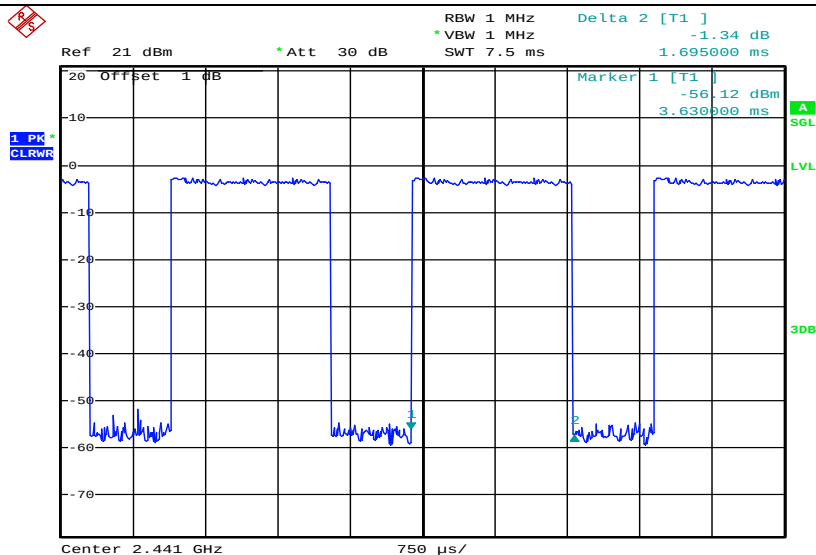

### 3-DH3

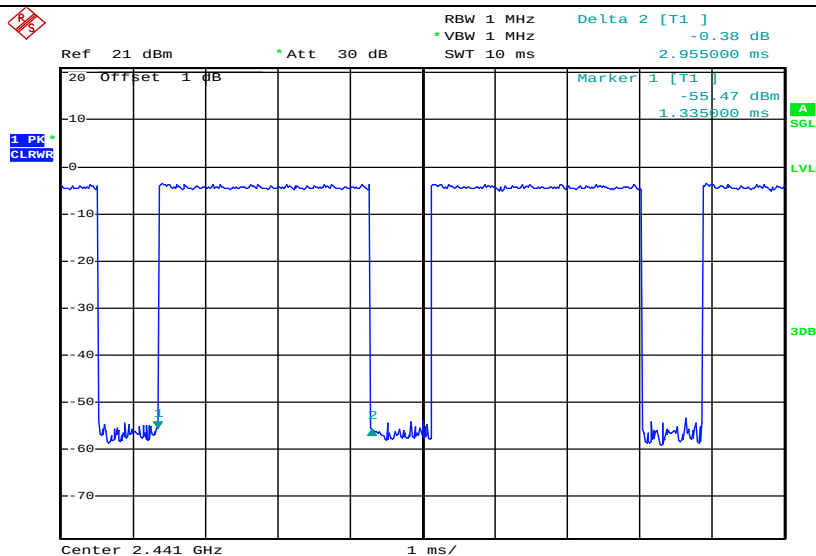

### 3-DH5



### 3.9. Spurious RF Conducted Emission


#### Limit

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

#### Test Procedure


The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2009 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100 kHz and VBM= 300 KHz to measure the peak field strength, and measurement frequency range from 30MHz to 26.5GHz.


#### Test Configuration





#### Test Results

Remark: We measured all conditions (DH1, DH3, DH5) and recorded worst case at DH1

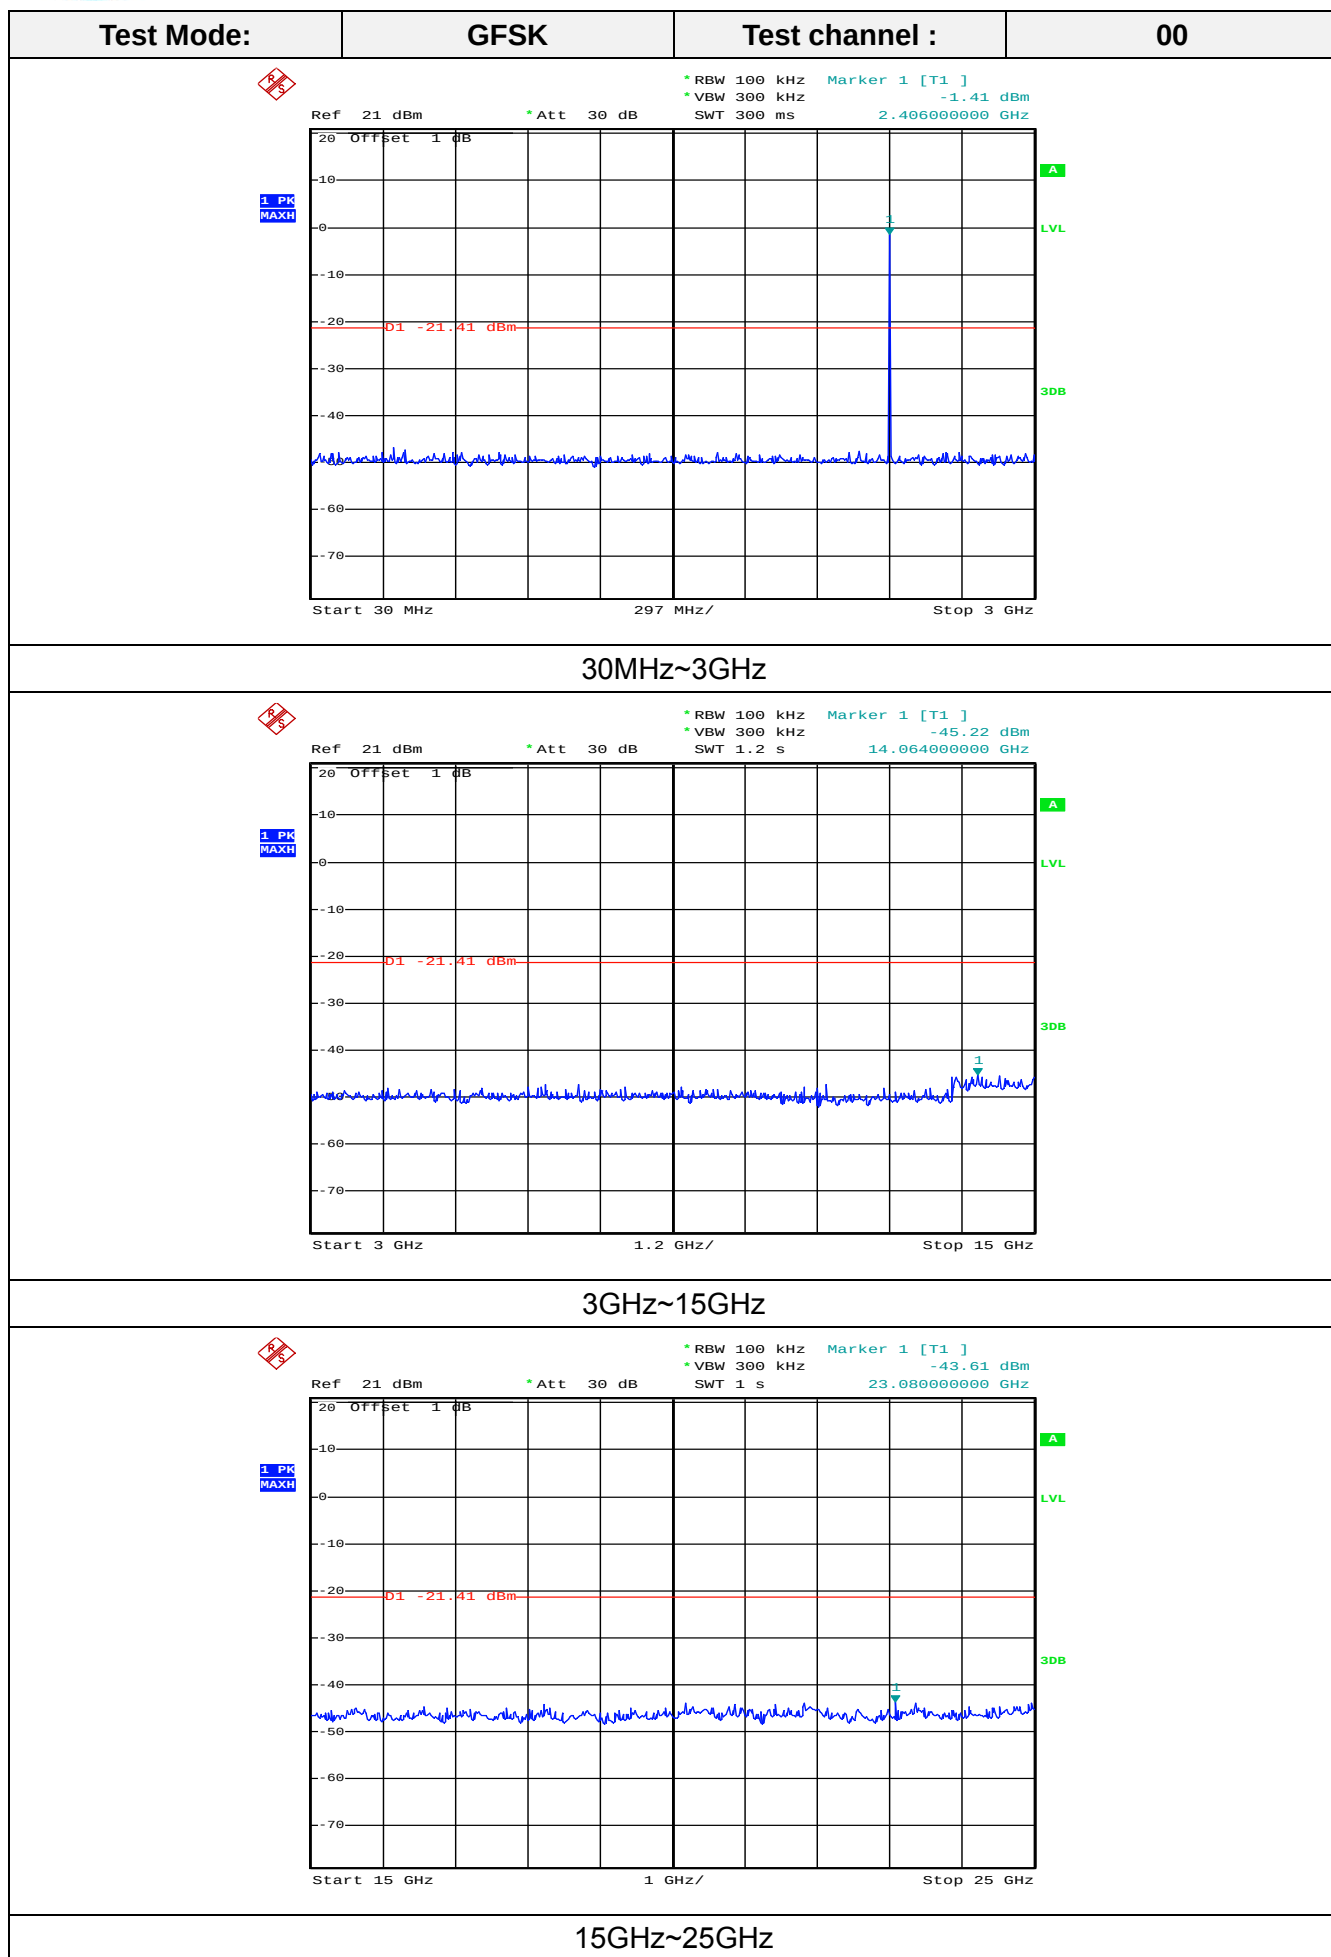


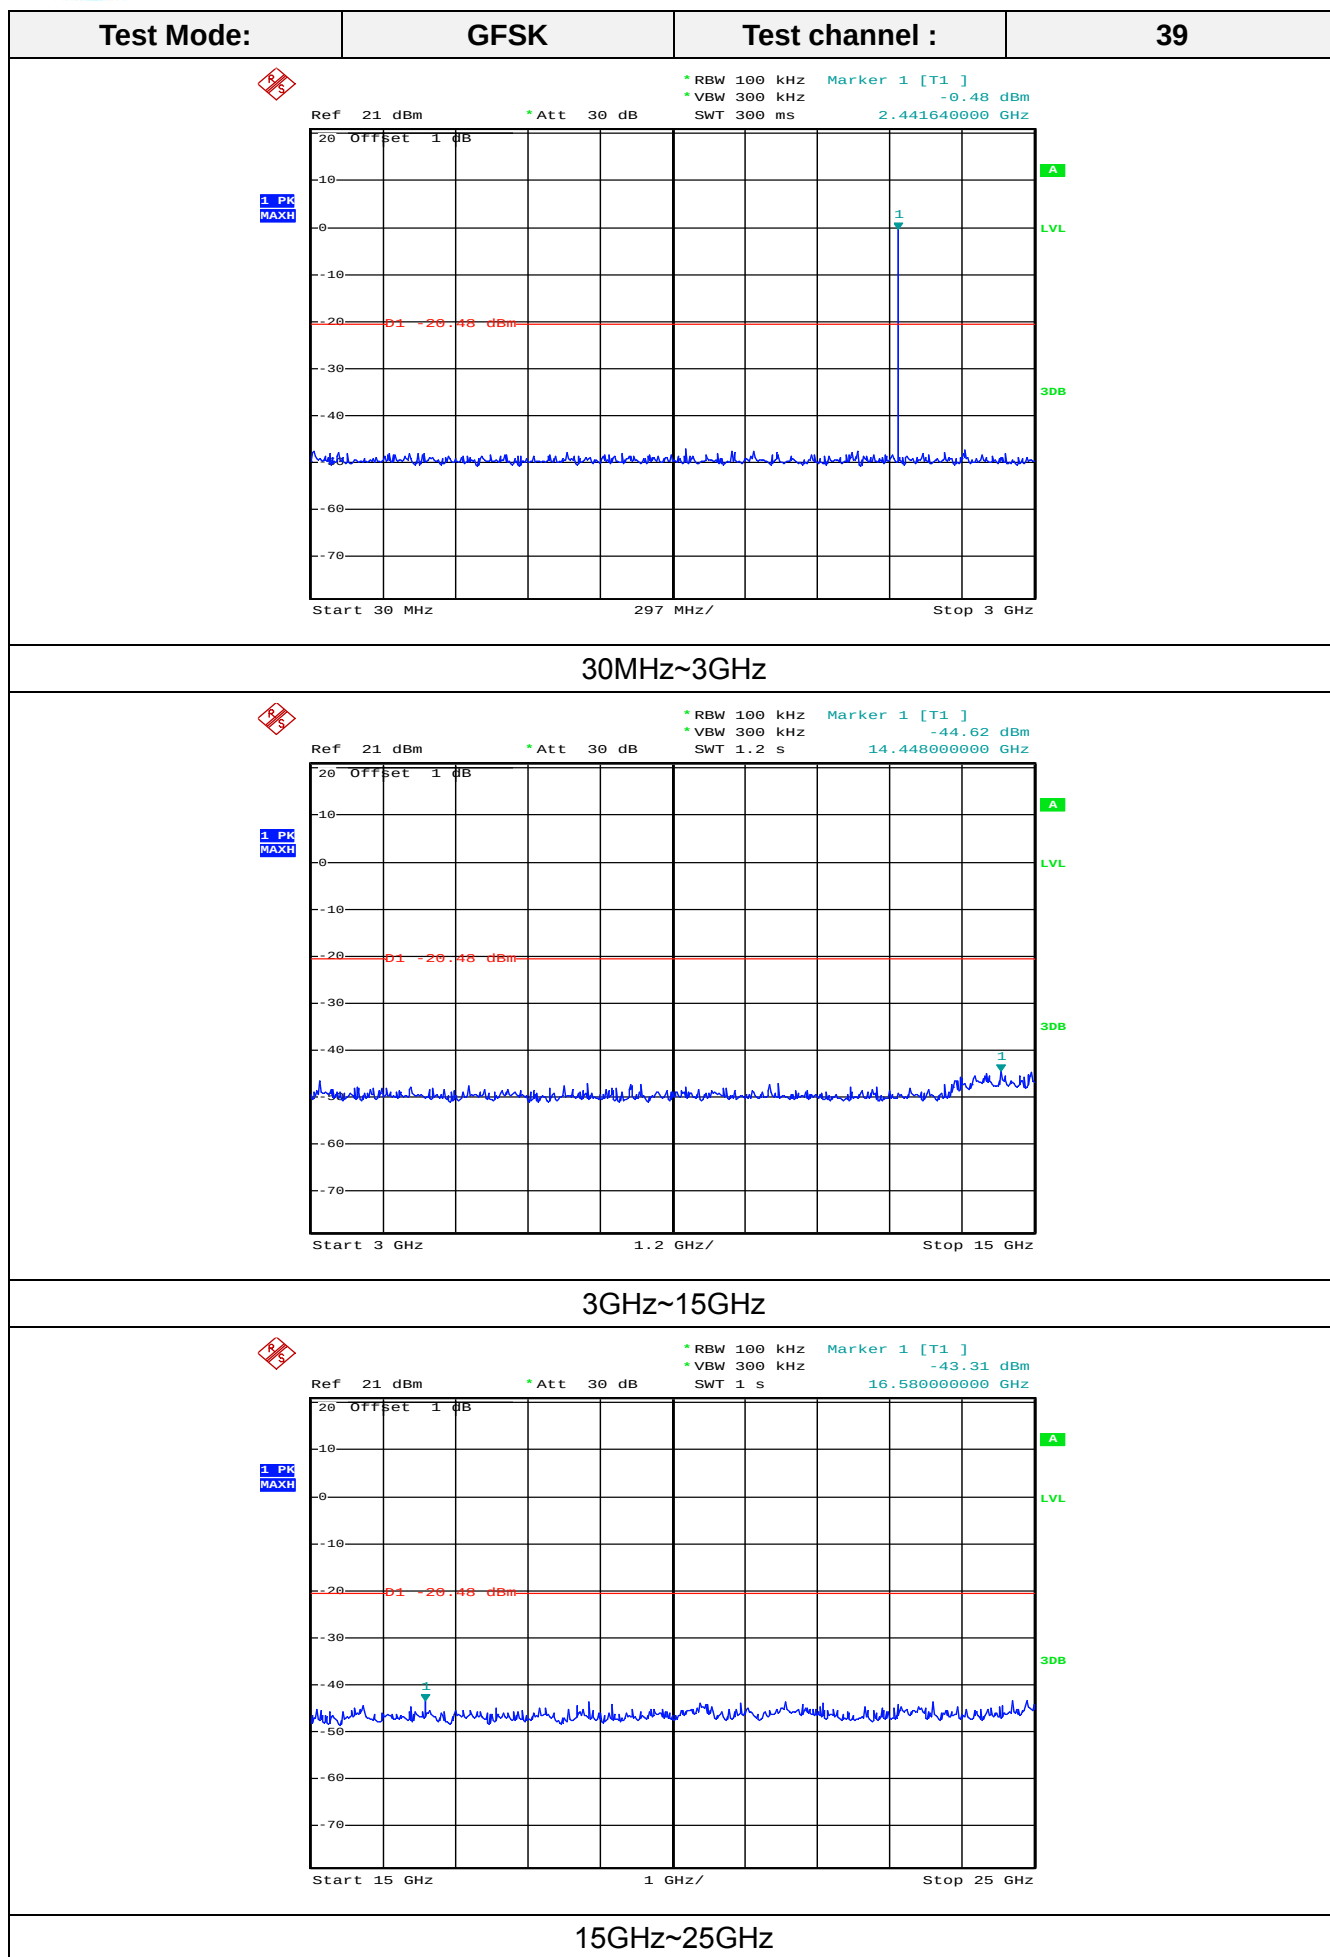

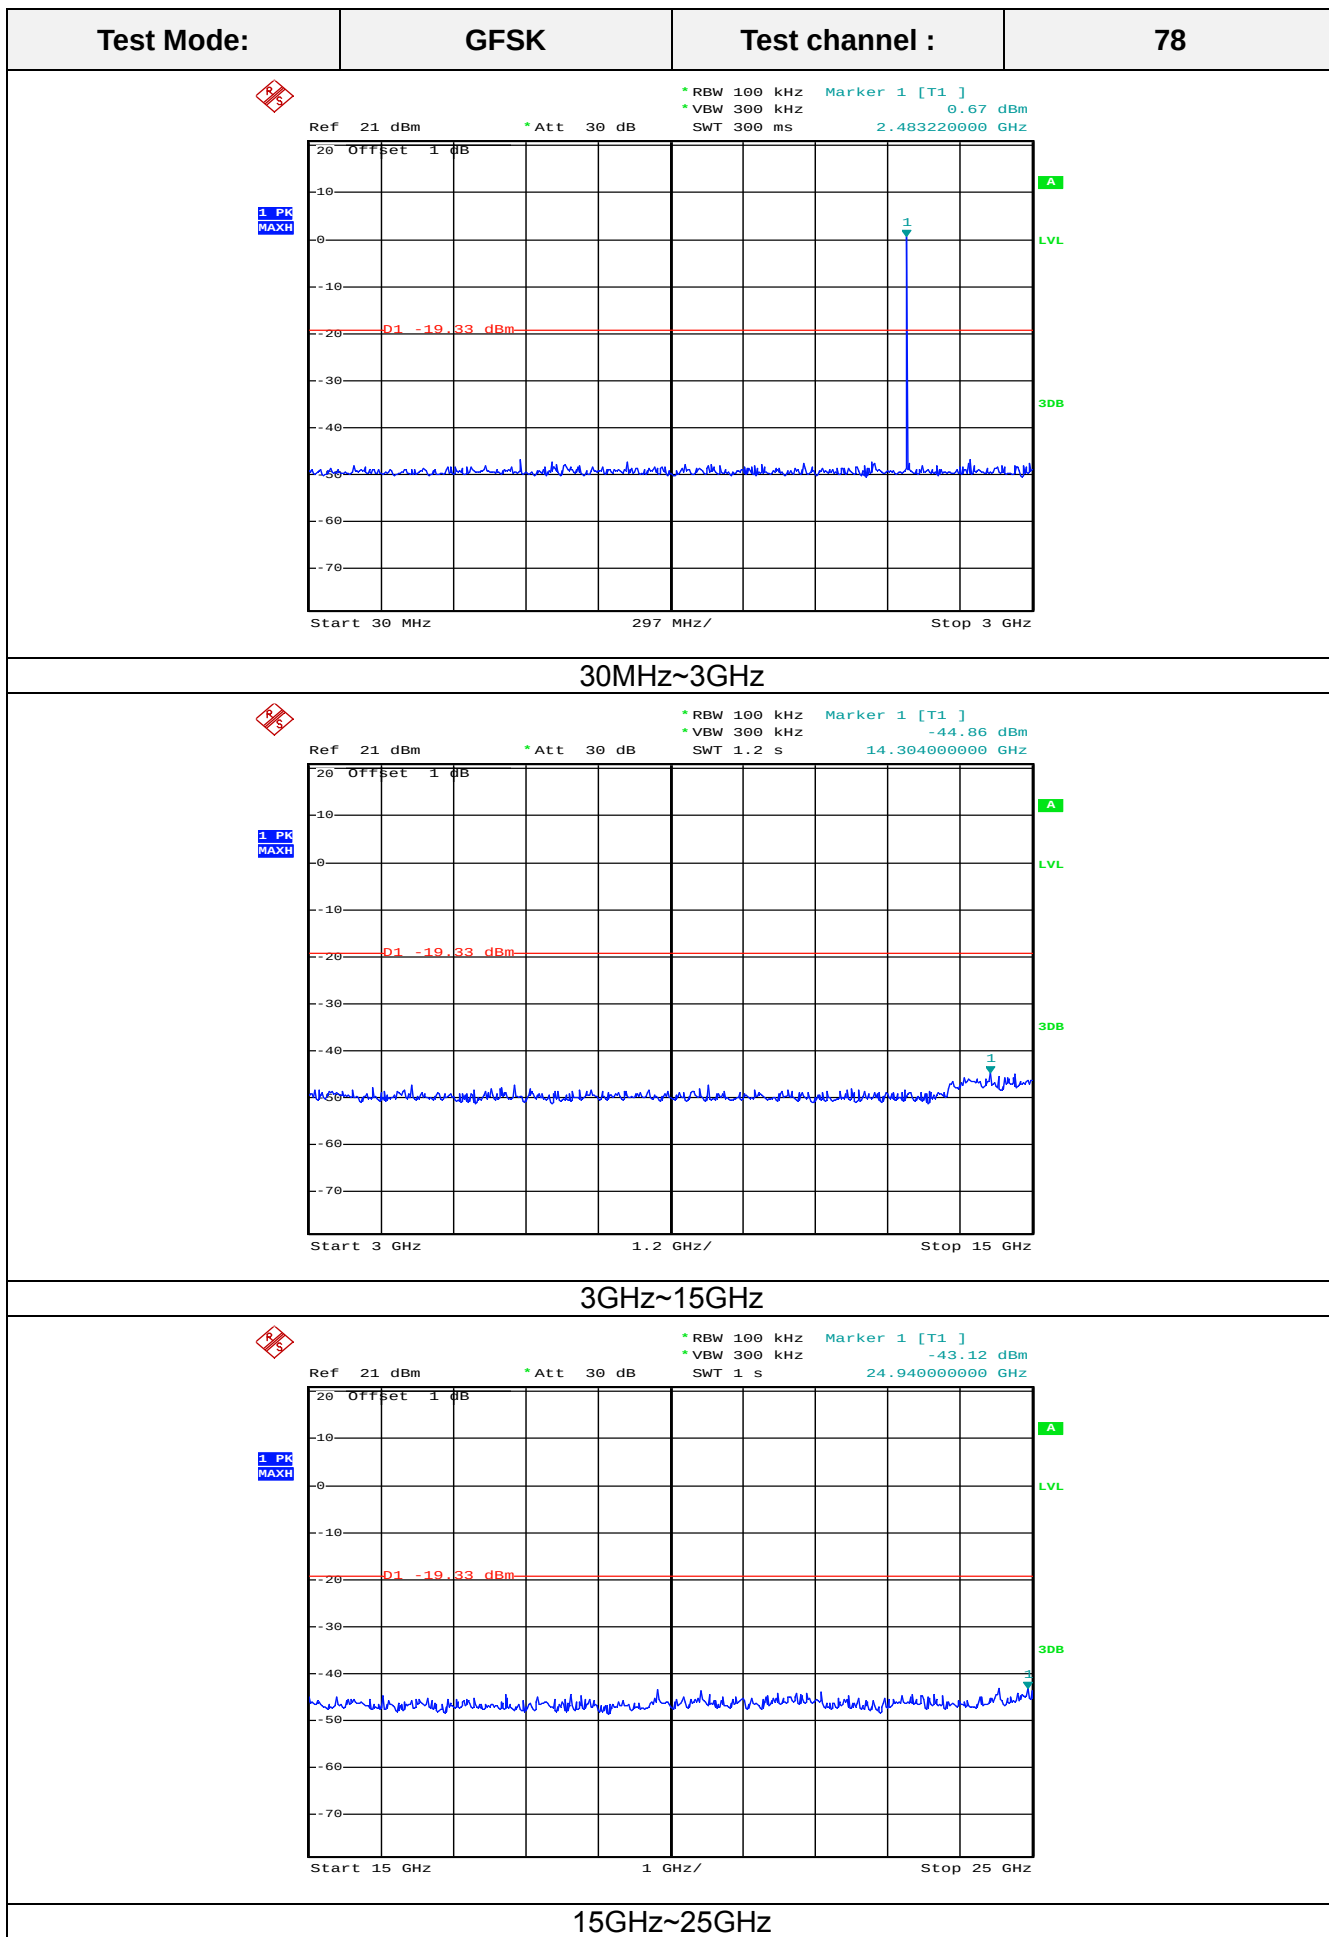

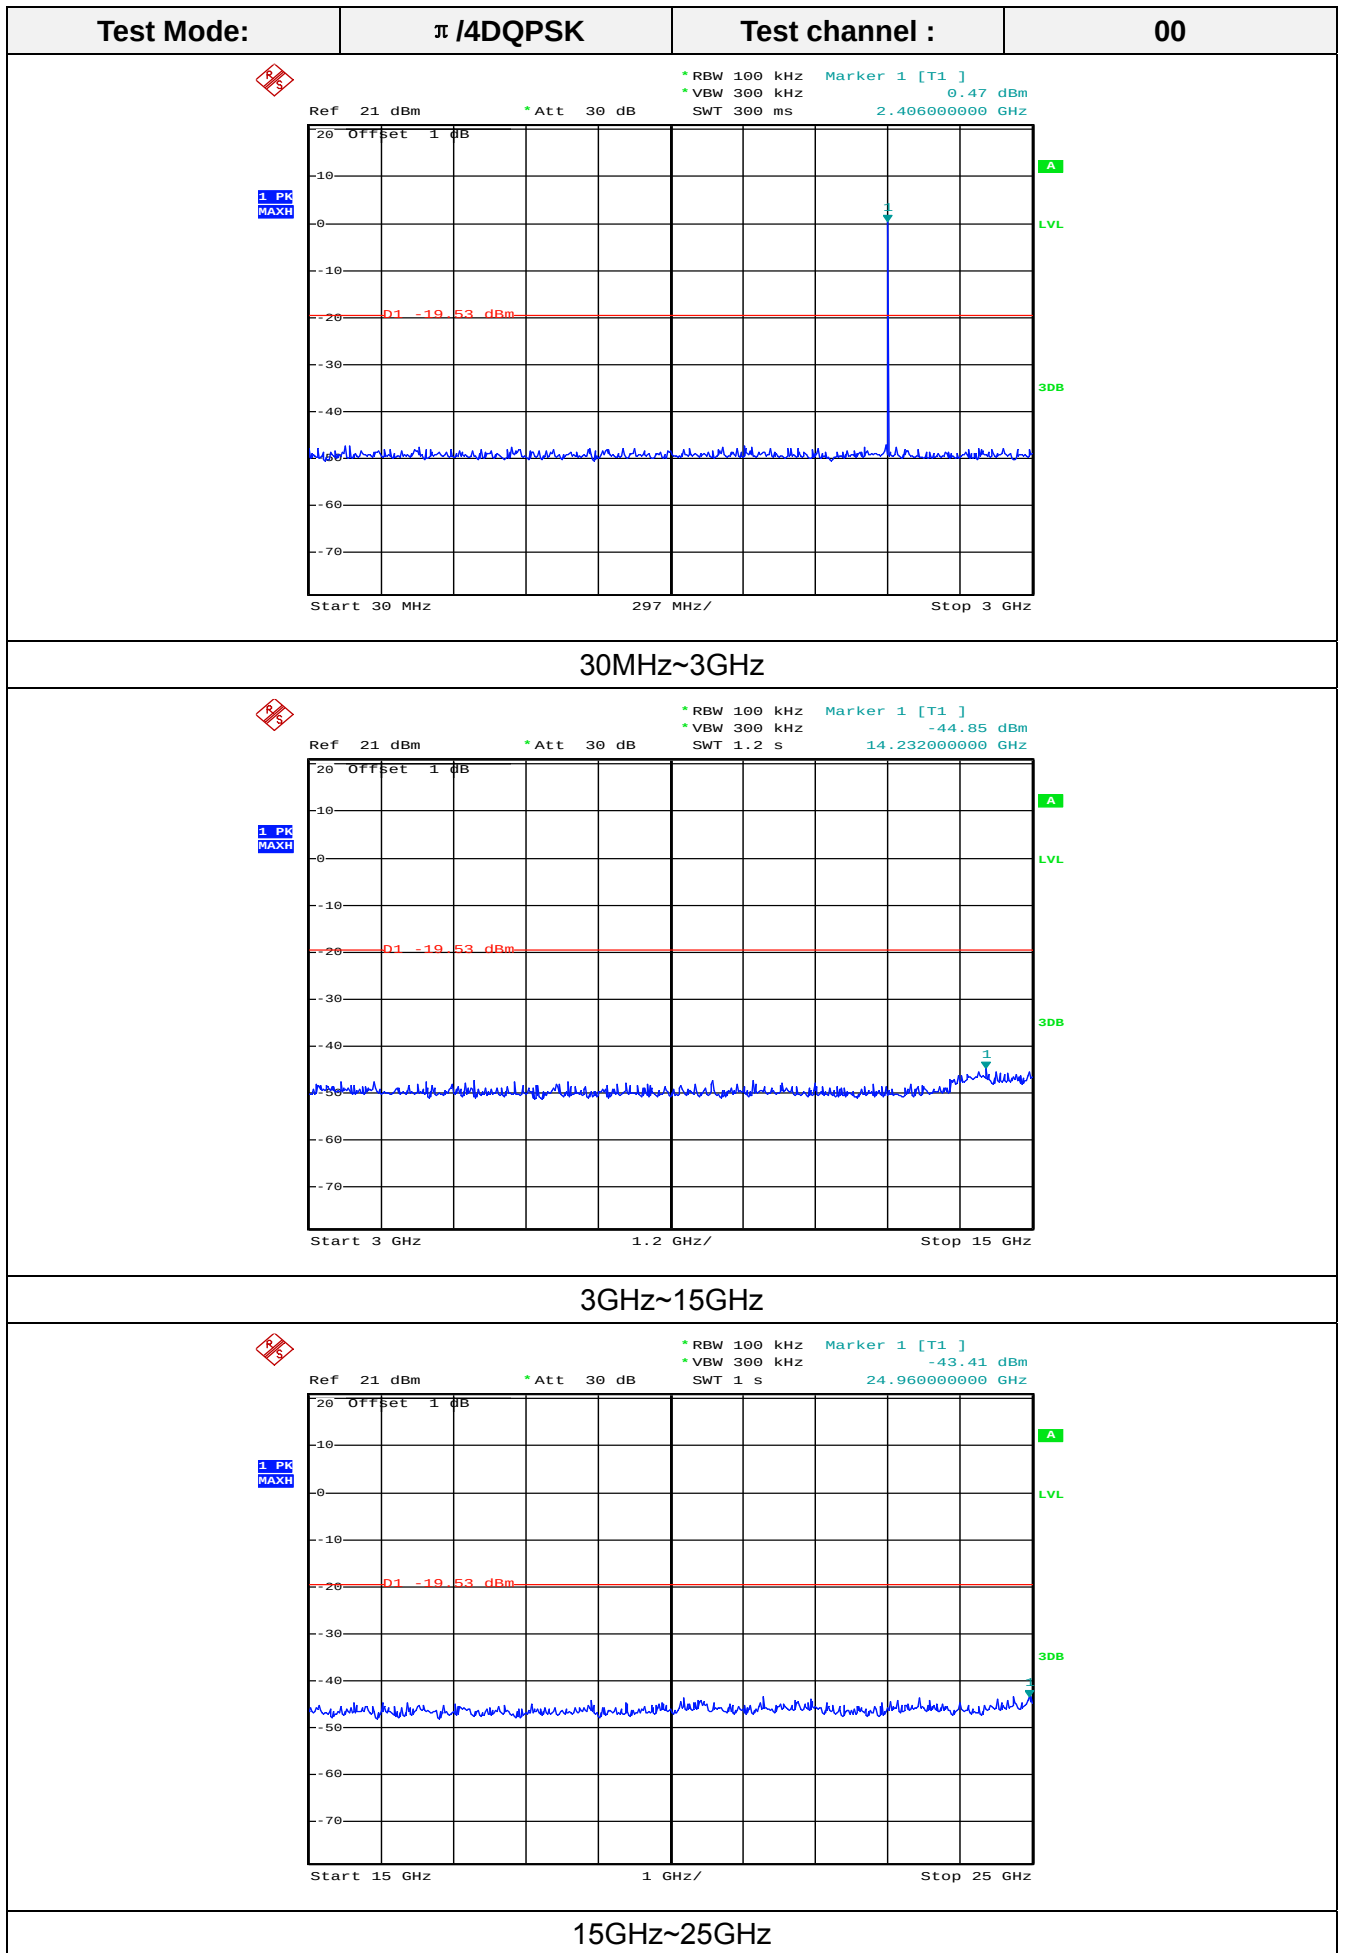




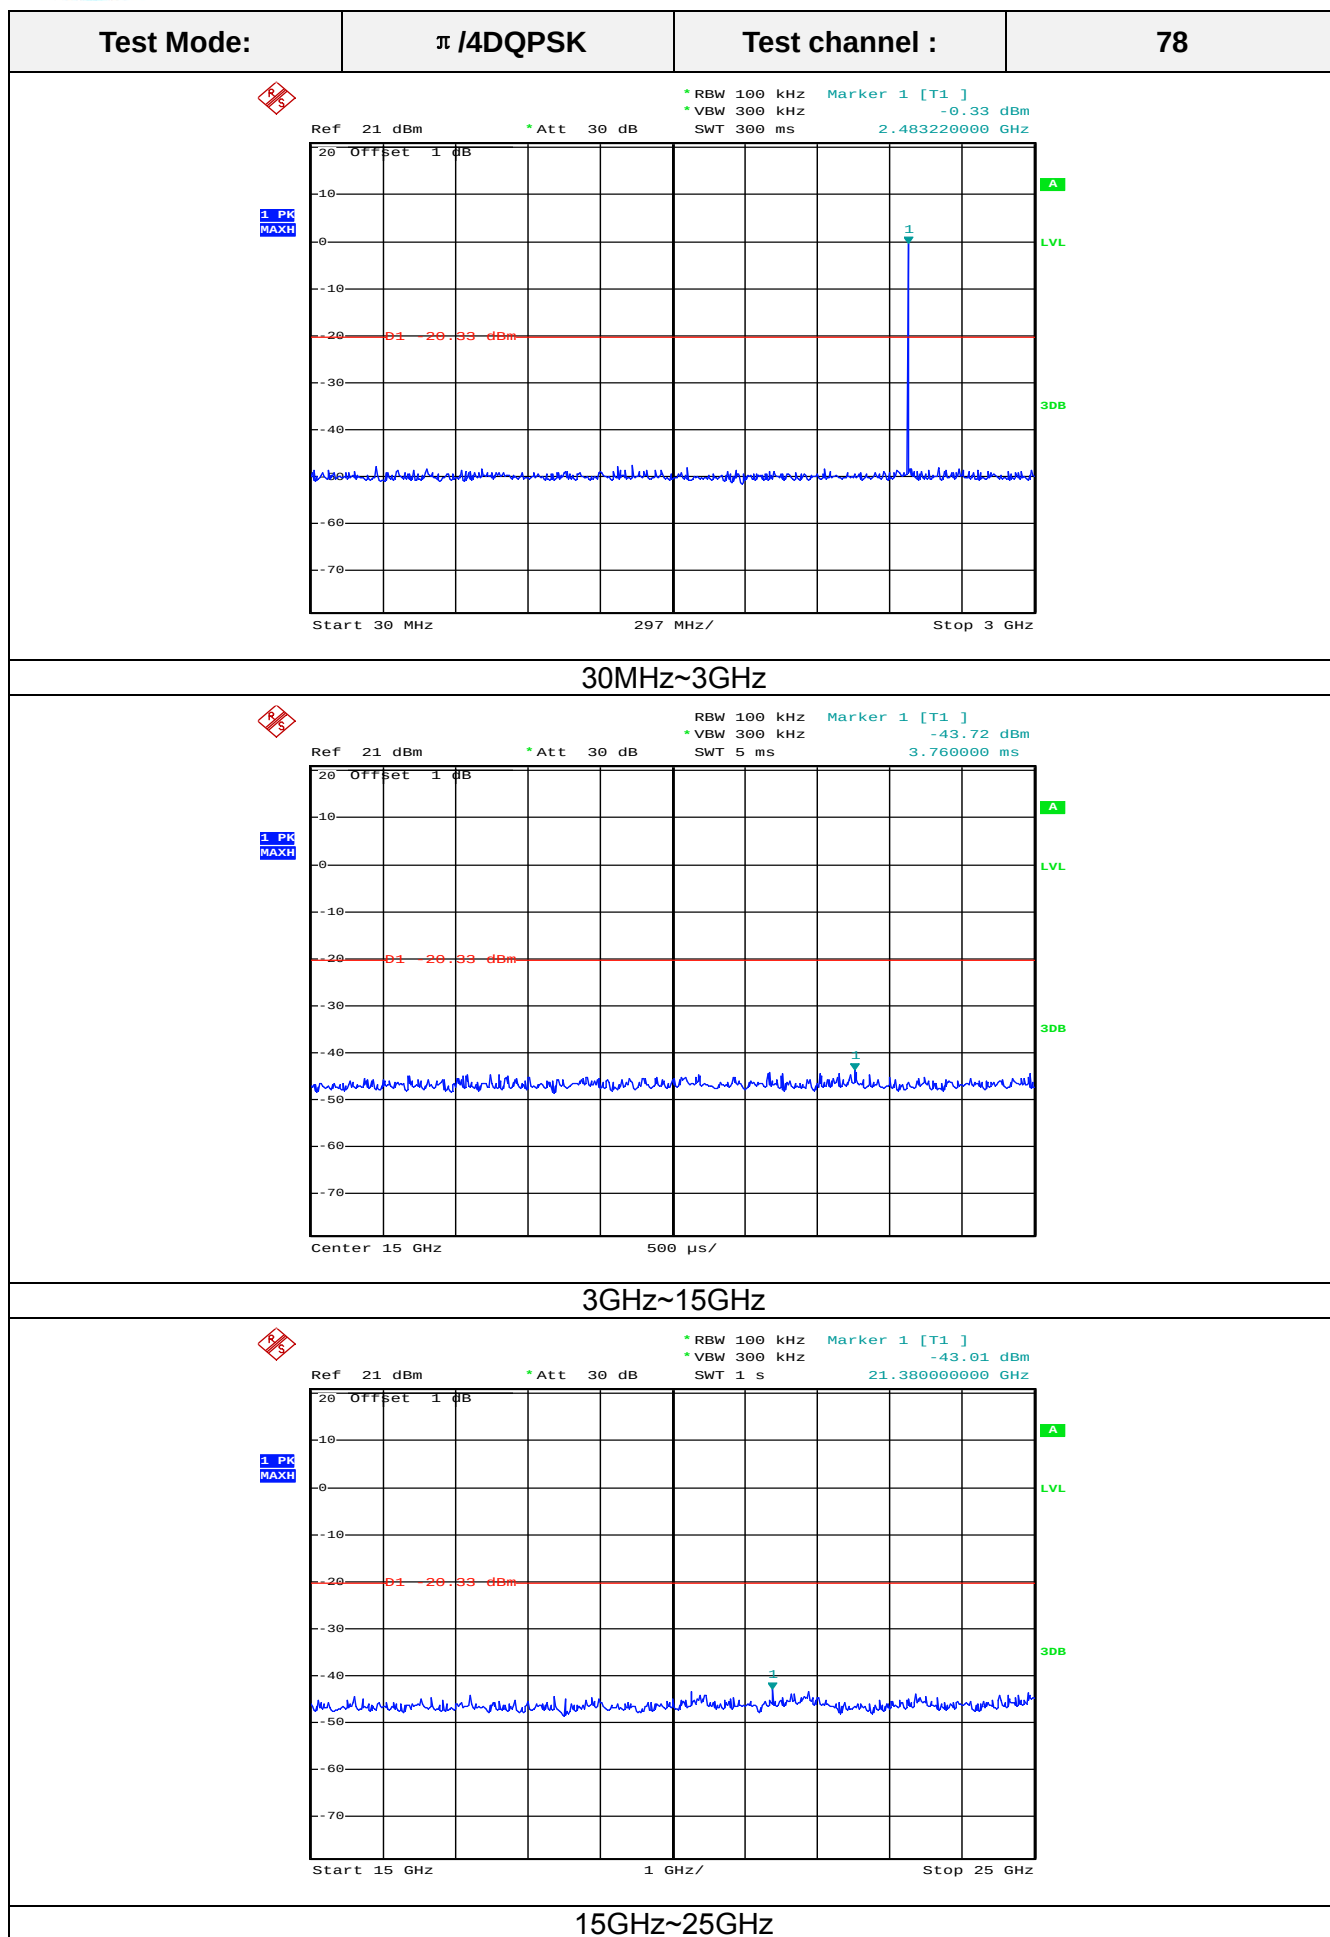







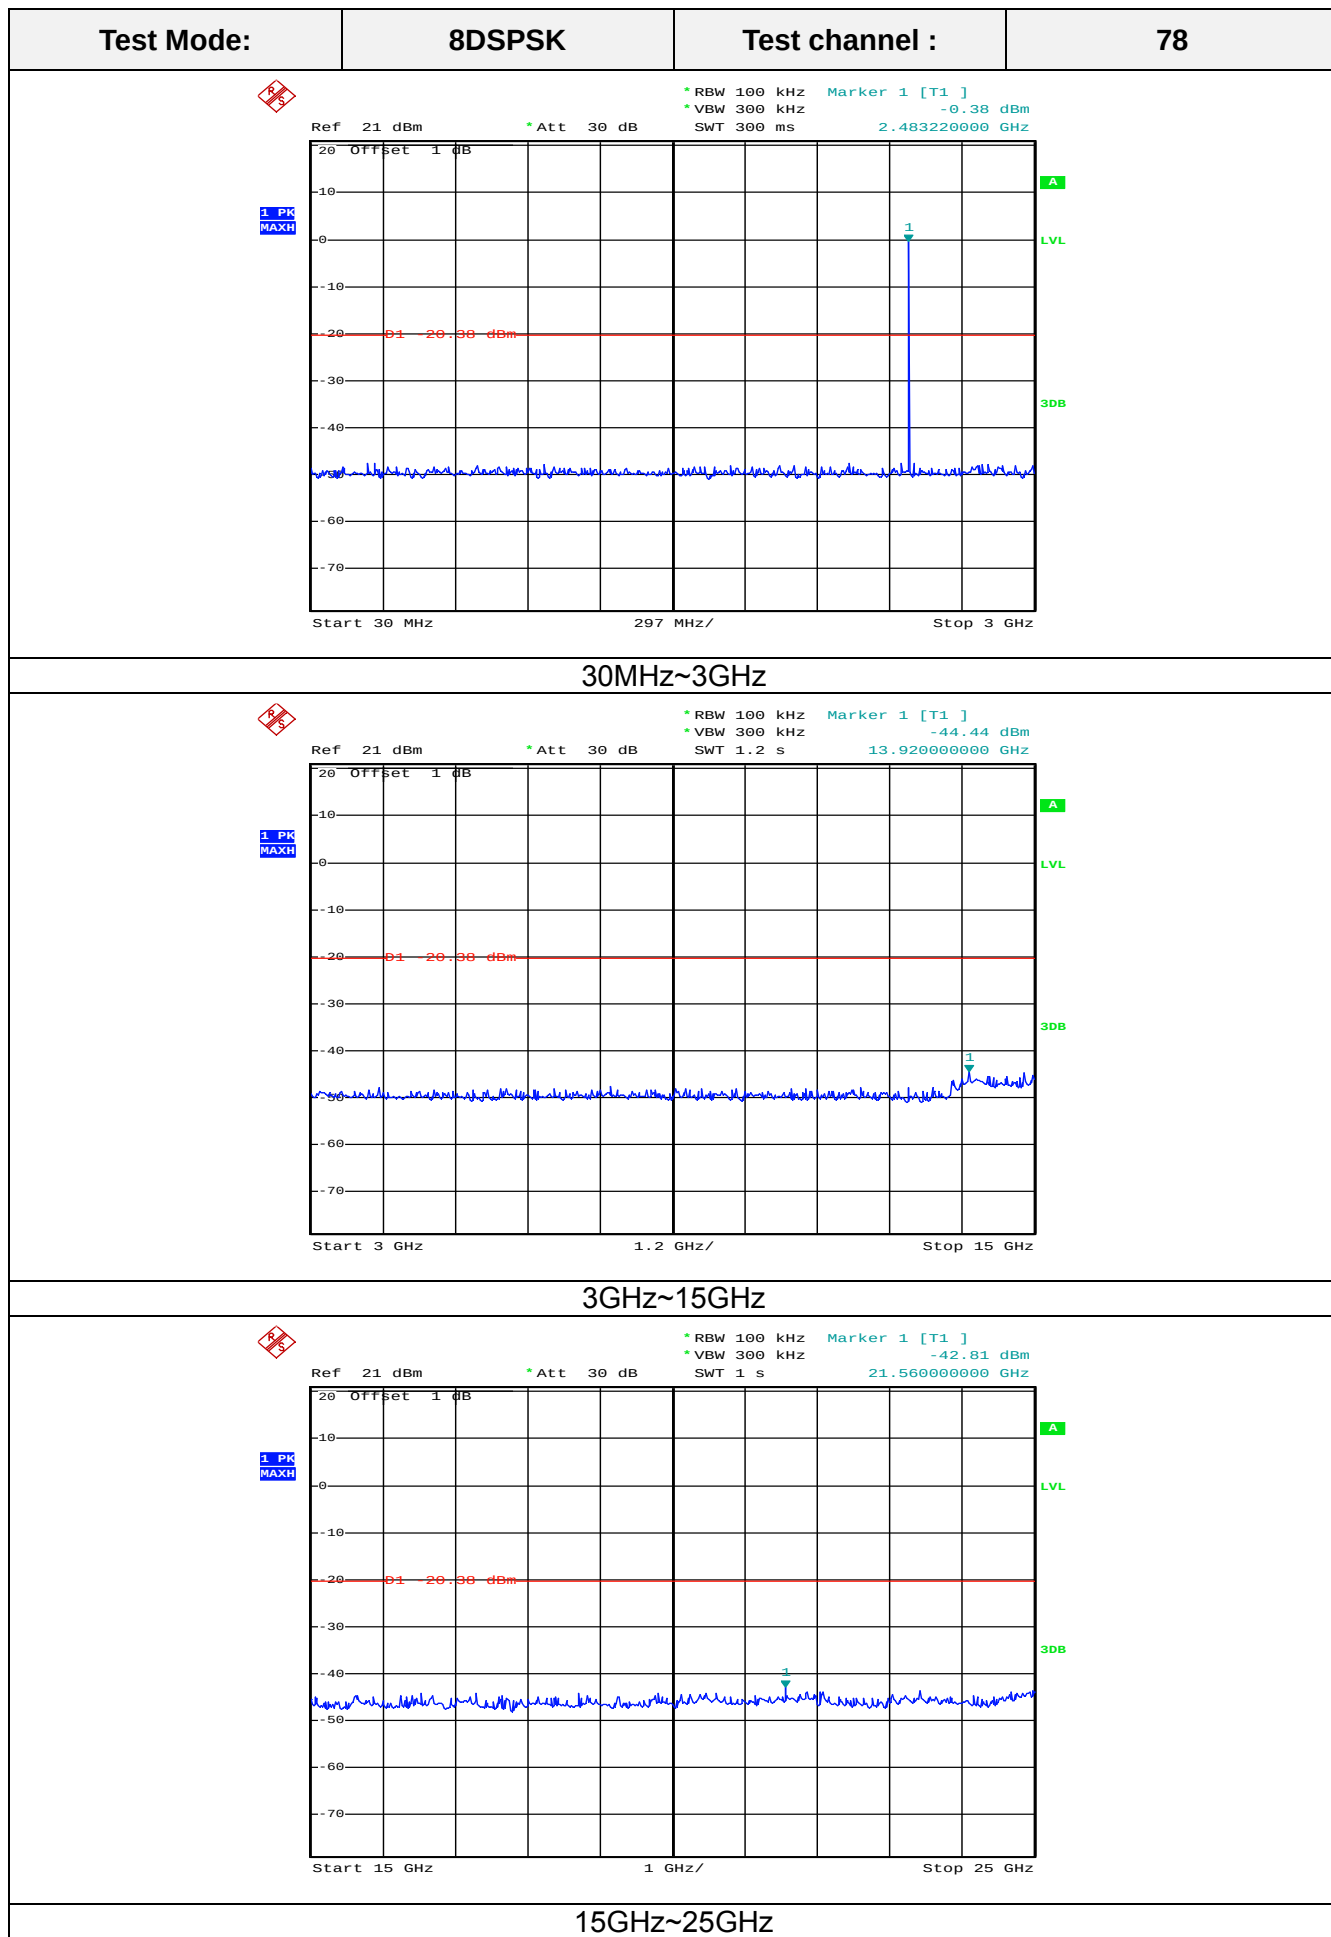

### 3.10. Pseudorandom Frequency Hopping Sequence

#### TEST APPLICABLE


**For 47 CFR Part 15C section 15.247 (a) (1) requirement:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

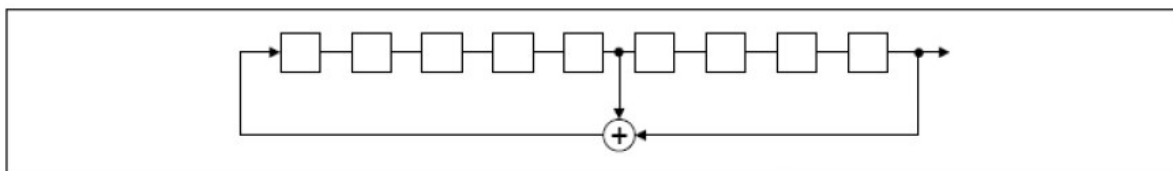

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

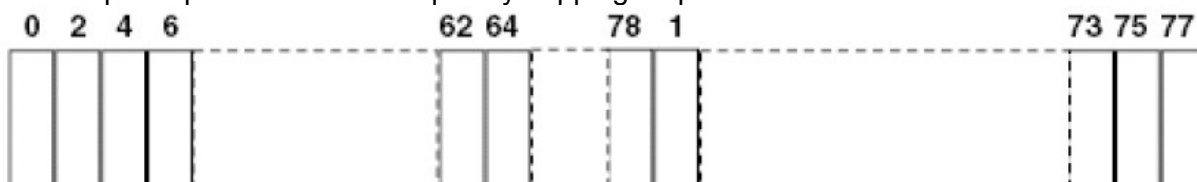

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

### 3.11. Antenna Requirement

#### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### **Refer to statement below for compliance**

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### Antenna Connected Construction

The maximum gain of Bluetooth antenna was 1.60dBi.



## 4. EUT TEST PHOTO

Radiated Emission (30MHz-1GHz)



Radiated Emission (1GHz-25GHz)



Conducted Emission



## 5. PHOTOGRAPHS OF EUT CONSTRUCTIONAL

Please reference to the test report No.: GTI20140490F-1

\*\*\*\*\*THE END\*\*\*\*\*