

RF Exposure Evaluation Report

1. Product Information

FCC ID:	2AQI5-W528
Product Name	2-in-1 Magnetic Wireless Charger
Model Number	W528
Ratings	Input: 5.0V $\Rightarrow$ 3.0A/9.0V $\Rightarrow$ 3.0A Total Output Power: 20.0W Max (iPhone: 7.5W, AirPods: 5.0W)
Modulation Type	ASK
Frequency Range	110.1~148.5KHz
Antenna Type	Coil Antenna
Hardware version	A1
Software version	A1
Accessories	/
Exposure category	General population/uncontrolled environment
EUT Type	Production Unit
Device Type	Mobile Device
Date of Test	July 03, 2024 ~ July 16, 2024
Date of Report	July 18, 2024

Remark:

- P/N code in the below table, for marketing purpose, will be marked on the marking plate

45055	45055P	45055X	45055A	45055B	45055U	45055JP	45055ZD
45056	45056P	45056X	45056A	45056B	45056U	45056JP	45056ZD

2. Evaluation Method

Per KDB 680106 D01 Section 3. RF Exposure Requirements;

- 1) Wireless power transfer devices must comply with RF exposure requirements for all design configurations in which they can operate. At a minimum, RF exposure must be evaluated for the worst-case scenario, typically when the transmitter, while delivering energy to a client device, is operating at maximum output power. RF exposure compliance for equipment authorization must be determined following the guidance of KDB447498, which includes consideration of the different test requirements for *Mobile Device* and *Portable Device* exposure categories, as defined in §§ 2.1091 and 2.1093 of the Rules.
- 2) The RF exposure limits, as set forth in § 1.1310, do not cover the frequency range below 100 kHz for Specific Absorption Rate (SAR) and below 300 kHz for Maximum Permitted Exposure (MPE). In addition, present limitations of RF exposure evaluation systems prevent an accurate evaluation of SAR below 4 MHz. For these reasons, a specific MPE-based RF Exposure compliance procedure for devices operating in the aforementioned low-frequency ranges has been set in place. This procedure is applicable to Equipment Authorization of all RF devices, thus including, but not limited to, Part 18 and WPT devices. Accordingly, for § 2.1091-*Mobile* devices, the MPE limits between 100 kHz to 300 kHz are to be considered the same as those at 300 kHz in Table 1 of § 1.1310, that is, 614 V/m and 1.63 A/m, for the electric field and magnetic




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Figure 1, at least the estimates at 0 cm² and 2 cm are required, while only one point would not be sufficient. In addition, the model needs to be validated through the probe measurements for the two closest points to the device surface, and with 2-cm increments, as indicated in Figure 1. In that example, the same model must also be applied to the 4 cm and 6 cm positions, and then compared with the measured data, for validation purposes. The validation is considered sufficient if a 30% agreement between the model and the (E- and/or H-field) probe measurements is demonstrated. If such a level of agreement cannot be shown, a more accurate model (and/or a smaller probe) shall be used.

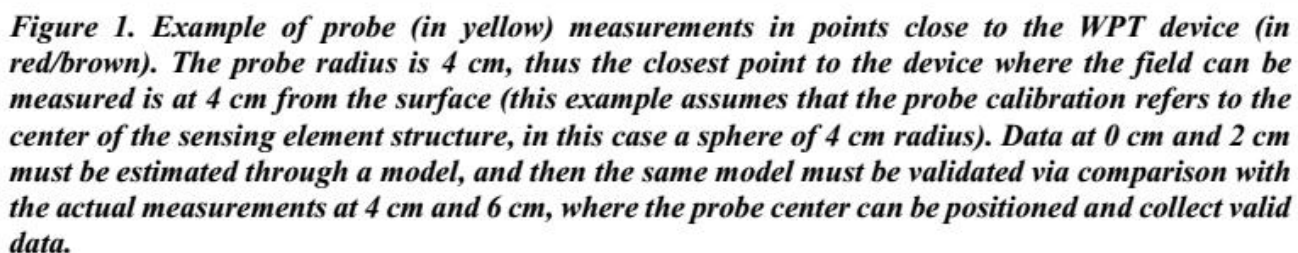

- 4) Part 18 Wireless Power Transfer up to One-Meter Distance. This section applies only to WPT transmitters that, by design, can provide power to a load located at a distance no greater than one meter. This distance shall be measured between the closest points between the transmitter



and the receiver enclosure surfaces. For instance, two coils positioned as in Figure 2-a may be operated and considered under the provisions of this section, because both receivers are within one-meter distance from the transmitter. However, the case in Figure 2-b cannot be considered in the same way, and it is treated according to the prescription of Section 5.3.

For WPT designs with more than one radiating structure the distance to the load shall be considered as in Figure 3, thus measured between the receiver and the closest transmitting structure.

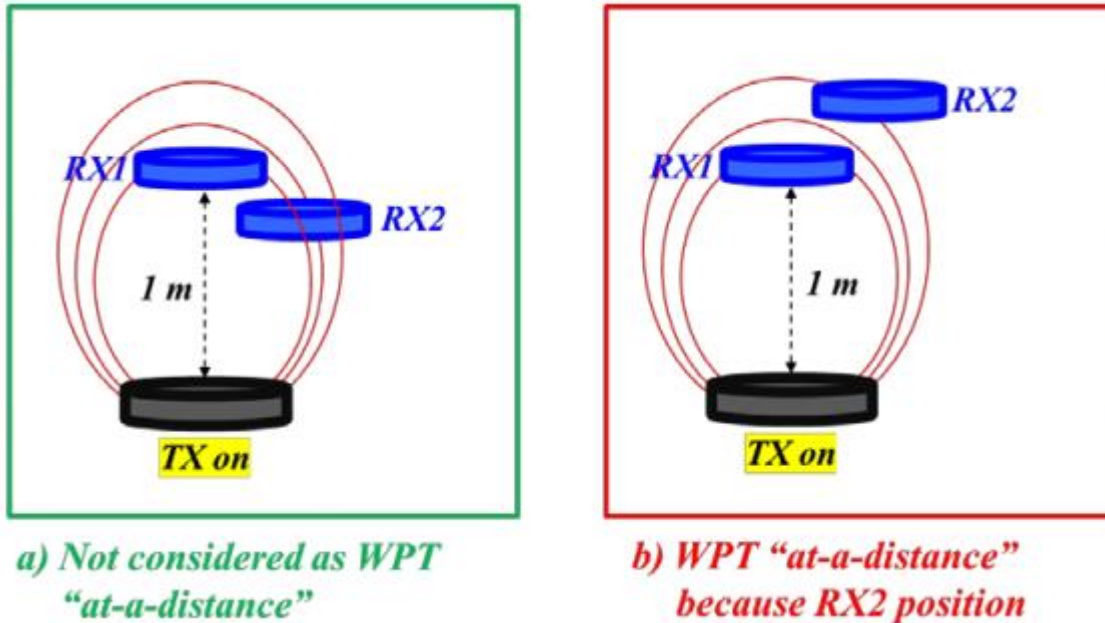


Figure 2-a) For multiple-receiver systems (here shown with two receivers, indicated with RX1 and RX2) the one-meter distance limit must apply for all the receivers that are engaged in the charging process. b) The WPT system is considered "at-a-distance" because it can function when the RX2 is further away than one meter from the transmitter.

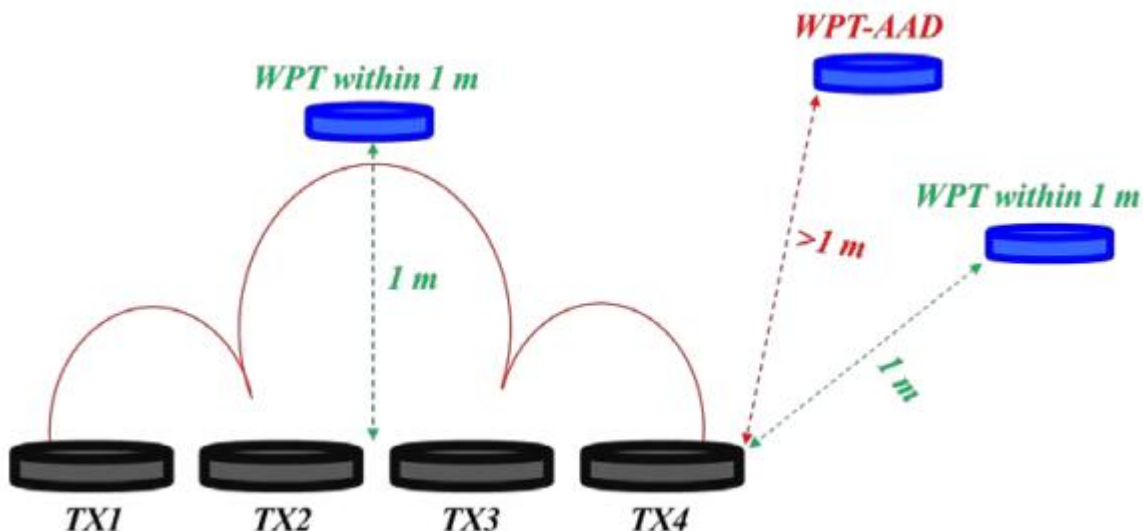


Figure 3. For multiple-coil transmitter systems, the one-meter distance limit is measured from the closest coil edge. A WPT within one meter operates with loads configured as those labeled in green font, if a load can be powered beyond one meter (in red), then it shall be considered "at-a-distance"



There might be situations where the WPT RF emissions are limited enough that even operations in a “crowded” environment, where many similar WPT devices are present, do not pose significant EMC and RF exposure concerns. In this scenario, and for devices operating within a one-meter distance from the receiver, as defined above, a manufacturer will not have to submit an “Equipment Compliance Review” KDB, and receive FCC concurrence before proceeding with equipment authorization. This exception to the requirement of submitting the ECR to obtain FCC concurrence only applies when all the following criteria (1) through (6) are met:

- (1) The power transfer frequency is below 1 MHz.
- (2) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.
- (3) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)
- (4) Only § 2.1091- Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093 – Portable exposure conditions).
- (5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.
- 5) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested

3. Evaluation Limit

3.1 Refer evaluation method

[ANSI C95.1–1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

[FCC KDB publication 680106 D01 RF Exposure Wireless Charging Apps v03](#): RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

[FCC CFR 47 part1 1.1310](#): Radiofrequency radiation exposure limits.

[FCC CFR 47 part2 2.1091](#): Radiofrequency radiation exposure evaluation: mobile devices

[FCC CFR 47 part 18.107](#): Industrial, Scientific, and Medical Equipment



3.2 Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500	/	/	f/300	6
1,500-100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30

F=frequency in MHz

*=Plane-wave equivalent power density


According to FCC KDB 680106 D01 Section 3. RF Exposure Requirements clause 3 the Emission-Limits in the frequency range from 100 KHz to 300 KHz should be assessed versus the limits at 300 KHz in Table 1 of CFR 47 – Section1.310 as following (measured distance shall be 15cm from the center of the probe to the edge of the device):

	E-Field	*/*	B-Field
Frequency	V/m	A/m	uT
0.3 MHz – 3.0 MHz	614	1.613	2.0
3.0 MHz – 30 MHz	824/f (=27.5 _{30MHz})	2.19/f (=0.073 _{30MHz})	--

A KDB inquire was required to determine/confirm the applicable limits below 100 KHz.



4. Test Setup Diagram

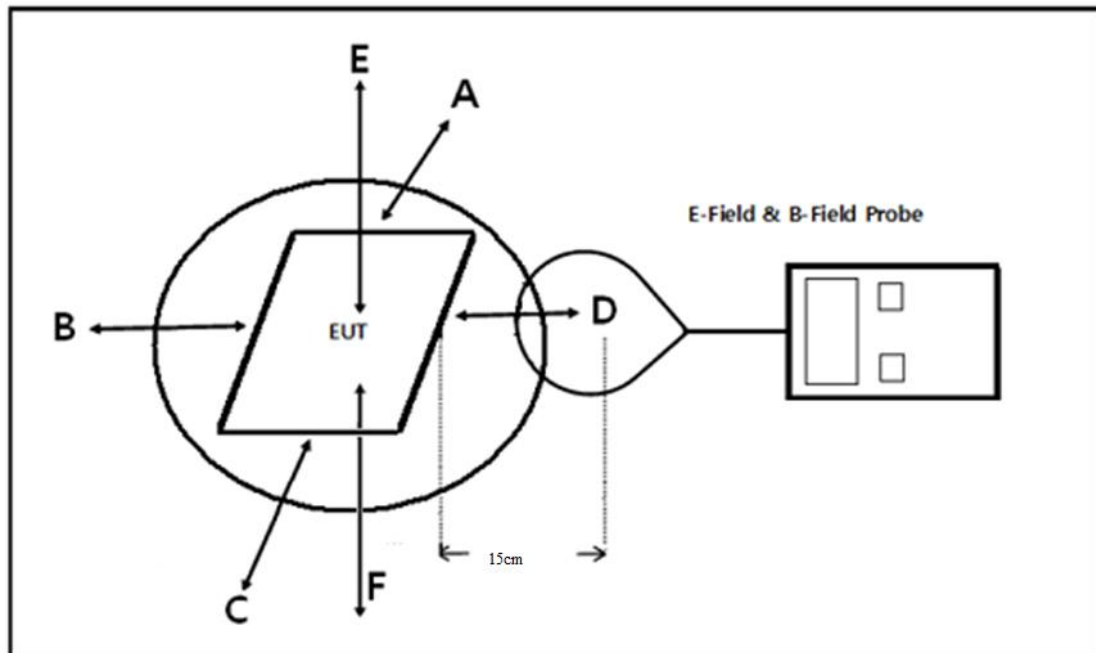

5. Test Equipment

Equipment	Manufacturer	Model	Serial no.	Calibrated date	Calibrated Due
Exposure Level Tester	Narda	ELT-400	N-0713	2023-10-28	2024-10-27
B-Field Probe	Narda	ELT-400	M-1154	2023-10-28	2024-10-27
Electric field probe	Narda	EP601	611WX70332	N/A	N/A

6. Measurement Procedure

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- The measurement probe was placed at test distance (15cm and 20cm) which is between the edges of the charger and the geometric center of probe.
- The turn table was rotated 360d degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- The EUT were measured according to the dictates of KDB 680106D01v03.



7. Equipment Approval Considerations

The EUT does comply with item 5.2 of KDB 680106 D01v04 as follows table;

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operates in the frequency range 110.1 KHz - 148.5KHz
The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.	Yes	For iPhoneThe maximum output power of the primary coil is 7.5W. For AirPodsThe maximum output power of the primary coil is 5W.
A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)	Yes	Client device is placed directly in contact with the transmitter.
Only § 2.1091- Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).	Yes	Mobile exposure conditions only
The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.	Yes	The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows	Yes	Only two radiating structure and tested at maximum Output Power



one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested

There might be situations where the WPT RF emissions are limited enough that even operations in a “crowded” environment, where many similar WPT devices are present, do not pose significant EMC and RF exposure concerns. In this scenario, and for devices operating within a one-meter distance from the receiver, as defined above, a manufacturer will not have to submit an “Equipment Compliance Review” KDB, and receive FCC concurrence before proceeding with equipment authorization. This exception to the requirement of submitting the ECR to obtain FCC concurrence only applies when all the following criteria (1) through (6) are met.

8. E and H field Strength

Test Modes		
Mode 1	AC/DC Adapter (9V/3A) + EUT + Phone + TWS Earphone (Battery Status: <1%)	Record
Mode 2	AC/DC Adapter (9V/3A) + EUT + Phone + TWS Earphone (Battery Status: <50%)	Record
Mode 3	AC/DC Adapter (9V/3A) + EUT + Phone + TWS Earphone (Battery Status: 100%)	Record
Mode 4	AC/DC Adapter (5V/3A) + EUT + Phone + TWS Earphone (Battery Status: <1%)	Pre-tested
Mode 5	AC/DC Adapter (5V/3A) + EUT + Phone + TWS Earphone (Battery Status: <50%)	Pre-tested
Mode 6	AC/DC Adapter (5V/3A) + EUT + Phone + TWS Earphone (Battery Status: 100%)	Pre-tested
Mode 7	AC/DC Adapter (5V/3A) + EUT + Phone (Battery Status: <1%)	Pre-tested
Mode 8	AC/DC Adapter (5V/3A) + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 9	AC/DC Adapter (5V/3A) + EUT + Phone (Battery Status: 100%)	Pre-tested
Mode 10	AC/DC Adapter (5V/3A) + TWS Earphone (Battery Status: <1%)	Pre-tested
Mode 11	AC/DC Adapter (5V/3A) + TWS Earphone (Battery Status: <50%)	Pre-tested
Mode 12	AC/DC Adapter (5V/3A) + TWS Earphone (Battery Status: 100%)	Pre-tested
Mode 13	AC/DC Adapter (9V/3A) + EUT + Phone (Battery Status: <1%)	Pre-tested
Mode 14	AC/DC Adapter (9V/3A) + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 15	AC/DC Adapter (9V/3A) + EUT + Phone (Battery Status: 100%)	Pre-tested
Mode 16	AC/DC Adapter (9V/3A) + EUT + TWS Earphone (Battery Status: <1%)	Pre-tested
Mode 17	AC/DC Adapter (9V/3A) + EUT + TWS Earphone (Battery Status: <50%)	Pre-tested
Mode 18	AC/DC Adapter (9V/3A) + EUT + TWS Earphone (Battery Status: 100%)	Pre-tested
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		



For iPhone

Field Strength at 15 cm from the edges surrounding the EUT and 15cm from the top surface of the EUT

Load mode	Frequency Range (kHz)	Field Strength	Measured Field Strength Values					50% Limits	Limits
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
Mode 1	110.1~148.5	uT	0.130	0.137	0.138	0.134	0.148	--	--
Mode 1	110.1~148.5	A/m	0.104	0.110	0.110	0.107	0.118	0.815	1.63
Mode 1	110.1~148.5	V/m	39.027	41.254	41.430	40.299	44.503	307.0	614.0
Mode 2	110.1~148.5	uT	0.127	0.136	0.137	0.132	0.145	--	--
Mode 2	110.1~148.5	A/m	0.101	0.109	0.110	0.105	0.116	0.815	1.63
Mode 2	110.1~148.5	V/m	38.097	41.035	41.239	39.541	43.451	307.0	614.0
Mode 3	110.1~148.5	uT	0.120	0.134	0.135	0.131	0.140	--	--
Mode 3	110.1~148.5	A/m	0.096	0.107	0.108	0.105	0.112	0.815	1.63
Mode 3	110.1~148.5	V/m	35.969	40.387	40.733	39.280	42.180	307.0	614.0

For TWS Earphone

Load mode	Frequency Range (kHz)	Field Strength	Measured Field Strength Values					50% Limits	Limits
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E		
Mode 1	110.1~148.5	uT	0.125	0.139	0.142	0.135	0.149	--	--
Mode 1	110.1~148.5	A/m	0.100	0.112	0.114	0.108	0.119	0.815	1.63
Mode 1	110.1~148.5	V/m	37.522	41.935	42.824	40.499	44.759	307	614
Mode 2	110.1~148.5	uT	0.122	0.138	0.136	0.125	0.147	--	--
Mode 2	110.1~148.5	A/m	0.098	0.111	0.109	0.100	0.118	0.815	1.63
Mode 2	110.1~148.5	V/m	36.817	41.603	40.833	37.564	44.202	307	614
Mode 3	110.1~148.5	uT	0.121	0.132	0.136	0.125	0.147	--	--
Mode 3	110.1~148.5	A/m	0.097	0.105	0.109	0.100	0.117	0.815	1.63
Mode 3	110.1~148.5	V/m	36.398	39.587	40.825	37.706	44.120	307	614



For iPhone

Field Strength at 15 cm from the edges surrounding the EUT and 15cm from the top surface of the EUT

Load mode	Frequency Range (kHz)	Field Strength	Measured Field Strength Values	50% Limits	Limits
			Test Position E		
Mode 1	110.1~148.5	uT	0.147	--	--
Mode 1	110.1~148.5	A/m	0.117	0.815	1.63
Mode 1	110.1~148.5	V/m	44.051	307	614
Mode 2	110.1~148.5	uT	0.145	--	--
Mode 2	110.1~148.5	A/m	0.116	0.815	1.63
Mode 2	110.1~148.5	V/m	43.700	307	614
Mode 3	110.1~148.5	uT	0.139	--	--
Mode 3	110.1~148.5	A/m	0.111	0.815	1.63
Mode 3	110.1~148.5	V/m	41.889	307	614

For TWS Earphone

Load mode	Frequency Range (kHz)	Field Strength	Measured Field Strength Values	50% Limits	Limits
			Test Position E		
Mode 1	110.1~148.5	uT	0.146	--	--
Mode 1	110.1~148.5	A/m	0.117	0.815	1.63
Mode 1	110.1~148.5	V/m	43.895	307	614
Mode 2	110.1~148.5	uT	0.142	--	--
Mode 2	110.1~148.5	A/m	0.114	0.815	1.63
Mode 2	110.1~148.5	V/m	42.758	307	614
Mode 3	110.1~148.5	uT	0.138	--	--
Mode 3	110.1~148.5	A/m	0.110	0.815	1.63
Mode 3	110.1~148.5	V/m	41.526	307	614


Note: $V/m = 10(((20 \lg(A/m \cdot 10^6) + 51.5) - 120) / 20)$

Note: $A/m = uT / 1.25$




9. Test Setup Photos

9.1. Test Position A - Exposure photo from side edge surface-Rear(15cm)

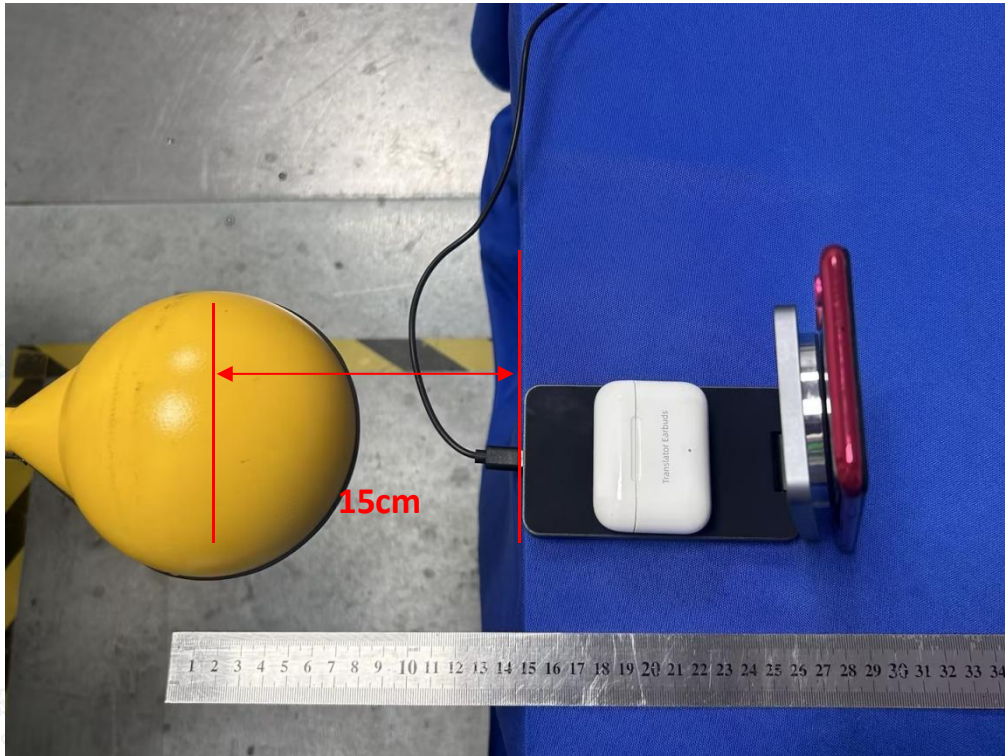

(TM1)


9.2. Test Position B - Exposure photo from side edge surface-Left(15cm)

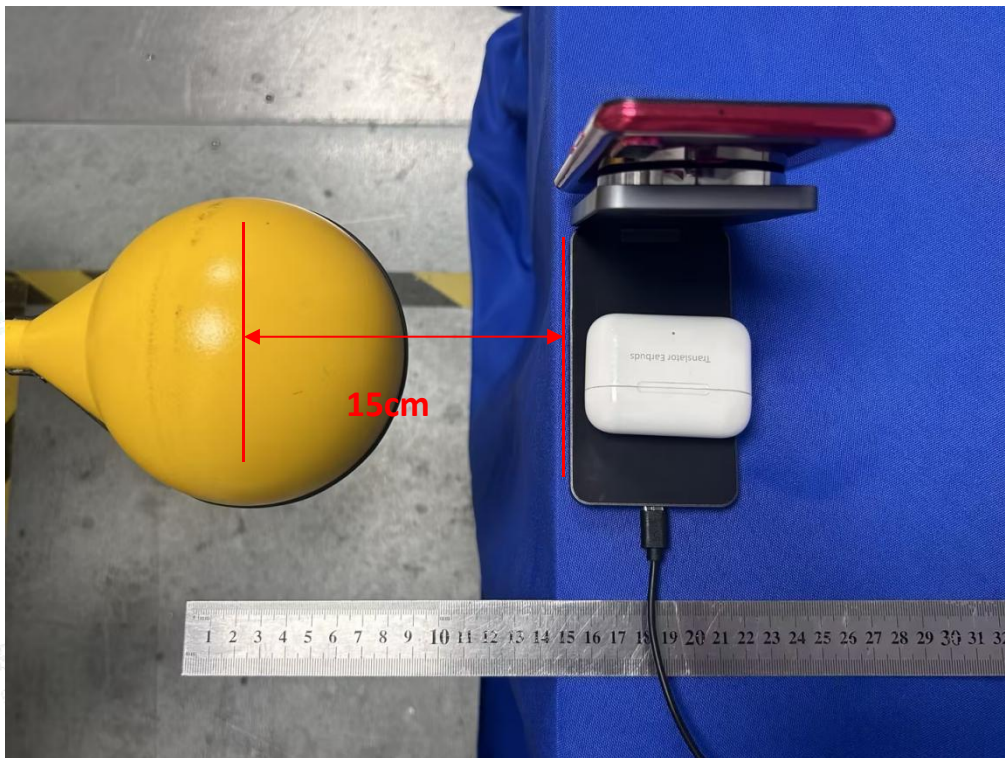

(TM1)




9.3. Test Position C - Exposure photo from side edge surface-Front

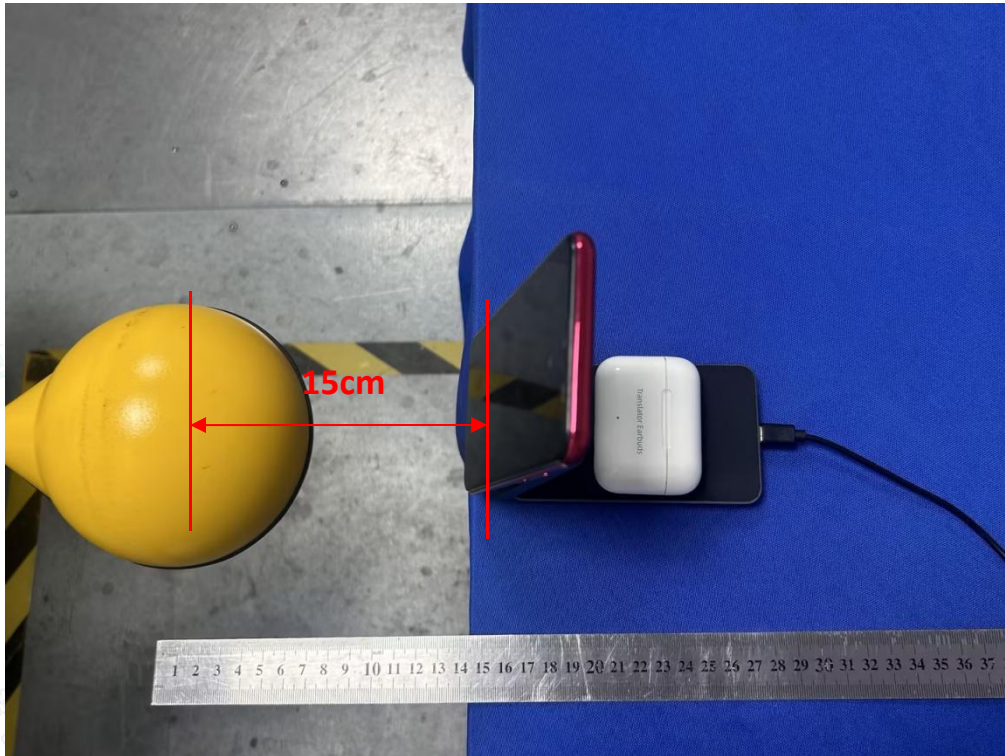

(TM1)


9.4. Test Position D - Exposure photo from side edge surface-Right

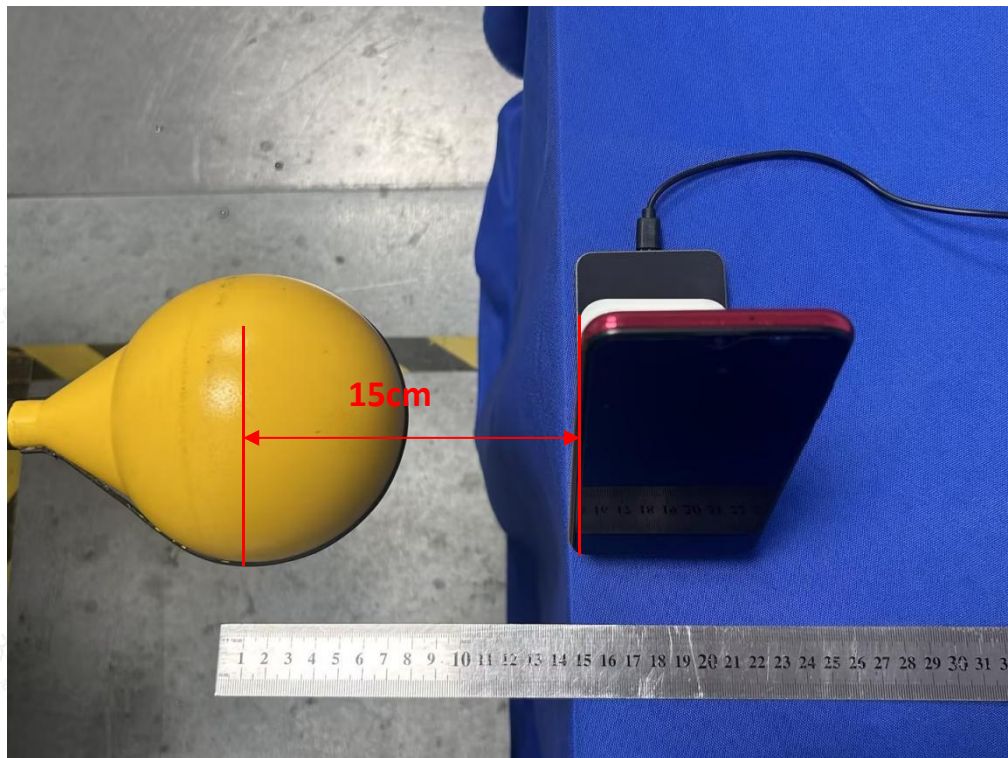

(TM1)




9.5. Test Position E - Exposure photo from top surface (20cm)

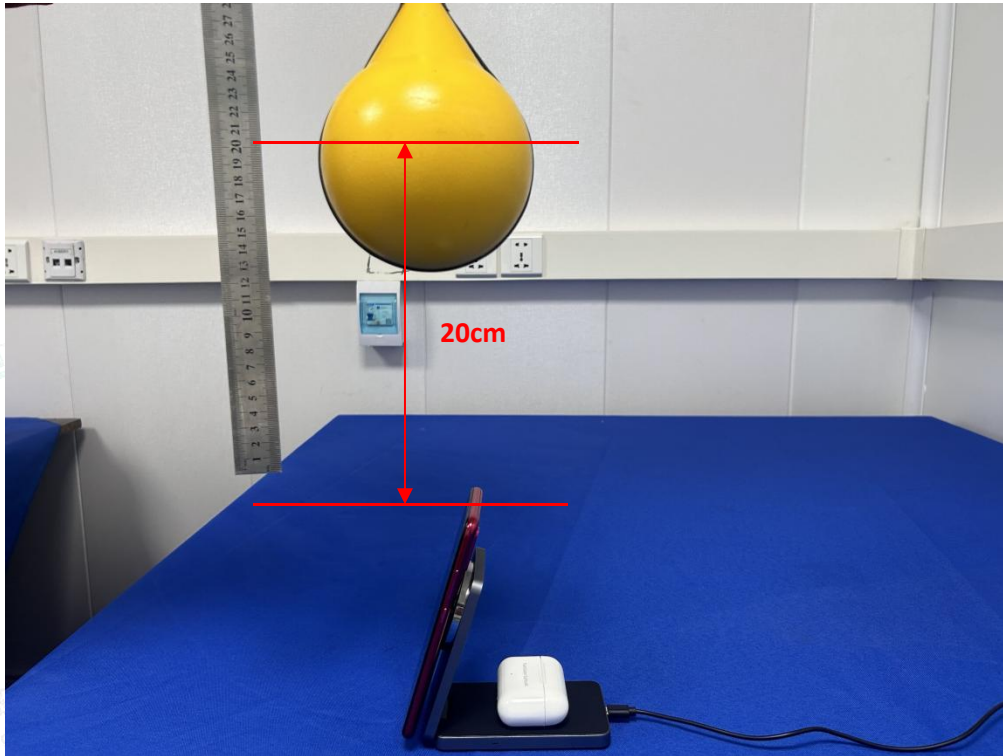

(TM1)

9.1. Test Position E - Exposure photo from top surface (15cm)

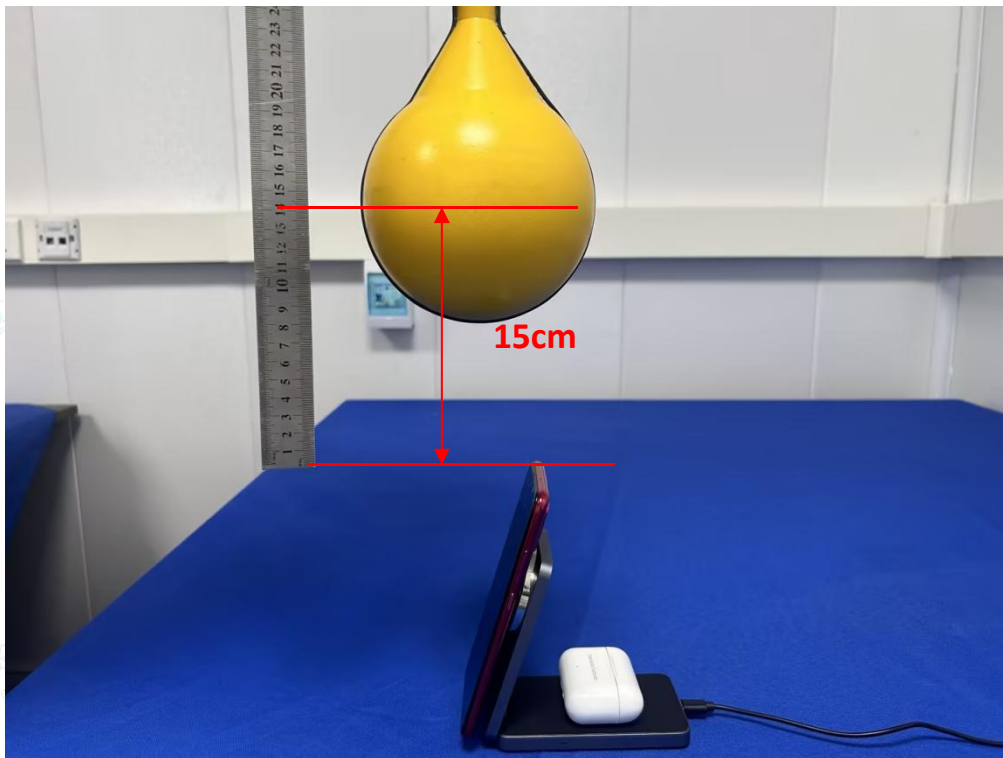

(TM1)



9 Conclusion

A minimum safety distance of at 15 cm surrounding the device and 20 cm above the top surface of the device is required when the device is charging a smart phone. The detected emissions with a distance of 15 cm surrounding the device and 20 cm above the top surface of the device are below the limitations according to FCC KDB 680106 D01 Section 3. RF Exposure Requirement Clause 3.

10. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

ISED Designation Number is 9642A.

Revision History

Report Version	Issue Date	Revision Content	Revised By
000	July 18, 2024	Initial Issue	--

.....END OF REPORT.....



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity