



# FCC TEST REPORT

**Test report**  
**On Behalf of**  
**Streamax Technology Co.,Ltd**  
**For**  
**Tablet**  
**Model No.: Smart Pad**

**FCC ID: 2AM6L-SPAD**

**Prepared for :** Streamax Technology Co.,Ltd  
21-23/F, Building B1, Zhiyuan, No. 1001, Xueyuan Avenue, Nanshan District, Shenzhen,  
Guangdong,P.R. China

**Prepared By :** Shenzhen HUAKE Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an  
District, Shenzhen City, China

**Date of Test:** Aug. 15, 2018~Dec. 24, 2018

**Date of Report:** Dec. 24, 2018

**Report Number:** HUAKE180817832E





## TEST RESULT CERTIFICATION


**Applicant's name** .....: Streamax Technology Co.,Ltd  
**Address** .....: 21-23/F, Building B1, Zhiyuan, No. 1001, Xueyuan Avenue, Nanshan District, Shenzhen, Guangdong, P.R. China  
**Manufacture's Name** .....: Streamax Technology Co.,Ltd  
**Address** .....: 21-23/F, Building B1, Zhiyuan, No. 1001, Xueyuan Avenue, Nanshan District, Shenzhen, Guangdong, P.R. China  
**Factory's Name** .....: Streamax Electronics Co.,Ltd.  
**Address** .....: 5th-6th Floor, West, Chuangxiang 2nd Building, Yanxiang Technology Park, 11# High-tech West Road, Guangming District, Shenzhen, Guangdong Province, P.R. China  
**Product description** .....: Tablet  
**Brand Name** .....: Streamax  
**Mode Name** .....: Smart Pad  
**Standards** .....: FCC Rules and Regulations Part 15B

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** .....:  
**Date (s) of performance of tests** .....: **Aug. 15, 2018~Dec. 24, 2018**  
**Date of Issue** .....: **Dec. 24, 2018**  
**Test Result** .....: **Pass**

Testing Engineer :   
\_\_\_\_\_  
(Gary Qian)

Technical Manager :   
\_\_\_\_\_  
(Eden Hu)

Authorized Signatory :   
\_\_\_\_\_  
(Jason Zhou)



Revision	Issue Date	Revisions	Revised By
V1.0	Dec. 24, 2018	Initial Issue	Jason Zhou



## TABLE OF CONTENTS

<b>1. SYSTEM DESCRIPTION .....</b>	<b>5</b>
<b>2. MEASUREMENT UNCERTAINTY .....</b>	<b>6</b>
<b>3. PRODUCT INFORMATION.....</b>	<b>7</b>
<b>4. SUPPORT EQUIPMENT.....</b>	<b>8</b>
<b>5. TEST FACILITY .....</b>	<b>9</b>
<b>6. TEST ITEMS AND THE RESULTS.....</b>	<b>10</b>
<b>7. FCC RADIATED EMISSION TEST.....</b>	<b>11</b>
7.1. EXCEPT FOR CLASS A DIGITAL DEVICES, THE FIELD STRENGTH OF RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS AT A DISTANCE OF 3 METERS SHALL NOT EXCEED THE FOLLOWING VALUES: .....	11
7.2. BLOCK DIAGRAM OF TEST SETUP .....	12
7.3. PROCEDURE OF RADIATED EMISSION TEST .....	13
7.4. TEST RESULT OF RADIATED EMISSION TEST .....	14
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>18</b>



## 1. SYSTEM DESCRIPTION

### EUT test procedure:

1. Connect EUT and peripheral devices (PC) through USB port.
2. Power on the EUT, use the software to transfer data between EUT and PC.
3. Make sure the EUT operates normally during the test.

### Test Mode

TEST MODE DESCRIPTION		
NO.	TEST MODE DESCRIPTION	WORST
1	USB (connection for data transferring)	V
Note: 1. V means EMI worst mode 2. USB cable is provided by AGC-Lab.		



## 2. MEASUREMENT UNCERTAINTY

Test	Measurement Uncertainty	Notes
Transmitter power conducted	$\pm 0.57$ dB	(1)
Transmitter power Radiated	$\pm 2.20$ dB	(1)
Conducted spurious emission 9KHz-40 GHz	$\pm 2.20$ dB	(1)
Occupied Bandwidth	$\pm 0.01$ ppm	(1)
Radiated Emission 30~1000MHz	$\pm 4.10$ dB	(1)
Radiated Emission Above 1GHz	$\pm 4.32$ dB	(1)
Conducted Disturbance 0.15~30MHz	$\pm 3.20$ dB	(1)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

**3. PRODUCT INFORMATION**

<b>Housing Type</b>	Plastic and metal
<b>Hardware Version</b>	1480
<b>Software Version</b>	RMVST_Smart Pad
<b>EUT Input Rating</b>	DC 12V

**I/O Port Information** (☒ **Applicable**    ☐ **Not Applicable**)

<b>I/O Port of EUT</b>			
<b>I/O Port Type</b>	<b>Number</b>	<b>Specific</b>	<b>Tested With</b>
USB Port	1	0.8 Unshielded	1



#### 4. SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
PC	Apple Inc.	--	--	--	0.8m Unshielded
Adapter	Apple Inc.	--	--	--	1.25m Unshielded

**Note:** All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.





## 5. TEST FACILITY

<b>Site</b>	Shenzhen HUAKE Testing Technology Co., Ltd.
<b>Location</b>	1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China
<b>Designation Number</b>	CN1229
Test Firm Registration Number : 616276	

### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Conducted Emission Shielding Room Test Site (744)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2018
LISN	R&S	ENV216	HKE-002	Dec. 28, 2018
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A

### TEST EQUIPMENT OF RADIATED EMISSION TEST

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI-7	HKE-010	Dec. 28, 2018
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2018
Preamplifier	EMCI	EMC051845SE	HKE-015	Dec. 28, 2018
Preamplifier	Agilent	83051A	HKE-016	Dec. 28, 2018
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2018
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 28, 2018
Horn antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2018
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 28, 2018
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
RF cable	Times	1-40G	HKE-034	Dec. 28, 2018

**6. TEST ITEMS AND THE RESULTS**

Test item	Test Requirement	Test Method	Class/Severity	Result
CONDUCTED EMISSION	FCC Part 15.107 Rules	ANSI C63.4:2014	Class B	Pass
RADIATED EMISSION	FCC Part 15.109 Rules	ANSI C63.4:2014	Class B	Pass



## 7. FCC RADIATED EMISSION TEST

7.1. EXCEPT FOR CLASS A DIGITAL DEVICES, THE FIELD STRENGTH OF RADIATED EMISSIONS FROM UNINTENTIONAL RADIATORS AT A DISTANCE OF 3 METERS SHALL NOT EXCEED THE FOLLOWING VALUES:

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30~88	3	40.0
88~216	3	43.5
216~960	3	46.0
Above 960	3	54.0

Note: The lower limit shall apply at the transition frequency.


7.1.1 The following table is the setting of spectrum analyzer and receiver:

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

## 7.2. BLOCK DIAGRAM OF TEST SETUP

System Diagram of Connections between EUT and Simulators

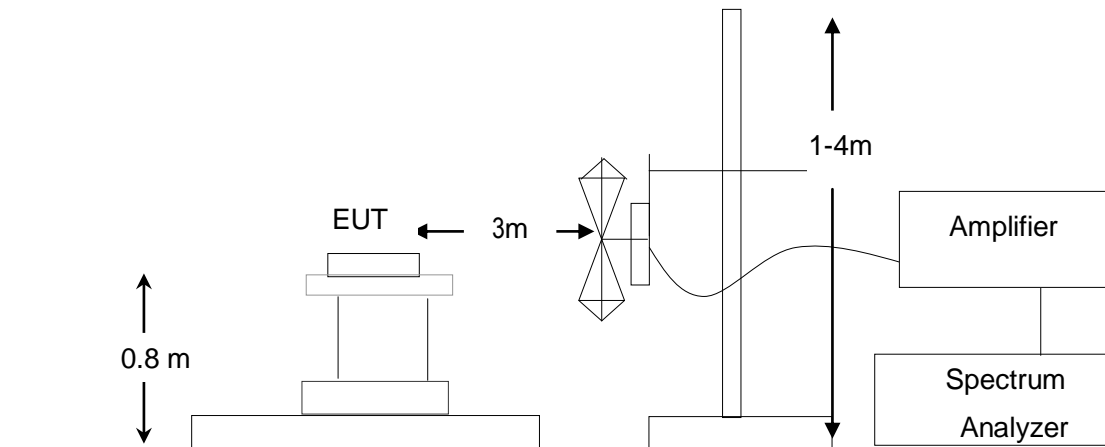

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

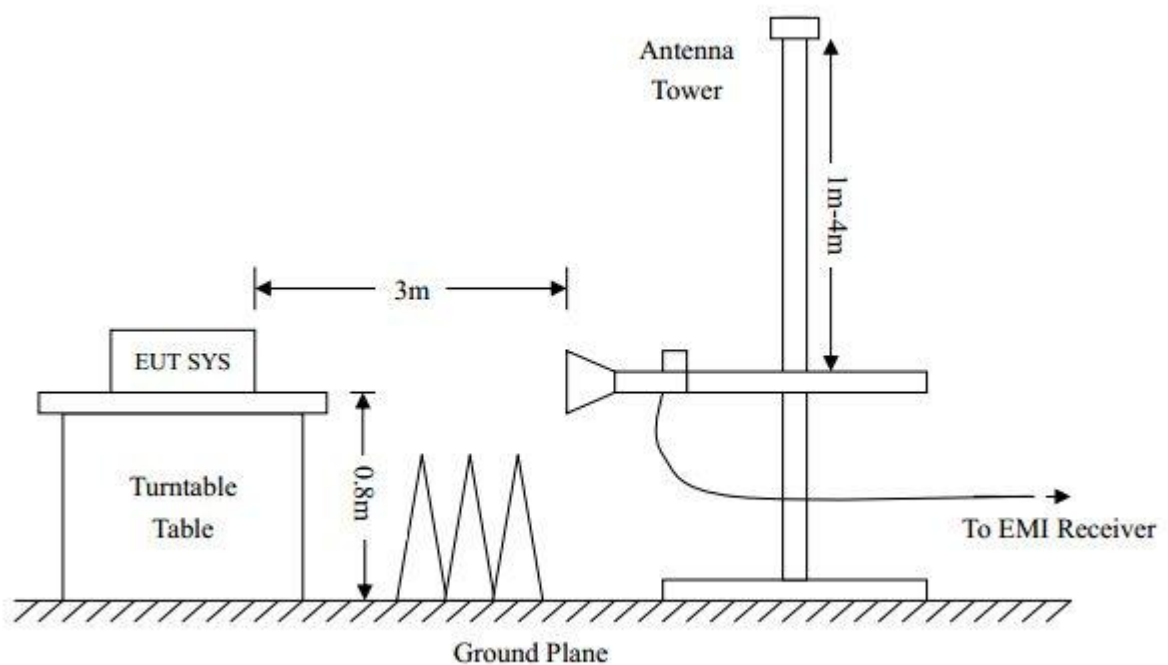




### 7.3. PROCEDURE OF RADIATED EMISSION TEST

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Then 1MHz RBW and 3MHz VBW for average reading in spectrum analyzer. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.
11. The test data of the worst case condition (mode 1) was reported on the Summary Data page.

**7.4. TEST RESULT OF RADIATED EMISSION TEST****RADIATED EMISSION TEST AT 3M DISTANCE-HORIZONTAL**

66.9 dBuV/m

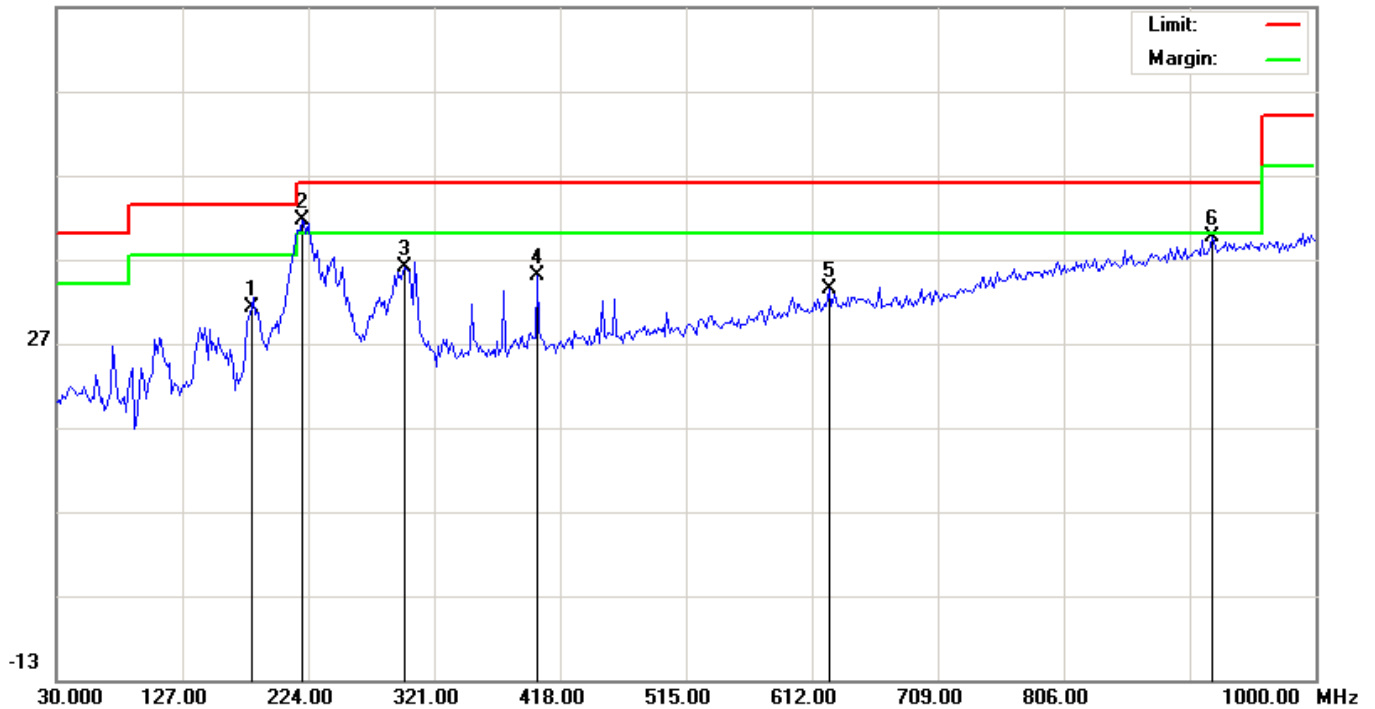


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		180.3500	12.76	18.49	31.25	43.50	-12.25	peak			
2	*	219.1500	22.93	18.69	41.62	46.00	-4.38	peak			
3		298.3667	14.07	21.95	36.02	46.00	-9.98	peak			
4		400.2167	9.67	25.42	35.09	46.00	-10.91	peak			
5		624.9333	3.15	30.21	33.36	46.00	-12.64	peak			
6		920.7833	3.33	36.18	39.51	46.00	-6.49	peak			

**RESULT: PASS**



## RADIATED EMISSION TEST AT 3M DISTANCE-VERTICAL

66.9 dBuV/m

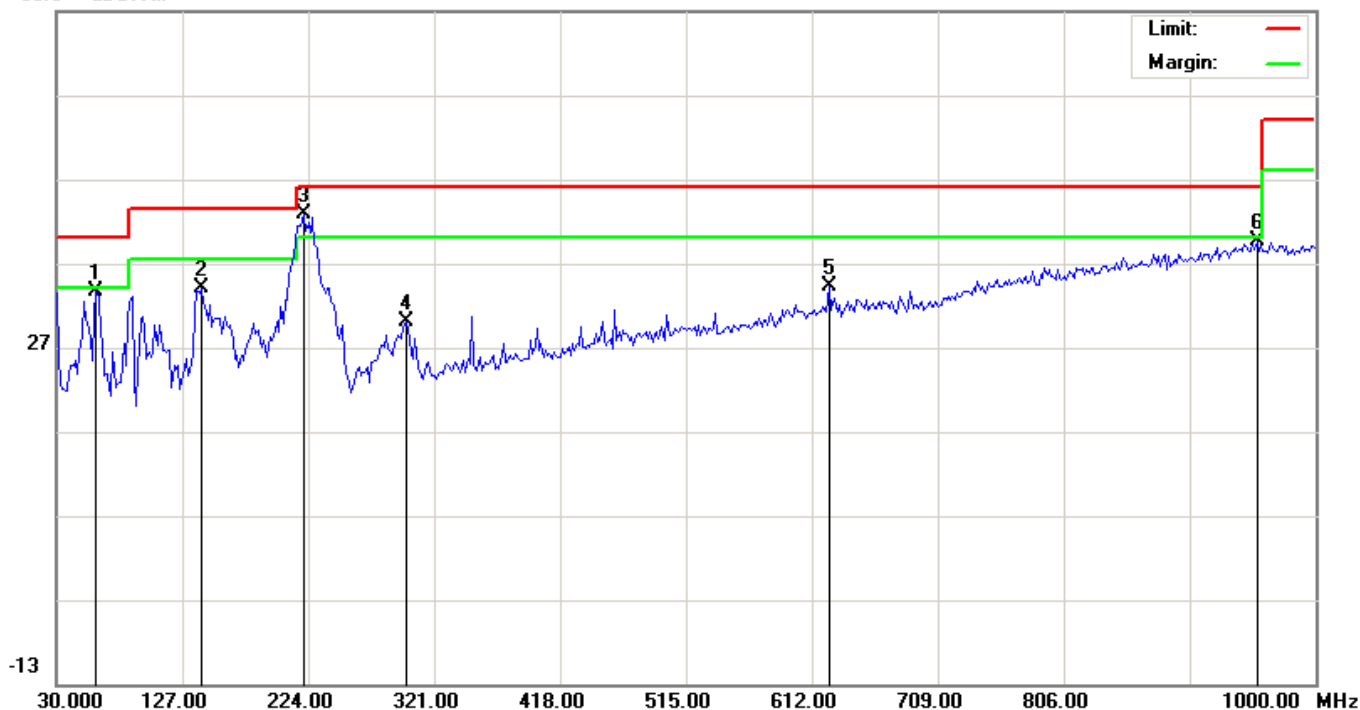


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		60.7167	14.11	19.53	33.64	40.00	-6.36	peak			
2		141.5500	13.63	20.38	34.01	43.50	-9.49	peak			
3	*	220.7667	24.04	18.80	42.84	46.00	-3.16	peak			
4		299.9833	8.04	21.93	29.97	46.00	-16.03	peak			
5		624.9333	3.95	30.21	34.16	46.00	-11.84	peak			
6		954.7333	3.11	36.59	39.70	46.00	-6.30	peak			

**RESULT: PASS**


Note: 1.Measurement = Reading + Factor, Over = Measurement – Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

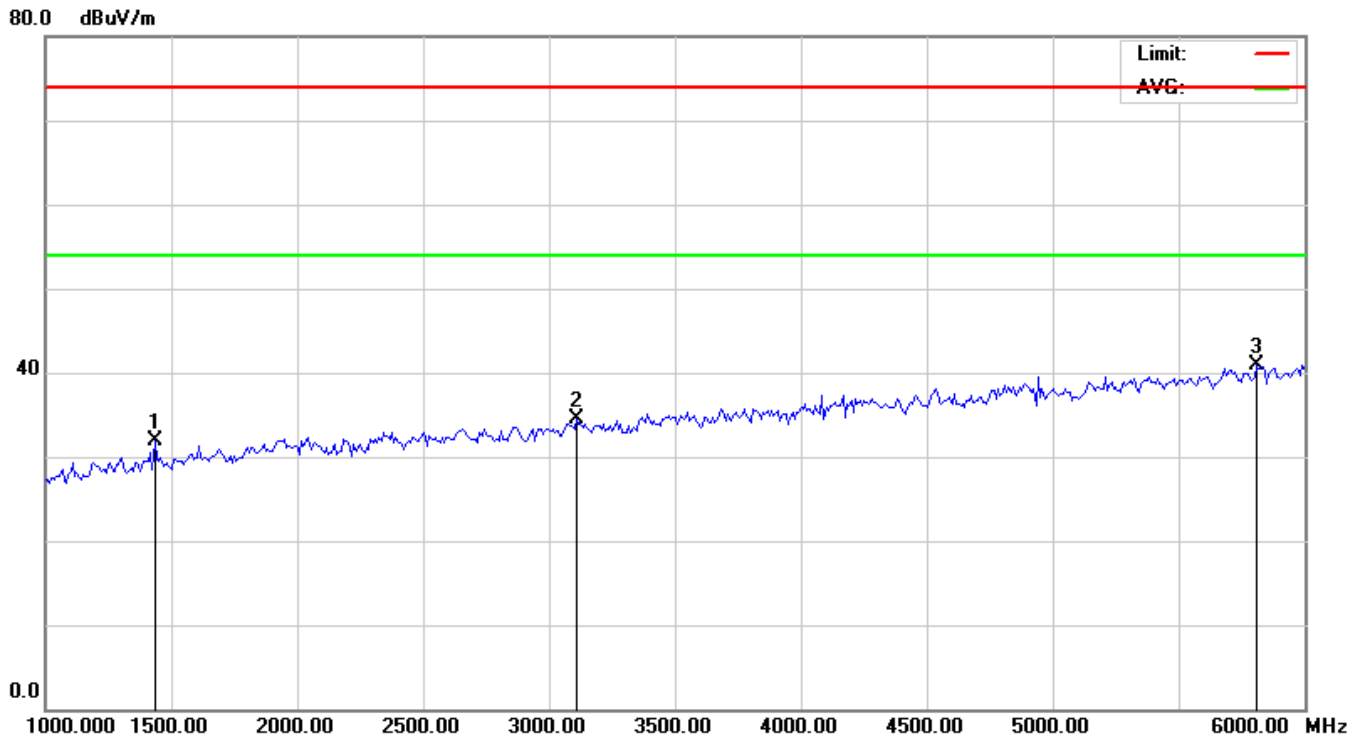RADIATED EMISSION ABOVE 1GHZ (1-10<sup>TH</sup> HARMONICS) –HORIZONTAL

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1433.333	16.44	15.52	31.96	74.00	-42.04	peak			
2		3108.333	18.23	16.27	34.50	74.00	-39.50	peak			
3	*	5808.333	24.95	15.89	40.84	74.00	-33.16	peak			

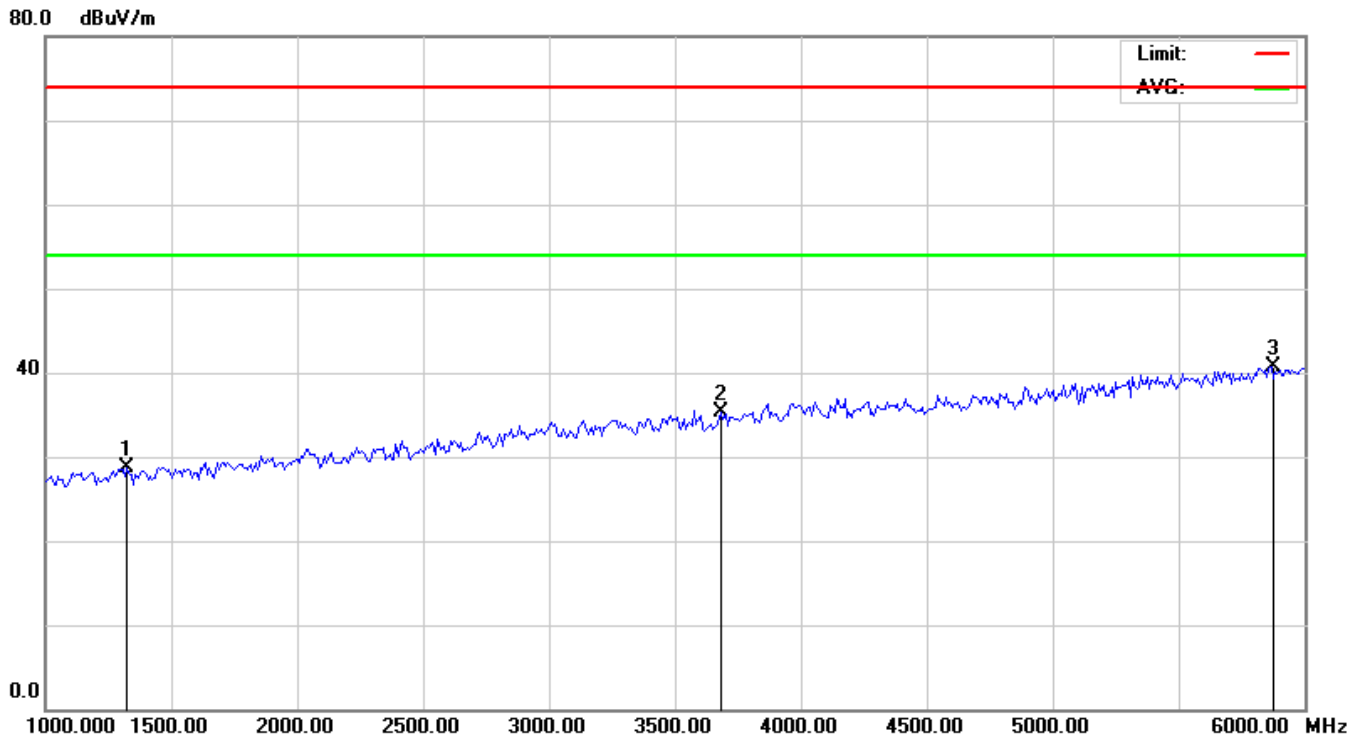

RADIATED EMISSION ABOVE 1GHZ (1-10<sup>TH</sup> HARMONICS) –VERTICAL


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1325.000	13.00	15.74	28.74	74.00	-45.26	peak			
2		3683.333	18.66	16.60	35.26	74.00	-38.74	peak			
3	*	5866.667	24.85	15.90	40.75	74.00	-33.25	peak			

**Note:** 1. Emissions range from 6GHz to 12.5GHz have 20dB margin. No recording in the test report.  
2. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.  
3. The “Factor” value can be calculated automatically by software of measurement system.




## APPENDIX A: PHOTOGRAPHS OF TEST SETUP

### FCC RADIATED EMISSION TEST SETUP

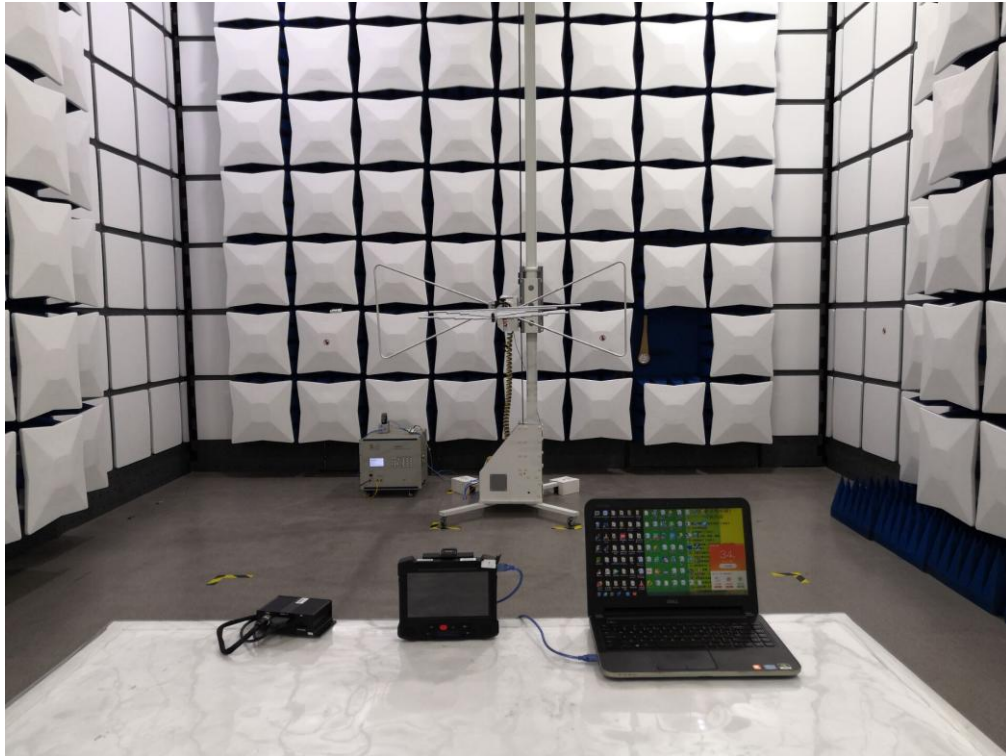

FCC RADIATED EMISSION TEST SETUP

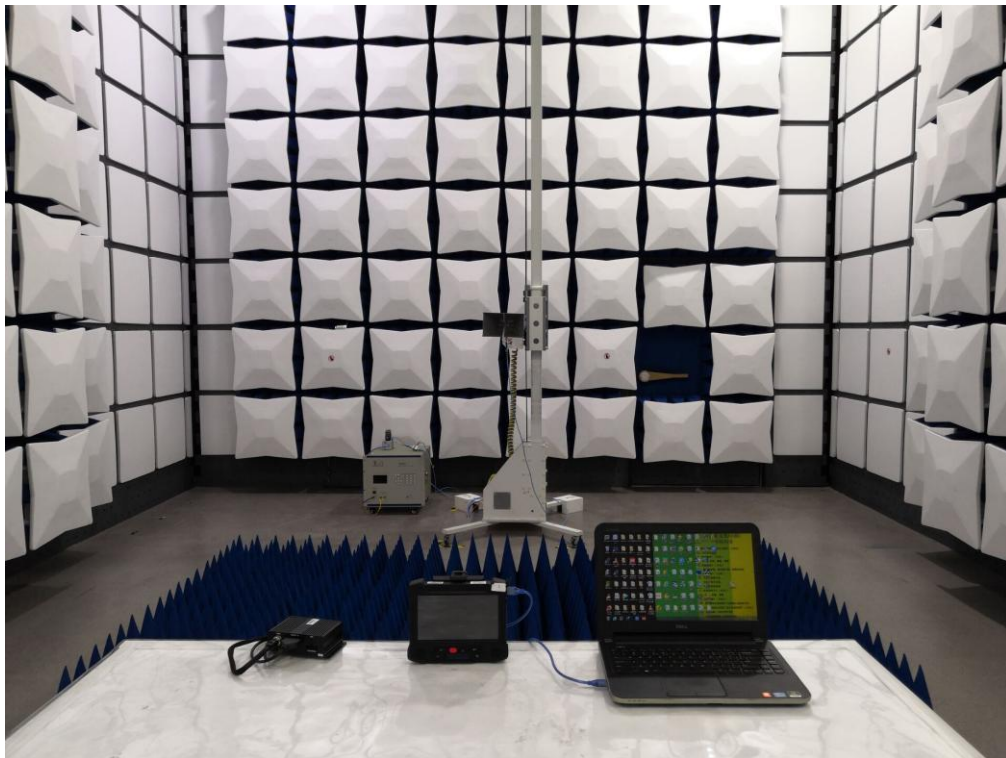

----END OF REPORT----