

FCC Test Report

Report No.: AGC15705240448FR01

FCC ID : UU8-RC65

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Remote

BRAND NAME : LEXIBOOK

MODEL NAME : RC65

APPLICANT : Lexibook America

DATE OF ISSUE : Jun. 27, 2024

STANDARD(S) : FCC Part 15 Subpart C §15.249

REPORT VERSION: V1.0

Attestation Of Global Concellance (Shenzhen) Co., Ltd



Page 2 of 40


Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Jun. 27, 2024	Valid	Initial Release	



Table of Contents

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Antenna Requirement	7
3. Test Environment	8
3.1 Address of the Test Laboratory	8
3.2 Test Facility	8
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	10
4.System Test Configuration	12
4.1 EUT Configuration	12
4.2 EUT Exercise	12
4.3 Configuration of Tested System	12
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	13
5. Description of Test Modes	14
6. Duty Cycle Measurement	15
7. 20dB Bandwidth Measurement	16
7.1 Provisions Applicable	16
7.2 Measurement Procedure	16
7.3 Measurement Setup (Block Diagram of Configuration)	16
7.4 Measurement Results	17
8. Field Strength of Fundamental and Radiated Spurious Emission	19
8.1 Measurement Limit	19
8.2 Measurement Procedure	20
8.3 Measurement Setup (Block Diagram of Configuration)	23
8.4 Measurement Result	24
9. AC Power Line Conducted Emission	38
9.1 Measurement Limit	38
9.2 Measurement Setup (Block Diagram of Configuration)	38
9.3 Preliminary Procedure of Line Conducted Emission Test	39
9.4 Final Procedure of Line Conducted Emission Test	39
9.5 Measurement Resul	39
Appendix I: Photographs of Test Setup	40
Appendix II: Photographs of Test EUT	40





1. General Information

Applicant	Lexibook America				
Address	C/O Pramex International 1251 Avenue of the Americas, 3rd Fl., New York, NY10020, United States				
Manufacturer	Lexibook America				
Address	C/O Pramex International 1251 Avenue of the Americas, 3rd Fl., New York, NY10020, United States				
Factory	Lexibook America				
Address	C/O Pramex International 1251 Avenue of the Americas, 3rd Fl., New York, NY10020, United States				
Product Designation	Remote				
Brand Name	LEXIBOOK				
Test Model	RC65				
Series Model(s)	N/A				
Difference Description	N/A				
Date of receipt of test item	Apr. 19, 2024				
Date of Test	Apr. 19, 2024 to Jun. 27, 2024				
Deviation from Standard	No any deviation from the test method				
Condition of Test Sample	Normal				
Test Result	Pass				
Test Report Form No	AGCER-FCC-NTX-V1				

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jouk Gai	
	Jack Gui (Project Engineer)	Jun. 27, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Jun. 27, 2024
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Jun. 27, 2024




Page 5 of 40

2. Product Information

2.1 Product Technical Description

Equipment Specification	Low Power Short Range Equipment
Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2405MHz-2475MHz
Modulation Type	GFSK
Number of channels	71
Channel Separation	1MHz
Field Strength of Fundamental	89.72dBµV/m (Peak)
Hardware Version	1.0
Software Version	1.0
Antenna Designation	Monopole antenna
Antenna Gain	0dBi
Power Supply	DC 3V by battery
Adapter Information	N/A





2.2 Test Frequency List

Z.Z rest riequency List								
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)			
01	2405	25	2429	49	2453			
02	2406	26	2430	50	2454			
03	2407	27	2431	51	2455			
04	2408	28	2432	52	2456			
05	2409	29	2433	53	2457			
06	2410	30	2434	54	2458			
07	2411	31	2435	55	2459			
08	2412	32	2436	56	2460			
09	2413	33	2437	57	2461			
10	2414	34	2438	58	2462			
11	2415	35	2439	59	2463			
12	2416	36	2440	60	2464			
13	2417	37	2441	61	2465			
14	2418	38	2442	62	2466			
15	2419	39	2443	63	2467			
16	2420	40	2444	64	2468			
17	2421	41	2445	65	2469			
18	2422	42	2446	66	2470			
19	2423	43	2447	67	2471			
20	2424	44	2448	68	2472			
21	2425	45	2449	69	2473			
22	2426	46	2450	70	2474			
23	2427	47	2451	71	2475			
24	2428	48	2452					



Page 7 of 40

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: UU8-RC65, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title				
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations				
2	FCC 47 CFR Part 15	Radio Frequency Devices				
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices				

2.5 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0dBi.



Page 8 of 40

3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions


	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3V by battery

Page 9 of 40

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$






3.5 List of Equipment Use

RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20	
\boxtimes	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27		
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08		
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27		





• Tes	Test Software					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information	
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71	
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A	
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6	
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0	



Page 12 of 40

4.System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:				
	EUT			

4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

	•					
No.	Equipment	Manufacturer	Model No.	Specification Information	Cable	
1	Control Box		USB-TTL			

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1			-		



Page 13 of 40

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.249(a)	Field Strength of Fundamental	Pass
3	§15.209&§15.249(d)	Radiated Emission& Band Edge	Pass
4	§15.205	Restricted Bands of Operation	Pass
5	§15.215	20dB Bandwidth	Pass
6	§15.207	AC Power Line Conducted Emission	N/A (See Note 2)

Note:

- 1. N/A means not applicable
- 2. This device is not AC powered and does not require this test.



Page 14 of 40

5. Description of Test Modes

Summary Table of Test Cases				
Test Item	Equipment type / Modulation			
rest item	Short Distance and Low Power Consumption/ GFSK			
Radiated & Conducted Test Cases	Mode 1: Normal Transmission on channel 01 (Battery powered) Mode 2: Normal Transmission on channel 36 (Battery powered) Mode 2: Normal Transmission on channel 71 (Battery powered)			
AC Conducted Emission	N/A			

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- The fixed-frequency transmission of the prototype is debugged through the buttons or software declared by the manufacturer.



6. Duty Cycle Measurement


The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
GFSK_2405MHz	180	3.97	14.01	5.56
GFSK_2440MHz	180	3.55	14.5	5.56
GFSK_2475MHz	180	3.55	14.5	5.56

Remark:

1. Duty Cycle factor = 10 * log (1/ Duty cycle)

The test plots as follows:

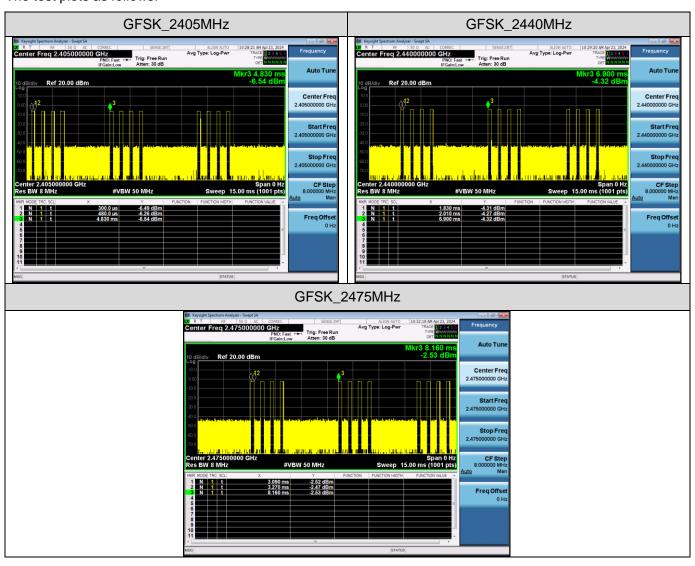

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 16 of 40

7. 20dB Bandwidth Measurement


7.1 Provisions Applicable

N/A

7.2 Measurement Procedure

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss
 was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 30 kHz. Set the Video bandwidth (VBW) = 100 kHz. In order to make an accurate measurement.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

7.3 Measurement Setup (Block Diagram of Configuration)

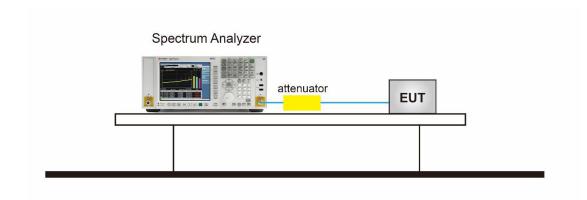




7.4 Measurement Results

Test Data of Occupied Bandwidth and -20dB Bandwidth					
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
GFSK	2405	1.1648	1.235	N/A	Pass
	2440	1.1779	1.239	N/A	Pass
	2475	1.1855	1.245	N/A	Pass

Test Graphs of Occupied Bandwidth and -20 Bandwidth

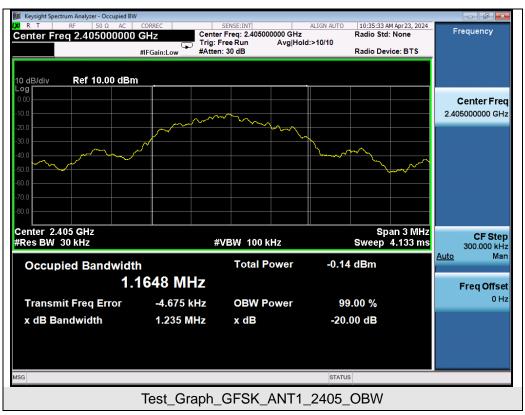





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 19 of 40

8. Field Strength of Fundamental and Radiated Spurious Emission

8.1 Measurement Limit

15.249 Limit in the below table has to be followed:

Francisco Donne	Field Strength of Fundamental	Field Strength of Harmonics	
Frequency Range	(millivolts/meter)	(microvolts/meter)	
900-928MHz	50	500	
2400-2483.5MHz	50	500	
5725-5875MHz	50	500	
24.0-24.25GHz	250	2500	

15.209 Limit in the below table has to be followed:

Frequency Range	Frequency Range Distance		Field Strengths Limit		
(MHz)	Meters	μV/m	dB(μV)/m		
0.009 ~ 0.490	300	2400/F(kHz)			
0.490 ~ 1.705	30	24000/F(kHz)			
1.705 ~ 30	30	30			
30 ~ 88	3	100	40.0		
88 ~ 216	3	150	43.5		
216 ~ 960	3	200	46.0		
960 ~ 1000	3	500	54.0		
Above 1000	3	Other:74.0 dB(µV)/m (Peak)	54.0 dB(μV)/m (Average)		

Remark:

- 1) Emission level dB μ V = 20 log Emission level μ V/m.
- 2) The smaller limit shall apply at the cross point between two frequency bands.
- 3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.



Page 20 of 40

8.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Page 21 of 40

■ The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting	
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP	
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP	
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP	
Start ~Stop Frequency	1GHz~26.5GHz	
Otan - Otop i requertoy	1MHz/3MHz for Peak, 1MHz/3MHz for Average	

Receiver Parameter	Setting	
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP	
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP	
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP	

- The following is the test setup of Field Strength of Fundamental:
 - > Peak detection: RBW is greater than the main frequency OBW, VBW=50MHz / Sweep=AUTO
 - Average detection: RBW is greater than the main frequency OBW, VBW=50MHz / Sweep=AUTO
- The following is the test setup of Band Edge:

The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

- Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - Peak detection: RBW=1MHz, VBW=3MHz / Sweep=AUTO
 - Average detection: RBW=1MHz; VBW=1/T / Sweep=AUTO (Duty cycle is less than 98%)
 - Average detection: RBW=1MHz; VBW=3M / Sweep=AUTO
 - Other procedures refer to clause 7.2.



Page 22 of 40

Quasi-Peak Measurements below 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW $\ge 1/T$. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold
- 8. Trace was allowed to stabilize






8.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9KHz-30MHz

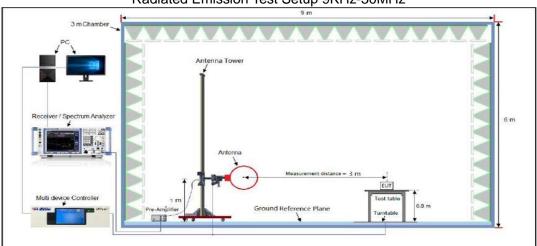

Radiated Emission Test Setup 30MHz-1000MHz

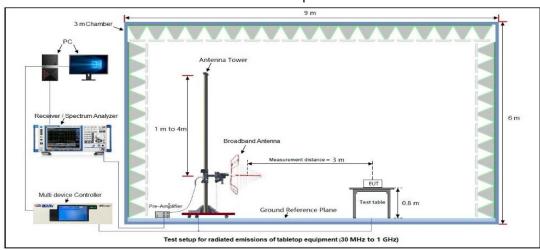

Radiated Emission Test Setup Above 1000MHz

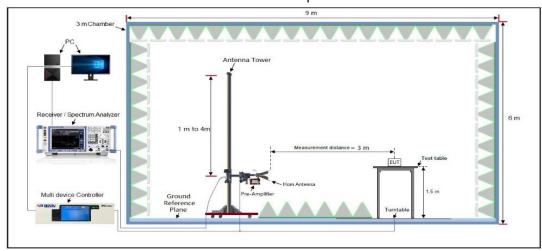

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 24 of 40

8.4 Measurement Result

Field Strength of Fundamental

EUT Name		Remote		Model Name		RC65	
Temperature)	21.3℃		Relative Humid	dity	62.4 %	
Pressure		960hPa		Test Voltage		Normal Vo	oltage
Test Mode		Mode 1		Antenna			
			Pea	k Value			
Frequency (MHz)		ured Level@3m (dBµV/m)	Correction Factor dB/m	Field Strength (dBµV/m)		it @3m sµV/m)	Polarity
2405		99.78	-10.06	89.72	11	14.00	Horizontal
2405		91.85	-10.06	81.79	11	14.00	Vertical
2440		90.74	-10.21	80.53	114.00 Ho		Horizontal
2440		90.52	-10.21	80.31	11	14.00	Vertical
2475		96.96	-10.59	86.37	11	14.00	Horizontal
2475		87.29	-10.59	76.70	11	14.00	Vertical
			Avera	ge Value			
Frequency (MHz)		ured Level@3m (dBµV/m)	Correction Factor dB/m	Field Strength (dBµV/m)		it @3m sµV/m)	Polarity
2405		90.46	-10.06	80.40	9	4.00	Horizontal
2405		82.20	-10.06	72.14	9	4.00	Vertical
2440		88.86	-10.21	78.65	9	4.00	Horizontal
2440		81.68	-10.21	71.47	9	4.00	Vertical
2475		89.54	-10.59	78.95	9	4.00	Horizontal
2475		79.67	-10.59	69.08	9	4.00	Vertical

RESULT: Pass


Note: Corr. Factor= Antenna Factor (dB/m) + Cable Loss (dB)




Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20dB below the permissible value need not be reported.

Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	Remote	Model Name	RC65			
Temperature	21.3℃	Relative Humidity	62.4%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	Mode 1	Antenna Polarity	Horizontal			

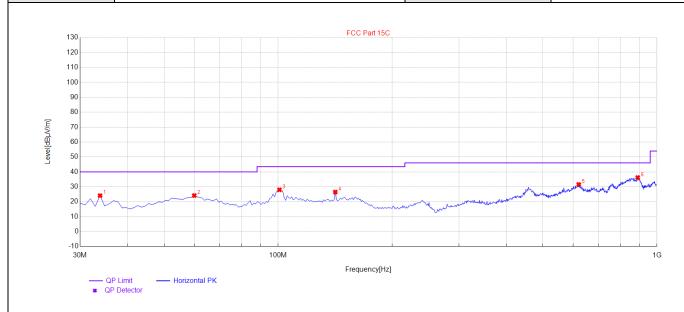


Final D	Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.88	24.09	12.12	40.00	15.91	100	300	Horizontal
2	60.07	24.16	17.86	40.00	15.84	100	200	Horizontal
3	100.81	28.00	17.03	43.50	15.50	100	306	Horizontal
4	141.55	26.50	16.13	43.50	17.00	100	155	Horizontal
5	621.7	31.59	25.68	46.00	14.41	100	249	Horizontal
6	889.42	36.22	29.79	46.00	9.78	100	237	Horizontal






Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	Remote	Model Name	RC65			
Temperature	21.3℃	Relative Humidity	62.4%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	Mode 1	Antenna Polarity	Vertical			

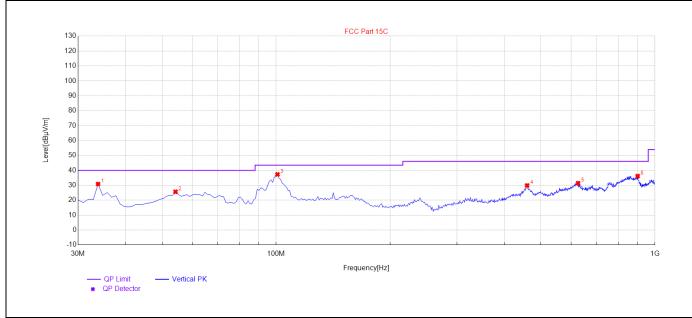

Final [Final Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	33.88	30.85	12.12	40.00	9.15	100	300	Vertical	
2	54.25	25.66	16.35	40.00	14.34	100	200	Vertical	
3	100.81	37.29	17.03	43.50	6.21	100	306	Vertical	
4	459.71	29.90	24.69	46.00	16.10	100	155	Vertical	
5	626.55	31.45	24.98	46.00	14.55	100	249	Vertical	
6	900.09	36.19	30.27	46.00	9.81	100	237	Vertical	

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.





Radiated Emissions Test Results for Above 1GHz

EUT Name	Remote	Model Name	RC65
Temperature	21.3℃	Relative Humidity	62.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4810.000	47.52	0.08	47.6	74	-26.4	peak
4810.000	38.36	0.08	38.44	54	-15.56	AVG
7215.000	41.31	2.21	43.52	74	-30.48	peak
7215.000	30.27	2.21	32.48	54	-21.52	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Remote	Model Name	RC65
Temperature	21.3℃	Relative Humidity	62.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4810.000	47.68	0.08	47.76	74	-26.24	peak
4810.000	38.31	0.08	38.39	54	-15.61	AVG
7215.000	42.52	2.21	44.73	74	-29.27	peak
7215.000	31.73	2.21	33.94	54	-20.06	AVG
D a see a sel se						-

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 28 of 40

Radiated Emissions Test Results for Above 1GHz

EUT Name	Remote	Model Name	RC65
Temperature	21.3℃	Relative Humidity	62.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
46.76	0.14	46.9	74	-27.1	peak
37.44	0.14	37.58	54	-16.42	AVG
42.26	2.36	44.62	74	-29.38	peak
31.38	2.36	33.74	54	-20.26	AVG
	46.76 37.44 42.26	46.76 0.14 37.44 0.14 42.26 2.36	46.76 0.14 46.9 37.44 0.14 37.58 42.26 2.36 44.62	46.76 0.14 46.9 74 37.44 0.14 37.58 54 42.26 2.36 44.62 74	46.76 0.14 46.9 74 -27.1 37.44 0.14 37.58 54 -16.42 42.26 2.36 44.62 74 -29.38

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Remote	Model Name	RC65
Temperature	21.3℃	Relative Humidity	62.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.000	48.72	0.14	48.86	74	-25.14	peak
4880.000	38.51	0.14	38.65	54	-15.35	AVG
7320.000	42.38	2.36	44.74	74	-29.26	peak
7320.000	32.56	2.36	34.92	54	-19.08	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 29 of 40

Radiated Emissions Test Results for Above 1GHz

EUT Name	Remote	Model Name	RC65
Temperature	21.3℃	Relative Humidity	62.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	\/alva Trea
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4950.000	47.83	0.22	48.05	74	-25.95	peak
4950.000	38.54	0.22	38.76	54	-15.24	AVG
7425.000	43.48	2.64	46.12	74	-27.88	peak
7425.000	41.61	2.64	44.25	54	-9.75	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	Remote	Model Name	RC65
Temperature	21.3℃	Relative Humidity	62.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	\/alua Tima
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4950.000	48.51	0.22	48.73	74	-25.27	peak
4950.000	37.83	0.22	38.05	54	-15.95	AVG
7425.000	41.26	2.64	43.9	74	-30.1	peak
7425.000	30.62	2.64	33.26	54	-20.74	AVG


Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass

Note:

- The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.






Band Edge Emission Test Results for Restricted Bands

EUT Name	Remote	Model Name	RC65
Temperature	21.3℃	Relative Humidity	62.4 %
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

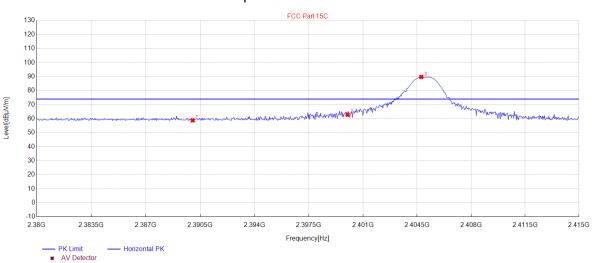

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.02	58.76	34.40	74.00	15.24	150	330	Horizontal
2	2400.005	62.81	34.43	74.00	11.19	150	235	Horizontal
3	2404.7698	89.72	34.44	74.00	-15.72	150	235	Horizontal




Test Graph for Average Measurement

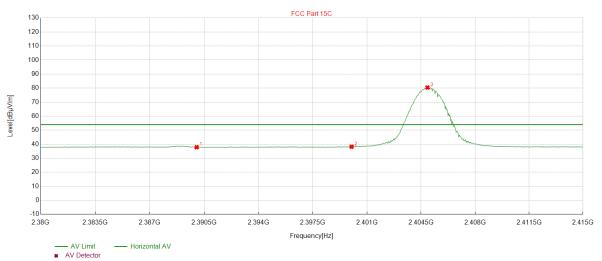

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.02	37.87	34.40	54.00	16.13	150	248	Horizontal
2	2400.005	38.18	34.43	54.00	15.82	150	256	Horizontal
3	2404.9099	80.40	34.44	54.00	-26.40	150	236	Horizontal

RESULT: Pass






Band Edge Emission Test Results for Restricted Bands

EUT Name	Remote	Model Name	RC65
Temperature	21.3℃	Relative Humidity	62.4 %
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical


Test Graph for Peak Measurement

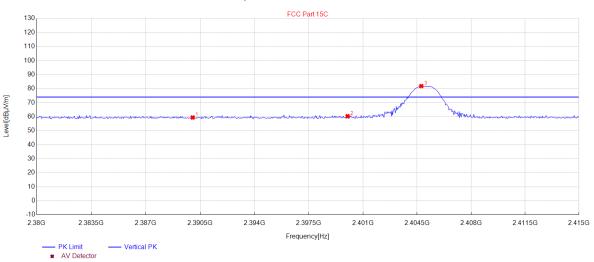

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.02	59.39	34.40	74.00	14.61	150	294	Vertical
2	2400.005	60.32	34.43	74.00	13.68	150	146	Vertical
3	2404.7698	81.79	34.44	74.00	-7.79	150	170	Vertical




Test Graph for Average Measurement

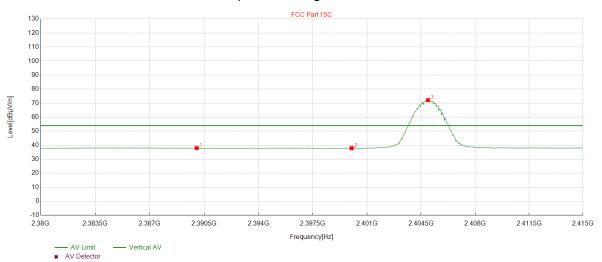

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.02	37.95	34.40	54.00	16.05	150	277	Vertical
2	2400.005	37.93	34.43	54.00	16.07	150	187	Vertical
3	2404.9449	72.14	34.44	54.00	-18.14	150	171	Vertical

RESULT: Pass






Band Edge Emission Test Results for Restricted Bands

EUT Name	Remote	Model Name	RC65
Temperature	21.3℃	Relative Humidity	62.4 %
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

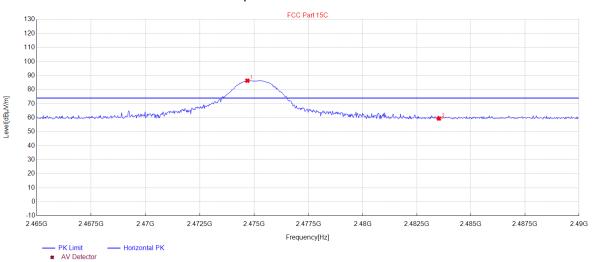

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2474.6847	86.37	34.64	74.00	-12.37	150	168	Horizontal
2	2483.5185	59.35	34.66	74.00	14.65	150	163	Horizontal




Test Graph for Average Measurement

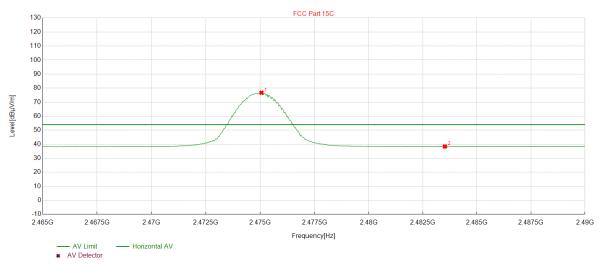

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2475.0601	76.70	34.64	54.00	-22.70	150	20	Horizontal
2	2483.5185	38.36	34.66	54.00	15.64	150	359	Horizontal

RESULT: Pass







Band Edge Emission Test Results for Restricted Bands

EUT Name	Remote	Model Name	RC65
Temperature	21.3℃	Relative Humidity	62.4 %
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement

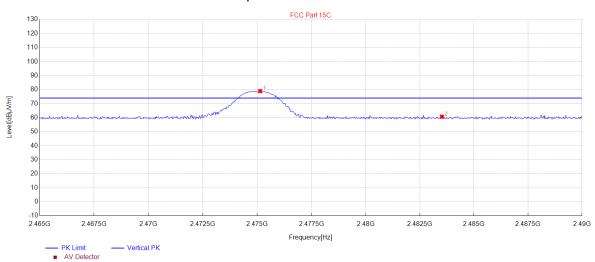


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2475.1351	78.95	34.64	74.00	-4.95	150	126	Vertical
2	2483.5185	60.68	34.66	74.00	13.32	150	117	Vertical





Test Graph for Average Measurement

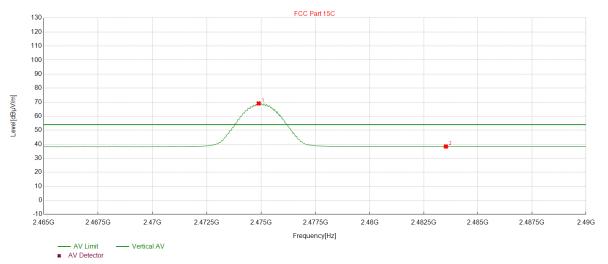

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2474.8849	69.08	34.64	54.00	-15.08	150	132	Vertical
2	2483.5185	38.36	34.66	54.00	15.64	150	288	Vertical

RESULT: Pass

Note:

- 1) Factor=Antenna Factor + Cable loss Amplifier gain. Field Strength=Factor + Reading level
- 2) The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.



9. AC Power Line Conducted Emission


9.1 Measurement Limit

Fraguenay	Maximum RF Line Voltage					
Frequency	Q.P. (dBµV)	Average (dBµV)				
150kHz~500kHz	66-56	56-46				
500kHz~5MHz	56	46				
5MHz~30MHz	60	50				

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

9.2 Measurement Setup (Block Diagram of Configuration)

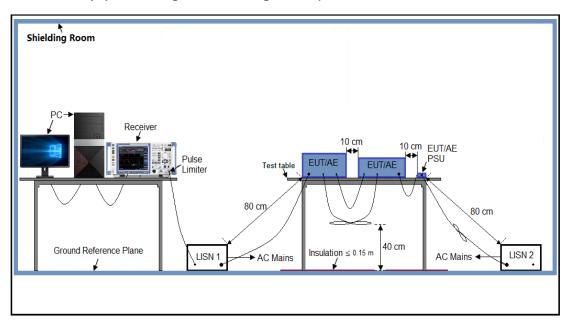



Page 39 of 40

9.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

9.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

9.5 Measurement Resul

N/A

Note: This device is not AC powered and does not require this test.



Report No.: AGC15705240448FR01 Page 40 of 40

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC15705240448AP02

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC15705240448AP03

----End of Report-----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.