


Product Manual

numbe ring	State the items		Gauge lattice
1			
2	Product storage environment	Ambient temperature	-10℃～40℃
3		Relative temperature	45%～75% RH
4		Atmospheric pressure	86～106Kpa
5	Product use environment	Ambient illumination (use)	Natural light or fluorescent light 200Ix±50Ix
6	Product composition specification (Standard specifications, except special requirements)	Nameplate quality	/
7		Plastic material	475
8		Paint material	/
9		Key material	bulge
10		Circuit board material	94HB
11		Processor model	STX655M
12		Remote emission source	RF
13		Remote coding format	/
14		Remote code watch	/
15		Product appearance design	/
16	Product inspection standard (Unless otherwise stated, Tamb=25℃)	Type of battery used	Alkaline environmental protection button battery
17		Battery specification	CR2032 Alkaline battery
18		Rated operating voltage	DC 3V
19		Operating voltage range	DC 2.6V-3.5V
20		Operating current range	≤10mA
21		Standby current	≤3uA
22		Carrier frequency	433MHz±40KHZ
23		Transmitting power	8 to 20mAV/ time
24		Transmitting distance	≥10m (unblocked, standard acceptance device)
25		Directional launch Angle	≥30℃ (no Angle limit)
26		Directional firing range	≥6m (none)
27		Undervoltage launch distance	≥6m (2.5V unblocked)
28		Key free height	≤3mm
29		Keying force	120±30g
30		Key load life	≥ 20,000 times
31		Free drop test	80cm (Wood floor)
32		Number of free drops	6 times (once per side)
33		Vibration test (30min)	Three-dimensional direction; 1.5mm amplitude; 500-3300 times/second

34		High temperature storage test	60℃（72h）
35		Low temperature storage test	-20℃（72h）
36		Constant temperature test	40℃ Relative humidity 90%

用户码:ABCD	
0012/FF12	
0023/FF23	
0030/FF30	
0003/FF03	
</	

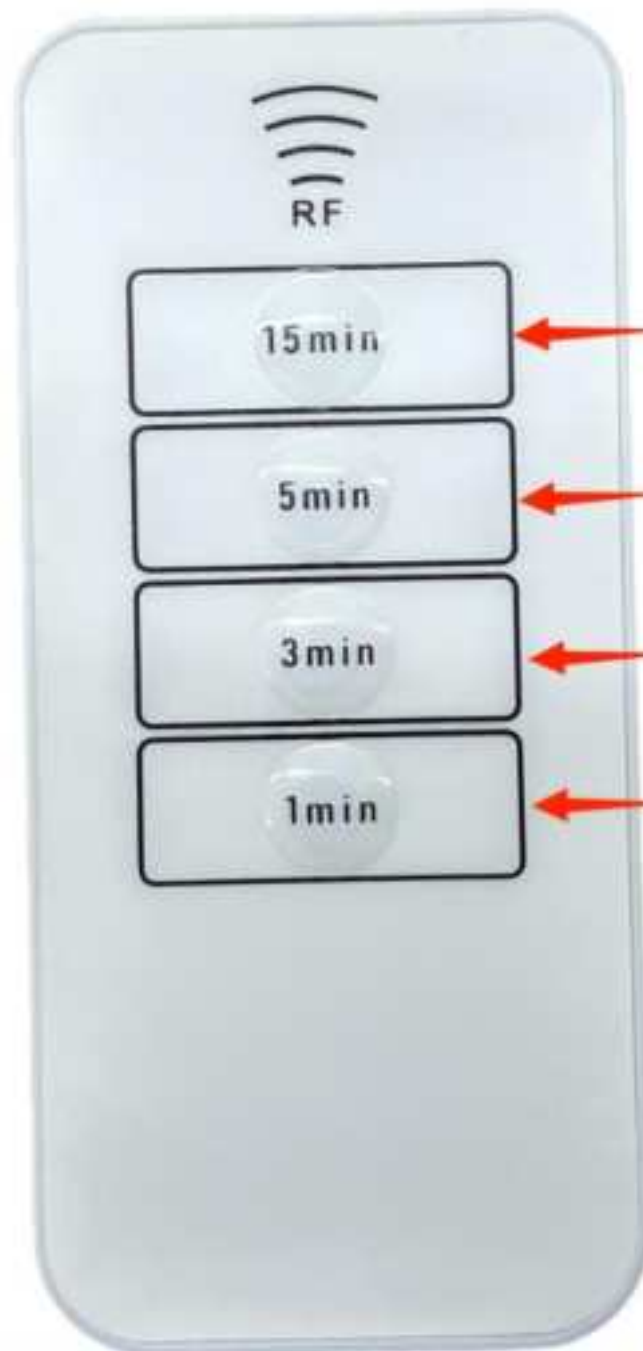

Timed lights on
for 15ming

Timed lights on
for 5 ming

Timed lights on
for 3 ming

Timed lights on
for 1 ming

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure statement

The device has been evaluatec to meel general RF exposure requirement. The device can be used in portable exposure condition without restriction.