

英语

Wireless Charger User Guide


EN



Model:A7

About Magnet

This wireless charger is designed attracted-magnetically, iPhone12 series mobile phone can be attracted instantly. Please use Magsafe phone case for perfect attracting and wireless charging if you need a protective case.

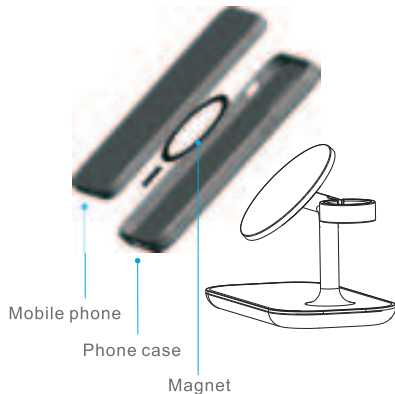

Tips:

Magsafe phone case need to be purchased separately.

About adapter

The Max Output: Apple7.5W, Samsung 10W. Please use PD or QC 3.0 adapter. The wireless charging can be 5W only if choosing a 5V2A adapter.



Tips:

- PD/QC 3.0 adapter need to be purchased separately.
- Do not use output of 5V1A adaptor, 5W low-power adaptor will make wireless charger to work unsteadily.


About steps to assemble Apple watch magnetic charger cable

Step 1: Disassemble back-case.




Take it apart with your fingernail, and the rest of parts can be opened gently by fingernail.

Step2: Apple watch magnetic charger cable layout 1.

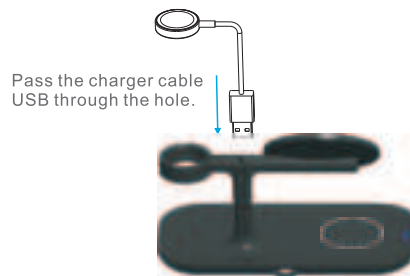

Step3: Apple watch magnetic charger cable layout 2.

Take charger cable in the groove by following 1-6 order, insert the USB into the PCBA, buckle the back case, as shown in the picture, The whole charger cable layout is finished.



FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

About Airpods



Put the aripods in the center of the charging area for wireless charging.

About PU silicone



- In addition, we included two pieces of PU silicone, which you can stick on the back of the product so that you can pick and place the phone with one hand.

LED indicator light

- White light: Standby
- Blue light: Charging
- Red light flash: Error



White LED light and blue LED light will be darken after 5 minutes, not influence your sleep.

Product Specification

Fast Wireless Charger

- Input: 5V=2A/9V=1.67A/12V=1.5A
- Output: 5V=1.0A/9V=1.20A
- Charging Efficiency: 70%
- Working frequency:110.5K-205K

⚠ The LED light turns red during wireless charging to indicate a charging failure.

The following situation can cause failures, like charging slowly, stop charging, over-temperature for charging position.

1. The adapter is not run up to standard (No PC USB output power supply).
2. The charging cable is not up to standard.
3. The phone case is too thick (within 2mm thickness phone case recommended).
4. There is metal on the back of cell phone or phone case.
5. Smartphone does not support wireless charging function.

⚠ Attention

1. Please keep the charger away from water or other liquid.
2. If you need to clean the charger, please make sure it is not connected to power supply.
3. Using Environment temperature remains -20~45°C.

CE FC PS E RoHS MADE IN CHINA