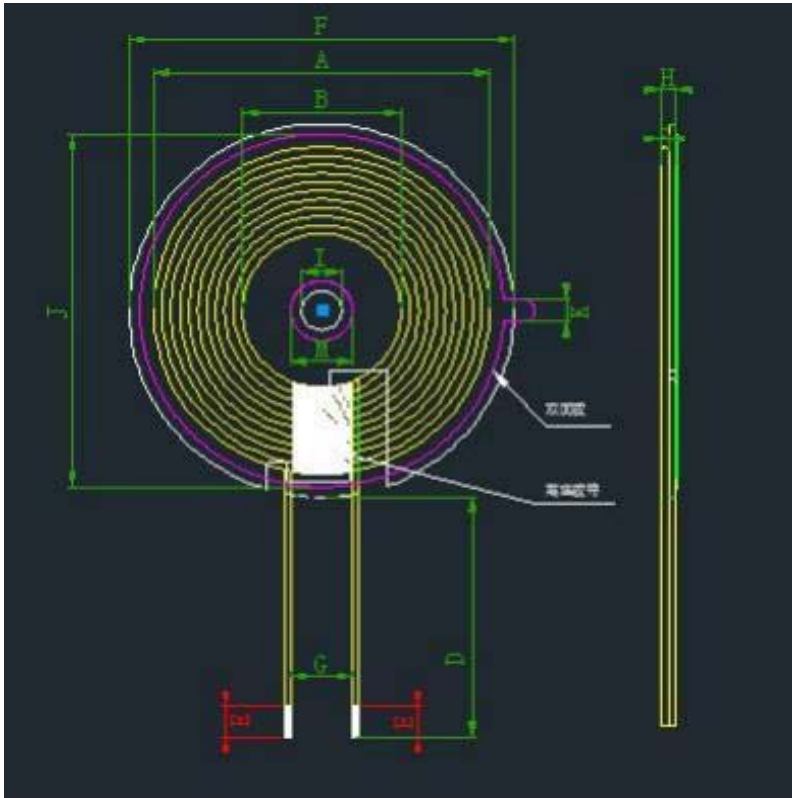



DESC		Φ 20.5x43-6.8uH-0.08x105		Rev: A.0	客户料号CUSTP/N:																								
一、尺寸DIMENSION:(mm) 						A	43.0±1.5																						
						B	20.5±0.5																						
						C	1.25 Max																						
						D	50±2																						
						E	4±2																						
						F	50±1																						
						G	10.0ref																						
						H	2.2 Max																						
						I	5.3ref																						
						M	8.0ref																						
						J	47±1																						
						K	3.0±1																						
二、原理图SCHEMATIC DIAGRAM: 						Remarks:																							
						1.交叉出线Cross outgoing line;																							
						2.出线位置缠8mm(ref)宽度高温胶纸1-2Ts; high-temperature adhesive tape 1-2Ts around the outlet position																							
						3.线圈贴圆形硬磁片带槽, Coil mounted on circular hard magnetic disc with slot																							
						磁片尺寸 magnetic disc Size:50±1mm,																							
						内孔dia of inner hole: 5.3mm,																							
						厚度Thickness: 1.0±0.2mm。																							
三、绕线参数Winding Specification: <table><tr><td>序号 NO.</td><td colspan="2">端子 TERMINAL</td><td>线径 WIRE</td><td>圈数 Turns</td><td>绕线方向 Winding Direction</td></tr><tr><td>1</td><td>S</td><td>F</td><td>丝包线0.08*105P</td><td>10Ts</td><td>CCW</td></tr></table>						序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction	1	S	F	丝包线0.08*105P	10Ts	CCW												
序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction																								
1	S	F	丝包线0.08*105P	10Ts	CCW																								
四、电气特性ELECTRICALCHARACTERISTICS: 温度TEMPERATURE:25±10℃, 湿度RELATIVE HUMIDITY:65±20% <table><tr><td>序号 NO.</td><td>项目 ITEM</td><td>端子 TERMINAL</td><td>标准 SPECIFICATION</td><td>测试条件 TEST FREQUENCY</td><td>测试仪器 TEST EQUIPMENTS</td></tr><tr><td>1</td><td>IND.</td><td>S-F</td><td>3.8uH ±20% Coil only</td><td>100KHz/1.0V</td><td>LCZMETER1062B</td></tr><tr><td>2</td><td>IND.</td><td>S-F</td><td>6.8uH ±10% with magnetic disc added</td><td>100KHz/1.0V</td><td>LCZMETER1062B</td></tr><tr><td>3</td><td>DCR</td><td>S-F</td><td>≤50m Ω</td><td></td><td>LCZMETER502B</td></tr></table>						序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	1	IND.	S-F	3.8uH ±20% Coil only	100KHz/1.0V	LCZMETER1062B	2	IND.	S-F	6.8uH ±10% with magnetic disc added	100KHz/1.0V	LCZMETER1062B	3	DCR	S-F	≤50m Ω		LCZMETER502B
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS																								
1	IND.	S-F	3.8uH ±20% Coil only	100KHz/1.0V	LCZMETER1062B																								
2	IND.	S-F	6.8uH ±10% with magnetic disc added	100KHz/1.0V	LCZMETER1062B																								
3	DCR	S-F	≤50m Ω		LCZMETER502B																								