

Test Report

Report No.: MTi230614001-01E2

Date of issue: 2023-07-10

Applicant: Zhuhai Quin Technology Co., Ltd.

Product: Label Printer

Model(s): T200-BT

Series Model: Please refer to the Series model remark

FCC ID: 2ASRB-T200-BT

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.



Series model Remark:

, T210-BT,T220-BT,T230-BT,T240-BT,T260-BT,T270-BT,T280-BT,T290-BT,T300-BT,T310-BT,T330-BT,T340-BT,T350-BT,T360-BT,T410-BT,T420-BT,T430-BT,T450-BT,T460-BT,T470-BT,T480-BT,T510-BT,T610-BT,T710-BT,T800-BT,T810-BT,TC240-BT,TC340-BT,TC350-BT,TC360-BT,TC370-BT,TC380-BT,CT200-BT,CT210-BT,CT310-BT,CT410-BT,CT510-BT,CT610-BT,CT620-BT,CT630-BT,CT640-BT,CT650-BT,CT660-BT,T200Pro-BT,T210Pro-BT,T220Pro-BT,T230Pro-BT,T240Pro-BT,T260Pro-BT,T270Pro-BT,T280Pro-BT,T290Pro-BT,T300Pro-BT,T310Pro-BT,T330Pro-BT,T340Pro-BT,T350Pro-BT,T360Pro-BT,T410Pro-BT,T420Pro-BT,T430Pro-BT,T450Pro-BT,T460Pro-BT,T470Pro-BT,T480Pro-BT,T510Pro-BT,T610Pro-BT,T710Pro-BT,T800Pro-BT,T810Pro-BT,TC240Pro-BT,TC340Pro-BT,TC350Pro-BT,TC360Pro-BT,TC370Pro-BT,TC380Pro-BT,CT200Pro-BT,CT210Pro-BT,CT310Pro-BT,CT410Pro-BT,CT510Pro-BT,CT610Pro-BT,CT620Pro-BT,CT630Pro-BT,CT640Pro-BT,CT650Pro-BT,CT660Pro-BT,T900-BT,T1000-BT,T350S-BT

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

1	General Description	6
1.1	Description of the EUT	6
1.2	Description of test modes	6
1.3	Description of test modes	6
1.4	Environmental Conditions	8
1.5	Description of support units	8
1.6	Measurement uncertainty	8
2	Summary of Test Result	9
3	Test Facilities and accreditations	10
3.1	Test laboratory	10
4	List of test equipment	11
5	Evaluation Results (Evaluation)	14
5.1	Antenna requirement	14
6	Radio Spectrum Matter Test Results (RF)	14
6.1	Conducted Emission at AC power line	14
6.2	Occupied Bandwidth	20
6.3	Maximum Conducted Output Power	22
6.4	Power Spectral Density	24
6.5	Emissions in non-restricted frequency bands	25
6.6	Band edge emissions (Radiated)	27
6.7	Emissions in restricted frequency bands (below 1GHz)	30
6.8	Emissions in restricted frequency bands (above 1GHz)	34
	Photographs of the test setup	38
	Photographs of the EUT	39
	Appendix A: DTS Bandwidth	40
	Appendix B: Maximum conducted output power	42
	Appendix C: Maximum power spectral density	44
	Appendix D: Band edge measurements	46
	Appendix E: Conducted Spurious Emission	47
	Appendix F: Duty Cycle	50

Test Result Certification	
Applicant:	Zhuhai Quin Technology Co., Ltd.
Address:	ROOM 103-029(CENTRALIZED OFFICE AREA) , 1F, BUILDING 1, NO. 18 FUTIAN ROAD, XIANGZHOU DISTRICT, ZHUHAI CITY, CHINA
Manufacturer:	Zhuhai Quin Technology Co., Ltd.
Address:	ROOM 103-029(CENTRALIZED OFFICE AREA) , 1F, BUILDING 1, NO. 18 FUTIAN ROAD, XIANGZHOU DISTRICT, ZHUHAI CITY, CHINA
Product description	
Product name:	Label Printer
Trade mark:	N/A
Model name:	T200-BT
Series Model:	Please refer to the Series model remark
Standards:	FCC 47 CFR Part 15 Subpart C
Test method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02
Date of Test	
Date of test:	2023-06-30 to 2023-07-10
Test result:	Pass

Test Engineer	:	<i>Letter. Lan.</i>
		(Letter Lan)
Reviewed By	:	<i>Leon Chen</i>
		(Leon Chen)
Approved By	:	<i>Tom Xue</i>
		(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	Label Printer
Model name:	T200-BT
Series Model:	Please refer to the Series model remark
Model difference:	All the models are the same circuit and module, except the model name
Electrical rating:	Input: 24V/ 2.5A model: ADP-60E24 Manufacturer: Hengyang Dimension Electronic Input: 100-240V~50/60Hz 1.5A MAX Output: +24V= 2.5A
Accessories:	Cable: USB-A to USB-B cable (1.5m)
Hardware version:	Q146_A
Software version:	1.1.7
Test sample(s) number:	MTi230614001-01S1001
RF specification	
Bluetooth version:	V5.0
Operating frequency range:	2402 MHz ~ 2480 MHz
Channel number:	40
Modulation type:	GFSK
Antenna(s) type:	PCB antenna
Antenna(s) gain:	2 dBi

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	TX- GFSK (ch00 ch19 ch39)

1.3 Description of test modes

1.3.1 Operation channel list

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478

9	2420	19	2440	29	2460	39	2480
---	------	----	------	----	------	----	------

Note: The test software has been used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Mode	Test Software	BR BlueletSuite		
	Channel	2402MHz	2440MHz	2480MHz
BLE_1M	Power setting	Default	Default	Default

1.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.5 Description of support units

The EUT was tested as an independent device.

1.6 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.1dB
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Power Spectral Density, conducted	±1 dB
Unwanted Emissions, conducted	±1 dB
Radiated spurious emissions (1GHz~26GHz)	5.3dB
Radiated spurious emissions (9kHz~30MHz)	4.3dB
Radiated spurious emissions (30MHz~1GHz)	4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 Summary of Test Result

No.	FCC reference	Description of test	Result
1	§ 15.203	Antenna requirement	Pass
2	§ 15.207	AC power line conducted emissions	Pass
3	§ 15.247(d), 15.209, 15.205	Radiated spurious emissions	Pass
4	§ 15.247(a)(2)	DTS bandwidth	Pass
5	§ 15.247(b)(3)	Maximum conducted output power	Pass
6	§ 15.247(e)	Power Spectral Density	Pass
7	§ 15.247(d)	Conducted emission at the band edge	Pass
8	§ 15.247(d)	Conducted spurious emissions	Pass
9	/	Duty Cycle	Pass

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2023-04-26	2024-04-25
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2023-05-05	2024-05-04
3	Artificial Mains Network	Schwarzbeck	NSLK 8127	1001	2023-05-06	2024-05-05
Occupied Bandwidth						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Maximum Conducted Output Power						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Power Spectral Density						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Emissions in non-restricted frequency bands						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Band edge emissions (Radiated)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-05-26	2024-05-25
3	Amplifier	Agilent	8449B	3008A01120	2023-05-26	2024-05-25
4	Multi-device Controller	TuoPu	TPMDC	/	/	/
5	MXA signal analyzer	Agilent	N9020A	MY54440859	2023-05-05	2024-05-04
Emissions in restricted frequency bands (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Amplifier	Hewlett-Packard	8447F	3113A06184	2023-04-26	2024-04-25
4	Multi-device Controller	TuoPu	TPMDC	/	/	/
Emissions in restricted frequency bands (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-05-26	2024-05-25
3	Amplifier	Agilent	8449B	3008A01120	2023-05-26	2024-05-25

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
4	Multi-device Controller	TuoPu	TPMDC	/	/	/
5	MXA signal analyzer	Agilent	N9020A	MY54440859	2023-05-05	2024-05-04

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Description of the antenna of EUT:	The antenna of the EUT is permanently attached.
Conclusion:	The EUT complies with the requirement of FCC PART 15.203.

6 Radio Spectrum Matter Test Results (RF)


6.1 Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

6.1.1 E.U.T. Operation:


Operating Environment:			
Temperature:	23.5 °C	Humidity:	65 %
		Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1		
Final test mode:	Mode1		

6.1.2 Test Setup Diagram:

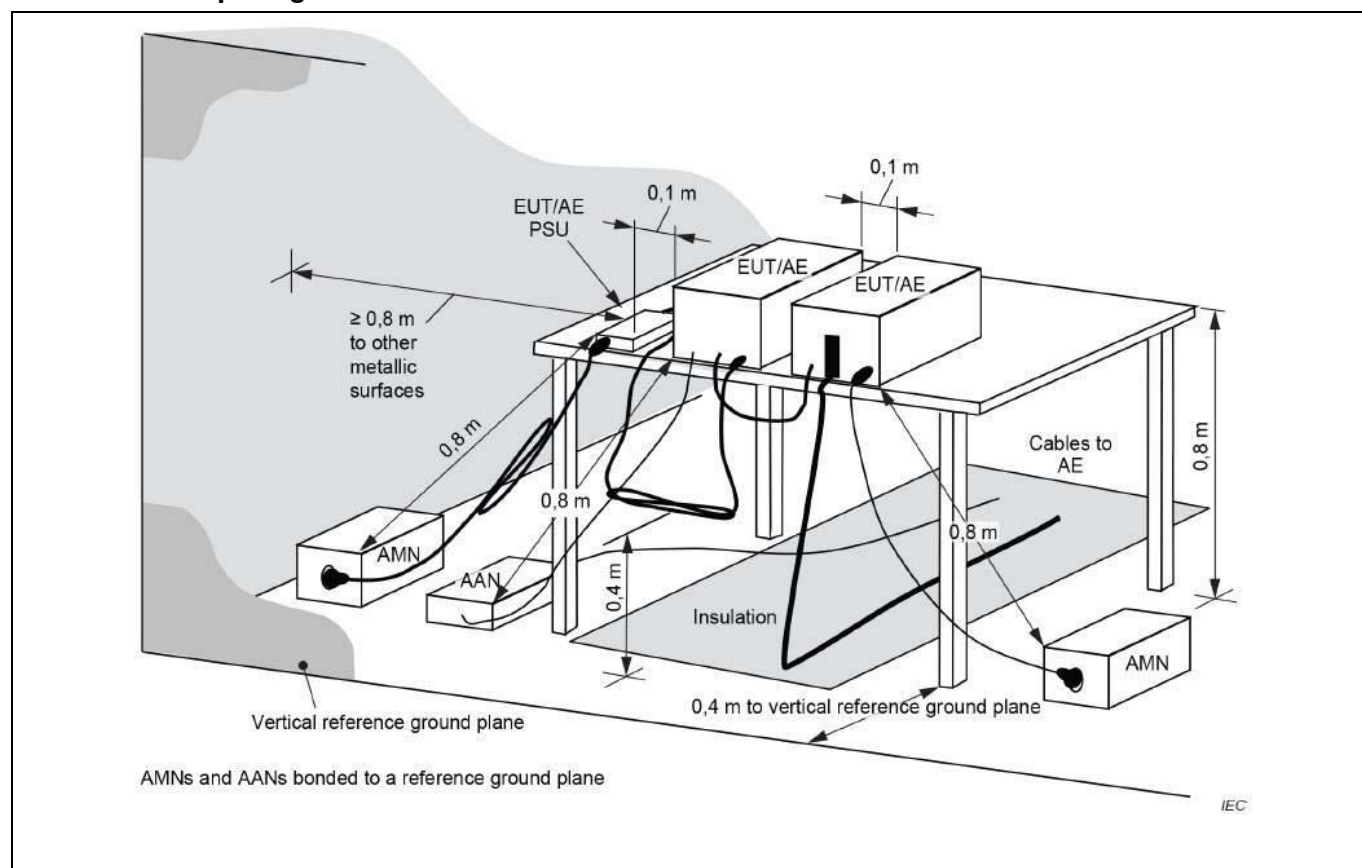


6.1.3 Test Data:

Mode1 / Line: Line / Band: 2.4G / BW: 2 / CH: 2402/ 120V/60Hz

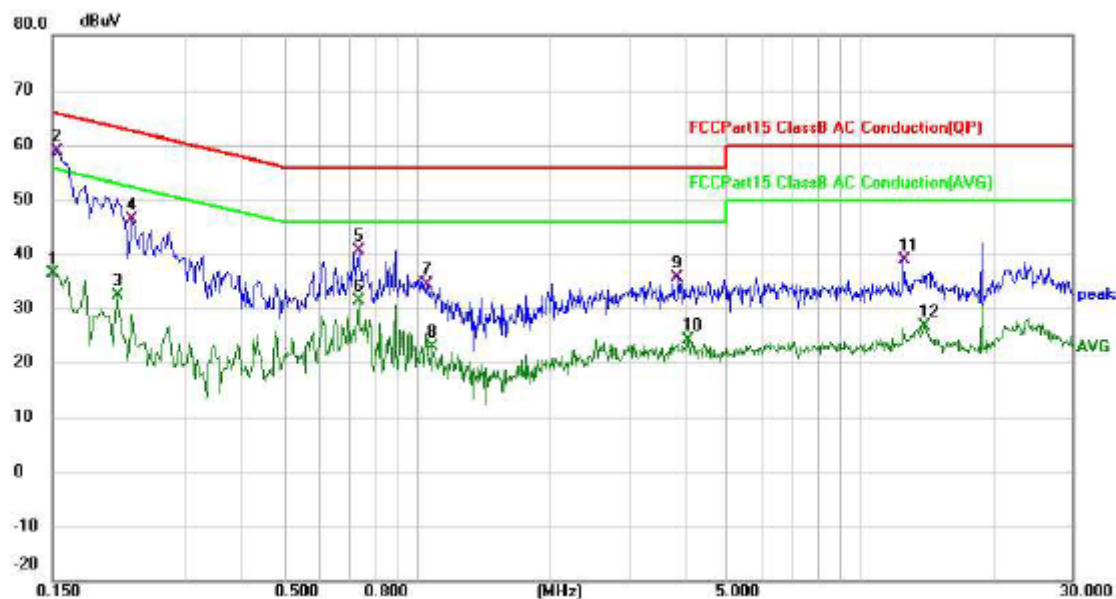


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1500	26.22	10.28	36.50	56.00	-19.50	AVG	
2	*	0.1539	48.49	10.28	58.77	65.79	-7.02	QP	
3		0.2100	21.63	10.70	32.33	53.21	-20.88	AVG	
4		0.2260	35.69	10.73	46.42	62.60	-16.18	QP	
5		0.7378	28.89	11.85	40.74	56.00	-15.26	QP	
6		0.7378	19.54	11.85	31.39	46.00	-14.61	AVG	
7		1.0500	21.98	12.49	34.47	56.00	-21.53	QP	
8		1.0859	10.34	12.56	22.90	46.00	-23.10	AVG	
9		3.8660	25.24	10.27	35.51	56.00	-20.49	QP	
10		4.0739	13.90	10.27	24.17	46.00	-21.83	AVG	
11		12.5017	28.30	10.46	38.76	60.00	-21.24	QP	
12		13.9300	16.26	10.49	26.75	50.00	-23.25	AVG	

Mode1 / Line: Neutral / Band: 2.4G / BW: 2/ 2402/ 120V/60Hz

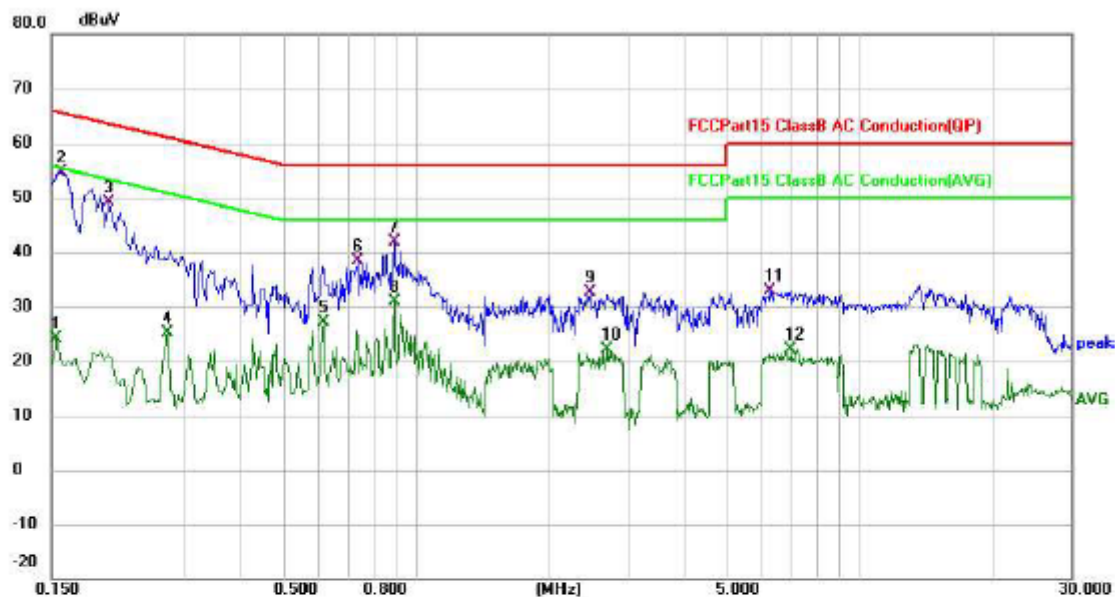


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1539	13.73	10.28	24.01	55.79	-31.78	AVG	
2	*	0.1580	44.35	10.28	54.63	65.57	-10.94	QP	
3		0.2020	38.55	10.60	49.15	63.53	-14.38	QP	
4		0.2740	14.29	10.76	25.05	51.00	-25.95	AVG	
5		0.6179	15.49	11.60	27.09	46.00	-18.91	AVG	
6		0.7378	26.43	11.86	38.29	56.00	-17.71	QP	
7		0.8940	29.68	12.13	41.81	56.00	-14.19	QP	
8		0.8940	18.78	12.13	30.91	46.00	-15.09	AVG	
9		2.4660	22.15	10.39	32.54	56.00	-23.46	QP	
10		2.6939	11.67	10.35	22.02	46.00	-23.98	AVG	
11		6.2857	22.51	10.28	32.79	60.00	-27.21	QP	
12		7.0057	11.92	10.28	22.20	50.00	-27.80	AVG	

Mode1 / Line: Line / Band: 2.4G / BW: 2 / CH: 2402/ 240V/60Hz

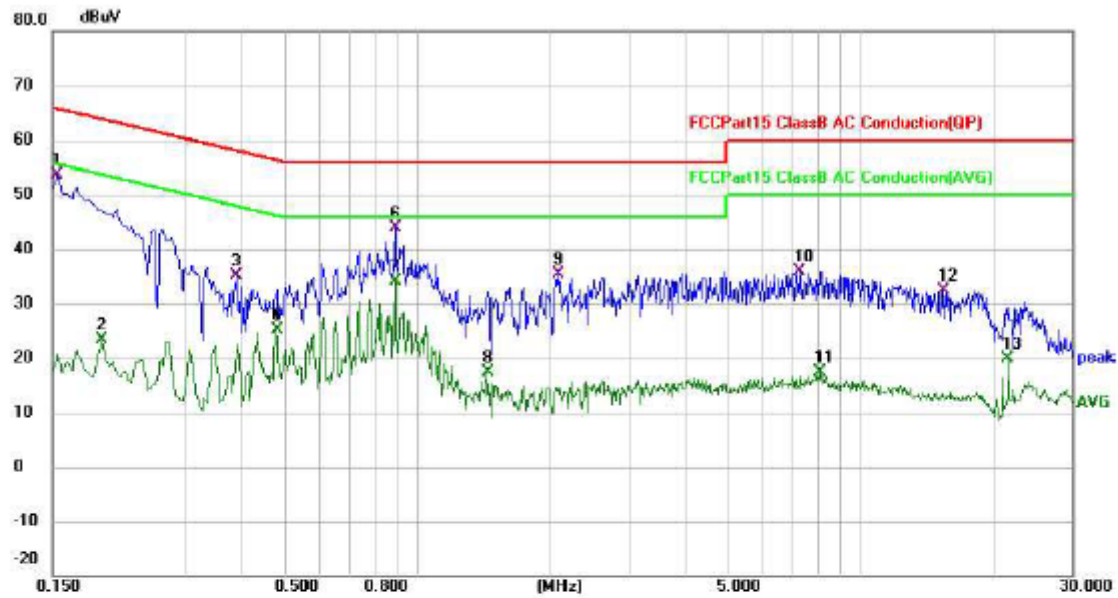

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1539	43.27	10.28	53.55	65.79	-12.24	QP	
2		0.1940	12.70	10.59	23.29	53.86	-30.57	AVG	
3		0.3899	24.22	11.02	35.24	58.07	-22.83	QP	
4		0.4780	13.91	11.26	25.17	46.37	-21.20	AVG	
5		0.4780	13.91	11.26	25.17	46.37	-21.20	AVG	
6		0.8900	31.73	12.13	43.86	56.00	-12.14	QP	
7	*	0.8900	21.92	12.13	34.05	46.00	-11.95	AVG	
8		1.4340	4.20	13.25	17.45	46.00	-28.55	AVG	
9		2.0780	24.80	10.46	35.26	56.00	-20.74	QP	
10		7.3100	25.68	10.29	35.97	60.00	-24.03	QP	
11		8.0740	7.11	10.30	17.41	50.00	-32.59	AVG	
12		15.3340	21.89	10.51	32.40	60.00	-27.60	QP	
13		21.5500	9.04	10.72	19.76	50.00	-30.24	AVG	

Mode1 / Line: Neutral / Band: 2.4G / BW: 2/CH: 2402/ 240V/60Hz

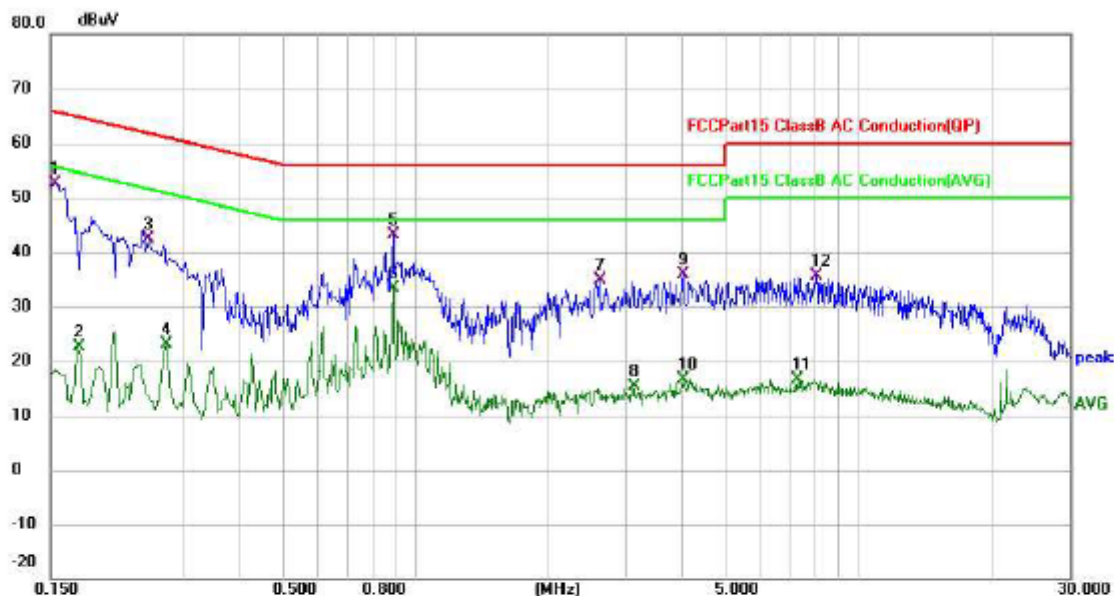

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1539	42.32	10.28	52.60	65.79	-13.19	QP	
2		0.1729	12.27	10.28	22.55	54.82	-32.27	AVG	
3		0.2500	31.70	10.77	42.47	61.76	-19.29	QP	
4		0.2740	12.23	10.81	23.04	51.00	-27.96	AVG	
5		0.8900	31.03	12.17	43.20	56.00	-12.80	QP	
6	*	0.8900	21.19	12.17	33.36	46.00	-12.64	AVG	
7		2.6020	24.66	10.16	34.82	56.00	-21.18	QP	
8		3.0980	5.17	10.27	15.44	46.00	-30.56	AVG	
9		4.0220	25.63	10.27	35.90	56.00	-20.10	QP	
10		4.0220	6.48	10.27	16.75	46.00	-29.25	AVG	
11		7.2619	6.40	10.29	16.69	50.00	-33.31	AVG	
12		8.0500	25.29	10.33	35.62	60.00	-24.38	QP	


6.2 Occupied Bandwidth

Test Requirement:	Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Limit:	Section (a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	DTS bandwidth
Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	60 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1,				
Final test mode:	Mode1,				

6.2.2 Test Setup Diagram:

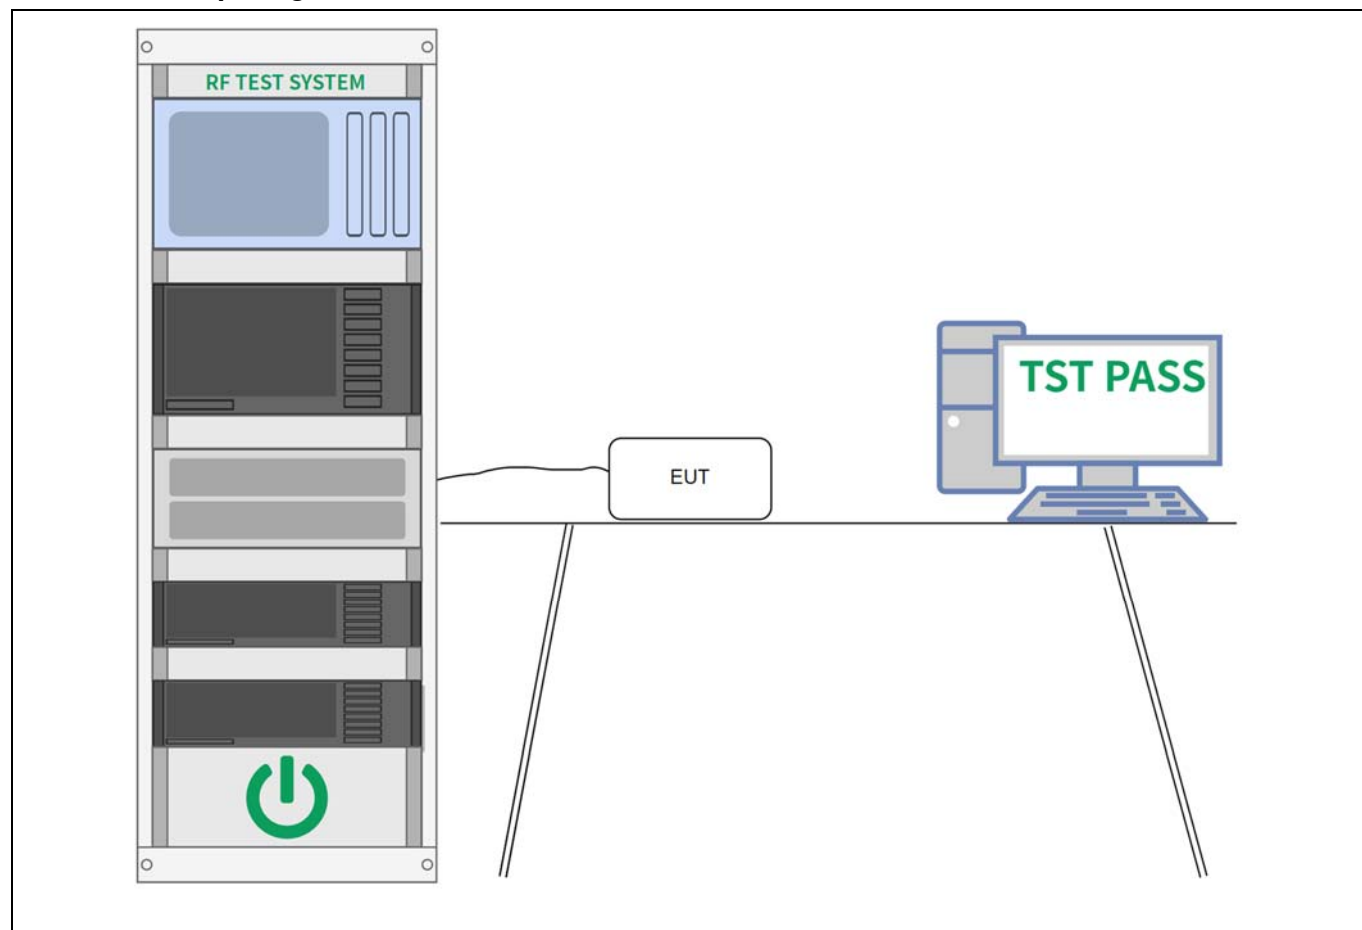

6.2.3 Test Data:

Please Refer to Appendix for Details.


6.3 Maximum Conducted Output Power

Test Requirement:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Limit:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	Maximum peak conducted output power
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power

6.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	60 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				

6.3.2 Test Setup Diagram:

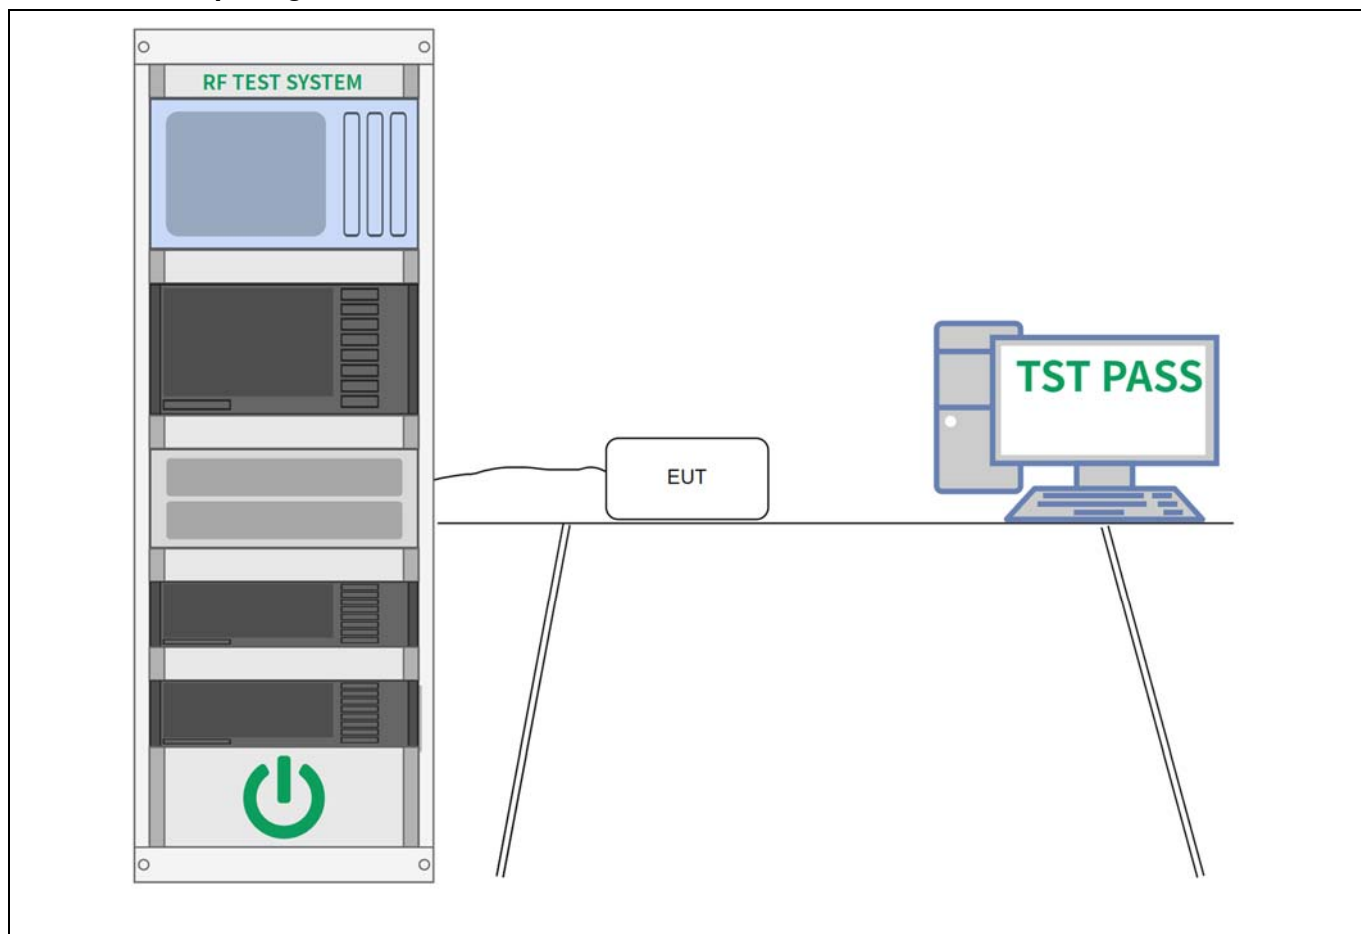

6.3.3 Test Data:

Please Refer to Appendix for Details.


6.4 Power Spectral Density

Test Requirement:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	Maximum power spectral density level in the fundamental emission

6.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	60 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				

6.4.2 Test Setup Diagram:

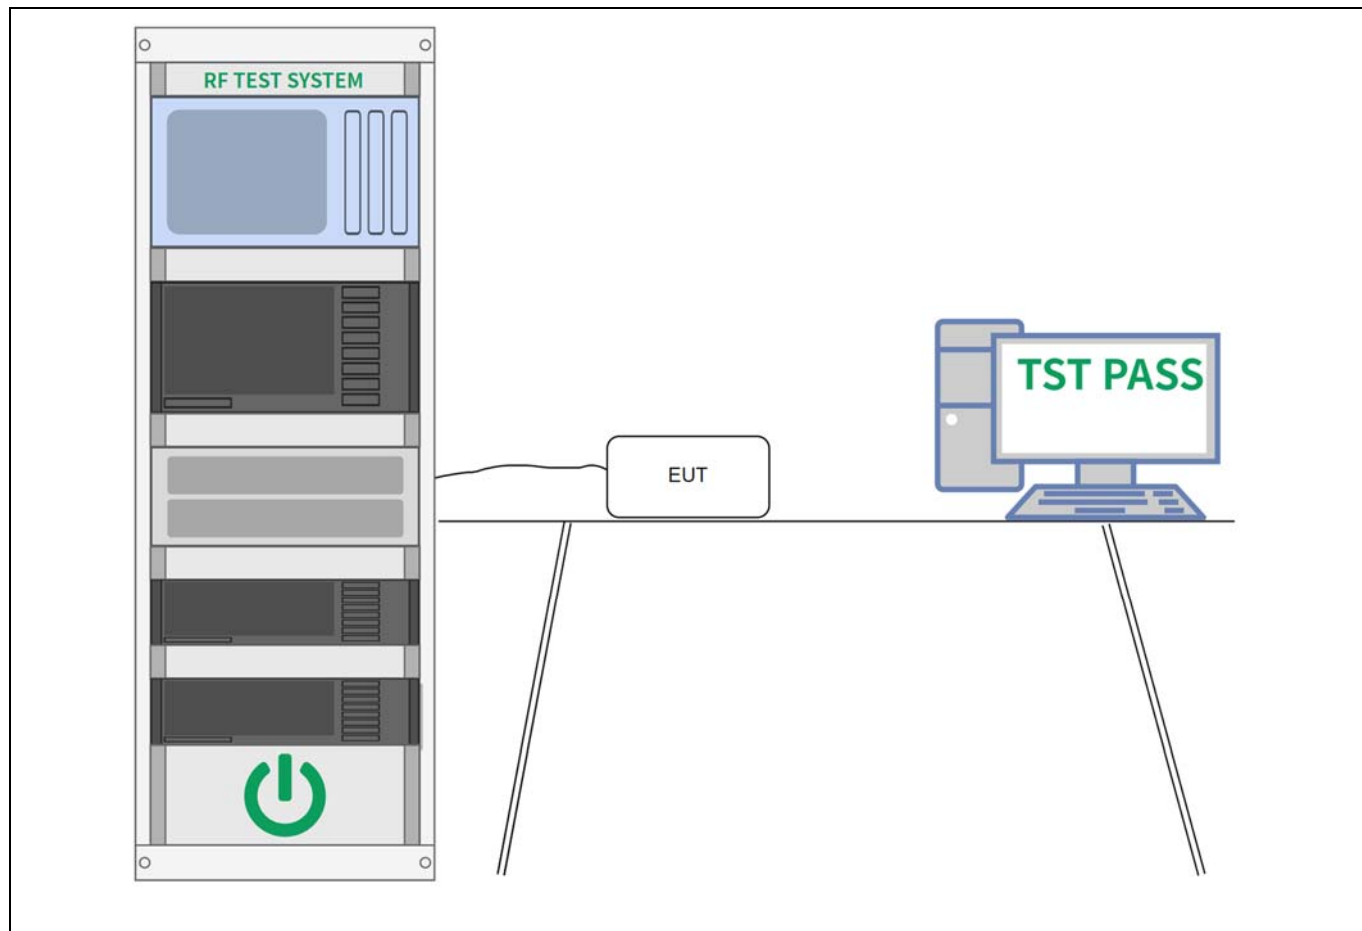

6.4.3 Test Data:

Please Refer to Appendix for Details.


6.5 Emissions in non-restricted frequency bands

Test Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	Emissions in nonrestricted frequency bands
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.5.1 E.U.T. Operation:

Operating Environment:			
Temperature:	25 °C	Humidity:	60 %
Atmospheric Pressure:	101 kPa		
Pre test mode:	Mode1		
Final test mode:	Mode1		

6.5.2 Test Setup Diagram:

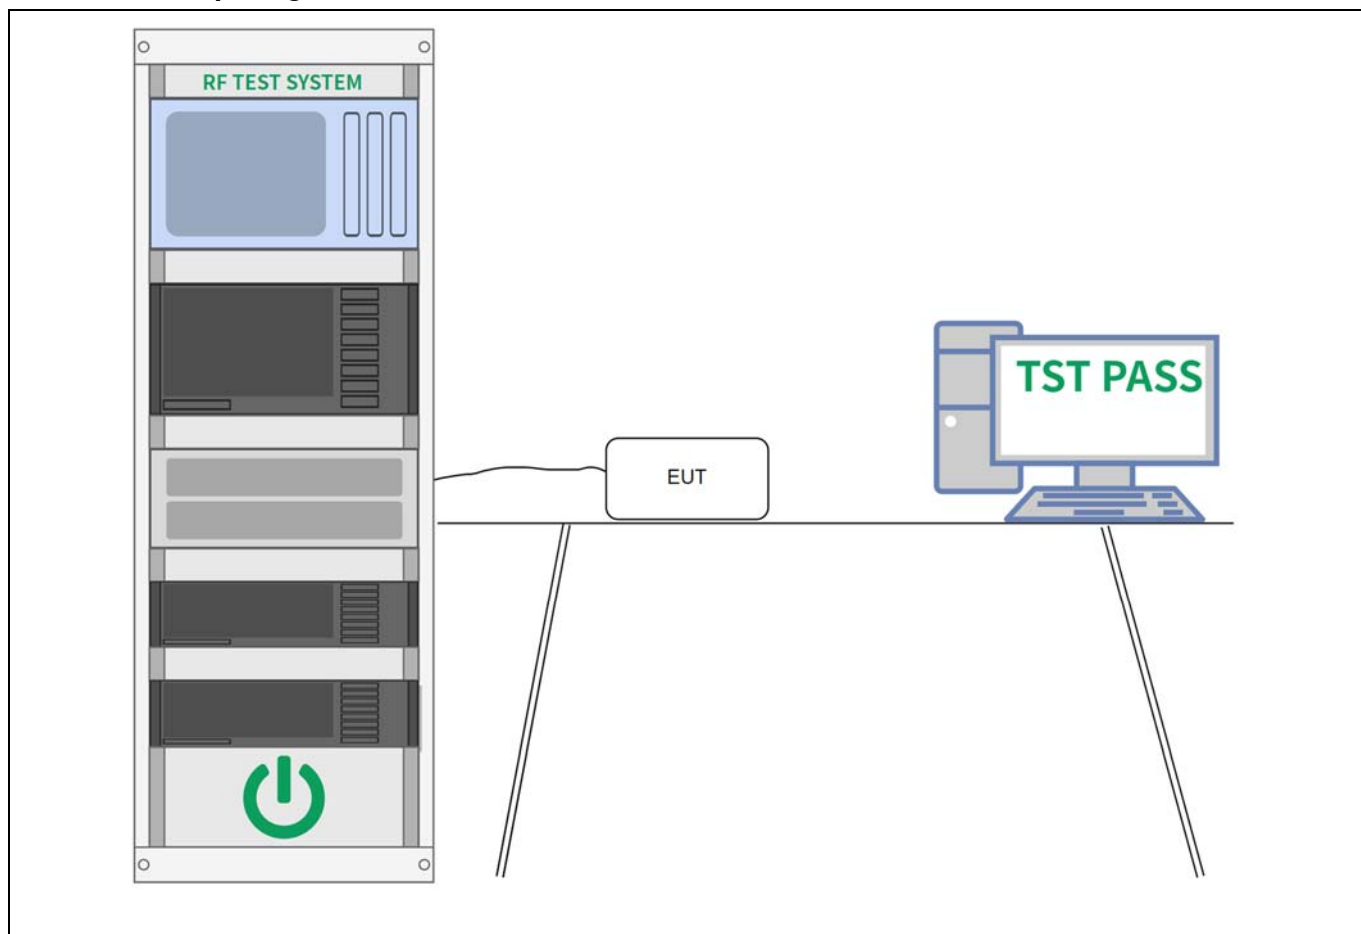

6.5.3 Test Data:

Please Refer to Appendix for Details.

6.6 Band edge emissions (Radiated)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Test Method:	Radiated emissions tests		
Procedure:	ANSI C63.10-2013 section 6.10		

6.6.1 E.U.T. Operation:

Operating Environment:			
Temperature:	25 °C	Humidity:	50 %
		Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1		
Final test mode:	Mode1		

6.6.2 Test Data:

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 2402

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	48.59	-8.08	40.51	74.00	-33.49	peak
2		2310.000	37.29	-8.08	29.21	54.00	-24.79	AVG
3	*	2390.000	61.39	-7.71	53.68	74.00	-20.32	peak
4		2390.000	38.90	-7.71	31.19	54.00	-22.81	AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 2402

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	46.48	-8.08	38.40	74.00	-35.60	peak
2		2310.000	37.17	-8.08	29.09	54.00	-24.91	AVG
3		2390.000	47.66	-7.71	39.95	74.00	-34.05	peak
4	*	2390.000	37.52	-7.71	29.81	54.00	-24.19	AVG

Mode1/ Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 2480


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	62.30	-7.24	55.06	74.00	-18.94	peak
2		2483.500	39.54	-7.24	32.30	54.00	-21.70	AVG
3		2500.000	49.12	-7.17	41.95	74.00	-32.05	peak
4		2500.000	37.68	-7.17	30.51	54.00	-23.49	AVG

Mode1/ Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 2480

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	75.20	-7.24	67.96	74.00	-6.04	peak
2		2483.500	47.96	-7.24	40.72	54.00	-13.28	AVG
3		2500.000	61.25	-7.17	54.08	74.00	-19.92	peak
4		2500.000	38.83	-7.17	31.66	54.00	-22.34	AVG

6.7 Emissions in restricted frequency bands (below 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.		
Test Method:	Radiated emissions tests		
Procedure:	ANSI C63.10-2013 section 6.6.4		

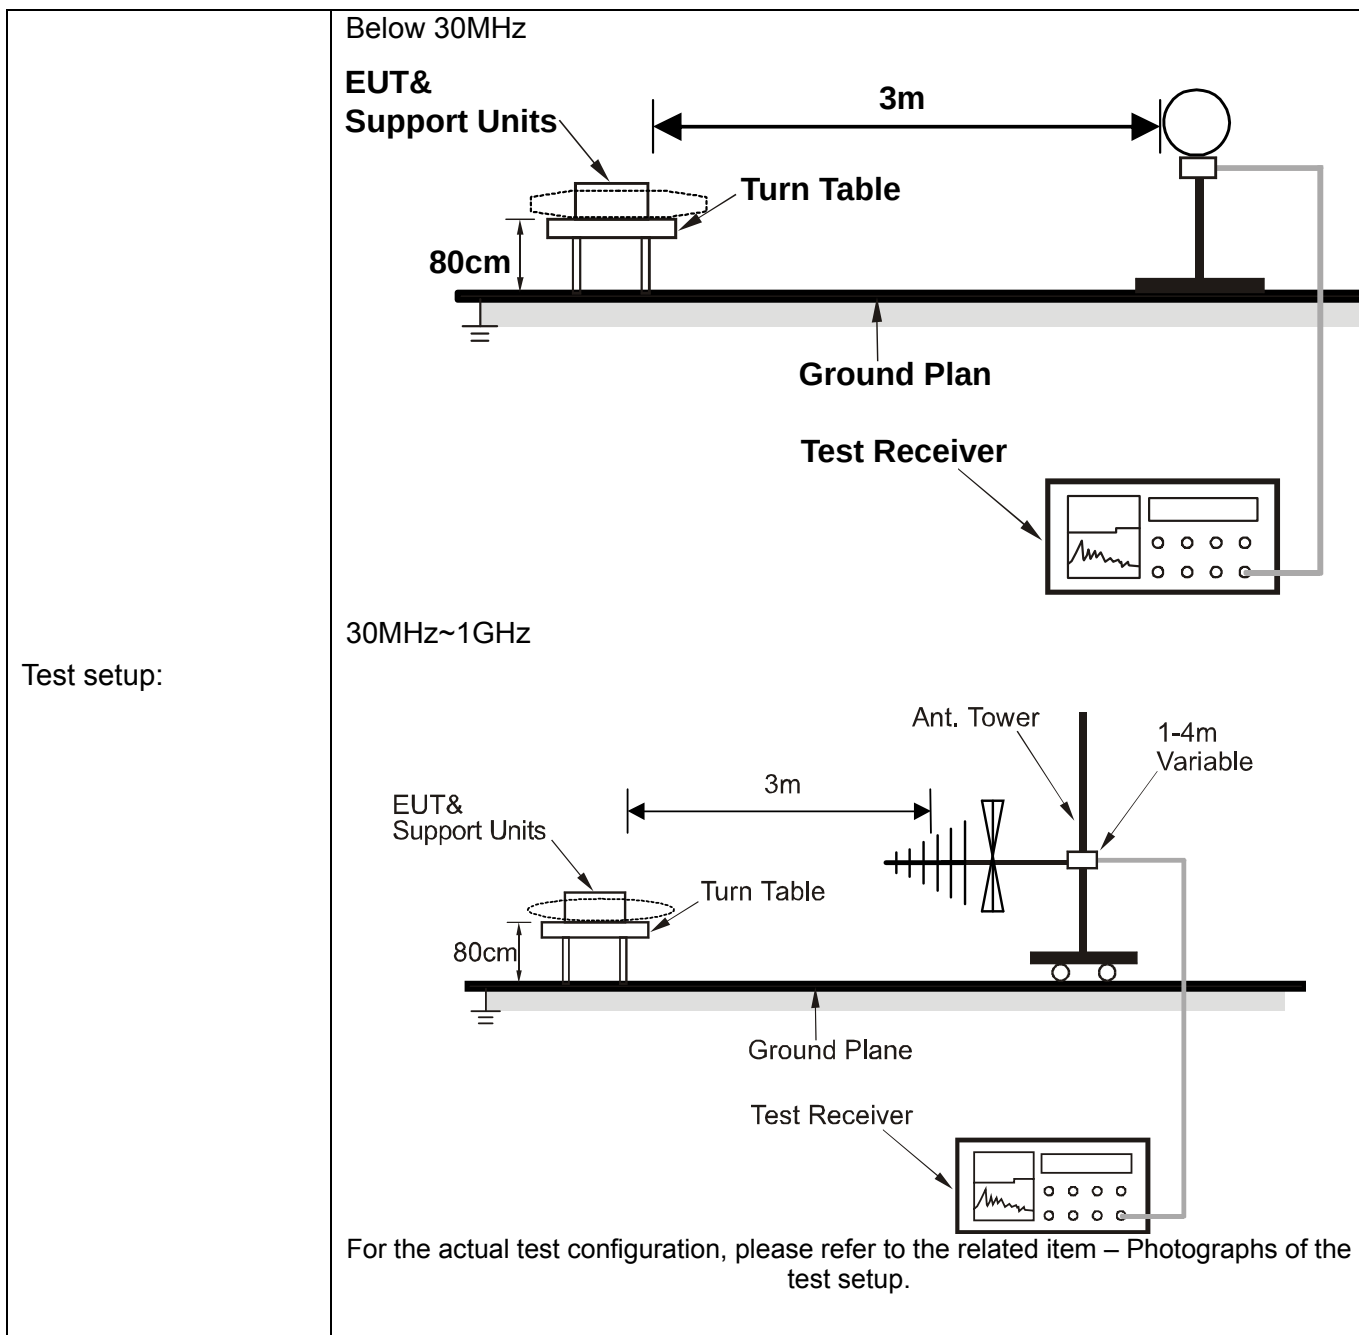

6.7.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	50 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				
Note:					
The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.					
All modes of operation of the EUT were investigated, and only the worst-case results are reported.					
There were no emissions found below 30MHz within 20dB of the limit.					

6.7.2 Test Data:


Mode1 Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 2480


Microtest
 微 测 检 测

 Shenzhen Microtest Co., Ltd.
 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe
 Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Radiated Emission Measurement

Project No.: BLE FCC 低频杂散	Data :#1	2023/6/30	19:28:05
Site : RE Chamber 1	Polarization: Horizontal	Temperature: 26 (C)	
Limit: FCC 15C Radiation Below 1GHz	Power:	Humidity: 54 %RH	
EUT: Label Printer			
M/N: T200-BT			
Mode: BLE1M-2480			
Note: 默认功率等级			

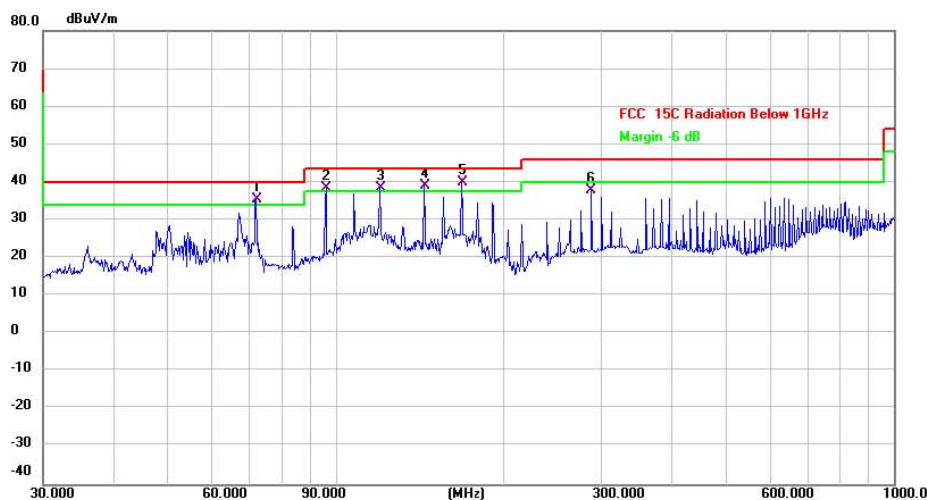

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	72.0843	45.64	-10.08	35.56	40.00	-4.44	QP	
2	!	96.0986	46.65	-8.13	38.52	43.50	-4.98	QP	
3	!	119.8556	48.58	-10.20	38.38	43.50	-5.12	QP	
4	!	143.8295	50.30	-11.28	39.02	43.50	-4.48	QP	
5	*	167.8243	51.39	-11.57	39.82	43.50	-3.68	QP	
6		287.9904	44.39	-6.67	37.72	46.00	-8.28	QP	

*:Maximum data x:Over limit !:over margin

<Reference Only

Receiver:	ESCL_1	Spectrum Analyzer:	ESCI
Antenna:	VULB 9163-E120-210828	Engineer Signature:	Trump
Amplifier:	预放_1GHz以下_8447D(MTi-E121)		

File: BLE FCC 低频杂散\Data :#1

Page: 1


Mode1/ Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 2480


Microtest
 微 测 检 测

 Shenzhen Microtest Co., Ltd.
 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe
 Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Radiated Emission Measurement

Project No.: BLE FCC 低频杂散	Data :#2	2023/6/30	19:29:28
Site : RE Chamber 1	Polarization: Vertical	Temperature: 26 (C)	
Limit: FCC 15C Radiation Below 1GHz	Power:	Humidity: 54 %RH	
EUT: Label Printer			
M/N: T200-BT			
Mode: BLE1M-2480			
Note: 默认功率等级			

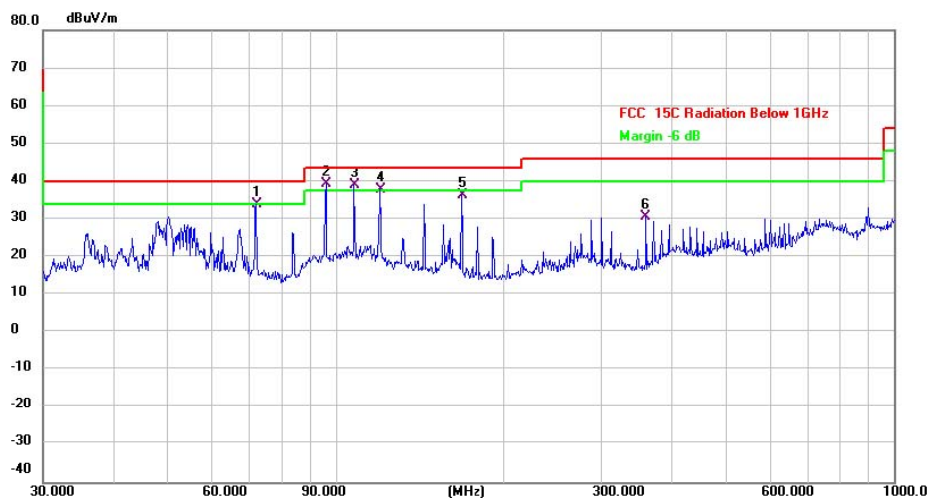

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		72.0843	43.94	-10.08	33.86	40.00	-6.14	QP	
2	*	96.0986	47.37	-8.13	39.24	43.50	-4.26	QP	
3	!	107.8877	47.36	-8.42	38.94	43.50	-4.56	QP	
4	!	119.8556	48.02	-10.20	37.82	43.50	-5.68	QP	
5		167.8243	47.99	-11.57	36.42	43.50	-7.08	QP	
6		360.4476	37.64	-7.04	30.60	46.00	-15.40	QP	

*:Maximum data x:Over limit !:over margin

<Reference Only

Receiver: ESCI_1

Spectrum Analyzer: ESCI

Antenna: VULB 9163-E120-210828


Engineer Signature: Trump

Amplifier: 预放_1GHz以下_8447D(MTi-E121)

File: BLE FCC 低频杂散\Data :#2

Page: 1

6.8 Emissions in restricted frequency bands (above 1GHz)

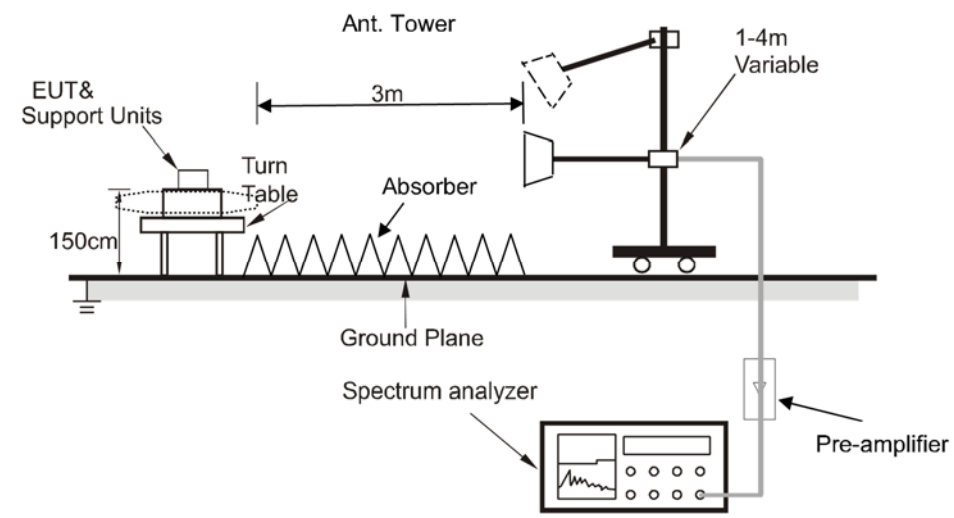Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Test Method:	Radiated emissions tests		
Procedure:	ANSI C63.10-2013 section 6.6.4		
Test setup:	Above 1GHz  For the actual test configuration, please refer to the related item – Photographs of the test setup.		

6.8.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	50 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1				
Final test mode:	Mode1				

6.8.2 Test Data:

Mode1 / Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 2402

	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	4804.000	57.33	0.74	58.07	74.00	-15.93	peak
2 *	4804.000	53.53	0.74	54.27	54.00	0.27	AVG
3	7206.000	39.93	6.02	45.95	74.00	-28.05	peak
4	7206.000	33.51	6.02	39.53	54.00	-14.47	AVG
5	9608.000	40.73	5.88	46.61	74.00	-27.39	peak
6	9608.000	34.28	5.88	40.16	54.00	-13.84	AVG

Mode1 / Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 2402

	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	4804.000	48.64	0.74	49.38	74.00	-24.62	peak
2 *	4804.000	44.42	0.74	45.16	54.00	-8.84	AVG
3	7206.000	39.77	6.02	45.79	74.00	-28.21	peak
4	7206.000	33.35	6.02	39.37	54.00	-14.63	AVG
5	9608.000	41.28	5.88	47.16	74.00	-26.84	peak
6	9608.000	34.93	5.88	40.81	54.00	-13.19	AVG

Mode1/ Polarization: Horizontal / Band: 2.4G / BW: 2 / CH: 2440

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4880.000	45.21	1.04	46.25	74.00	-27.75	peak
2	*	4880.000	41.31	1.04	42.35	54.00	-11.65	AVG
3		7320.000	39.90	5.93	45.83	74.00	-28.17	peak
4		7320.000	33.38	5.93	39.31	54.00	-14.69	AVG
5		9760.000	40.72	6.55	47.27	74.00	-26.73	peak
6		9760.000	34.63	6.55	41.18	54.00	-12.82	AVG

Mode1/ Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 2440

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4880.000	42.16	1.04	43.20	74.00	-30.80	peak
2		4880.000	39.14	1.04	40.18	54.00	-13.82	AVG
3		7320.000	39.61	5.93	45.54	74.00	-28.46	peak
4		7320.000	33.29	5.93	39.22	54.00	-14.78	AVG
5		9760.000	40.95	6.55	47.50	74.00	-26.50	peak
6	*	9760.000	34.67	6.55	41.22	54.00	-12.78	AVG

Mode1/ olarization: Horizontal / Band: 2.4G / BW: 2 / CH: 2480

	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	4960.000	65.92	1.50	67.42	74.00	-6.58	peak
2 *	4960.000	63.66	1.50	65.16	54.00	11.16	AVG
3	7440.000	44.86	5.61	50.47	74.00	-23.53	peak
4	7440.000	42.90	5.61	48.51	54.00	-5.49	AVG
5	9920.000	43.26	6.10	49.36	74.00	-24.64	peak
6	9920.000	39.05	6.10	45.15	54.00	-8.85	AVG

Mode1/ Polarization: Vertical / Band: 2.4G / BW: 2 / CH: 2480

	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	4960.000	57.46	1.50	58.96	74.00	-15.04	peak
2 *	4960.000	53.24	1.50	54.74	54.00	0.74	AVG
3	7440.000	45.52	5.61	51.13	74.00	-22.87	peak
4	7440.000	42.75	5.61	48.36	54.00	-5.64	AVG
5	9920.000	42.87	6.10	48.97	74.00	-25.03	peak
6	9920.000	36.45	6.10	42.55	54.00	-11.45	AVG

Photographs of the test setup

Refer to Appendix - Test Setup Photos .

Photographs of the EUT

Refer to Appendix - EUT Photos

Appendix

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.696	0.5	PASS
		2440	0.704	0.5	PASS
		2480	0.704	0.5	PASS

Test Graphs




Appendix B: Maximum conducted output power

Test Result-Peak

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	5.42	≤30	PASS
		2440	5.29	≤30	PASS
		2480	4.66	≤30	PASS

Test Graphs

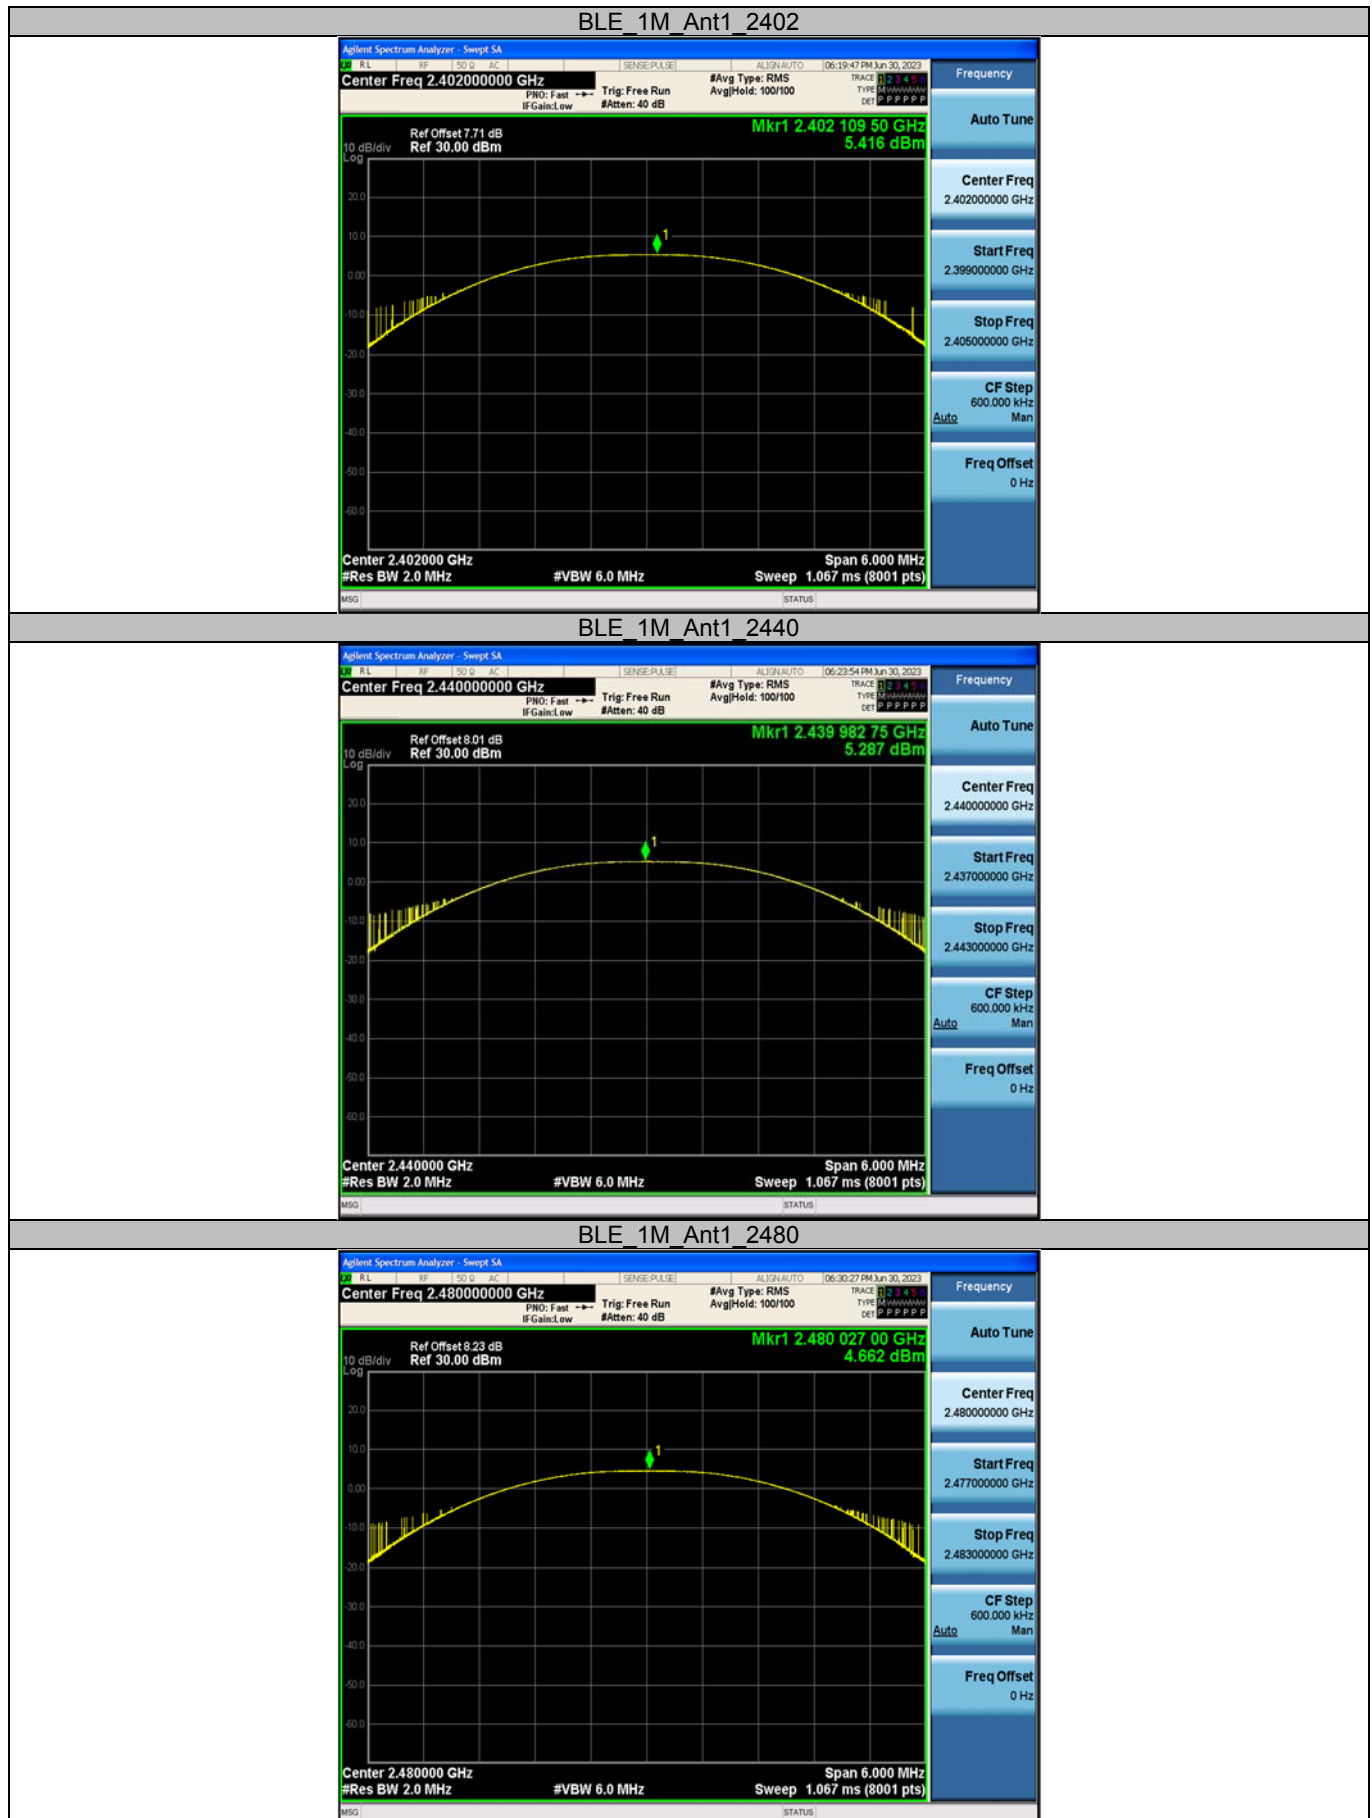


Appendix C: Maximum power spectral density

Test Result


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-10.09	≤8.00	PASS
		2440	-10.13	≤8.00	PASS
		2480	-10.68	≤8.00	PASS

Test Graphs

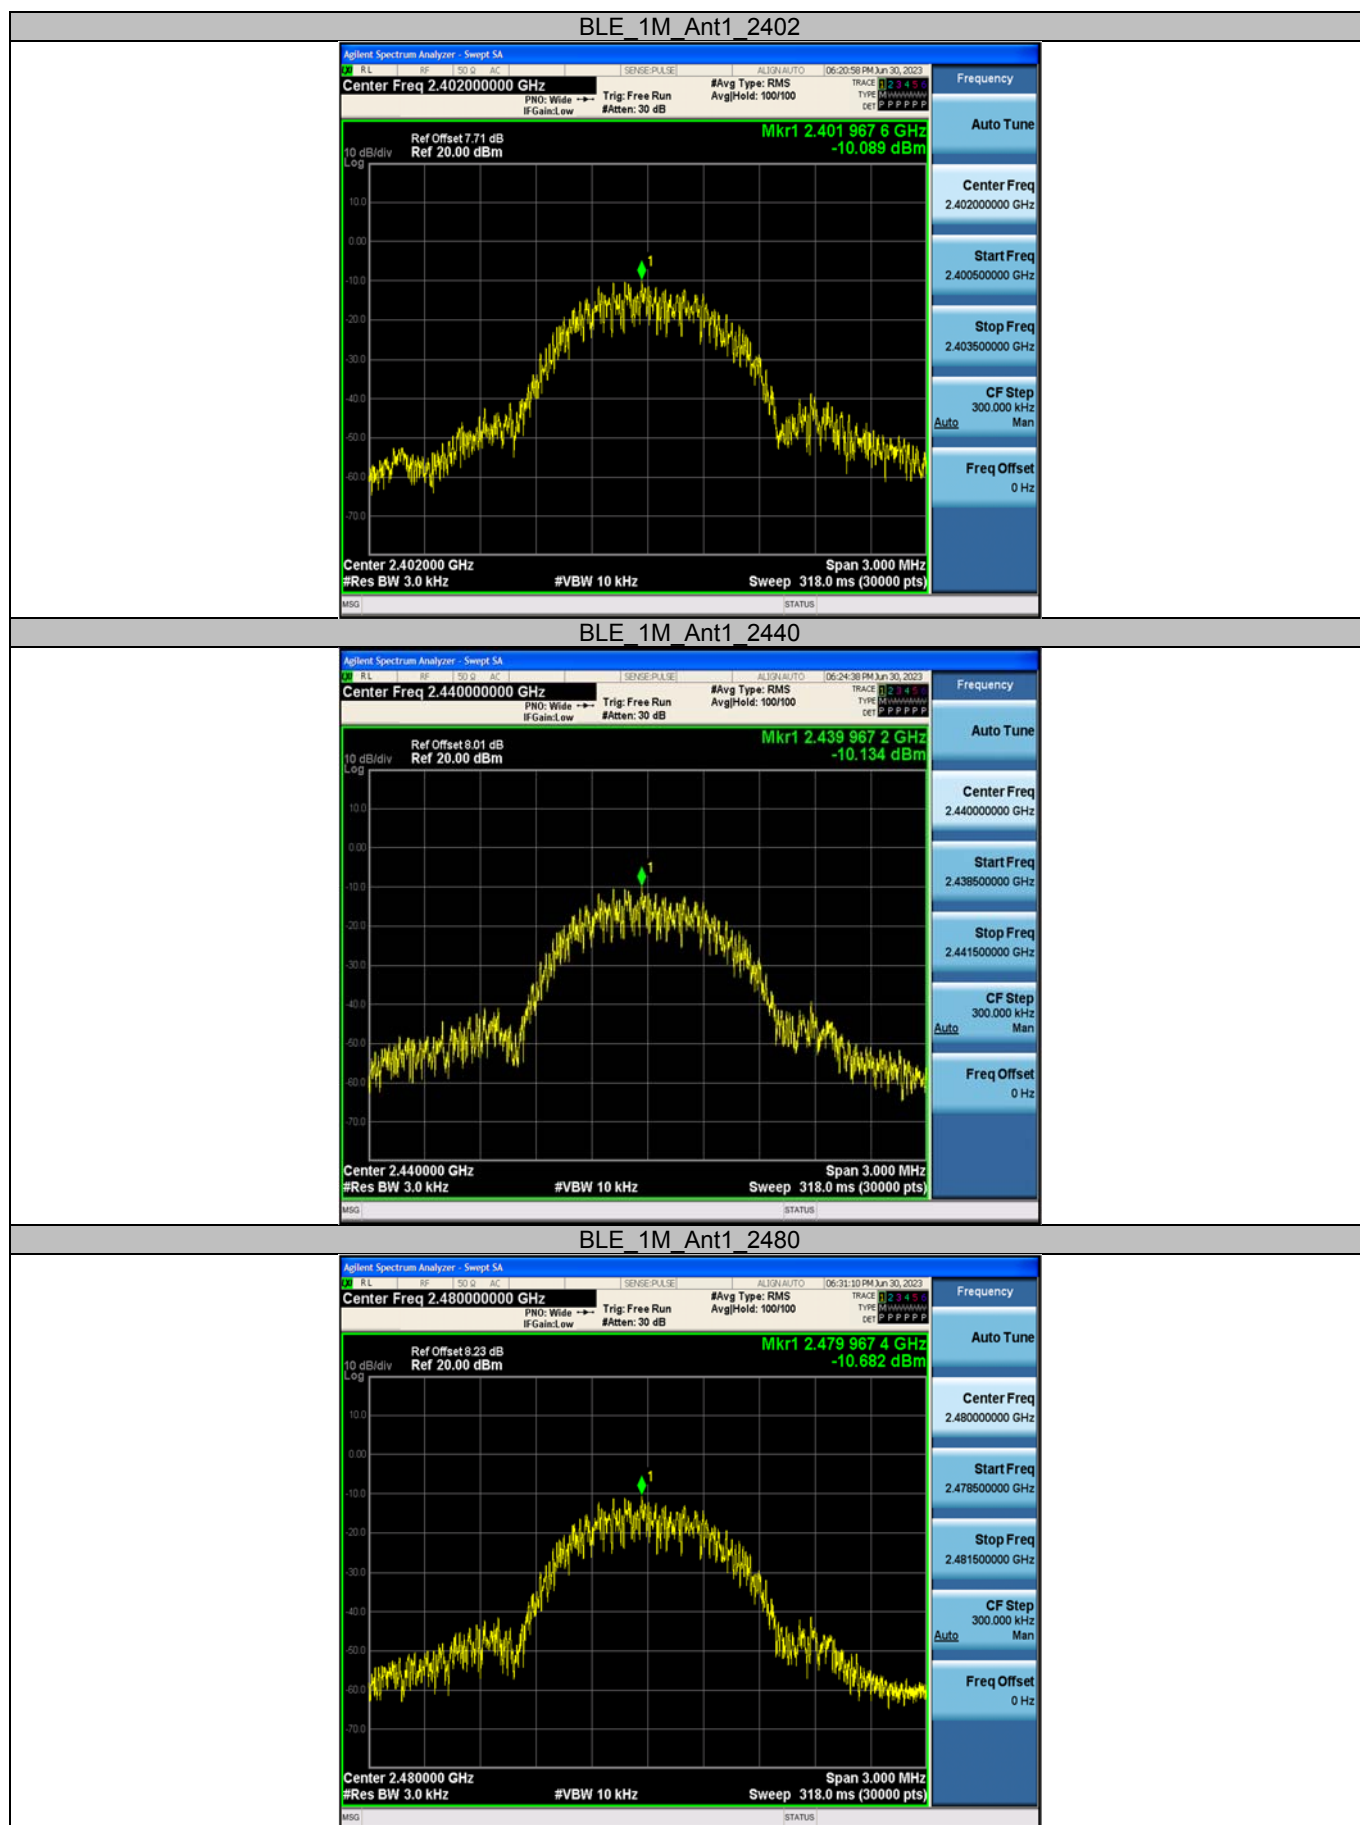

Appendix D: Band edge measurements

Test Graphs

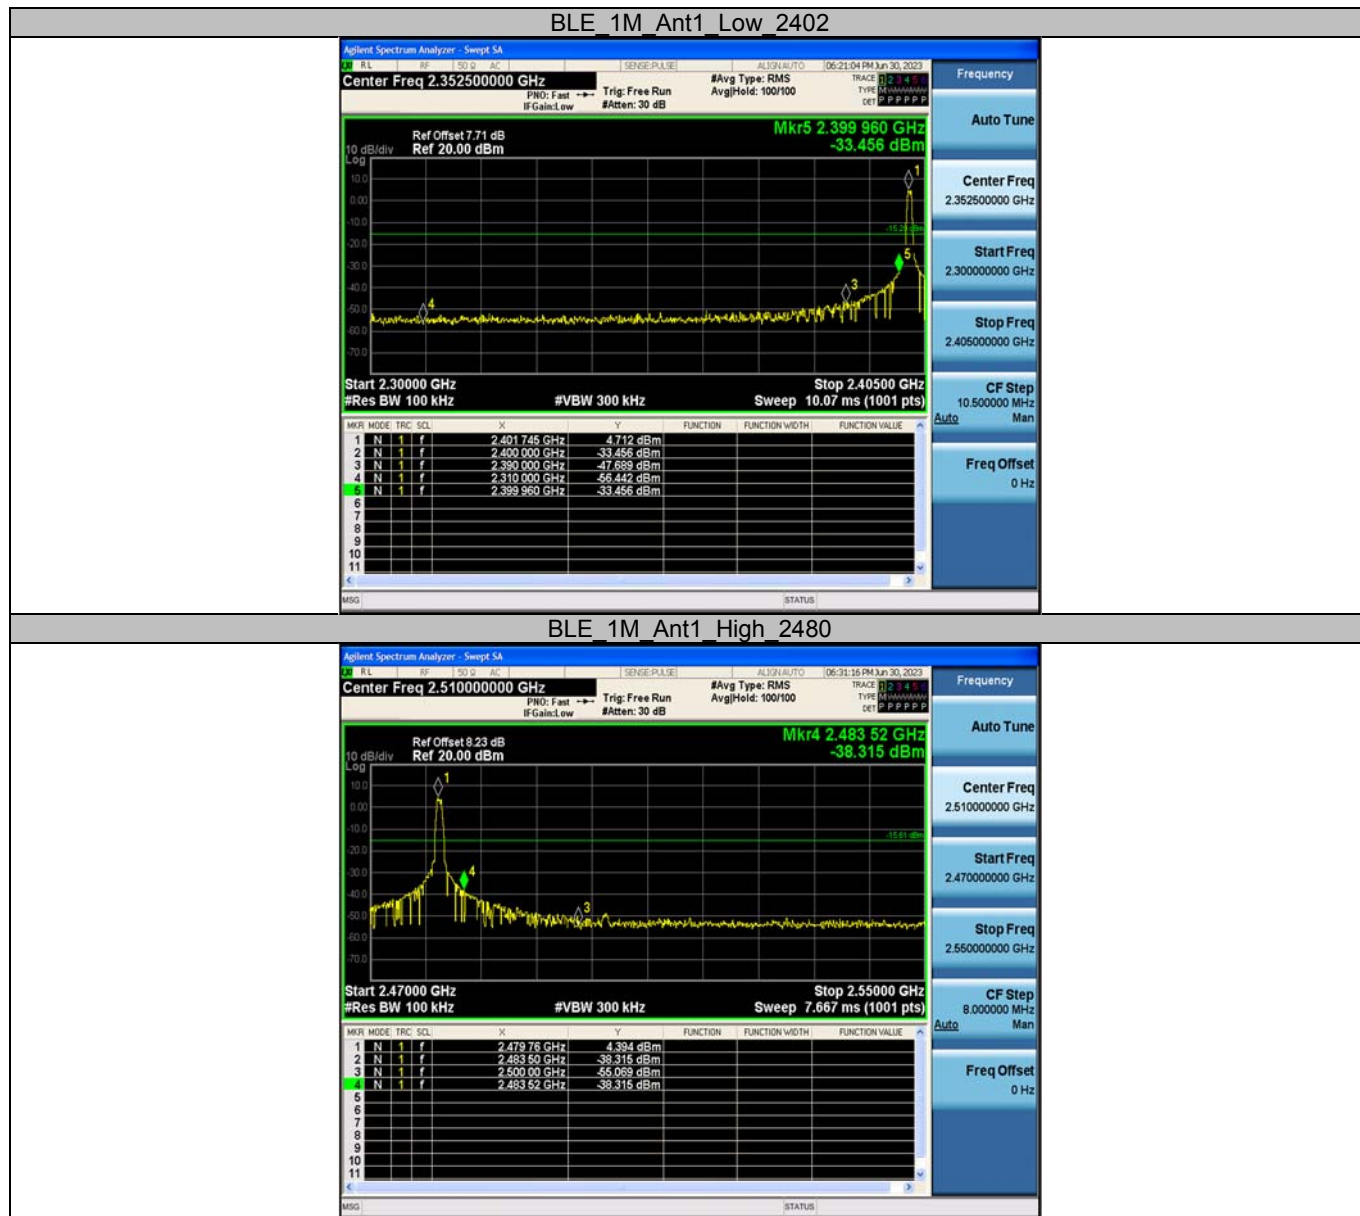

Appendix E: Conducted Spurious Emission


Test Graphs




BLE 1M Ant1 2440 0~Reference




BLE 1M Ant1 2440 30~1000

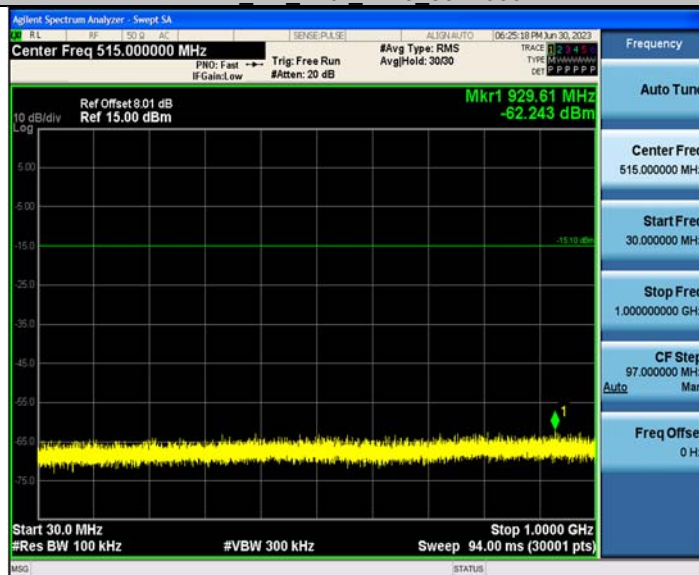

BLE 1M Ant1 2440 1000~26500

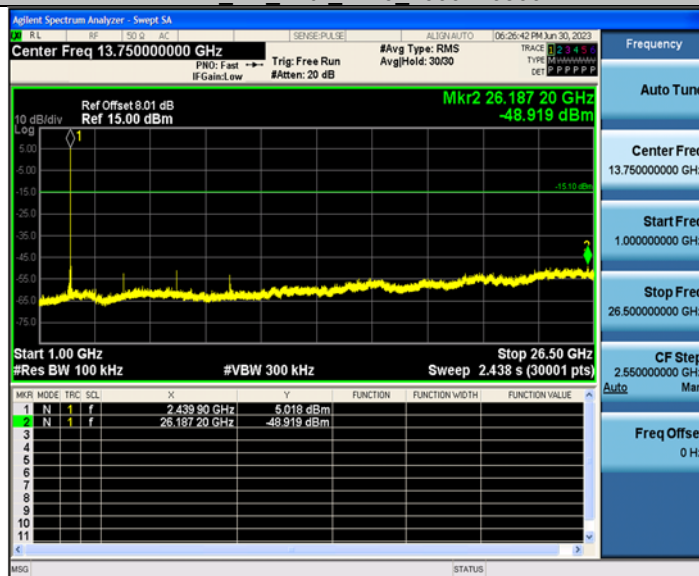

BLE 1M Ant1 2480 0~Reference

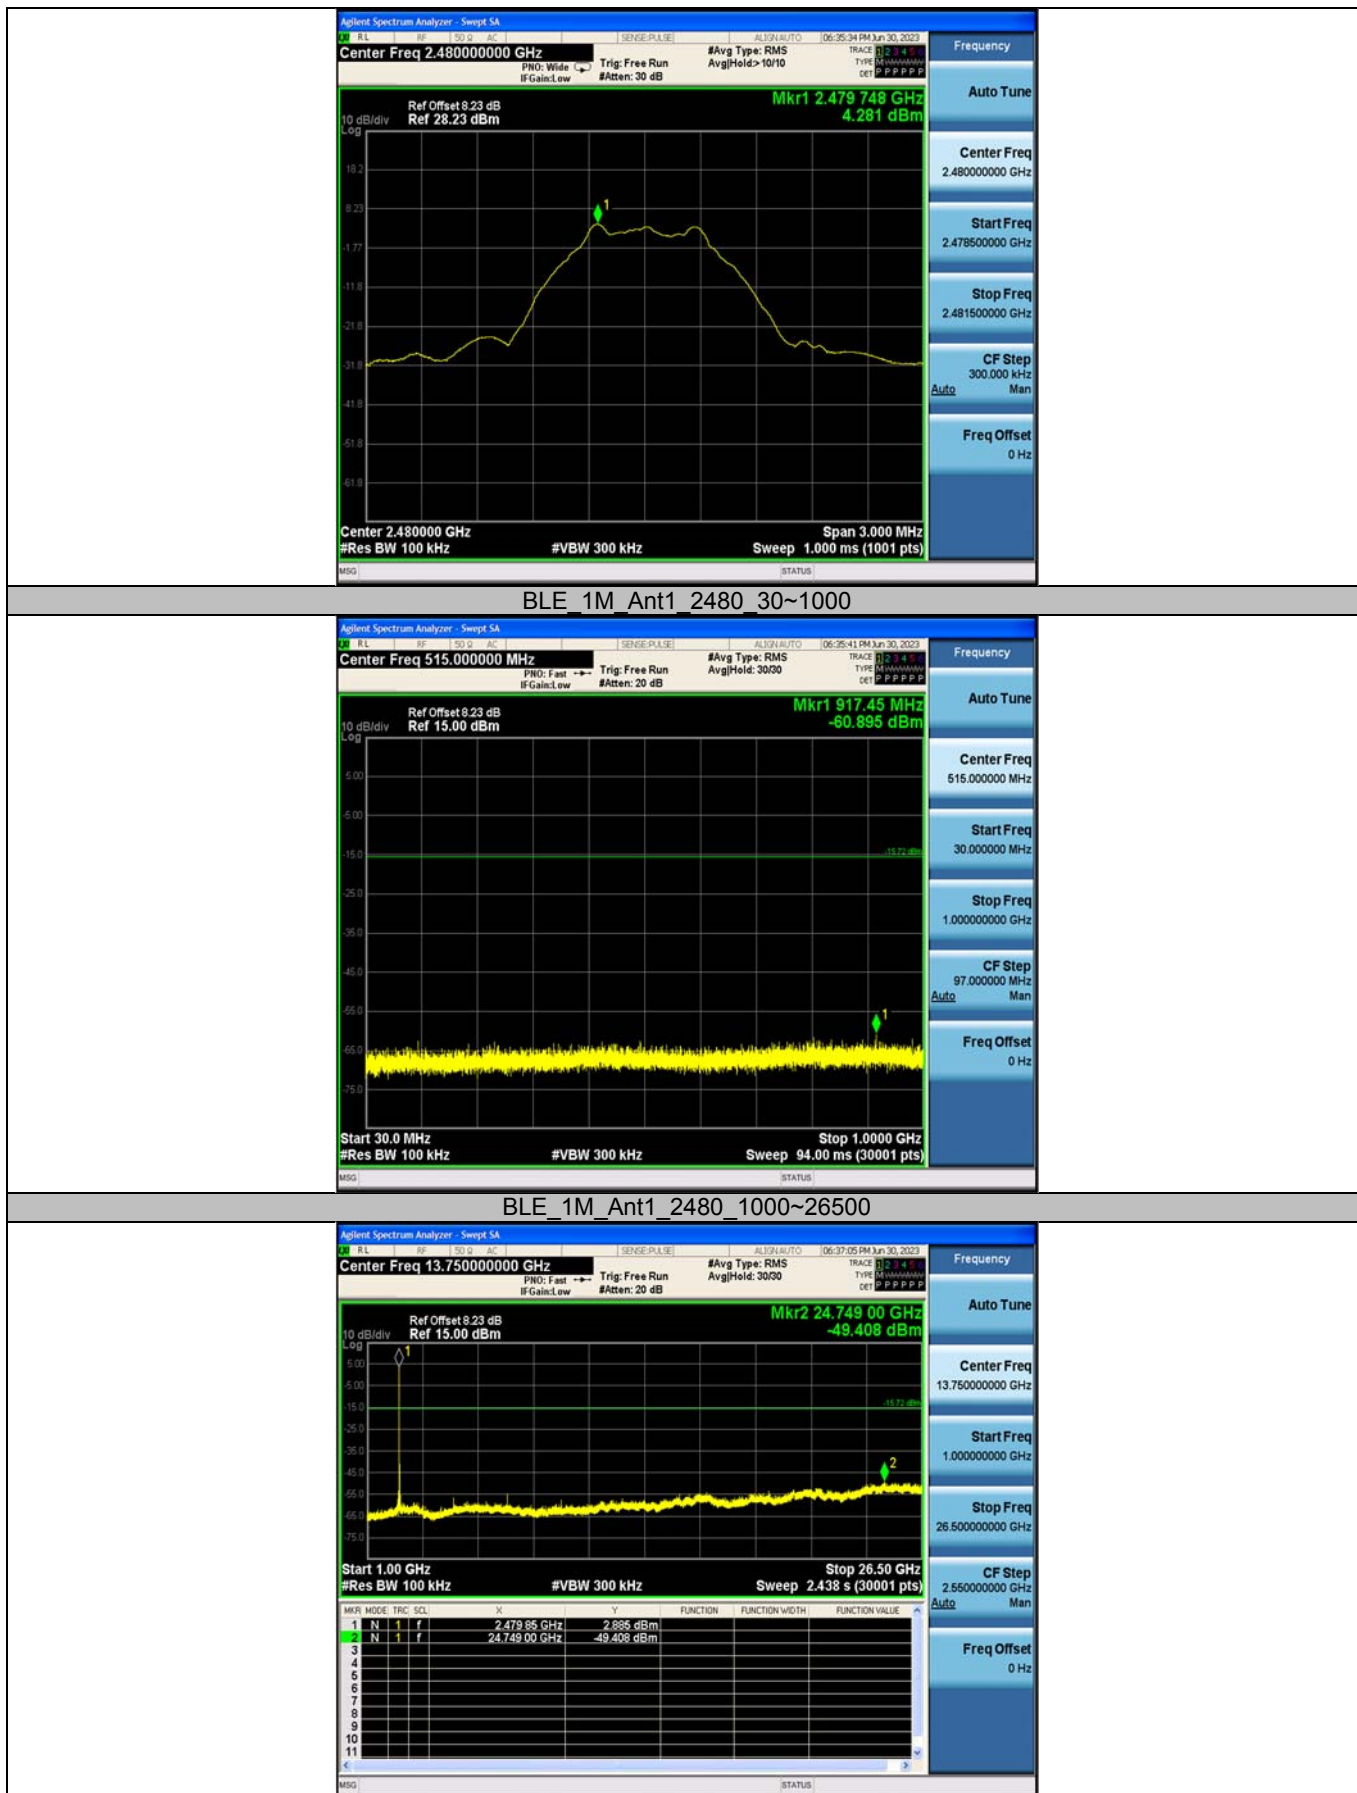

Appendix F: Duty Cycle

Test Result

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	Ant1	2402	0.39	0.63	61.90	2.08
		2440	0.39	0.63	61.90	2.08
		2480	0.39	0.62	62.90	2.01

Test Graphs



----End of Report----