

Appendix B

Peak Output Power




Ref Lvl
20 dBm

Marker 1 [T1]
2.23 dBm
2.40183868 GHz

RBW 1 MHz
VBW 1 MHz
SWT 5 ms

RF Att 40 dB
Unit dBm

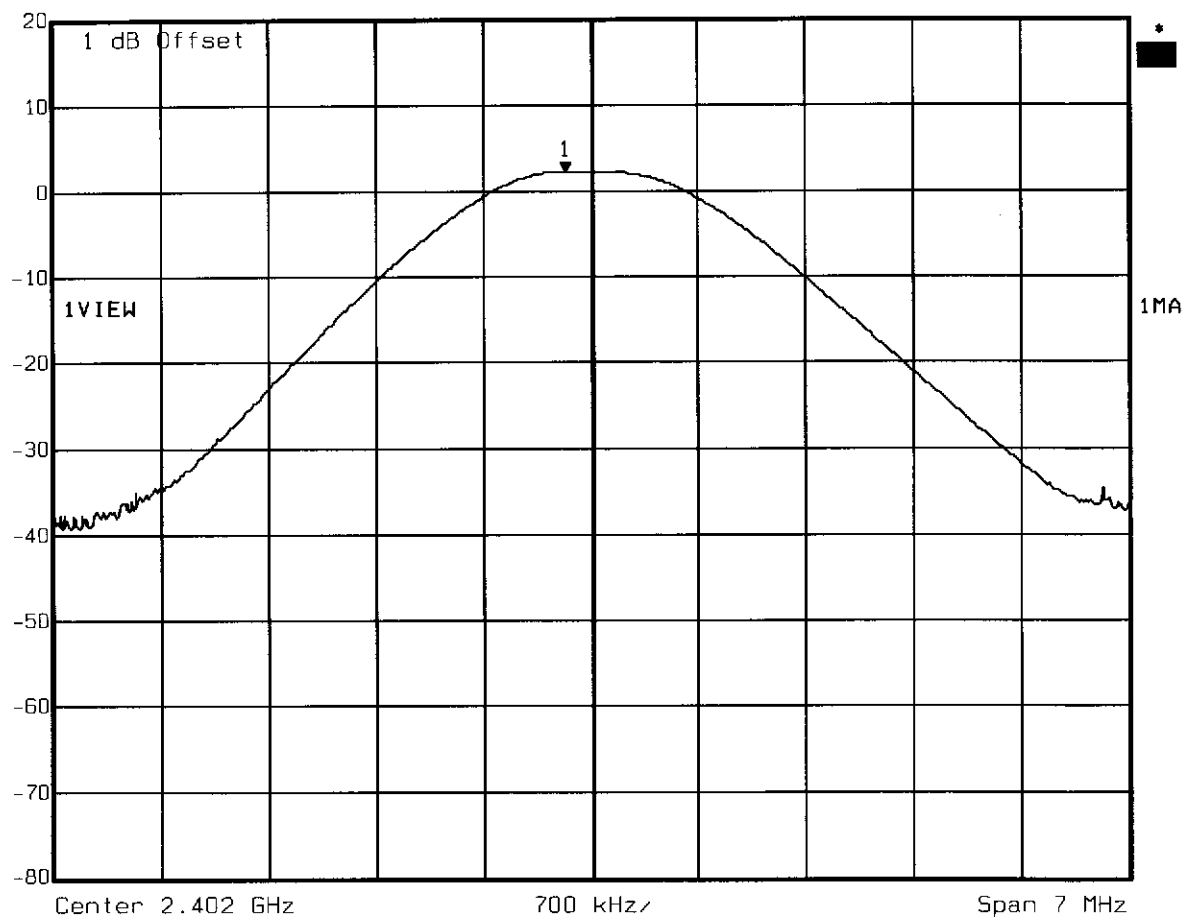

Title: Peak Output Power conducted Ch.: 0

Comment A: Jabra BT150

Date: 12.JUL.2005 11:43:16



Ref Lvl
20 dBm

Marker 1 [T1]

1.77 dBm

2.44079659 GHz

RBW

1 MHz

RF Att

40 dB

VBW


1 MHz

SWT

5 ms

Unit

dBm

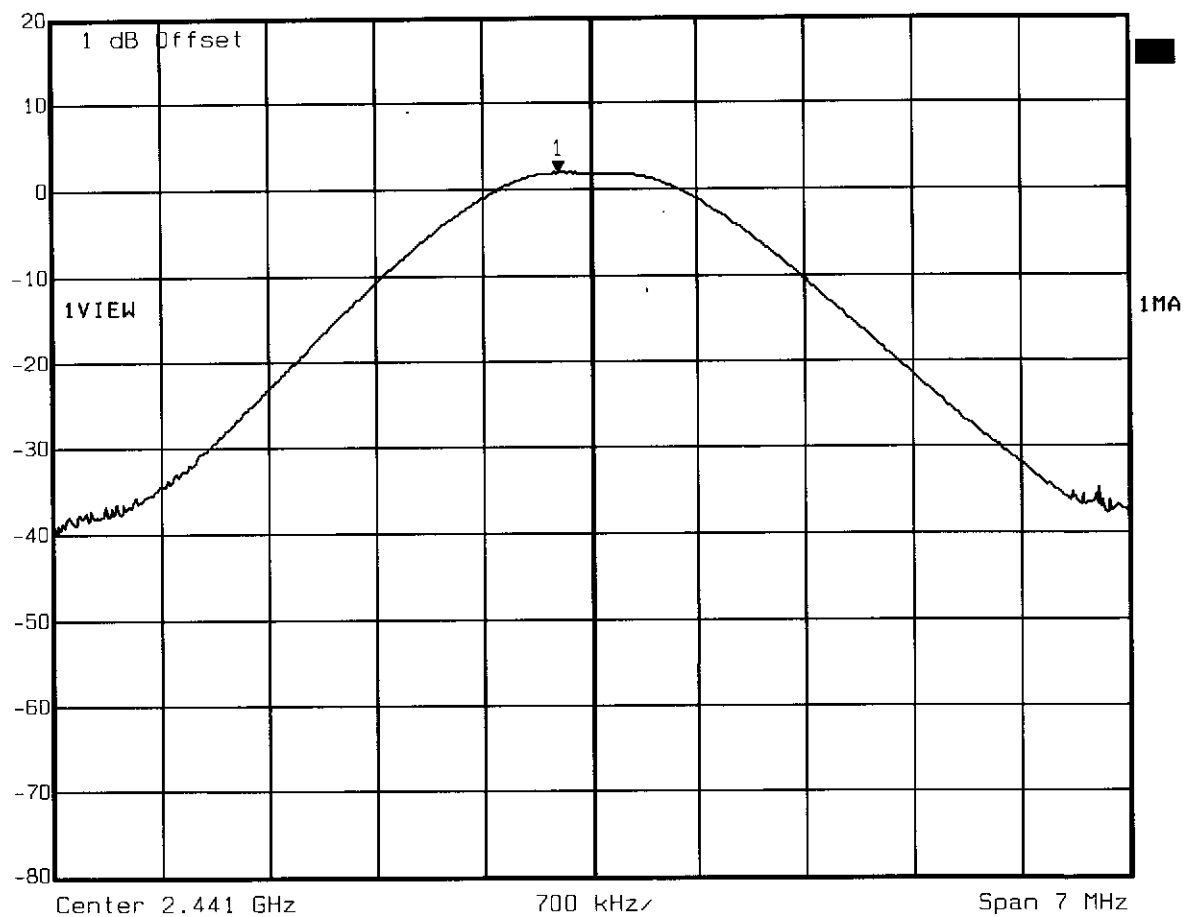


Title: Peak Output Power conducted Ch.: 39

Comment A: Jabra BT150

Date: 12.JUL.2005 11:44:16



Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 1.23 dBm VBW 1 MHz
20 dBm 2.47983868 GHz SWT 5 ms Unit dBm

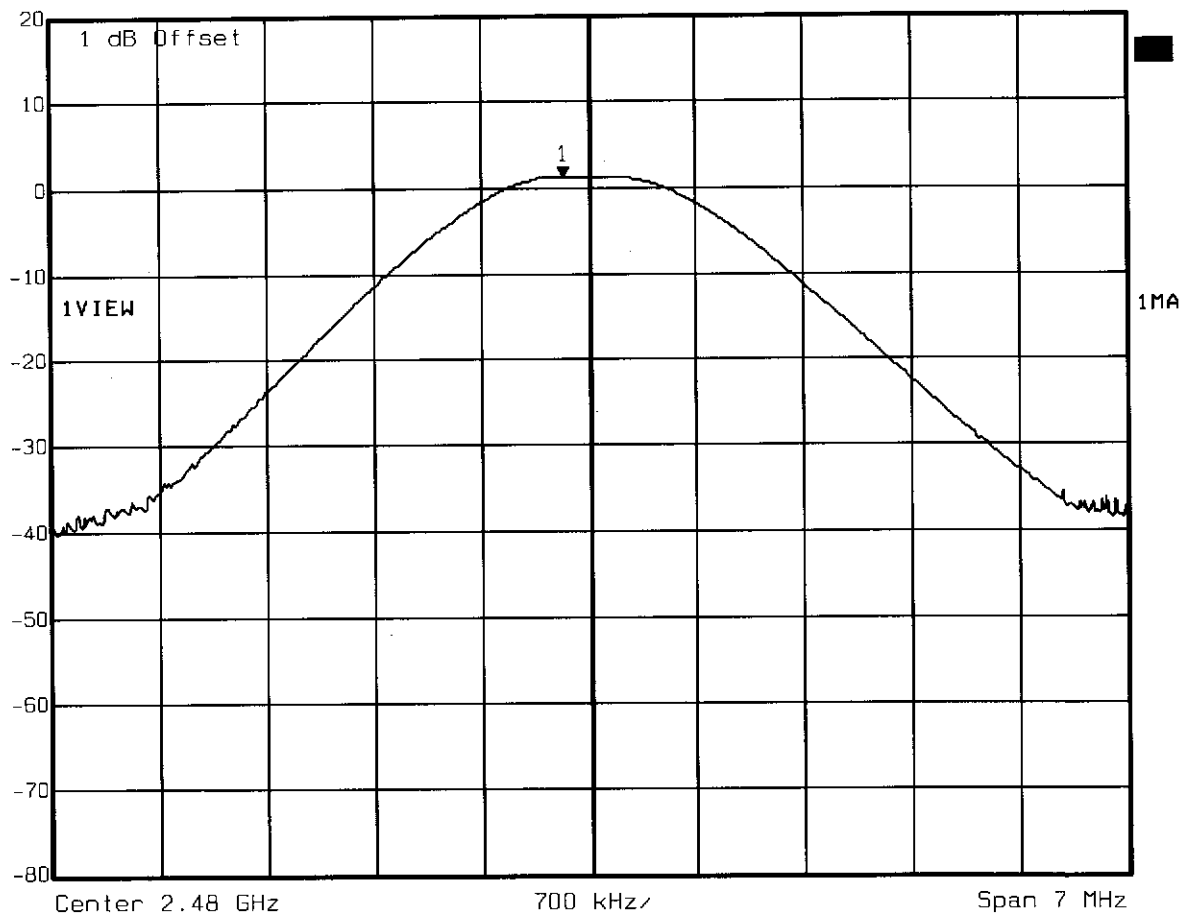

Title: Peak Output Power conducted Ch.: 78
Comment A: Jabra BT150
Date: 12.JUL.2005 11:44:59


Appendix C

Spurious Emissions radiated - Transmitter operating

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Emax: 93.53dBµV/m, RBW: 100kHz

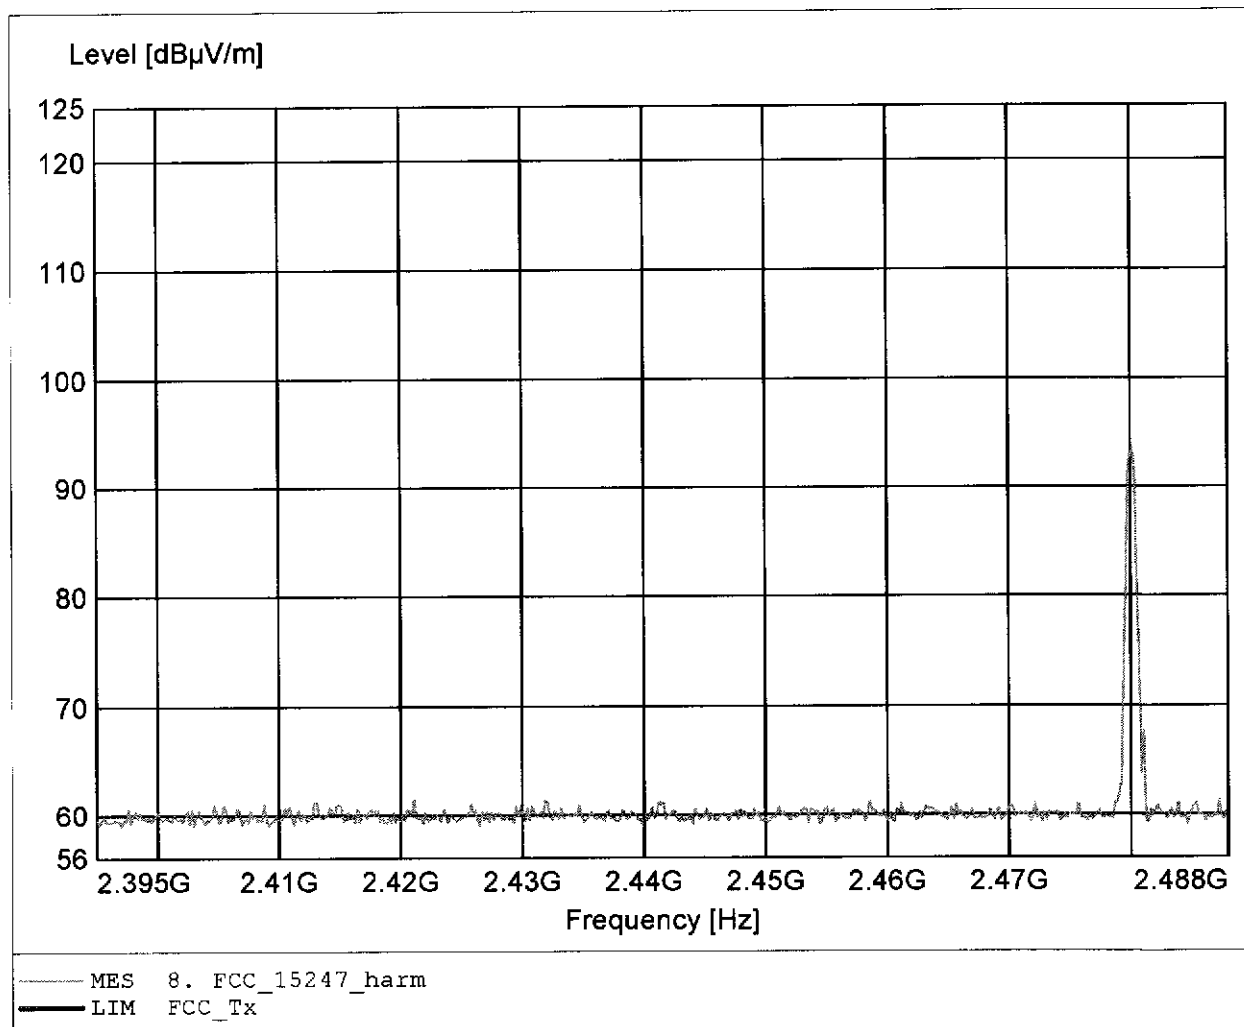

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.000MHz, Emax: 38.99dBµV/m, RBW: 100kHz

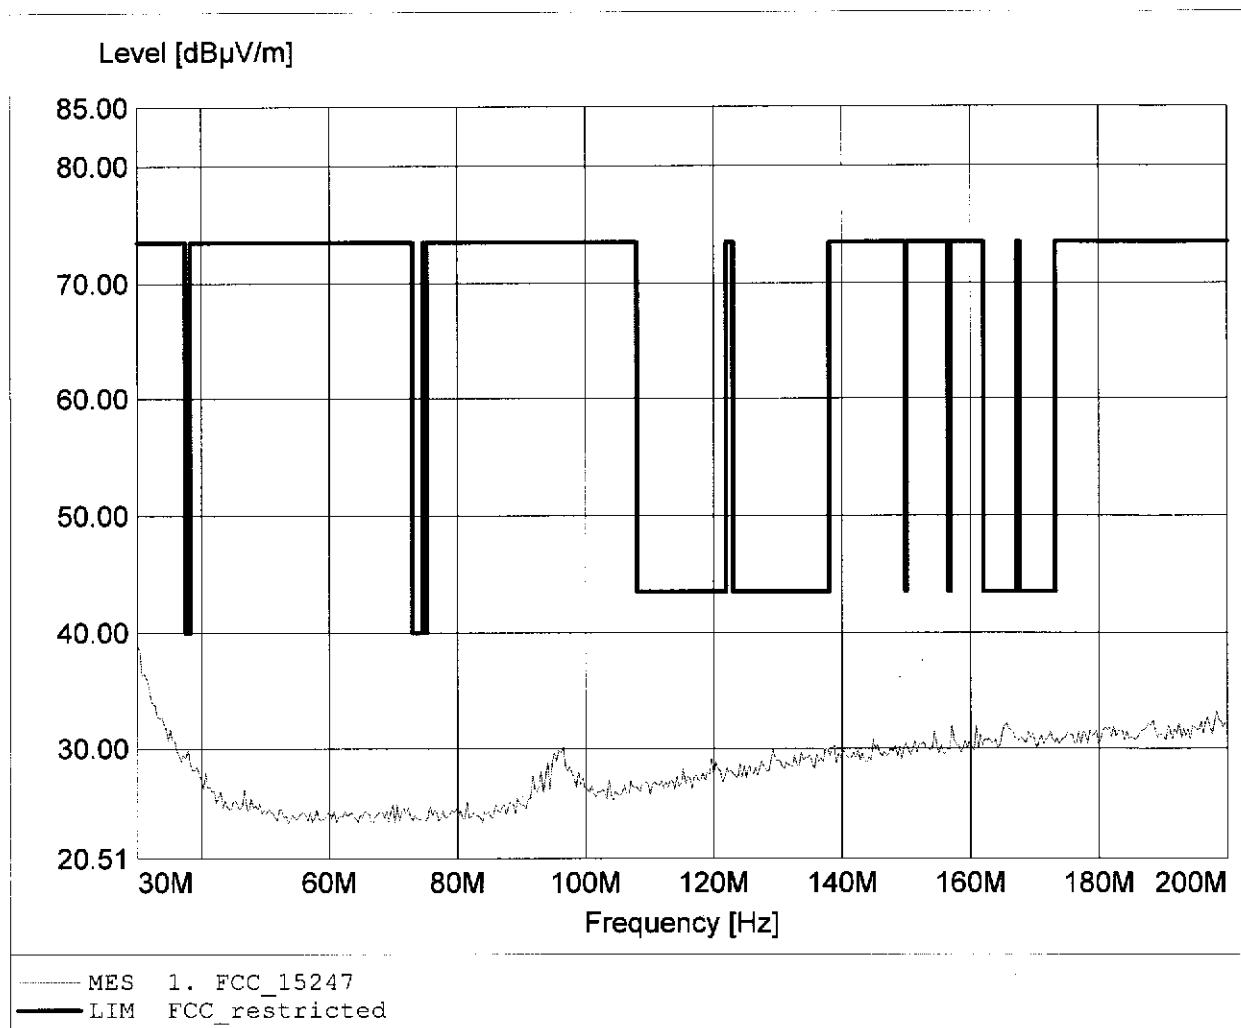

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 194.549MHz, Emax: 33.06dBµV/m, RBW: 100kHz

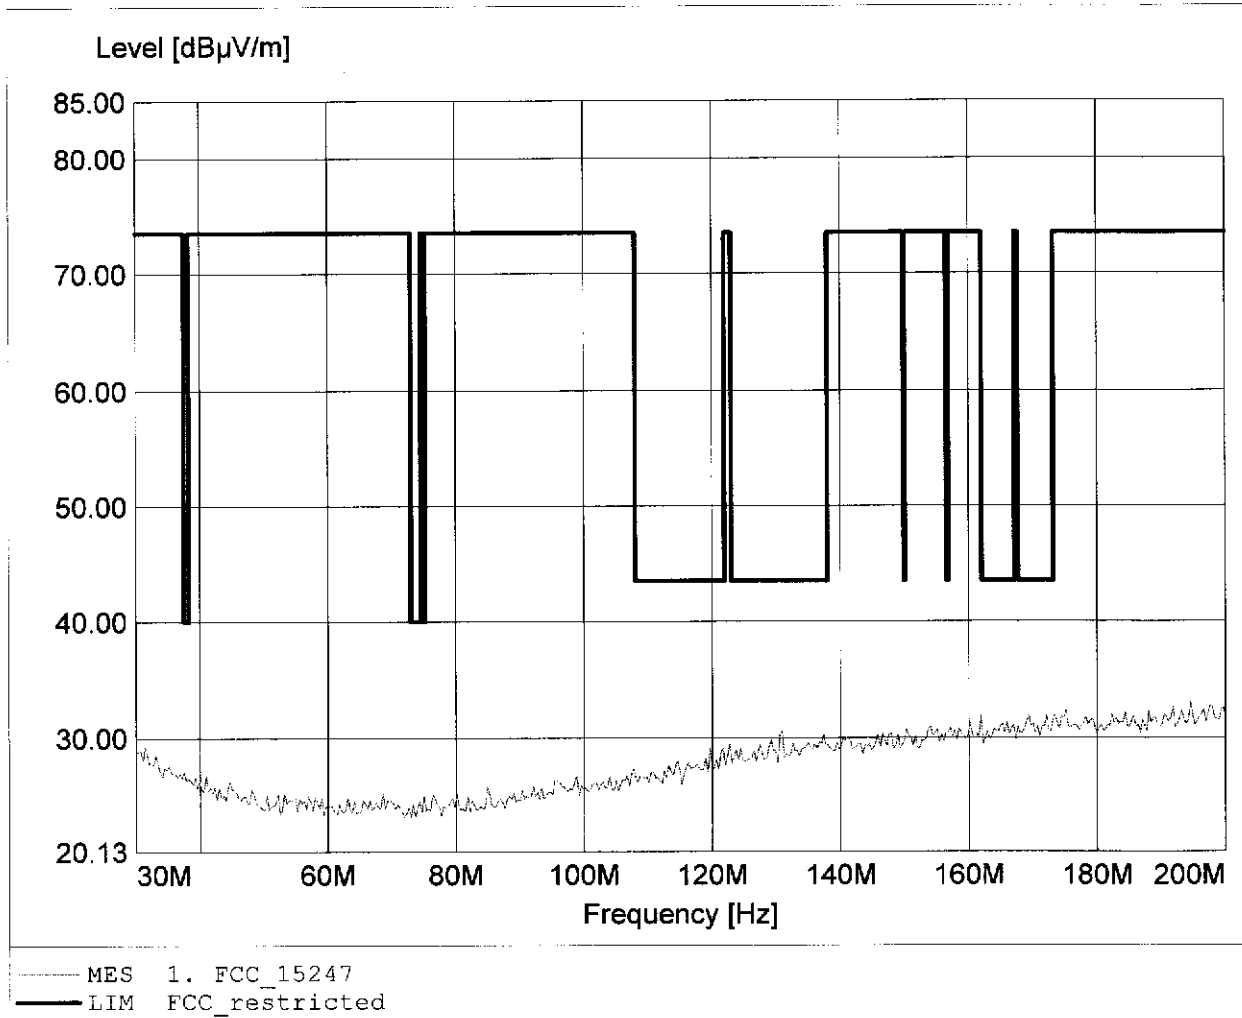

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 599.198MHz, Emax: 33.27dBµV/m, RBW: 100kHz

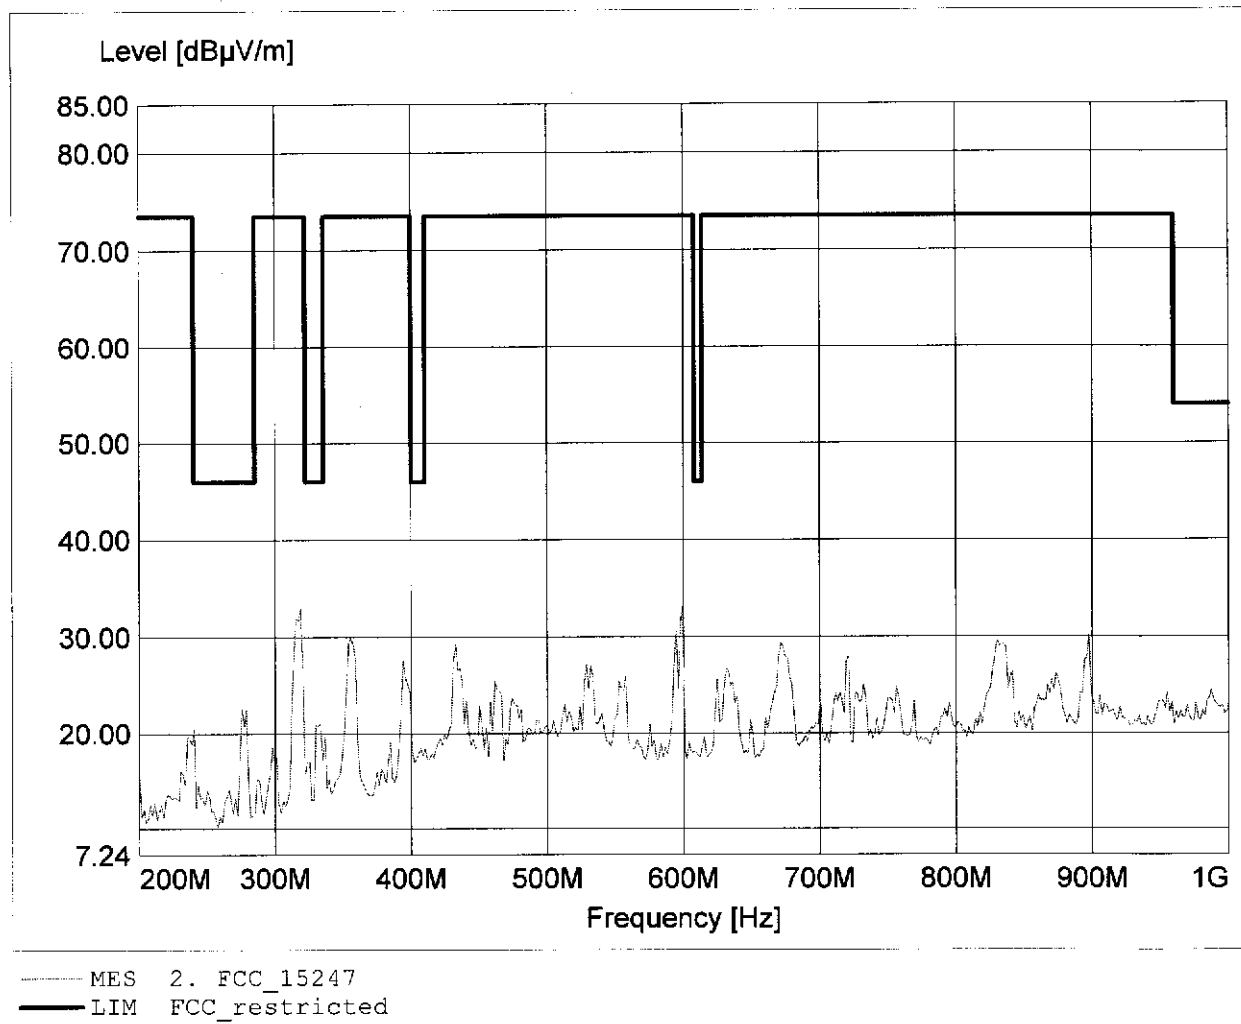

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 894.188MHz, Emax: 29.27dBµV/m, RBW: 100kHz

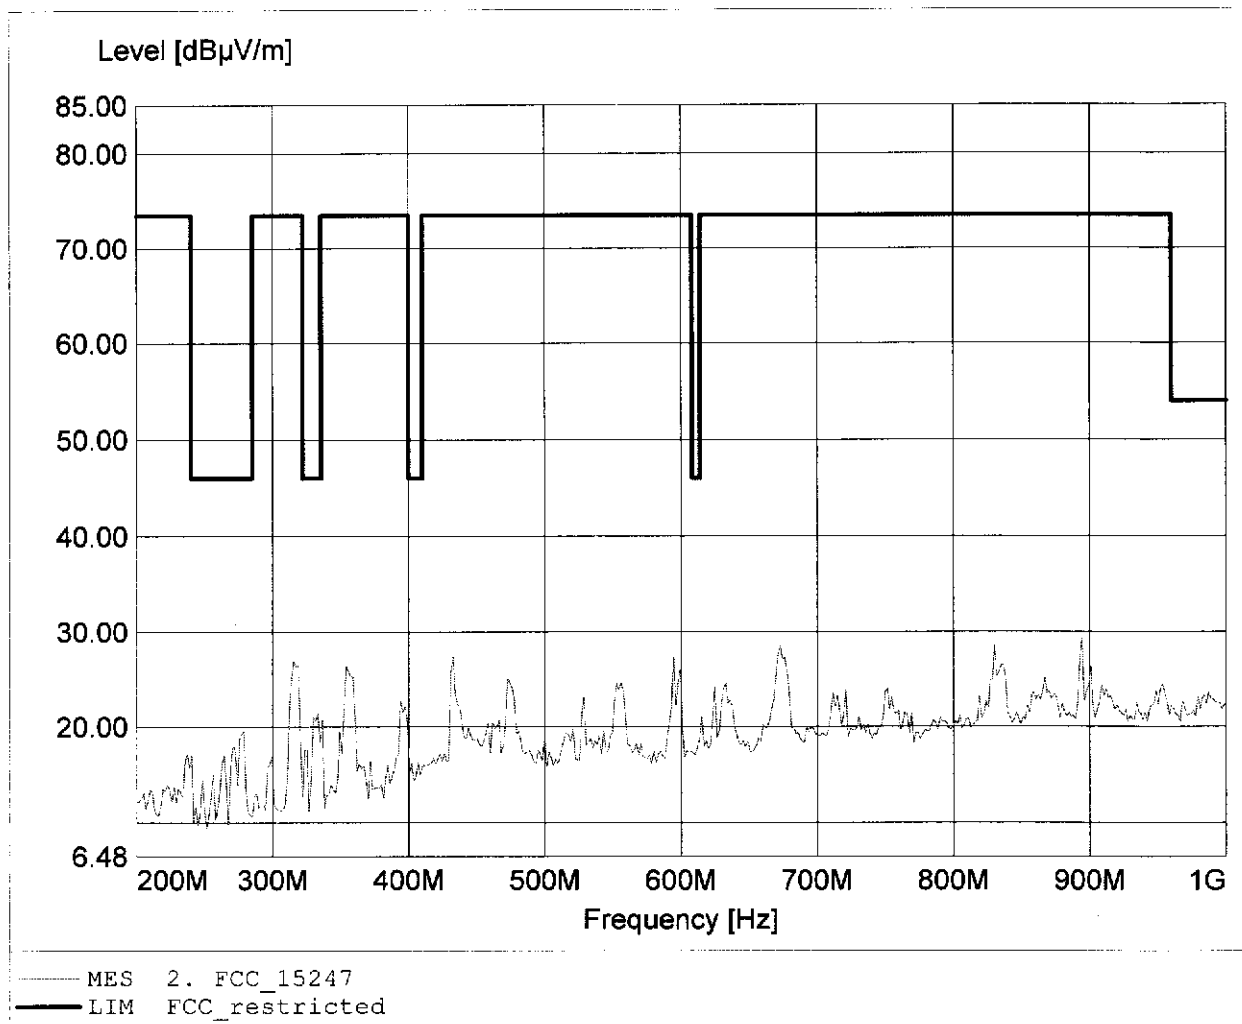

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.923GHz, Emax: 49.21dBμV/m, RBW: 1MHz

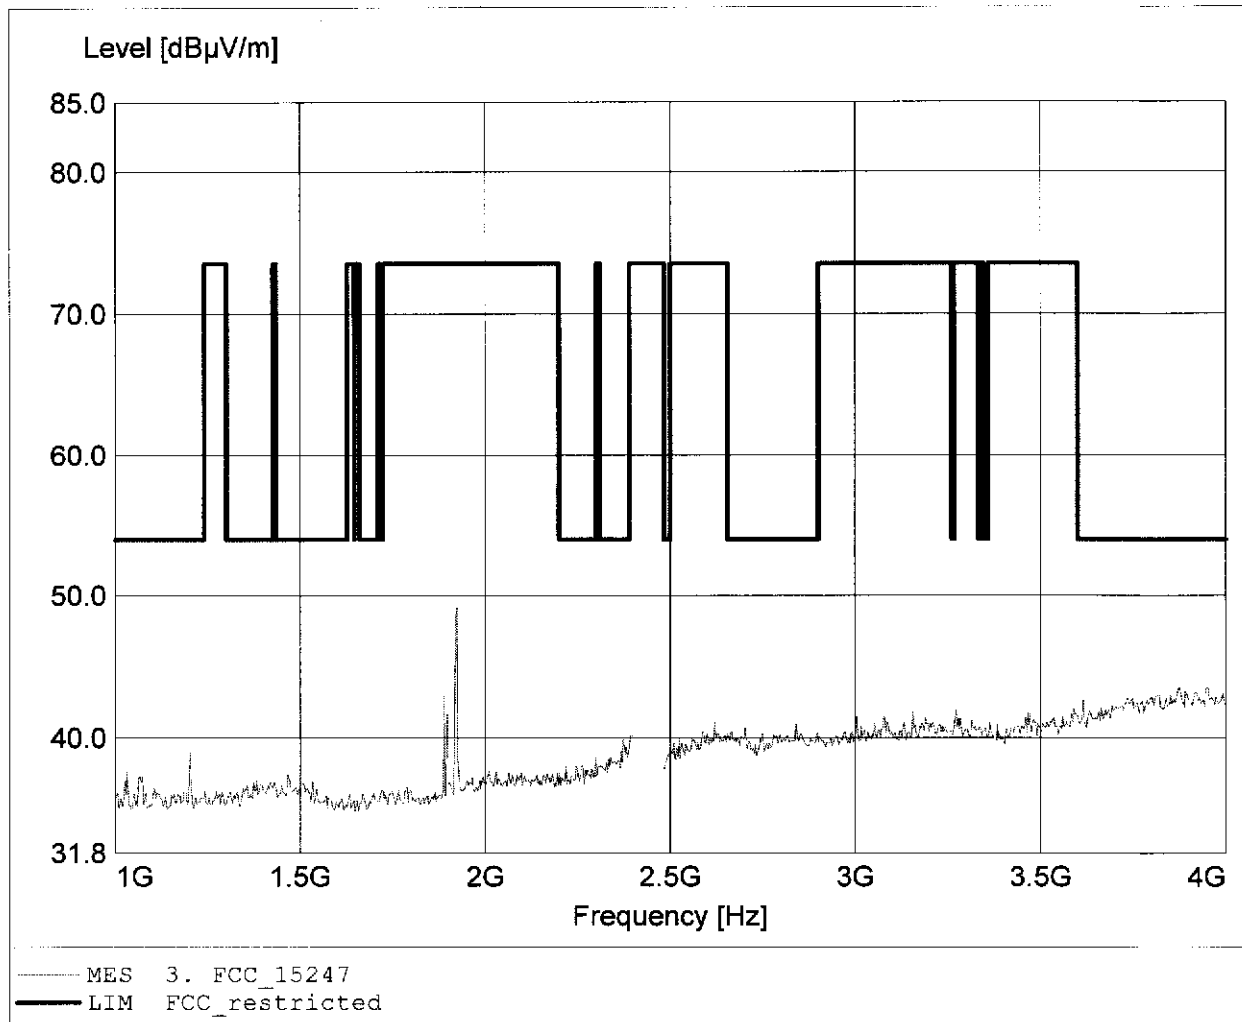

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.923GHz, Emax: 47.53dBµV/m, RBW: 1MHz

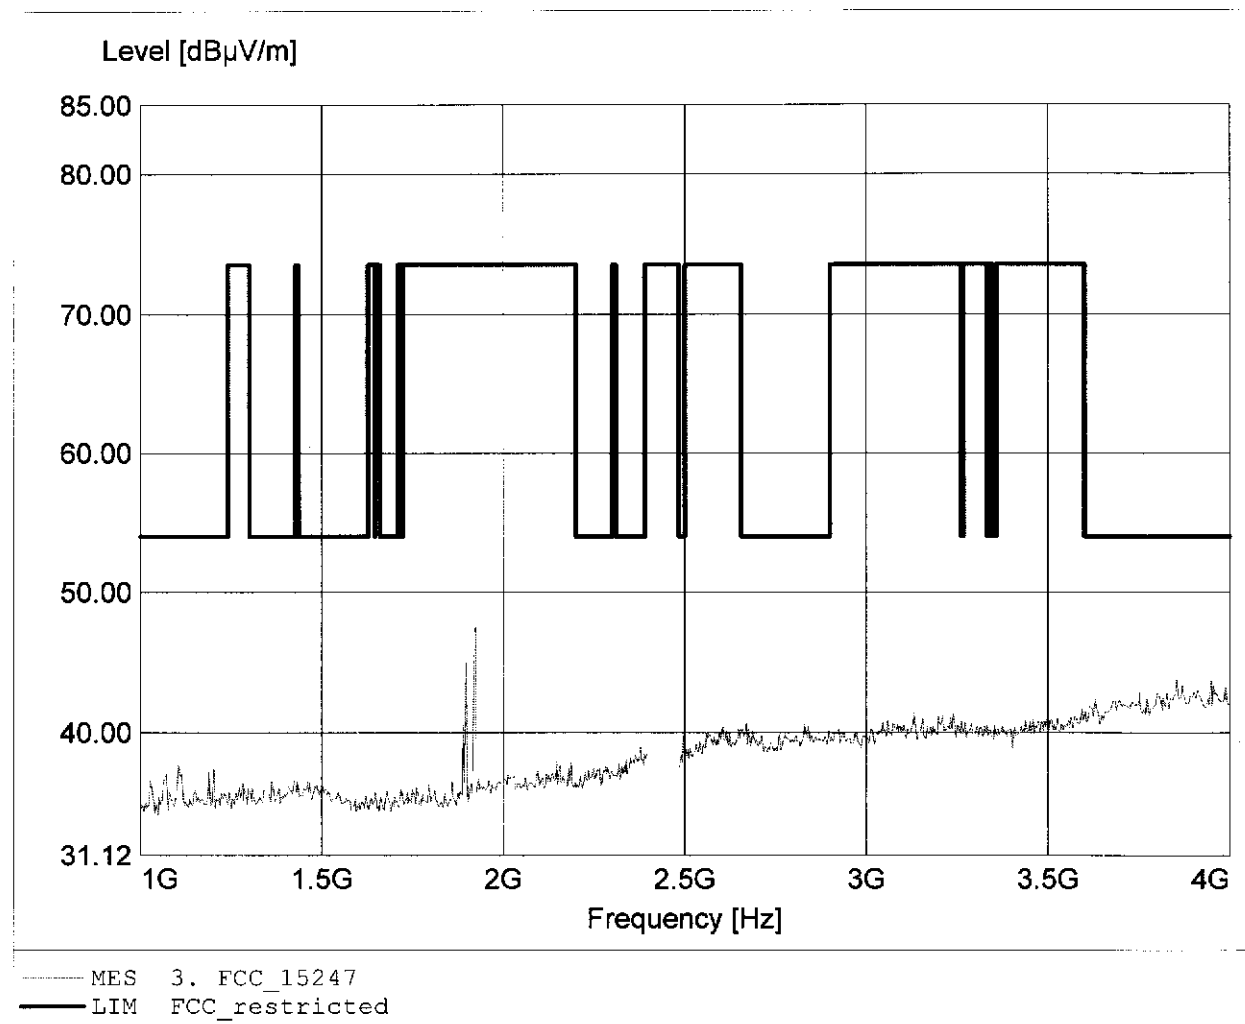

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 43.99dBµV/m, RBW: 1MHz

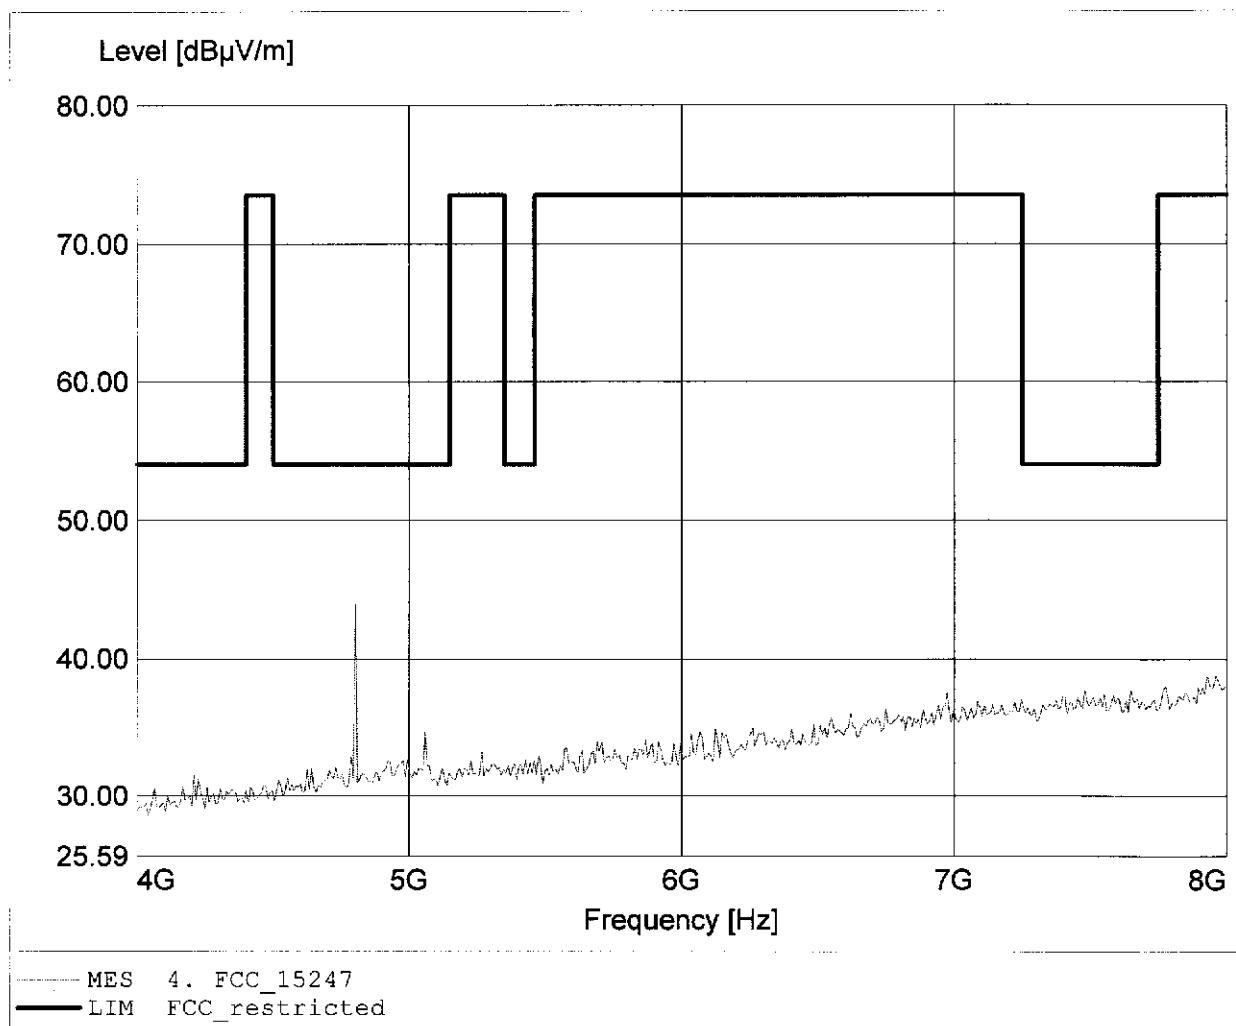

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 40.10dBµV/m, RBW: 1MHz

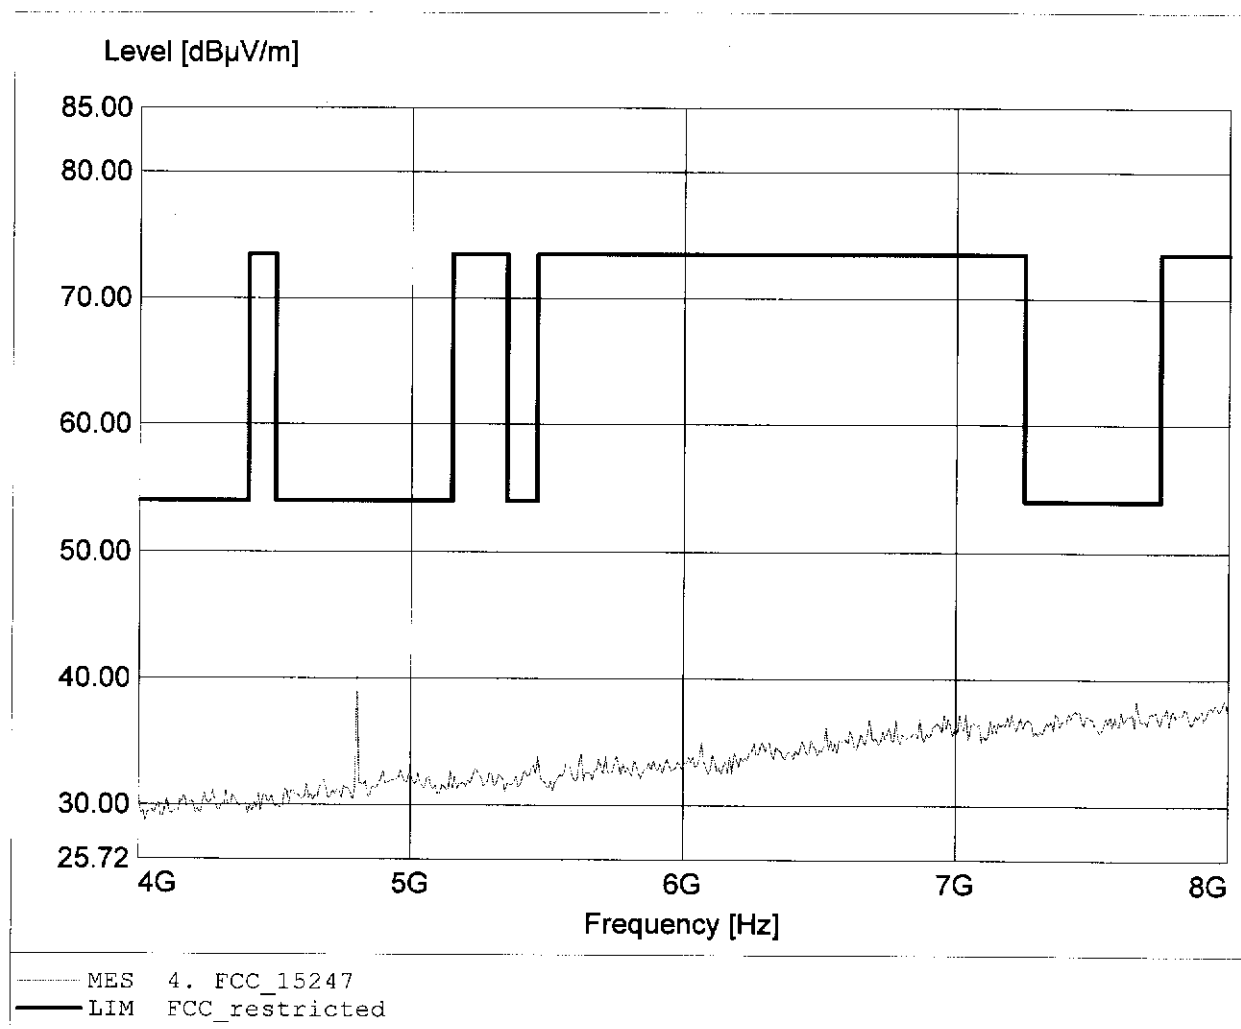

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 42.76dBµV/m, RBW: 1MHz

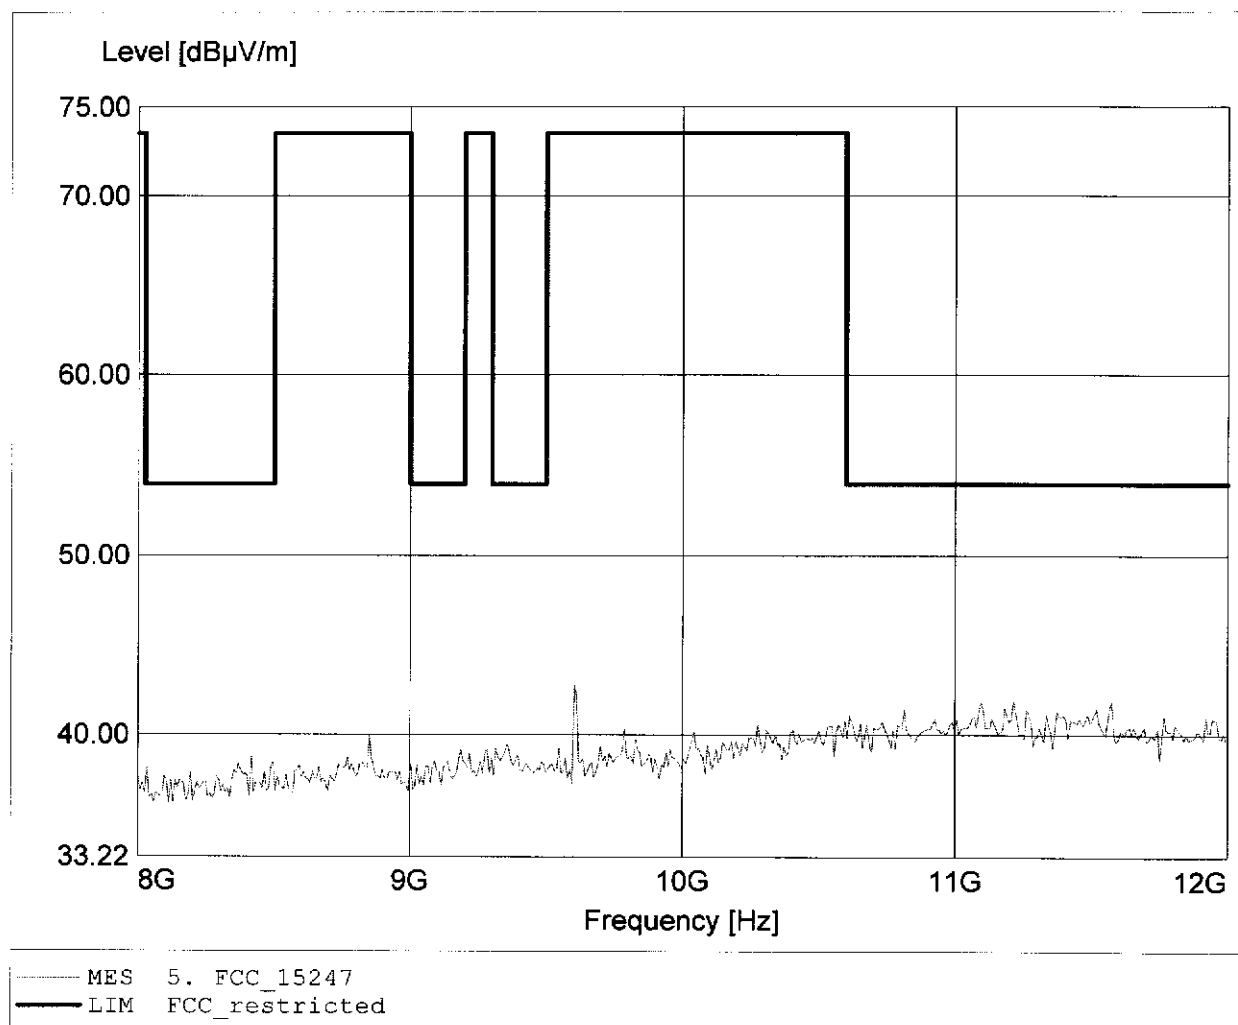

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.166GHz, Emax: 42.18dBµV/m, RBW: 1MHz

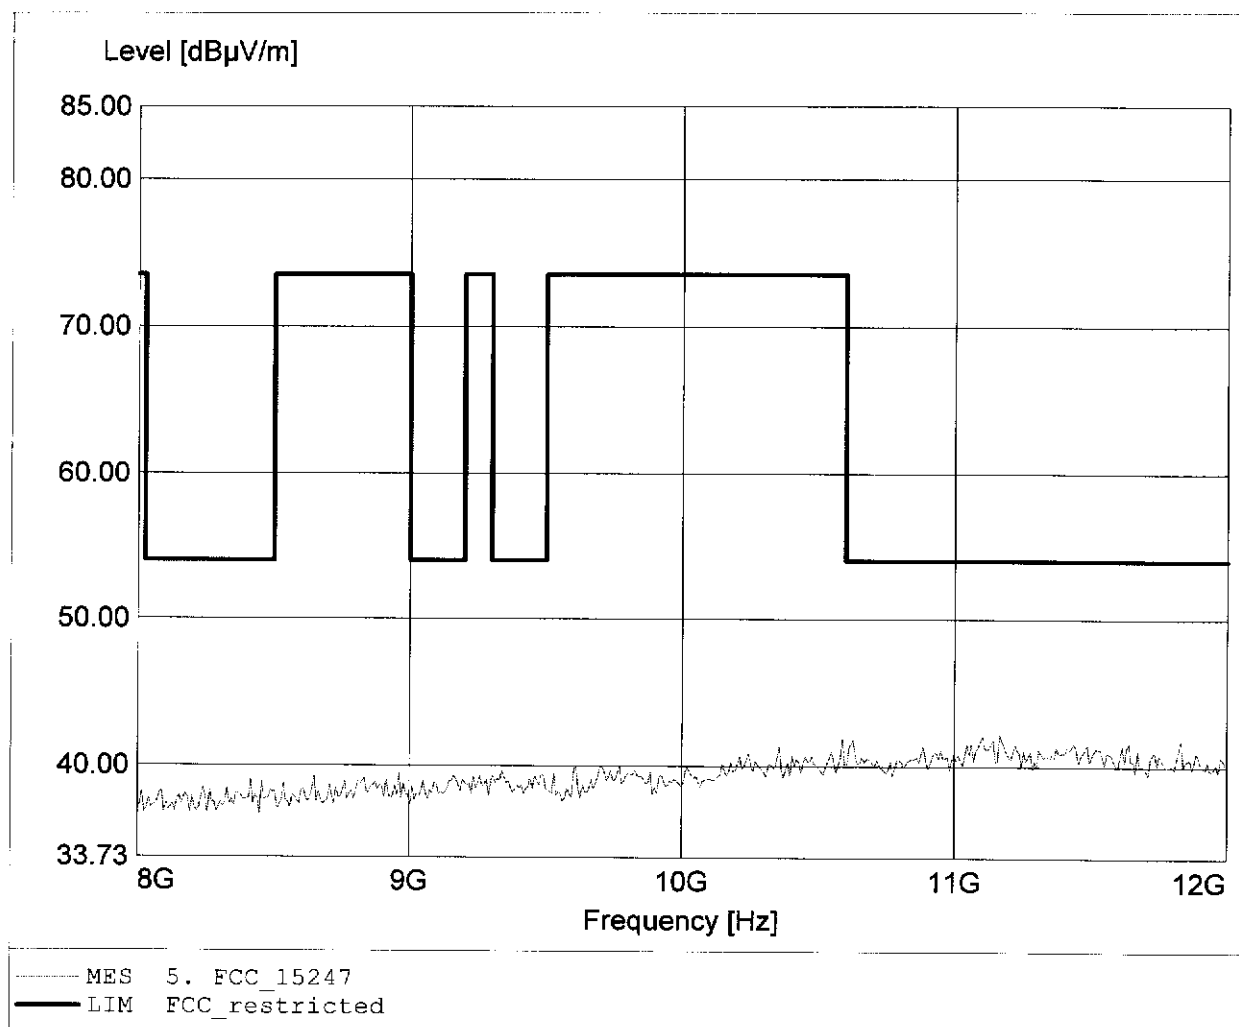

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.114GHz, Emax: 44.34dBµV/m, RBW: 1MHz

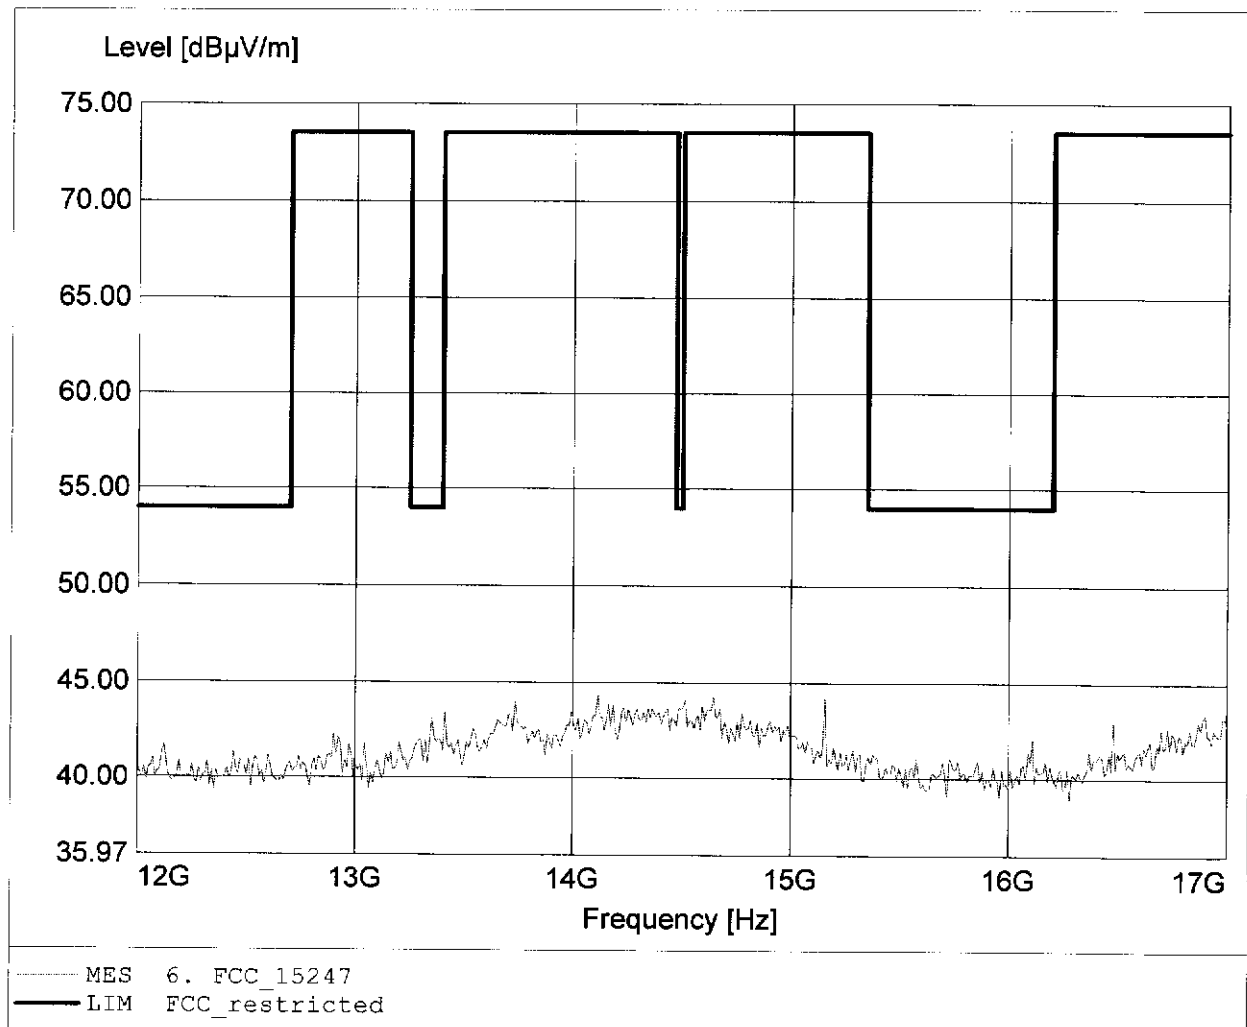

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.555GHz, Emax: 45.13dBµV/m, RBW: 1MHz

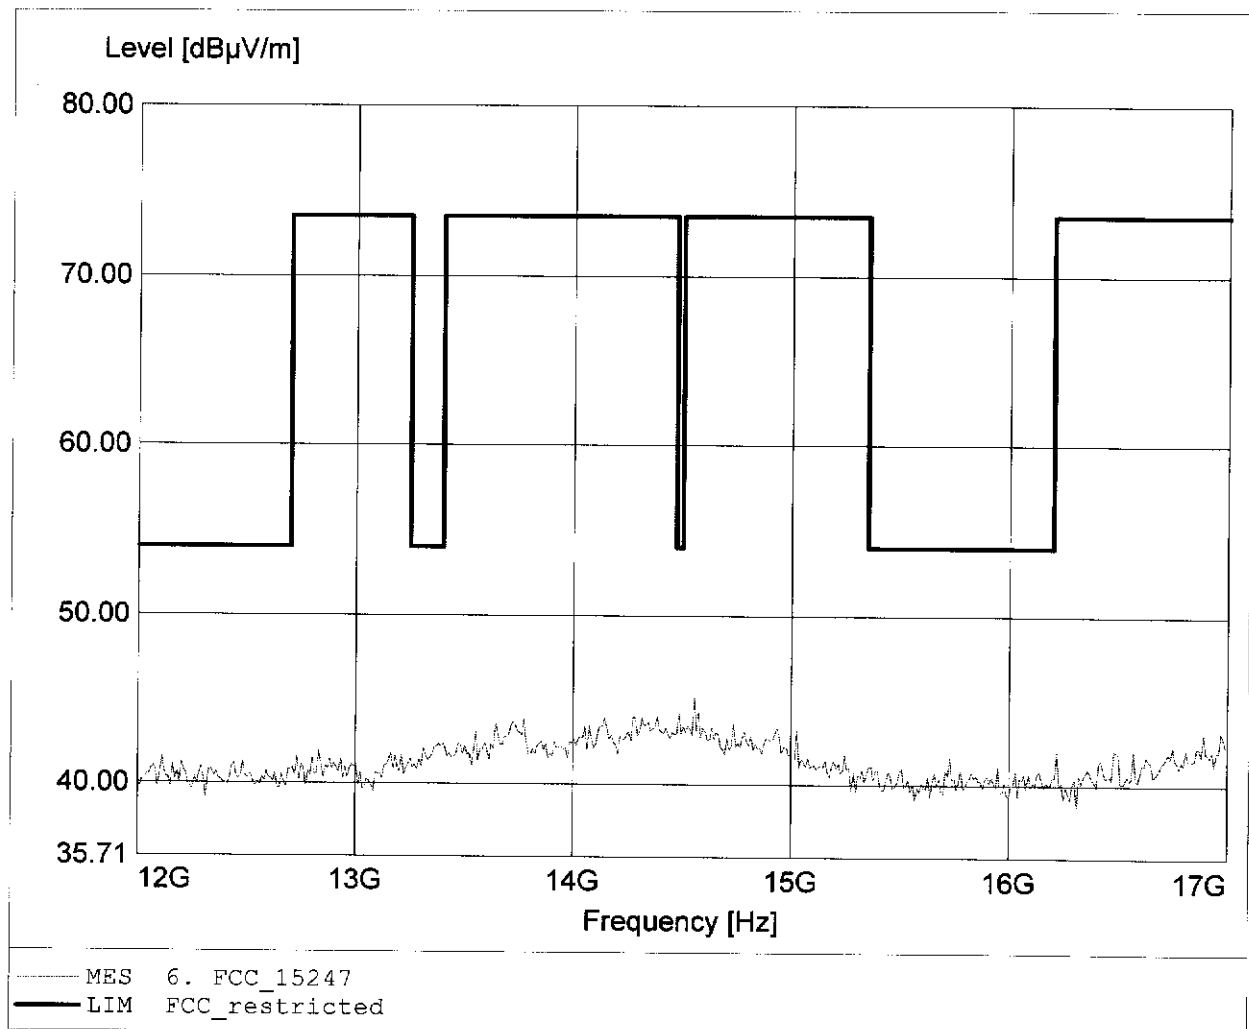

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 23.359GHz, Emax: 44.57dBµV/m, RBW: 1MHz

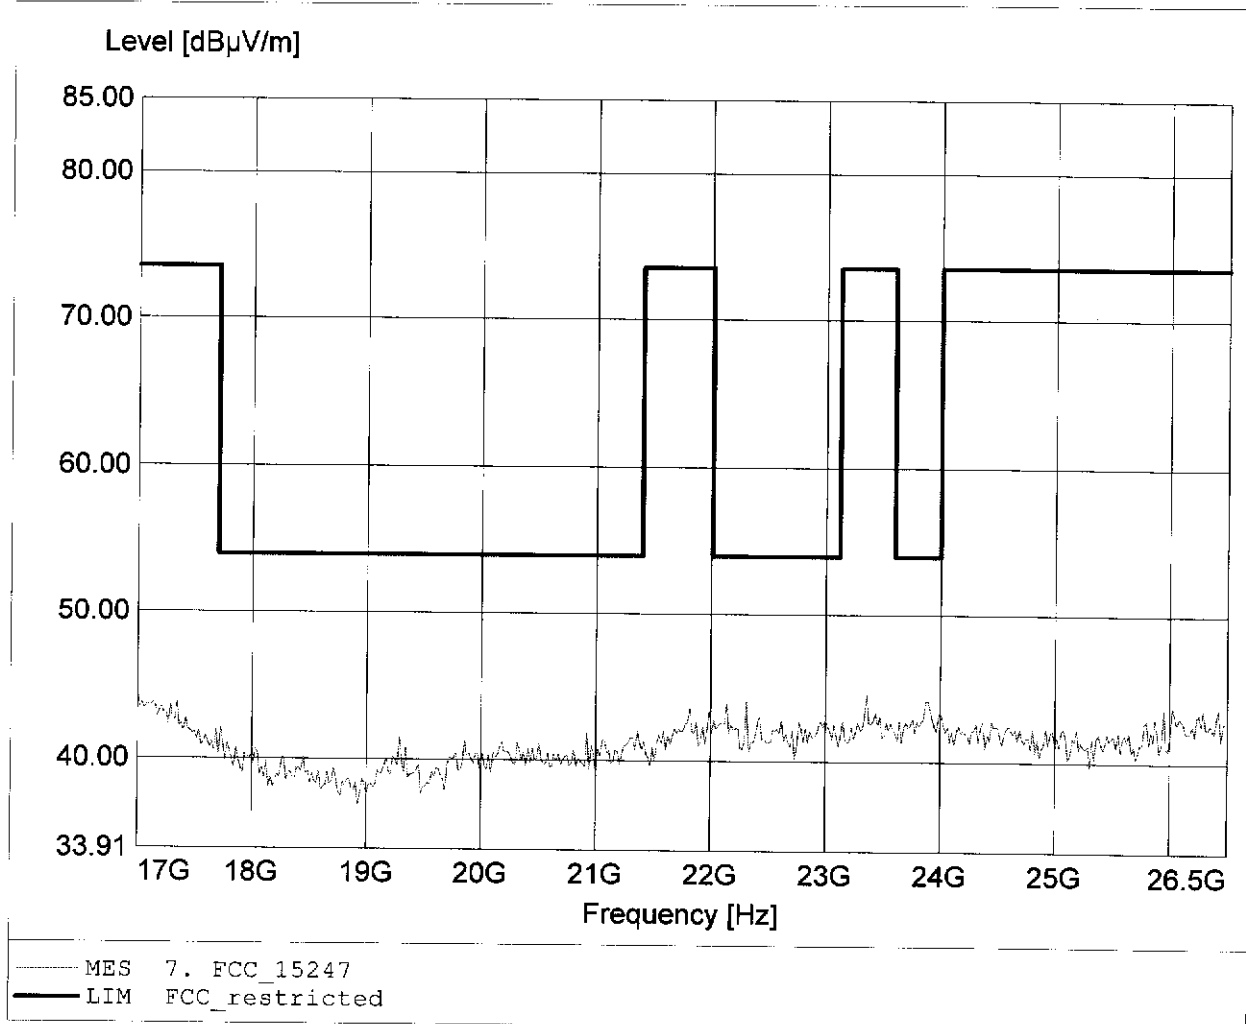

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2402 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.73dBµV/m, RBW: 1MHz

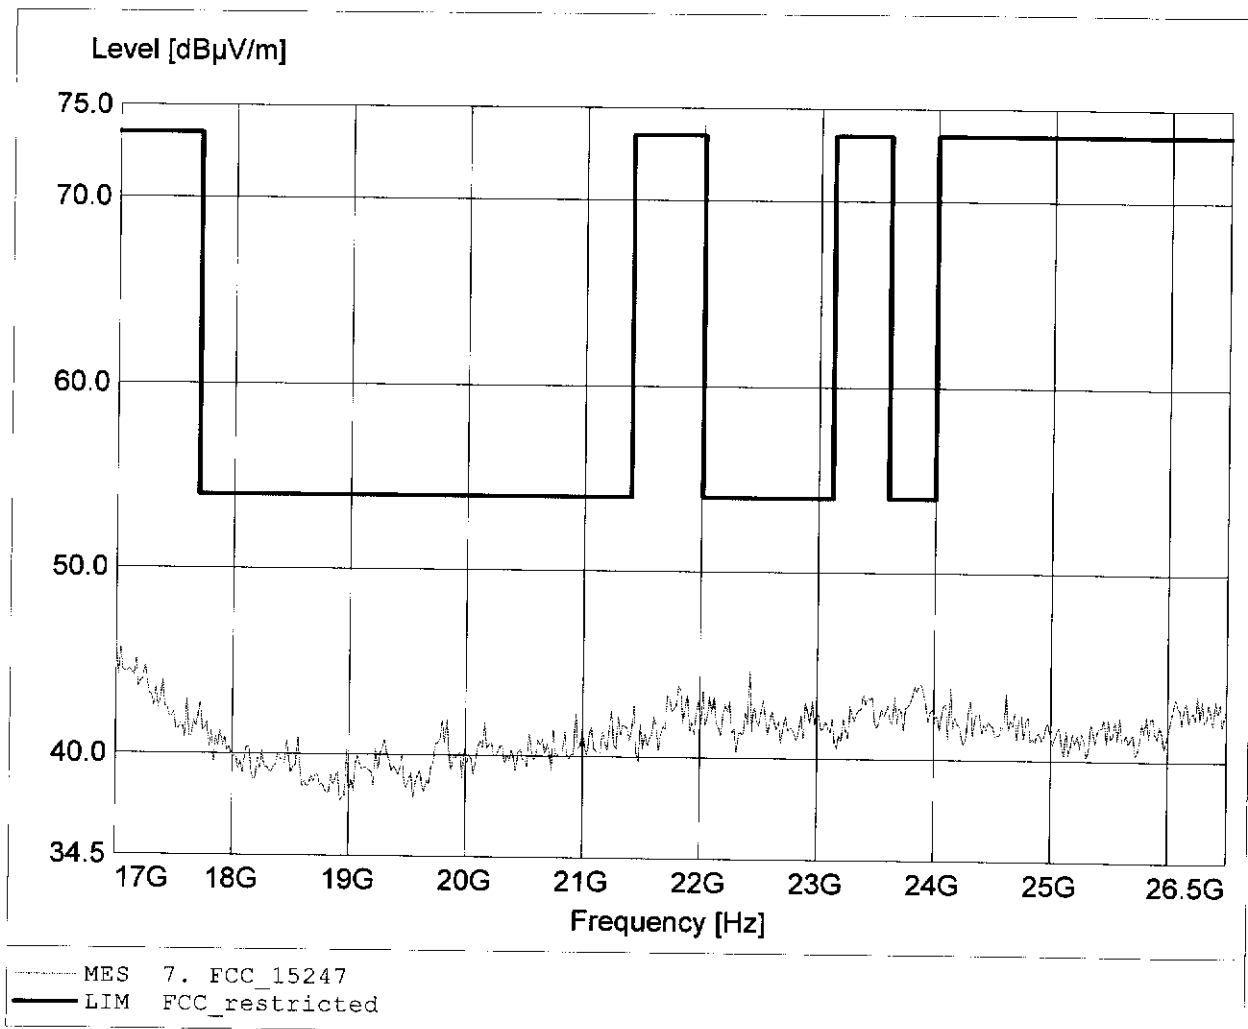

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.000MHz, Emax: 38.74dBuV/m, RBW: 100kHz

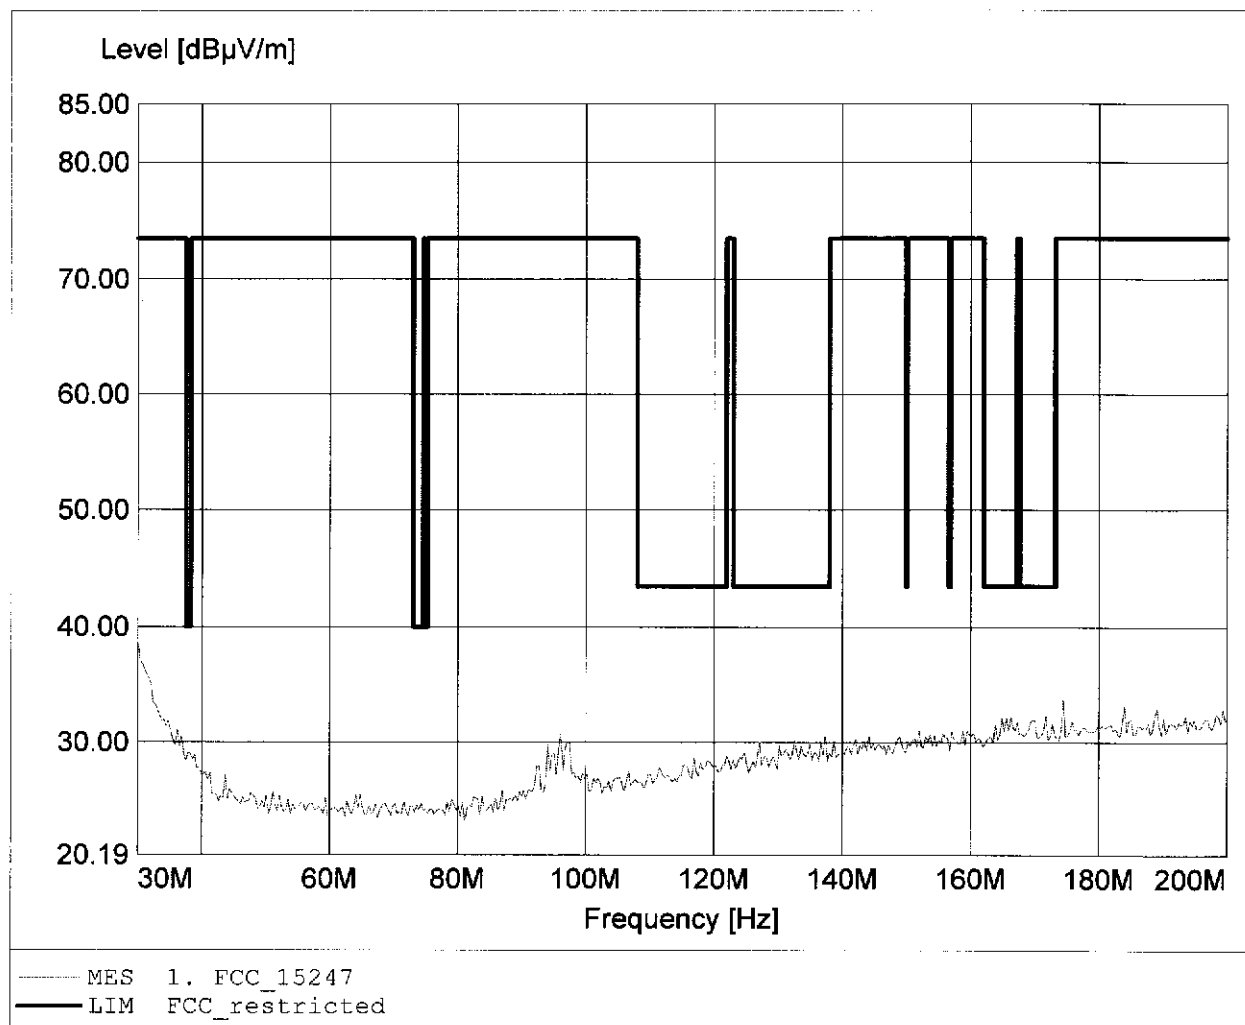

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 200.000MHz, Emax: 33.02dBμV/m, RBW: 100kHz

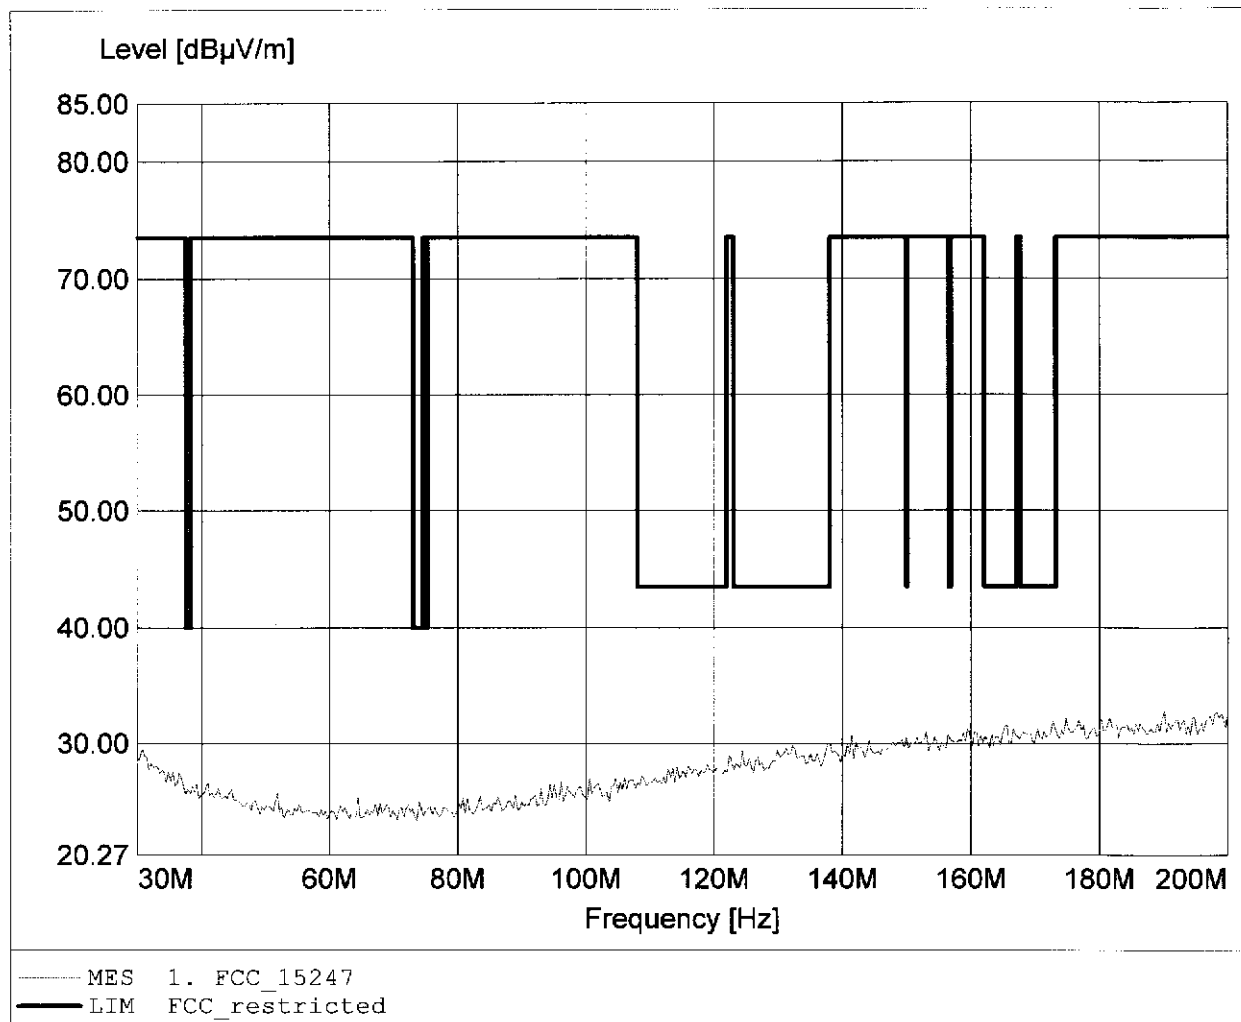

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 594.389MHz, Emax: 33.00dBµV/m, RBW: 100kHz

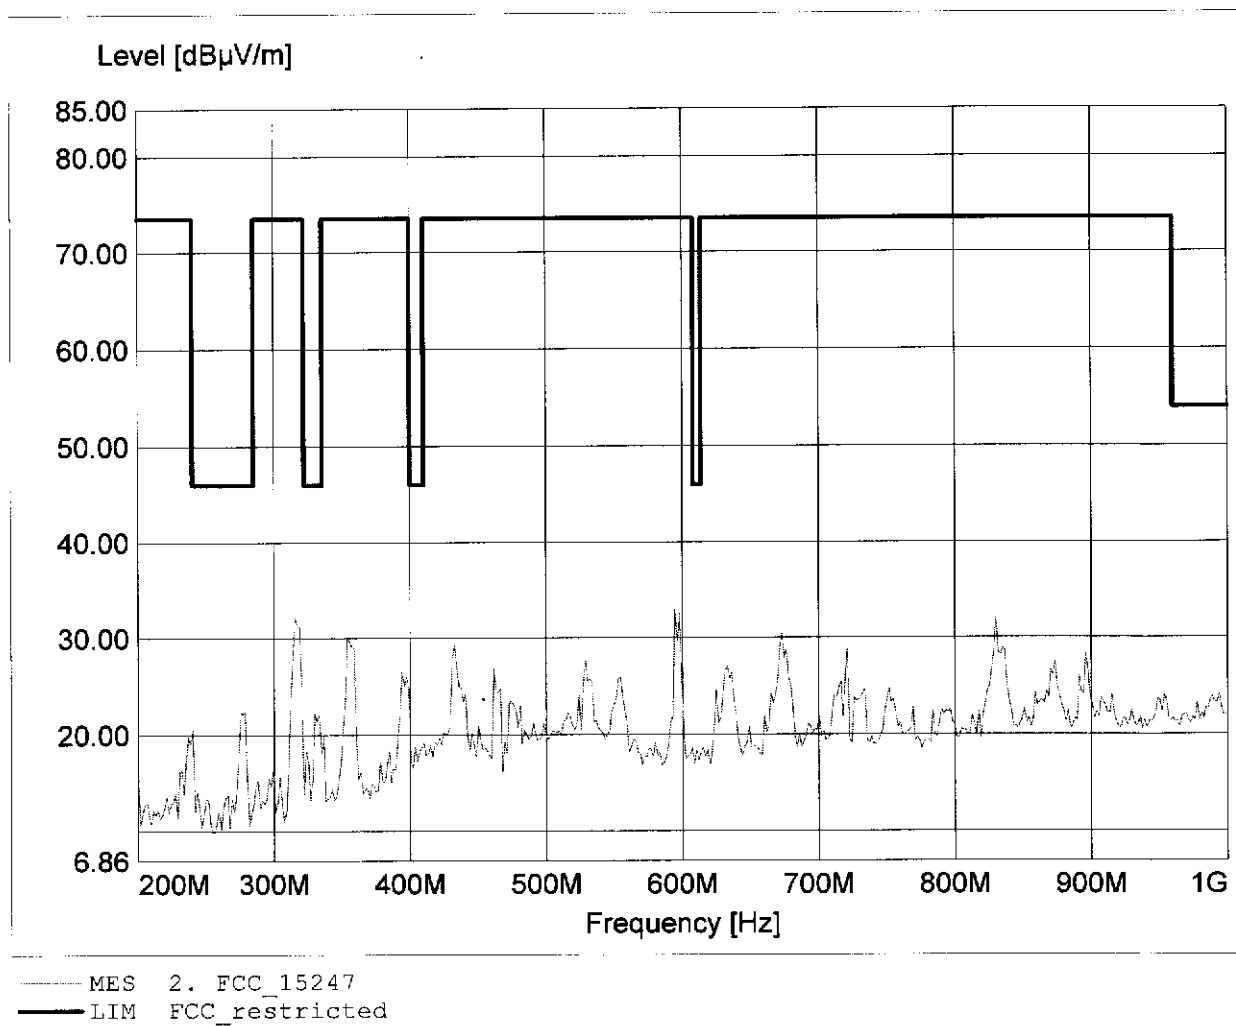

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 892.585MHz, Emax: 30.24dBµV/m, RBW: 100kHz

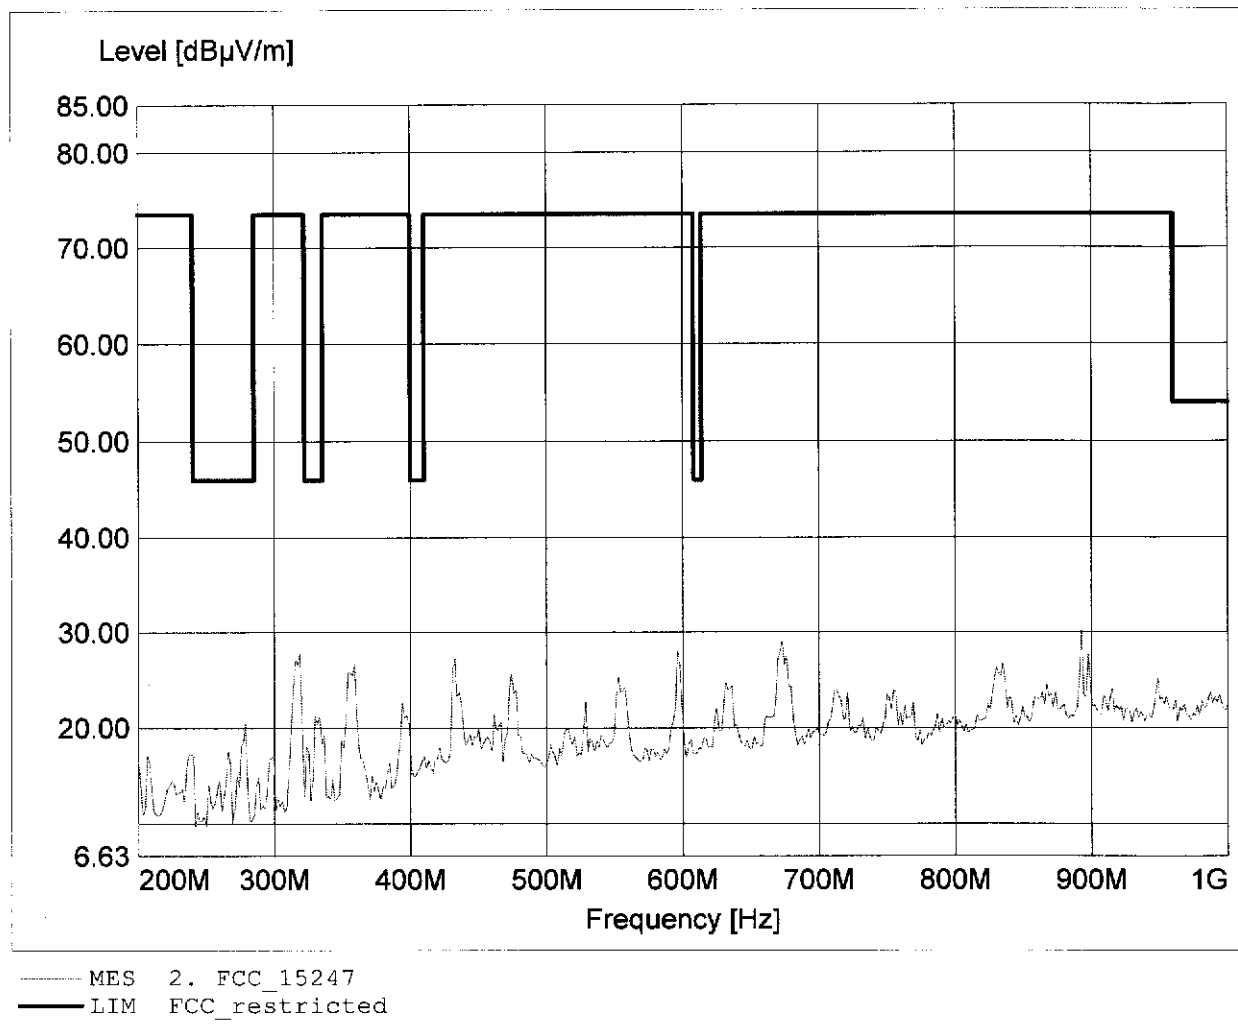

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.923GHz, Emax: 49.02dBμV/m, RBW: 1MHz

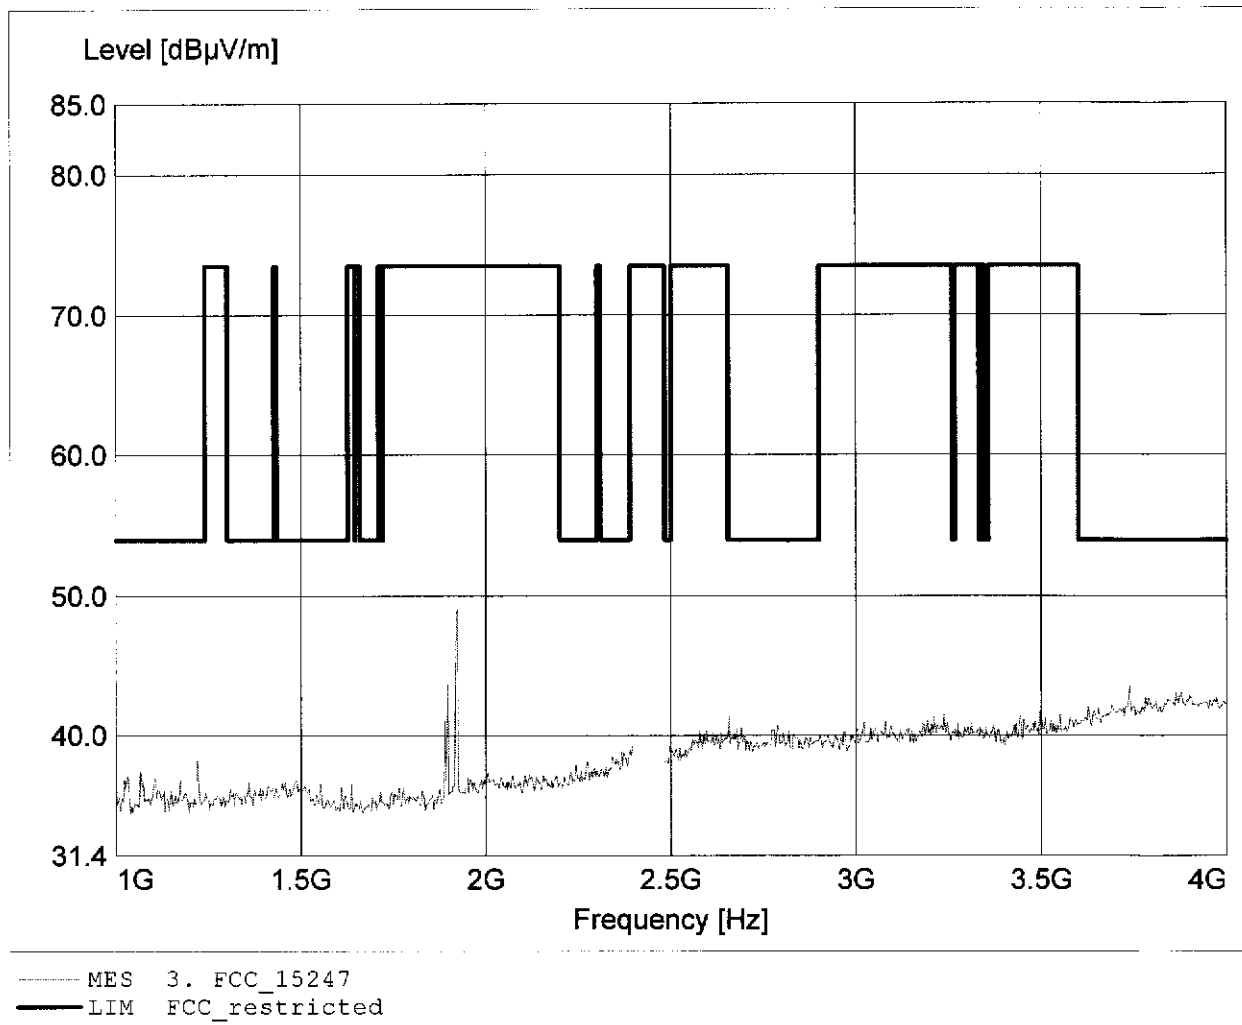

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.923GHz, Emax: 49.01dBµV/m, RBW: 1MHz

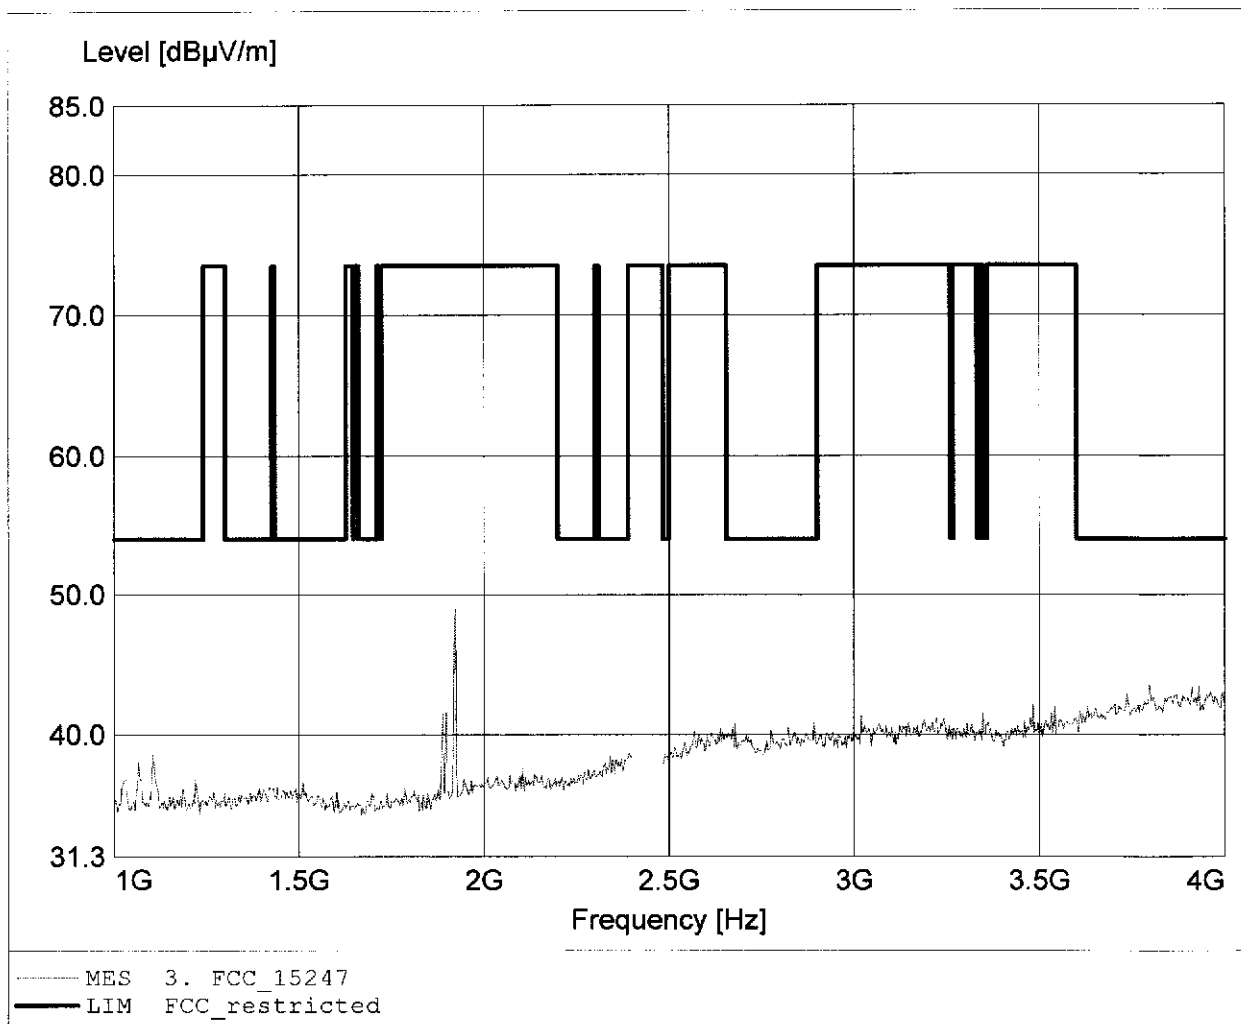

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.864GHz, Emax: 38.96dBµV/m, RBW: 1MHz

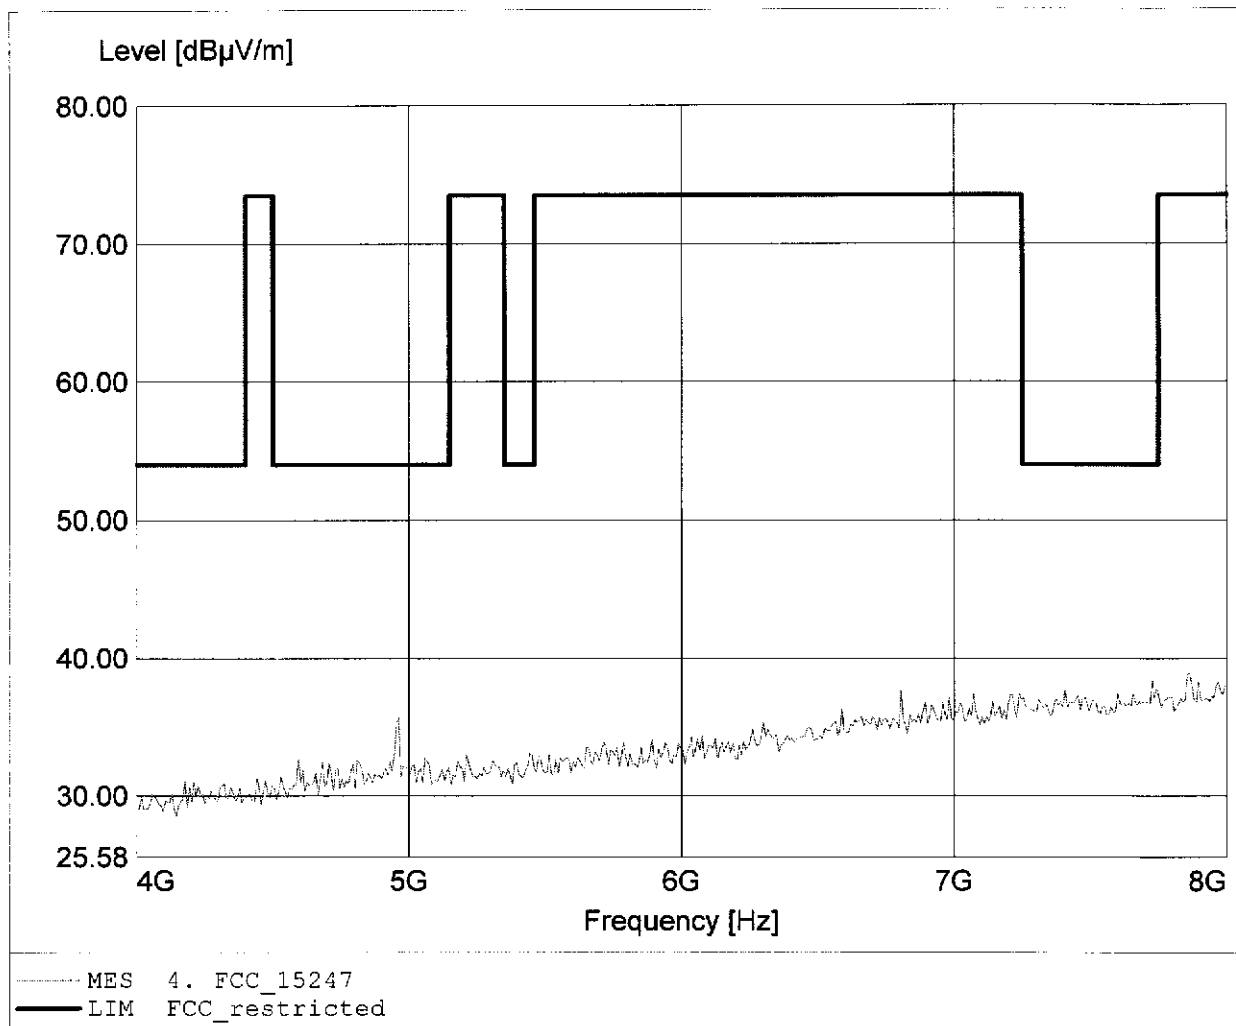

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.960GHz, Emax: 39.09dBµV/m, RBW: 1MHz

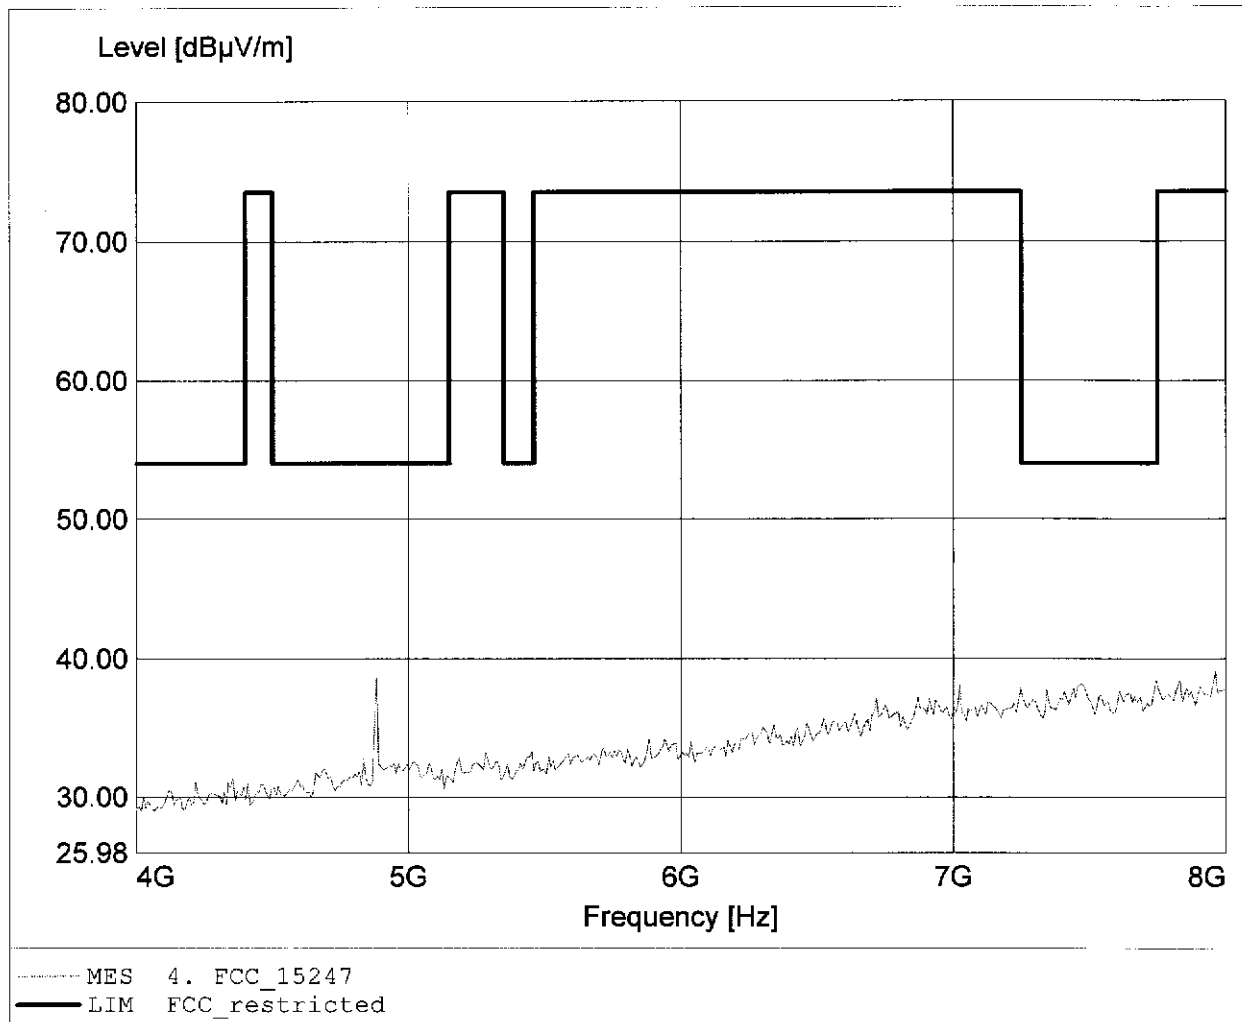

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.158GHz, Emax: 41.94dBuV/m, RBW: 1MHz

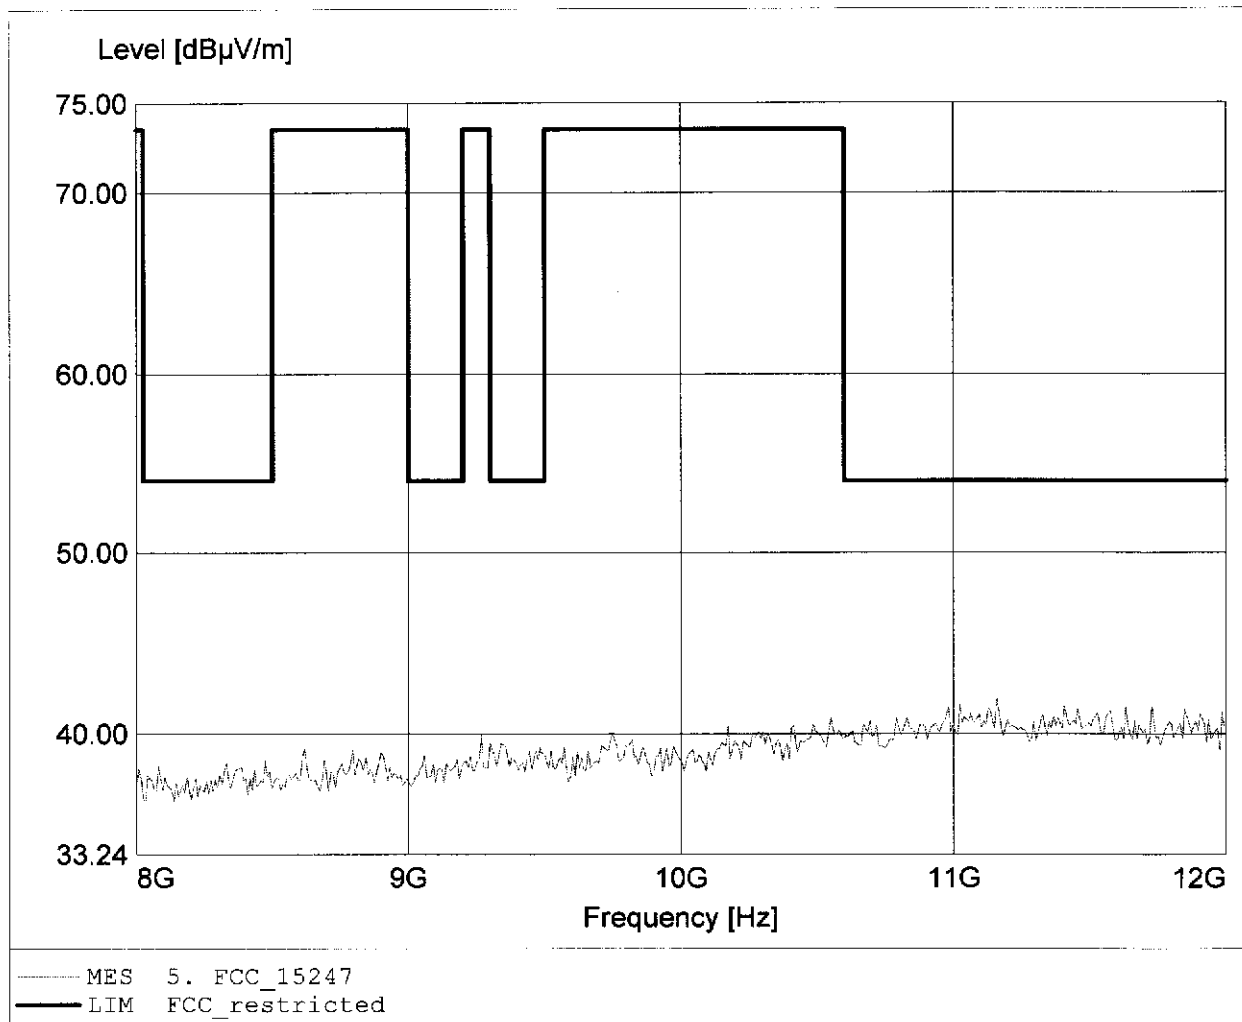

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.990GHz, Emax: 42.36dBμV/m, RBW: 1MHz

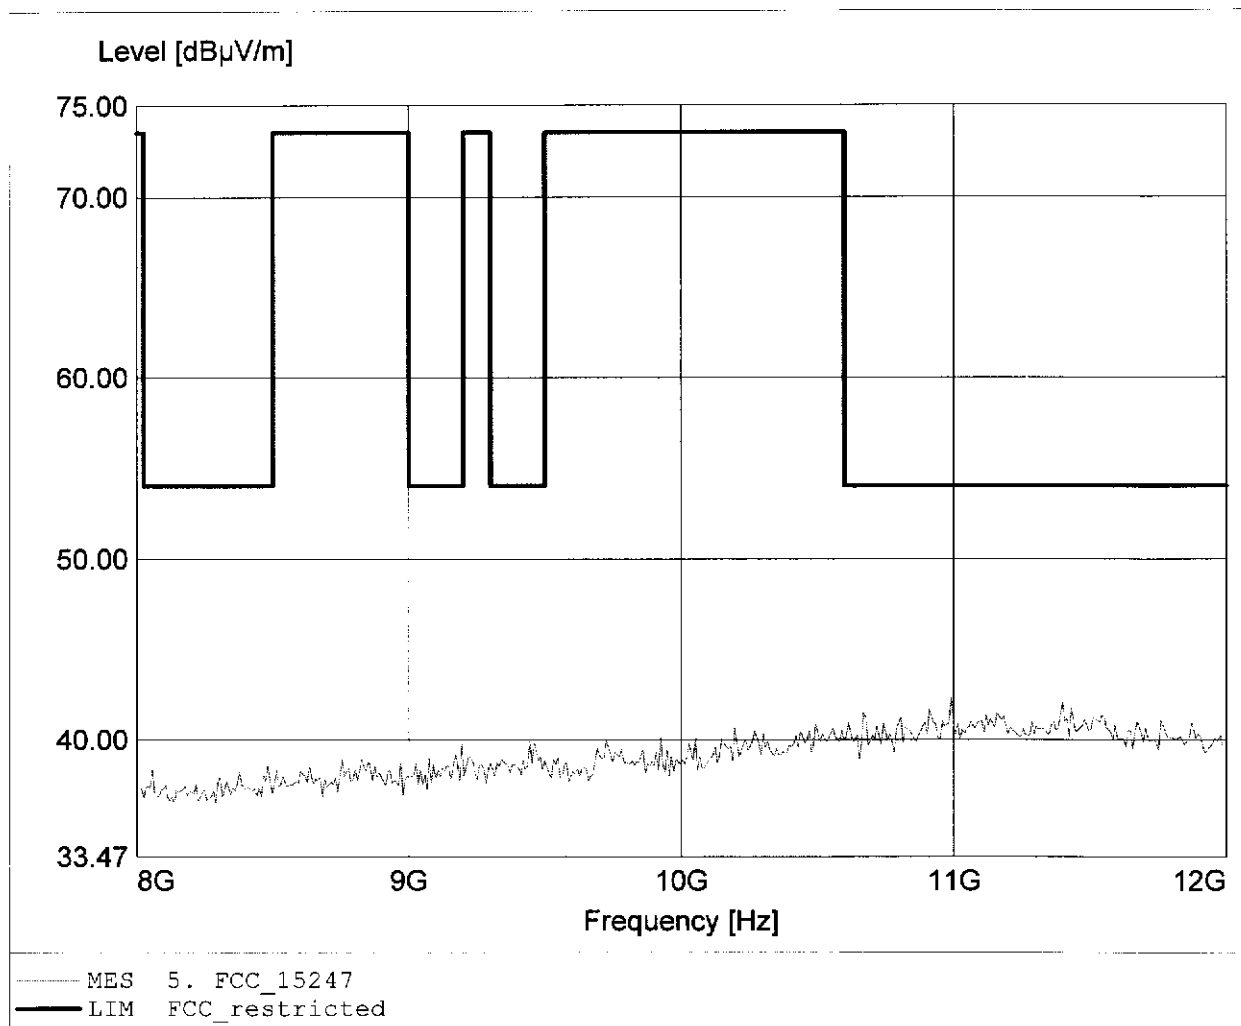

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.395GHz, Emax: 44.89dBμV/m, RBW: 1MHz

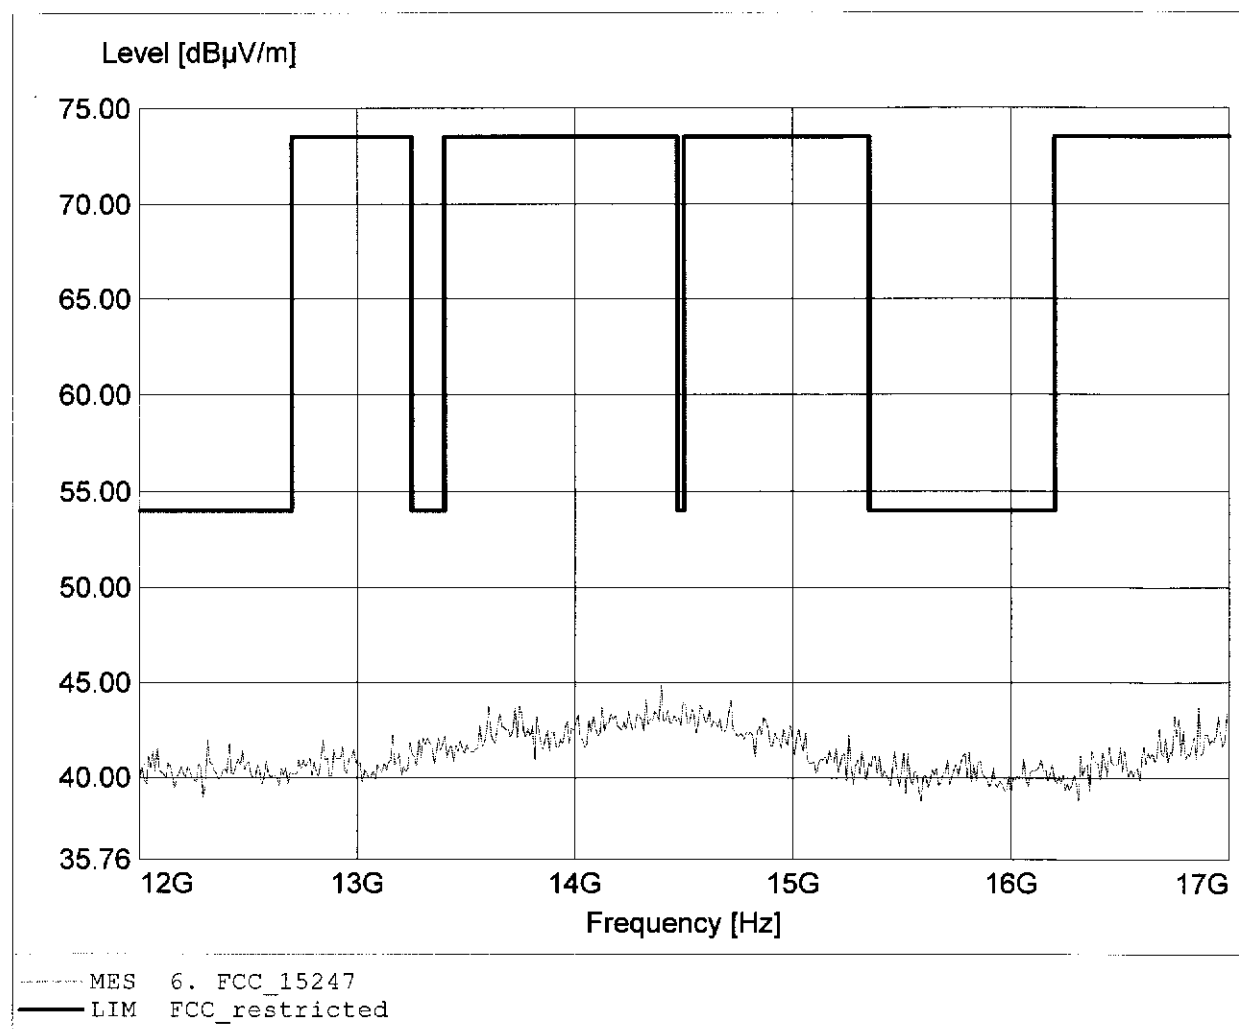

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 13.713GHz, Emax: 44.84dBμV/m, RBW: 1MHz

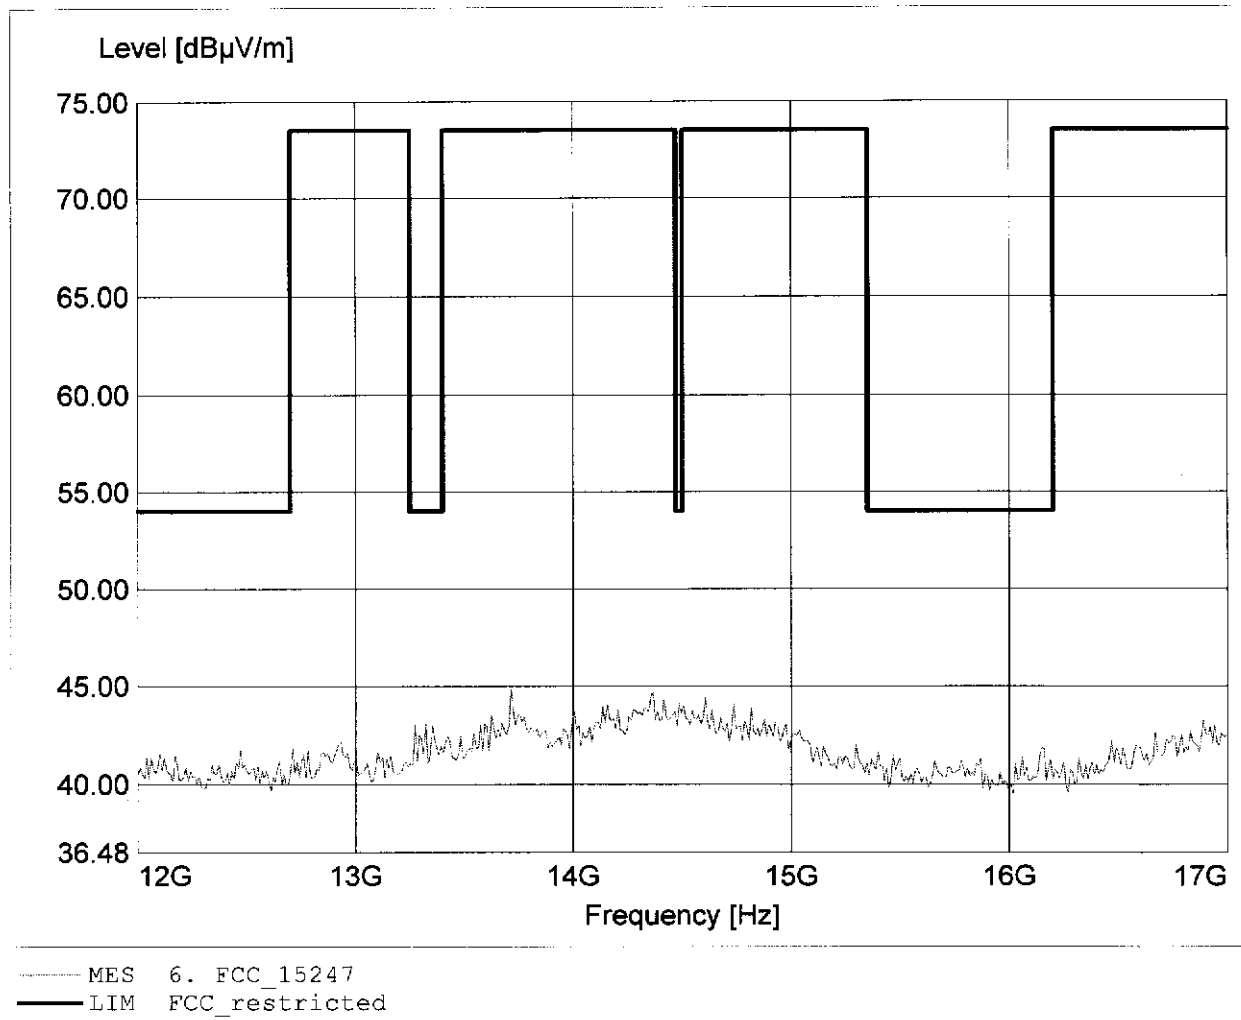

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.171GHz, Emax: 45.98dBμV/m, RBW: 1MHz

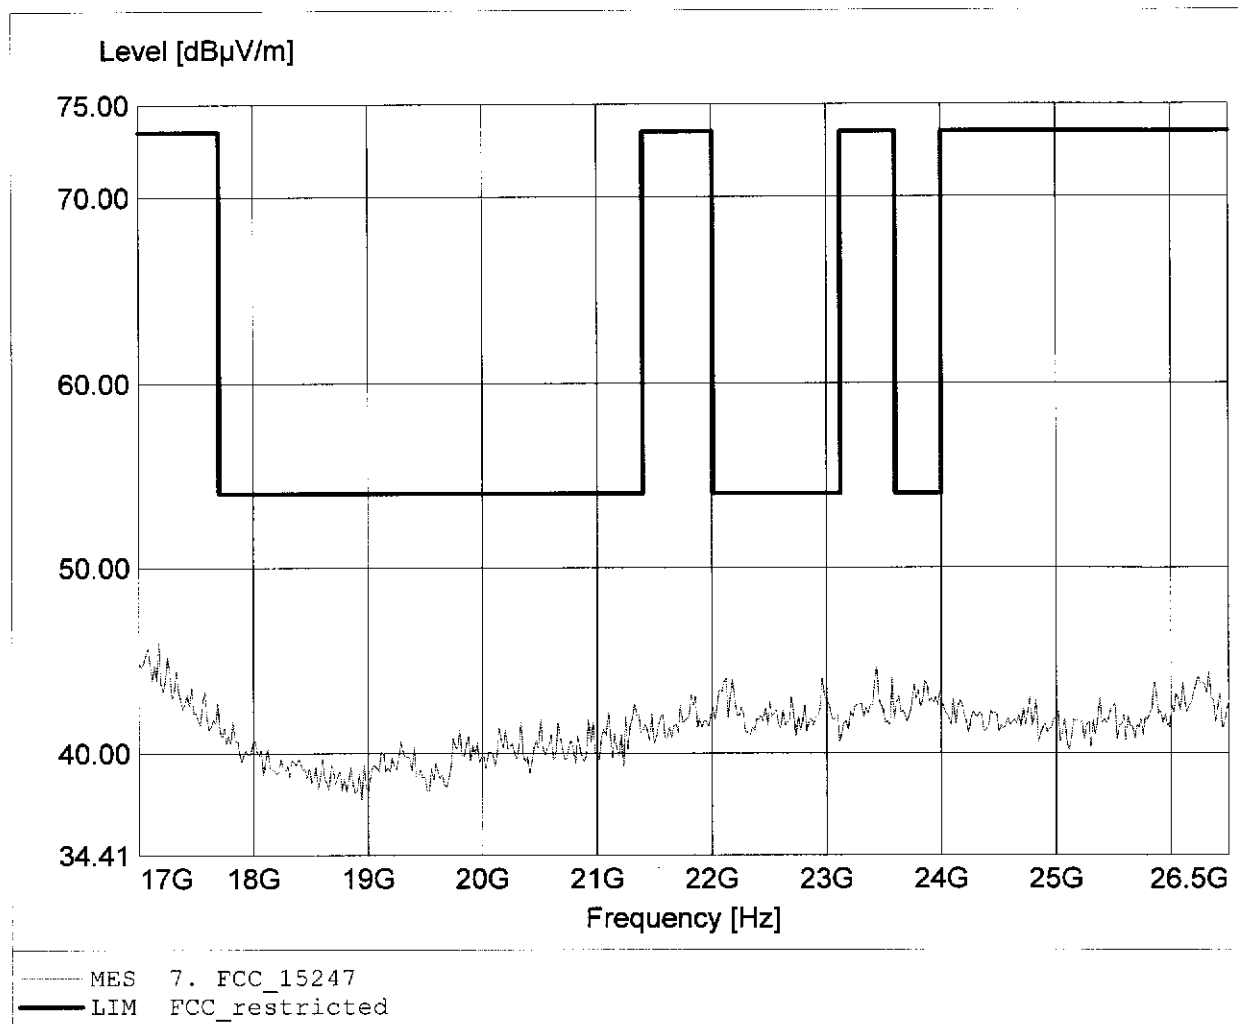

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.095GHz, Emax: 45.60dBµV/m, RBW: 1MHz

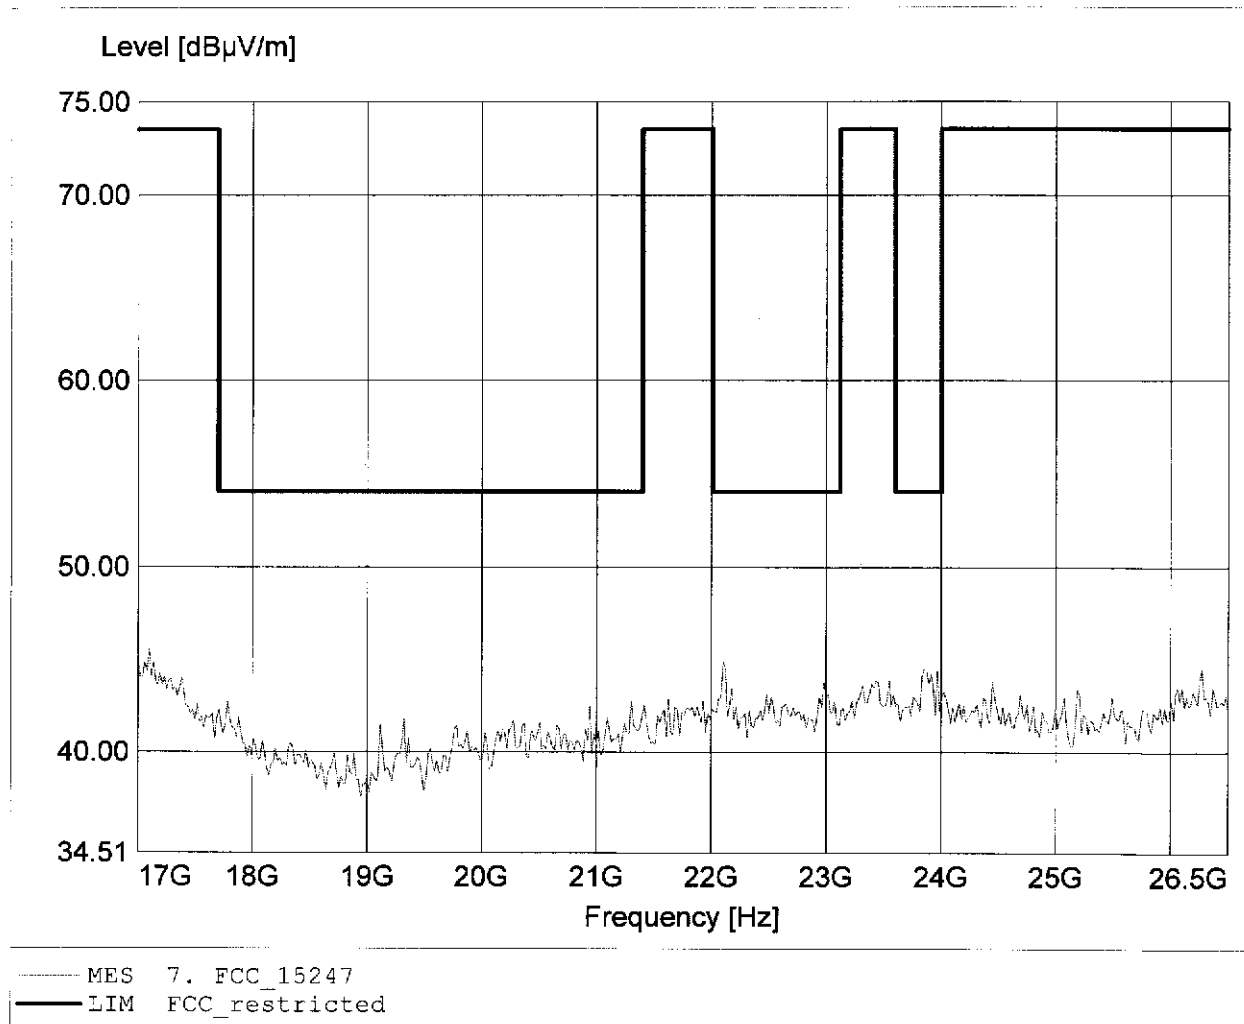

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 30.681MHz, Emax: 37.33dBμV/m, RBW: 100kHz

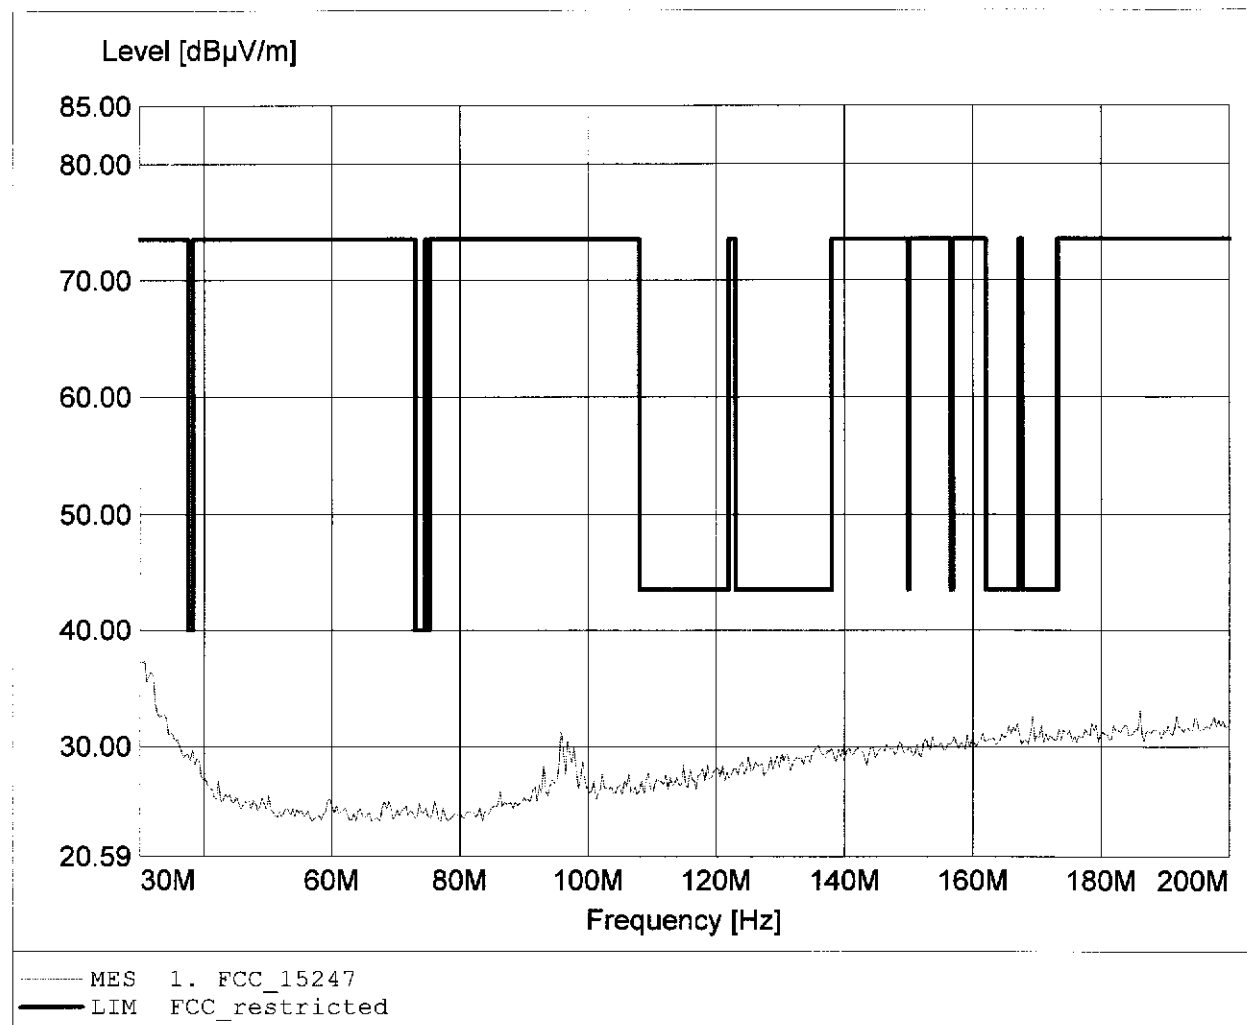

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 194.549MHz, Emax: 32.45dBµV/m, RBW: 100kHz

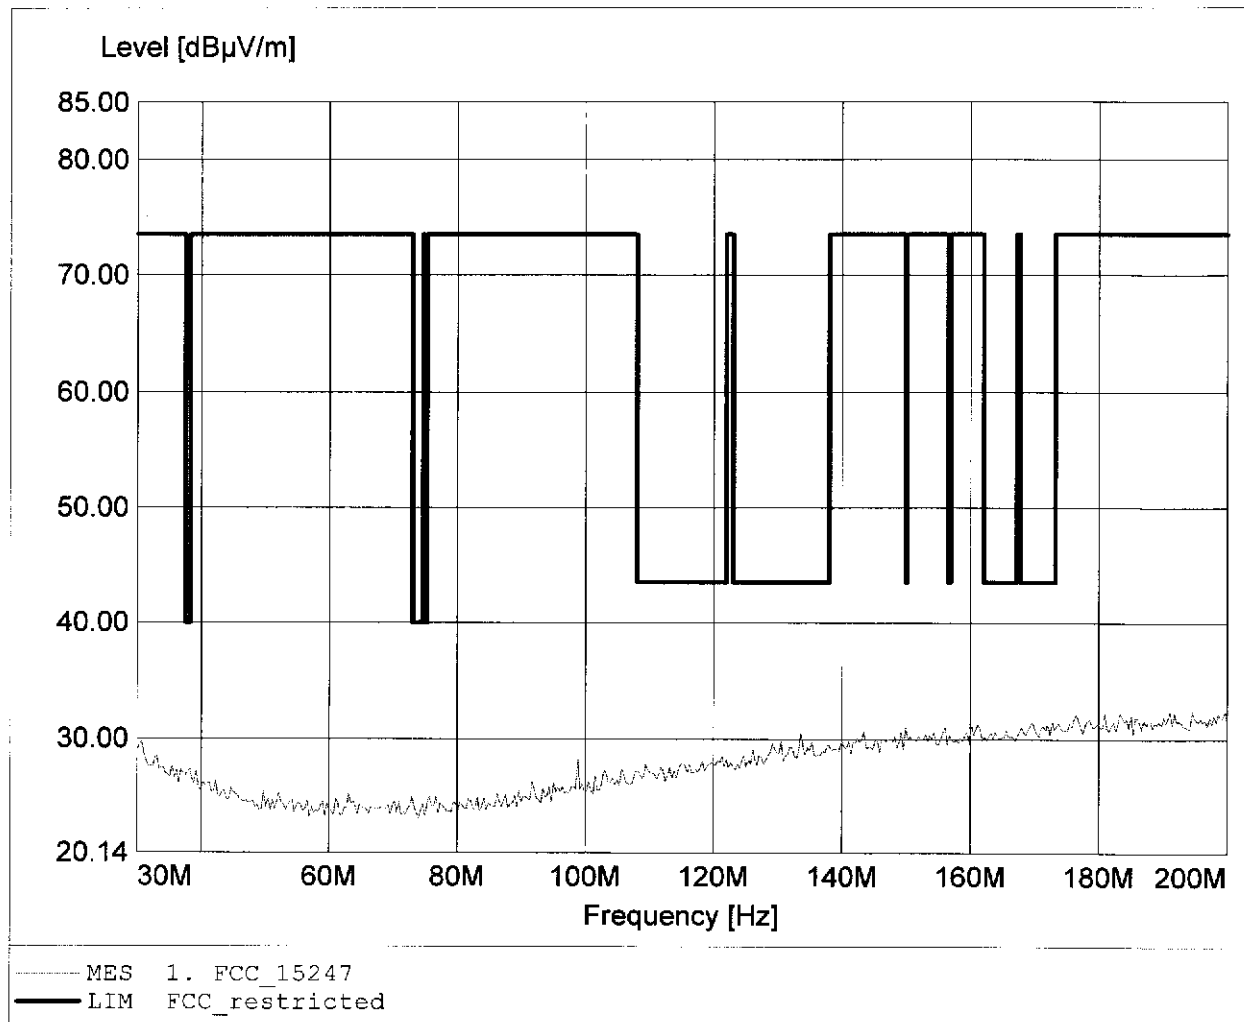

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 318.637MHz, Emax: 33.14dBµV/m, RBW: 100kHz

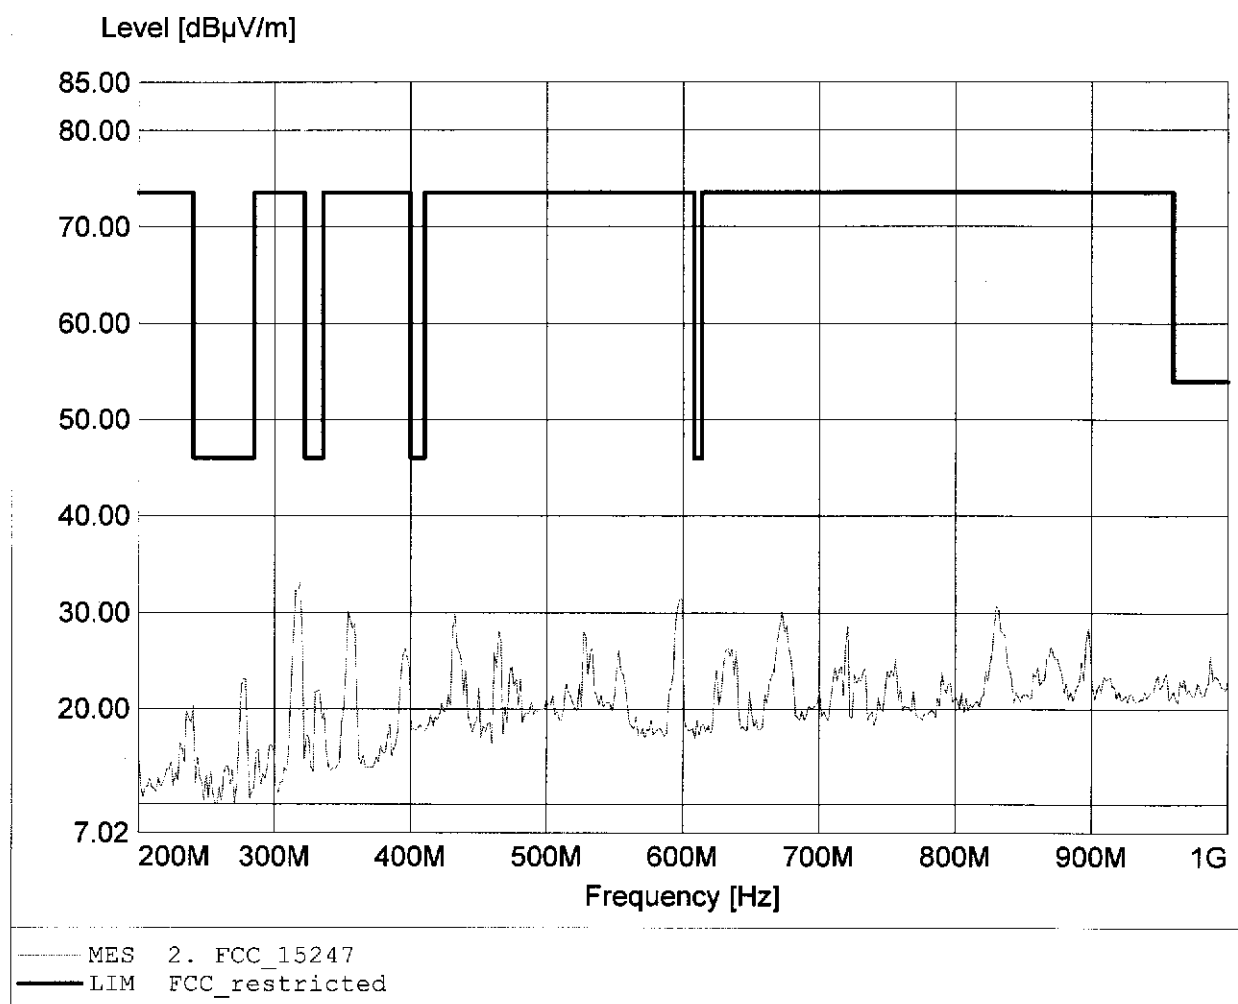

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 892.585MHz, Emax: 30.24dBµV/m, RBW: 100kHz

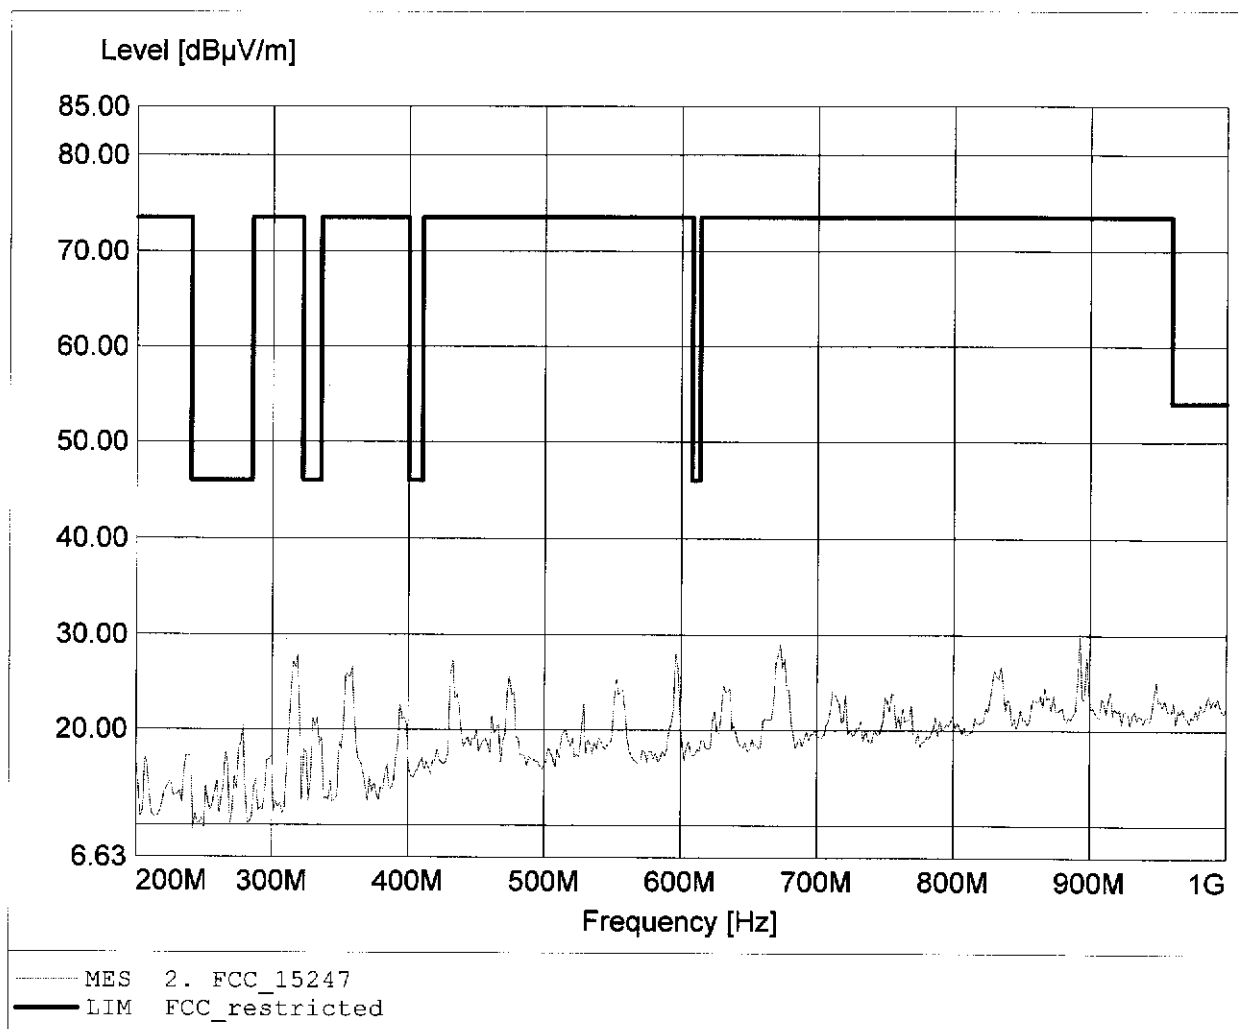

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.923GHz, Emax: 47.95dBµV/m, RBW: 1MHz

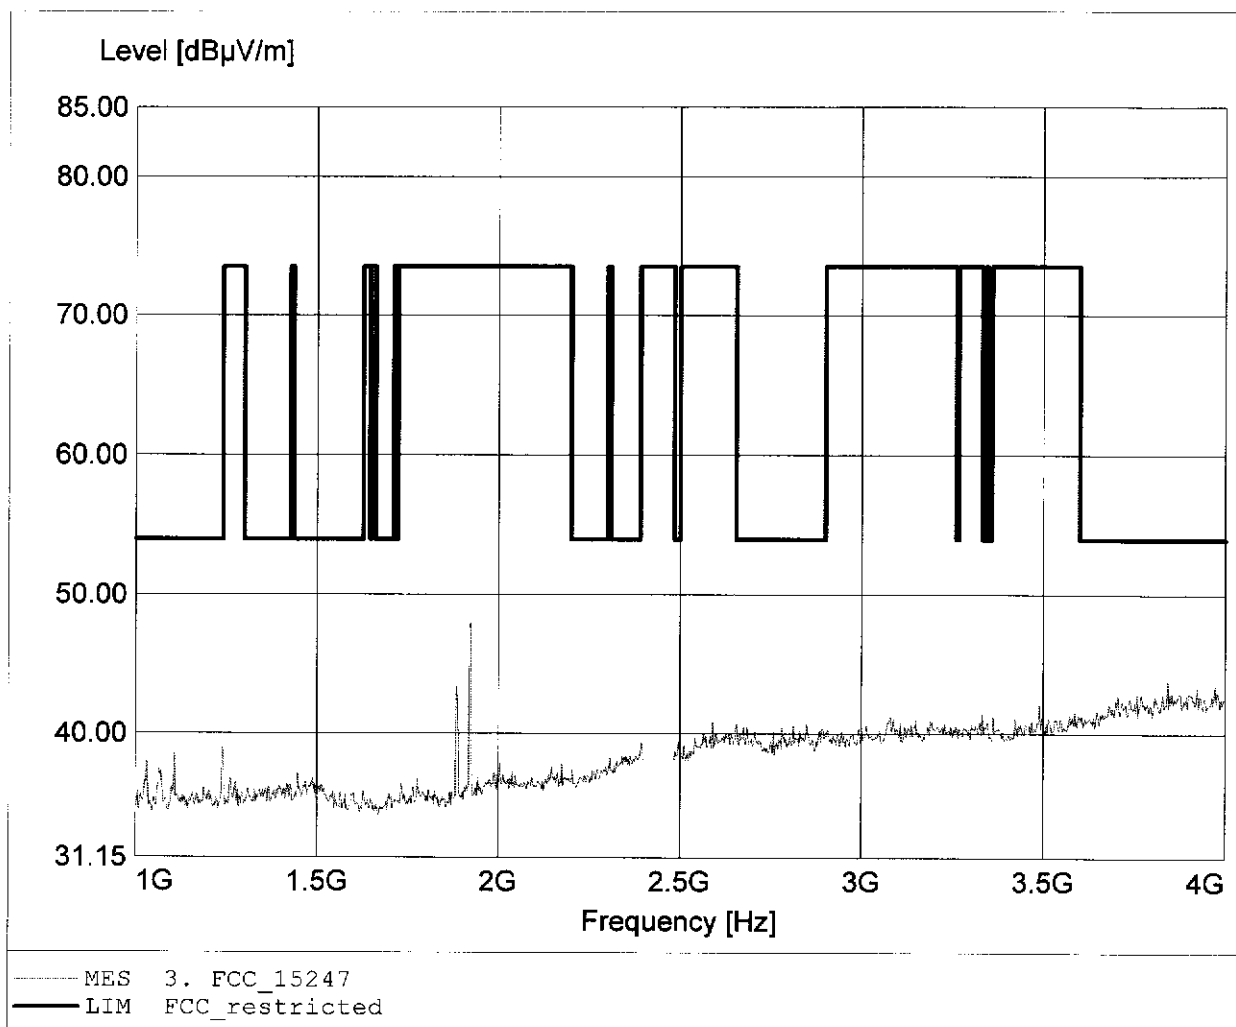

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.923GHz, Emax: 48.65dBµV/m, RBW: 1MHz

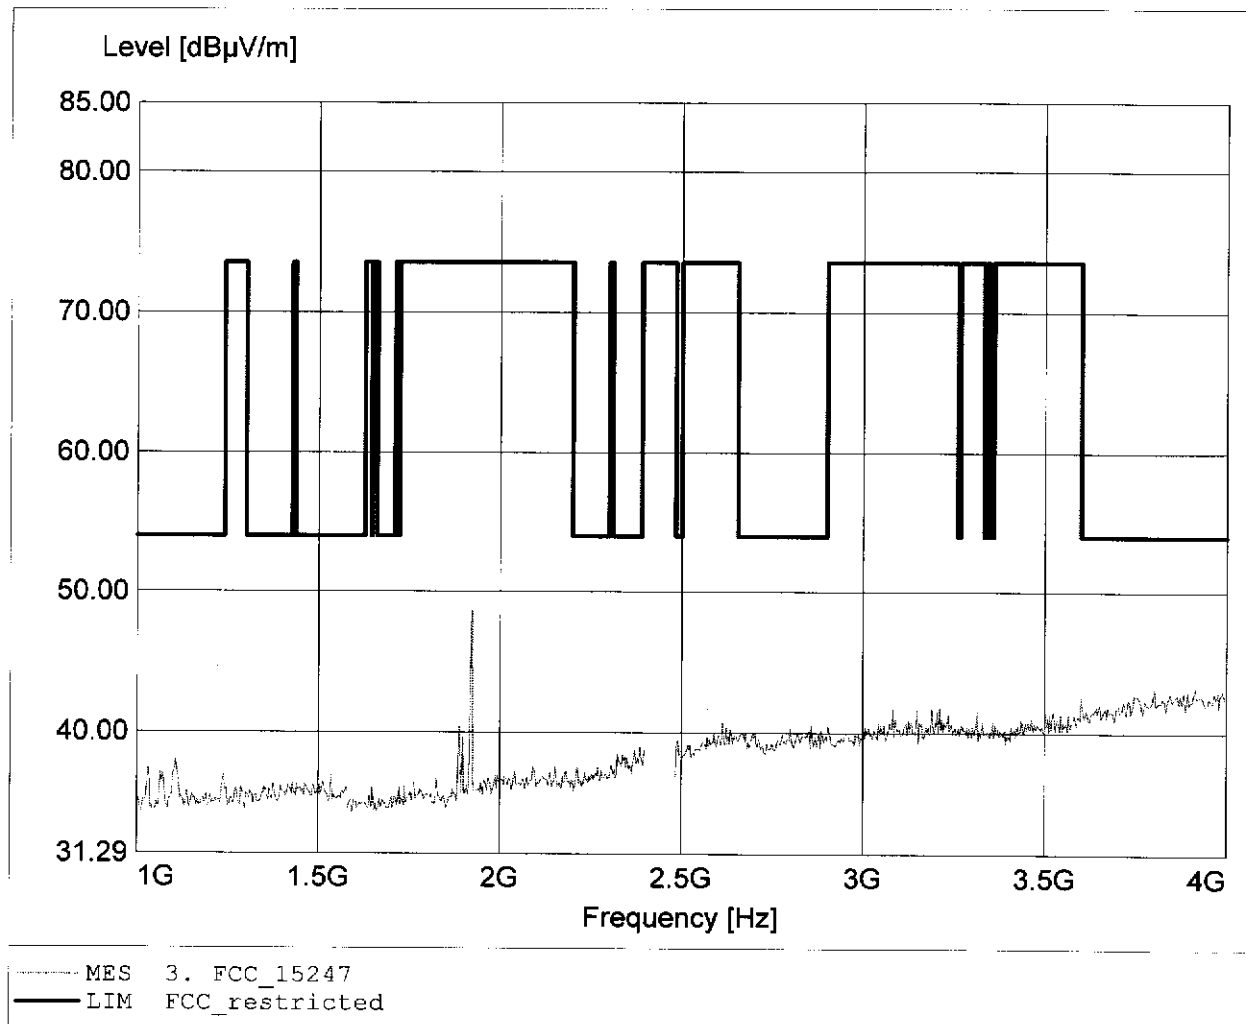

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.864GHz, Emax: 38.96dBµV/m, RBW: 1MHz

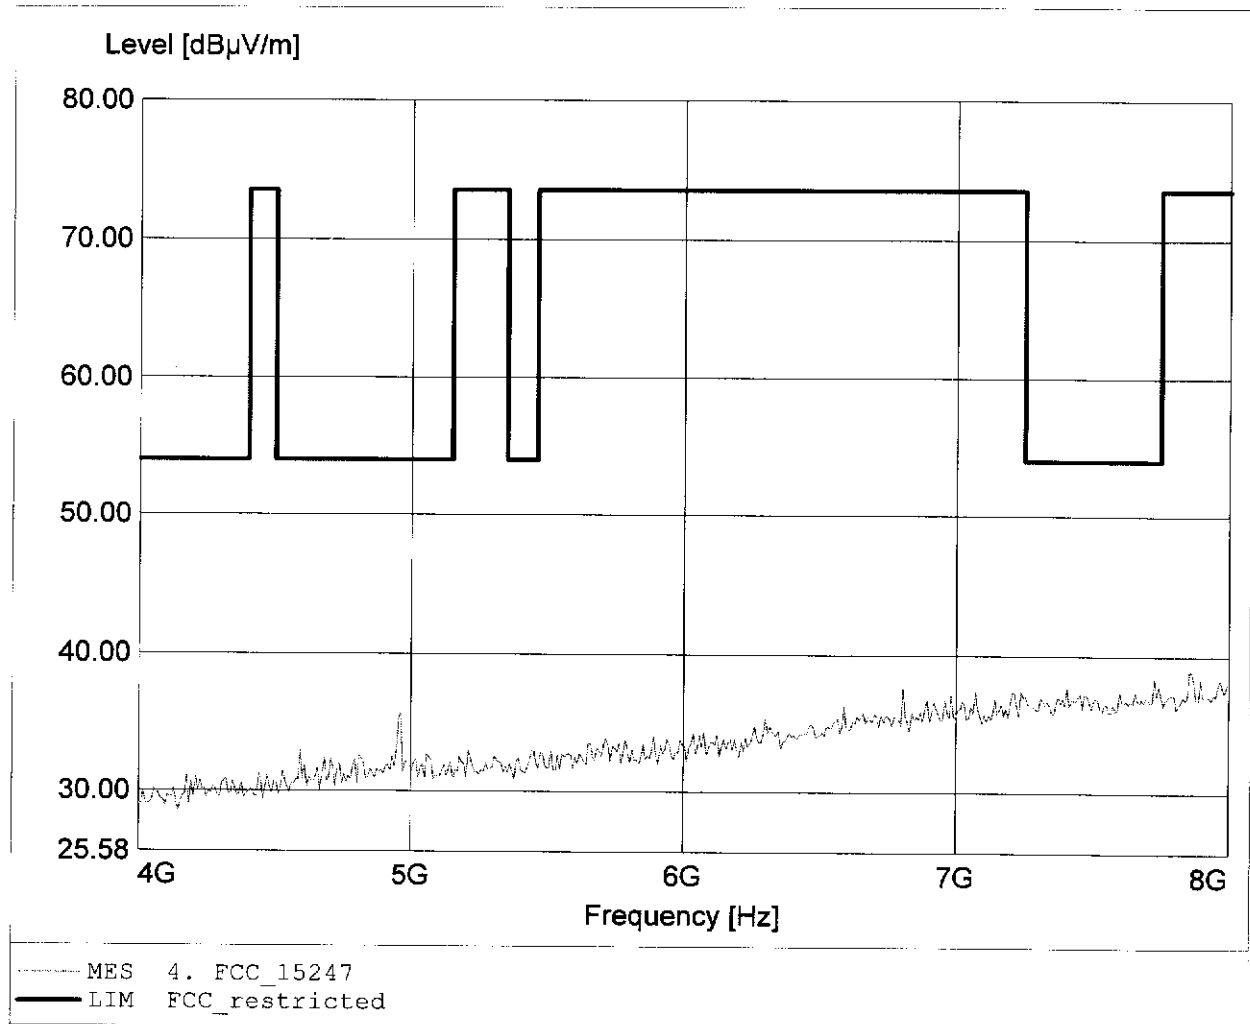

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 41.92dBµV/m, RBW: 1MHz

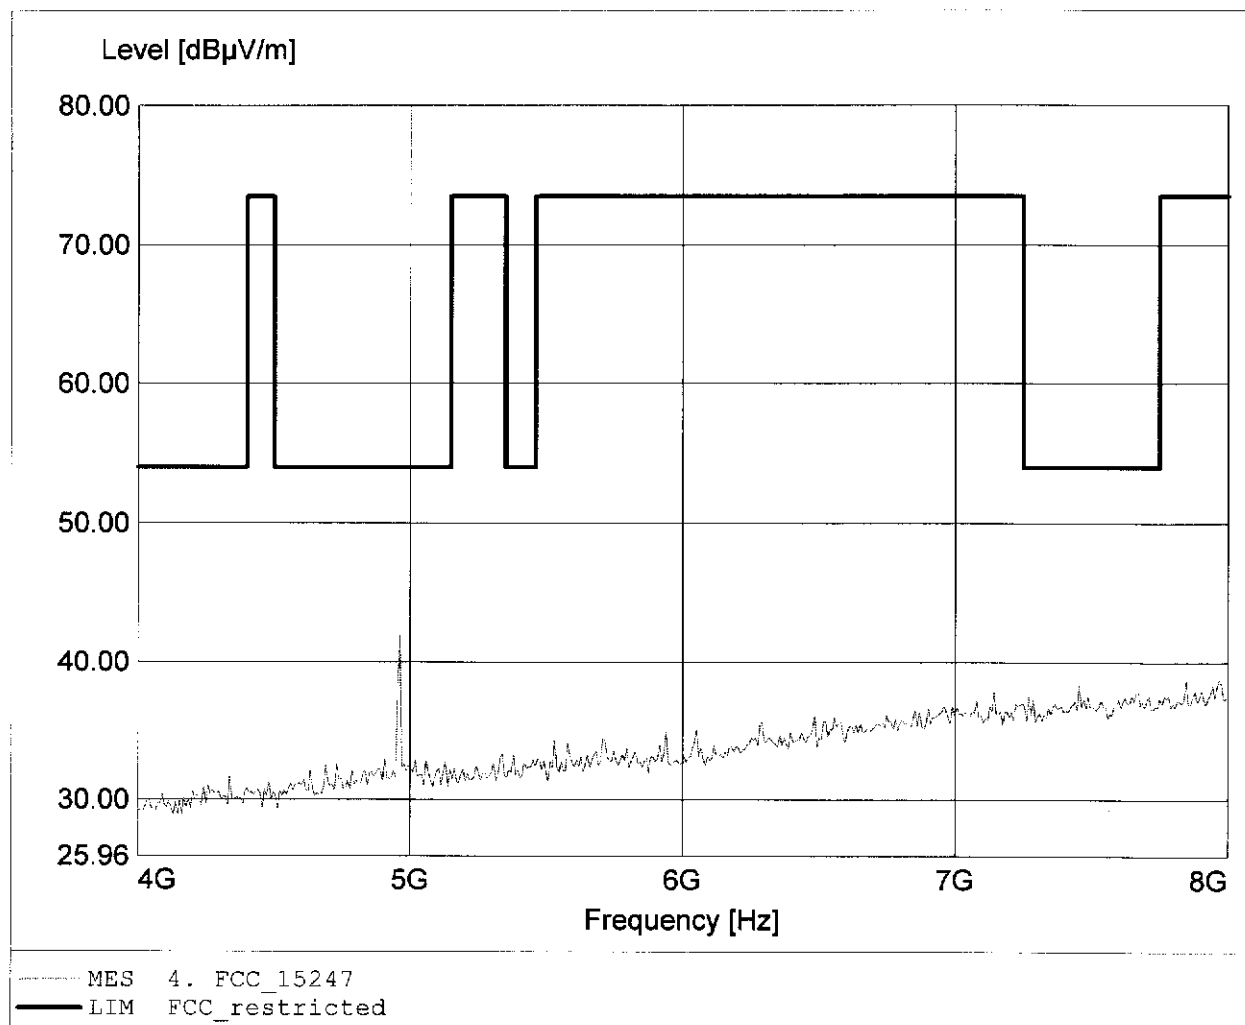

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.158GHz, Emax: 41.94dBμV/m, RBW: 1MHz

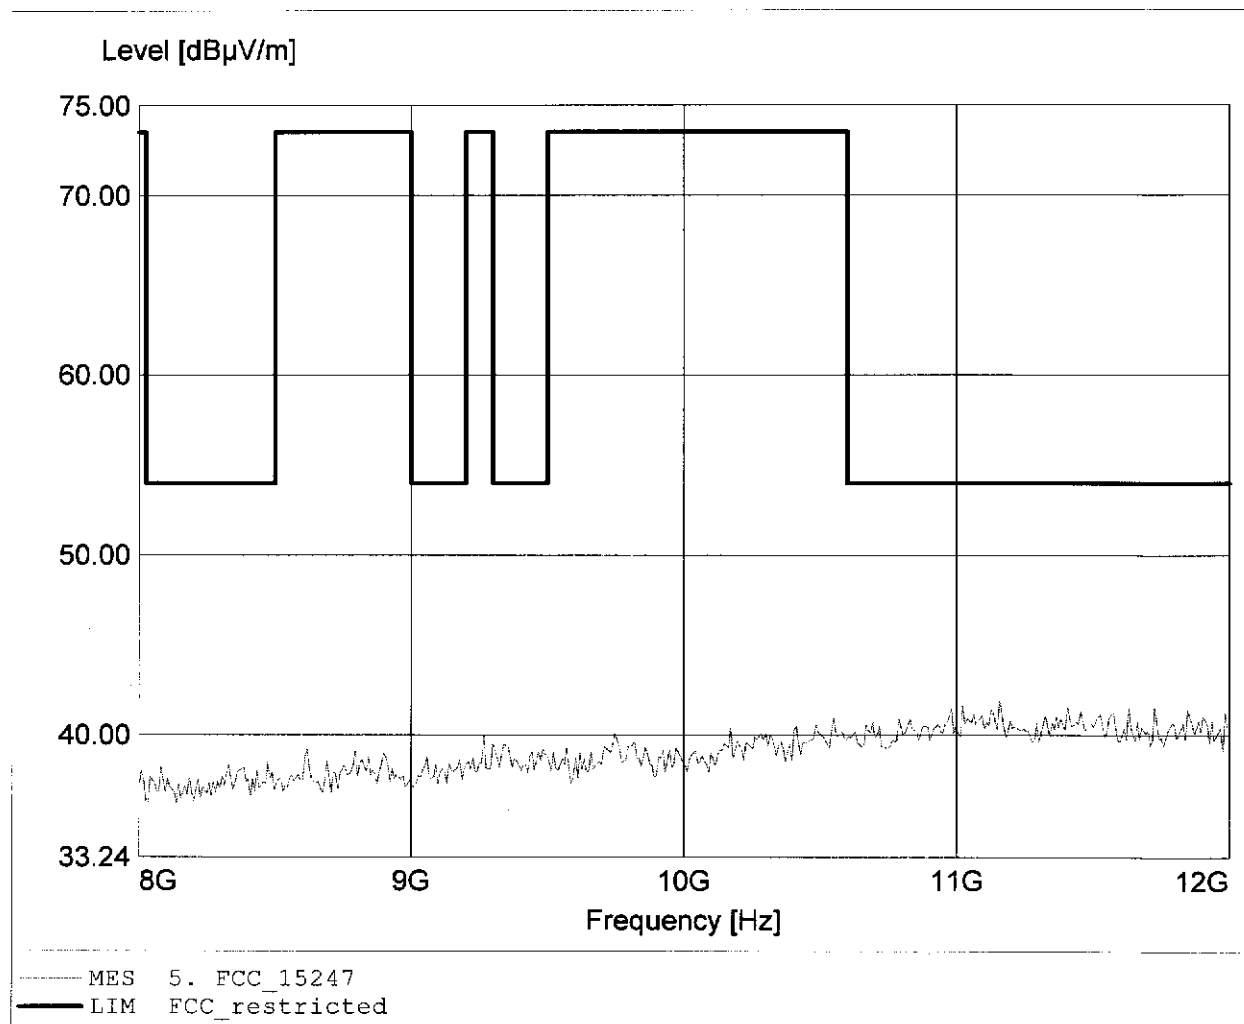

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2441 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 10.990GHz, Emax: 42.36dBμV/m, RBW: 1MHz

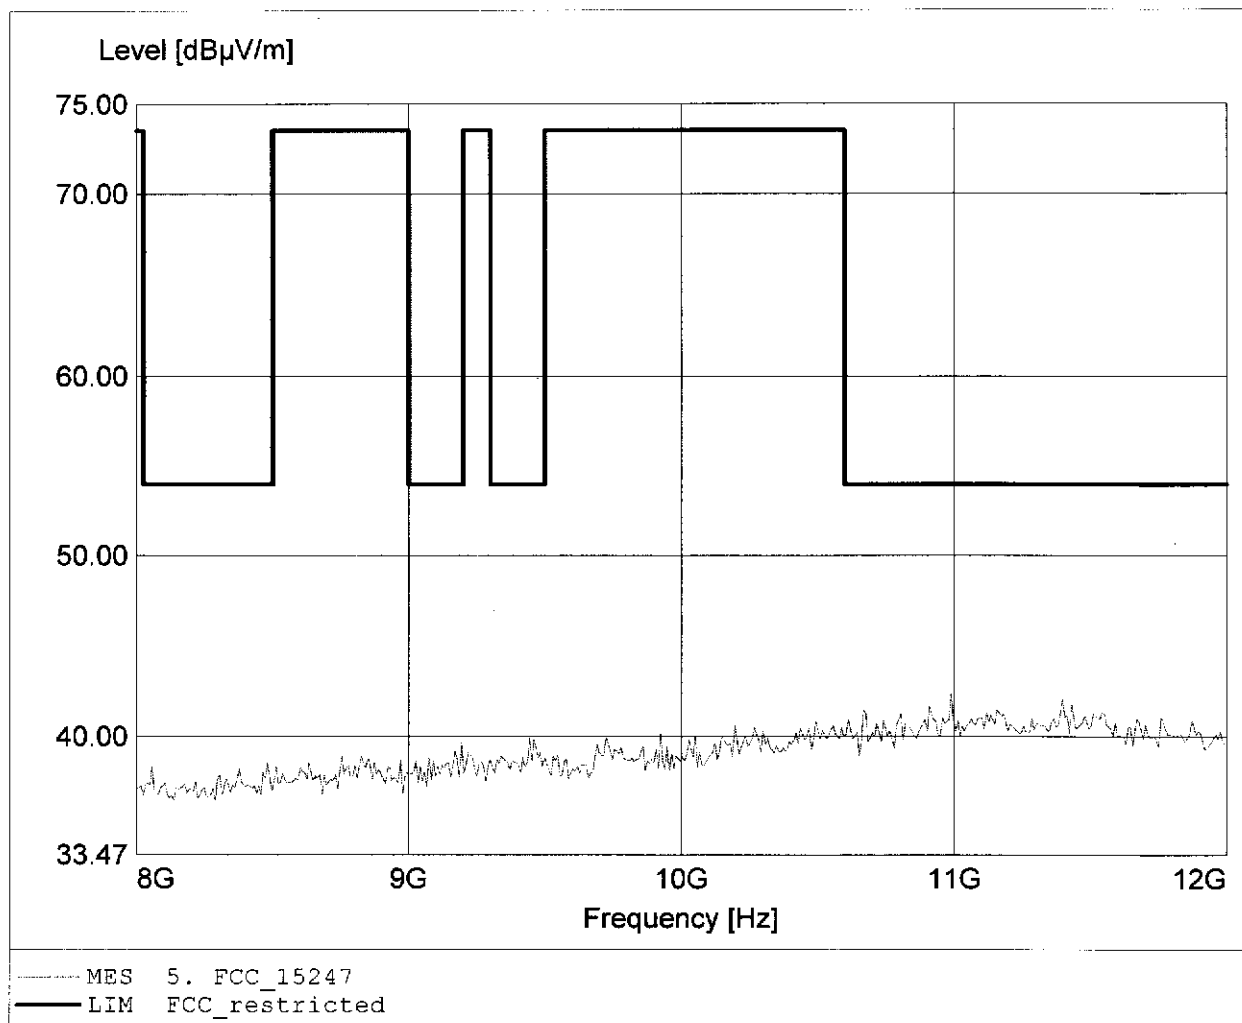

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.735GHz, Emax: 44.93dBμV/m, RBW: 1MHz

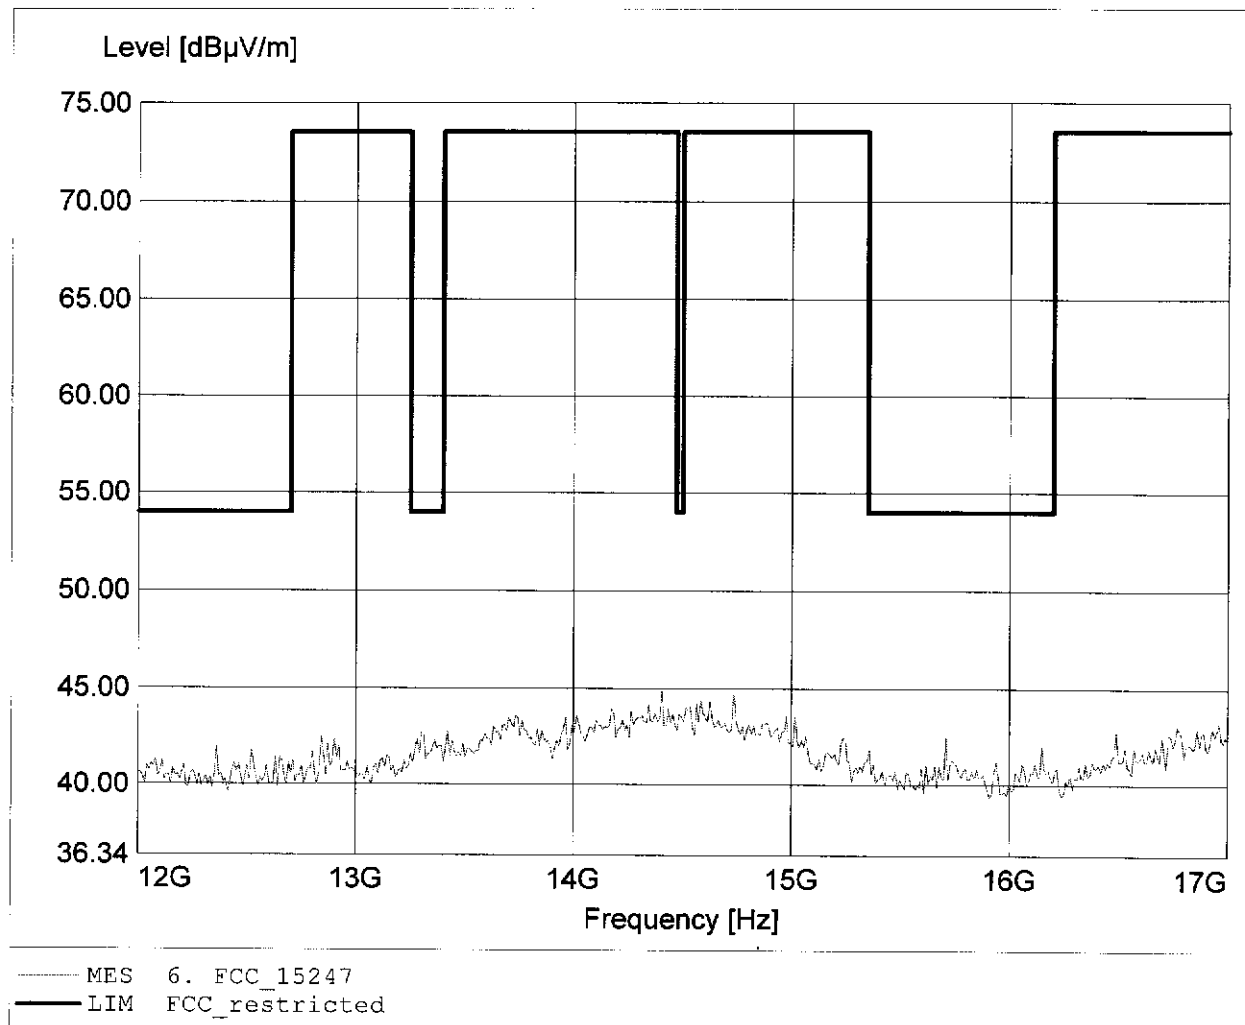

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.886GHz, Emax: 44.60dBμV/m, RBW: 1MHz

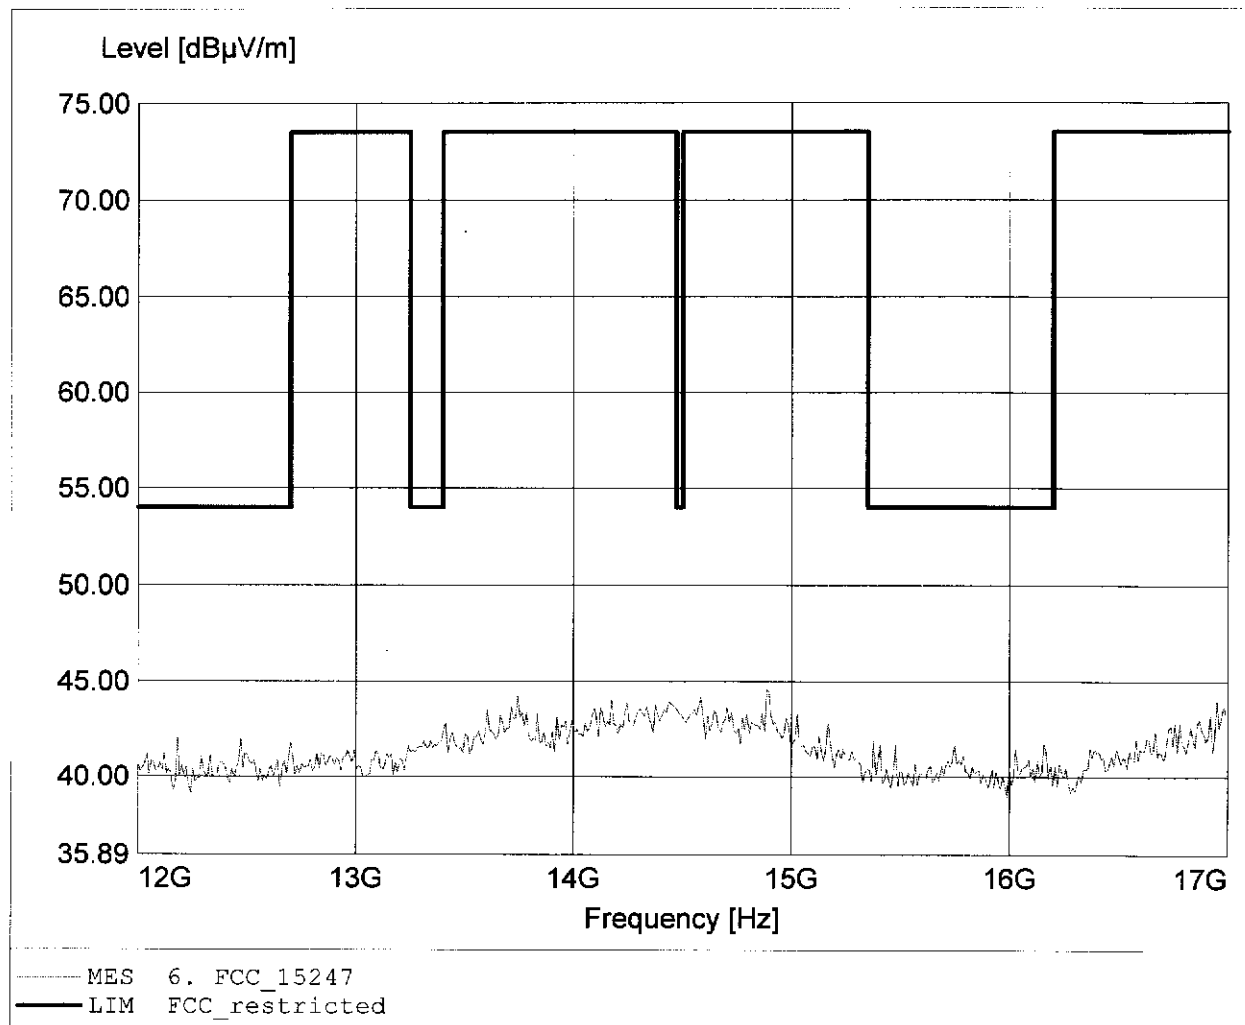

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.095GHz, Emax: 45.12dBµV/m, RBW: 1MHz

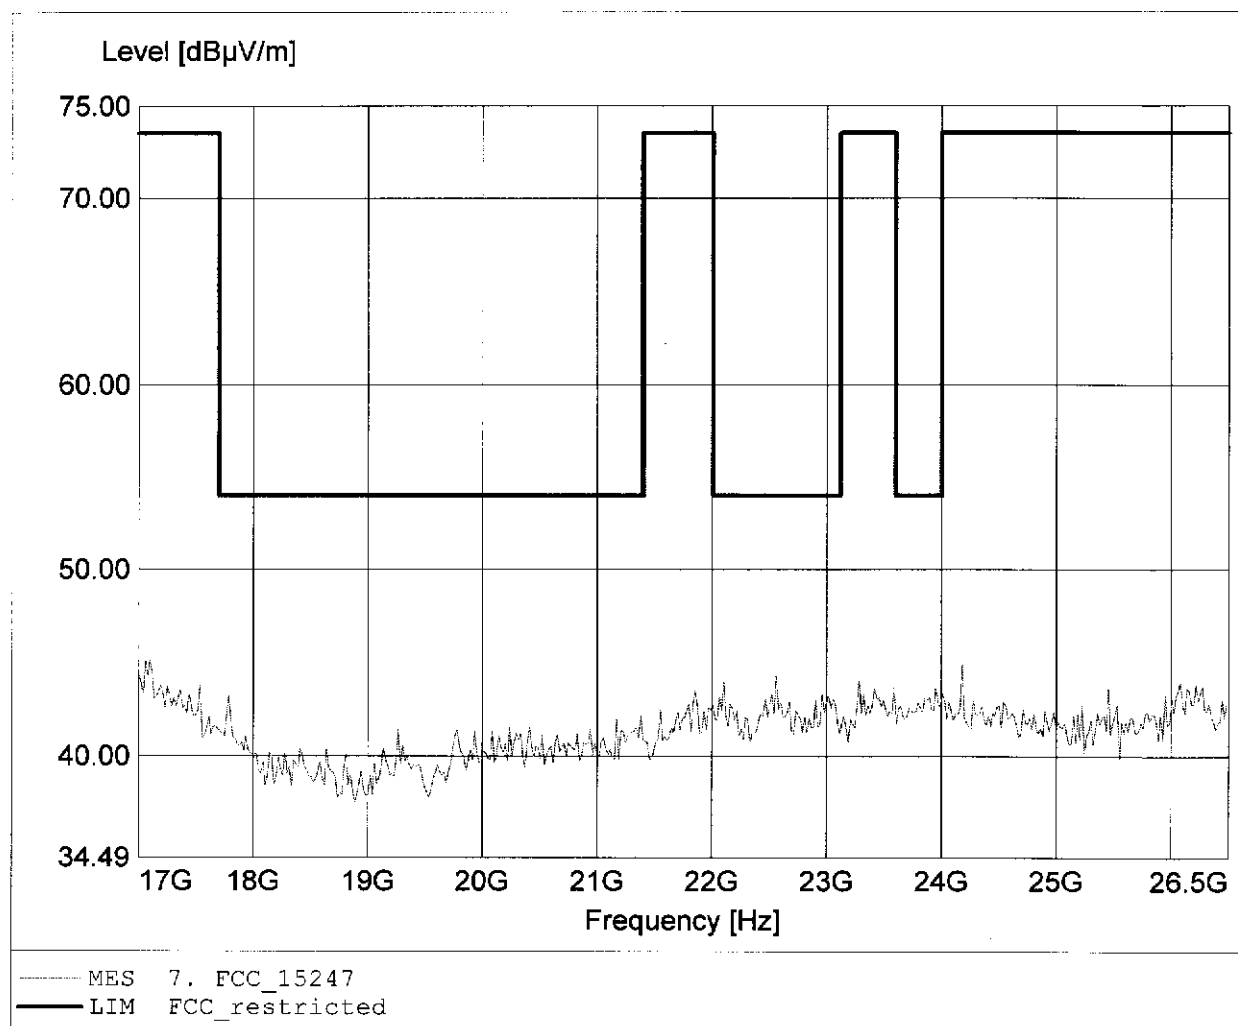

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: GN Netcom
EUT: Bluetooth Headset / 2480 MHz
Model: Jabra BT150
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.095GHz, Emax: 45.60dBµV/m, RBW: 1MHz

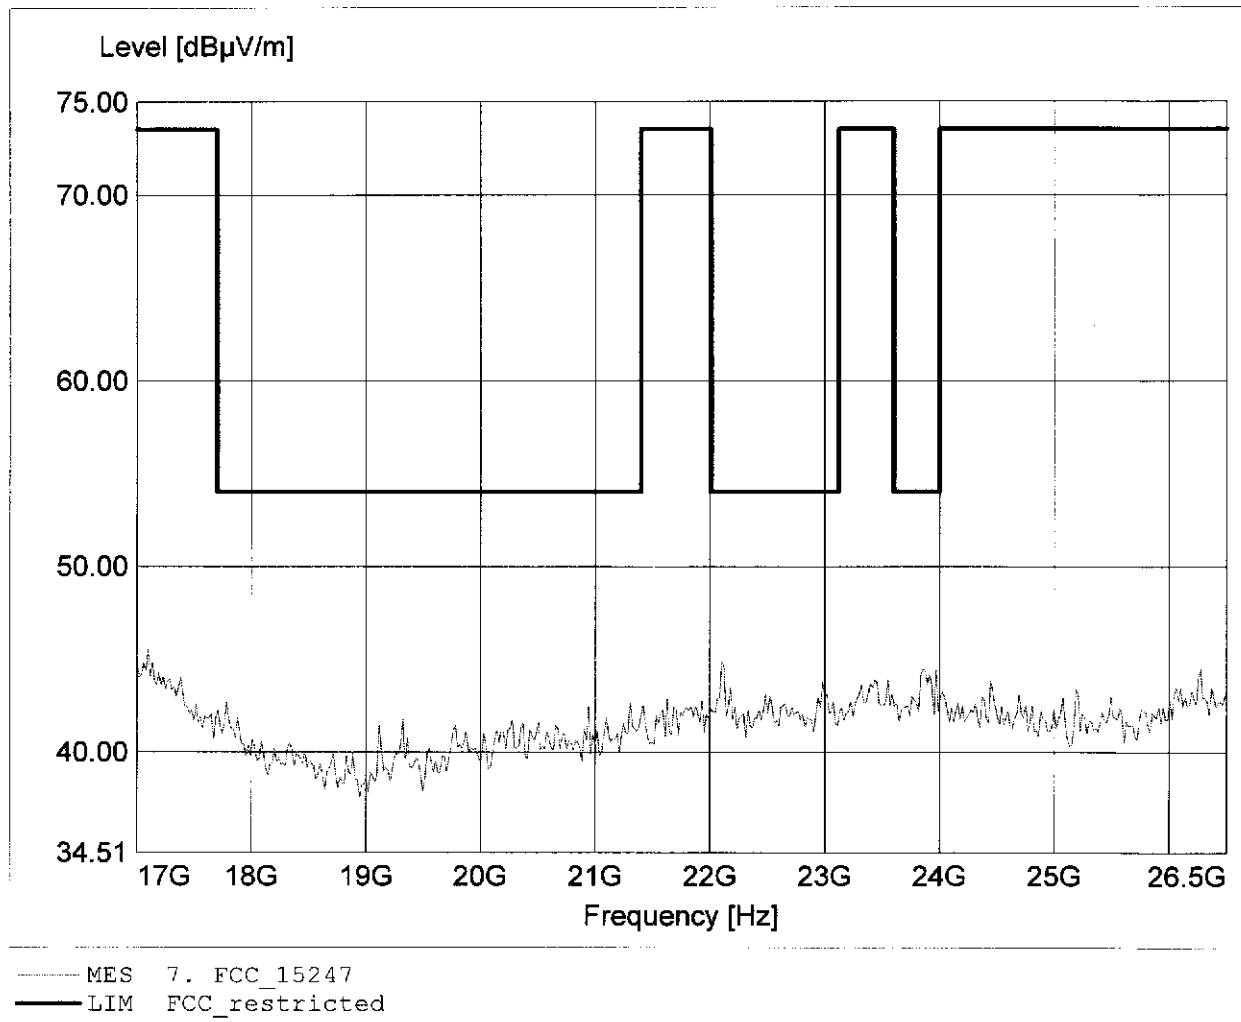

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 0.01 dB VBW 100 kHz
10 dBm 1.00300601 MHz SWT 5 ms Unit dBm

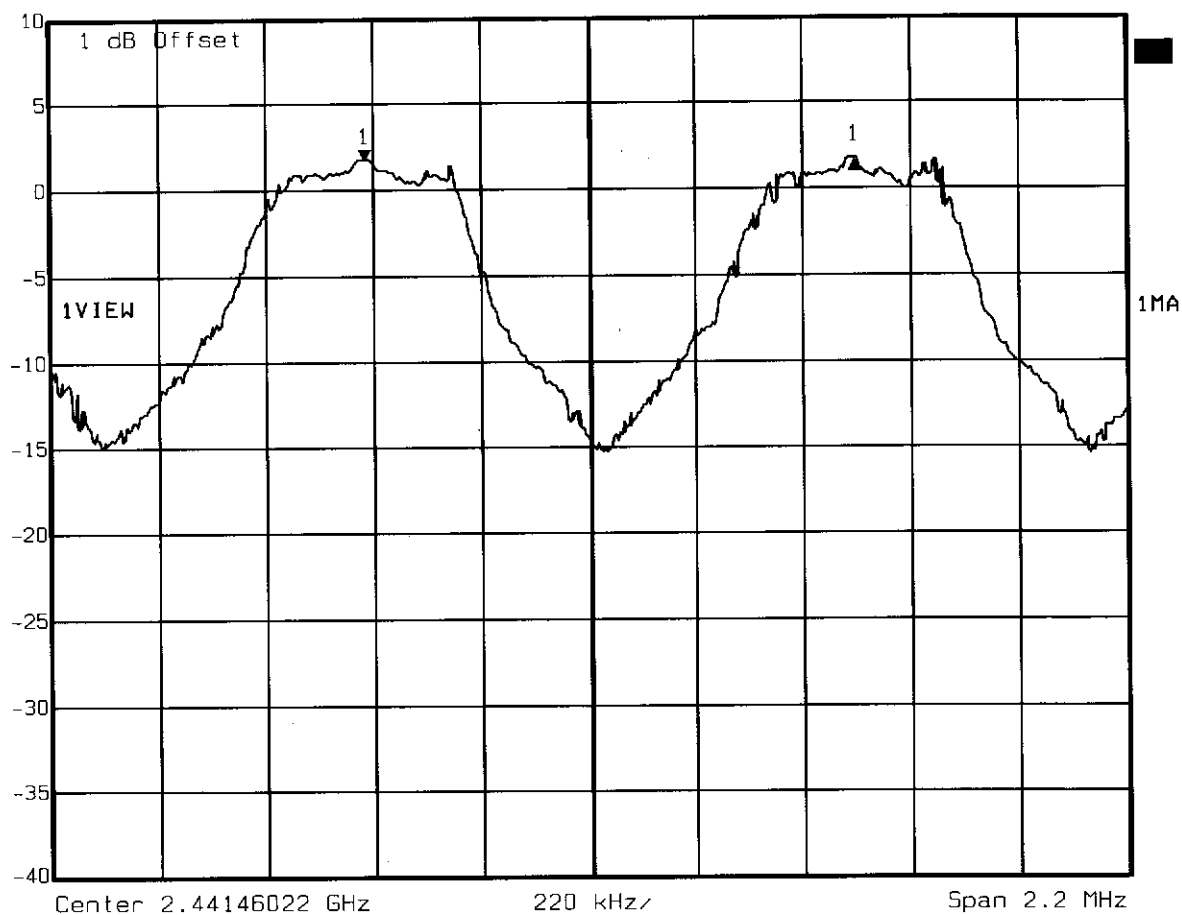

Title: Carrier Frequency Separation
Comment A: Jabra BT150
Date: 12.JUL.2005 13:01:27


Appendix F

Number of Hopping Frequencies



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

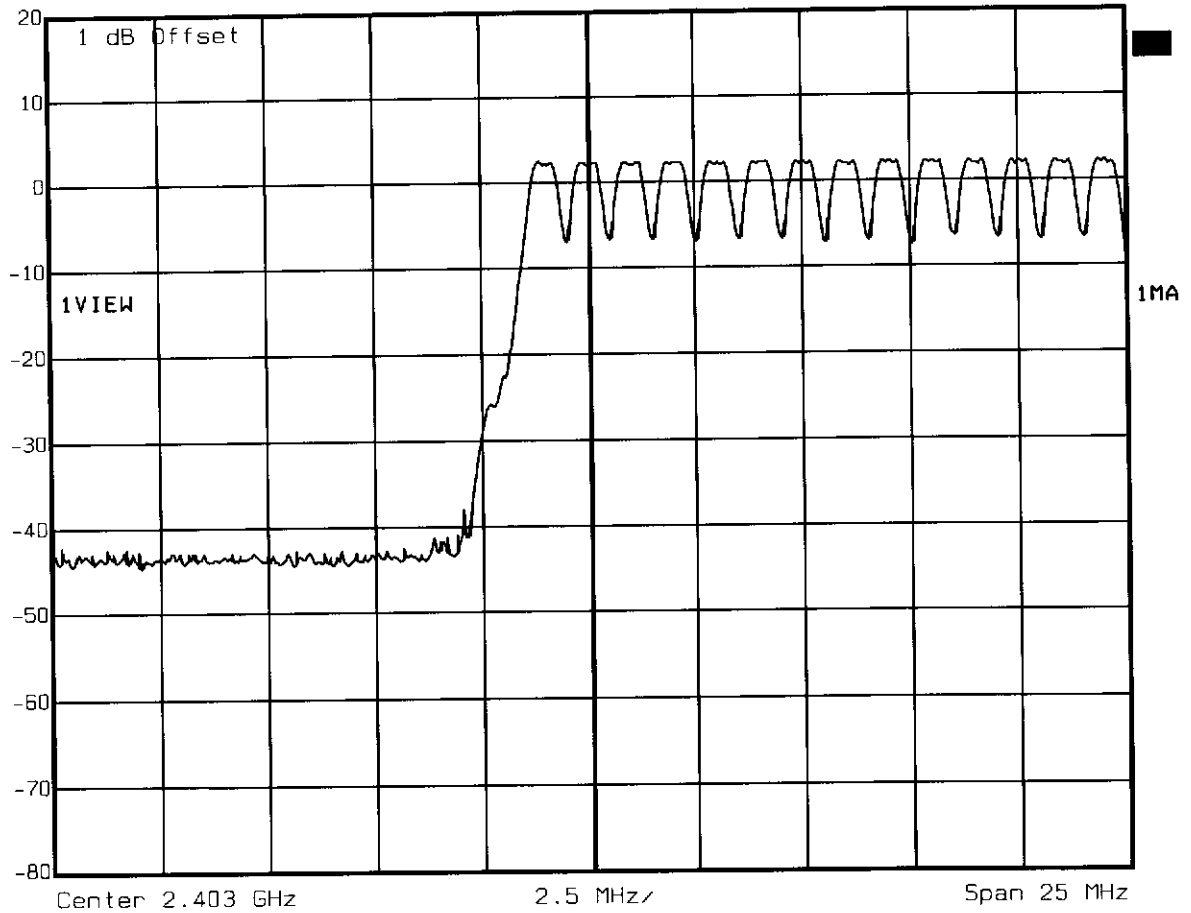


Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: Jabra BT150
Date: 12.JUL.2005 13:09:22



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

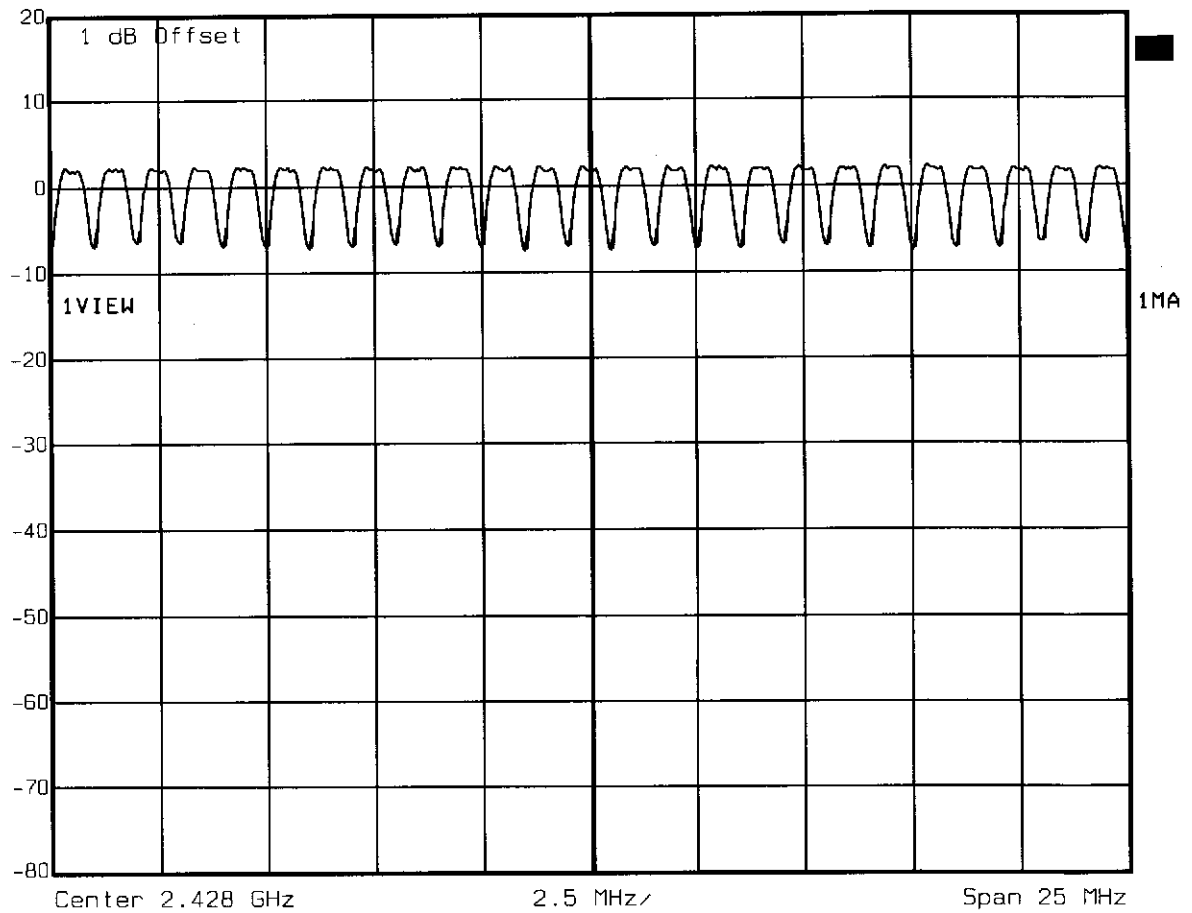


Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: Jabra BT150
Date: 12.JUL.2005 13:13:35



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

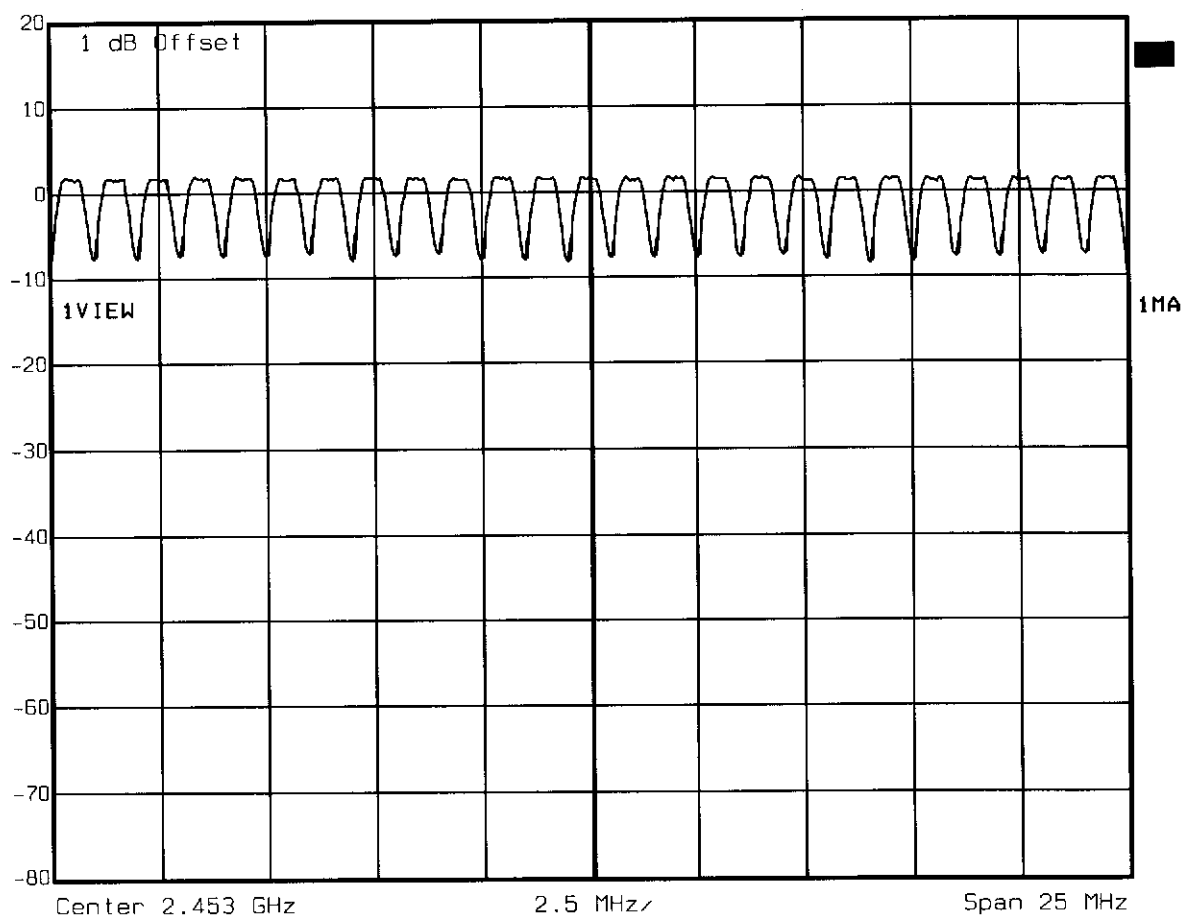


Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: Jabra BT150
Date: 12.JUL.2005 13:15:51



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

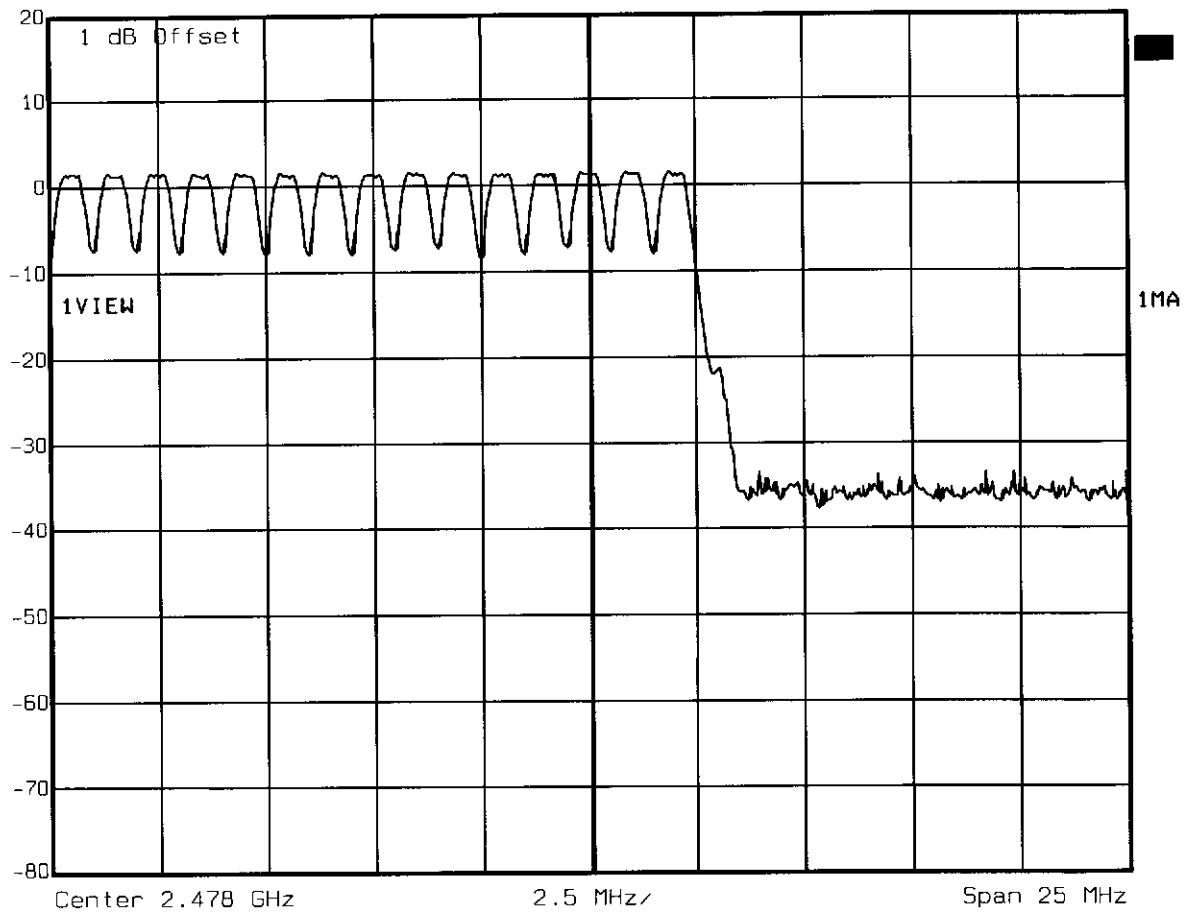


Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: Jabra BT150
Date: 12.JUL.2005 13:18:37

Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl -0.31 dB VBW 1 MHz
15 dBm 2.915832 ms SWT 5 ms Unit dBm

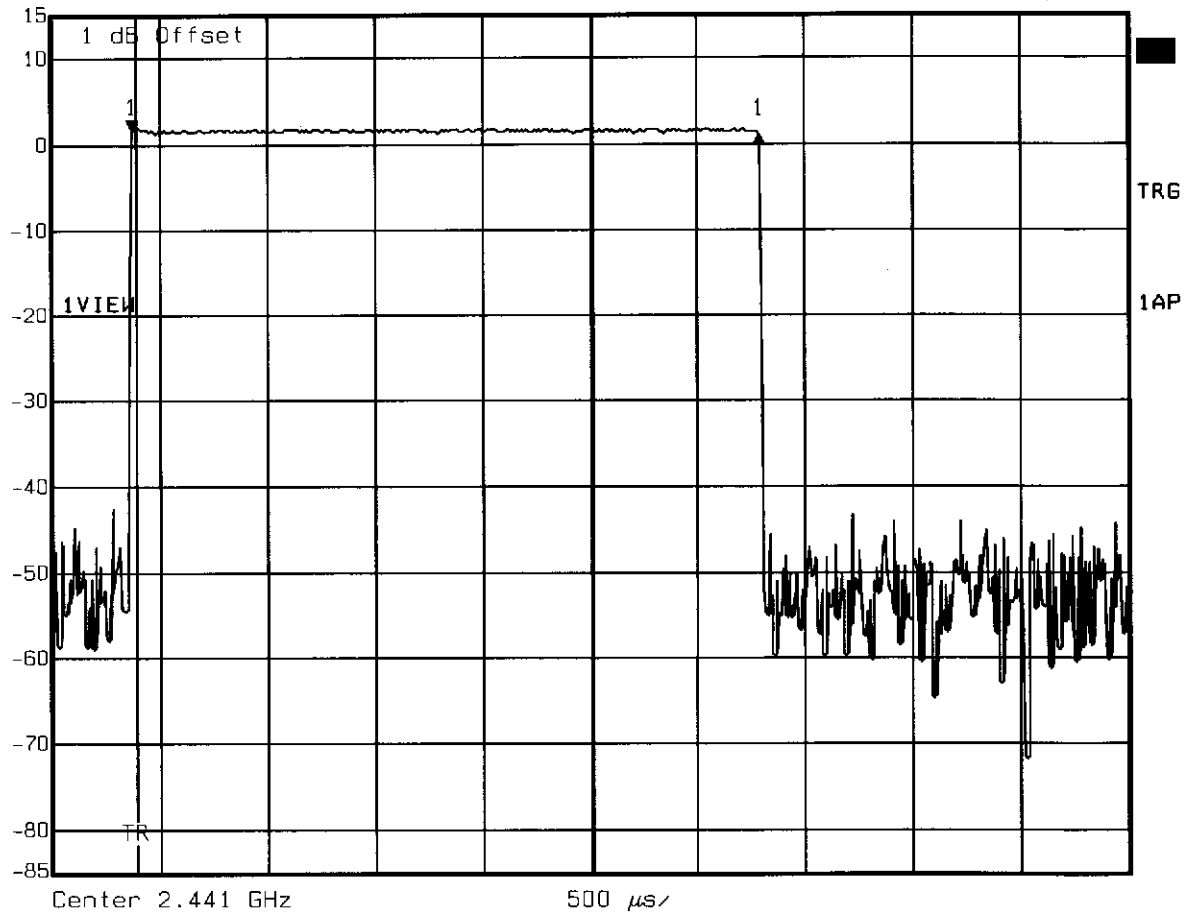

Title: Time of occupancy (Hopping) 107 events*2.916ms=312.012ms
Comment A: Jabra BT150
Date: 12.JUL.2005 13:28:17



Delta 2 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 0.17 dB VBW 1 MHz
30 dBm 3.766132 ms SWT 5.8 ms Unit dBm

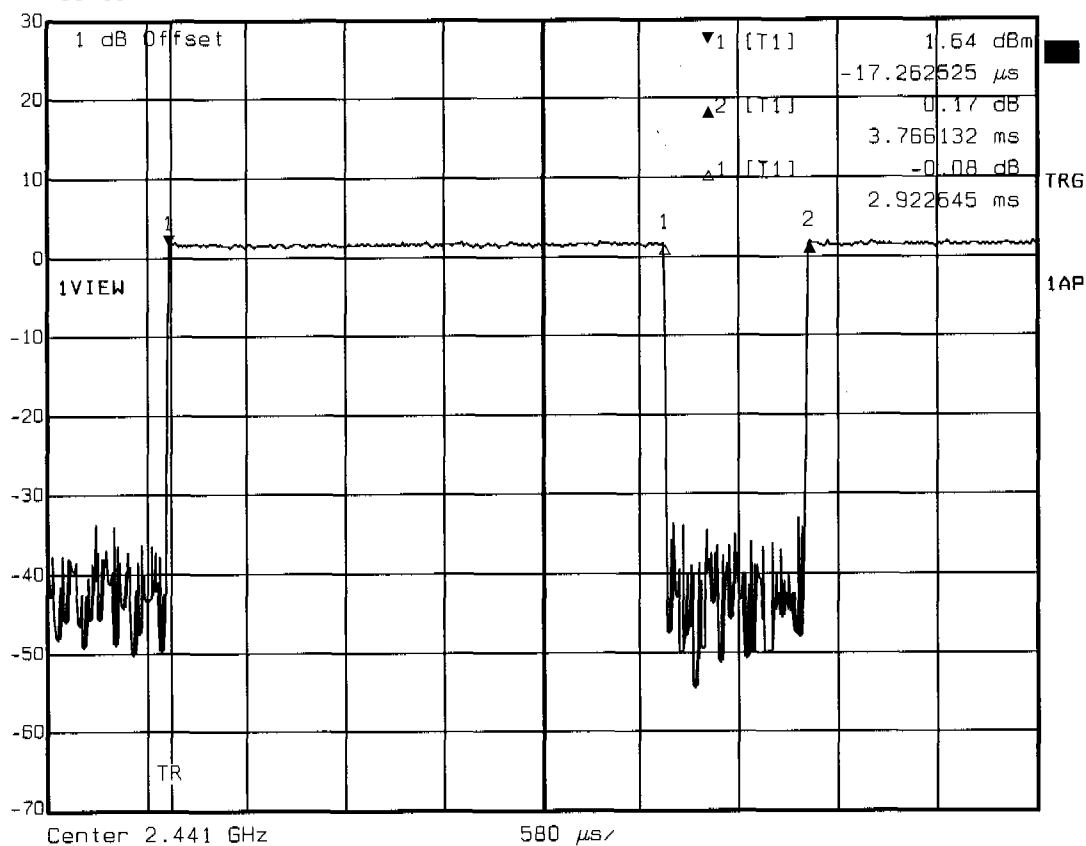


Title: Duty Cycle
Comment A: Jabra BT150
Date: 12.JUL.2005 12:41:25

Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 30 dB
Ref Lvl -0.03 dB VBW 10 kHz
10 dBm 877.35470942 kHz SWT 56 ms Unit dBm

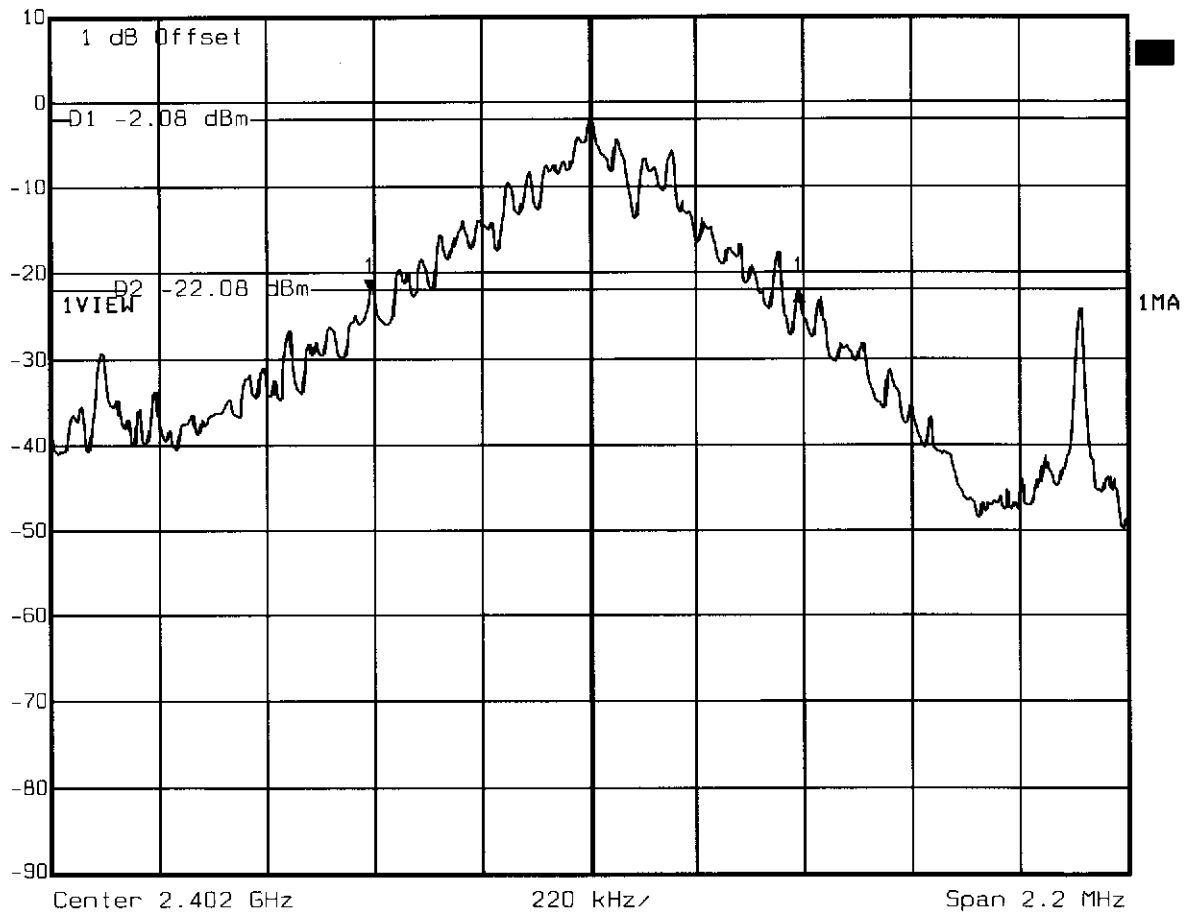

Title: -20 dB Bandwidth Ch.: 0
Comment A: Jabra BT150
Date: 12.JUL.2005 11:51:44



Delta 1 [T1] RBW 10 kHz RF Att 30 dB
Ref Lvl 0.10 dB VBW 10 kHz
10 dBm 877.35470942 kHz SWT 56 ms Unit dBm

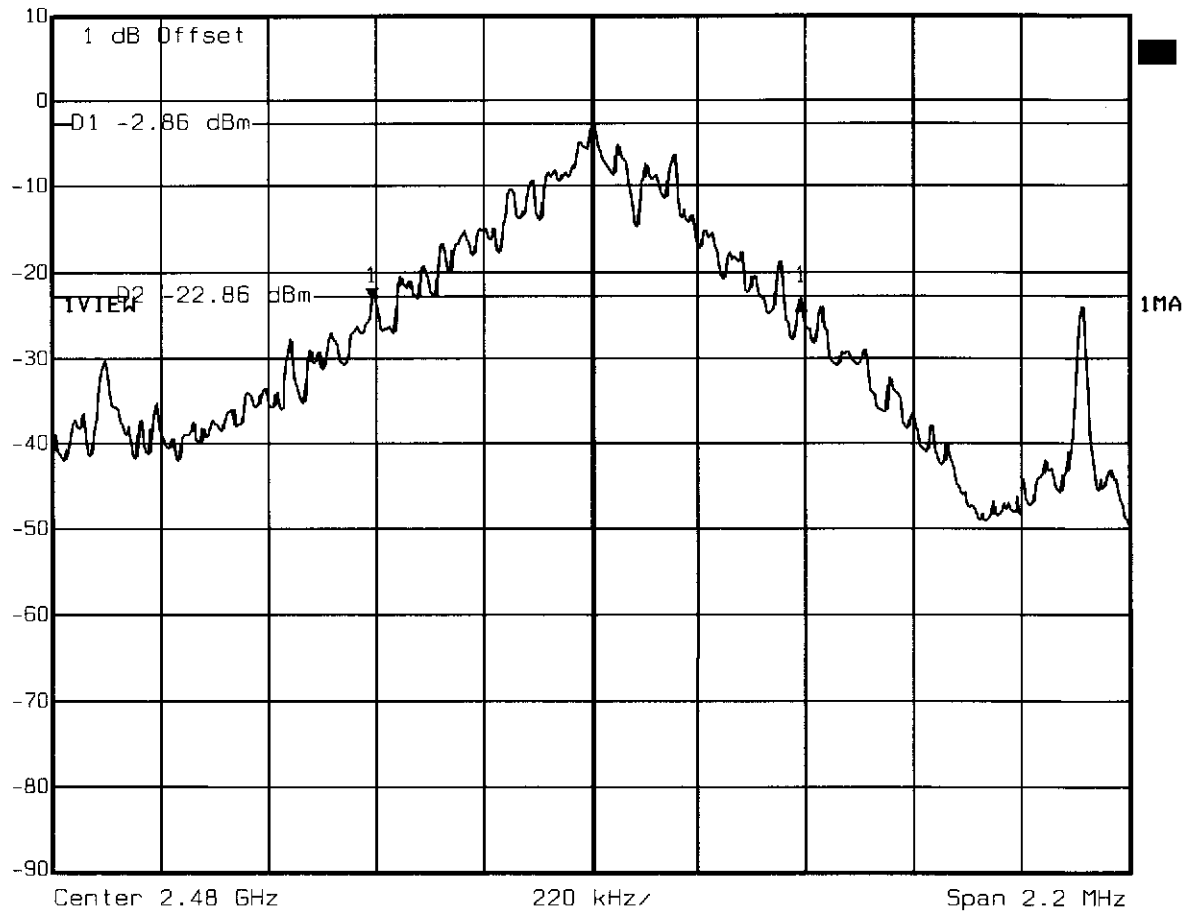

Title: -20 dB Bandwidth Ch.: 7B
Comment A: Jabra BT150
Date: 12.JUL.2005 11:48:59



Ref Lvl
10 dBm

Delta 1 [T1]

-0.39 dB

872.94589178 kHz

RBW

10 kHz

VBW

10 kHz

SWT


56 ms

RF Att

30 dB

Unit

dBm

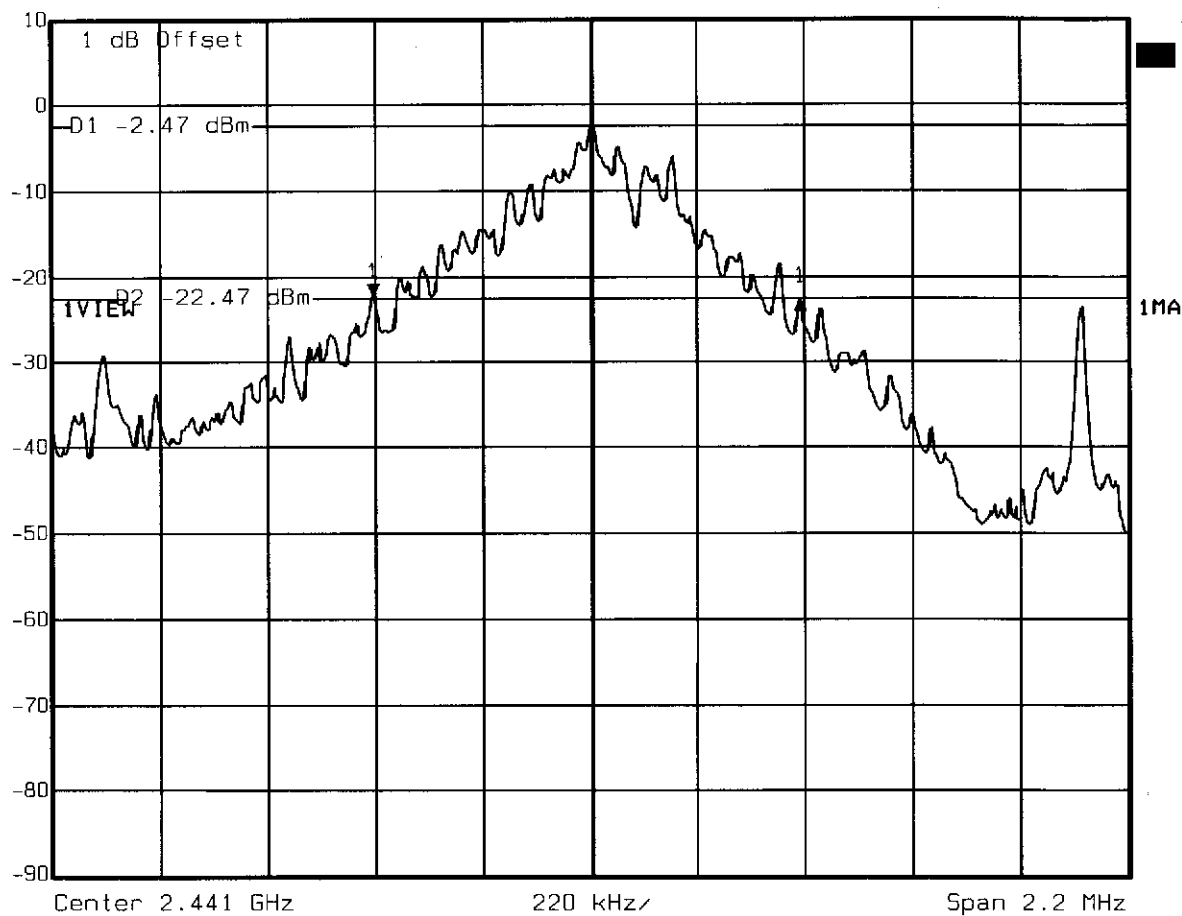


Title: -20 dB Bandwidth Ch.: 39
Comment A: Jabra BT150
Date: 12.JUL.2005 11:50:28

Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 47.33 dB VBW 50 kHz
20 dBm 2.01733467 MHz SWT 5 ms Unit dBm

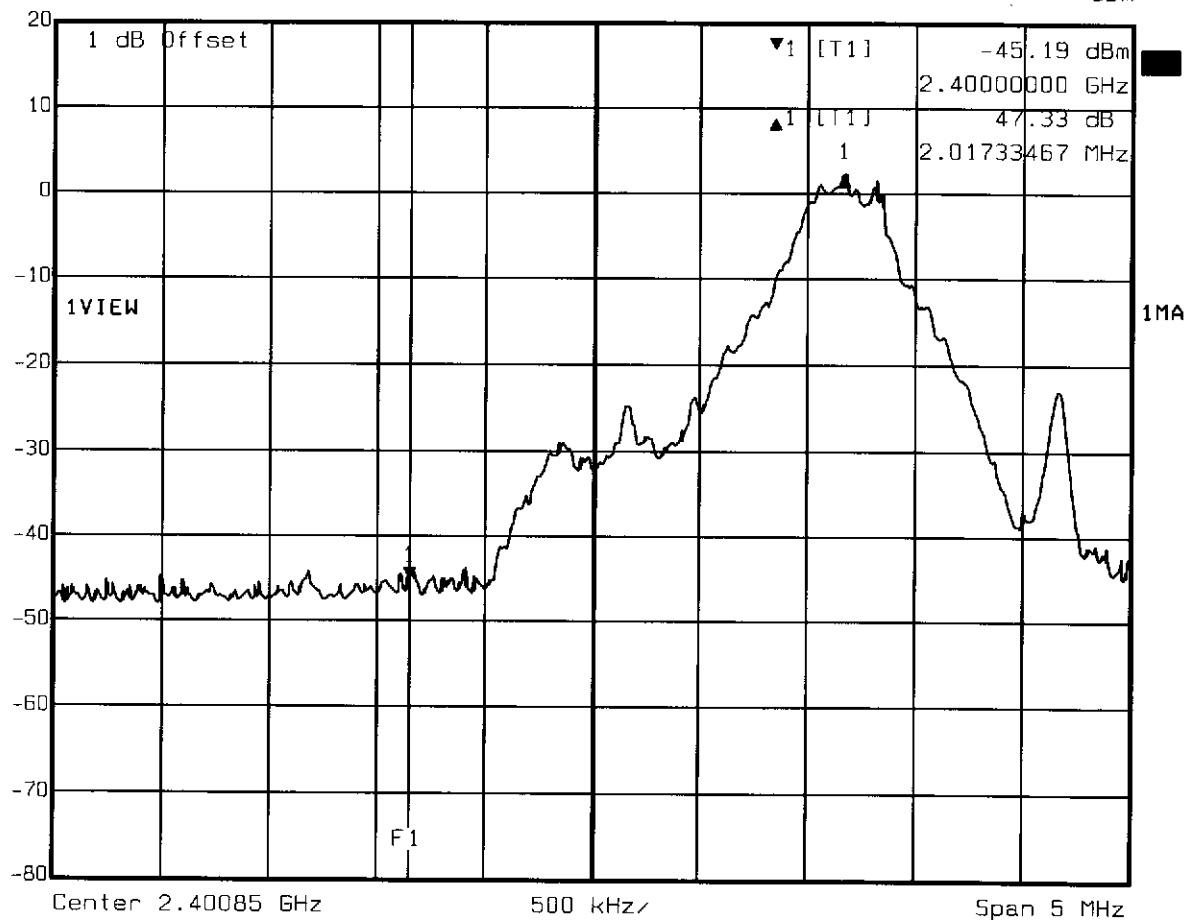

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Jabra BT150
Date: 12.JUL.2005 11:54:05




Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 39.32 dB VBW 50 kHz
20 dBm -3.48745491 MHz SWT 5 ms Unit dBm

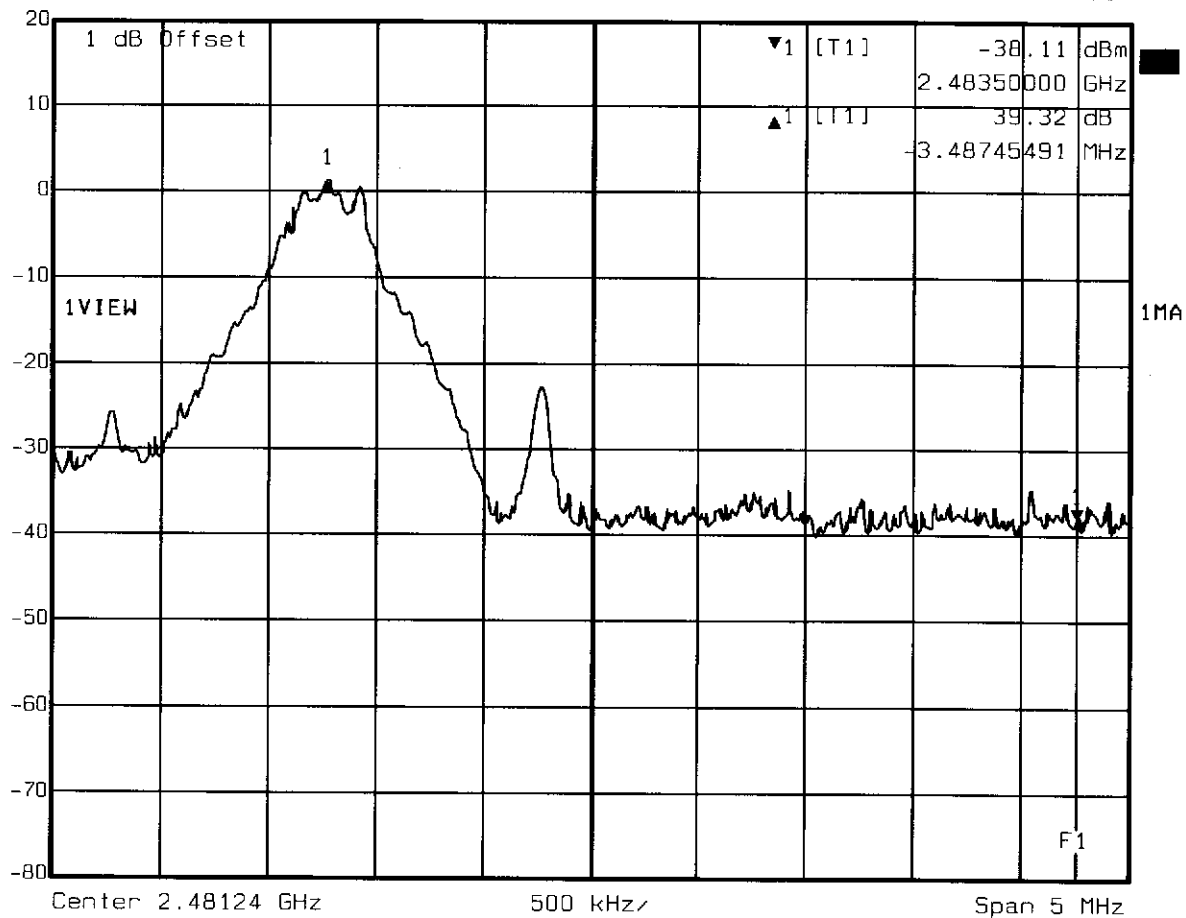

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Jabra BT150
Date: 12.JUL.2005 11:55:11



Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 44.63 dB VBW 50 kHz
20 dBm 2.06743487 MHz SWT 5 ms Unit dBm

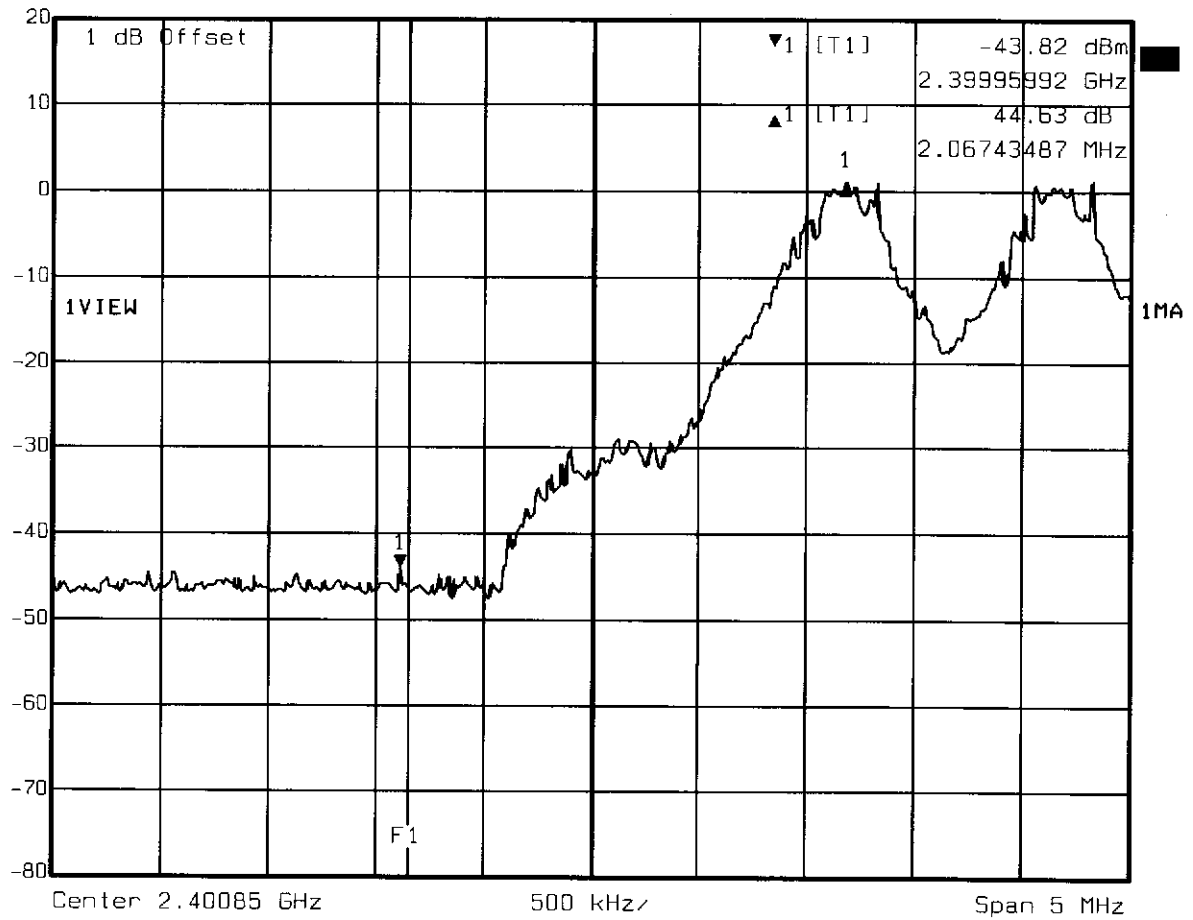


Title: Band-edge Compliance (conducted, hopping mode)

Comment A: Jabra BT150

Date: 12.JUL.2005 12:46:23



Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 38.13 dB VBW 50 kHz
20 dBm -3.36100200 MHz SWT 5 ms Unit dBm

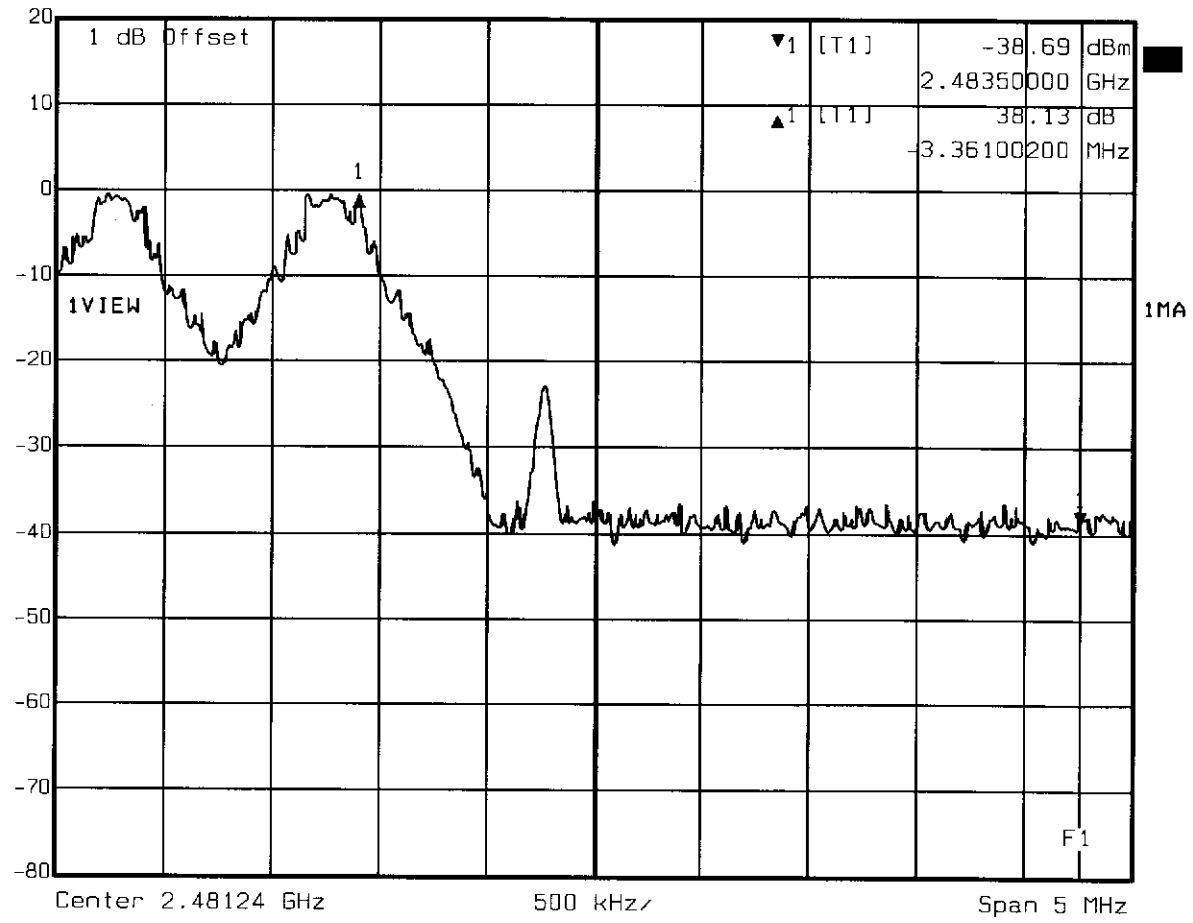


Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Jabra BT150
Date: 12.JUL.2005 12:49:03

Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth Headset
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC-ADAPTOR) , Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (L1/N)
Comment: model: Jabra BT150 mode: L1

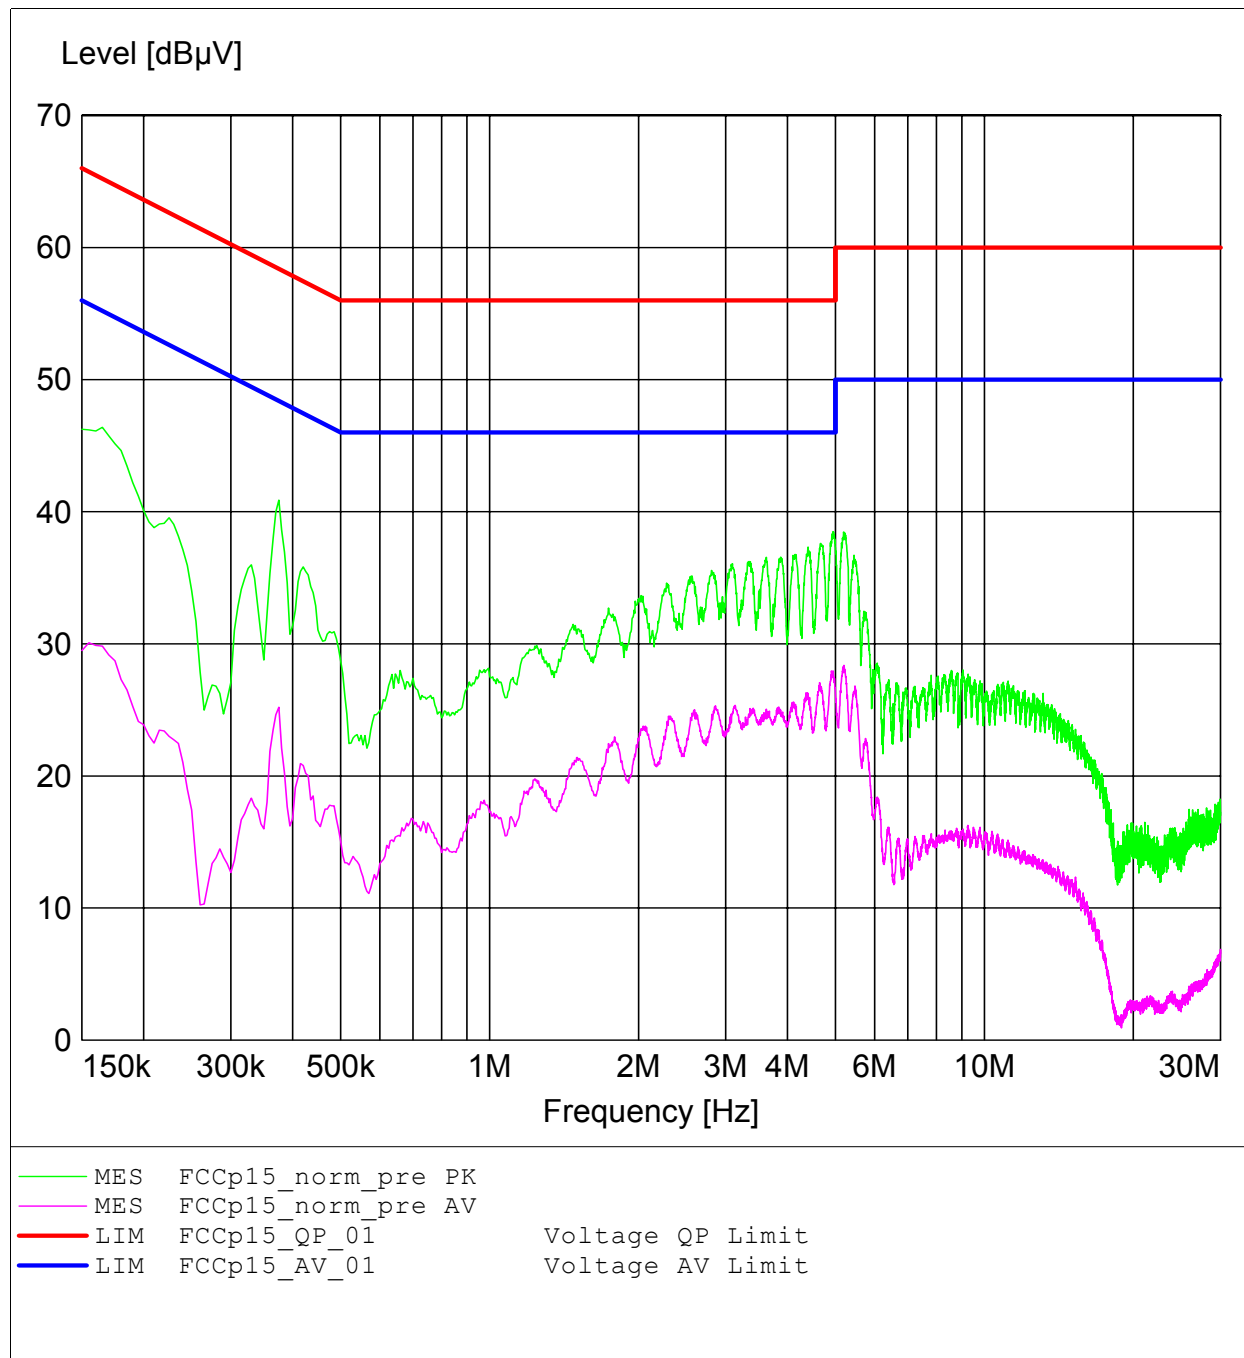

EMI voltage test in the ac-mains according to FCC part 15

EUT: Bluetooth Headset
Manufacturer: GN Netcom
Operating Condition: Unom: 120 V AC (AC/DC-ADAPTOR) , Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (L1/N)
Comment: model: Jabra BT150 mode: N

