

SPECIFICATIONS FOR APPROVAL

Customer Name:_____

Product Name: _____ BT Antenna

Production manufacturer:Donguan Jing Wei Xin Electronics Co., Ltd.

Manufacturer's address:Building 2, Dongping Village Science and Technology Industrial Park, Qishi Town, Dongguan City

Write By : _____ ZhangYunding

Issued Date: _____ 2024-8-20


CUSTOMER

ENGINEER R&D DEPT	BUSSINESS DEPT	APPROVED BY

SOUTHSTAR

R & D D E P T	ENGINEER R&D DEPT	APPROVAL

The basic parameters:

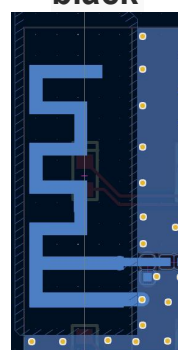
A. Electrical Characteristics	
Frequency	2400 MHz ~2500 MHz
VSWR	< 2.5
Efficiency	>40%
Impedance	50 Ohm
Polarization	Linear
Gain	0.5dbi
B. Material & Mechanical Characteristics	
Material of Radiator	PCB black
Cable Type	
Connector Type	
Dimension	
C. Environmental	
Operation Temperature	-10 °C ~ + 50 °C
Storage Temperature	- 30 °C ~ + 85 °C

Test Equipment & Conditions


1. Network Analyzers :

Agilent 8753D 5071B


2. 3D Chamber Test System

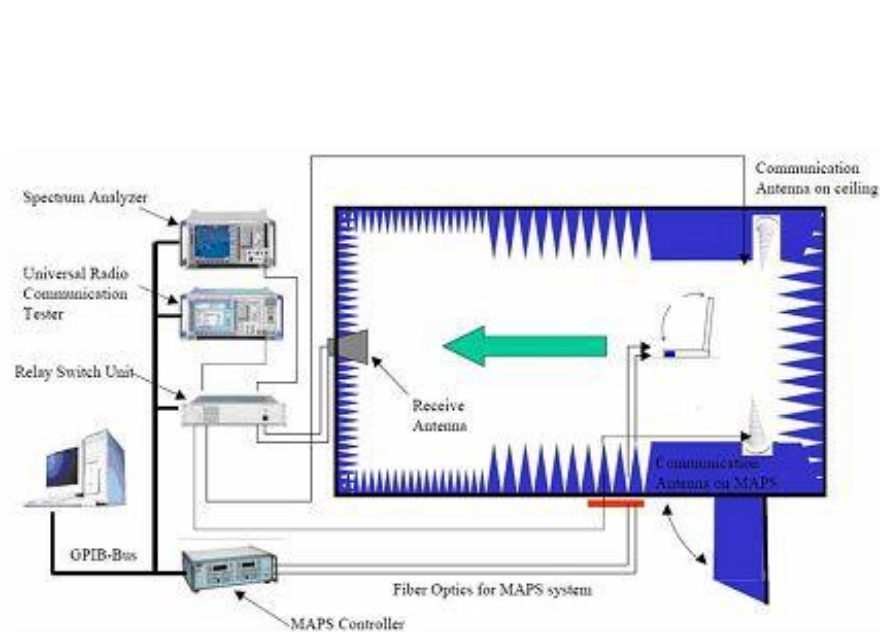

(Testing by 3D anechoic chamber)

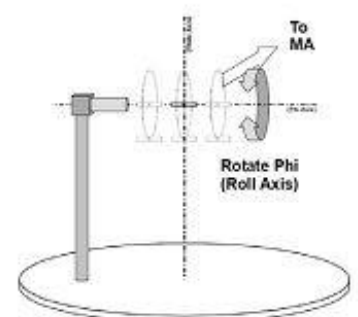


Phi axis test

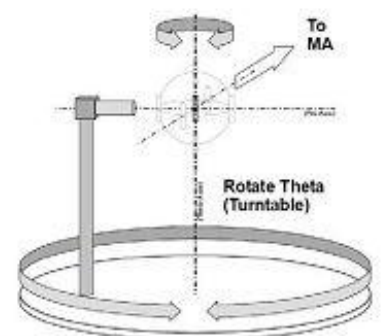


Theta axis test


3. Antenna Impedance: S11 (parameter)

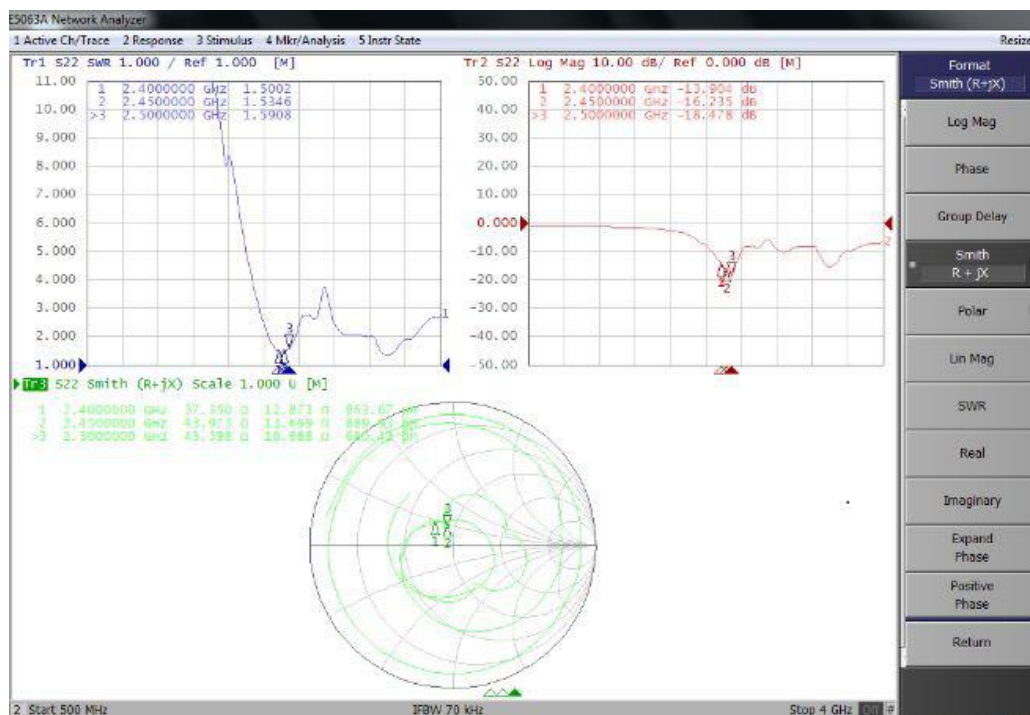


4. Total Efficiency-2.4G:

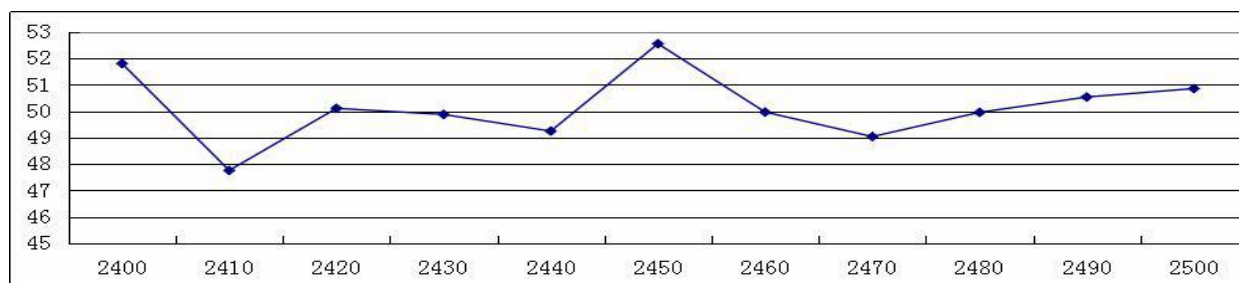


6.01 directional diagram (xy plane, $Z=0$)

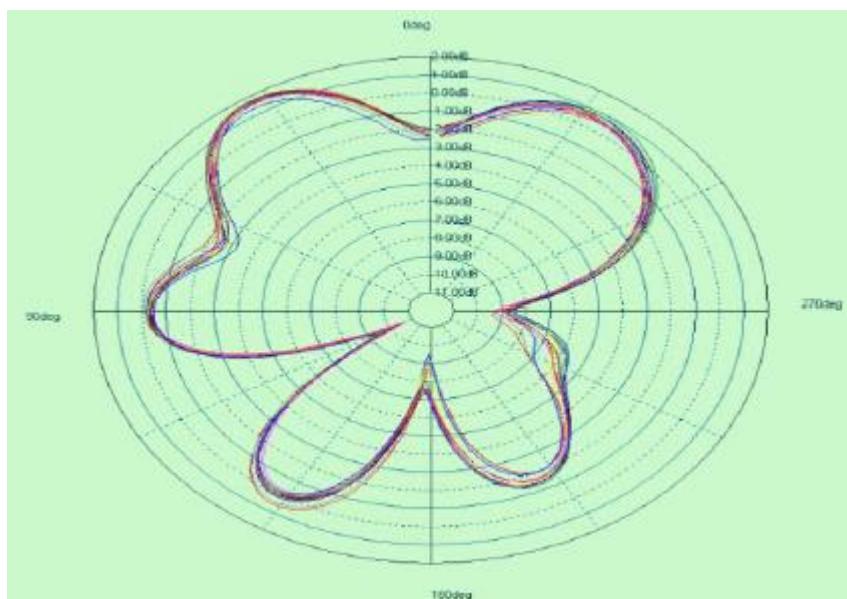


6.02 directional diagram (xy plane, $Y=0$)

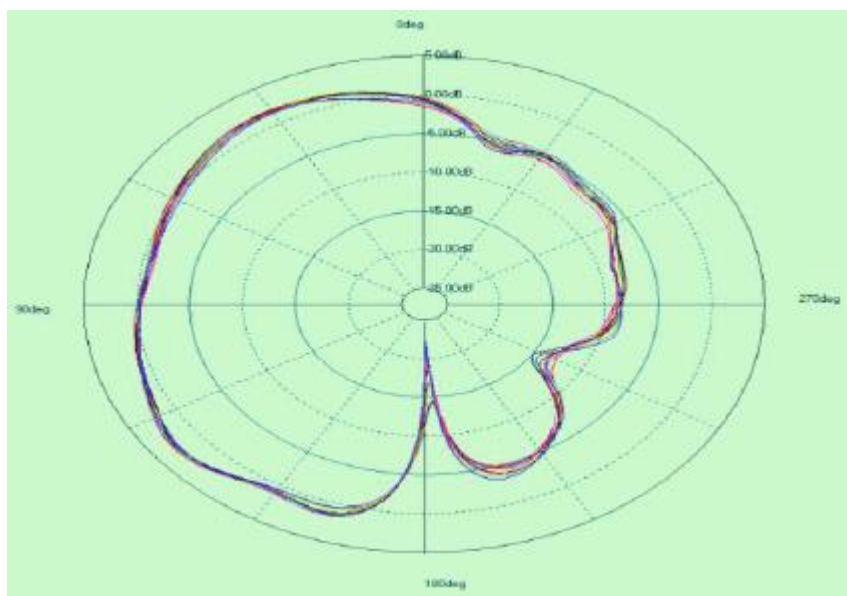

6.03 directional diagram(YZ plane, X=0)

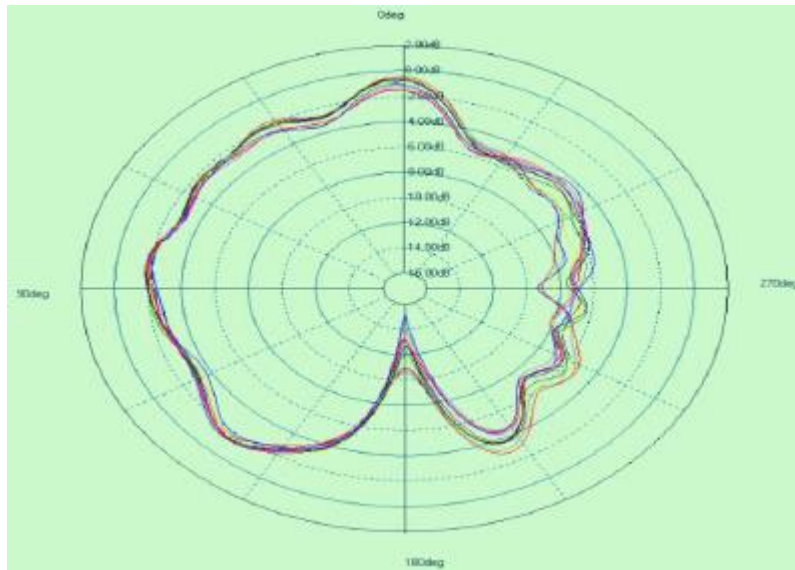

6.03 Apple Chart

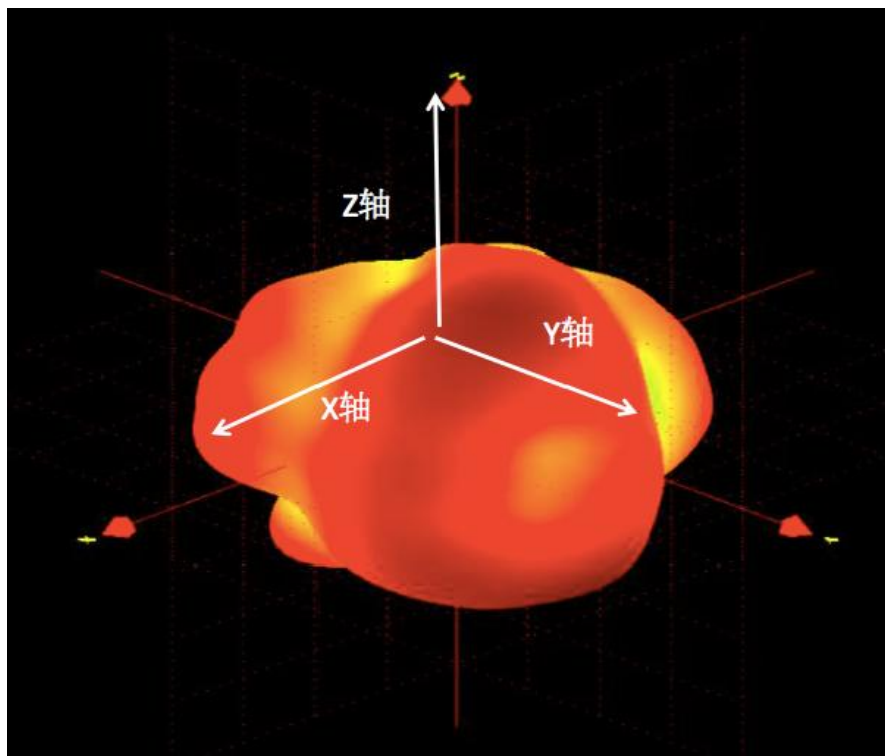

7. Installation method

