

FCC Test Report

FCC ID : SQG-PH45N

Equipment : 802.11a/b/g/n module

Model No. : PH45N

Brand Name : Laird

Applicant : Laird Technologies

Address : W66N220 Commerce Court, Cedarburg,

Wisconsin 53012, USA

Standard : 47 CFR FCC Part 15.247

Received Date : Jan. 12, 2018

Tested Date : Jan. 16 ~ Jan. 22, 2018

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Chen / Assistant Manager Gary Chang / Manager

Testing Laboratory

Report No.: FR811202AC Page: 1 of 53



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	
1.4	The Equipment List	
1.5	Test Standards	g
1.6	Measurement Uncertainty	g
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	14
3.3	RF Output Power	
3.4	Power Spectral Density	19
3.5	Unwanted Emissions into Restricted Frequency Bands	21
3.6	Emissions in Non-Restricted Frequency Bands	43
4	TEST LABORATORY INFORMATION	53



Release Record

Report No.	Version	Description	Issued Date
FR811202AC	Rev. 01	Initial issue	Feb. 06, 2018

Report No.: FR811202AC Page: 3 of 53



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.402MHz 38.51 (Margin -19.30dB) - QP	Pass
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 2483.50MHz	Pass
15.209	Naulated Lillissions	53.85 (Margin -0.15dB) - AV	F 033
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 22.02	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR811202AC Page: 4 of 53



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information								
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS			
2400-2483.5	b	2412-2462	1-11 [11]	1	1-11 Mbps			
2400-2483.5	g	2412-2462	1-11 [11]	1	6-54 Mbps			
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	MCS 0-7			

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.

Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant		Model	Type	Connector	Operating Frequencies (MHz) / Ante			Antenna C	Sain (dBi)
No.		Турс	Connector	2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850	
1	Laird	NanoBlade-IP04	PCB Dipole	IPEX U.FL	2	3	.9	4	4

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host
-------------------	------------------

1.1.4 Accessories

N/A

Report No.: FR811202AC Page: 5 of 53



1.1.5 Channel List

Channel	Frequency(MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

1.1.6 Test Tool and Duty Cycle

Test Tool	SRU, v3.03.10.00					
	Mode	Duty cycle (%)	Duty factor (dB)			
Duty Cycle and Duty Factor	11b	100.00%	0.00			
Duty Cycle and Duty Factor	11g	99.78%	0.01			
	HT20	99.74%	0.01			

1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	100%
11b	2437	100%
11b	2462	100%
11g	2412	100%
11g	2437	100%
11g	2462	100%
HT20	2412	100%
HT20	2437	100%
HT20	2462	100%


Report No.: FR811202AC Page: 6 of 53



1.2 Local Support Equipment List

	Support Equipment List							
No. Equipment Brand Model FCC ID Signal cable / Length (n								
1	PDA	HP	HSTNH-L05C-BT					
2	Fixture							

1.3 Test Setup Chart

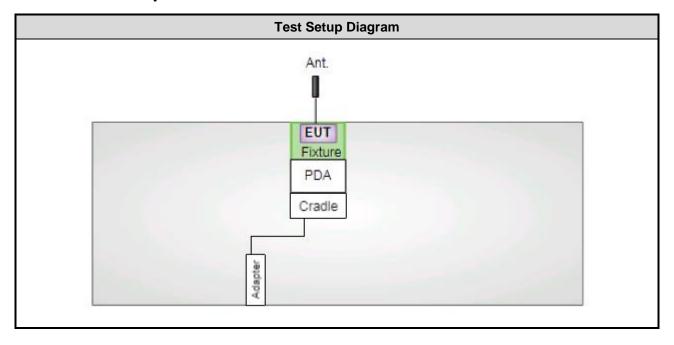

Report No.: FR811202AC Page: 7 of 53



1.4 The Equipment List

Test Item	Conducted Emission							
Test Site	Conduction room 1 / (CO01-WS)							
Tested Date	Jan. 19, 2018							
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
Receiver	R&S	ESR3	101657	Jan. 05, 2018	Jan. 04, 2019			
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2017	Nov. 12, 2018			
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 24, 2017	Nov. 23, 2018			
RF Cable-CON	EMC	EMCCFD300-BM-B M-6000	50821	Dec. 18, 2017	Dec. 17, 2018			
50 ohm terminal (Support Unit)	NA	50	04	May. 12, 2017	May. 11, 2018			
Measurement Software	Alinix 63 6120210k NA NA							
Note: Calibration Inte	Note: Calibration Interval of instruments listed above is one year.							

Test Item	Radiated Emission	Radiated Emission						
Test Site	966 chamber 3 / (03C	:H03-WS)						
Tested Date	Jan. 16 ~ Jan. 17, 2018							
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
Spectrum Analyzer	R& S	FSV40	101499	Jan. 03, 2018	Jan. 02, 2019			
Receiver	R& S	ESR3	101658	Nov. 20, 2017	Nov. 19, 2018			
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 28, 2017	Apr. 27, 2018			
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 09, 2017	Feb. 08, 2018			
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 23, 2017	Nov. 22, 2018			
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2017	Nov. 12, 2018			
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 07, 2017	Dec. 06, 2018			
Preamplifier	EMC	EMC02325	980187	Sep. 04, 2017	Sep. 03, 2018			
Preamplifier	Agilent	83017A	MY53270014	Aug. 21, 2017	Aug. 20, 2018			
Preamplifier	EMC	EMC184045B	980192	Aug. 22, 2017	Aug. 21, 2018			
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Nov. 27, 2017	Nov. 26, 2018			
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY32487/4	Nov. 27, 2017	Nov. 26, 2018			
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Nov. 27, 2017	Nov. 26, 2018			
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Nov. 27, 2017	Nov. 26, 2018			
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Nov. 27, 2017	Nov. 26, 2018			
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Nov. 27, 2017	Nov. 26, 2018			
Measurement Software	AUDIX	e3	6.120210g	NA	NA			
Note: Calibration Inter	rval of instruments liste	d above is one year.						

Report No.: FR811202AC Page: 8 of 53



Test Item	RF Conducted								
Test Site	(TH01-WS)	(TH01-WS)							
Tested Date	Jan. 22, 2018	Jan. 22, 2018							
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until				
Spectrum Analyzer	R&S	FSV40	101063	Mar. 15, 2017	Mar. 14, 2018				
Power Meter	Anritsu	ML2495A	1241002	Oct. 16, 2017	Oct. 15, 2018				
Power Sensor	Anritsu	MA2411B	1207366	Oct. 16, 2017	Oct. 15, 2018				
DC POWER SOURCE	GW INSTEK	GPC-6030D	EM892433	Oct. 26, 2017	Oct. 25, 2018				
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA				
Note: Calibration Inte	Note: Calibration Interval of instruments listed above is one year.								

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v04

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty								
Parameters	Uncertainty							
Bandwidth	±34.134 Hz							
Conducted power	±0.808 dB							
Power density	±0.463 dB							
Conducted emission	±2.670 dB							
AC conducted emission	±2.90 dB							
Radiated emission ≤ 1GHz	±3.66 dB							
Radiated emission > 1GHz	±5.37 dB							

Report No.: FR811202AC Page: 9 of 53



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 59%	Alex Tsai
Radiated Emissions	03CH03-WS	21-25°C / 62-66%	Roger Lu Akan Chung
RF Conducted	TH01-WS	22°C / 64%	Brad Wu

FCC Designation No.: TW0009
 FCC site registration No.: 207696
 IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	11g	2437	6 Mbps	
Radiated Emissions ≤1GHz	11g	2437	6 Mbps	
Radiated Emissions >1GHz Maximum Output Power 6dB bandwidth Power spectral density	11b 11g HT20	2412 / 2437 / 2462 2412 / 2437 / 2462 2412 / 2437 / 2462	1 Mbps 6 Mbps MCS 0	

NOTE:

Report No.: FR811202AC Page: 10 of 53

^{1.} The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit								
Frequency Emission (MHz) Quasi-Peak Average								
0.15-0.5	66 - 56 *	56 - 46 *						
0.5-5	56	46						
5-30	60	50						
Note 1: * Decreases with the logarithm of the frequency.								

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

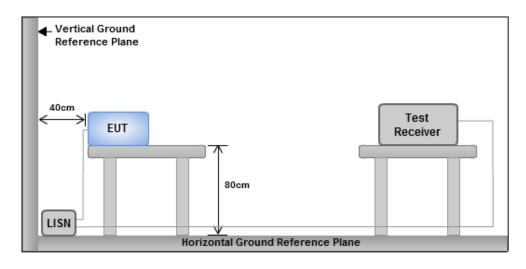


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR811202AC Page: 11 of 53




Test Result of Conducted Emissions 3.1.4

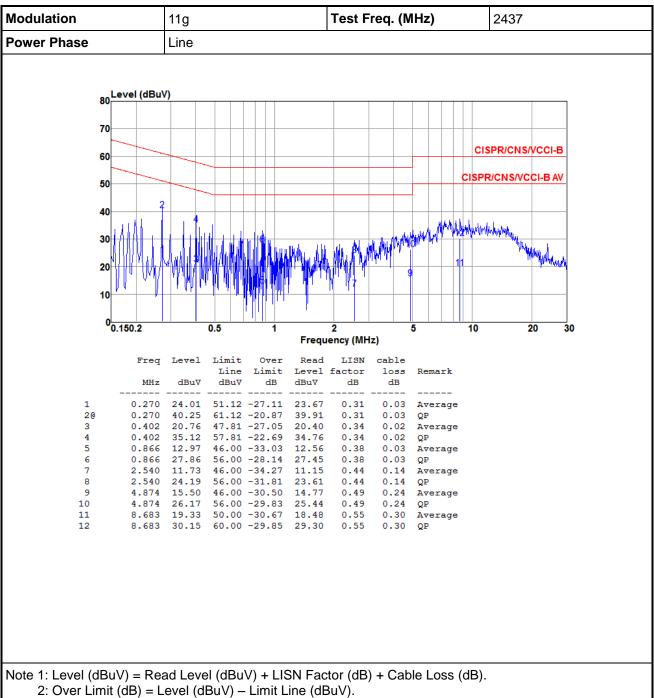

Report No.: FR811202AC Page: 12 of 53



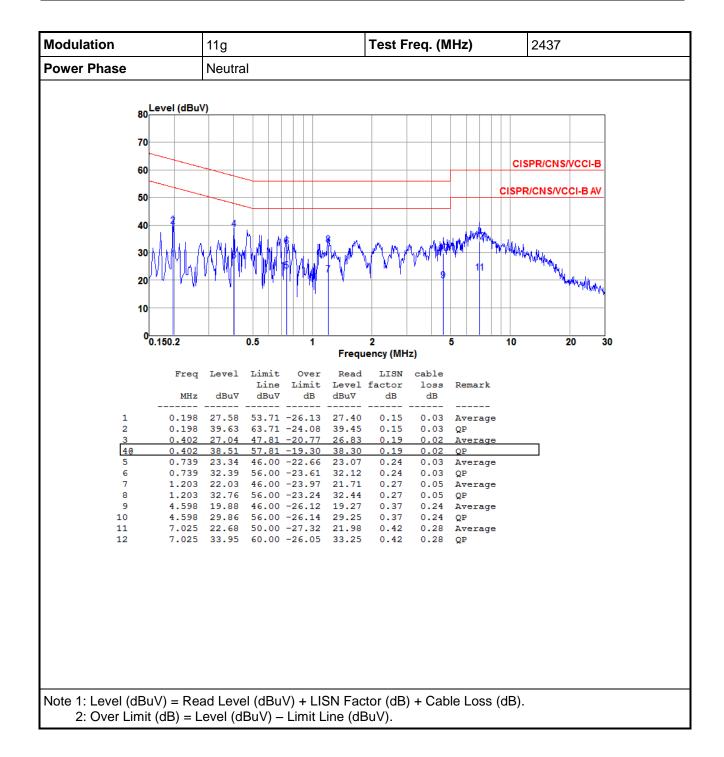

Report No.: FR811202AC Page: 13 of 53



3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- 1. Set resolution bandwidth (RBW) = 1 MHz, Video bandwidth = 3 MHz.
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup




Report No.: FR811202AC Page: 14 of 53



3.2.4 Test Result of 6dB and Occupied Bandwidth


Modulation	N	Eron (MU=)			Limit (ItU=)		
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Limit (kHz)
11b	1	2412	7.13				500
11b	1	2437	7.07				500
11b	1	2462	7.07				500
11g	1	2412	16.29				500
11g	1	2437	16.29				500
11g	1	2462	16.29				500
HT20	1	2412	17.28				500
HT20	1	2437	16.81				500
HT20	1	2462	17.28				500

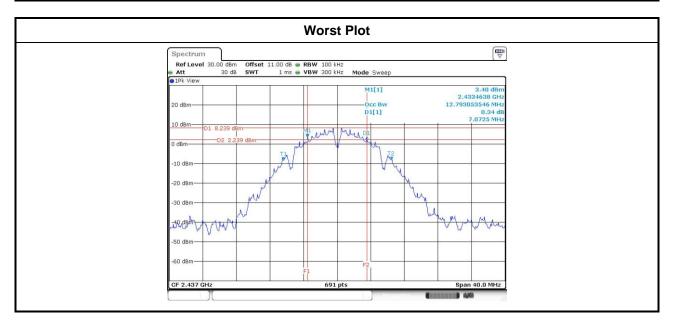

Report No.: FR811202AC Page: 15 of 53



Modulation	N	Freq. 99% Occupied Bandwidth (MHz)				
Mode	N _{TX}	(MHz)	Chain 0	Chain 1	Chain 2	Chain 3
11b	1	2412	12.67			
11b	1	2437	12.84			
11b	1	2462	12.06			
11g	1	2412	16.94			
11g	1	2437	17.80			
11g	1	2462	16.94			
HT20	1	2412	18.02			
HT20	1	2437	18.64			
HT20	1	2462	18.04			

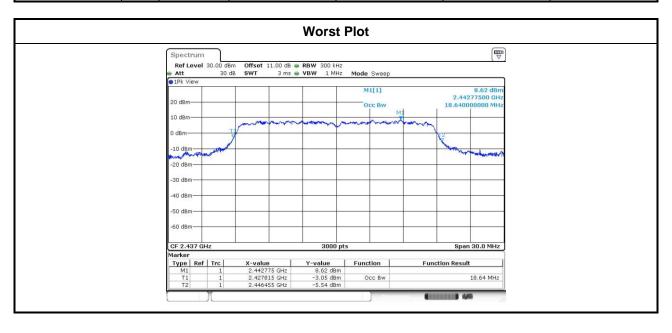

Report No.: FR811202AC Page: 16 of 53



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

Antenna gain > 6dBi

Non Fixed, point to point operations.
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB

Fixed, point to point operations
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations, no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

Maximum Peak Conducted Output Power

- 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
- 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
- 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.

Nower meter

- A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power (For reference only)

Nower meter

 A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



Report No.: FR811202AC Page: 17 of 53



3.3.4 Test Result of Maximum Output Power

				Peak	conduct	ed Outpu	t Power (dBm)		Ant. Gain (dBi)	EIRP (dBm)	EIRP
Modulation Mode	N _{TV}	-	Chain 0	Chain 1	Chain 2	Chain 3	Total Power (mW)	Total Power (dBm)	Limit (dBm)			Limit (dBm)
11b	1	2412	20.08				101.859	20.08	30.00	2.00	22.08	36.00
11b	1	2437	20.06				101.391	20.06	30.00	2.00	22.06	36.00
11b	1	2462	18.32				67.920	18.32	30.00	2.00	20.32	36.00
11g	1	2412	21.73				148.936	21.73	30.00	2.00	23.73	36.00
11g	1	2437	22.02				159.221	22.02	30.00	2.00	24.02	36.00
11g	1	2462	21.45				139.637	21.45	30.00	2.00	23.45	36.00
HT20	1	2412	21.12				129.420	21.12	30.00	2.00	23.12	36.00
HT20	1	2437	21.94				156.315	21.94	30.00	2.00	23.94	36.00
HT20	1	2462	20.96				124.738	20.96	30.00	2.00	22.96	36.00

Modulation		Freq.	Condi	ucted (Average)	Output Power	(dBm)	Total	Total	Limit
Mode	NTX (AALL)	Chain 2	Chain 3	Power (mW)	Power (dBm)	(dBm)			
11b	1	2412	17.46				55.719	17.46	
11b	1	2437	17.53				56.624	17.53	
11b	1	2462	15.45				35.075	15.45	
11g	1	2412	14.95				31.261	14.95	
11g	1	2437	17.11				51.404	17.11	
11g	1	2462	14.31				26.977	14.31	
HT20	1	2412	14.74				29.785	14.74	
HT20	1	2437	17.12				51.523	17.12	
HT20	1	2462	14.41				27.606	14.41	

Note: Conducted average output power is for reference only.

Report No.: FR811202AC Page: 18 of 53



3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 3kHz, VBW = 10kHz.
 - Detector = Peak, Sweep time = auto couple.
 - 3. Trace mode = max hold, allow trace to fully stabilize.
 - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - 1. Set the RBW = 100kHz, VBW = 300 kHz.
 - 2. Detector = RMS, Sweep time = auto couple.
 - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
 - 4. Perform the measurement over a single sweep.
 - 5. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup




Report No.: FR811202AC Page: 19 of 53



3.4.4 Test Result of Power Spectral Density

Modulation Mode	N _{TX}	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
11b	1	2412	-6.91	8.00
11b	1	2437	-7.58	8.00
11b	1	2462	-10.05	8.00
11g	1	2412	-12.96	8.00
11g	1	2437	-9.74	8.00
11g	1	2462	-11.11	8.00
HT20	1	2412	-11.77	8.00
HT20	1	2437	-8.76	8.00
HT20	1	2462	-12.21	8.00

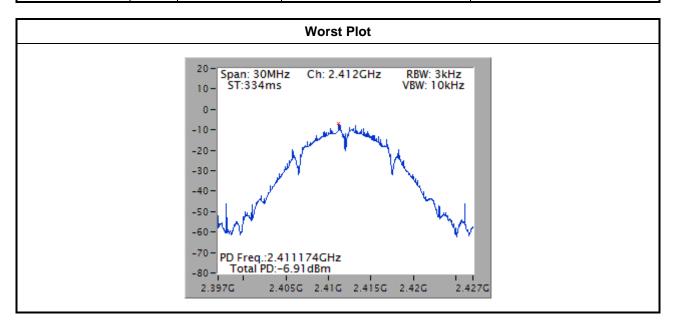

Report No.: FR811202AC Page: 20 of 53



3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit									
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)						
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300						
0.490~1.705	24000/F(kHz)	33.8 - 23	30						
1.705~30.0	30	29	30						
30~88	100	40	3						
88~216	150	43.5	3						
216~960	200	46	3						
Above 960	500	54	3						

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR811202AC Page: 21 of 53




3.5.3 Test Setup

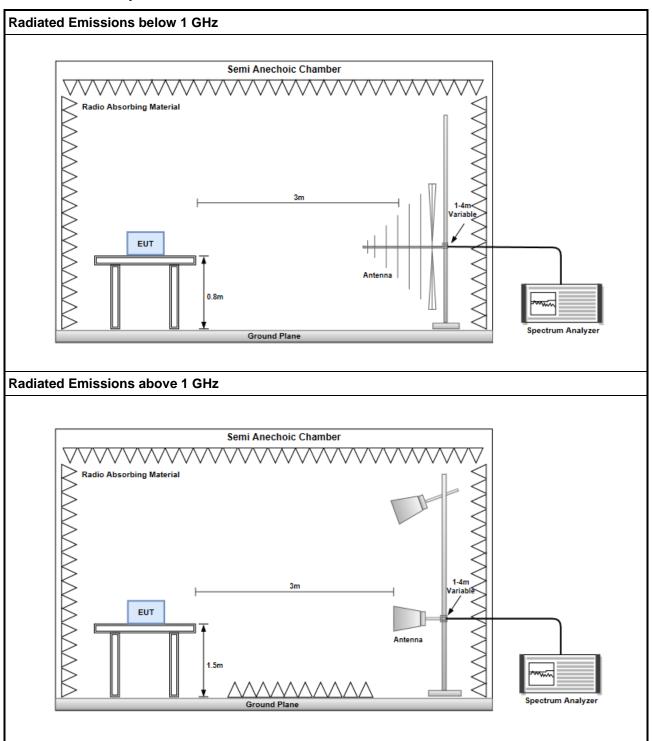

Report No.: FR811202AC Page: 22 of 53



3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

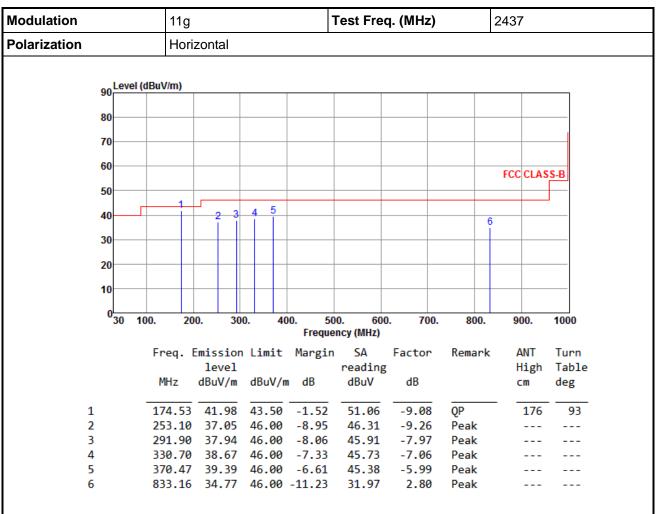

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR811202AC Page: 23 of 53



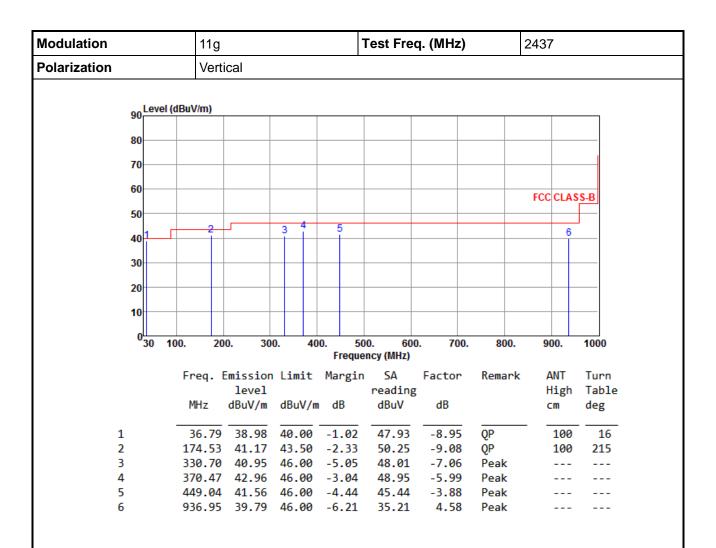

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR811202AC Page: 24 of 53



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

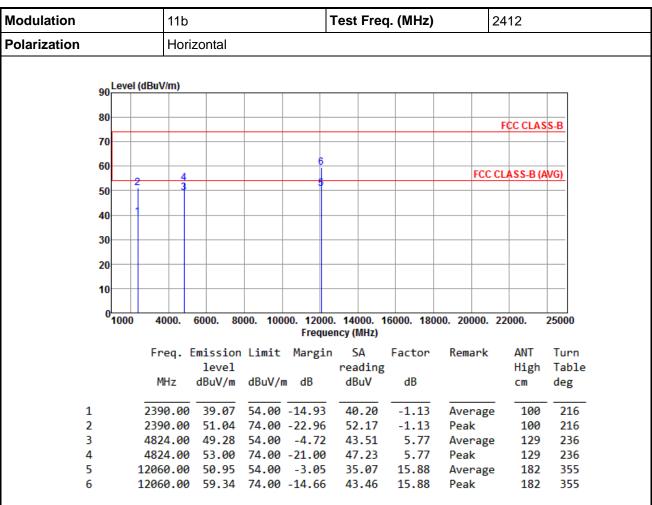

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR811202AC Page: 25 of 53



Modulation	11b	Test Freq. (MHz)	2412
Polarization	Vertical		

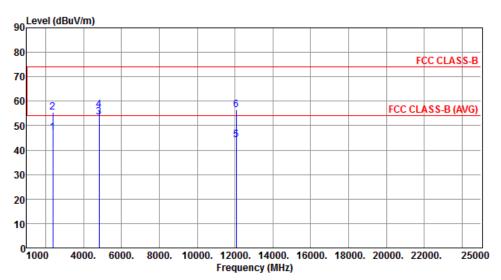


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	47.28	54.00	-6.72	48.41	-1.13	Average	157	155
2	2390.00	55.45	74.00	-18.55	56.58	-1.13	Peak	157	155
3	4824.00	53.44	54.00	-0.56	47.67	5.77	Average	107	177
4	4824.00	56.30	74.00	-17.70	50.53	5.77	Peak	107	177
5	12060.00	44.14	54.00	-9.86	28.26	15.88	Average	148	317
6	12060.00	56.44	74.00	-17.56	40.56	15.88	Peak	148	317

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 26 of 53



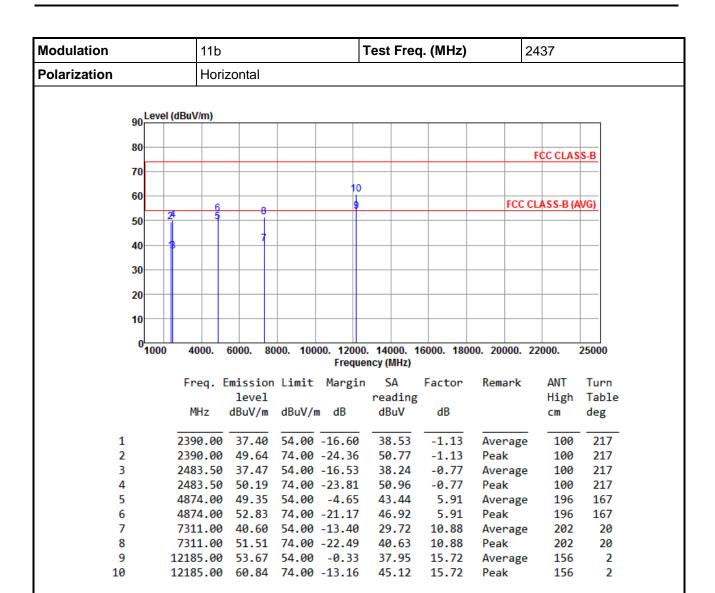


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 27 of 53



Modulation	11b		Test Free	Test Freq. (MHz)		
Polarization	Vertica	al				
90 Le 80 —	vel (dBuV/m)				F¢C (CLASS-B
70						

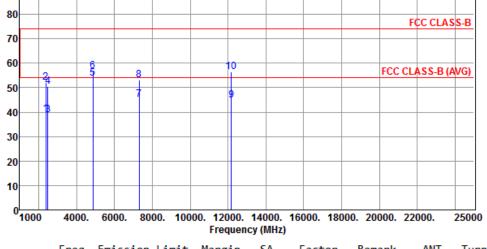


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	39.24	54.00	-14.76	40.37	-1.13	Average	178	145
2	2390.00	52.15	74.00	-21.85	53.28	-1.13	Peak	178	145
3	2483.50	38.93	54.00	-15.07	39.70	-0.77	Average	178	145
4	2483.50	50.53	74.00	-23.47	51.30	-0.77	Peak	178	145
5	4874.00	53.84	54.00	-0.16	47.93	5.91	Average	100	177
6	4874.00	56.76	74.00	-17.24	50.85	5.91	Peak	100	177
7	7311.00	45.06	54.00	-8.94	34.18	10.88	Average	171	26
8	7311.00	53.07	74.00	-20.93	42.19	10.88	Peak	171	26
9	12185.00	44.96	54.00	-9.04	29.24	15.72	Average	156	323
10	12185.00	56.58	74.00	-17.42	40.86	15.72	Peak	156	323

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 28 of 53



Modulation	11b	Test Freq. (MHz)	2462
Polarization	Horizontal		
oo Level (dBu\	//m)		

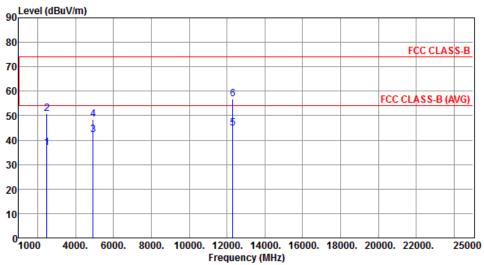


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	36.90	54.00	-17.10	37.67	-0.77	Average	116	219
2	2483.50	50.75	74.00	-23.25	51.52	-0.77	Peak	116	219
3	4924.00	42.13	54.00	-11.87	36.08	6.05	Average	198	172
4	4924.00	48.33	74.00	-25.67	42.28	6.05	Peak	198	172
5	12310.00	44.96	54.00	-9.04	29.38	15.58	Average	154	356
6	12310.00	56.68	74.00	-17.32	41.10	15.58	Peak	154	356

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 29 of 53



Modulation	11b	Test Freq. (MHz)	2462
Polarization	Vertical		

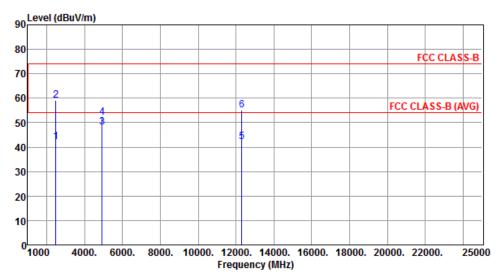


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
			•						
1	2483.50	42.21	54.00	-11.79	42.98	-0.77	Average	163	160
2	2483.50	58.99	74.00	-15.01	59.76	-0.77	Peak	163	160
3	4924.00	48.16	54.00	-5.84	42.11	6.05	Average	100	172
4	4924.00	52.15	74.00	-21.85	46.10	6.05	Peak	100	172
5	12310.00	42.27	54.00	-11.73	26.69	15.58	Average	100	50
6	12310.00	55.00	74.00	-19.00	39.42	15.58	Peak	100	50

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 30 of 53



3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

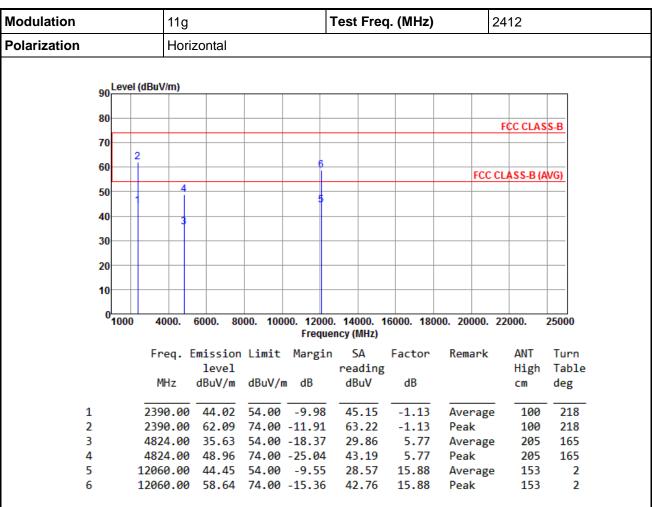

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 31 of 53



Modulation	11g	Test Freq. (MHz)	2412
Polarization	Vertical		

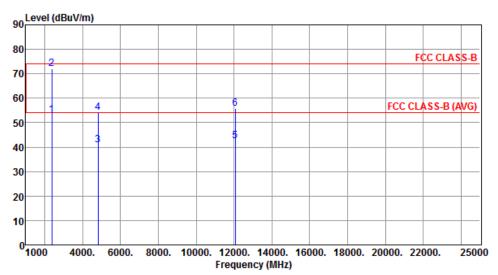


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	53.21	54.00	-0.79	54.34	-1.13	Average	164	156
2	2390.00	72.12	74.00	-1.88	73.25	-1.13	Peak	164	156
3	4824.00	40.96	54.00	-13.04	35.19	5.77	Average	106	163
4	4824.00	54.03	74.00	-19.97	48.26	5.77	Peak	106	163
5	12060.00	42.67	54.00	-11.33	26.79	15.88	Average	100	30
6	12060.00	55.91	74.00	-18.09	40.03	15.88	Peak	100	30

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 32 of 53



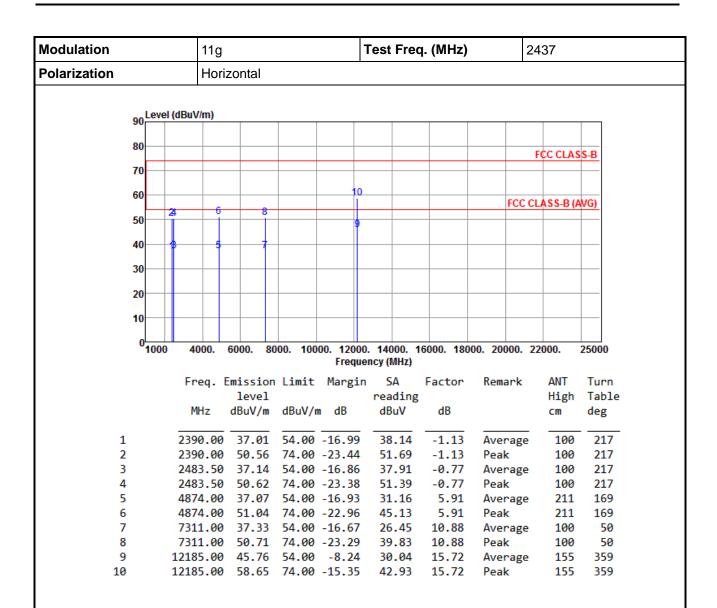


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 33 of 53



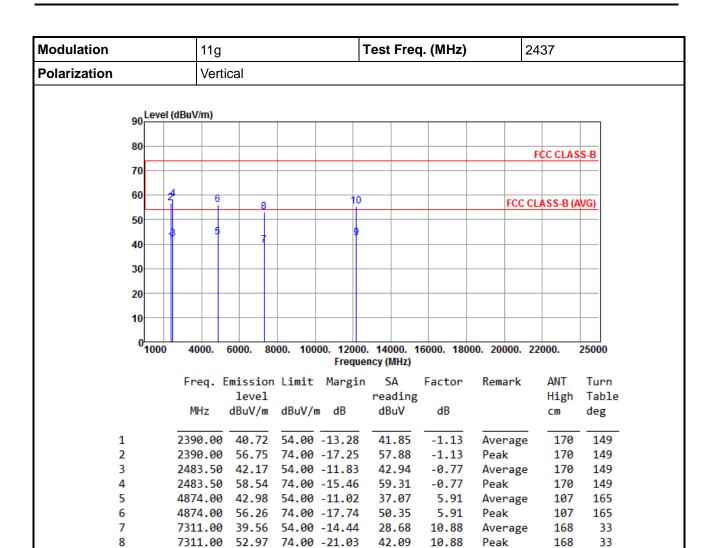

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

12185.00 42.56

12185.00 55.35 74.00 -18.65

Report No.: FR811202AC Page: 34 of 53

54.00 -11.44

26.84

39.63

15.72

15.72

Average

Peak

100

100

25

25


Report Version: Rev. 01

9

10



Modulation	11g	Test Freq. (MHz)	2462
Polarization	Horizontal		

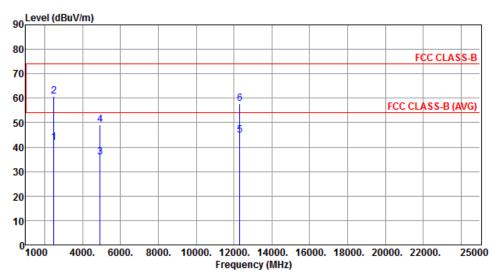


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
	1112	abav/iii	abav/iii	ub	abav	ub.		CIII	ucg
1	2483.50	41.71	54.00	-12.29	42.48	-0.77	Average	116	215
2	2483.50	60.92	74.00	-13.08	61.69	-0.77	Peak	116	215
3	4924.00	35.91	54.00	-18.09	29.86	6.05	Average	206	168
4	4924.00	49.23	74.00	-24.77	43.18	6.05	Peak	206	168
5	12310.00	44.76	54.00	-9.24	29.18	15.58	Average	150	3
6	12310.00	57.63	74.00	-16.37	42.05	15.58	Peak	150	3

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 35 of 53



Modulation	11g	Test Freq. (MHz)	2462
Polarization	Vertical		

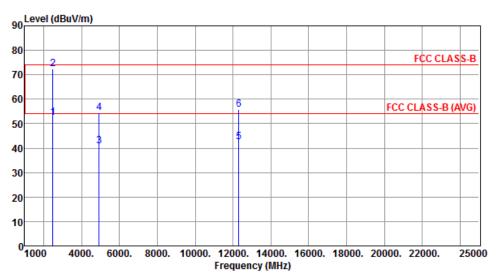


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.44	54.00	-1.56	53.21	-0.77	Average	163	163
2	2483.50	72.25	74.00	-1.75	73.02	-0.77	Peak	163	163
3	4924.00	40.82	54.00	-13.18	34.77	6.05	Average	106	163
4	4924.00	54.35	74.00	-19.65	48.30	6.05	Peak	106	163
5	12310.00	42.50	54.00	-11.50	26.92	15.58	Average	100	40
6	12310.00	55.69	74.00	-18.31	40.11	15.58	Peak	100	40

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 36 of 53



3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

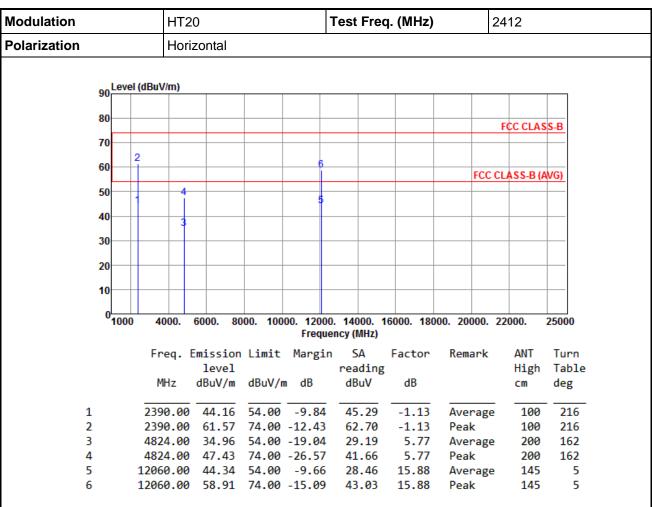

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR811202AC Page: 37 of 53



Modulation	HT20	Test Freq. (MHz)	2412
Polarization	Vertical		

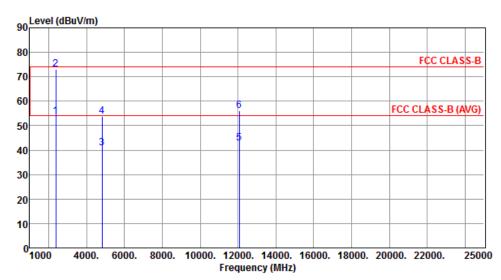


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	53.83	54.00	-0.17	54.96	-1.13	Average	140	144
2	2390.00	73.17	74.00	-0.83	74.30	-1.13	Peak	140	144
3	4824.00	40.69	54.00	-13.31	34.92	5.77	Average	105	160
4	4824.00	53.69	74.00	-20.31	47.92	5.77	Peak	105	160
5	12060.00	42.80	54.00	-11.20	26.92	15.88	Average	100	10
6	12060.00	56.00	74.00	-18.00	40.12	15.88	Peak	100	10

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 38 of 53



Modulation	HT20	Test Freq. (MHz)	2437
Polarization	Horizontal		

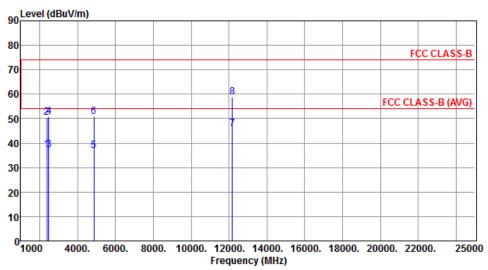


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.04	54.00	-16.96	38.17	-1.13	Average	105	215
2	2390.00	50.42	74.00	-23.58	51.55	-1.13	Peak	105	215
3	2483.50	37.25	54.00	-16.75	38.02	-0.77	Average	105	215
4	2483.50	50.73	74.00	-23.27	51.50	-0.77	Peak	105	215
5	4874.00	36.84	54.00	-17.16	30.93	5.91	Average	206	167
6	4874.00	50.82	74.00	-23.18	44.91	5.91	Peak	206	167
7	12185.00	45.77	54.00	-8.23	30.05	15.72	Average	150	0
8	12185.00	58.88	74.00	-15.12	43.16	15.72	Peak	150	0

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 39 of 53



Modulation	HT20	Test Freq. (MHz)	2437
Polarization	Vertical		

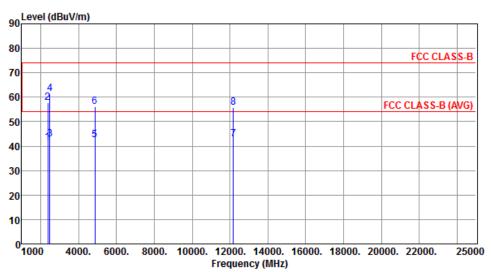


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.66	54.00	-12.34	42.79	-1.13	Average	169	163
2	2390.00	57.77	74.00	-16.23	58.90	-1.13	Peak	169	163
3	2483.50	42.74	54.00	-11.26	43.51	-0.77	Average	169	163
4	2483.50	61.47	74.00	-12.53	62.24	-0.77	Peak	169	163
5	4874.00	42.47	54.00	-11.53	36.56	5.91	Average	109	162
6	4874.00	55.99	74.00	-18.01	50.08	5.91	Peak	109	162
7	12185.00	42.69	54.00	-11.31	26.97	15.72	Average	100	35
8	12185.00	55.74	74.00	-18.26	40.02	15.72	Peak	100	35

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 40 of 53



Modulation	HT20	Test Freq. (MHz)	2462
Polarization	Horizontal		

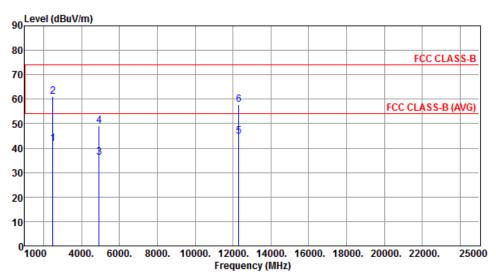


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ü	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	41.96	54.00	-12.04	42.73	-0.77	Average	115	210
2	2483.50	61.15	74.00	-12.85	61.92	-0.77	Peak	115	210
3	4924.00	36.05	54.00	-17.95	30.00	6.05	Average	202	163
4	4924.00	49.17	74.00	-24.83	43.12	6.05	Peak	202	163
5	12310.00	44.93	54.00	-9.07	29.35	15.58	Average	147	1
6	12310.00	57.77	74.00	-16.23	42.19	15.58	Peak	147	1

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 41 of 53



Modulation	HT20	Test Freq. (MHz)	2462
Polarization	Vertical		

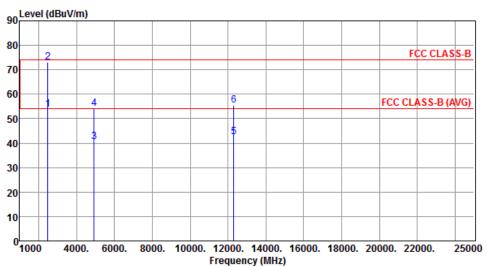

Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level			reading			High	Table
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg

1	2483.50	53.85	54.00	-0.15	54.62	-0.77	Average	159	158
2	2483.50	72.98	74.00	-1.02	73.75	-0.77	Peak	159	158
3	4924.00	40.55	54.00	-13.45	34.50	6.05	Average	103	160
4	4924.00	54.25	74.00	-19.75	48.20	6.05	Peak	103	160
5	12310.00	42.53	54.00	-11.47	26.95	15.58	Average	100	60
6	12310.00	55.61	74.00	-18.39	40.03	15.58	Peak	100	60

*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR811202AC Page: 42 of 53



3.6 Emissions in Non-Restricted Frequency Bands

3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Test Procedures


Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

3.6.3 Test Setup




Report No.: FR811202AC Page: 43 of 53




3.6.4 Unwanted Emissions into Non-Restricted Frequency Bands

802.11b

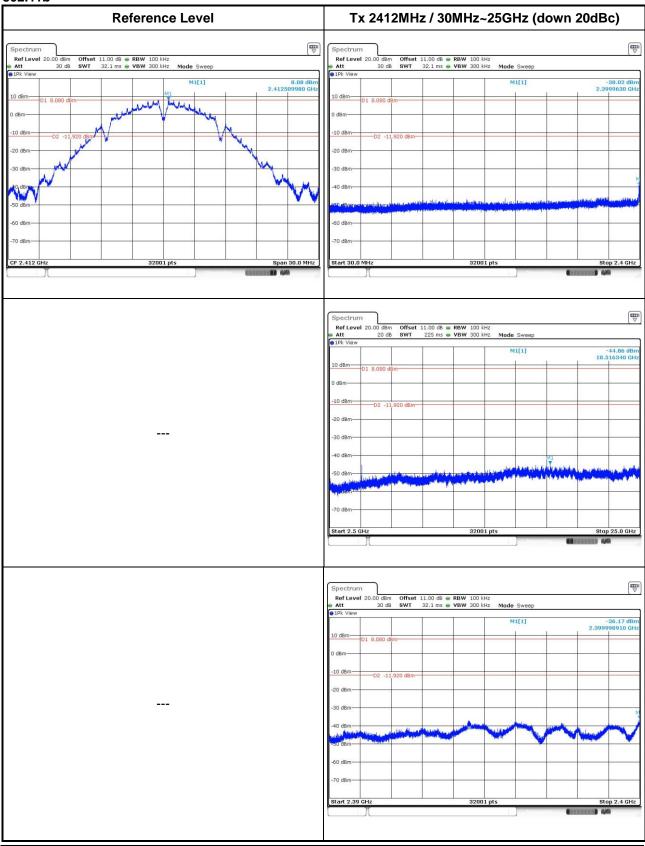

Report No.: FR811202AC Report Version: Rev. 01 Page: 44 of 53




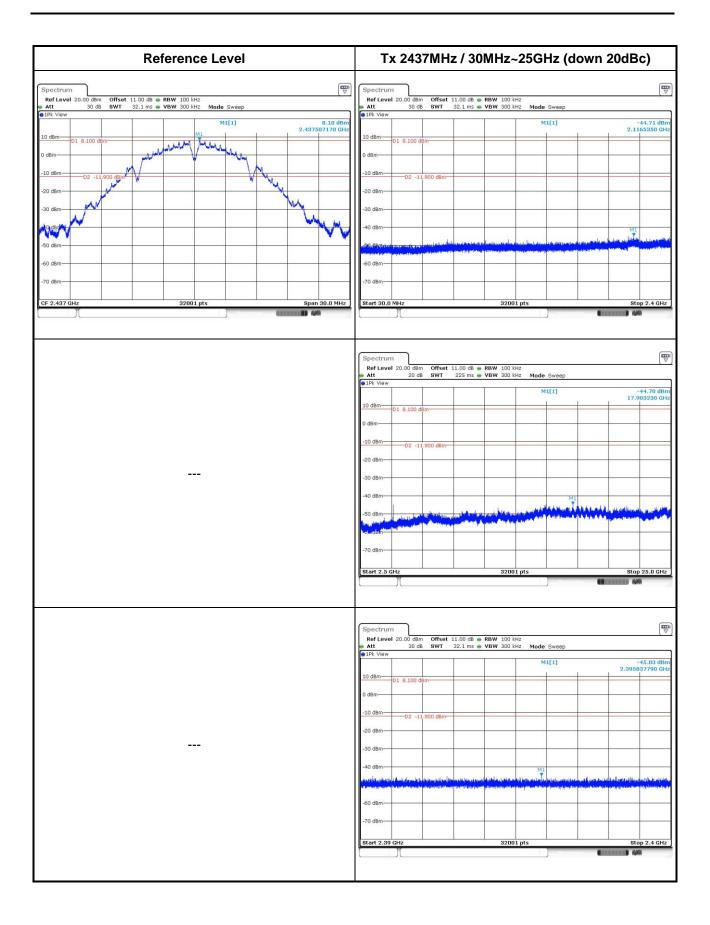

Report No.: FR811202AC


Page: 45 of 53



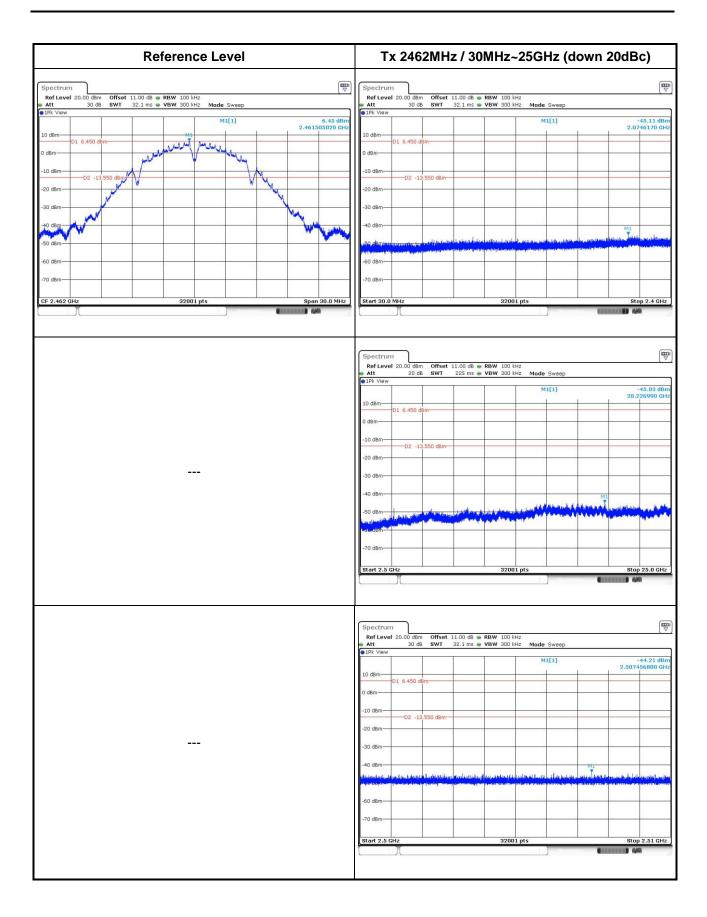


Report No.: FR811202AC Page: 46 of 53



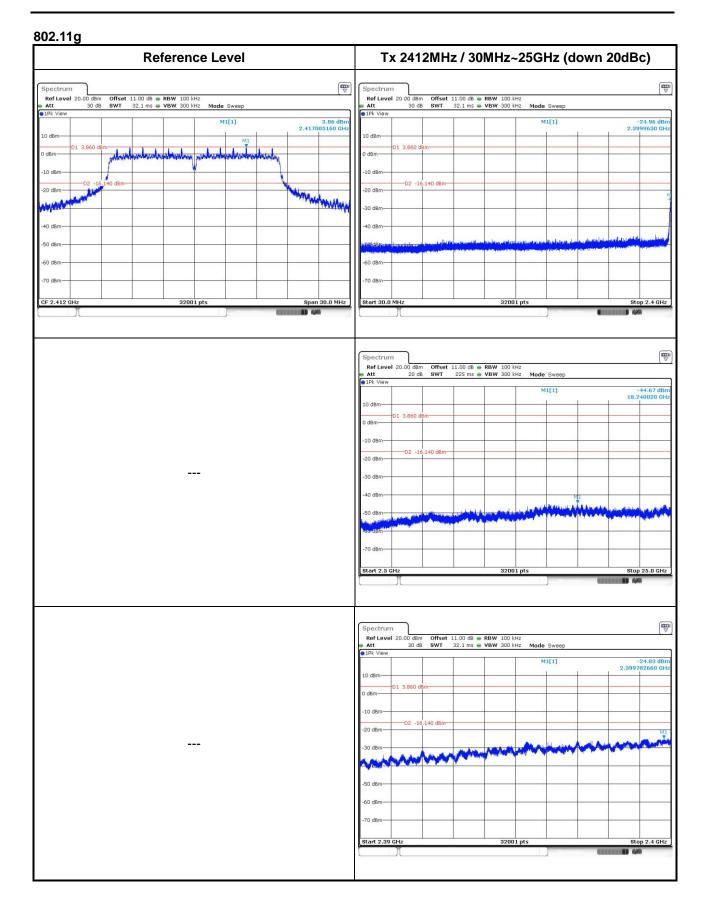


Report No.: FR811202AC Page: 47 of 53



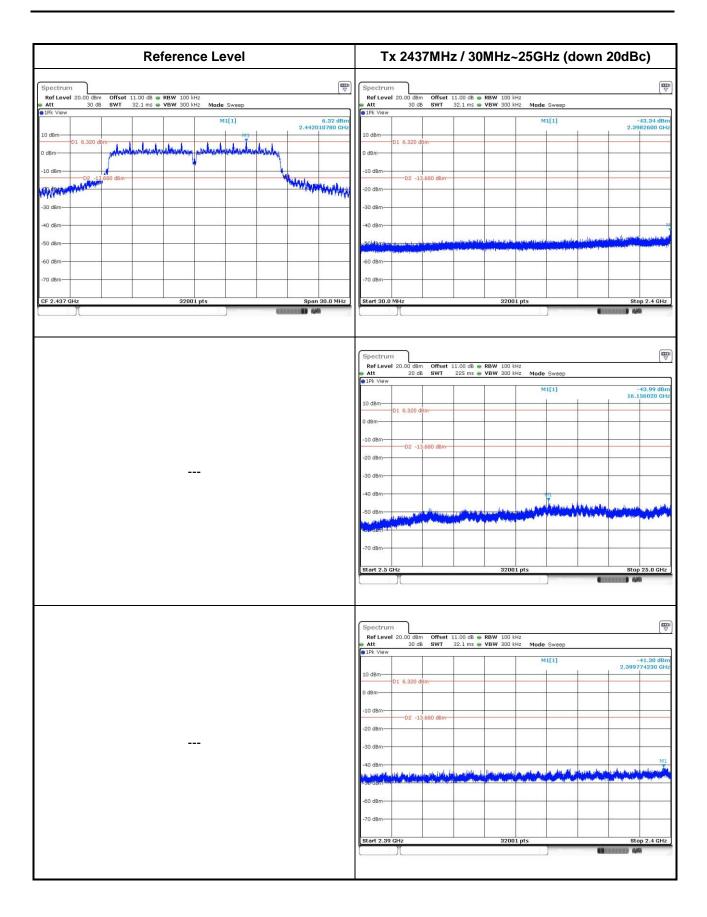

Report No.: FR811202AC Page: 48 of 53




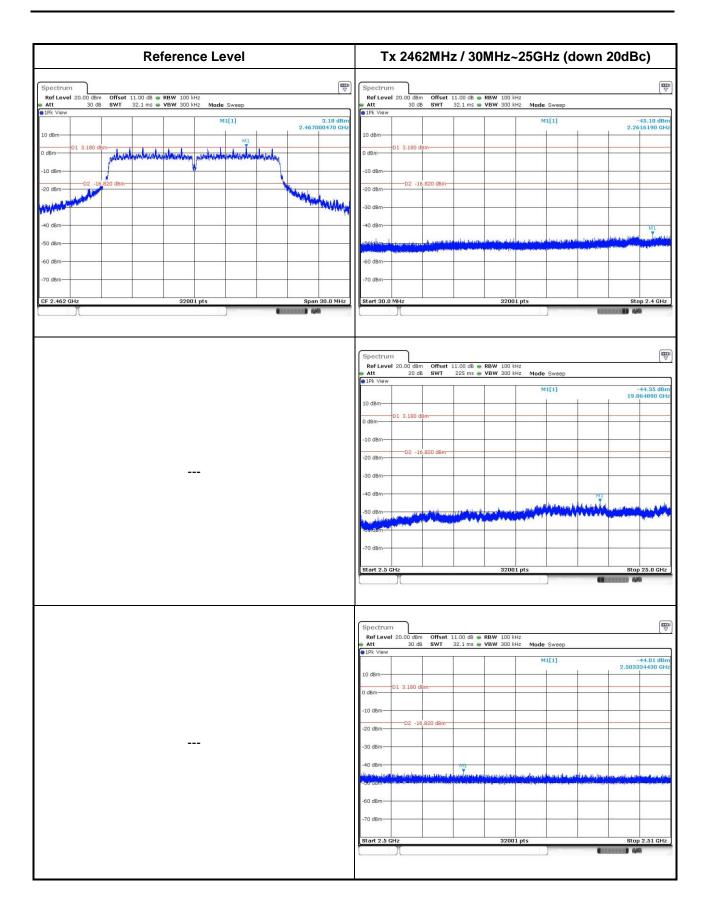

Report No.: FR811202AC Page: 49 of 53




802.11n HT20

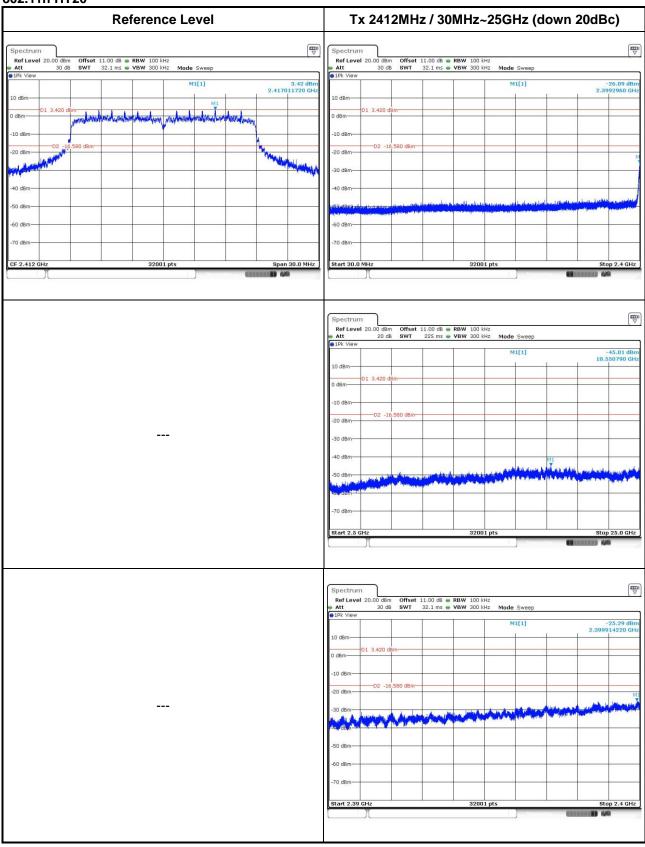


Report No.: FR811202AC Page: 50 of 53



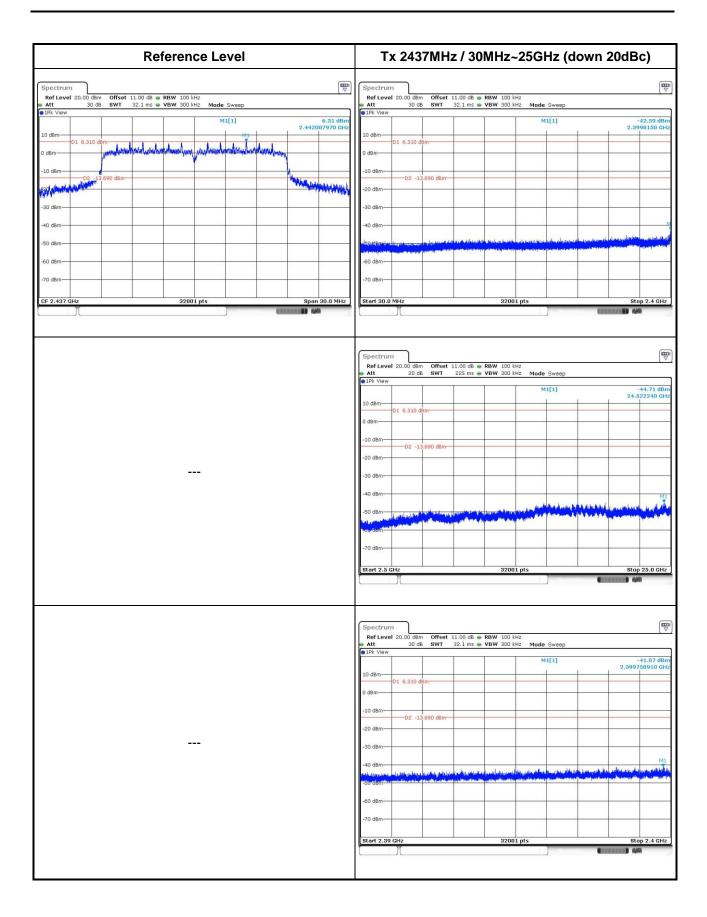

Report No.: FR811202AC Page: 51 of 53



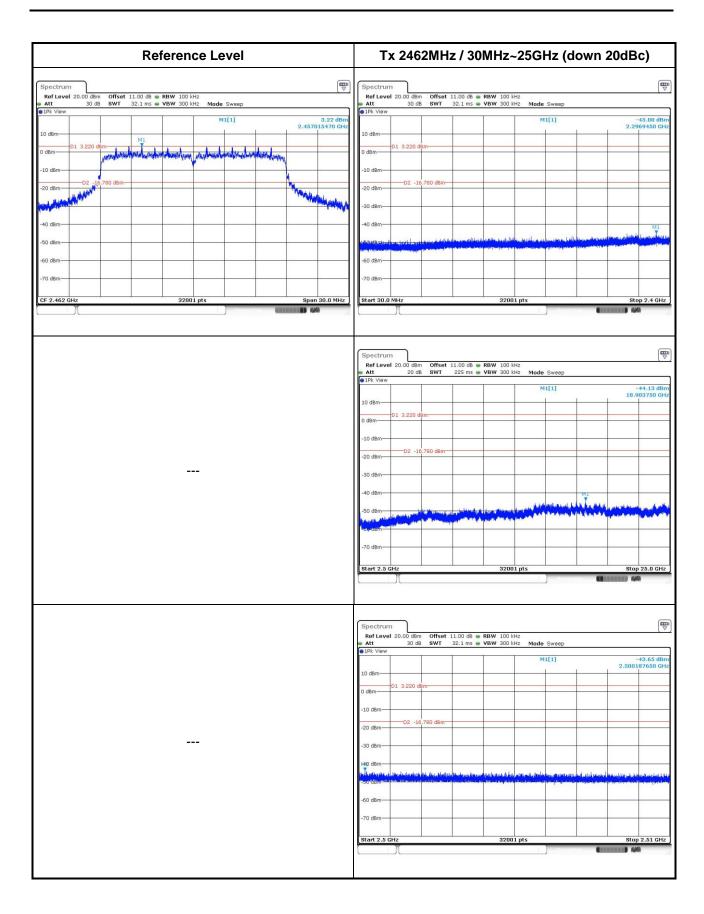

Report No.: FR811202AC Page: 52 of 53



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==

Report No.: FR811202AC Page: 53 of 53