

FCC TEST REPORT

(PART 15, SUBPART C, 15.247)

REPORT NO.: RF940516L02

MODEL NO.: HSTNH-H06C-WL

RECEIVED: May 31, 2005

TESTED: Jun. 18 ~ Aug. 31, 2005

ISSUED: Sep. 07, 2005

APPLICANT: High Tech Computer Corp.

ADDRESS: 1F, 6-3, Bau-Chian Rd., Hsin Tien, Taipei, Taiwan,
R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 258 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



NO. 2177-01



0528
ILAC MRA

TABLE OF CONTENTS

| | | |
|-------|--|-----|
| 1. | CERTIFICATION | 6 |
| 2. | SUMMARY OF TEST RESULTS | 7 |
| 2.1 | MEASUREMENT UNCERTAINTY | 9 |
| 3. | GENERAL INFORMATION | 10 |
| 3.1 | GENERAL DESCRIPTION OF EUT | 10 |
| 3.2 | DESCRIPTION OF TEST MODES | 12 |
| 3.2.1 | CONFIGURATION OF SYSTEM UNDER TEST | 14 |
| 3.2.2 | TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL: | 15 |
| 3.3.3 | GENERAL DESCRIPTION OF APPLIED STANDARDS | 23 |
| 3.3.4 | DESCRIPTION OF SUPPORT UNITS | 23 |
| 4. | TEST TYPES AND RESULTS (FOR WIRELESS LAN FUNCTION) | 24 |
| 4.1 | CONDUCTED EMISSION MEASUREMENT | 24 |
| 4.1.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT | 24 |
| 4.1.2 | TEST INSTRUMENTS | 24 |
| 4.1.3 | TEST PROCEDURES | 25 |
| 4.1.4 | DEVIATION FROM TEST STANDARD | 25 |
| 4.1.5 | TEST SETUP | 26 |
| 4.1.6 | EUT OPERATING CONDITIONS | 27 |
| 4.1.7 | TEST RESULTS | 28 |
| 4.2 | RADIATED EMISSION MEASUREMENT | 100 |
| 4.2.1 | LIMITS OF RADIATED EMISSION MEASUREMENT | 100 |
| 4.2.2 | TEST INSTRUMENTS | 101 |
| 4.2.3 | TEST PROCEDURES | 102 |
| 4.2.4 | DEVIATION FROM TEST STANDARD | 102 |
| 4.2.5 | TEST SETUP | 103 |
| 4.2.6 | EUT OPERATING CONDITIONS | 103 |
| 4.2.7 | TEST RESULTS | 104 |
| 4.3 | 6dB BANDWIDTH MEASUREMENT | 119 |
| 4.3.1 | LIMITS OF 6dB BANDWIDTH MEASUREMENT | 119 |
| 4.3.2 | TEST INSTRUMENTS | 119 |
| 4.3.3 | TEST PROCEDURE | 119 |
| 4.3.4 | DEVIATION FROM TEST STANDARD | 119 |
| 4.3.5 | TEST SETUP | 120 |
| 4.3.6 | EUT OPERATING CONDITIONS | 120 |
| 4.3.7 | TEST RESULTS | 121 |
| 4.4 | MAXIMUM PEAK OUTPUT POWER | 124 |
| 4.4.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT | 124 |
| 4.4.2 | TEST INSTRUMENTS | 124 |

| | | |
|-------|--|-----|
| 4.4.3 | TEST PROCEDURES | 125 |
| 4.4.4 | DEVIATION FROM TEST STANDARD | 125 |
| 4.4.5 | TEST SETUP | 125 |
| 4.4.6 | EUT OPERATING CONDITIONS..... | 125 |
| 4.4.7 | TEST RESULTS | 126 |
| 4.5 | POWER SPECTRAL DENSITY MEASUREMENT | 127 |
| 4.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT..... | 127 |
| 4.5.2 | TEST INSTRUMENTS..... | 127 |
| 4.5.3 | TEST PROCEDURE..... | 128 |
| 4.5.4 | DEVIATION FROM TEST STANDARD | 128 |
| 4.5.5 | TEST SETUP | 128 |
| 4.5.6 | EUT OPERATING CONDITION | 128 |
| 4.5.7 | TEST RESULTS | 129 |
| 4.6 | BAND EDGES MEASUREMENT | 132 |
| 4.6.1 | LIMITS OF BAND EDGES MEASUREMENT | 132 |
| 4.6.2 | TEST INSTRUMENTS..... | 132 |
| 4.6.3 | TEST PROCEDURE..... | 132 |
| 4.6.4 | DEVIATION FROM TEST STANDARD | 132 |
| 4.6.5 | EUT OPERATING CONDITION | 132 |
| 4.6.6 | TEST RESULTS | 133 |
| 4.7 | ANTENNA REQUIREMENT | 137 |
| 4.7.1 | STANDARD APPLICABLE..... | 137 |
| 4.7.2 | ANTENNA CONNECTED CONSTRUCTION..... | 137 |
| 5. | TEST TYPES AND RESULTS (FOR BLUETOOTH FUNCTION)..... | 138 |
| 5.1 | CONDUCTED EMISSION MEASUREMENT..... | 138 |
| 5.1.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT..... | 138 |
| 5.1.2 | TEST INSTRUMENTS..... | 138 |
| 5.1.3 | TEST PROCEDURES | 139 |
| 5.1.4 | DEVIATION FROM TEST STANDARD | 139 |
| 5.1.5 | TEST SETUP | 140 |
| 5.1.6 | EUT OPERATING CONDITIONS..... | 141 |
| 5.1.7 | TEST RESULTS | 142 |
| 5.2 | RADIATED EMISSION MEASUREMENT | 214 |
| 5.2.1 | LIMITS OF RADIATED EMISSION MEASUREMENT..... | 214 |
| 5.2.2 | TEST INSTRUMENTS..... | 215 |
| 5.2.3 | TEST PROCEDURES | 216 |
| 5.2.4 | DEVIATION FROM TEST STANDARD | 216 |
| 5.2.5 | TEST SETUP | 217 |
| 5.2.6 | EUT OPERATING CONDITIONS..... | 217 |
| 5.2.7 | TEST RESULTS | 218 |



| | | |
|-------|---|-----|
| 5.3 | NUMBER OF HOPPING FREQUENCY USED | 233 |
| 5.3.1 | LIMIT OF HOPPING FREQUENCY USED | 233 |
| 5.3.2 | TEST INSTRUMENTS | 233 |
| 5.3.3 | TEST PROCEDURES | 233 |
| 5.3.4 | DEVIATION FROM TEST STANDARD | 234 |
| 5.3.5 | TEST SETUP | 234 |
| 5.3.6 | TEST RESULTS | 234 |
| 5.4 | DWELL TIME ON EACH CHANNEL | 236 |
| 5.4.1 | LIMIT OF DWELL TIME USED | 236 |
| 5.4.2 | TEST INSTRUMENTS | 236 |
| 5.4.3 | TEST PROCEDURES | 236 |
| 5.4.4 | DEVIATION FROM TEST STANDARD | 236 |
| 5.4.5 | TEST SETUP | 237 |
| 5.4.6 | TEST RESULTS | 237 |
| 5.5 | CHANNEL BANDWIDTH..... | 241 |
| 5.5.1 | LIMITS OF CHANNEL BANDWIDTH..... | 241 |
| 5.5.2 | TEST INSTRUMENTS..... | 241 |
| 5.5.3 | TEST PROCEDURE..... | 241 |
| 5.5.4 | DEVIATION FROM TEST STANDARD | 242 |
| 5.5.5 | TEST SETUP | 242 |
| 5.5.6 | EUT OPERATING CONDITION | 242 |
| 5.5.7 | TEST RESULTS | 242 |
| 5.6 | HOPPING CHANNEL SEPARATION | 245 |
| 5.6.1 | LIMIT OF HOPPING CHANNEL SEPARATION | 245 |
| 5.6.2 | TEST INSTRUMENTS..... | 245 |
| 5.6.3 | TEST PROCEDURES | 245 |
| 5.6.4 | DEVIATION FROM TEST STANDARD | 246 |
| 5.6.5 | TEST SETUP | 246 |
| 5.6.6 | TEST RESULTS | 246 |
| 5.7 | MAXIMUM PEAK OUTPUT POWER | 249 |
| 5.7.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT | 249 |
| 5.7.2 | TEST INSTRUMENTS..... | 249 |
| 5.7.3 | TEST PROCEDURES | 249 |
| 5.7.4 | DEVIATION FROM TEST STANDARD | 249 |
| 5.7.5 | TEST SETUP | 250 |
| 5.7.6 | EUT OPERATING CONDITION | 250 |
| 5.7.7 | TEST RESULTS | 250 |
| 5.8 | BAND EDGES MEASUREMENT | 253 |
| 5.8.1 | LIMITS OF BAND EDGES MEASUREMENT | 253 |
| 5.8.2 | TEST INSTRUMENTS..... | 253 |



| | | |
|-------|---|-----|
| 5.8.3 | TEST PROCEDURE..... | 253 |
| 5.8.4 | DEVIATION FROM TEST STANDARD | 253 |
| 5.8.5 | EUT OPERATING CONDITION | 253 |
| 5.8.6 | TEST RESULTS | 254 |
| 5.9 | ANTENNA REQUIREMENT | 257 |
| 5.9.1 | STANDARD APPLICABLE..... | 257 |
| 5.9.2 | ANTENNA CONNECTED CONSTRUCTION..... | 257 |
| 6. | INFORMATION ON THE TESTING LABORATORIES | 258 |

1. CERTIFICATION

PRODUCT: Pocket PC Phone

MODEL NO.: HSTNH-H06C-WL

TEST SAMPLE: ENGINEERING SAMPLE

TESTED: Jun. 18 ~ Aug. 31, 2005

APPLICANT: High Tech Computer Corp.

STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: HSTNH-H06C-WL) have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Wendy Liao , **DATE:** Sep. 07, 2005
Wendy Liao

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Sep. 07, 2005
Responsible for RF Gary Chang

APPROVED BY : Cody Chang , **DATE:** Sep. 07, 2005
Cody Chang / Deputy Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

FOR WIRELESS LAN FUNCTION:

| APPLIED STANDARD: FCC Part 15, Subpart C | | | |
|--|--|--------|--|
| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
| 15.207 | AC Power Conducted Emission | PASS | Meet the requirement of limit. Minimum passing margin is -12.75dB at 0.474MHz. |
| 15.247(a)(2) | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz | PASS | Meet the requirement of limit |
| 15.247(b) | Maximum Peak Output Power Limit: max. 30dBm | PASS | Meet the requirement of limit |
| 15.247(d) | Radiated Emissions Limit: Table 15.209 | PASS | Meet the requirement of limit. Minimum passing margin is -2.44dB at 2485.00MHz. |
| 15.247(e) | Power Spectral Density Limit: max. 8dBm | PASS | Meet the requirement of limit |
| 15.247(d) | Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency | PASS | Meet the requirement of limit |

The EUT has been tested according to the following specifications:

FOR BLUETOOTH FUNCTION:

| APPLIED STANDARD: FCC Part 15, Subpart C | | | |
|---|---|---------------|---|
| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
| 15.207 | AC Power Conducted Emission | PASS | Meet the requirement of limit Minimum passing margin is -12.10dB at 0.474MHz. |
| 15.247(a)(1)(iii) | Number of Hopping Frequency Used Spec.: At least 15 channels | PASS | Meet the requirement of limit |
| 15.247(a)(1)(iii) | Dwell Time on Each Channel Spec. : Max. 0.4 second within 31.6 second | PASS | Meet the requirement of limit |
| 15.247(a)(1) | 1. Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, whichever is greater 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System | PASS | Meet the requirement of limit |
| 15.247(b) | Maximum Peak Output Power Spec.: max. 30dBm | PASS | Meet the requirement of limit |
| 15.247(d) | Transmitter Radiated Emissions Spec.: Table 15.209 | PASS | Meet the requirement of limit Minimum passing margin is -4.02 dB at 115.53MHz. |
| 15.247(d) | Band Edge Measurement | PASS | Meet the requirement of limit |

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|------------------|-------------|
| Conducted emissions | 9kHz ~ 30MHz | 2.44 dB |
| Radiated emissions | 30MHz ~ 200MHz | 3.73 dB |
| | 200MHz ~ 1000MHz | 3.74 dB |
| | 1GHz ~ 18GHz | 2.20 dB |
| | 18GHz ~ 40GHz | 1.88 dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|---------------------------|---|
| PRODUCT | Pocket PC Phone |
| MODEL NO. | HSTNH-H06C-WL |
| POWER SUPPLY | 3.7Vdc from rechargeable lithium battery 5Vdc from power adapter |
| MODULATION TYPE | Wireless LAN: CCK, DQPSK, DBPSK for DSSS Bluetooth: GFSK for FHSS |
| TRANSFER RATE | DSSS: 1/2/5.5/11Mbps FHSS: 723Kbps |
| FREQUENCY RANGE | 2400 ~ 2483.5 MHz |
| NUMBER OF CHANNEL | DSSS: 11 FHSS: 79 |
| OUTPUT POWER | DSSS: 35.481mW FHSS: 1.807 mW |
| ANTENNA TYPE | DSSS: PIFA antenna with 1.0dBi gain FHSS: Chip antenna with 0.5dBi gain |
| DATA CABLE | 1.2m USB and RS-232 shielded cable without core 1.7m non-shielded cable for earphone |
| I/O PORTS | Refer to user's manual |
| ASSOCIATED DEVICES | Earphone, cradle |

NOTE:

1. The EUT is a GSM850/PCS1900/GPRS/E-GPRS Pocket PC Phone with wireless LAN and bluetooth functions. This report is only covered the functions of wireless LAN and bluetooth. The mobile phone function is covered in another two test reports, which standards used are FCC Part 24 and FCC Part 22.

2. The EUT have two lithium batteries listed as below:

| STANDARD BATTERY: | |
|--------------------------|-----------------|
| MODEL: | HSTNH-D06B |
| RATING: | 3.7Vdc, 1200mAh |

| OPTIONAL EXTENDED BATTERY: | |
|-----------------------------------|-----------------|
| MODEL: | HSTNH-D06B-HC |
| RATING: | 3.7Vdc, 1800mAh |

3. The EUT was operated with following power adapters:

| ADAPTER 1: | |
|--------------------|---|
| BRAND: | DELTA ELECTRONICS, INC. |
| MODEL: | EADP-10BB REV.B |
| INPUT: | 100-240Vac, 400mA, 50-60Hz |
| OUTPUT: | 5Vdc, 2A |
| POWER LINE: | DC 1.8m non-shielded cable without core |

| ADAPTER 2: | |
|--------------------|---|
| BRAND: | HIPRO |
| MODEL: | HP-AC010L63 REV.:01 |
| INPUT: | 100-240Vac, 500mA, 50-60Hz |
| OUTPUT: | 5Vdc, 2A |
| POWER LINE: | DC 1.8m non-shielded cable without core |

| ADAPTER 3: | |
|--------------------|---|
| BRAND: | PHIHONG |
| MODEL: | PSC11A-050 |
| INPUT: | 100-240Vdc, 300mA, 50-60Hz, 26-34VA |
| OUTPUT: | 5Vdc, 2A |
| POWER LINE: | DC 1.8m non-shielded cable without core |

4. The EUT uses two wireless technologies for communication: bluetooth and 802.11b standards.
5. The EUT operates in the 2.4GHz frequency spectrum and complies with FHSS & DSSS techniques.
6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Since the EUT is considered a portable unit, it was pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane. Therefore only the test data of this X-plane was used for radiated test.

There are 12 test results presented in the report as below.

| TEST RESULT | TEST CONDITION |
|-------------|---|
| A | The EUT with standard battery connected with the earphone, and was powered by the adapter 1. |
| B | The EUT with standard battery connected with the earphone, and was powered by the adapter 2. |
| C | The EUT with standard battery connected with the earphone, and was powered by the adapter 3. |
| D | The EUT with optional extended battery connected with the earphone, and was powered by the adapter 1. |
| E | The EUT with optional extended battery connected with the earphone, and was powered by the adapter 2. |
| F | The EUT with optional extended battery connected with the earphone, and was powered by the adapter 3. |
| G | The EUT with standard battery connected with the cradle, and was powered by the adapter 1. |
| H | The EUT with standard battery connected with the cradle, and was powered by the adapter 2. |
| I | The EUT with standard battery connected with the cradle, and was powered by the adapter 3. |
| J | The EUT with optional extended battery connected with the cradle, and was powered by the adapter 1. |
| K | The EUT with optional extended battery connected with the cradle, and was powered by the adapter 2. |
| L | The EUT with optional extended battery connected with the cradle, and was powered by the adapter 3. |

11 channels are provided to the EUT for wireless LAN function:


| CHANNEL | FREQUENCY | CHANNEL | FREQUENCY |
|---------|-----------|---------|-----------|
| 1 | 2412 MHz | 7 | 2442 MHz |
| 2 | 2417 MHz | 8 | 2447 MHz |
| 3 | 2422 MHz | 9 | 2452 MHz |
| 4 | 2427 MHz | 10 | 2457 MHz |
| 5 | 2432 MHz | 11 | 2462 MHz |
| 6 | 2437 MHz | | |

79 channels are provided to this EUT for bluetooth function:


| CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 0 | 2402 | 20 | 2422 | 40 | 2442 | 60 | 2462 |
| 1 | 2403 | 21 | 2423 | 41 | 2443 | 61 | 2463 |
| 2 | 2404 | 22 | 2424 | 42 | 2444 | 62 | 2464 |
| 3 | 2405 | 23 | 2425 | 43 | 2445 | 63 | 2465 |
| 4 | 2406 | 24 | 2426 | 44 | 2446 | 64 | 2466 |
| 5 | 2407 | 25 | 2427 | 45 | 2447 | 65 | 2467 |
| 6 | 2408 | 26 | 2428 | 46 | 2448 | 66 | 2468 |
| 7 | 2409 | 27 | 2429 | 47 | 2449 | 67 | 2469 |
| 8 | 2410 | 28 | 2430 | 48 | 2450 | 68 | 2470 |
| 9 | 2411 | 29 | 2431 | 49 | 2451 | 69 | 2471 |
| 10 | 2412 | 30 | 2431 | 50 | 2452 | 70 | 2472 |
| 11 | 2413 | 31 | 2433 | 51 | 2453 | 71 | 2473 |
| 12 | 2414 | 32 | 2434 | 52 | 2454 | 72 | 2474 |
| 13 | 2415 | 33 | 2435 | 53 | 2455 | 73 | 2475 |
| 14 | 2416 | 34 | 2436 | 54 | 2456 | 74 | 2476 |
| 15 | 2417 | 35 | 2437 | 55 | 2457 | 75 | 2477 |
| 16 | 2418 | 36 | 2438 | 56 | 2458 | 76 | 2478 |
| 17 | 2419 | 37 | 2439 | 57 | 2459 | 77 | 2479 |
| 18 | 2420 | 38 | 2440 | 58 | 2460 | 78 | 2480 |
| 19 | 2421 | 39 | 2441 | 59 | 2461 | | |

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE A, B, C, D, E, F

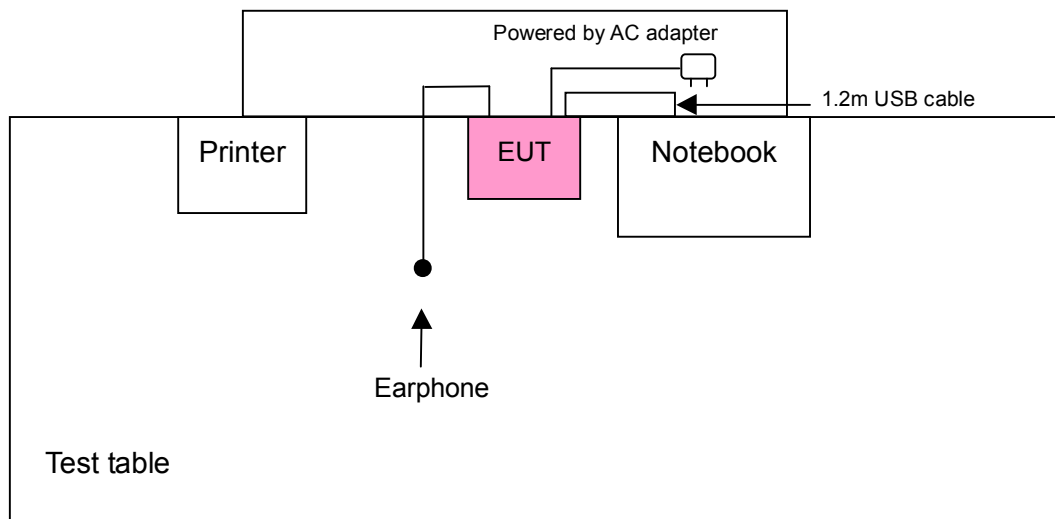

TEST MODE G, H, I, J, K, L

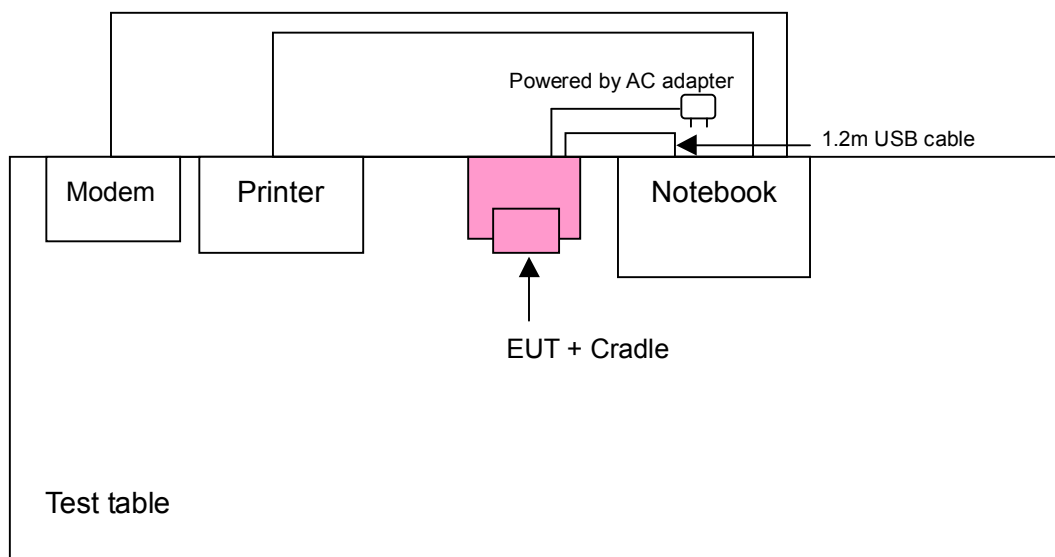

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

FOR WIRELESS LAN FUNCTION:

| EUT CONFIGURE MODE | APPLICABLE TO | | | | DESCRIPTION |
|--------------------------|---------------|-------|-------|------|---|
| | PLC | RE<1G | RE≥1G | APCM | |
| A | √ | √ | - | - | The EUT with standard battery connected with the earphone, and was powered by the adapter 1. |
| B | √ | √ | - | - | The EUT with standard battery connected with the earphone, and was powered by the adapter 2. |
| C | √ | √ | - | - | The EUT with standard battery connected with the earphone, and was powered by the adapter 3. |
| D | √ | √ | - | - | The EUT with optional extended battery connected with the earphone, and was powered by the adapter 1. |
| E | √ | √ | - | - | The EUT with optional extended battery connected with the earphone, and was powered by the adapter 2. |
| F | √ | √ | - | - | The EUT with optional extended battery connected with the earphone, and was powered by the adapter 3. |
| G | √ | √ | - | - | The EUT with standard battery connected with the cradle, and was powered by the adapter 1. |
| H | √ | √ | - | - | The EUT with standard battery connected with the cradle, and was powered by the adapter 2. |
| I | √ | √ | - | - | The EUT with standard battery connected with the cradle, and was powered by the adapter 3. |
| J | √ | √ | √ | √ | The EUT with optional extended battery connected with the cradle, and was powered by the adapter 1. |
| K | √ | √ | - | - | The EUT with optional extended battery connected with the cradle, and was powered by the adapter 2. |
| L | √ | √ | - | - | The EUT with optional extended battery connected with the cradle, and was powered by the adapter 3. |

Where **PLC**: Power Line Conducted Emission
RE≥1G: Radiated Emission above 1GHz

RE<1G RE: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

NOTE: "-" means no effect.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|--------------------|-------------------|----------------|-----------------------|-----------------|------------------|
| A | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |
| B | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |
| C | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |
| D | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |
| E | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |
| F | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |
| G | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |
| H | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |
| I | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |
| J | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |
| K | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |
| L | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, antenna ports (if EUT with antenna diversity architecture), X, Y and Z Axis.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | AXIS |
|--------------------|-------------------|----------------|-----------------------|-----------------|------------------|------|
| A | 1 to 11 | 11 | DSSS | CCK | 11 | X |
| B | 1 to 11 | 11 | DSSS | CCK | 11 | X |
| C | 1 to 11 | 11 | DSSS | CCK | 11 | X |
| D | 1 to 11 | 11 | DSSS | CCK | 11 | X |
| E | 1 to 11 | 11 | DSSS | CCK | 11 | X |
| F | 1 to 11 | 11 | DSSS | CCK | 11 | X |
| G | 1 to 11 | 11 | DSSS | CCK | 11 | - |
| H | 1 to 11 | 11 | DSSS | CCK | 11 | - |
| I | 1 to 11 | 11 | DSSS | CCK | 11 | - |
| J | 1 to 11 | 11 | DSSS | CCK | 11 | - |
| K | 1 to 11 | 11 | DSSS | CCK | 11 | - |
| L | 1 to 11 | 11 | DSSS | CCK | 11 | - |

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|--------------------|-------------------|----------------|-----------------------|-----------------|------------------|
| J | 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|-------------------|----------------|-----------------------|-----------------|------------------|
| 1 to 11 | 1, 11 | DSSS | CCK | 11 |

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|-------------------|----------------|-----------------------|-----------------|------------------|
| 1 to 11 | 1, 6, 11 | DSSS | CCK | 11 |

FOR BLUETOOTH FUNCTION:

| EUT CONFIGURE MODE | APPLICABLE TO | | | | DESCRIPTION |
|--------------------------|---------------|-------|-------|------|---|
| | PLC | RE<1G | RE≥1G | APCM | |
| A | √ | √ | - | - | The EUT with standard battery connected with the earphone, and was powered by the adapter 1. |
| B | √ | √ | - | - | The EUT with standard battery connected with the earphone, and was powered by the adapter 2. |
| C | √ | √ | - | - | The EUT with standard battery connected with the earphone, and was powered by the adapter 3. |
| D | √ | √ | √ | √ | The EUT with optional extended battery connected with the earphone, and was powered by the adapter 1. |
| E | √ | √ | - | - | The EUT with optional extended battery connected with the earphone, and was powered by the adapter 2. |
| F | √ | √ | - | - | The EUT with optional extended battery connected with the earphone, and was powered by the adapter 3. |
| G | √ | √ | - | - | The EUT with standard battery connected with the cradle, and was powered by the adapter 1. |
| H | √ | √ | - | - | The EUT with standard battery connected with the cradle, and was powered by the adapter 2. |
| I | √ | √ | - | - | The EUT with standard battery connected with the cradle, and was powered by the adapter 3. |
| J | √ | √ | - | - | The EUT with optional extended battery connected with the cradle, and was powered by the adapter 1. |
| K | √ | √ | - | - | The EUT with optional extended battery connected with the cradle, and was powered by the adapter 2. |
| L | √ | √ | - | - | The EUT with optional extended battery connected with the cradle, and was powered by the adapter 3. |

Where **PLC:** Power Line Conducted Emission
RE≥1G: Radiated Emission above 1GHz

RE<1G RE: Radiated Emission below 1GHz
APCM: Antenna Port Conducted Measurement

NOTE: “-“ means no effect.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|
| A | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |
| B | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |
| C | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |
| D | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |
| E | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |
| F | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |
| G | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |
| H | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |
| I | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |
| J | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |
| K | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |
| L | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, antenna ports (if EUT with antenna diversity architecture), X, Y, Z Axis, and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE | AXIS |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|------|
| A | 0 to 78 | 78 | FHSS | GFSK | DH5 | X |
| B | 0 to 78 | 78 | FHSS | GFSK | DH5 | X |
| C | 0 to 78 | 78 | FHSS | GFSK | DH5 | X |
| D | 0 to 78 | 78 | FHSS | GFSK | DH5 | X |
| E | 0 to 78 | 78 | FHSS | GFSK | DH5 | X |
| F | 0 to 78 | 78 | FHSS | GFSK | DH5 | X |
| G | 0 to 78 | 78 | FHSS | GFSK | DH5 | - |
| H | 0 to 78 | 78 | FHSS | GFSK | DH5 | - |
| I | 0 to 78 | 78 | FHSS | GFSK | DH5 | - |
| J | 0 to 78 | 78 | FHSS | GFSK | DH5 | - |
| K | 0 to 78 | 78 | FHSS | GFSK | DH5 | - |
| L | 0 to 78 | 78 | FHSS | GFSK | DH5 | - |

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, antenna ports (if EUT with antenna diversity architecture), X, Y, Z Axis, and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE | AXIS |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|------|
| D | 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 | X |

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE |
|-------------------|----------------|-----------------------|-----------------|-------------|
| 0 to 78 | 0, 78 | FHSS | GFSK | DH5 |

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE |
|-------------------|----------------|-----------------------|-----------------|-------------|
| 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH5 |

3.3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Pocket PC Phone. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4- 2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|-------------------|-------|-----------|-------------|------------------|
| 1 | NOTEBOOK COMPUTER | DELL | PP05L | 12130898320 | E2K24CLNS |
| 2 | MODEM | ACEEX | 1414V/3 | 0401008248 | IFAXDM1414 |
| 3 | PRINTER | EPSON | LQ-300+ | DCGY047265 | FCC DoC Approved |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | NA |
| 2 | 1.2 m shielded cable without core |
| 3 | 1.2 m shielded cable without core |

NOTE: All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS (FOR WIRELESS LAN FUNCTION)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB μ V) | |
|-----------------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15 ~ 0.5 | 66 to 56 | 56 to 46 |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------------|-------------|----------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESCS30 | 100288 | Nov. 06, 2005 |
| RF signal cable Woken | 5D-FB | Cable-HyC02-01 | Jan. 09, 2006 |
| LISN ROHDE & SCHWARZ | ESH2-Z5 | 100100 | Jan. 20, 2006 |
| LISN ROHDE & SCHWARZ | ESH3-Z5 | 100311 | Jan. 20, 2006 |
| Software ADT | ADT_Cond_V3 | NA | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 3.
 3. The VCCI Site Registration No. is C-2047.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

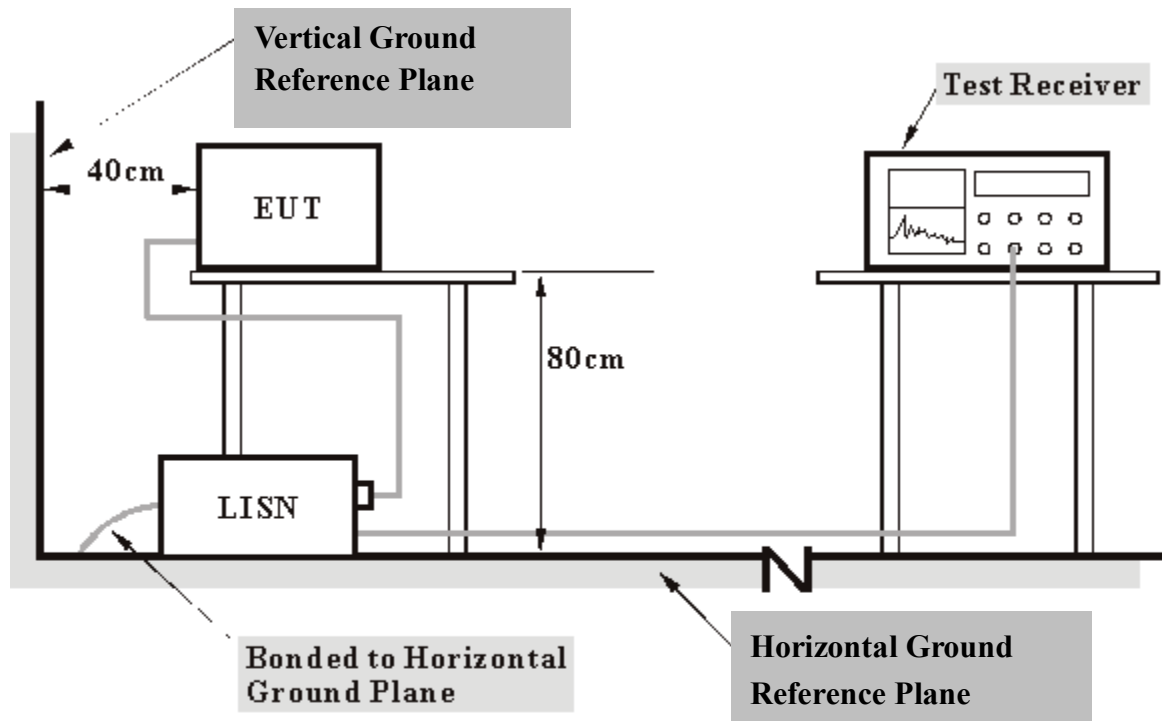

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

TEST MODE A ~ F:

The EUT placed on the testing table and set it under transmission / receiving condition continuously at specific channel frequency.

TEST MODE G ~ L:

- a. Connected the EUT to a notebook system via USB cable and placed on a testing table.
- b. The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook system sent "H" messages to its screen.
- d. The notebook system sent "H" messages to modem.
- e. The notebook system sent "H" messages to printer, and the printer printed them on paper.
- f. Steps c ~ e were repeated.


4.1.7 TEST RESULTS

CONDUCTED WORST CASE DATA:

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | A | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | | | | | | | | |
| 1 | 0.211 | 0.10 | 38.90 | - | 39.00 | - | 63.15 | 53.15 | -24.15 | - |
| 2 | 0.812 | 0.17 | 30.93 | - | 31.10 | - | 56.00 | 46.00 | -24.90 | - |
| 3 | 1.301 | 0.20 | 35.20 | - | 35.40 | - | 56.00 | 46.00 | -20.60 | - |
| 4 | 1.637 | 0.20 | 37.22 | - | 37.42 | - | 56.00 | 46.00 | -18.58 | - |
| 5 | 4.854 | 0.21 | 36.06 | - | 36.27 | - | 56.00 | 46.00 | -19.73 | - |
| 6 | 6.324 | 0.24 | 35.58 | - | 35.82 | - | 60.00 | 50.00 | -24.18 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

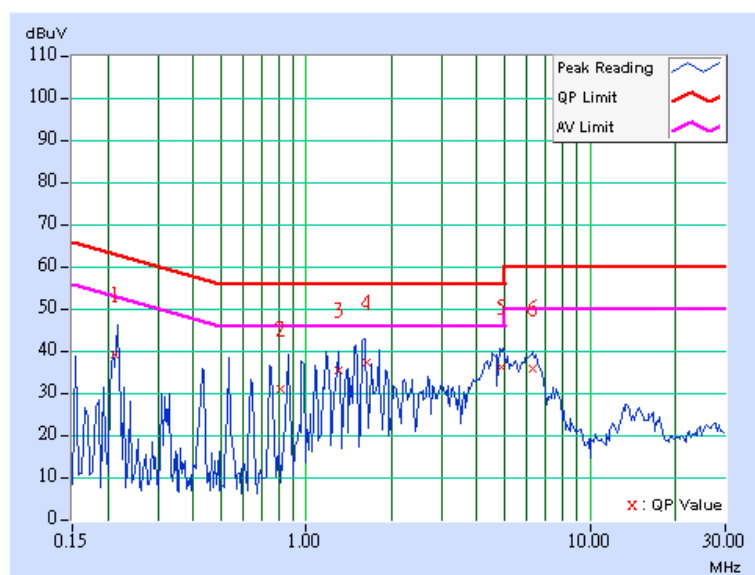

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | A | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.209 | 0.10 | 43.67 | - | 43.77 | - | 63.26 | 53.26 | -19.49 | - |
| 2 | 0.856 | 0.18 | 36.71 | - | 36.89 | - | 56.00 | 46.00 | -19.11 | - |
| 3 | 1.301 | 0.20 | 36.92 | - | 37.12 | - | 56.00 | 46.00 | -18.88 | - |
| 4 | 1.596 | 0.20 | 41.40 | - | 41.60 | - | 56.00 | 46.00 | -14.40 | - |
| 5 | 4.996 | 0.23 | 38.99 | - | 39.22 | - | 56.00 | 46.00 | -16.78 | - |
| 6 | 6.518 | 0.28 | 35.98 | - | 36.26 | - | 60.00 | 50.00 | -23.74 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

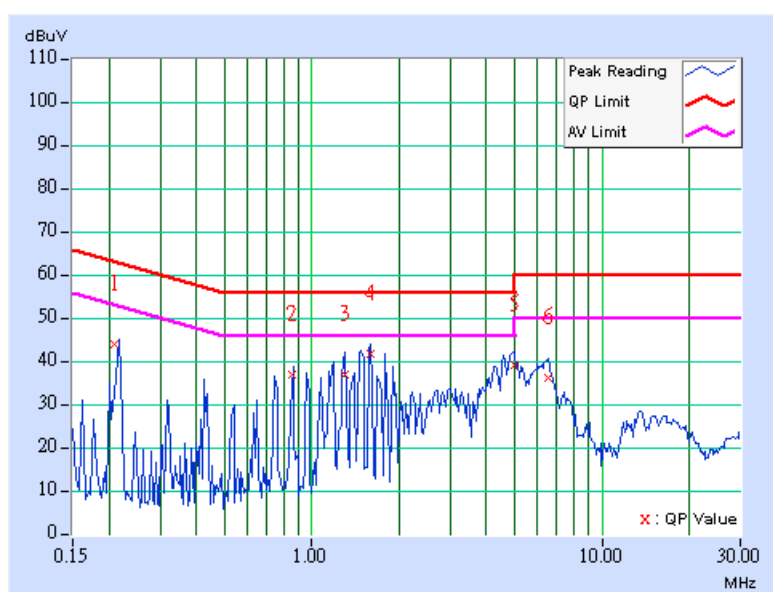

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | A | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.209 | 0.10 | 44.44 | - | 44.54 | - | 63.26 | 53.26 | -18.72 | - |
| 2 | 0.532 | 0.12 | 36.83 | - | 36.95 | - | 56.00 | 46.00 | -19.05 | - |
| 3 | 1.172 | 0.20 | 37.16 | - | 37.36 | - | 56.00 | 46.00 | -18.64 | - |
| 4 | 1.596 | 0.20 | 40.23 | - | 40.43 | - | 56.00 | 46.00 | -15.57 | - |
| 5 | 4.773 | 0.21 | 31.63 | - | 31.84 | - | 56.00 | 46.00 | -24.16 | - |
| 6 | 6.352 | 0.24 | 35.03 | - | 35.27 | - | 60.00 | 50.00 | -24.73 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

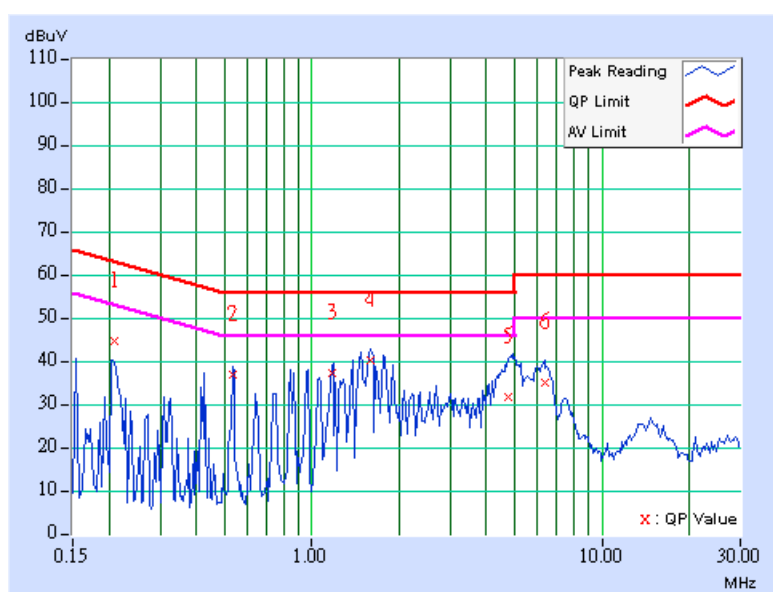

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | A | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.208 | 0.10 | 42.97 | - | 43.07 | - | 63.30 | 53.30 | -20.23 | - |
| 2 | 0.538 | 0.12 | 36.70 | - | 36.82 | - | 56.00 | 46.00 | -19.18 | - |
| 3 | 1.461 | 0.20 | 33.42 | - | 33.62 | - | 56.00 | 46.00 | -22.38 | - |
| 4 | 1.597 | 0.20 | 41.58 | - | 41.78 | - | 56.00 | 46.00 | -14.22 | - |
| 5 | 4.836 | 0.23 | 35.38 | - | 35.61 | - | 56.00 | 46.00 | -20.39 | - |
| 6 | 6.316 | 0.28 | 35.41 | - | 35.69 | - | 60.00 | 50.00 | -24.31 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

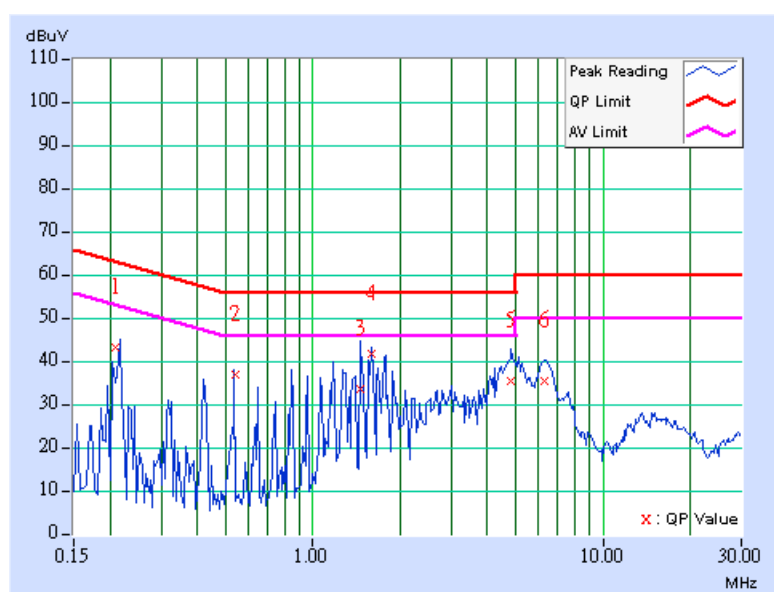

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | A | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.216 | 0.10 | 44.55 | - | 44.65 | - | 62.96 | 52.96 | -18.31 | - |
| 2 | 0.541 | 0.12 | 36.72 | - | 36.84 | - | 56.00 | 46.00 | -19.16 | - |
| 3 | 1.281 | 0.20 | 37.17 | - | 37.37 | - | 56.00 | 46.00 | -18.63 | - |
| 4 | 1.590 | 0.20 | 39.95 | - | 40.15 | - | 56.00 | 46.00 | -15.85 | - |
| 5 | 5.012 | 0.22 | 31.11 | - | 31.33 | - | 60.00 | 50.00 | -28.67 | - |
| 6 | 6.203 | 0.24 | 34.39 | - | 34.63 | - | 60.00 | 50.00 | -25.37 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

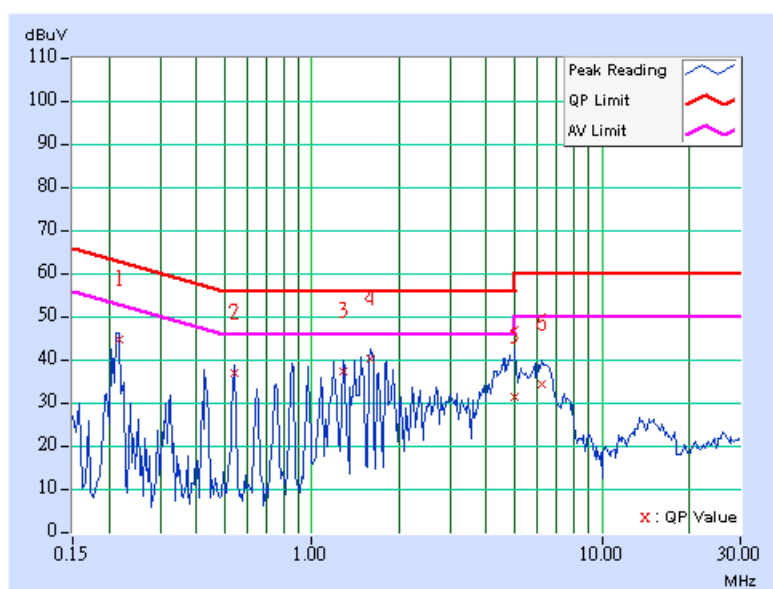

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | A | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.216 | 0.10 | 43.74 | - | 43.84 | - | 62.96 | 52.96 | -19.12 | - |
| 2 | 0.534 | 0.12 | 36.60 | - | 36.72 | - | 56.00 | 46.00 | -19.28 | - |
| 3 | 1.466 | 0.20 | 40.63 | - | 40.83 | - | 56.00 | 46.00 | -15.17 | - |
| 4 | 1.594 | 0.20 | 41.53 | - | 41.73 | - | 56.00 | 46.00 | -14.27 | - |
| 5 | 4.984 | 0.23 | 39.14 | - | 39.37 | - | 56.00 | 46.00 | -16.63 | - |
| 6 | 6.324 | 0.28 | 35.67 | - | 35.95 | - | 60.00 | 50.00 | -24.05 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

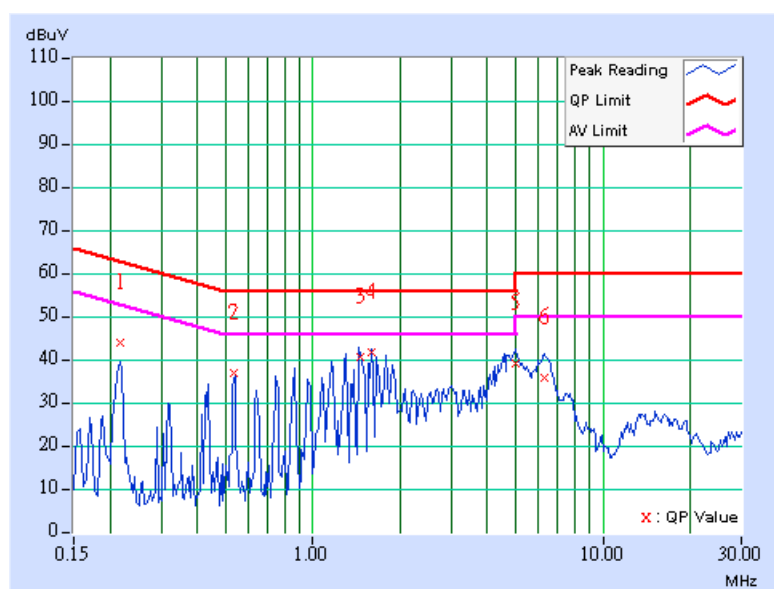

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | B | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.209 | 0.10 | 45.38 | - | 45.48 | - | 63.24 | 53.24 | -17.76 | - |
| 2 | 0.427 | 0.10 | 39.98 | - | 40.08 | - | 57.31 | 47.31 | -17.22 | - |
| 3 | 0.874 | 0.18 | 38.29 | - | 38.47 | - | 56.00 | 46.00 | -17.53 | - |
| 4 | 1.195 | 0.20 | 38.81 | - | 39.01 | - | 56.00 | 46.00 | -16.99 | - |
| 5 | 1.517 | 0.20 | 37.38 | - | 37.58 | - | 56.00 | 46.00 | -18.42 | - |
| 6 | 2.621 | 0.20 | 35.42 | - | 35.62 | - | 56.00 | 46.00 | -20.38 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

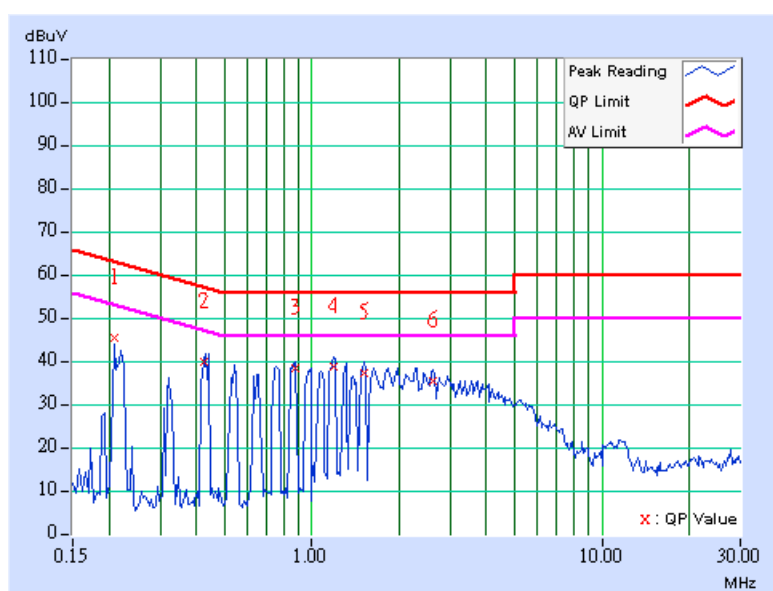

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | B | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.210 | 0.10 | 45.34 | - | 45.44 | - | 63.20 | 53.20 | -17.76 | - |
| 2 | 0.440 | 0.11 | 37.13 | - | 37.24 | - | 57.07 | 47.07 | -19.83 | - |
| 3 | 0.871 | 0.18 | 35.95 | - | 36.13 | - | 56.00 | 46.00 | -19.87 | - |
| 4 | 1.190 | 0.20 | 36.92 | - | 37.12 | - | 56.00 | 46.00 | -18.88 | - |
| 5 | 1.505 | 0.20 | 35.64 | - | 35.84 | - | 56.00 | 46.00 | -20.16 | - |
| 6 | 2.923 | 0.20 | 31.85 | - | 32.05 | - | 56.00 | 46.00 | -23.95 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

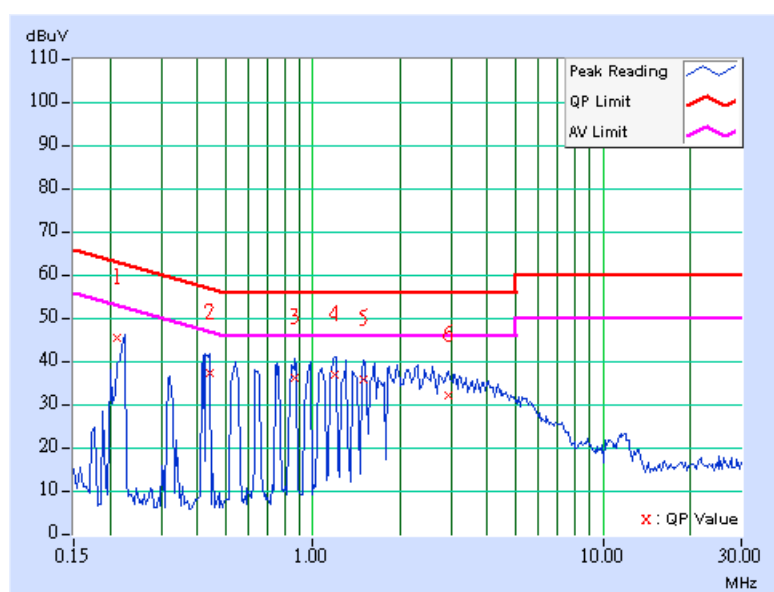

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | B | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.220 | 0.10 | 45.05 | - | 45.15 | - | 62.81 | 52.81 | -17.66 | - |
| 2 | 0.432 | 0.11 | 40.46 | - | 40.57 | - | 57.22 | 47.22 | -16.66 | - |
| 3 | 0.757 | 0.16 | 37.61 | - | 37.77 | - | 56.00 | 46.00 | -18.23 | - |
| 4 | 1.199 | 0.20 | 38.87 | - | 39.07 | - | 56.00 | 46.00 | -16.93 | - |
| 5 | 1.519 | 0.20 | 37.42 | - | 37.62 | - | 56.00 | 46.00 | -18.38 | - |
| 6 | 2.290 | 0.20 | 36.08 | - | 36.28 | - | 56.00 | 46.00 | -19.72 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

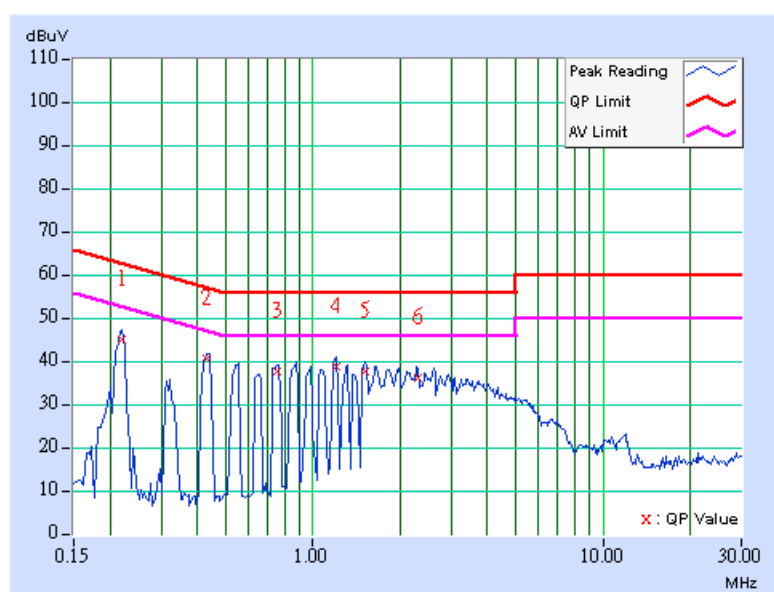

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | B | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.210 | 0.10 | 44.26 | - | 44.36 | - | 63.19 | 53.19 | -18.83 | - |
| 2 | 0.428 | 0.10 | 37.06 | - | 37.16 | - | 57.30 | 47.30 | -20.13 | - |
| 3 | 0.872 | 0.18 | 36.05 | - | 36.23 | - | 56.00 | 46.00 | -19.77 | - |
| 4 | 1.204 | 0.20 | 36.65 | - | 36.85 | - | 56.00 | 46.00 | -19.15 | - |
| 5 | 1.520 | 0.20 | 35.71 | - | 35.91 | - | 56.00 | 46.00 | -20.09 | - |
| 6 | 2.603 | 0.20 | 33.21 | - | 33.41 | - | 56.00 | 46.00 | -22.59 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

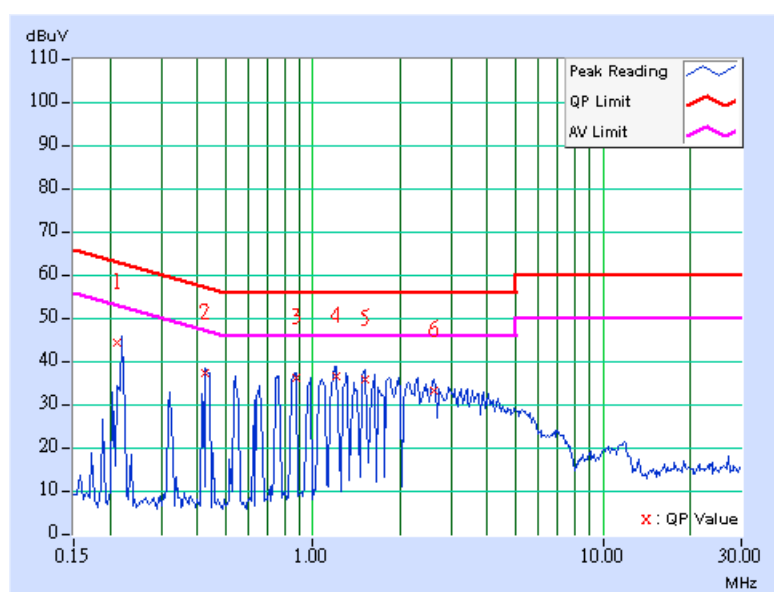

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | B | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.218 | 0.10 | 45.15 | - | 45.25 | - | 62.89 | 52.89 | -17.64 | - |
| 2 | 0.425 | 0.10 | 40.06 | - | 40.16 | - | 57.35 | 47.35 | -17.18 | - |
| 3 | 0.867 | 0.18 | 38.21 | - | 38.39 | - | 56.00 | 46.00 | -17.61 | - |
| 4 | 1.195 | 0.20 | 38.87 | - | 39.07 | - | 56.00 | 46.00 | -16.93 | - |
| 5 | 1.516 | 0.20 | 37.48 | - | 37.68 | - | 56.00 | 46.00 | -18.32 | - |
| 6 | 2.613 | 0.20 | 35.51 | - | 35.71 | - | 56.00 | 46.00 | -20.29 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

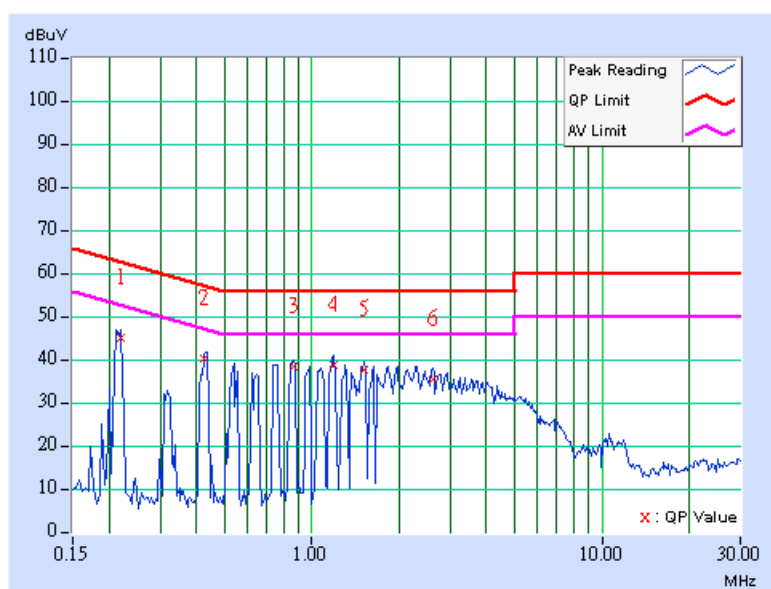

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | B | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.209 | 0.10 | 42.63 | - | 42.73 | - | 63.26 | 53.26 | -20.53 | - |
| 2 | 0.432 | 0.11 | 37.58 | - | 37.69 | - | 57.22 | 47.22 | -19.53 | - |
| 3 | 0.751 | 0.16 | 34.95 | - | 35.11 | - | 56.00 | 46.00 | -20.89 | - |
| 4 | 1.184 | 0.20 | 36.94 | - | 37.14 | - | 56.00 | 46.00 | -18.86 | - |
| 5 | 1.645 | 0.20 | 34.69 | - | 34.89 | - | 56.00 | 46.00 | -21.11 | - |
| 6 | 2.610 | 0.20 | 34.16 | - | 34.36 | - | 56.00 | 46.00 | -21.64 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

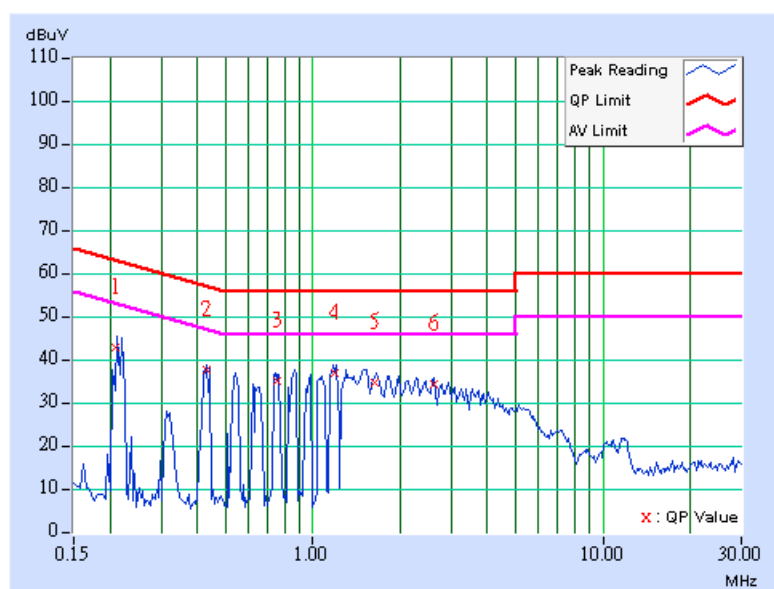

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg. C, 66%RH, 991hPa |
| TEST MODE | C | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.166 | 0.11 | 49.04 | - | 49.15 | - | 65.18 | 55.18 | -16.03 | - |
| 2 | 0.201 | 0.11 | 42.91 | - | 43.02 | - | 63.58 | 53.58 | -20.56 | - |
| 3 | 0.533 | 0.14 | 40.72 | - | 40.86 | - | 56.00 | 46.00 | -15.14 | - |
| 4 | 1.723 | 0.25 | 36.80 | - | 37.05 | - | 56.00 | 46.00 | -18.95 | - |
| 5 | 8.199 | 0.49 | 35.91 | - | 36.40 | - | 60.00 | 50.00 | -23.60 | - |
| 6 | 12.242 | 0.54 | 34.77 | - | 35.31 | - | 60.00 | 50.00 | -24.69 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

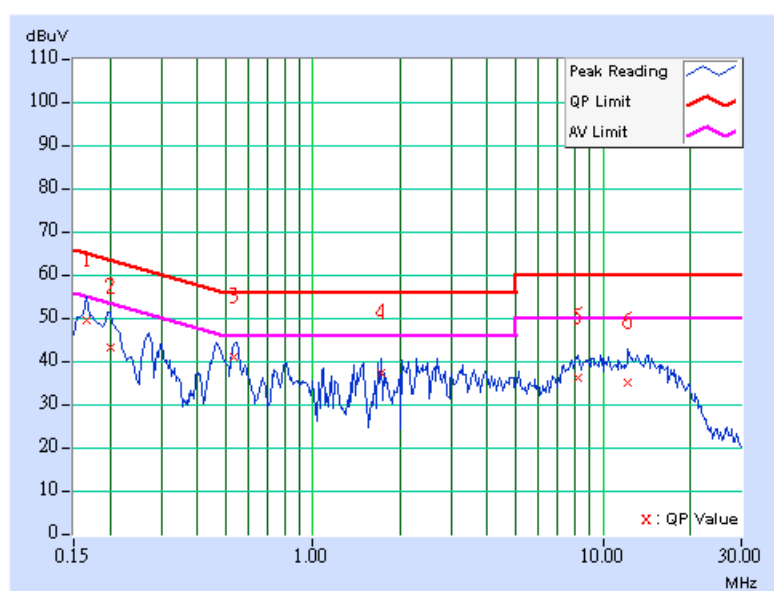

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg. C, 66%RH, 991hPa |
| TEST MODE | C | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.166 | 0.11 | 48.19 | - | 48.30 | - | 65.18 | 55.18 | -16.88 | - |
| 2 | 0.271 | 0.11 | 40.92 | - | 41.03 | - | 61.08 | 51.08 | -20.05 | - |
| 3 | 0.545 | 0.14 | 39.40 | - | 39.54 | - | 56.00 | 46.00 | -16.46 | - |
| 4 | 1.785 | 0.26 | 34.73 | - | 34.99 | - | 56.00 | 46.00 | -21.01 | - |
| 5 | 8.512 | 0.43 | 33.69 | - | 34.12 | - | 60.00 | 50.00 | -25.88 | - |
| 6 | 12.551 | 0.45 | 31.66 | - | 32.11 | - | 60.00 | 50.00 | -27.89 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

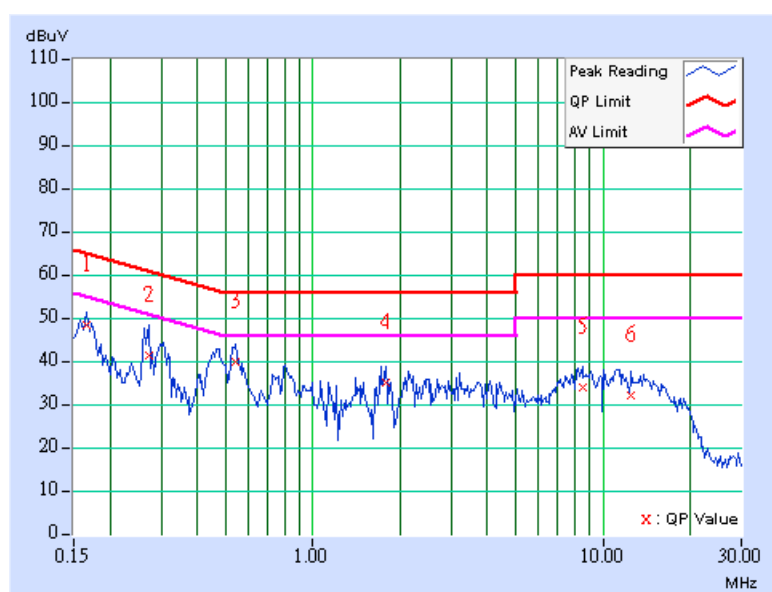

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg. C, 66%RH, 991hPa |
| TEST MODE | C | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.166 | 0.11 | 49.34 | - | 49.45 | - | 65.18 | 55.18 | -15.73 | - |
| 2 | 0.263 | 0.11 | 39.88 | - | 39.99 | - | 61.33 | 51.33 | -21.34 | - |
| 3 | 0.533 | 0.14 | 41.06 | - | 41.20 | - | 56.00 | 46.00 | -14.80 | - |
| 4 | 1.969 | 0.26 | 32.55 | - | 32.81 | - | 56.00 | 46.00 | -23.19 | - |
| 5 | 8.809 | 0.51 | 35.97 | - | 36.48 | - | 60.00 | 50.00 | -23.52 | - |
| 6 | 11.184 | 0.54 | 34.32 | - | 34.86 | - | 60.00 | 50.00 | -25.14 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

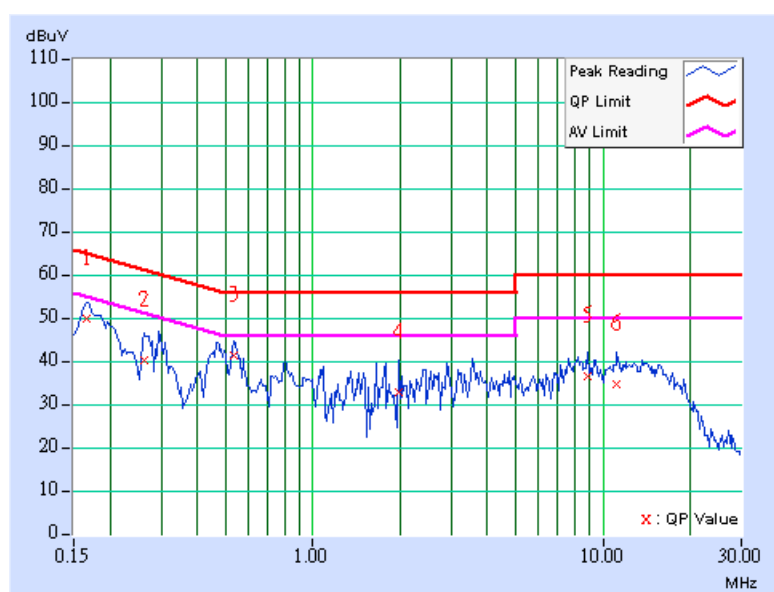

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg. C, 66%RH, 991hPa |
| TEST MODE | C | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.162 | 0.11 | 47.91 | - | 48.02 | - | 65.38 | 55.38 | -17.36 | - |
| 2 | 0.295 | 0.11 | 37.03 | - | 37.14 | - | 60.40 | 50.40 | -23.26 | - |
| 3 | 0.533 | 0.14 | 39.95 | - | 40.09 | - | 56.00 | 46.00 | -15.91 | - |
| 4 | 2.074 | 0.26 | 33.71 | - | 33.97 | - | 56.00 | 46.00 | -22.03 | - |
| 5 | 7.660 | 0.42 | 33.34 | - | 33.76 | - | 60.00 | 50.00 | -26.24 | - |
| 6 | 13.906 | 0.45 | 31.44 | - | 31.89 | - | 60.00 | 50.00 | -28.11 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

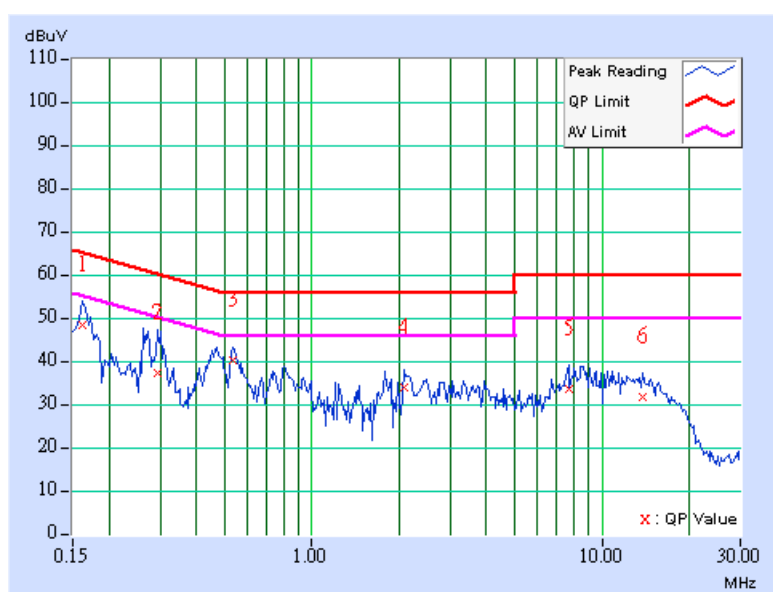

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg. C, 66%RH, 991hPa |
| TEST MODE | C | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.166 | 0.11 | 49.54 | - | 49.65 | - | 65.18 | 55.18 | -15.53 | - |
| 2 | 0.267 | 0.11 | 40.38 | - | 40.49 | - | 61.20 | 51.20 | -20.71 | - |
| 3 | 0.545 | 0.14 | 40.04 | - | 40.18 | - | 56.00 | 46.00 | -15.82 | - |
| 4 | 1.730 | 0.25 | 36.88 | - | 37.13 | - | 56.00 | 46.00 | -18.87 | - |
| 5 | 8.195 | 0.49 | 35.69 | - | 36.18 | - | 60.00 | 50.00 | -23.82 | - |
| 6 | 11.398 | 0.54 | 34.33 | - | 34.87 | - | 60.00 | 50.00 | -25.13 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

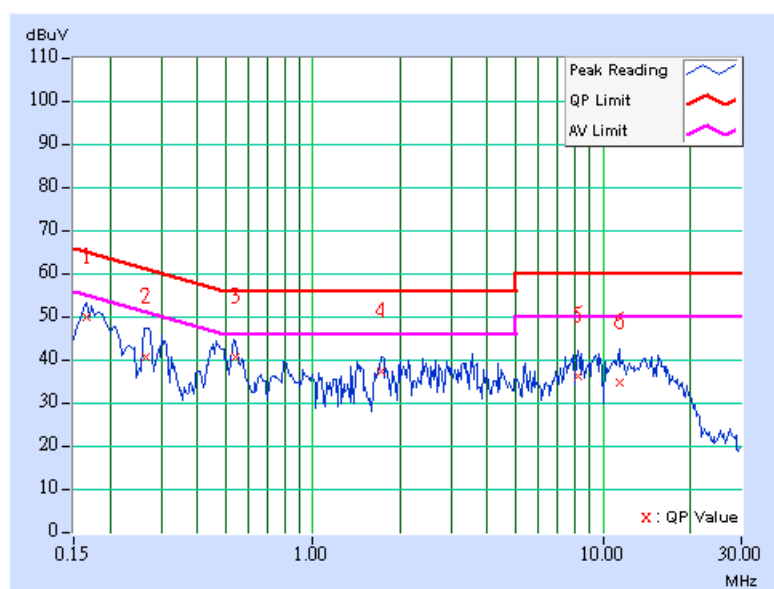

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg. C, 66%RH, 991hPa |
| TEST MODE | C | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.162 | 0.11 | 47.89 | - | 48.00 | - | 65.38 | 55.38 | -17.38 | - |
| 2 | 0.267 | 0.11 | 40.26 | - | 40.37 | - | 61.20 | 51.20 | -20.83 | - |
| 3 | 0.537 | 0.14 | 39.90 | - | 40.04 | - | 56.00 | 46.00 | -15.96 | - |
| 4 | 1.777 | 0.26 | 34.15 | - | 34.41 | - | 56.00 | 46.00 | -21.59 | - |
| 5 | 8.688 | 0.43 | 33.93 | - | 34.36 | - | 60.00 | 50.00 | -25.64 | - |
| 6 | 13.520 | 0.45 | 31.38 | - | 31.83 | - | 60.00 | 50.00 | -28.17 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

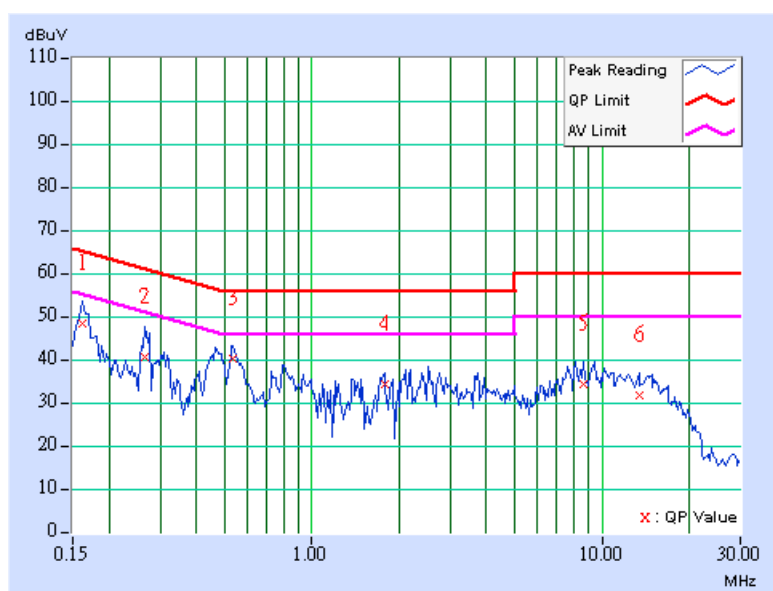

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | D | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.423 | 0.12 | 37.55 | - | 37.67 | - | 57.38 | 47.38 | -19.71 | - |
| 2 | 0.560 | 0.15 | 36.43 | - | 36.58 | - | 56.00 | 46.00 | -19.42 | - |
| 3 | 1.266 | 0.24 | 38.35 | - | 38.59 | - | 56.00 | 46.00 | -17.41 | - |
| 4 | 1.543 | 0.24 | 36.38 | - | 36.62 | - | 56.00 | 46.00 | -19.38 | - |
| 5 | 4.090 | 0.29 | 34.77 | - | 35.06 | - | 56.00 | 46.00 | -20.94 | - |
| 6 | 12.258 | 0.49 | 35.29 | - | 35.78 | - | 60.00 | 50.00 | -24.22 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

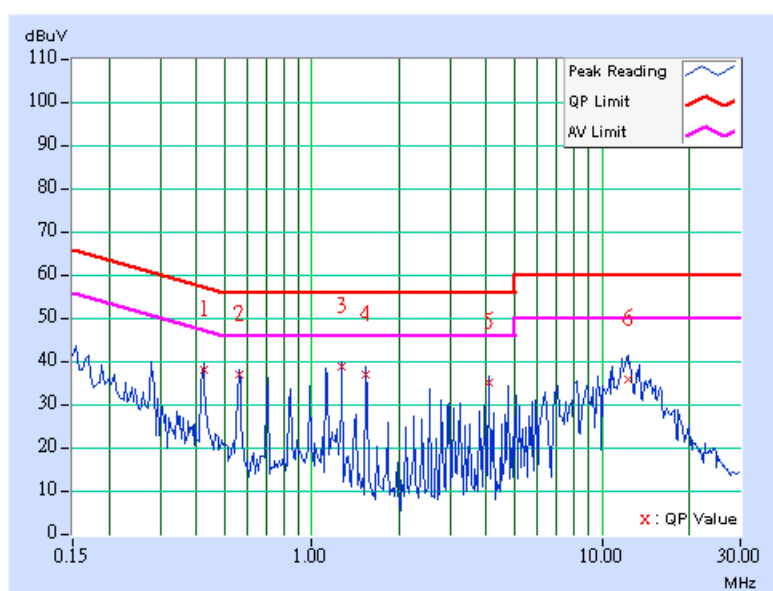

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | D | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.560 | 0.15 | 32.62 | - | 32.77 | - | 56.00 | 46.00 | -23.23 | - |
| 2 | 1.120 | 0.23 | 29.83 | - | 30.06 | - | 56.00 | 46.00 | -25.94 | - |
| 3 | 1.544 | 0.24 | 33.69 | - | 33.93 | - | 56.00 | 46.00 | -22.07 | - |
| 4 | 3.089 | 0.27 | 32.03 | - | 32.30 | - | 56.00 | 46.00 | -23.70 | - |
| 5 | 9.265 | 0.51 | 31.79 | - | 32.30 | - | 60.00 | 50.00 | -27.70 | - |
| 6 | 12.125 | 0.59 | 40.36 | - | 40.95 | - | 60.00 | 50.00 | -19.05 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

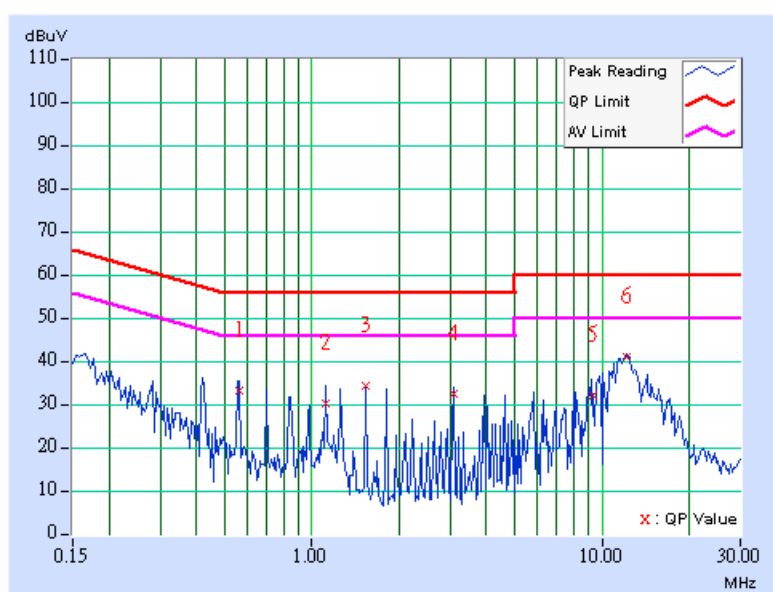

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | D | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.420 | 0.12 | 37.98 | - | 38.10 | - | 57.46 | 47.46 | -19.35 | - |
| 2 | 0.560 | 0.15 | 35.77 | - | 35.92 | - | 56.00 | 46.00 | -20.08 | - |
| 3 | 1.258 | 0.24 | 37.29 | - | 37.53 | - | 56.00 | 46.00 | -18.47 | - |
| 4 | 1.406 | 0.24 | 35.03 | - | 35.27 | - | 56.00 | 46.00 | -20.73 | - |
| 5 | 4.059 | 0.29 | 33.82 | - | 34.11 | - | 56.00 | 46.00 | -21.89 | - |
| 6 | 12.504 | 0.50 | 38.74 | - | 39.24 | - | 60.00 | 50.00 | -20.76 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

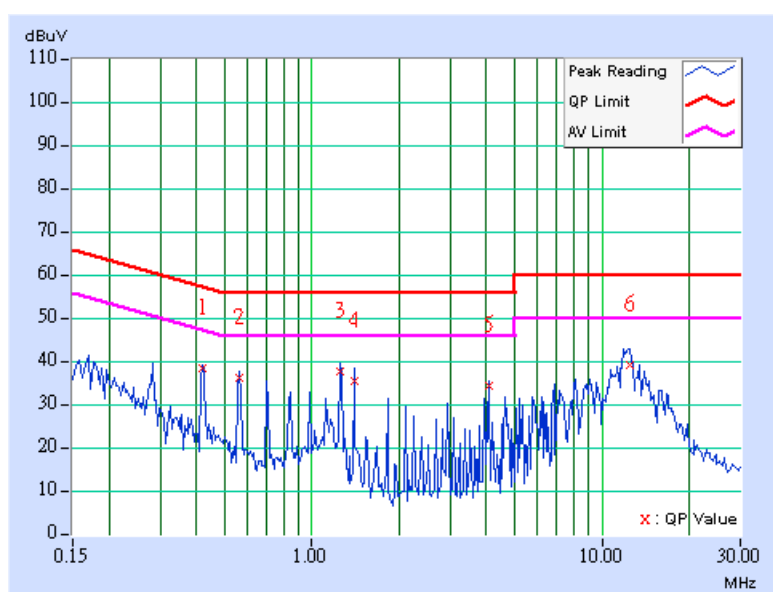

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | D | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.564 | 0.15 | 32.96 | - | 33.11 | - | 56.00 | 46.00 | -22.89 | - |
| 2 | 1.117 | 0.23 | 33.46 | - | 33.69 | - | 56.00 | 46.00 | -22.31 | - |
| 3 | 1.539 | 0.24 | 33.72 | - | 33.96 | - | 56.00 | 46.00 | -22.04 | - |
| 4 | 2.383 | 0.26 | 32.33 | - | 32.59 | - | 56.00 | 46.00 | -23.41 | - |
| 5 | 4.203 | 0.30 | 31.75 | - | 32.05 | - | 56.00 | 46.00 | -23.95 | - |
| 6 | 12.449 | 0.59 | 37.95 | - | 38.54 | - | 60.00 | 50.00 | -21.46 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

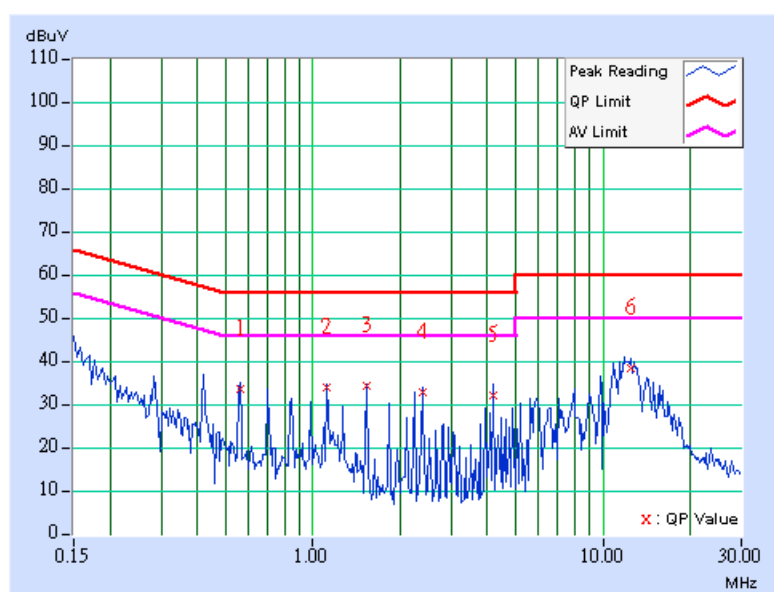

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | D | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.556 | 0.15 | 35.65 | - | 35.80 | - | 56.00 | 46.00 | -20.20 | - |
| 2 | 1.258 | 0.24 | 38.99 | - | 39.23 | - | 56.00 | 46.00 | -16.77 | - |
| 3 | 2.246 | 0.25 | 31.89 | - | 32.14 | - | 56.00 | 46.00 | -23.86 | - |
| 4 | 3.926 | 0.29 | 33.10 | - | 33.39 | - | 56.00 | 46.00 | -22.61 | - |
| 5 | 4.617 | 0.31 | 31.51 | - | 31.82 | - | 56.00 | 46.00 | -24.18 | - |
| 6 | 12.199 | 0.49 | 39.64 | - | 40.13 | - | 60.00 | 50.00 | -19.87 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

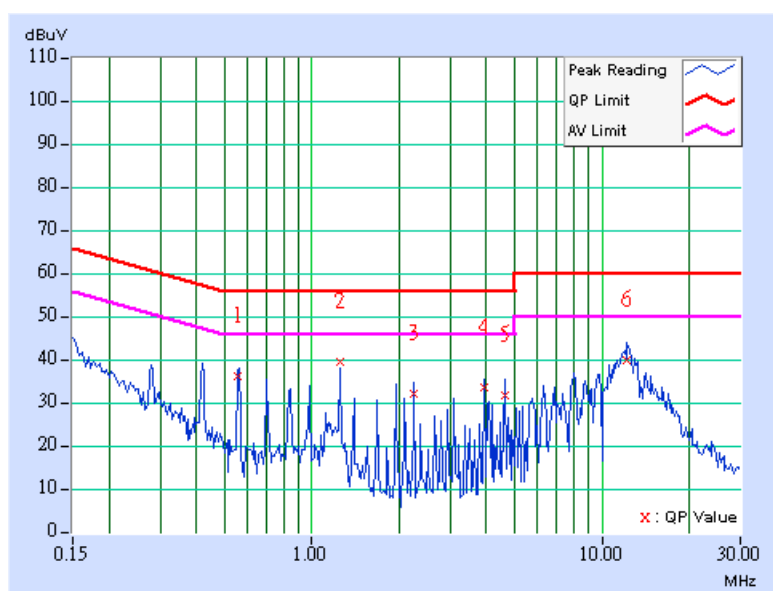

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | D | TESTED BY | Long Chen |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.556 | 0.15 | 35.06 | - | 35.21 | - | 56.00 | 46.00 | -20.79 | - |
| 2 | 1.266 | 0.24 | 37.36 | - | 37.60 | - | 56.00 | 46.00 | -18.40 | - |
| 3 | 1.961 | 0.25 | 30.96 | - | 31.21 | - | 56.00 | 46.00 | -24.79 | - |
| 4 | 4.055 | 0.29 | 33.90 | - | 34.19 | - | 56.00 | 46.00 | -21.81 | - |
| 5 | 7.988 | 0.46 | 32.84 | - | 33.30 | - | 60.00 | 50.00 | -26.70 | - |
| 6 | 12.215 | 0.59 | 38.02 | - | 38.61 | - | 60.00 | 50.00 | -21.39 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

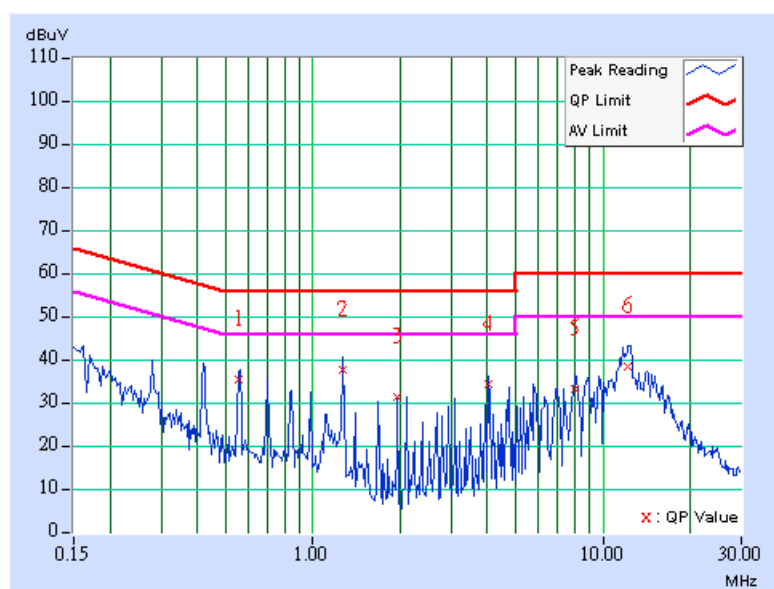

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 28deg. C, 70%RH, 991hPa |
| TEST MODE | E | TESTED BY | Tony Lee |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.209 | 0.11 | 43.27 | - | 43.38 | - | 63.26 | 53.26 | -19.88 | - |
| 2 | 0.416 | 0.12 | 36.70 | - | 36.82 | - | 57.54 | 47.54 | -20.71 | - |
| 3 | 0.740 | 0.18 | 35.05 | - | 35.23 | - | 56.00 | 46.00 | -20.77 | - |
| 4 | 0.853 | 0.20 | 34.25 | - | 34.45 | - | 56.00 | 46.00 | -21.55 | - |
| 5 | 13.520 | 0.52 | 21.46 | - | 21.98 | - | 60.00 | 50.00 | -38.02 | - |
| 6 | 14.820 | 0.55 | 20.78 | - | 21.33 | - | 60.00 | 50.00 | -38.67 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

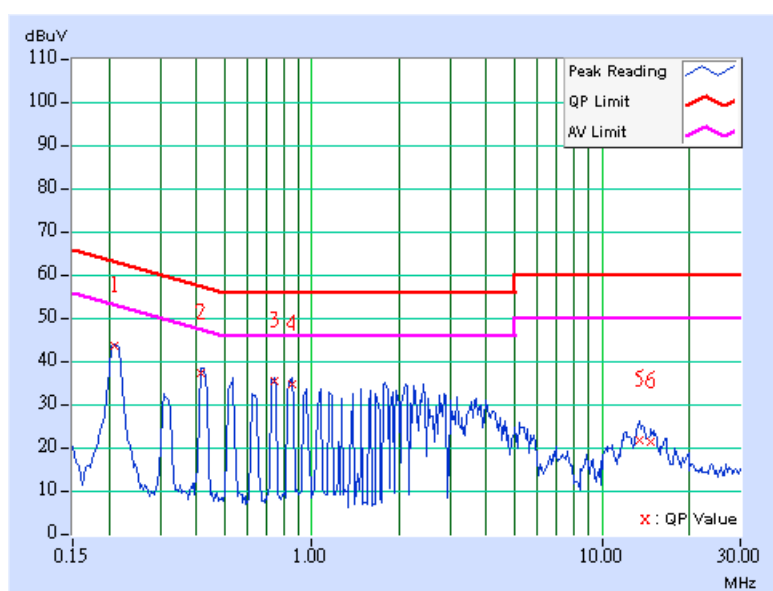

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 28deg. C, 70%RH, 991hPa |
| TEST MODE | E | TESTED BY | Tony Lee |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.209 | 0.11 | 43.27 | - | 43.38 | - | 63.26 | 53.26 | -19.88 | - |
| 2 | 0.423 | 0.12 | 36.95 | - | 37.07 | - | 57.38 | 47.38 | -20.31 | - |
| 3 | 0.537 | 0.15 | 35.77 | - | 35.92 | - | 56.00 | 46.00 | -20.08 | - |
| 4 | 0.853 | 0.20 | 34.21 | - | 34.41 | - | 56.00 | 46.00 | -21.59 | - |
| 5 | 11.938 | 0.58 | 18.03 | - | 18.61 | - | 60.00 | 50.00 | -41.39 | - |
| 6 | 13.520 | 0.62 | 22.01 | - | 22.63 | - | 60.00 | 50.00 | -37.37 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

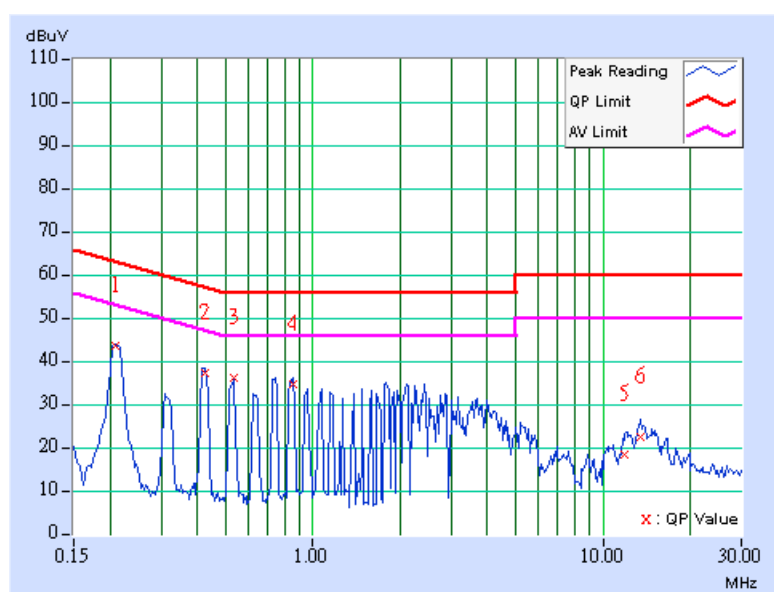

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 28deg. C, 70%RH, 991hPa |
| TEST MODE | E | TESTED BY | Tony Lee |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|-------------------------------|-----|--------------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.209 | 0.11 | 43.27 | - | 43.38 | - | 63.26 | 53.26 | -19.88 | - |
| 2 | 0.423 | 0.12 | 36.95 | - | 37.07 | - | 57.38 | 47.38 | -20.31 | - |
| 3 | 0.724 | 0.18 | 34.65 | - | 34.83 | - | 56.00 | 46.00 | -21.17 | - |
| 4 | 0.853 | 0.20 | 34.25 | - | 34.45 | - | 56.00 | 46.00 | -21.55 | - |
| 5 | 13.520 | 0.52 | 21.46 | - | 21.98 | - | 60.00 | 50.00 | -38.02 | - |
| 6 | 15.121 | 0.56 | 20.94 | - | 21.50 | - | 60.00 | 50.00 | -38.50 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

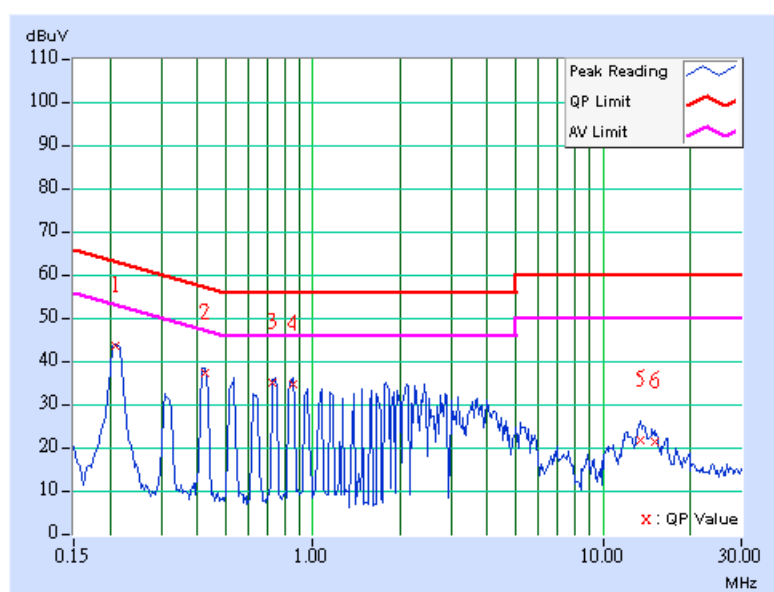

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 28deg. C, 70%RH, 991hPa |
| TEST MODE | E | TESTED BY | Tony Lee |

| NO | FREQ. [MHz] | CORR. FACTOR (dB) | READING VALUE [dB (uV)] | | EMISSION LEVEL [dB (uV)] | | LIMIT [dB (uV)] | | MARGIN (dB) | |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.209 | 0.11 | 43.27 | - | 43.38 | - | 63.26 | 53.26 | -19.88 | - |
| 2 | 0.416 | 0.12 | 36.82 | - | 36.94 | - | 57.54 | 47.54 | -20.59 | - |
| 3 | 0.724 | 0.18 | 34.57 | - | 34.75 | - | 56.00 | 46.00 | -21.25 | - |
| 4 | 0.853 | 0.20 | 34.29 | - | 34.49 | - | 56.00 | 46.00 | -21.51 | - |
| 5 | 12.098 | 0.59 | 18.69 | - | 19.28 | - | 60.00 | 50.00 | -40.72 | - |
| 6 | 13.520 | 0.62 | 21.26 | - | 21.88 | - | 60.00 | 50.00 | -38.12 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

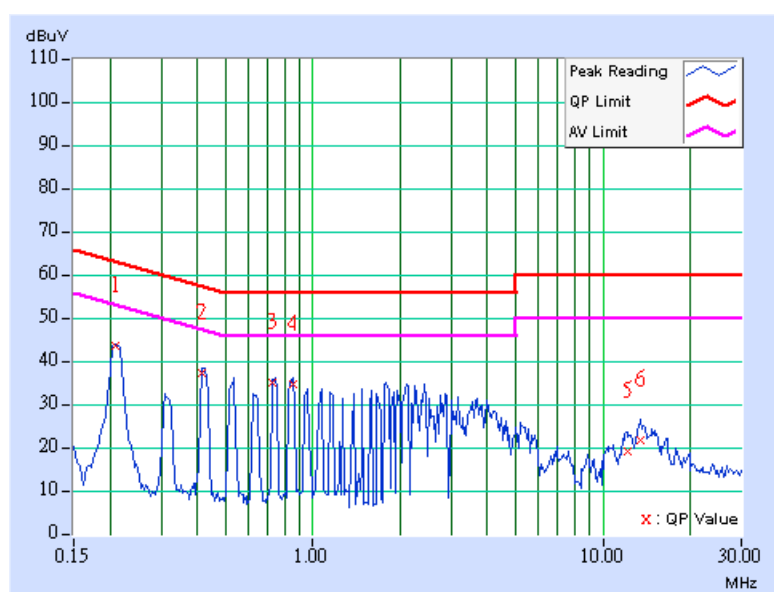

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 28deg. C, 70%RH, 991hPa |
| TEST MODE | E | TESTED BY | Tony Lee |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.209 | 0.11 | 42.43 | - | 42.54 | - | 63.26 | 53.26 | -20.72 | - |
| 2 | 0.431 | 0.13 | 36.62 | - | 36.75 | - | 57.23 | 47.23 | -20.48 | - |
| 3 | 0.744 | 0.18 | 34.50 | - | 34.68 | - | 56.00 | 46.00 | -21.32 | - |
| 4 | 0.857 | 0.20 | 34.54 | - | 34.74 | - | 56.00 | 46.00 | -21.26 | - |
| 5 | 13.602 | 0.52 | 21.70 | - | 22.22 | - | 60.00 | 50.00 | -37.78 | - |
| 6 | 15.074 | 0.56 | 21.11 | - | 21.67 | - | 60.00 | 50.00 | -38.33 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

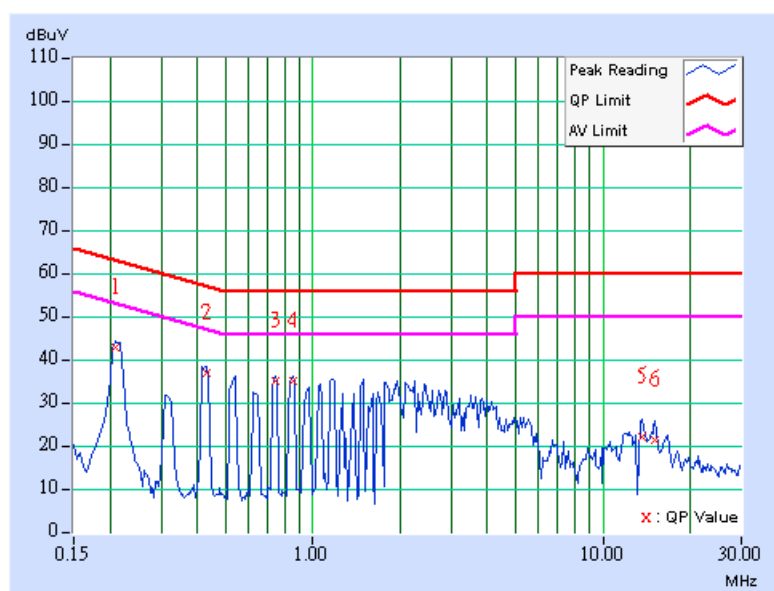

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 28deg. C, 70%RH, 991hPa |
| TEST MODE | E | TESTED BY | Tony Lee |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.216 | 0.11 | 42.96 | - | 43.07 | - | 62.96 | 52.96 | -19.88 | - |
| 2 | 0.416 | 0.12 | 36.62 | - | 36.74 | - | 57.54 | 47.54 | -20.79 | - |
| 3 | 0.732 | 0.18 | 34.55 | - | 34.73 | - | 56.00 | 46.00 | -21.27 | - |
| 4 | 0.853 | 0.20 | 34.13 | - | 34.33 | - | 56.00 | 46.00 | -21.67 | - |
| 5 | 13.520 | 0.62 | 21.40 | - | 22.02 | - | 60.00 | 50.00 | -37.98 | - |
| 6 | 15.121 | 0.66 | 21.00 | - | 21.66 | - | 60.00 | 50.00 | -38.34 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

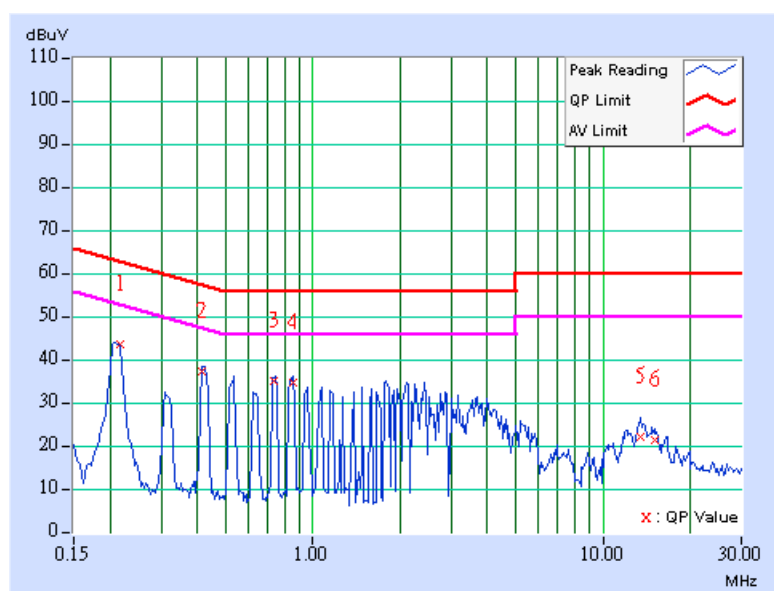

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | F | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.248 | 0.11 | 35.86 | - | 35.97 | - | 61.84 | 51.84 | -25.86 | - |
| 2 | 0.525 | 0.14 | 37.84 | - | 37.98 | - | 56.00 | 46.00 | -18.02 | - |
| 3 | 1.449 | 0.24 | 32.31 | - | 32.55 | - | 56.00 | 46.00 | -23.45 | - |
| 4 | 2.547 | 0.26 | 29.38 | - | 29.64 | - | 56.00 | 46.00 | -26.36 | - |
| 5 | 7.551 | 0.38 | 29.06 | - | 29.44 | - | 60.00 | 50.00 | -30.56 | - |
| 6 | 16.625 | 0.69 | 25.24 | - | 25.93 | - | 60.00 | 50.00 | -34.07 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

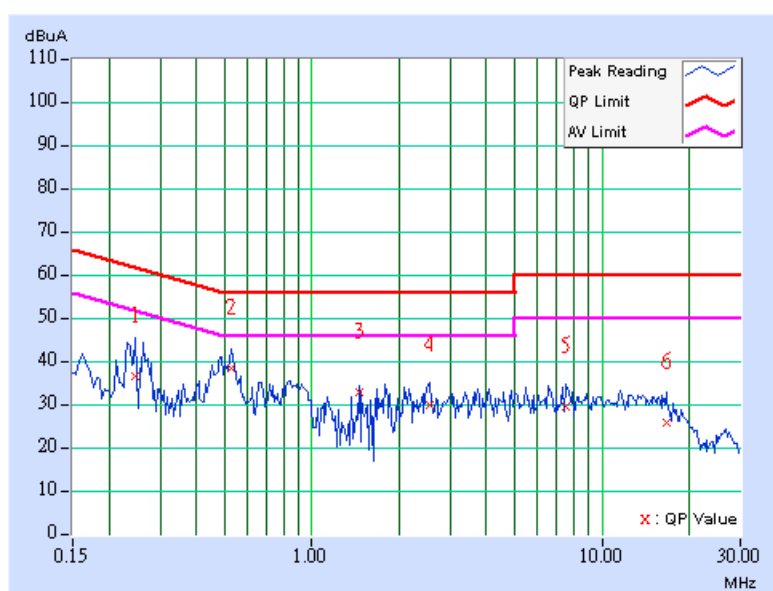

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | F | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.166 | 0.11 | 40.82 | - | 40.93 | - | 65.18 | 55.18 | -24.25 | - |
| 2 | 0.494 | 0.14 | 38.32 | - | 38.46 | - | 56.10 | 46.10 | -17.65 | - |
| 3 | 1.426 | 0.24 | 34.80 | - | 35.04 | - | 56.00 | 46.00 | -20.96 | - |
| 4 | 2.559 | 0.26 | 32.73 | - | 32.99 | - | 56.00 | 46.00 | -23.01 | - |
| 5 | 7.859 | 0.45 | 33.47 | - | 33.92 | - | 60.00 | 50.00 | -26.08 | - |
| 6 | 12.008 | 0.58 | 31.41 | - | 31.99 | - | 60.00 | 50.00 | -28.01 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

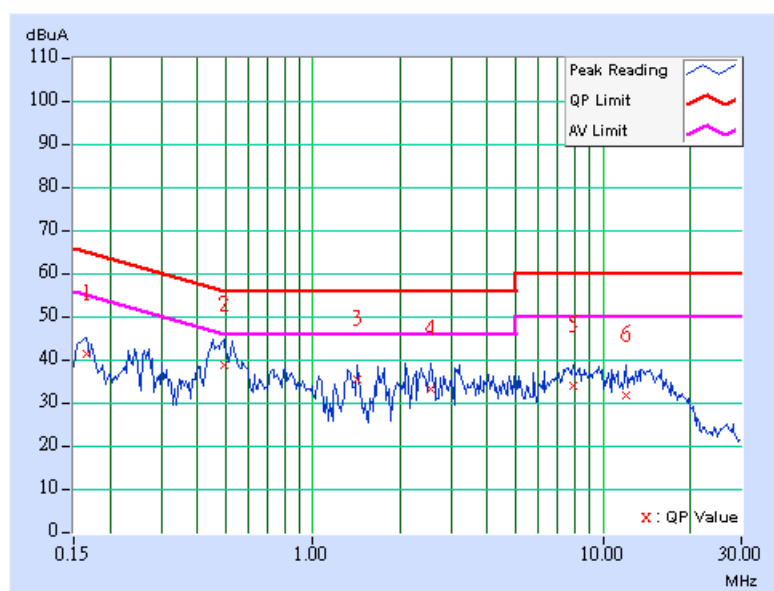

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | F | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.266 | 0.11 | 44.10 | - | 44.21 | - | 61.23 | 51.23 | -17.02 | - |
| 2 | 0.525 | 0.14 | 39.19 | - | 39.33 | - | 56.00 | 46.00 | -16.67 | - |
| 3 | 2.078 | 0.25 | 30.82 | - | 31.07 | - | 56.00 | 46.00 | -24.93 | - |
| 4 | 3.773 | 0.29 | 29.99 | - | 30.28 | - | 56.00 | 46.00 | -25.72 | - |
| 5 | 9.492 | 0.43 | 27.14 | - | 27.57 | - | 60.00 | 50.00 | -32.43 | - |
| 6 | 12.414 | 0.49 | 27.08 | - | 27.57 | - | 60.00 | 50.00 | -32.43 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

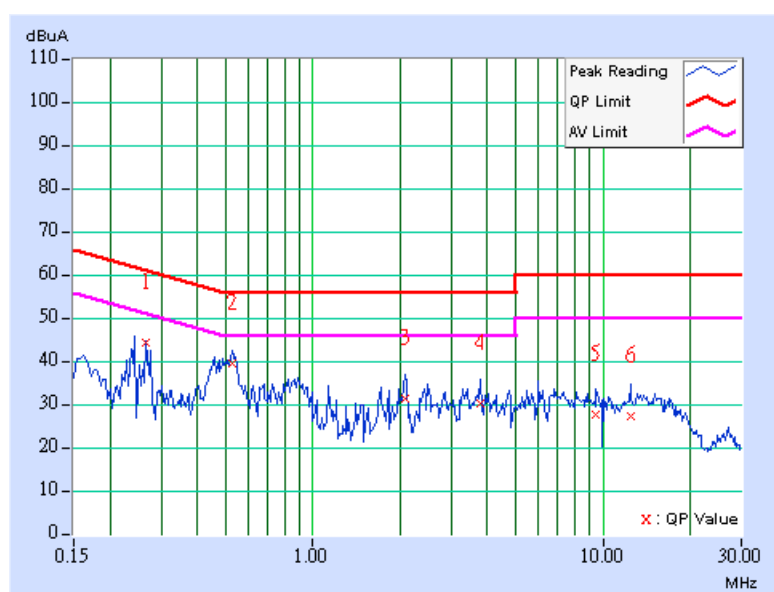

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | F | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.267 | 0.11 | 43.52 | - | 43.63 | - | 61.20 | 51.20 | -17.57 | - |
| 2 | 0.474 | 0.13 | 42.50 | - | 42.63 | - | 56.44 | 46.44 | -13.81 | - |
| 3 | 0.935 | 0.22 | 37.29 | - | 37.51 | - | 56.00 | 46.00 | -18.49 | - |
| 4 | 2.625 | 0.26 | 35.32 | - | 35.58 | - | 56.00 | 46.00 | -20.42 | - |
| 5 | 8.375 | 0.47 | 35.28 | - | 35.75 | - | 60.00 | 50.00 | -24.25 | - |
| 6 | 14.449 | 0.64 | 31.24 | - | 31.88 | - | 60.00 | 50.00 | -28.12 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

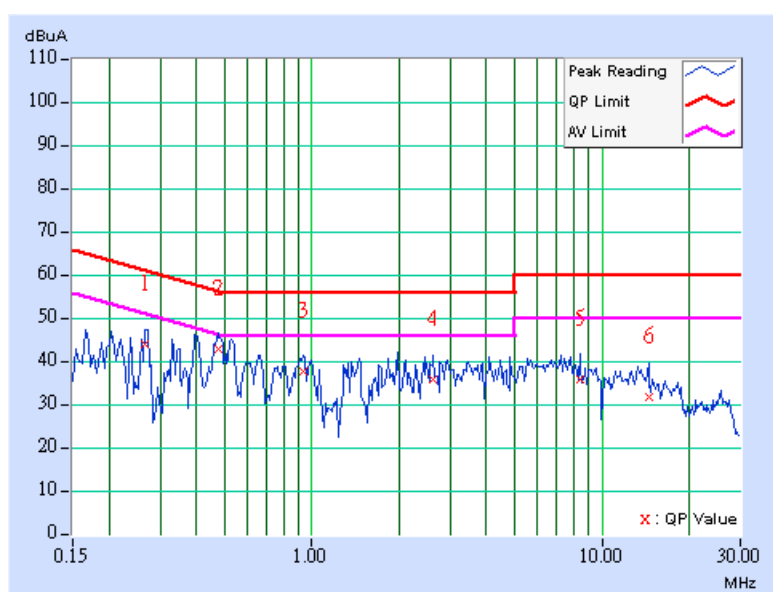

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | F | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.271 | 0.11 | 42.20 | - | 42.31 | - | 61.08 | 51.08 | -18.77 | - |
| 2 | 0.658 | 0.17 | 37.45 | - | 37.62 | - | 56.00 | 46.00 | -18.38 | - |
| 3 | 1.426 | 0.24 | 32.24 | - | 32.48 | - | 56.00 | 46.00 | -23.52 | - |
| 4 | 2.387 | 0.26 | 31.20 | - | 31.46 | - | 56.00 | 46.00 | -24.54 | - |
| 5 | 5.809 | 0.34 | 30.72 | - | 31.06 | - | 60.00 | 50.00 | -28.94 | - |
| 6 | 12.750 | 0.50 | 26.30 | - | 26.80 | - | 60.00 | 50.00 | -33.20 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

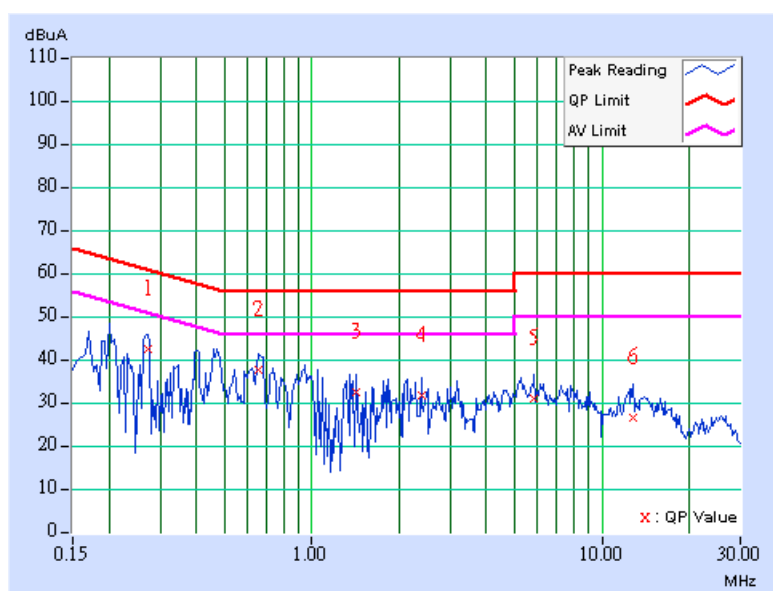

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | F | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.205 | 0.11 | 40.98 | - | 41.09 | - | 63.42 | 53.42 | -22.33 | - |
| 2 | 0.474 | 0.13 | 43.56 | - | 43.69 | - | 56.44 | 46.44 | -12.75 | - |
| 3 | 1.688 | 0.24 | 36.84 | - | 37.08 | - | 56.00 | 46.00 | -18.92 | - |
| 4 | 4.133 | 0.30 | 34.93 | - | 35.23 | - | 56.00 | 46.00 | -20.77 | - |
| 5 | 7.039 | 0.42 | 36.19 | - | 36.61 | - | 60.00 | 50.00 | -23.39 | - |
| 6 | 26.621 | 1.28 | 23.79 | - | 25.07 | - | 60.00 | 50.00 | -34.93 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

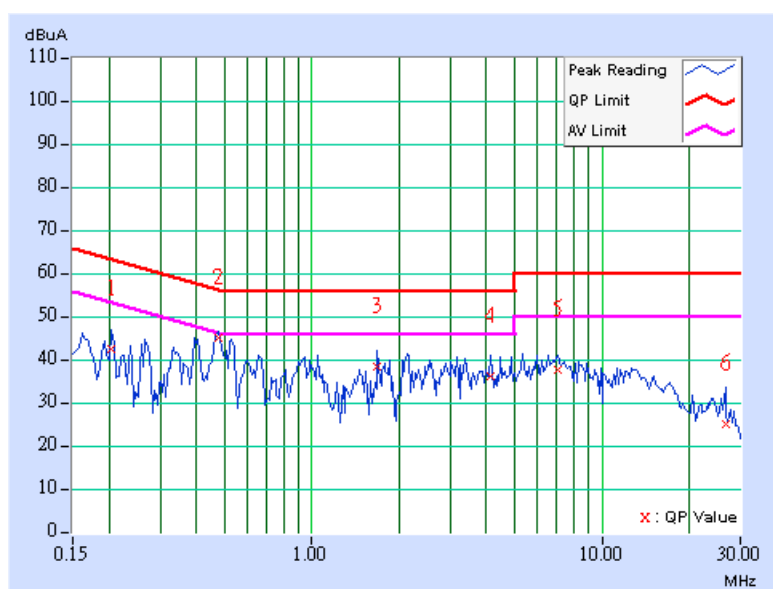

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | G | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|-------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.214 | 0.10 | 46.18 | - | 46.28 | - | 63.04 | 53.04 | -16.76 | - |
| 2 | 0.541 | 0.12 | 37.20 | - | 37.32 | - | 56.00 | 46.00 | -18.68 | - |
| 3 | 1.289 | 0.20 | 37.18 | - | 37.38 | - | 56.00 | 46.00 | -18.62 | - |
| 4 | 1.813 | 0.20 | 36.92 | - | 37.12 | - | 56.00 | 46.00 | -18.88 | - |
| 5 | 5.017 | 0.22 | 38.34 | - | 38.56 | - | 60.00 | 50.00 | -21.44 | - |
| 6 | 6.230 | 0.24 | 35.46 | - | 35.70 | - | 60.00 | 50.00 | -24.30 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

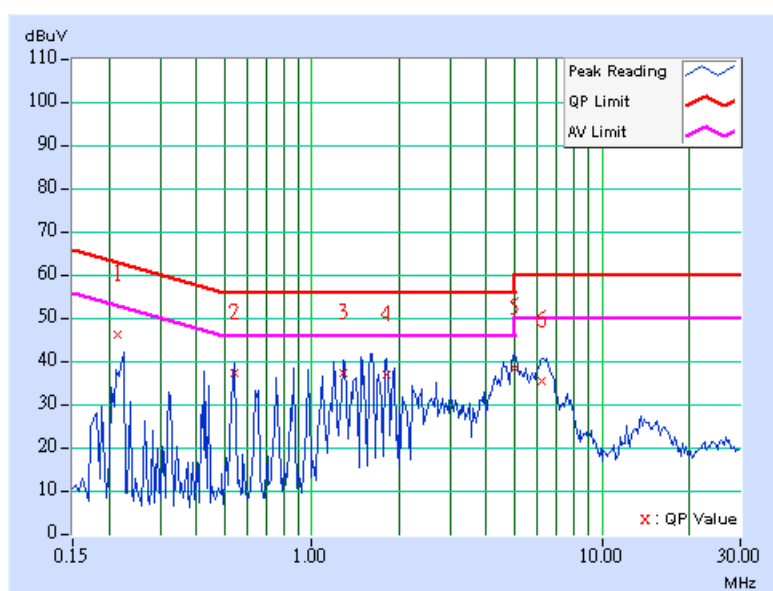

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | G | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|-------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.216 | 0.10 | 44.23 | - | 44.33 | - | 62.96 | 52.96 | -18.63 | - |
| 2 | 0.545 | 0.12 | 35.66 | - | 35.78 | - | 56.00 | 46.00 | -20.22 | - |
| 3 | 1.477 | 0.20 | 39.93 | - | 40.13 | - | 56.00 | 46.00 | -15.87 | - |
| 4 | 1.598 | 0.20 | 41.41 | - | 41.61 | - | 56.00 | 46.00 | -14.39 | - |
| 5 | 4.887 | 0.23 | 35.15 | - | 35.38 | - | 56.00 | 46.00 | -20.62 | - |
| 6 | 6.238 | 0.27 | 34.03 | - | 34.30 | - | 60.00 | 50.00 | -25.70 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

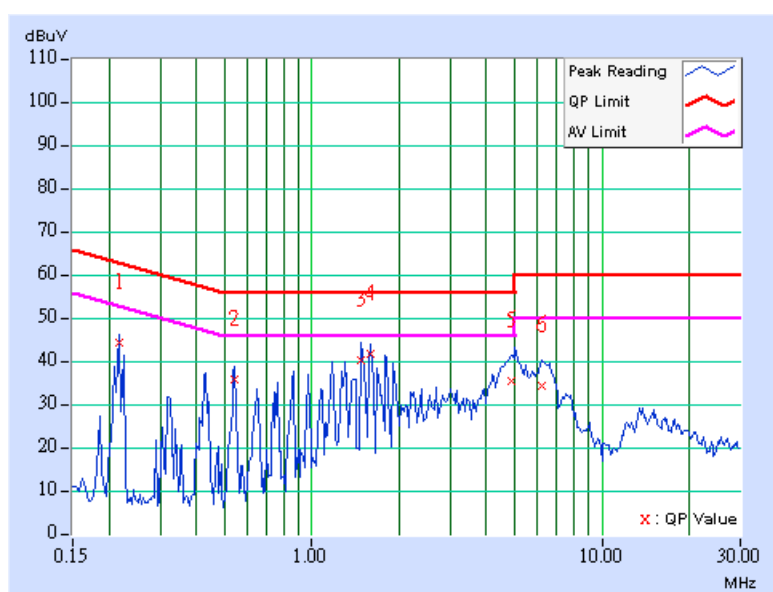

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | G | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|-------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.220 | 0.10 | 44.63 | - | 44.73 | - | 62.81 | 52.81 | -18.08 | - |
| 2 | 0.545 | 0.12 | 37.44 | - | 37.56 | - | 56.00 | 46.00 | -18.44 | - |
| 3 | 0.869 | 0.18 | 37.32 | - | 37.50 | - | 56.00 | 46.00 | -18.50 | - |
| 4 | 1.486 | 0.20 | 38.49 | - | 38.69 | - | 56.00 | 46.00 | -17.31 | - |
| 5 | 4.887 | 0.21 | 32.90 | - | 33.11 | - | 56.00 | 46.00 | -22.89 | - |
| 6 | 6.223 | 0.24 | 35.17 | - | 35.41 | - | 60.00 | 50.00 | -24.59 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

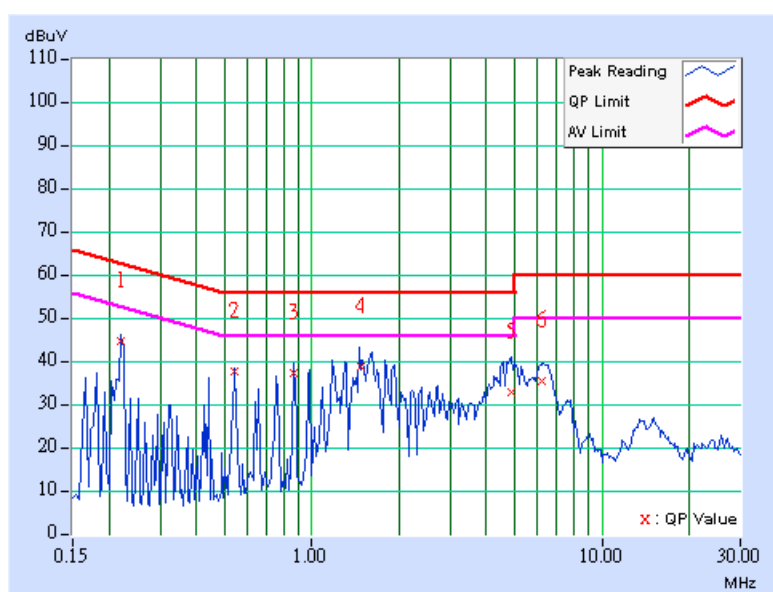

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | G | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|-------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.220 | 0.10 | 44.07 | - | 44.17 | - | 62.81 | 52.81 | -18.64 | - |
| 2 | 0.541 | 0.12 | 37.37 | - | 37.49 | - | 56.00 | 46.00 | -18.51 | - |
| 3 | 1.609 | 0.20 | 42.06 | - | 42.26 | - | 56.00 | 46.00 | -13.74 | - |
| 4 | 1.781 | 0.20 | 11.62 | - | 11.82 | - | 56.00 | 46.00 | -44.18 | - |
| 5 | 4.879 | 0.23 | 33.91 | - | 34.14 | - | 56.00 | 46.00 | -21.86 | - |
| 6 | 6.379 | 0.28 | 36.62 | - | 36.90 | - | 60.00 | 50.00 | -23.10 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

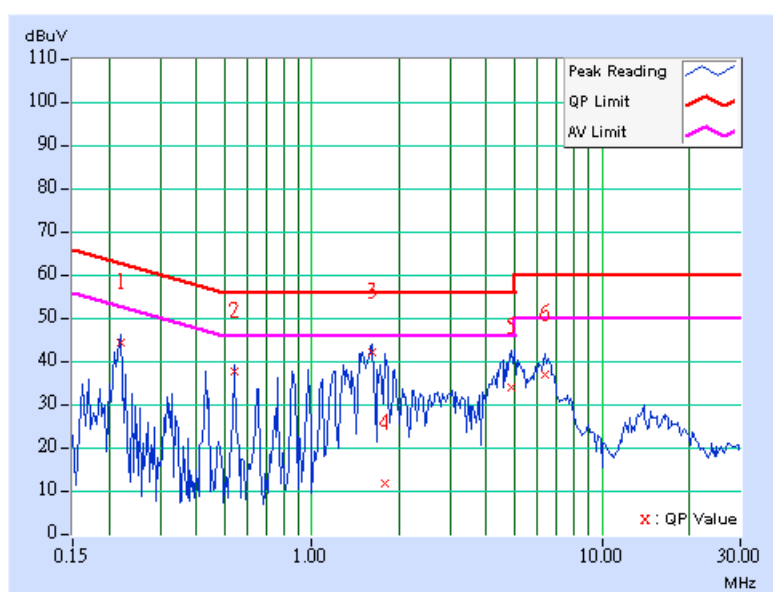

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | G | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|-------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.213 | 0.10 | 45.58 | - | 45.68 | - | 63.08 | 53.08 | -17.40 | - |
| 2 | 0.545 | 0.12 | 37.32 | - | 37.44 | - | 56.00 | 46.00 | -18.56 | - |
| 3 | 1.598 | 0.20 | 40.36 | - | 40.56 | - | 56.00 | 46.00 | -15.44 | - |
| 4 | 1.793 | 0.20 | 22.21 | - | 22.41 | - | 56.00 | 46.00 | -33.59 | - |
| 5 | 4.801 | 0.21 | 33.24 | - | 33.45 | - | 56.00 | 46.00 | -22.55 | - |
| 6 | 6.398 | 0.24 | 34.50 | - | 34.74 | - | 60.00 | 50.00 | -25.26 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

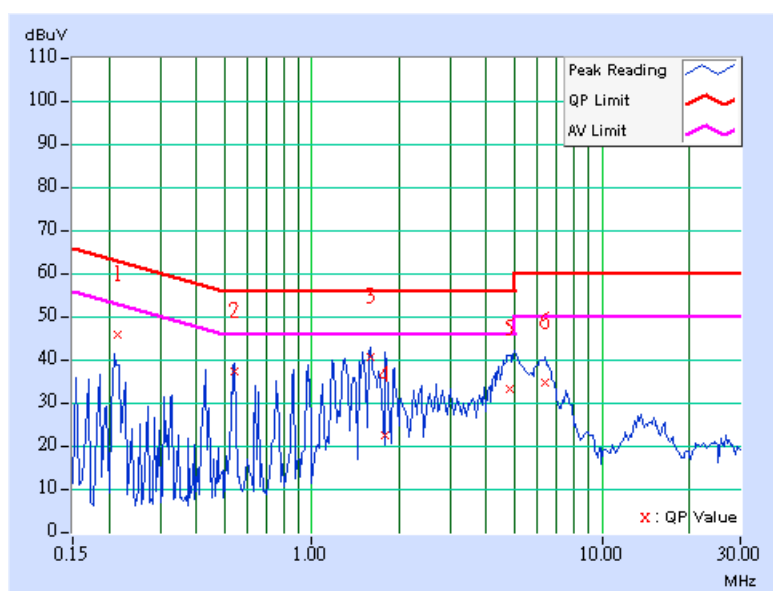

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | G | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|-------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.216 | 0.10 | 43.70 | - | 43.80 | - | 62.96 | 52.96 | -19.16 | - |
| 2 | 0.545 | 0.12 | 37.17 | - | 37.29 | - | 56.00 | 46.00 | -18.71 | - |
| 3 | 1.484 | 0.20 | 40.25 | - | 40.45 | - | 56.00 | 46.00 | -15.55 | - |
| 4 | 1.609 | 0.20 | 42.22 | - | 42.42 | - | 56.00 | 46.00 | -13.58 | - |
| 5 | 5.164 | 0.24 | 37.69 | - | 37.93 | - | 60.00 | 50.00 | -22.07 | - |
| 6 | 6.363 | 0.28 | 36.73 | - | 37.01 | - | 60.00 | 50.00 | -22.99 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

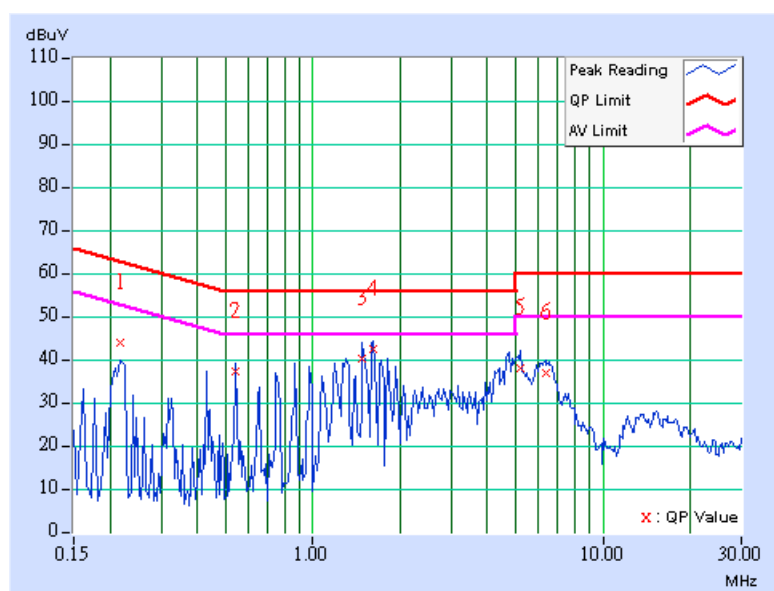

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | H | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|-------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.259 | 0.10 | 42.35 | - | 42.45 | - | 61.45 | 51.45 | -19.00 | - |
| 2 | 0.525 | 0.12 | 40.77 | - | 40.89 | - | 56.00 | 46.00 | -15.11 | - |
| 3 | 0.787 | 0.16 | 38.56 | - | 38.72 | - | 56.00 | 46.00 | -17.28 | - |
| 4 | 1.184 | 0.20 | 39.70 | - | 39.90 | - | 56.00 | 46.00 | -16.10 | - |
| 5 | 1.578 | 0.20 | 38.49 | - | 38.69 | - | 56.00 | 46.00 | -17.31 | - |
| 6 | 2.875 | 0.20 | 33.69 | - | 33.89 | - | 56.00 | 46.00 | -22.11 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

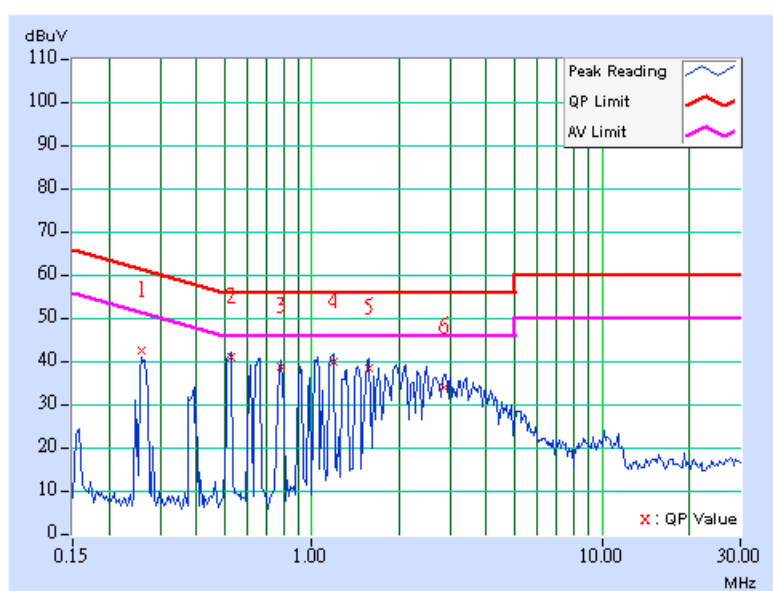

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | H | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|-------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.259 | 0.10 | 40.20 | - | 40.30 | - | 61.45 | 51.45 | -21.15 | - |
| 2 | 0.502 | 0.12 | 29.18 | - | 29.30 | - | 56.00 | 46.00 | -26.70 | - |
| 3 | 0.779 | 0.16 | 36.26 | - | 36.42 | - | 56.00 | 46.00 | -19.58 | - |
| 4 | 1.156 | 0.20 | 35.44 | - | 35.64 | - | 56.00 | 46.00 | -20.36 | - |
| 5 | 1.535 | 0.20 | 35.60 | - | 35.80 | - | 56.00 | 46.00 | -20.20 | - |
| 6 | 2.070 | 0.20 | 33.94 | - | 34.14 | - | 56.00 | 46.00 | -21.86 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

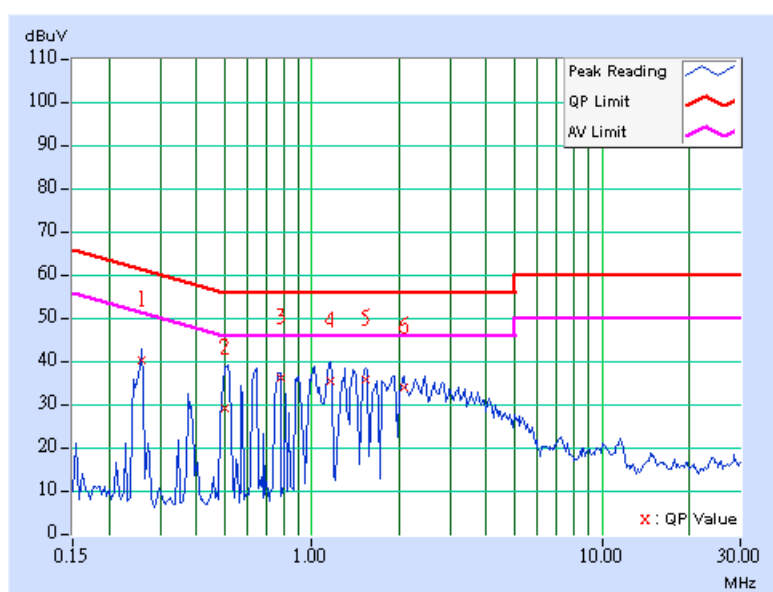

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | H | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|-------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.267 | 0.10 | 42.82 | - | 42.92 | - | 61.20 | 51.20 | -18.28 | - |
| 2 | 0.529 | 0.12 | 40.81 | - | 40.93 | - | 56.00 | 46.00 | -15.07 | - |
| 3 | 0.802 | 0.17 | 38.69 | - | 38.86 | - | 56.00 | 46.00 | -17.14 | - |
| 4 | 1.203 | 0.20 | 39.78 | - | 39.98 | - | 56.00 | 46.00 | -16.02 | - |
| 5 | 1.602 | 0.20 | 38.56 | - | 38.76 | - | 56.00 | 46.00 | -17.24 | - |
| 6 | 2.129 | 0.20 | 36.80 | - | 37.00 | - | 56.00 | 46.00 | -19.00 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

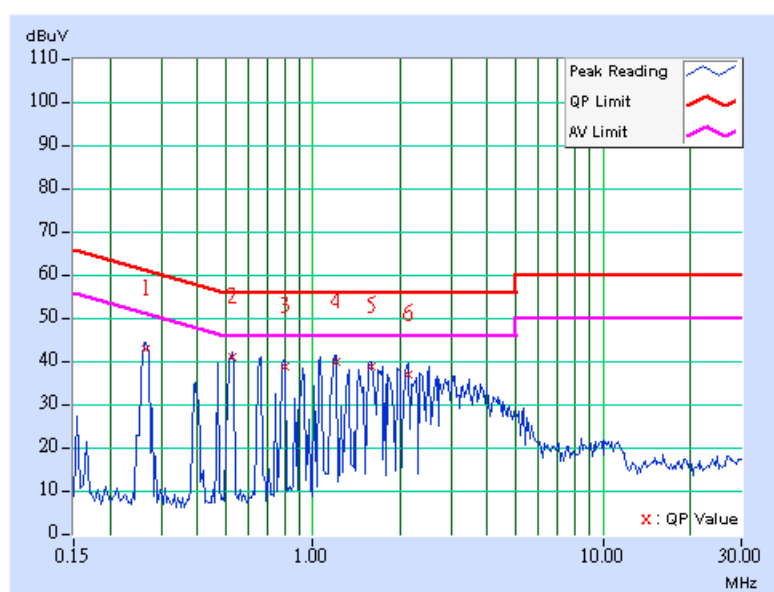

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | H | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|-------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.255 | 0.10 | 28.83 | - | 28.93 | - | 61.58 | 51.58 | -32.65 | - |
| 2 | 0.529 | 0.12 | 38.85 | - | 38.97 | - | 56.00 | 46.00 | -17.03 | - |
| 3 | 0.670 | 0.14 | 38.06 | - | 38.20 | - | 56.00 | 46.00 | -17.80 | - |
| 4 | 1.207 | 0.20 | 37.57 | - | 37.77 | - | 56.00 | 46.00 | -18.23 | - |
| 5 | 1.609 | 0.20 | 36.76 | - | 36.96 | - | 56.00 | 46.00 | -19.04 | - |
| 6 | 2.531 | 0.20 | 33.92 | - | 34.12 | - | 56.00 | 46.00 | -21.88 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

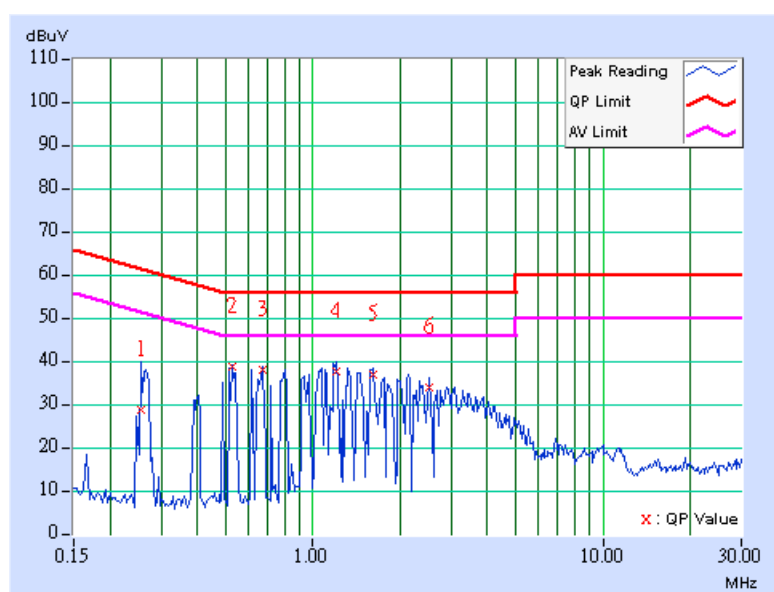

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | H | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|-------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.279 | 0.10 | 42.08 | - | 42.18 | - | 60.85 | 50.85 | -18.67 | - |
| 2 | 0.548 | 0.12 | 40.75 | - | 40.87 | - | 56.00 | 46.00 | -15.13 | - |
| 3 | 0.822 | 0.17 | 38.95 | - | 39.12 | - | 56.00 | 46.00 | -16.88 | - |
| 4 | 1.227 | 0.20 | 38.72 | - | 38.92 | - | 56.00 | 46.00 | -17.08 | - |
| 5 | 1.648 | 0.20 | 38.18 | - | 38.38 | - | 56.00 | 46.00 | -17.62 | - |
| 6 | 2.203 | 0.20 | 37.35 | - | 37.55 | - | 56.00 | 46.00 | -18.45 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

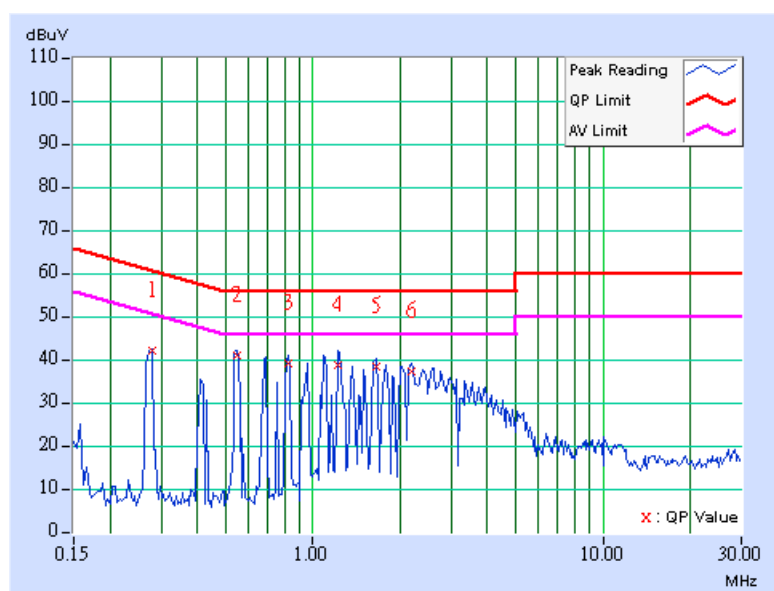

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | H | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|-------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.271 | 0.10 | 38.91 | - | 39.01 | - | 61.08 | 51.08 | -22.07 | - |
| 2 | 0.537 | 0.12 | 38.85 | - | 38.97 | - | 56.00 | 46.00 | -17.03 | - |
| 3 | 0.814 | 0.17 | 35.95 | - | 36.12 | - | 56.00 | 46.00 | -19.88 | - |
| 4 | 1.215 | 0.20 | 36.25 | - | 36.45 | - | 56.00 | 46.00 | -19.55 | - |
| 5 | 1.629 | 0.20 | 36.24 | - | 36.44 | - | 56.00 | 46.00 | -19.56 | - |
| 6 | 2.168 | 0.20 | 34.75 | - | 34.95 | - | 56.00 | 46.00 | -21.05 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

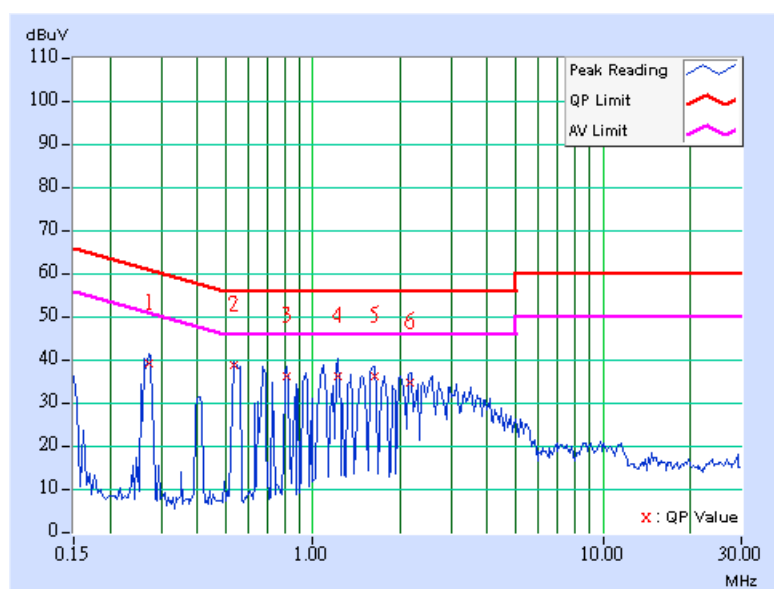

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | I | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.525 | 0.14 | 38.82 | - | 38.96 | - | 56.00 | 46.00 | -17.04 | - |
| 2 | 0.666 | 0.17 | 32.34 | - | 32.51 | - | 56.00 | 46.00 | -23.49 | - |
| 3 | 1.480 | 0.25 | 30.62 | - | 30.87 | - | 56.00 | 46.00 | -25.13 | - |
| 4 | 2.941 | 0.32 | 26.39 | - | 26.71 | - | 56.00 | 46.00 | -29.29 | - |
| 5 | 9.508 | 0.53 | 27.33 | - | 27.86 | - | 60.00 | 50.00 | -32.14 | - |
| 6 | 12.895 | 0.55 | 27.46 | - | 28.01 | - | 60.00 | 50.00 | -31.99 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

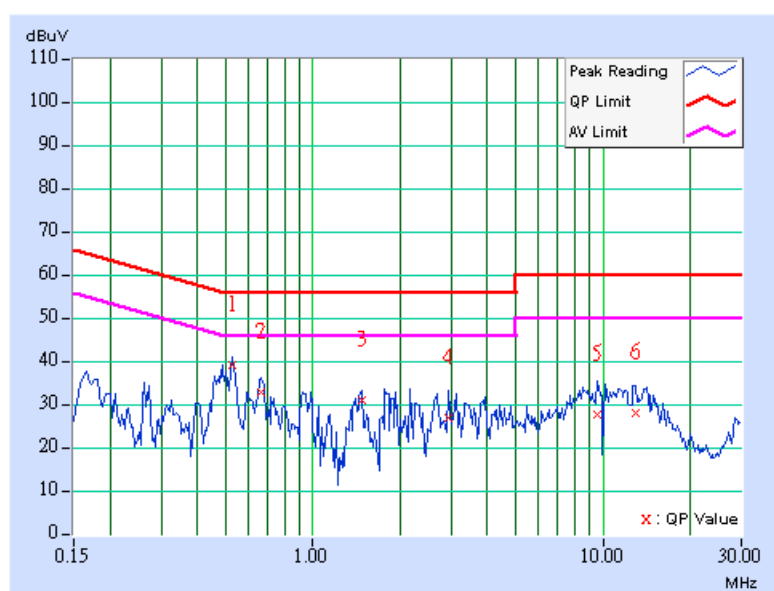

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | I | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.537 | 0.14 | 35.89 | - | 36.03 | - | 56.00 | 46.00 | -19.97 | - |
| 2 | 0.658 | 0.17 | 32.05 | - | 32.22 | - | 56.00 | 46.00 | -23.78 | - |
| 3 | 1.852 | 0.26 | 28.97 | - | 29.23 | - | 56.00 | 46.00 | -26.77 | - |
| 4 | 3.043 | 0.33 | 26.25 | - | 26.58 | - | 56.00 | 46.00 | -29.42 | - |
| 5 | 9.063 | 0.43 | 27.39 | - | 27.82 | - | 60.00 | 50.00 | -32.18 | - |
| 6 | 13.477 | 0.45 | 23.49 | - | 23.94 | - | 60.00 | 50.00 | -36.06 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

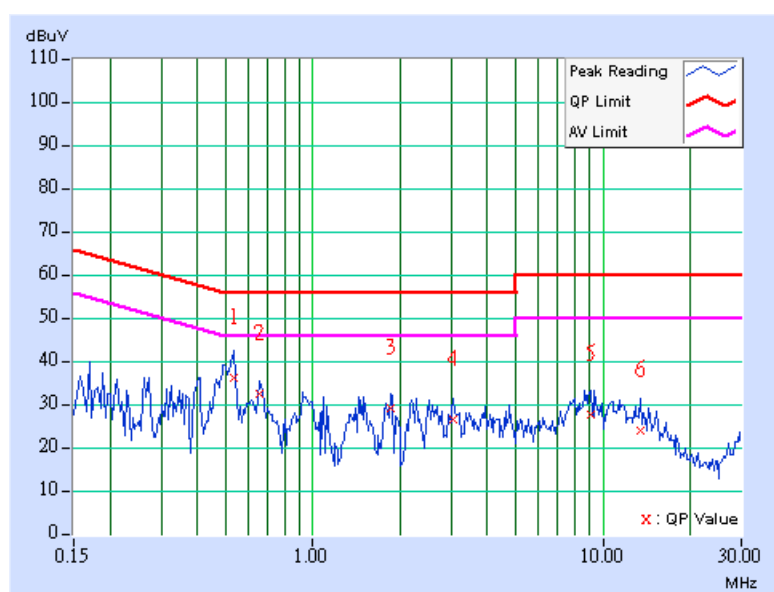

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | I | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.166 | 0.11 | 35.79 | - | 35.90 | - | 65.18 | 55.18 | -29.28 | - |
| 2 | 0.525 | 0.14 | 34.56 | - | 34.70 | - | 56.00 | 46.00 | -21.30 | - |
| 3 | 0.670 | 0.17 | 27.70 | - | 27.87 | - | 56.00 | 46.00 | -28.13 | - |
| 4 | 1.824 | 0.26 | 28.67 | - | 28.93 | - | 56.00 | 46.00 | -27.07 | - |
| 5 | 6.512 | 0.45 | 29.24 | - | 29.69 | - | 60.00 | 50.00 | -30.31 | - |
| 6 | 13.676 | 0.55 | 28.67 | - | 29.22 | - | 60.00 | 50.00 | -30.78 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

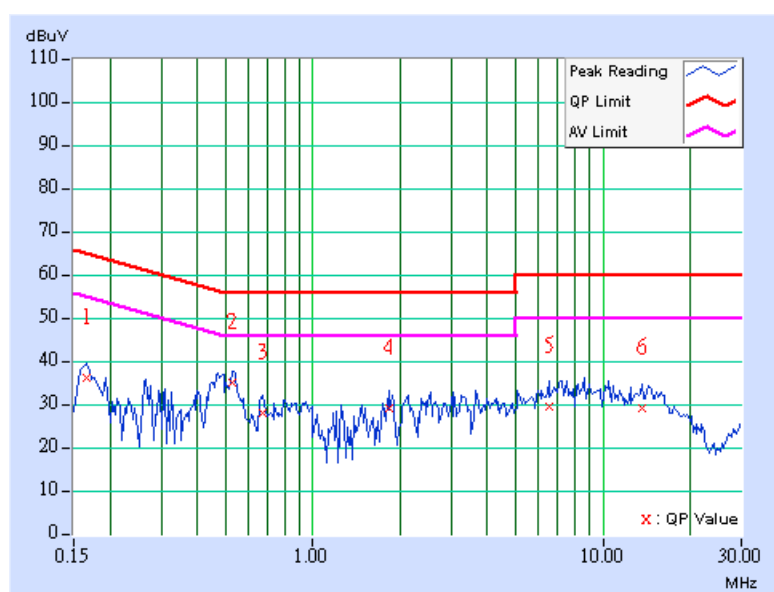

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | I | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.162 | 0.11 | 39.23 | - | 39.34 | - | 65.38 | 55.38 | -26.04 | - |
| 2 | 0.541 | 0.14 | 35.21 | - | 35.35 | - | 56.00 | 46.00 | -20.65 | - |
| 3 | 0.798 | 0.20 | 29.55 | - | 29.75 | - | 56.00 | 46.00 | -26.25 | - |
| 4 | 2.188 | 0.27 | 29.71 | - | 29.98 | - | 56.00 | 46.00 | -26.02 | - |
| 5 | 7.902 | 0.42 | 29.59 | - | 30.01 | - | 60.00 | 50.00 | -29.99 | - |
| 6 | 13.160 | 0.45 | 25.99 | - | 26.44 | - | 60.00 | 50.00 | -33.56 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

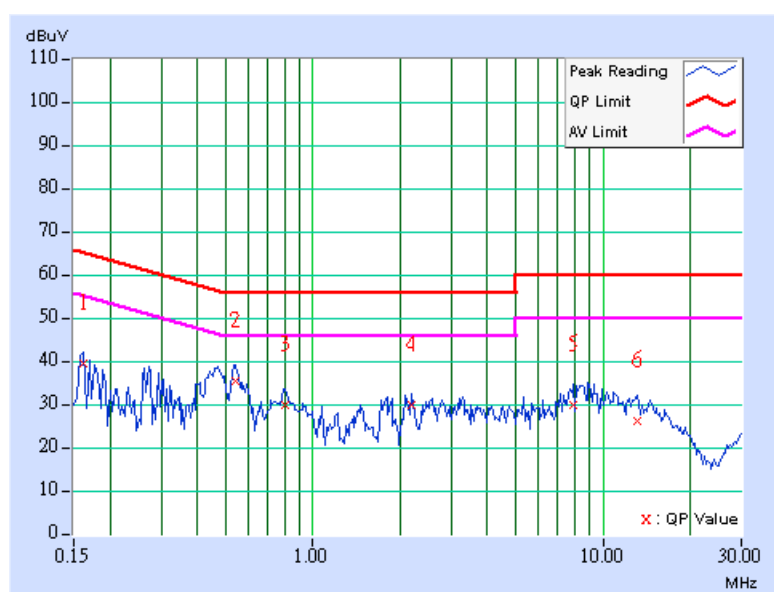

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | I | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.162 | 0.11 | 36.71 | - | 36.82 | - | 65.38 | 55.38 | -28.56 | - |
| 2 | 0.533 | 0.14 | 34.90 | - | 35.04 | - | 56.00 | 46.00 | -20.96 | - |
| 3 | 2.488 | 0.29 | 28.47 | - | 28.76 | - | 56.00 | 46.00 | -27.24 | - |
| 4 | 3.715 | 0.37 | 28.92 | - | 29.29 | - | 56.00 | 46.00 | -26.71 | - |
| 5 | 7.645 | 0.48 | 30.92 | - | 31.40 | - | 60.00 | 50.00 | -28.60 | - |
| 6 | 16.473 | 0.69 | 26.82 | - | 27.51 | - | 60.00 | 50.00 | -32.49 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

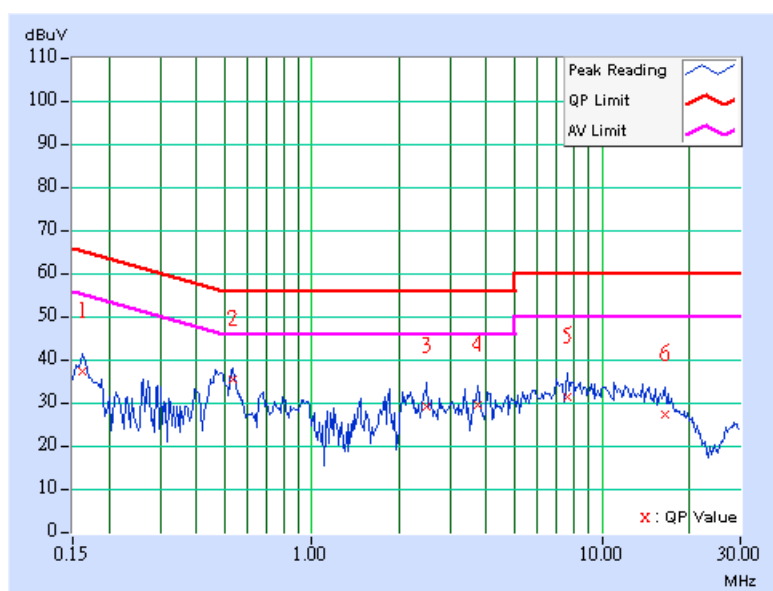

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | I | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.166 | 0.11 | 38.19 | - | 38.30 | - | 65.18 | 55.18 | -26.88 | - |
| 2 | 0.466 | 0.12 | 34.37 | - | 34.49 | - | 56.58 | 46.58 | -22.08 | - |
| 3 | 0.806 | 0.20 | 29.29 | - | 29.49 | - | 56.00 | 46.00 | -26.51 | - |
| 4 | 2.512 | 0.29 | 29.40 | - | 29.69 | - | 56.00 | 46.00 | -26.31 | - |
| 5 | 9.430 | 0.44 | 29.10 | - | 29.54 | - | 60.00 | 50.00 | -30.46 | - |
| 6 | 14.125 | 0.45 | 25.80 | - | 26.25 | - | 60.00 | 50.00 | -33.75 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

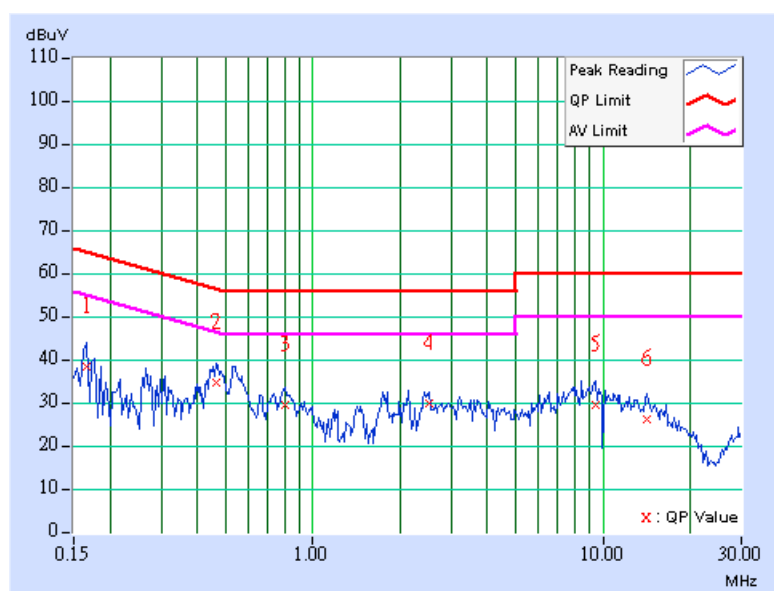

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | J | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.420 | 0.12 | 37.47 | - | 37.59 | - | 57.46 | 47.46 | -19.86 | - |
| 2 | 0.560 | 0.15 | 36.44 | - | 36.59 | - | 56.00 | 46.00 | -19.41 | - |
| 3 | 1.117 | 0.23 | 37.56 | - | 37.79 | - | 56.00 | 46.00 | -18.21 | - |
| 4 | 1.398 | 0.24 | 39.35 | - | 39.59 | - | 56.00 | 46.00 | -16.41 | - |
| 5 | 3.918 | 0.29 | 32.31 | - | 32.60 | - | 56.00 | 46.00 | -23.40 | - |
| 6 | 12.070 | 0.49 | 37.12 | - | 37.61 | - | 60.00 | 50.00 | -22.39 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

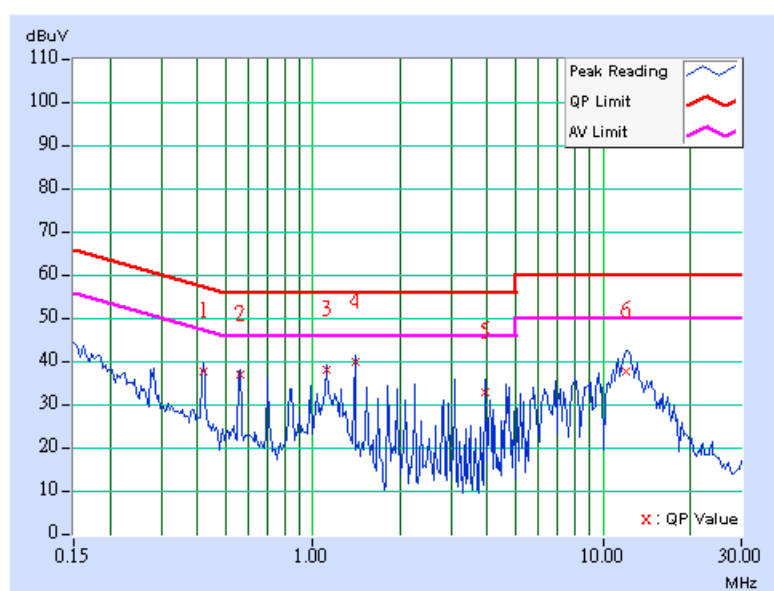

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | J | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.423 | 0.12 | 32.71 | - | 32.83 | - | 57.38 | 47.38 | -24.55 | - |
| 2 | 0.560 | 0.15 | 34.15 | - | 34.30 | - | 56.00 | 46.00 | -21.70 | - |
| 3 | 1.262 | 0.24 | 36.17 | - | 36.41 | - | 56.00 | 46.00 | -19.59 | - |
| 4 | 1.953 | 0.25 | 33.26 | - | 33.51 | - | 56.00 | 46.00 | -22.49 | - |
| 5 | 4.039 | 0.29 | 31.61 | - | 31.90 | - | 56.00 | 46.00 | -24.10 | - |
| 6 | 12.262 | 0.59 | 35.36 | - | 35.95 | - | 60.00 | 50.00 | -24.05 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

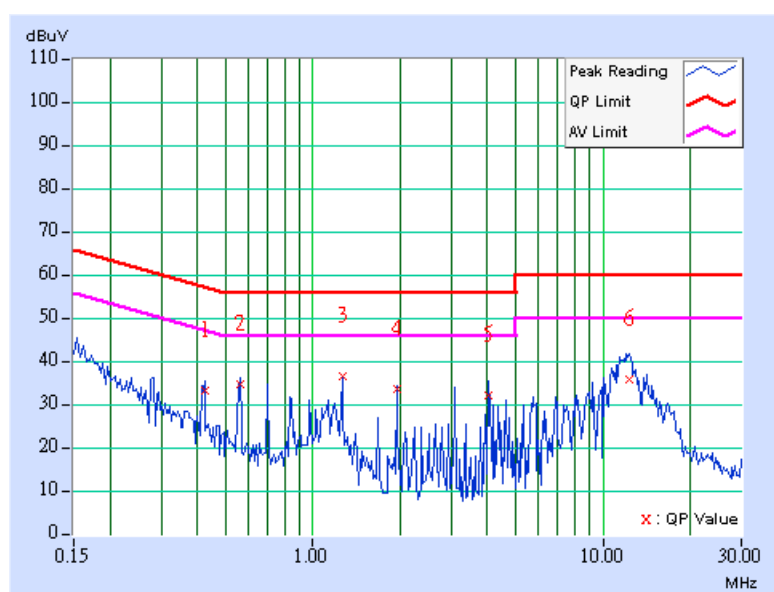

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | J | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.423 | 0.12 | 35.05 | - | 35.17 | - | 57.38 | 47.38 | -22.21 | - |
| 2 | 0.560 | 0.15 | 36.51 | - | 36.66 | - | 56.00 | 46.00 | -19.34 | - |
| 3 | 1.117 | 0.23 | 36.72 | - | 36.95 | - | 56.00 | 46.00 | -19.05 | - |
| 4 | 1.535 | 0.24 | 36.30 | - | 36.54 | - | 56.00 | 46.00 | -19.46 | - |
| 5 | 4.605 | 0.31 | 32.17 | - | 32.48 | - | 56.00 | 46.00 | -23.52 | - |
| 6 | 11.867 | 0.48 | 38.19 | - | 38.67 | - | 60.00 | 50.00 | -21.33 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

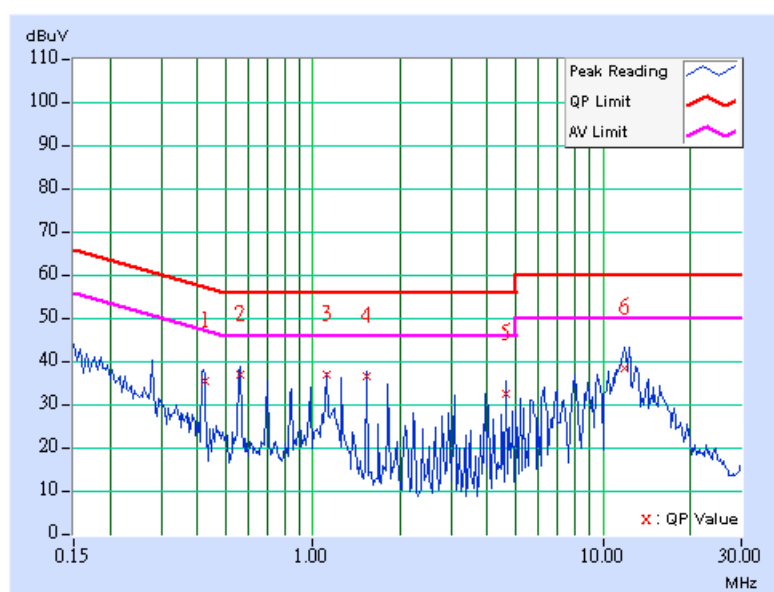

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | J | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.420 | 0.12 | 34.80 | - | 34.92 | - | 57.46 | 47.46 | -22.53 | - |
| 2 | 0.556 | 0.15 | 33.51 | - | 33.66 | - | 56.00 | 46.00 | -22.34 | - |
| 3 | 1.258 | 0.24 | 36.65 | - | 36.89 | - | 56.00 | 46.00 | -19.11 | - |
| 4 | 1.531 | 0.24 | 33.26 | - | 33.50 | - | 56.00 | 46.00 | -22.50 | - |
| 5 | 4.188 | 0.30 | 31.21 | - | 31.51 | - | 56.00 | 46.00 | -24.49 | - |
| 6 | 11.711 | 0.58 | 39.36 | - | 39.94 | - | 60.00 | 50.00 | -20.06 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

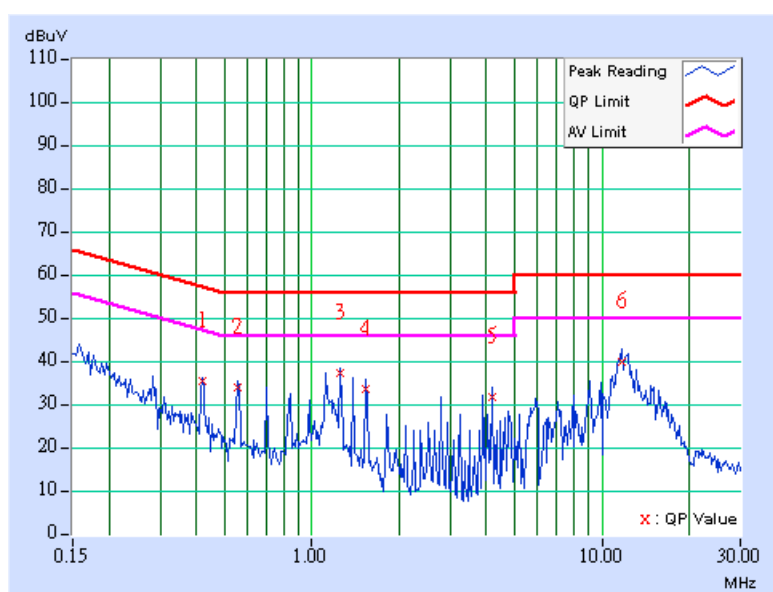

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | J | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.283 | 0.11 | 40.58 | - | 40.69 | - | 60.73 | 50.73 | -20.04 | - |
| 2 | 0.427 | 0.13 | 36.84 | - | 36.97 | - | 57.30 | 47.30 | -20.34 | - |
| 3 | 0.564 | 0.15 | 36.71 | - | 36.86 | - | 56.00 | 46.00 | -19.14 | - |
| 4 | 1.410 | 0.24 | 39.68 | - | 39.92 | - | 56.00 | 46.00 | -16.08 | - |
| 5 | 4.094 | 0.29 | 34.10 | - | 34.39 | - | 56.00 | 46.00 | -21.61 | - |
| 6 | 12.000 | 0.48 | 36.91 | - | 37.39 | - | 60.00 | 50.00 | -22.61 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

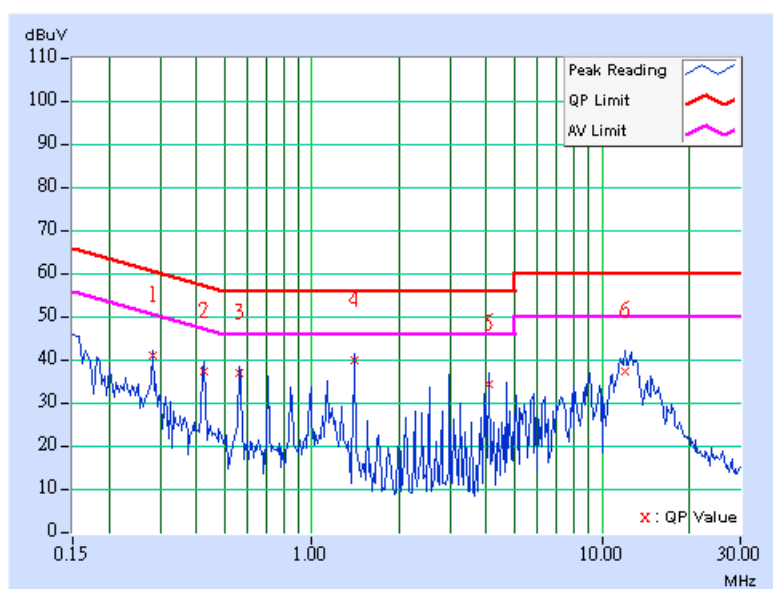

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | J | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.423 | 0.12 | 36.08 | - | 36.20 | - | 57.38 | 47.38 | -21.18 | - |
| 2 | 0.564 | 0.15 | 34.50 | - | 34.65 | - | 56.00 | 46.00 | -21.35 | - |
| 3 | 1.129 | 0.23 | 33.11 | - | 33.34 | - | 56.00 | 46.00 | -22.66 | - |
| 4 | 1.832 | 0.25 | 31.99 | - | 32.24 | - | 56.00 | 46.00 | -23.76 | - |
| 5 | 3.105 | 0.27 | 32.83 | - | 33.10 | - | 56.00 | 46.00 | -22.90 | - |
| 6 | 12.156 | 0.59 | 36.05 | - | 36.64 | - | 60.00 | 50.00 | -23.36 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

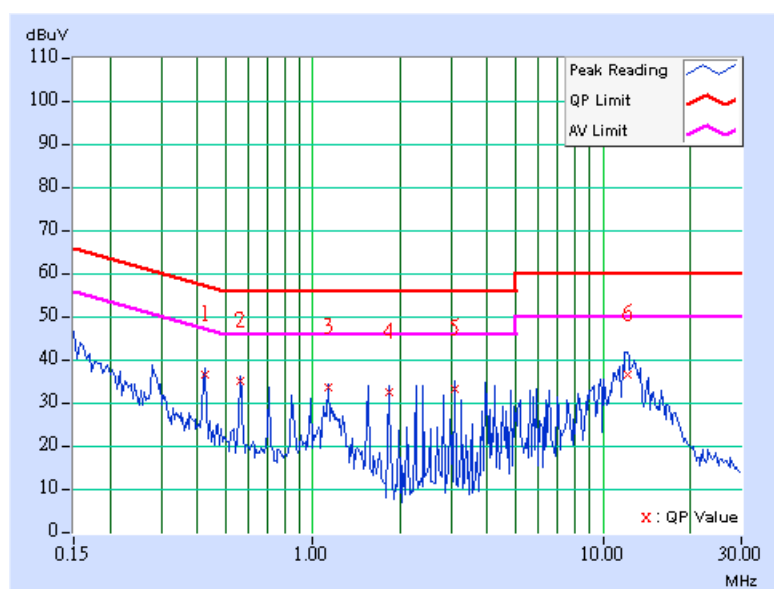

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 28deg. C, 70%RH, 991hPa |
| TEST MODE | K | TESTED BY | Tony Lee |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.216 | 0.11 | 45.88 | - | 45.99 | - | 62.96 | 52.96 | -16.96 | - |
| 2 | 0.416 | 0.12 | 38.84 | - | 38.96 | - | 57.54 | 47.54 | -18.57 | - |
| 3 | 0.849 | 0.20 | 36.34 | - | 36.54 | - | 56.00 | 46.00 | -19.46 | - |
| 4 | 1.152 | 0.23 | 35.78 | - | 36.01 | - | 56.00 | 46.00 | -19.99 | - |
| 5 | 13.520 | 0.52 | 15.75 | - | 16.27 | - | 60.00 | 50.00 | -43.73 | - |
| 6 | 15.098 | 0.56 | 17.56 | - | 18.12 | - | 60.00 | 50.00 | -41.88 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

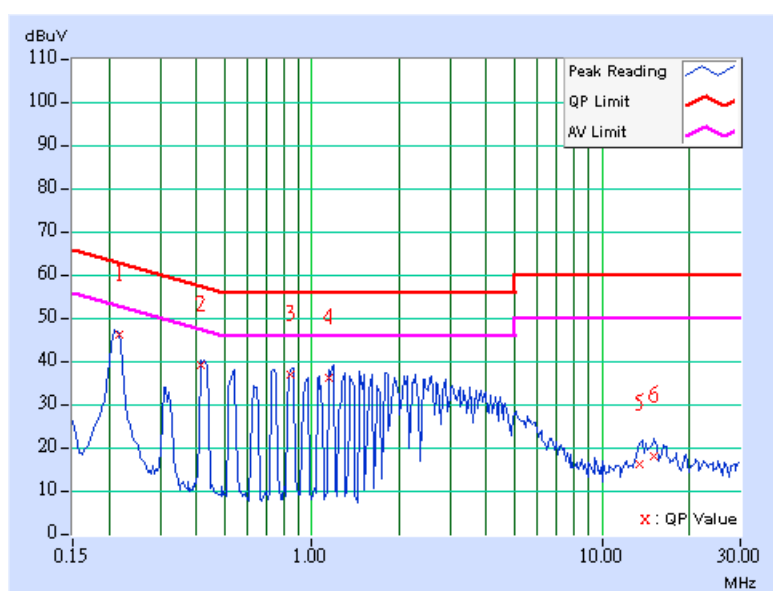

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 28deg. C, 70%RH, 991hPa |
| TEST MODE | K | TESTED BY | Tony Lee |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.213 | 0.11 | 43.69 | - | 43.80 | - | 63.11 | 53.11 | -19.31 | - |
| 2 | 0.431 | 0.13 | 38.99 | - | 39.12 | - | 57.23 | 47.23 | -18.11 | - |
| 3 | 0.744 | 0.18 | 36.73 | - | 36.91 | - | 56.00 | 46.00 | -19.09 | - |
| 4 | 0.857 | 0.20 | 36.16 | - | 36.36 | - | 56.00 | 46.00 | -19.64 | - |
| 5 | 12.402 | 0.59 | 17.68 | - | 18.27 | - | 60.00 | 50.00 | -41.73 | - |
| 6 | 13.727 | 0.62 | 21.25 | - | 21.87 | - | 60.00 | 50.00 | -38.13 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

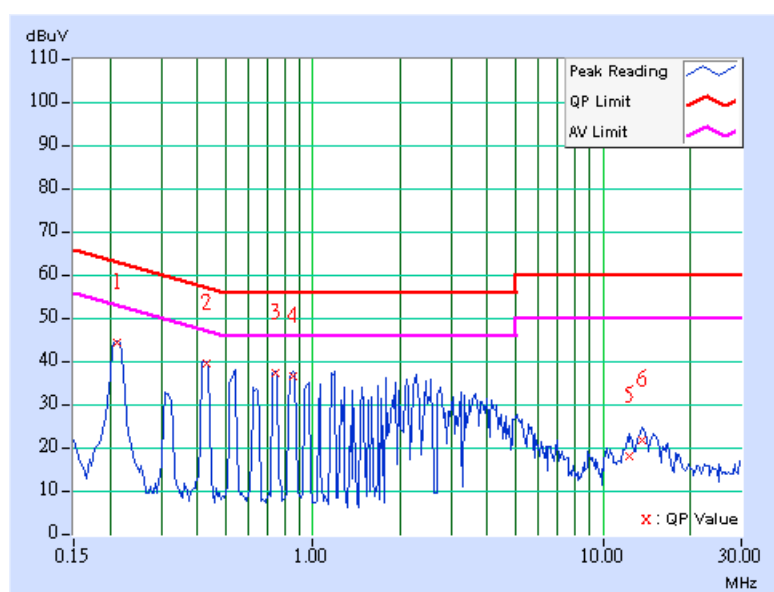

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 28deg. C, 70%RH, 991hPa |
| TEST MODE | K | TESTED BY | Tony Lee |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.209 | 0.11 | 43.82 | - | 43.93 | - | 63.26 | 53.26 | -19.33 | - |
| 2 | 0.416 | 0.12 | 39.00 | - | 39.12 | - | 57.54 | 47.54 | -18.41 | - |
| 3 | 0.744 | 0.18 | 37.54 | - | 37.72 | - | 56.00 | 46.00 | -18.28 | - |
| 4 | 1.164 | 0.23 | 37.04 | - | 37.27 | - | 56.00 | 46.00 | -18.73 | - |
| 5 | 13.621 | 0.52 | 16.32 | - | 16.84 | - | 60.00 | 50.00 | -43.16 | - |
| 6 | 15.172 | 0.56 | 17.42 | - | 17.98 | - | 60.00 | 50.00 | -42.02 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

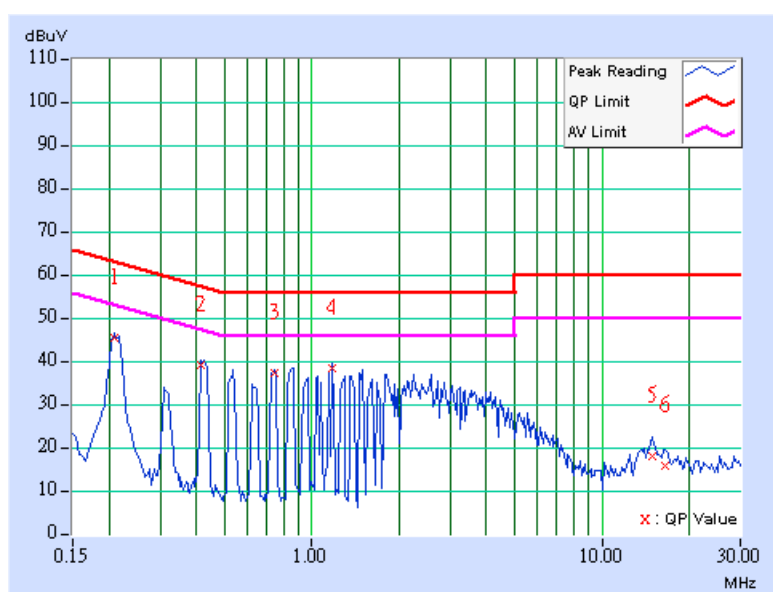

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 28deg. C, 70%RH, 991hPa |
| TEST MODE | K | TESTED BY | Tony Lee |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.213 | 0.11 | 44.13 | - | 44.24 | - | 63.11 | 53.11 | -18.87 | - |
| 2 | 0.416 | 0.12 | 38.13 | - | 38.25 | - | 57.54 | 47.54 | -19.28 | - |
| 3 | 0.732 | 0.18 | 35.47 | - | 35.65 | - | 56.00 | 46.00 | -20.35 | - |
| 4 | 1.180 | 0.23 | 36.49 | - | 36.72 | - | 56.00 | 46.00 | -19.28 | - |
| 5 | 5.566 | 0.36 | 22.34 | - | 22.70 | - | 60.00 | 50.00 | -37.30 | - |
| 6 | 13.762 | 0.62 | 20.68 | - | 21.30 | - | 60.00 | 50.00 | -38.70 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

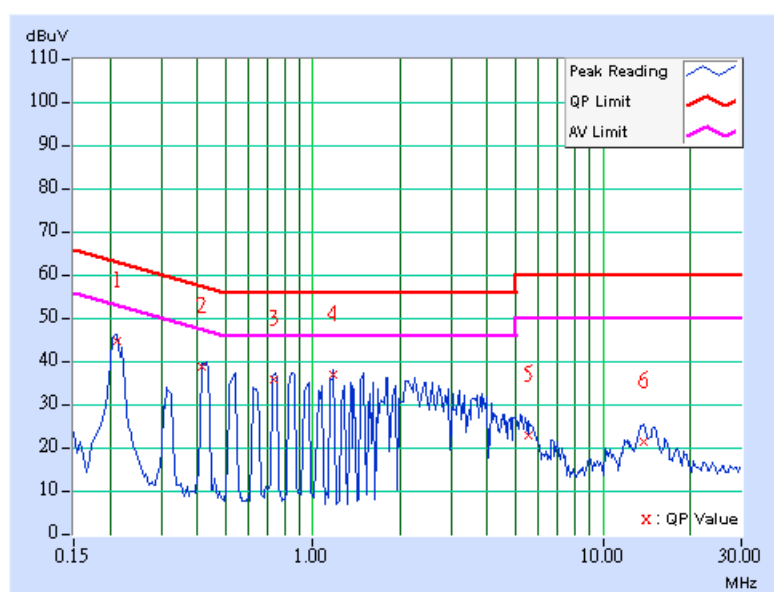

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 28deg. C, 70%RH, 991hPa |
| TEST MODE | K | TESTED BY | Tony Lee |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.209 | 0.11 | 43.82 | - | 43.93 | - | 63.26 | 53.26 | -19.33 | - |
| 2 | 0.416 | 0.12 | 39.00 | - | 39.12 | - | 57.54 | 47.54 | -18.41 | - |
| 3 | 0.744 | 0.18 | 37.54 | - | 37.72 | - | 56.00 | 46.00 | -18.28 | - |
| 4 | 1.164 | 0.23 | 37.04 | - | 37.27 | - | 56.00 | 46.00 | -18.73 | - |
| 5 | 13.621 | 0.52 | 16.32 | - | 16.84 | - | 60.00 | 50.00 | -43.16 | - |
| 6 | 15.172 | 0.56 | 17.42 | - | 17.98 | - | 60.00 | 50.00 | -42.02 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

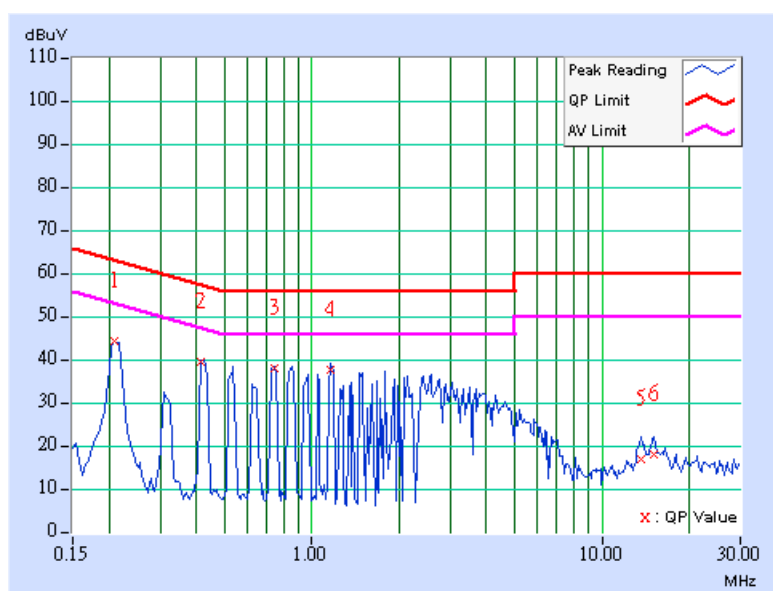

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 28deg. C, 70%RH, 991hPa |
| TEST MODE | K | TESTED BY | Tony Lee |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.209 | 0.11 | 43.93 | - | 44.04 | - | 63.26 | 53.26 | -19.22 | - |
| 2 | 0.416 | 0.12 | 38.15 | - | 38.27 | - | 57.54 | 47.54 | -19.26 | - |
| 3 | 0.541 | 0.15 | 35.38 | - | 35.53 | - | 56.00 | 46.00 | -20.47 | - |
| 4 | 0.857 | 0.20 | 35.92 | - | 36.12 | - | 56.00 | 46.00 | -19.88 | - |
| 5 | 13.539 | 0.62 | 20.37 | - | 20.99 | - | 60.00 | 50.00 | -39.01 | - |
| 6 | 15.023 | 0.65 | 20.74 | - | 21.39 | - | 60.00 | 50.00 | -38.61 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

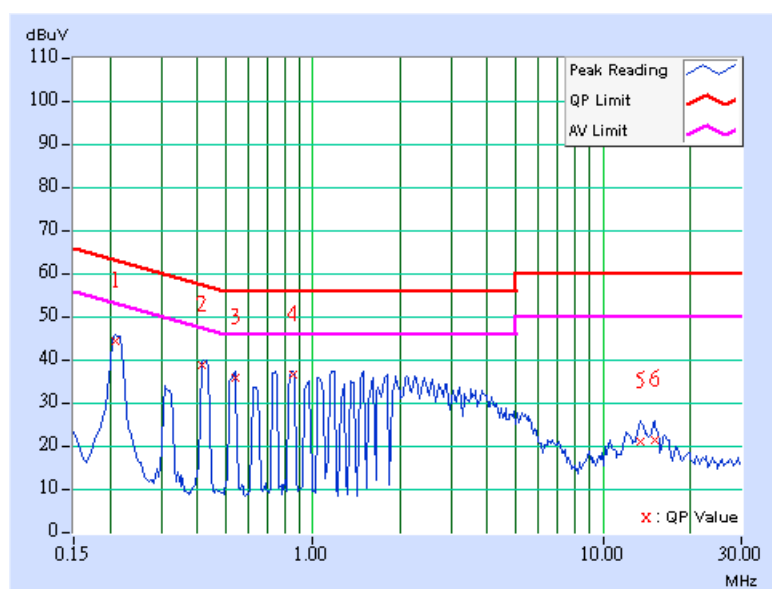

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | L | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.267 | 0.11 | 38.59 | - | 38.70 | - | 61.20 | 51.20 | -22.50 | - |
| 2 | 0.533 | 0.14 | 38.60 | - | 38.74 | - | 56.00 | 46.00 | -17.26 | - |
| 3 | 1.746 | 0.24 | 31.88 | - | 32.12 | - | 56.00 | 46.00 | -23.88 | - |
| 4 | 2.820 | 0.27 | 29.83 | - | 30.10 | - | 56.00 | 46.00 | -25.90 | - |
| 5 | 8.410 | 0.40 | 27.84 | - | 28.24 | - | 60.00 | 50.00 | -31.76 | - |
| 6 | 14.664 | 0.54 | 27.66 | - | 28.20 | - | 60.00 | 50.00 | -31.80 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

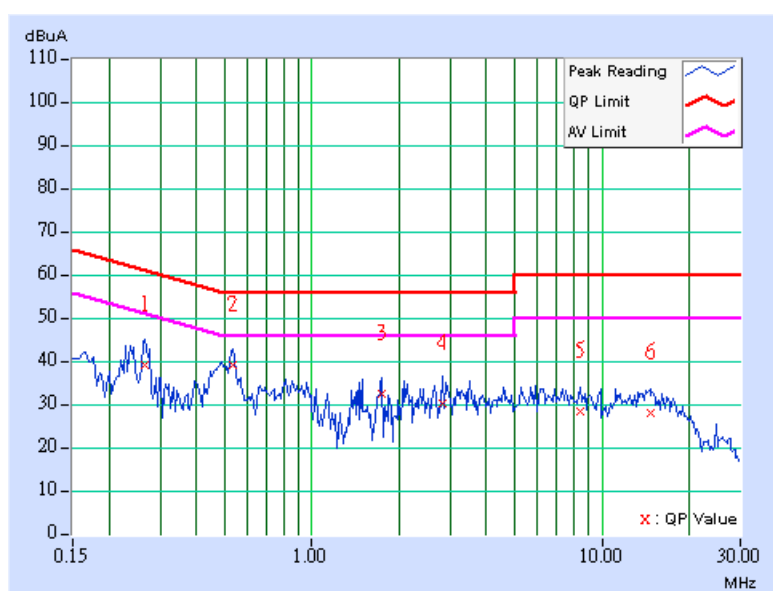

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 1 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | L | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.162 | 0.11 | 42.31 | - | 42.42 | - | 65.38 | 55.38 | -22.96 | - |
| 2 | 0.537 | 0.15 | 40.16 | - | 40.31 | - | 56.00 | 46.00 | -15.69 | - |
| 3 | 1.723 | 0.24 | 36.55 | - | 36.79 | - | 56.00 | 46.00 | -19.21 | - |
| 4 | 2.430 | 0.26 | 34.82 | - | 35.08 | - | 56.00 | 46.00 | -20.92 | - |
| 5 | 8.789 | 0.49 | 33.48 | - | 33.97 | - | 60.00 | 50.00 | -26.03 | - |
| 6 | 14.395 | 0.64 | 32.02 | - | 32.66 | - | 60.00 | 50.00 | -27.34 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

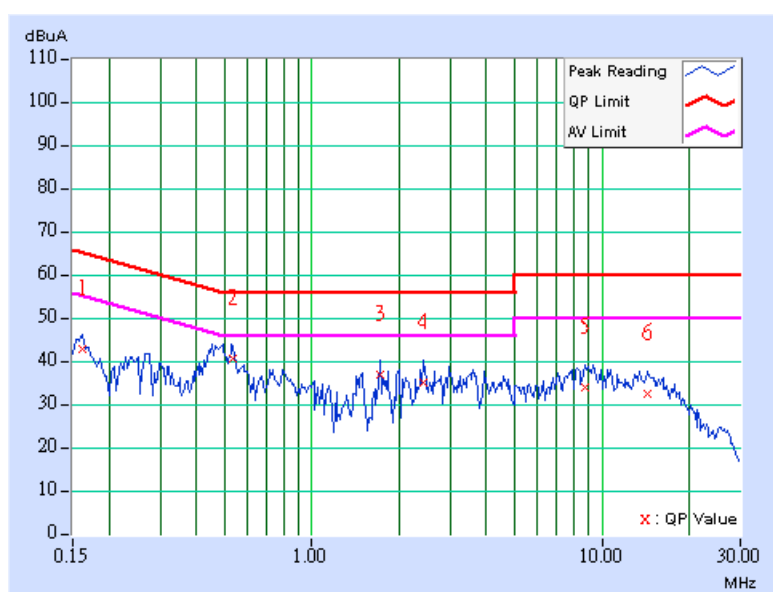

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | L | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.271 | 0.11 | 37.12 | - | 37.23 | - | 61.08 | 51.08 | -23.85 | - |
| 2 | 0.529 | 0.14 | 38.61 | - | 38.75 | - | 56.00 | 46.00 | -17.25 | - |
| 3 | 1.418 | 0.24 | 31.31 | - | 31.55 | - | 56.00 | 46.00 | -24.45 | - |
| 4 | 1.801 | 0.25 | 31.14 | - | 31.39 | - | 56.00 | 46.00 | -24.61 | - |
| 5 | 7.266 | 0.37 | 28.97 | - | 29.34 | - | 60.00 | 50.00 | -30.66 | - |
| 6 | 12.316 | 0.49 | 27.22 | - | 27.71 | - | 60.00 | 50.00 | -32.29 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

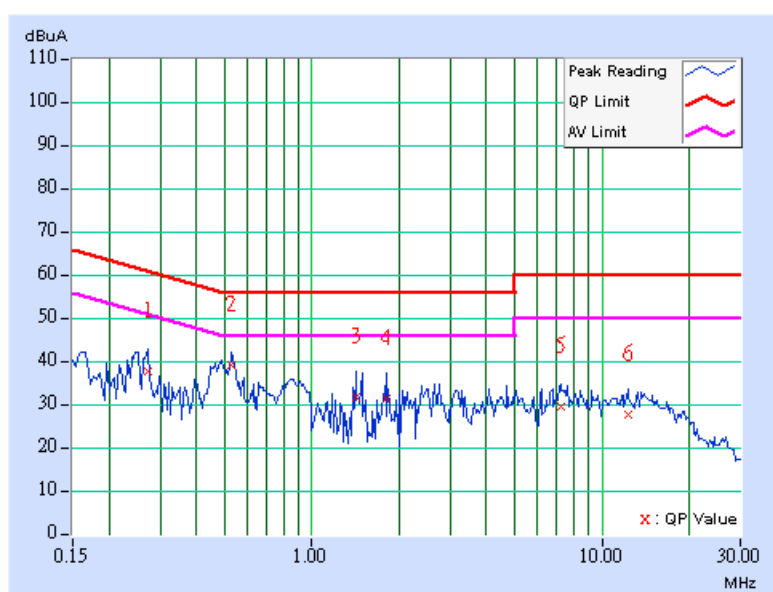

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 6 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | L | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.263 | 0.11 | 38.97 | - | 39.08 | - | 61.33 | 51.33 | -22.24 | - |
| 2 | 0.533 | 0.14 | 40.34 | - | 40.48 | - | 56.00 | 46.00 | -15.52 | - |
| 3 | 1.332 | 0.24 | 31.59 | - | 31.83 | - | 56.00 | 46.00 | -24.17 | - |
| 4 | 3.625 | 0.28 | 33.77 | - | 34.05 | - | 56.00 | 46.00 | -21.95 | - |
| 5 | 9.348 | 0.51 | 33.08 | - | 33.59 | - | 60.00 | 50.00 | -26.41 | - |
| 6 | 14.711 | 0.64 | 31.76 | - | 32.40 | - | 60.00 | 50.00 | -27.60 | - |


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value.
 5. Correction factor = Insertion loss + Cable loss.
 6. Emission Level = Correction Factor + Reading Value.

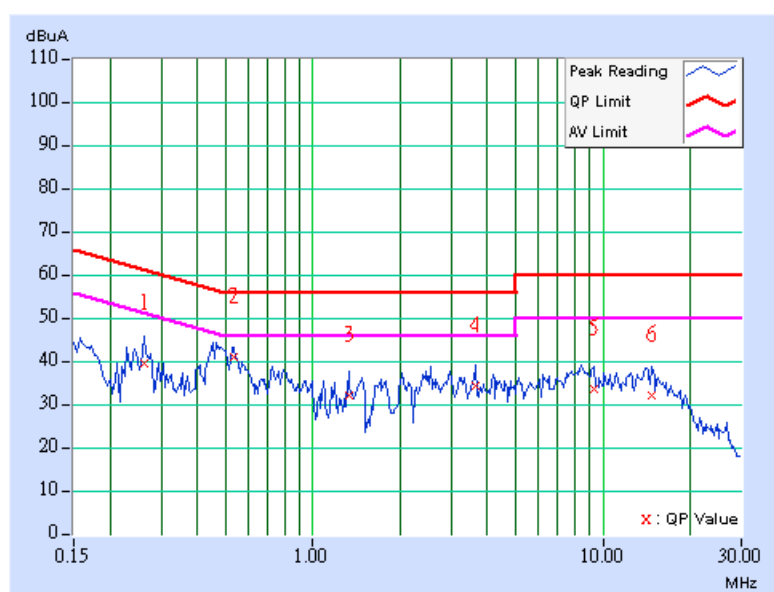

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | PHASE | Line 1 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | L | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.263 | 0.11 | 43.98 | - | 44.09 | - | 61.33 | 51.33 | -17.23 | - |
| 2 | 0.533 | 0.14 | 38.43 | - | 38.57 | - | 56.00 | 46.00 | -17.43 | - |
| 3 | 1.426 | 0.24 | 34.21 | - | 34.45 | - | 56.00 | 46.00 | -21.55 | - |
| 4 | 2.094 | 0.25 | 32.58 | - | 32.83 | - | 56.00 | 46.00 | -23.17 | - |
| 5 | 8.457 | 0.40 | 27.78 | - | 28.18 | - | 60.00 | 50.00 | -31.82 | - |
| 6 | 15.309 | 0.58 | 26.34 | - | 26.92 | - | 60.00 | 50.00 | -33.08 | - |


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

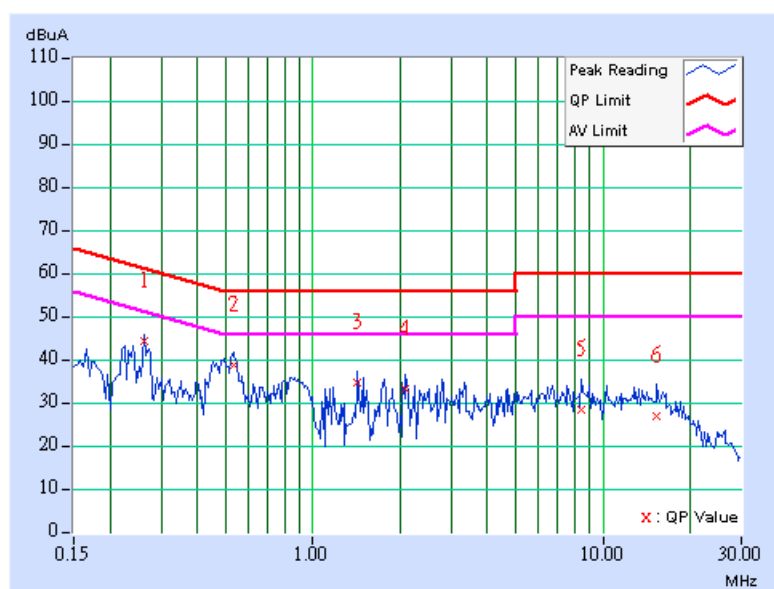

| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
|----------------------|-----------------|--------------------------|-------------------------|
| MODEL | HSTNH-H06C-WL | PHASE | Line 2 |
| CHANNEL | Channel 11 | 6dB BANDWIDTH | 9 kHz |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 25deg. C, 65%RH, 991hPa |
| TEST MODE | L | TESTED BY | Long Chen |

| | FREQ. | CORR. | READING VALUE | | EMISSION LEVEL | | LIMIT | | MARGIN | |
|----|--------|--------|---------------|-----|----------------|-----|-----------|-------|--------|-----|
| NO | | FACTOR | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | [MHz] | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.271 | 0.11 | 38.62 | - | 38.73 | - | 61.08 | 51.08 | -22.35 | - |
| 2 | 0.529 | 0.14 | 40.72 | - | 40.86 | - | 56.00 | 46.00 | -15.14 | - |
| 3 | 1.730 | 0.24 | 36.57 | - | 36.81 | - | 56.00 | 46.00 | -19.19 | - |
| 4 | 3.574 | 0.28 | 34.26 | - | 34.54 | - | 56.00 | 46.00 | -21.46 | - |
| 5 | 9.176 | 0.51 | 33.46 | - | 33.97 | - | 60.00 | 50.00 | -26.03 | - |
| 6 | 15.672 | 0.69 | 31.29 | - | 31.98 | - | 60.00 | 50.00 | -28.02 | - |

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

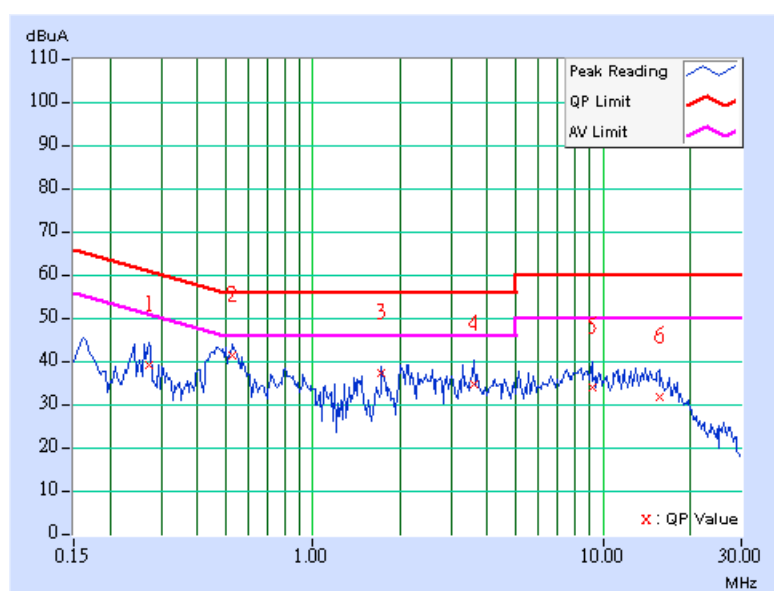

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|---|--------------------|--------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESI7 | 838496/016 | Jan. 07, 2006 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100041 | Nov. 29, 2005 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-155 | Jan. 22, 2006 |
| HORN Antenna SCHWARZBECK | BBHA 9120D | 9120D-404 | Jan. 05, 2006 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA 9170242 | Jan. 23, 2006 |
| Preamplifier Agilent | 8447D | 2944A10631 | Nov. 17, 2005 |
| Preamplifier Agilent | 8449B | 3008A01960 | Nov. 14, 2005 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 219272/4 | Jan. 26, 2006 |
| RF signal cable HUBER+SUHNNER | SUCOFLEX 104 | 219275/4 | Jan. 26, 2006 |
| Software ADT. | ADT_Radiated_V5.14 | NA | NA |
| Antenna Tower inn-co GmbH | MA 4000 | 010303 | NA |
| Antenna Tower Controller inn-co GmbH | CO2000 | 019303 | NA |
| Turn Table ADT. | TT100. | TT93021704 | NA |
| Turn Table Controller ADT. | SC100. | SC93021704 | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using the peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

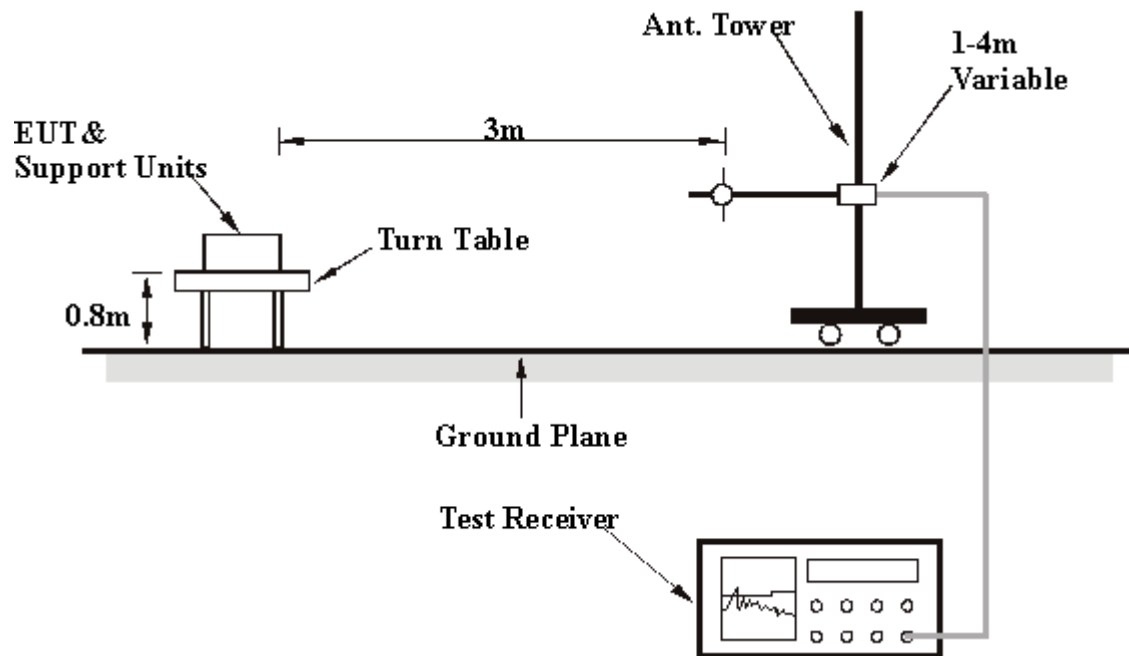

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

RADIATED WORST CASE DATA:

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 11 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | Below 1000MHz | DETECTOR FUNCTION | Quasi-Peak |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 24deg. C, 66%RH, 991hPa |
| TEST MODE | A | TESTED BY | Brad Wu |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 113.59 | 30.43 QP | 43.50 | -13.07 | 2.00 H | 97 | 18.20 | 12.23 |
| 2 | 251.60 | 27.57 QP | 46.00 | -18.43 | 1.00 H | 256 | 14.44 | 13.13 |
| 3 | 323.53 | 25.48 QP | 46.00 | -20.52 | 1.00 H | 259 | 10.55 | 14.93 |
| 4 | 599.56 | 26.10 QP | 46.00 | -19.90 | 1.00 H | 103 | 5.28 | 20.82 |
| 5 | 718.14 | 29.49 QP | 46.00 | -16.51 | 3.00 H | 103 | 7.04 | 22.46 |
| 6 | 797.84 | 26.89 QP | 46.00 | -19.11 | 1.00 H | 88 | 3.44 | 23.45 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 39.72 | 26.89 QP | 40.00 | -13.11 | 1.00 V | 205 | 11.63 | 15.26 |
| 2 | 70.82 | 24.25 QP | 40.00 | -15.75 | 1.00 V | 184 | 11.99 | 12.27 |
| 3 | 131.08 | 32.99 QP | 43.50 | -10.51 | 1.00 V | 103 | 19.25 | 13.74 |
| 4 | 168.02 | 27.85 QP | 43.50 | -15.65 | 1.00 V | 352 | 13.73 | 14.12 |
| 5 | 239.94 | 29.54 QP | 46.00 | -16.46 | 1.00 V | 43 | 16.58 | 12.96 |
| 6 | 865.87 | 27.90 QP | 46.00 | -18.10 | 2.00 V | 4 | 3.70 | 24.20 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 11 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | Below 1000MHz | DETECTOR FUNCTION | Quasi-Peak |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 24deg. C, 66%RH, 991hPa |
| TEST MODE | B | TESTED BY | Brad Wu |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 115.53 | 30.59 QP | 43.50 | -12.91 | 2.00 H | 67 | 18.16 | 12.42 |
| 2 | 179.68 | 25.70 QP | 43.50 | -17.80 | 2.00 H | 52 | 12.77 | 12.93 |
| 3 | 356.57 | 26.54 QP | 46.00 | -19.46 | 3.00 H | 49 | 10.86 | 15.68 |
| 4 | 733.69 | 29.42 QP | 46.00 | -16.58 | 3.00 H | 121 | 6.58 | 22.84 |
| 5 | 768.68 | 26.63 QP | 46.00 | -19.37 | 1.00 H | 133 | 3.30 | 23.32 |
| 6 | 799.78 | 29.45 QP | 46.00 | -16.55 | 1.00 H | 76 | 5.99 | 23.46 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 31.94 | 26.75 QP | 40.00 | -13.25 | 1.00 V | 184 | 12.75 | 14.01 |
| 2 | 64.99 | 23.93 QP | 40.00 | -16.07 | 1.00 V | 265 | 10.88 | 13.05 |
| 3 | 115.53 | 28.85 QP | 43.50 | -14.65 | 1.00 V | 340 | 16.42 | 12.42 |
| 4 | 154.41 | 29.57 QP | 43.50 | -13.93 | 1.00 V | 148 | 14.77 | 14.80 |
| 5 | 599.56 | 28.81 QP | 46.00 | -17.19 | 1.00 V | 304 | 7.99 | 20.82 |
| 6 | 931.96 | 28.89 QP | 46.00 | -17.11 | 2.00 V | 73 | 3.75 | 25.14 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 11 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | Below 1000MHz | DETECTOR FUNCTION | Quasi-Peak |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH, 991hPa |
| TEST MODE | C | TESTED BY | Brad Wu |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 64.99 | 23.14 QP | 40.00 | -16.86 | 1.25 H | 271 | 10.24 | 12.90 |
| 2 | 115.53 | 24.84 QP | 43.50 | -18.66 | 1.00 H | 262 | 12.50 | 12.34 |
| 3 | 164.13 | 25.81 QP | 43.50 | -17.69 | 1.00 H | 214 | 11.55 | 14.26 |
| 4 | 733.69 | 26.55 QP | 46.00 | -19.45 | 1.25 H | 82 | 3.52 | 23.03 |
| 5 | 799.78 | 26.78 QP | 46.00 | -19.22 | 1.00 H | 205 | 3.08 | 23.70 |
| 6 | 916.41 | 38.05 QP | 46.00 | -7.95 | 1.00 H | 157 | 12.78 | 25.27 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 35.83 | 27.74 QP | 40.00 | -12.26 | 1.00 V | 169 | 13.43 | 14.32 |
| 2 | 70.82 | 24.56 QP | 40.00 | -15.44 | 1.50 V | 334 | 12.44 | 12.12 |
| 3 | 115.53 | 32.95 QP | 43.50 | -10.55 | 1.00 V | 310 | 20.61 | 12.34 |
| 4 | 162.18 | 26.07 QP | 43.50 | -17.43 | 1.00 V | 337 | 11.63 | 14.45 |
| 5 | 731.74 | 27.25 QP | 46.00 | -18.75 | 1.00 V | 142 | 4.26 | 22.99 |
| 6 | 916.41 | 38.59 QP | 46.00 | -7.41 | 1.25 V | 292 | 13.32 | 25.27 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 11 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | Below 1000MHz | DETECTOR FUNCTION | Quasi-Peak |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 27deg. C, 65%RH, 991hPa |
| TEST MODE | D | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 39.72 | 25.29 QP | 40.00 | -14.71 | 2.00 H | 184 | 10.36 | 14.92 |
| 2 | 78.60 | 22.75 QP | 40.00 | -17.25 | 2.00 H | 10 | 12.63 | 10.11 |
| 3 | 115.53 | 39.42 QP | 43.50 | -4.08 | 1.50 H | 238 | 27.08 | 12.34 |
| 4 | 158.30 | 30.35 QP | 43.50 | -13.15 | 1.50 H | 292 | 15.73 | 14.62 |
| 5 | 208.84 | 28.48 QP | 43.50 | -15.02 | 1.50 H | 265 | 17.13 | 11.35 |
| 6 | 257.43 | 31.26 QP | 46.00 | -14.74 | 1.00 H | 253 | 18.08 | 13.19 |
| 7 | 449.88 | 32.74 QP | 46.00 | -13.26 | 2.00 H | 298 | 14.83 | 17.91 |
| 8 | 599.56 | 26.98 QP | 46.00 | -19.02 | 1.50 H | 322 | 6.09 | 20.88 |
| 9 | 799.78 | 27.13 QP | 46.00 | -18.87 | 1.50 H | 232 | 3.43 | 23.70 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 39.72 | 25.71 QP | 40.00 | -14.29 | 1.00 V | 64 | 10.78 | 14.92 |
| 2 | 76.65 | 30.45 QP | 40.00 | -9.55 | 1.00 V | 274 | 19.84 | 10.62 |
| 3 | 115.53 | 33.35 QP | 43.50 | -10.15 | 2.00 V | 19 | 21.01 | 12.34 |
| 4 | 162.18 | 32.78 QP | 43.50 | -10.72 | 1.00 V | 196 | 18.33 | 14.45 |
| 5 | 197.17 | 27.53 QP | 43.50 | -15.97 | 1.00 V | 202 | 16.18 | 11.35 |
| 6 | 399.34 | 28.58 QP | 46.00 | -17.42 | 1.00 V | 97 | 11.96 | 16.62 |
| 7 | 451.82 | 37.11 QP | 46.00 | -8.89 | 1.00 V | 325 | 19.18 | 17.94 |
| 8 | 836.71 | 28.02 QP | 46.00 | -17.98 | 1.50 V | 148 | 4.01 | 24.01 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

| | | | |
|-----------------------------|-----------------|---------------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 11 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | Below 1000MHz | DETECTOR FUNCTION | Quasi-Peak |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 27deg. C, 65%RH, 991hPa |
| TEST MODE | E | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|--|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 41.66 | 22.37 QP | 40.00 | -17.63 | 2.50 H | 46 | 7.37 | 15.00 |
| 2 | 117.47 | 39.52 QP | 43.50 | -3.98 | 1.50 H | 244 | 26.98 | 12.54 |
| 3 | 177.74 | 28.80 QP | 43.50 | -14.70 | 2.00 H | 283 | 15.87 | 12.93 |
| 4 | 249.66 | 29.49 QP | 46.00 | -16.51 | 1.00 H | 262 | 16.41 | 13.08 |
| 5 | 449.88 | 32.61 QP | 46.00 | -13.39 | 2.00 H | 292 | 14.70 | 17.91 |
| 6 | 597.62 | 27.84 QP | 46.00 | -18.16 | 1.00 H | 310 | 7.01 | 20.83 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|--|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 35.83 | 23.03 QP | 40.00 | -16.97 | 1.00 V | 259 | 8.71 | 14.32 |
| 2 | 78.60 | 26.43 QP | 40.00 | -13.57 | 1.00 V | 283 | 16.31 | 10.11 |
| 3 | 115.53 | 37.38 QP | 43.50 | -6.12 | 1.00 V | 10 | 25.04 | 12.34 |
| 4 | 146.63 | 27.04 QP | 43.50 | -16.46 | 1.00 V | 235 | 12.68 | 14.36 |
| 5 | 183.57 | 29.21 QP | 43.50 | -14.29 | 1.00 V | 199 | 16.78 | 12.43 |
| 6 | 451.82 | 36.67 QP | 46.00 | -9.33 | 1.00 V | 322 | 18.73 | 17.94 |
| 7 | 521.80 | 28.61 QP | 46.00 | -17.39 | 1.00 V | 220 | 9.58 | 19.03 |
| 8 | 601.50 | 28.29 QP | 46.00 | -17.71 | 1.00 V | 217 | 7.38 | 20.91 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 11 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | Below 1000MHz | DETECTOR FUNCTION | Quasi-Peak |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 27deg. C, 65%RH, 991hPa |
| TEST MODE | F | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 37.78 | 23.48 QP | 40.00 | -16.52 | 2.00 H | 202 | 8.86 | 14.62 |
| 2 | 115.53 | 39.47 QP | 43.50 | -4.03 | 1.50 H | 271 | 27.13 | 12.34 |
| 3 | 154.41 | 26.63 QP | 43.50 | -16.87 | 1.50 H | 250 | 12.10 | 14.53 |
| 4 | 195.23 | 29.82 QP | 43.50 | -13.68 | 1.50 H | 46 | 18.31 | 11.51 |
| 5 | 249.66 | 33.48 QP | 46.00 | -12.52 | 1.00 H | 256 | 20.40 | 13.08 |
| 6 | 449.88 | 32.68 QP | 46.00 | -13.32 | 2.00 H | 283 | 14.78 | 17.91 |
| 7 | 599.56 | 28.14 QP | 46.00 | -17.86 | 1.50 H | 148 | 7.25 | 20.88 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 64.99 | 27.20 QP | 40.00 | -12.80 | 1.00 V | 337 | 14.31 | 12.90 |
| 2 | 115.53 | 34.87 QP | 43.50 | -8.63 | 1.50 V | 169 | 22.52 | 12.34 |
| 3 | 164.13 | 29.49 QP | 43.50 | -14.01 | 1.00 V | 43 | 15.23 | 14.26 |
| 4 | 195.23 | 26.53 QP | 43.50 | -16.97 | 1.00 V | 172 | 15.02 | 11.51 |
| 5 | 360.46 | 27.94 QP | 46.00 | -18.06 | 1.50 V | 343 | 12.23 | 15.71 |
| 6 | 449.88 | 36.69 QP | 46.00 | -9.31 | 1.00 V | 310 | 18.78 | 17.91 |
| 7 | 601.50 | 26.73 QP | 46.00 | -19.27 | 1.00 V | 169 | 5.82 | 20.91 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

| | | | |
|-----------------------------|-----------------|---------------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 11 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | Below 1000MHz | DETECTOR FUNCTION | Quasi-Peak |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | G | TESTED BY | Brad Wu |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|--|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 115.53 | 31.57 QP | 43.50 | -11.93 | 2.00 H | 61 | 19.15 | 12.42 |
| 2 | 181.62 | 23.62 QP | 43.50 | -19.88 | 2.00 H | 331 | 10.85 | 12.77 |
| 3 | 731.74 | 27.46 QP | 46.00 | -18.54 | 3.00 H | 289 | 4.67 | 22.79 |
| 4 | 768.68 | 25.68 QP | 46.00 | -20.32 | 1.00 H | 133 | 2.35 | 23.32 |
| 5 | 799.78 | 28.04 QP | 46.00 | -17.96 | 1.00 H | 73 | 4.58 | 23.46 |
| 6 | 931.96 | 25.42 QP | 46.00 | -20.58 | 1.00 H | 277 | 0.28 | 25.14 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|--|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 39.72 | 27.08 QP | 40.00 | -12.92 | 1.00 V | 187 | 11.82 | 15.26 |
| 2 | 74.71 | 22.34 QP | 40.00 | -17.66 | 1.00 V | 163 | 11.09 | 11.25 |
| 3 | 115.53 | 32.11 QP | 43.50 | -11.39 | 1.00 V | 97 | 19.69 | 12.42 |
| 4 | 154.41 | 26.82 QP | 43.50 | -16.68 | 1.00 V | 46 | 12.02 | 14.80 |
| 5 | 603.45 | 27.72 QP | 46.00 | -18.28 | 1.00 V | 202 | 6.84 | 20.87 |
| 6 | 867.82 | 26.55 QP | 46.00 | -19.45 | 2.00 V | 58 | 2.32 | 24.23 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 11 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | Below 1000MHz | DETECTOR FUNCTION | Quasi-Peak |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | H | TESTED BY | Brad Wu |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 113.59 | 30.77 QP | 43.50 | -12.73 | 3.00 H | 64 | 18.54 | 12.23 |
| 2 | 665.65 | 26.49 QP | 46.00 | -19.51 | 1.00 H | 139 | 4.85 | 21.64 |
| 3 | 733.69 | 28.25 QP | 46.00 | -17.75 | 3.00 H | 112 | 5.41 | 22.84 |
| 4 | 768.68 | 27.28 QP | 46.00 | -18.72 | 1.00 H | 109 | 3.96 | 23.32 |
| 5 | 799.78 | 28.25 QP | 46.00 | -17.75 | 1.00 H | 61 | 4.79 | 23.46 |
| 6 | 933.91 | 26.40 QP | 46.00 | -19.60 | 1.00 H | 334 | 1.24 | 25.16 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 31.94 | 26.31 QP | 40.00 | -13.69 | 1.00 V | 127 | 12.31 | 14.01 |
| 2 | 74.71 | 21.85 QP | 40.00 | -18.15 | 1.00 V | 136 | 10.60 | 11.25 |
| 3 | 115.53 | 32.58 QP | 43.50 | -10.92 | 1.00 V | 178 | 20.16 | 12.42 |
| 4 | 146.63 | 28.65 QP | 43.50 | -14.85 | 1.00 V | 172 | 14.04 | 14.61 |
| 5 | 768.68 | 25.66 QP | 46.00 | -20.34 | 1.00 V | 340 | 2.34 | 23.32 |
| 6 | 867.82 | 25.63 QP | 46.00 | -20.37 | 1.00 V | 136 | 1.40 | 24.23 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 11 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | Below 1000MHz | DETECTOR FUNCTION | Quasi-Peak |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 24deg. C, 64%RH, 991hPa |
| TEST MODE | I | TESTED BY | Brad Wu |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 113.59 | 24.69 QP | 43.50 | -18.81 | 1.00 H | 271 | 12.55 | 12.14 |
| 2 | 166.07 | 25.51 QP | 43.50 | -17.99 | 1.00 H | 214 | 11.44 | 14.07 |
| 3 | 620.94 | 24.84 QP | 46.00 | -21.16 | 1.25 H | 121 | 3.65 | 21.18 |
| 4 | 865.87 | 24.84 QP | 46.00 | -21.16 | 1.00 H | 94 | 0.41 | 24.43 |
| 5 | 916.41 | 41.39 QP | 46.00 | -4.61 | 1.00 H | 358 | 16.12 | 25.27 |
| 6 | 951.40 | 25.82 QP | 46.00 | -20.18 | 1.25 H | 118 | 0.21 | 25.61 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 63.05 | 28.43 QP | 40.00 | -11.57 | 1.00 V | 277 | 15.32 | 13.11 |
| 2 | 117.47 | 32.96 QP | 43.50 | -10.54 | 1.50 V | 325 | 20.42 | 12.54 |
| 3 | 162.18 | 27.09 QP | 43.50 | -16.41 | 1.00 V | 325 | 12.65 | 14.45 |
| 4 | 199.12 | 23.85 QP | 43.50 | -19.65 | 1.00 V | 196 | 12.65 | 11.20 |
| 5 | 863.93 | 26.41 QP | 46.00 | -19.59 | 1.25 V | 196 | 2.01 | 24.40 |
| 6 | 906.69 | 43.30 QP | 46.00 | -2.70 | 1.00 V | 49 | 18.12 | 25.17 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 11 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | Below 1000MHz | DETECTOR FUNCTION | Quasi-Peak |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 27deg. C, 65%RH, 991hPa |
| TEST MODE | J | TESTED BY | Match Tsui |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 115.53 | 38.98 QP | 43.50 | -4.52 | 1.50 H | 262 | 26.64 | 12.34 |
| 2 | 164.13 | 30.85 QP | 43.50 | -12.65 | 2.00 H | 190 | 16.60 | 14.26 |
| 3 | 210.78 | 34.16 QP | 43.50 | -9.34 | 1.00 H | 259 | 22.76 | 11.40 |
| 4 | 257.43 | 28.11 QP | 46.00 | -17.89 | 1.00 H | 106 | 14.92 | 13.19 |
| 5 | 451.82 | 31.71 QP | 46.00 | -14.29 | 2.00 H | 307 | 13.78 | 17.94 |
| 6 | 597.62 | 28.18 QP | 46.00 | -17.82 | 1.50 H | 316 | 7.34 | 20.83 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 33.89 | 23.88 QP | 40.00 | -16.12 | 1.00 V | 4 | 9.88 | 14.00 |
| 2 | 64.99 | 28.39 QP | 40.00 | -11.61 | 1.00 V | 280 | 15.49 | 12.90 |
| 3 | 115.53 | 39.52 QP | 43.50 | -3.98 | 1.00 V | 10 | 27.18 | 12.34 |
| 4 | 162.18 | 31.06 QP | 43.50 | -12.44 | 1.50 V | 25 | 16.61 | 14.45 |
| 5 | 204.95 | 28.18 QP | 43.50 | -15.32 | 1.00 V | 193 | 16.92 | 11.25 |
| 6 | 399.34 | 28.66 QP | 46.00 | -17.34 | 1.50 V | 145 | 12.04 | 16.62 |
| 7 | 449.88 | 36.53 QP | 46.00 | -9.47 | 1.00 V | 319 | 18.62 | 17.91 |
| 8 | 935.85 | 29.36 QP | 46.00 | -16.64 | 1.00 V | 241 | 3.89 | 25.47 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 11 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | Below 1000MHz | DETECTOR FUNCTION | Quasi-Peak |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 27deg. C, 65%RH, 991hPa |
| TEST MODE | K | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 117.47 | 39.49 QP | 43.50 | -4.01 | 1.50 H | 286 | 26.95 | 12.54 |
| 2 | 173.85 | 31.33 QP | 43.50 | -12.17 | 1.50 H | 163 | 18.02 | 13.31 |
| 3 | 204.95 | 29.64 QP | 43.50 | -13.86 | 1.00 H | 76 | 18.39 | 11.25 |
| 4 | 259.38 | 30.57 QP | 46.00 | -15.43 | 1.00 H | 67 | 17.36 | 13.21 |
| 5 | 352.69 | 26.72 QP | 46.00 | -19.28 | 1.00 H | 55 | 11.20 | 15.53 |
| 6 | 451.82 | 33.87 QP | 46.00 | -12.13 | 2.00 H | 301 | 15.93 | 17.94 |
| 7 | 597.62 | 28.94 QP | 46.00 | -17.06 | 1.50 H | 319 | 8.11 | 20.83 |
| 8 | 733.69 | 28.97 QP | 46.00 | -17.03 | 1.00 H | 238 | 5.93 | 23.03 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 31.94 | 26.28 QP | 40.00 | -13.72 | 1.00 V | 4 | 12.60 | 13.68 |
| 2 | 64.99 | 23.62 QP | 40.00 | -16.38 | 1.00 V | 316 | 10.72 | 12.90 |
| 3 | 115.53 | 36.97 QP | 43.50 | -6.53 | 1.50 V | 7 | 24.63 | 12.34 |
| 4 | 158.30 | 29.93 QP | 43.50 | -13.57 | 1.00 V | 109 | 15.31 | 14.62 |
| 5 | 206.89 | 29.29 QP | 43.50 | -14.21 | 1.00 V | 193 | 17.99 | 11.30 |
| 6 | 259.38 | 28.94 QP | 46.00 | -17.06 | 1.50 V | 1 | 15.73 | 13.21 |
| 7 | 401.28 | 28.26 QP | 46.00 | -17.74 | 2.00 V | 193 | 11.59 | 16.67 |
| 8 | 451.82 | 35.85 QP | 46.00 | -10.15 | 1.00 V | 232 | 17.91 | 17.94 |
| 9 | 498.48 | 28.13 QP | 46.00 | -17.87 | 1.00 V | 226 | 9.57 | 18.57 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

| | | | |
|----------------------|-----------------|--------------------------|-------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 11 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | Below 1000MHz | DETECTOR FUNCTION | Quasi-Peak |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 27deg. C, 65%RH, 991hPa |
| TEST MODE | L | TESTED BY | Match Tsui |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 70.82 | 23.67 QP | 40.00 | -16.33 | 1.00 H | 250 | 11.54 | 12.12 |
| 2 | 115.53 | 39.43 QP | 43.50 | -4.07 | 1.50 H | 253 | 27.09 | 12.34 |
| 3 | 173.85 | 29.30 QP | 43.50 | -14.20 | 1.50 H | 280 | 15.99 | 13.31 |
| 4 | 212.73 | 31.23 QP | 43.50 | -12.27 | 1.50 H | 100 | 19.78 | 11.45 |
| 5 | 257.43 | 32.65 QP | 46.00 | -13.35 | 1.00 H | 73 | 19.46 | 13.19 |
| 6 | 449.88 | 33.95 QP | 46.00 | -12.05 | 2.00 H | 292 | 16.05 | 17.91 |
| 7 | 467.37 | 30.76 QP | 46.00 | -15.24 | 2.00 H | 226 | 12.61 | 18.15 |
| 8 | 731.74 | 27.55 QP | 46.00 | -18.45 | 1.00 H | 241 | 4.56 | 22.99 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 39.72 | 24.37 QP | 40.00 | -15.63 | 1.50 V | 61 | 9.45 | 14.92 |
| 2 | 70.82 | 28.35 QP | 40.00 | -11.65 | 2.00 V | 100 | 16.22 | 12.12 |
| 3 | 115.53 | 36.64 QP | 43.50 | -6.86 | 1.50 V | 349 | 24.29 | 12.34 |
| 4 | 160.24 | 30.41 QP | 43.50 | -13.09 | 1.00 V | 115 | 15.78 | 14.63 |
| 5 | 193.29 | 29.40 QP | 43.50 | -14.10 | 1.00 V | 343 | 17.74 | 11.66 |
| 6 | 259.38 | 29.47 QP | 46.00 | -16.53 | 2.00 V | 358 | 16.26 | 13.21 |
| 7 | 401.28 | 28.73 QP | 46.00 | -17.27 | 1.50 V | 325 | 12.06 | 16.67 |
| 8 | 449.88 | 36.12 QP | 46.00 | -9.88 | 1.00 V | 331 | 18.21 | 17.91 |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

| | | | |
|----------------------|-----------------|--------------------------|---------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 1 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | 1 ~ 25GHZ | DETECTOR FUNCTION | Peak (PK) AVERAGE (AV) |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | J | TESTED BY | Brad Wu |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1880.00 | 55.81 PK | 74.00 | -18.19 | 1.04 H | 335 | 25.79 | 30.02 |
| 1 | 1880.00 | 46.00 AV | 54.00 | -8.00 | 1.04 H | 335 | 15.98 | 30.02 |
| 2 | 2390.00 | 50.41 PK | 74.00 | -23.59 | 1.36 H | 154 | 18.54 | 31.87 |
| 2 | 2390.00 | 40.51 AV | 54.00 | -13.49 | 1.36 H | 154 | 8.64 | 31.87 |
| 3 | *2412.00 | 107.51 PK | | | 1.36 H | 154 | 75.55 | 31.96 |
| 3 | *2412.00 | 97.61 AV | | | 1.36 H | 154 | 65.65 | 31.96 |
| 4 | 4824.00 | 48.99 PK | 74.00 | -25.01 | 1.03 H | 152 | 11.16 | 37.83 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1880.00 | 54.15 PK | 74.00 | -19.85 | 1.04 V | 135 | 24.13 | 30.02 |
| 1 | 1880.00 | 44.25 AV | 54.00 | -9.75 | 1.04 V | 135 | 14.23 | 30.02 |
| 2 | 2390.00 | 51.18 PK | 74.00 | -22.82 | 1.02 V | 137 | 19.31 | 31.87 |
| 2 | 2390.00 | 41.83 AV | 54.00 | -12.17 | 1.02 V | 137 | 9.96 | 31.87 |
| 3 | *2412.00 | 108.91 PK | | | 1.02 V | 137 | 76.95 | 31.96 |
| 3 | *2412.00 | 98.93 AV | | | 1.02 V | 137 | 66.97 | 31.96 |
| 4 | 4824.00 | 49.97 PK | 74.00 | -24.03 | 1.00 V | 234 | 12.14 | 37.83 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

| | | | |
|----------------------|-----------------|--------------------------|---------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 6 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | 1 ~ 25GHZ | DETECTOR FUNCTION | Peak (PK) AVERAGE (AV) |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | J | TESTED BY | Brad Wu |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1918.00 | 58.92 PK | 74.00 | -15.08 | 1.02 H | 221 | 28.82 | 30.10 |
| 1 | 1918.00 | 48.37 AV | 54.00 | -5.63 | 1.02 H | 221 | 18.27 | 30.10 |
| 2 | *2437.00 | 106.15 PK | | | 1.34 H | 165 | 74.09 | 32.06 |
| 2 | *2437.00 | 96.43 AV | | | 1.34 H | 165 | 64.37 | 32.06 |
| 3 | 4874.00 | 48.62 PK | 74.00 | -25.38 | 1.18 H | 213 | 10.64 | 37.98 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1918.00 | 57.63 PK | 74.00 | -16.37 | 1.02 V | 155 | 27.53 | 30.10 |
| 1 | 1918.00 | 47.71 AV | 54.00 | -6.29 | 1.02 V | 155 | 17.61 | 30.10 |
| 2 | *2437.00 | 108.68 PK | | | 1.02 V | 157 | 76.62 | 32.06 |
| 2 | *2437.00 | 98.52 AV | | | 1.02 V | 157 | 66.46 | 32.06 |
| 3 | 4874.00 | 49.07 PK | 74.00 | -24.93 | 1.22 V | 210 | 11.09 | 37.98 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.

| | | | |
|----------------------|-----------------|--------------------------|---------------------------|
| EUT | Pocket PC Phone | MEASUREMENT DETAIL | |
| MODEL | HSTNH-H06C-WL | MODULATION TYPE | CCK |
| CHANNEL | Channel 11 | TRANSFER RATE | 11Mbps |
| FREQUENCY RANGE | 1 ~ 25GHZ | DETECTOR FUNCTION | Peak (PK) AVERAGE (AV) |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 62%RH, 991hPa |
| TEST MODE | J | TESTED BY | Brad Wu |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1953.00 | 59.27 PK | 74.00 | -14.73 | 1.05 H | 217 | 29.10 | 30.17 |
| 1 | 1953.00 | 49.65 AV | 54.00 | -4.35 | 1.05 H | 217 | 19.48 | 30.17 |
| 2 | *2462.00 | 107.62 PK | | | 1.35 H | 166 | 75.46 | 32.16 |
| 2 | *2462.00 | 97.75 AV | | | 1.35 H | 166 | 65.59 | 32.16 |
| 3 | 2485.00 | 59.94 PK | 74.00 | -14.06 | 1.35 H | 166 | 27.69 | 32.25 |
| 3 | 2485.00 | 50.07 AV | 54.00 | -3.93 | 1.35 H | 166 | 17.82 | 32.25 |
| 4 | 4924.00 | 47.65 PK | 74.00 | -26.35 | 1.04 H | 195 | 9.51 | 38.14 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----------|----------------|-------------------------|----------------|--------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 1953.00 | 58.19 PK | 74.00 | -15.81 | 1.01 V | 146 | 28.02 | 30.17 |
| 1 | 1953.00 | 48.13 AV | 54.00 | -5.87 | 1.01 V | 146 | 17.96 | 30.17 |
| 2 | *2462.00 | 109.40 PK | | | 1.00 V | 144 | 77.24 | 32.16 |
| 2 | *2462.00 | 99.24 AV | | | 1.00 V | 144 | 67.08 | 32.16 |
| 3 | 2485.00 | 61.72 PK | 74.00 | -12.28 | 1.00 V | 144 | 29.47 | 32.25 |
| 3 | 2485.00 | 51.56 AV | 54.00 | -2.44 | 1.00 V | 144 | 19.31 | 32.25 |
| 4 | 4924.00 | 48.27 PK | 74.00 | -25.73 | 1.11 V | 156 | 10.13 | 38.14 |

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER | FSEK 30 | 100049 | Aug. 14, 2006 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

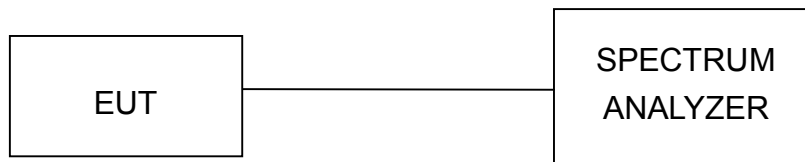

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS


| | | | |
|-----------------------------|-----------------|---------------------------------|-------------------------|
| EUT | Pocket PC Phone | MODEL | HSTNH-H06C-WL |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 63%RH, 991hPa |
| TESTED BY | Long Chen | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS/FAIL |
|----------------|--------------------------------|----------------------------|----------------------------|------------------|
| 1 | 2412 | 12.48 | 0.5 | PASS |
| 6 | 2437 | 11.52 | 0.5 | PASS |
| 11 | 2462 | 11.16 | 0.5 | PASS |

CH1

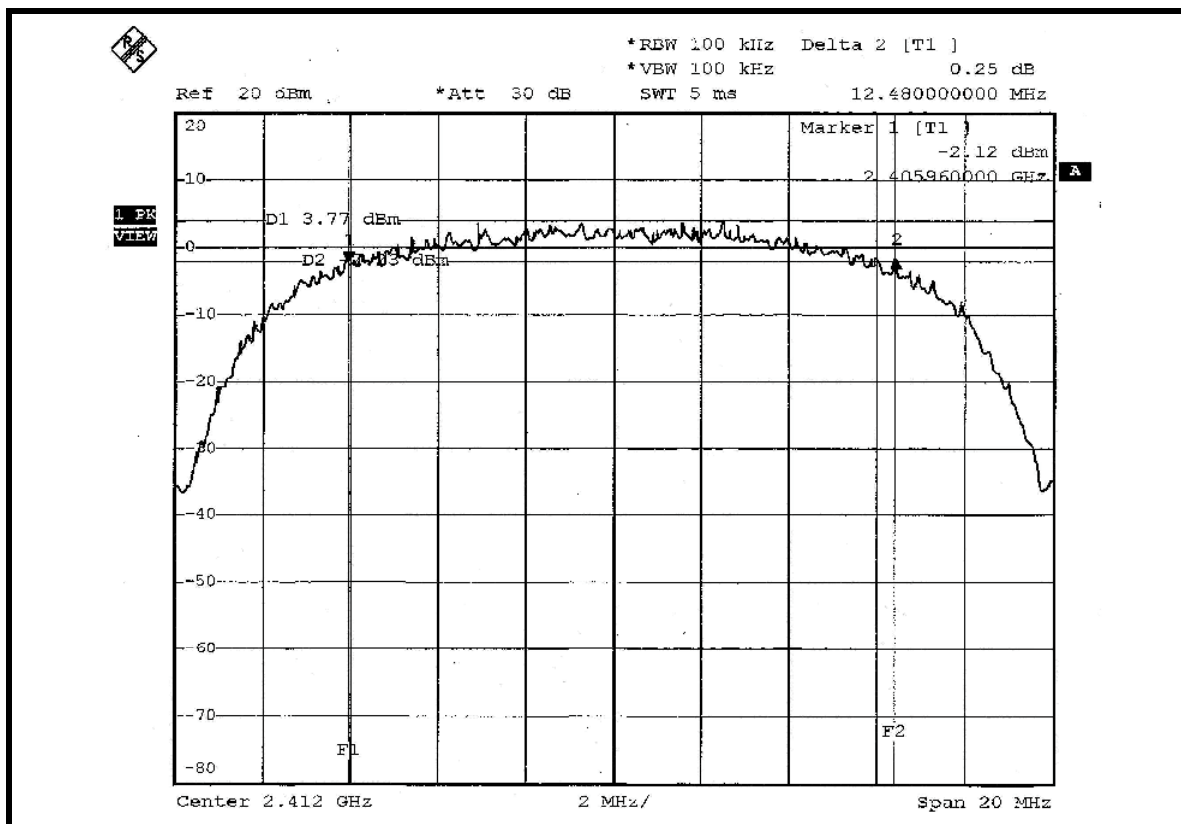


CH6

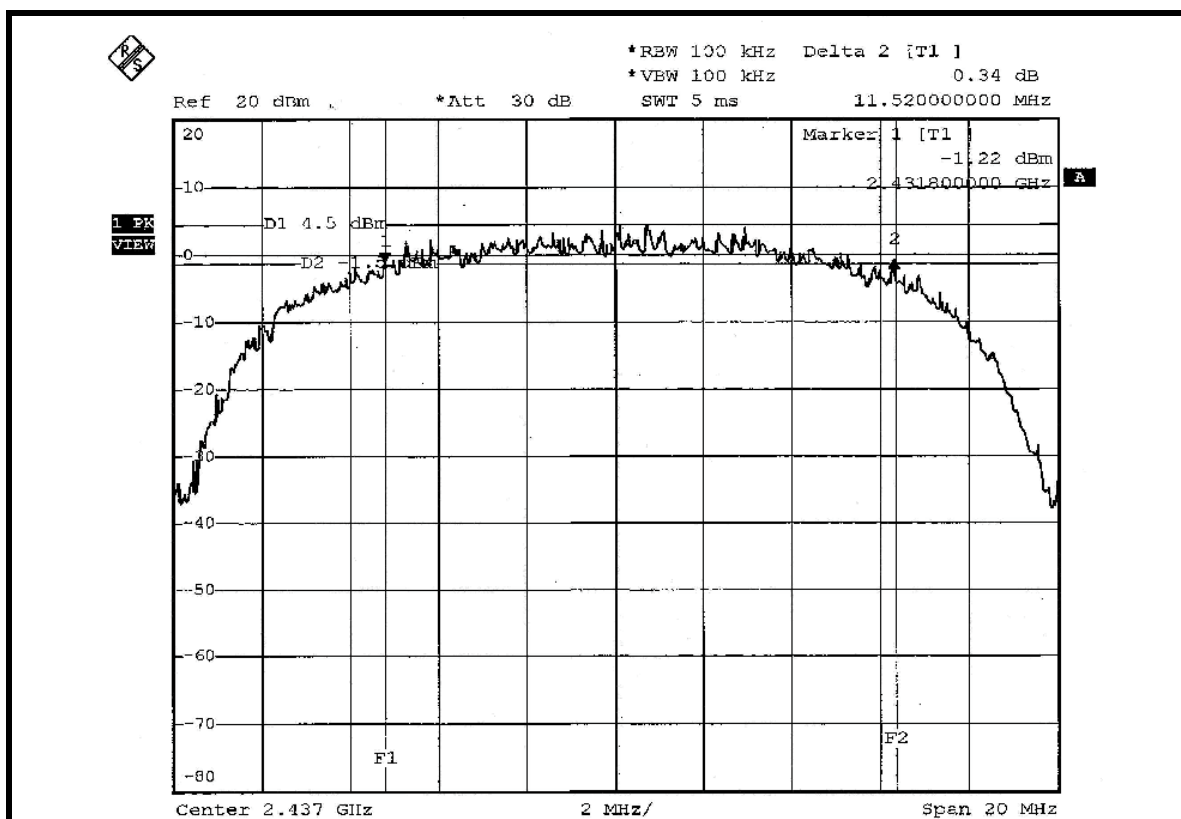



CH11

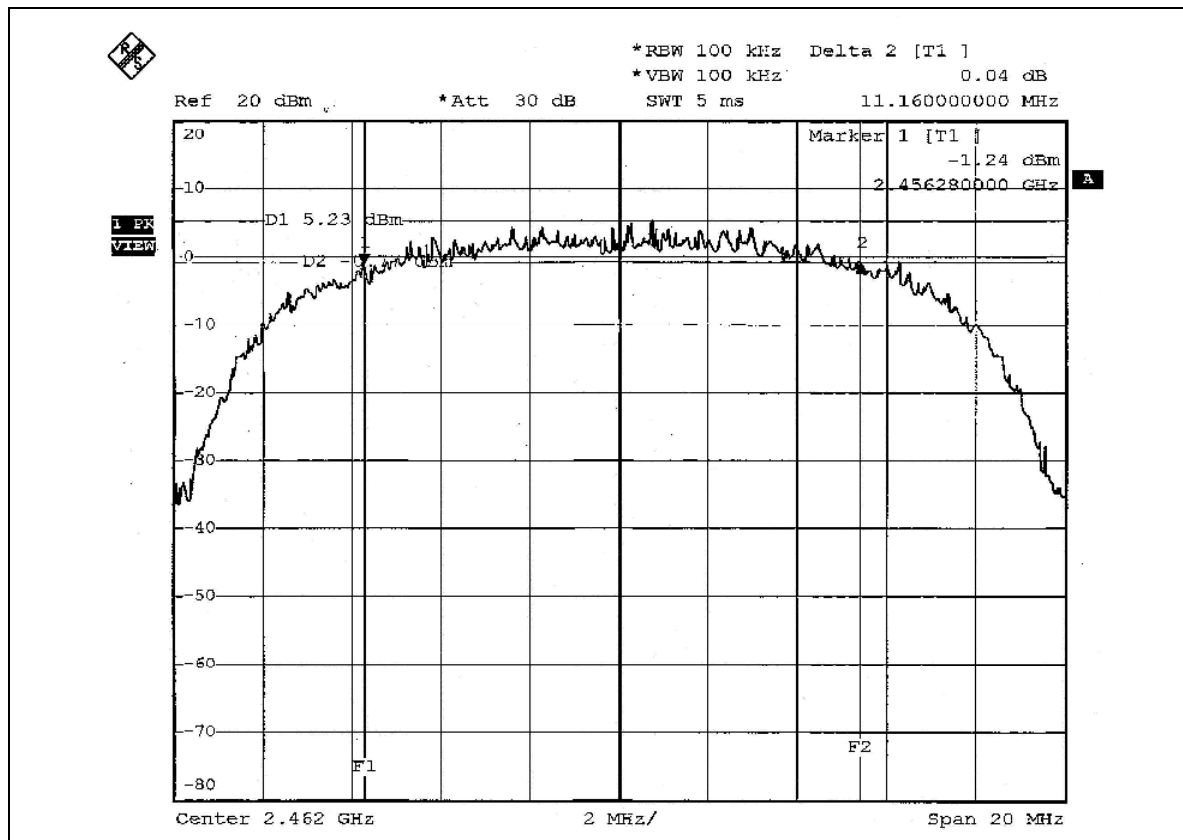

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| R&S SPECTRUM ANALYZER | FSEK30 | 100049 | Aug. 14, 2006 |
| AGILENT SIGNAL GENERATOR | E8257C | MY43320668 | Dec. 06, 2005 |
| DIGITAL RT OSCILLOSCOPE | TDS1012 | C037299 | Dec. 07, 2005 |
| NARDA DETECTOR | 4503A | FSCM99899 | NA |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

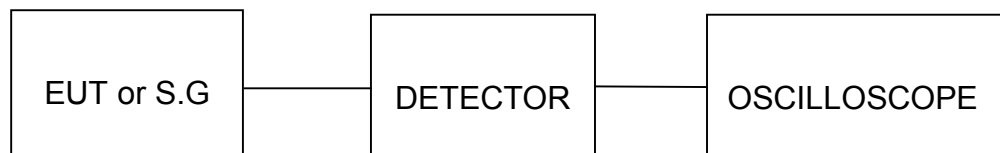

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

| | | | |
|-----------------------------|-----------------|---------------------------------|-------------------------|
| EUT | Pocket PC Phone | MODEL | HSTNH-H06C-WL |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 63%RH, 991hPa |
| TESTED BY | Long Chen | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | PEAK POWER OUTPUT (mW) | PEAK POWER OUTPUT (dBm) | PEAK POWER LIMIT (dBm) | PASS/FAIL |
|---------|-------------------------|------------------------|-------------------------|------------------------|-----------|
| 1 | 2412 | 31.623 | 15.00 | 30 | PASS |
| 6 | 2437 | 33.497 | 15.25 | 30 | PASS |
| 11 | 2462 | 35.481 | 15.50 | 30 | PASS |



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| R&S SPECTRUM ANALYZER | FSEK30 | 100049 | Aug. 14, 2006 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




4.5.7 TEST RESULTS


| | | | |
|-----------------------------|-----------------|---------------------------------|-------------------------|
| EUT | Pocket PC Phone | MODEL | HSTNH-H06C-WL |
| MODULATION TYPE | CCK | TRANSFER RATE | 11Mbps |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 22deg. C, 63%RH, 991hPa |
| TESTED BY | Long Chen | | |

| CHANNEL | CHANNEL FREQUENCY (MHz) | RF POWER LEVEL IN 3kHz BW (dBm) | MAXIMUM LIMIT (dBm) | PASS/FAIL |
|---------|--------------------------|---------------------------------|---------------------|-----------|
| 1 | 2412 | -10.69 | 8 | PASS |
| 6 | 2437 | -10.66 | 8 | PASS |
| 11 | 2462 | -10.24 | 8 | PASS |

CH1

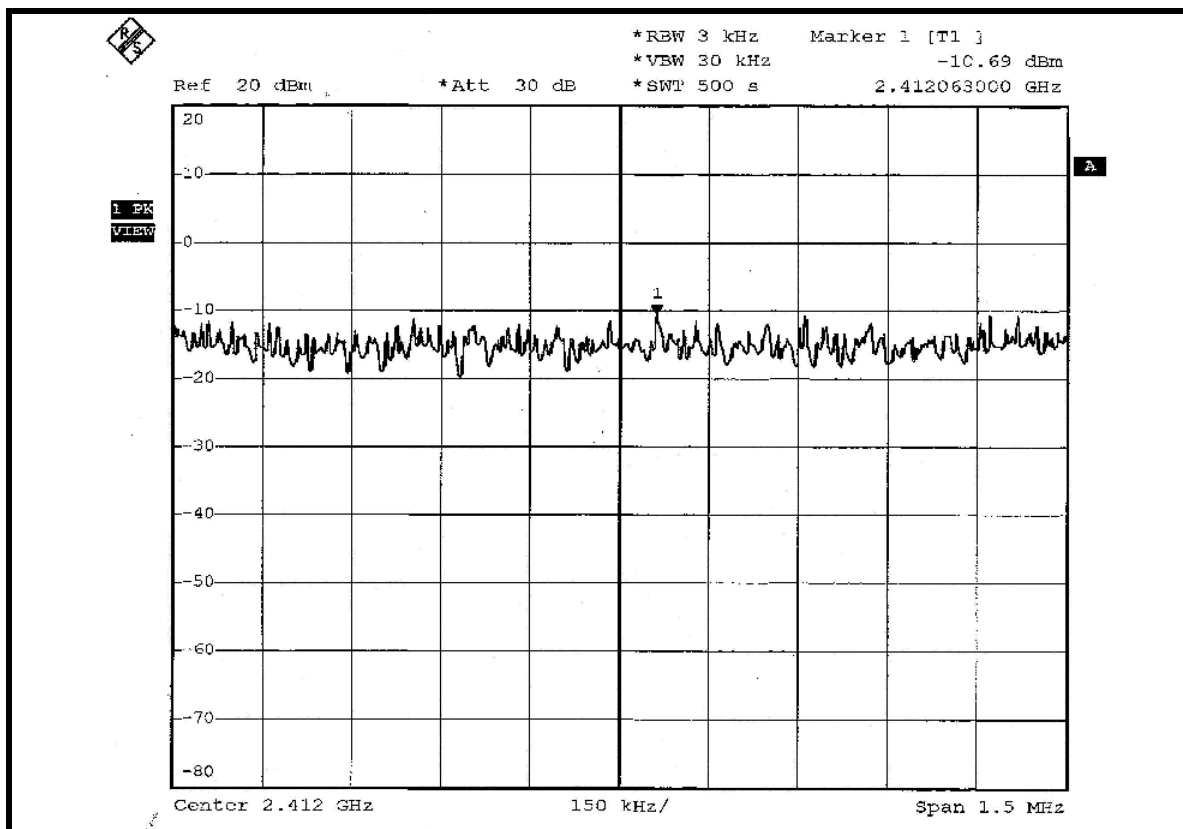


CH6

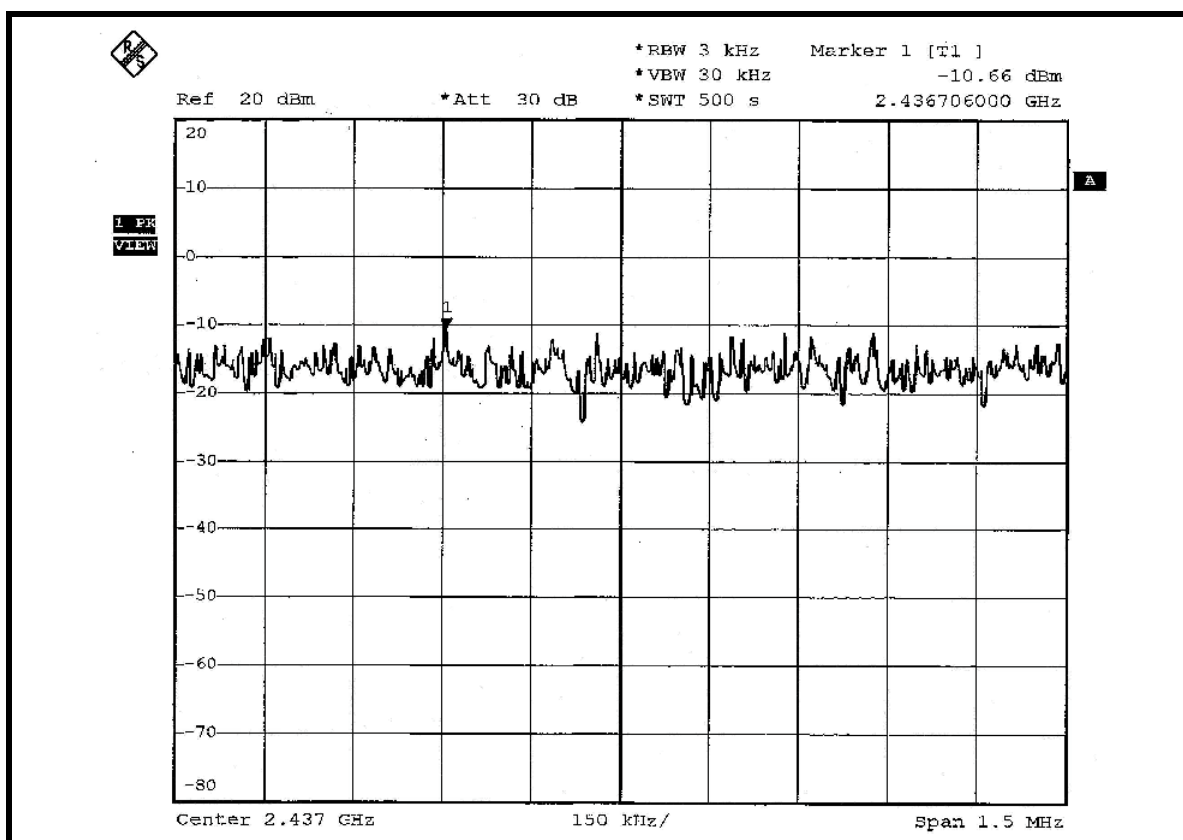



CH11

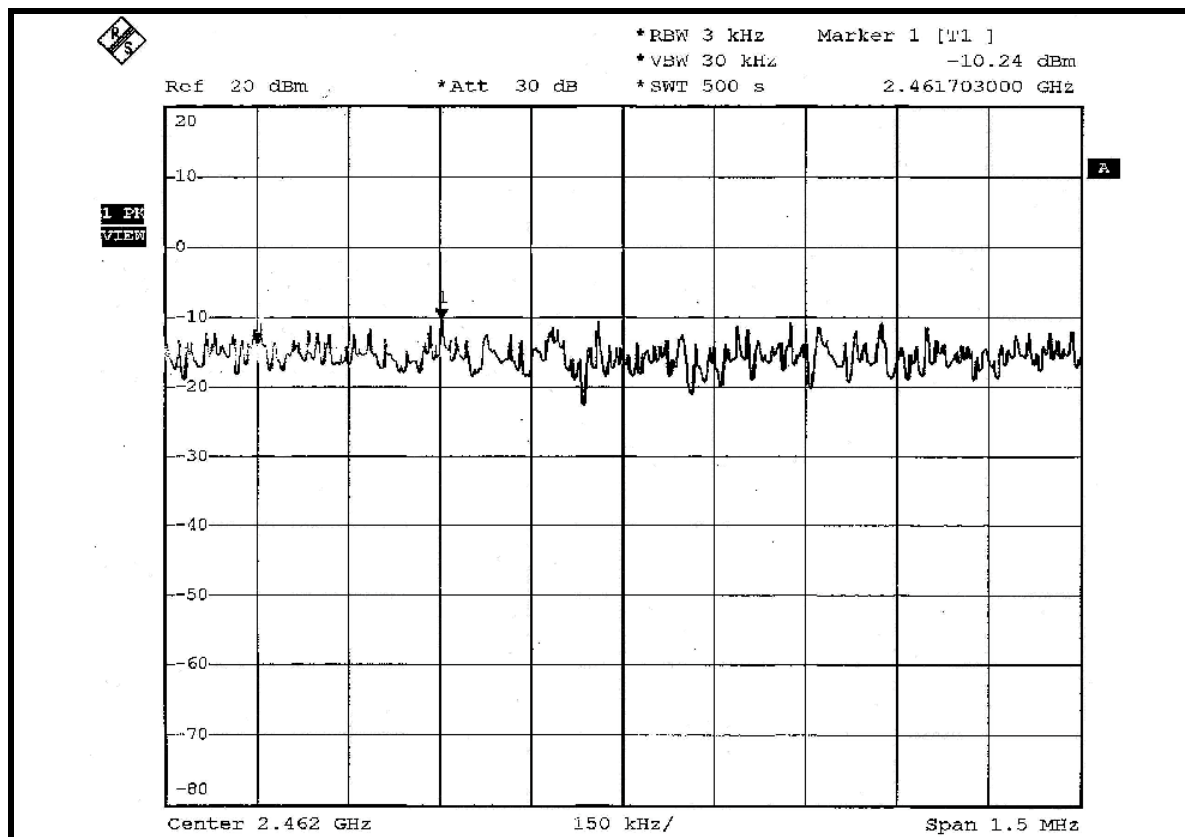

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|----------------------------|-----------|------------|------------------|
| R&S SPECTRUM ANALYZER | FSEK30 | 100049 | Aug. 14, 2006 |

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

NOTE 1:



The band edge emission plot on page 72 show 50.74dBc delta between carrier maximum power and local maximum emission in restrict band (2.3871GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 108.91dBuV/m (Peak), so the maximum field strength in restrict band is $108.91 - 50.74 = 58.17$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on page 72 show 53.70dBc delta between carrier maximum power and local maximum emission in restrict band (2.3870GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.93dBuV/m (Average), so the maximum field strength in restrict band is $98.93 - 53.70 = 45.23$ dBuV/m, which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot on the page 73 show 52.42dBc delta between carrier maximum power and local maximum emission in restrict band (2.4865GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 109.40dBuV/m (Peak), so the maximum field strength in restrict band is $109.40 - 52.42 = 56.98$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on the page 74 show 52.48dBc delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 99.24dBuV/m (Average), so the maximum field strength in restrict band is $99.24 - 52.48 = 46.76$ dBuV/m, which is under 54dBuV/m limit.

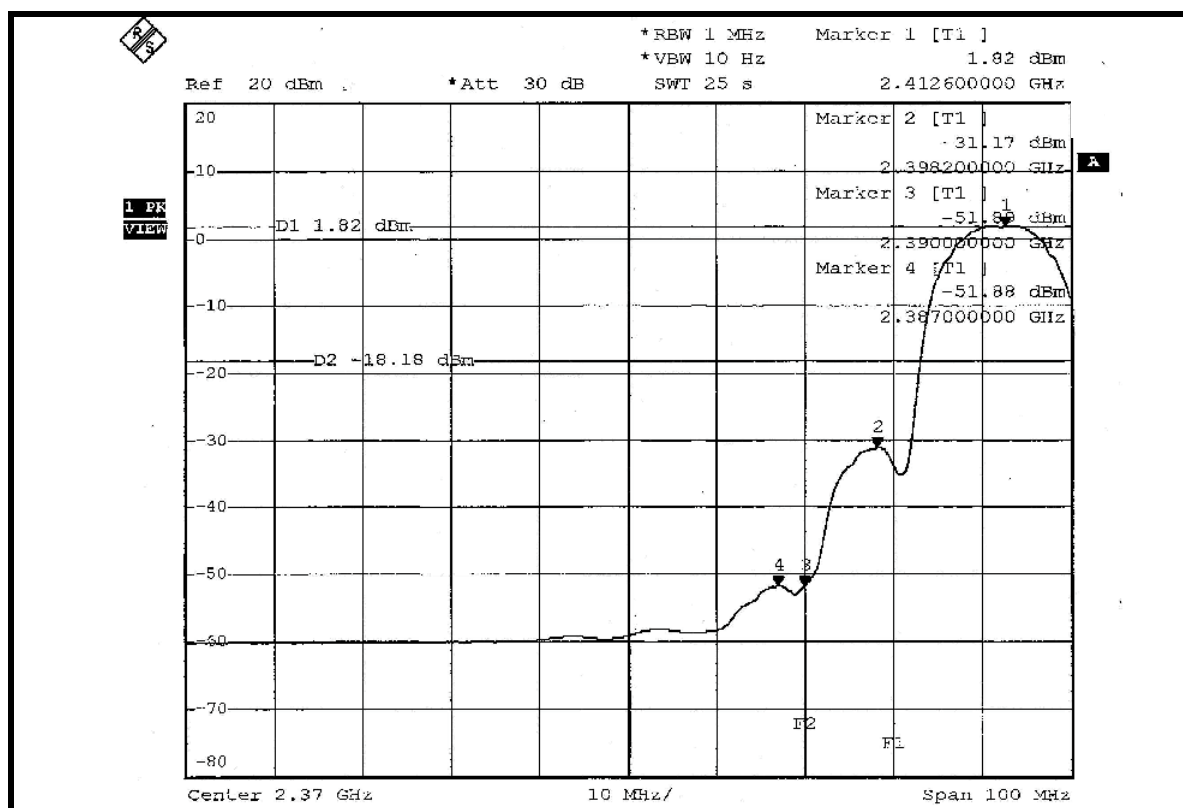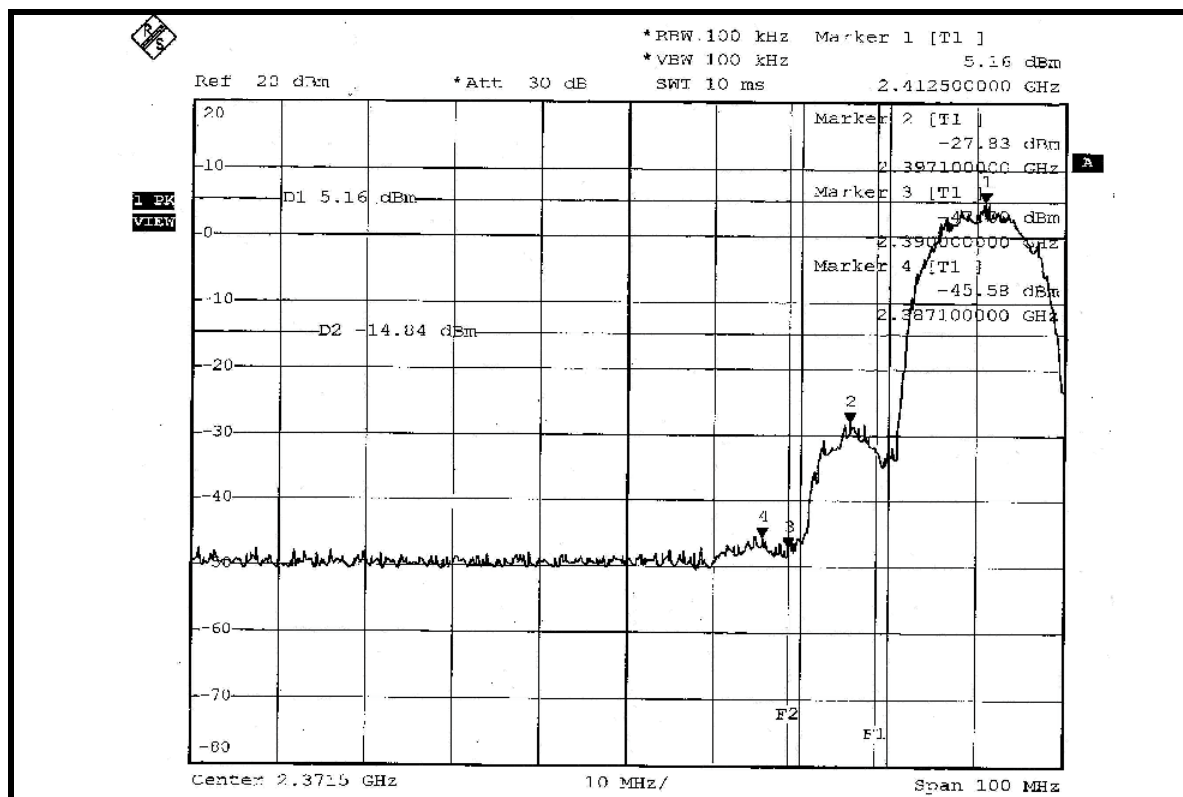

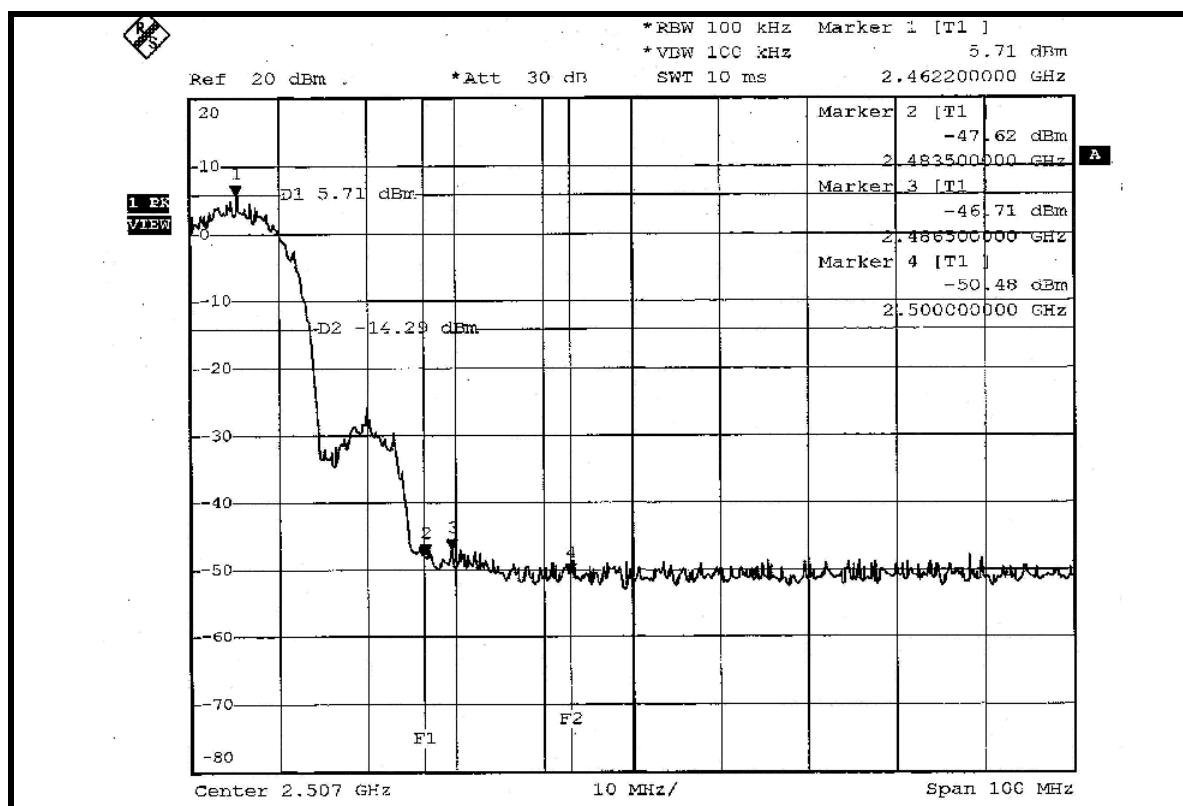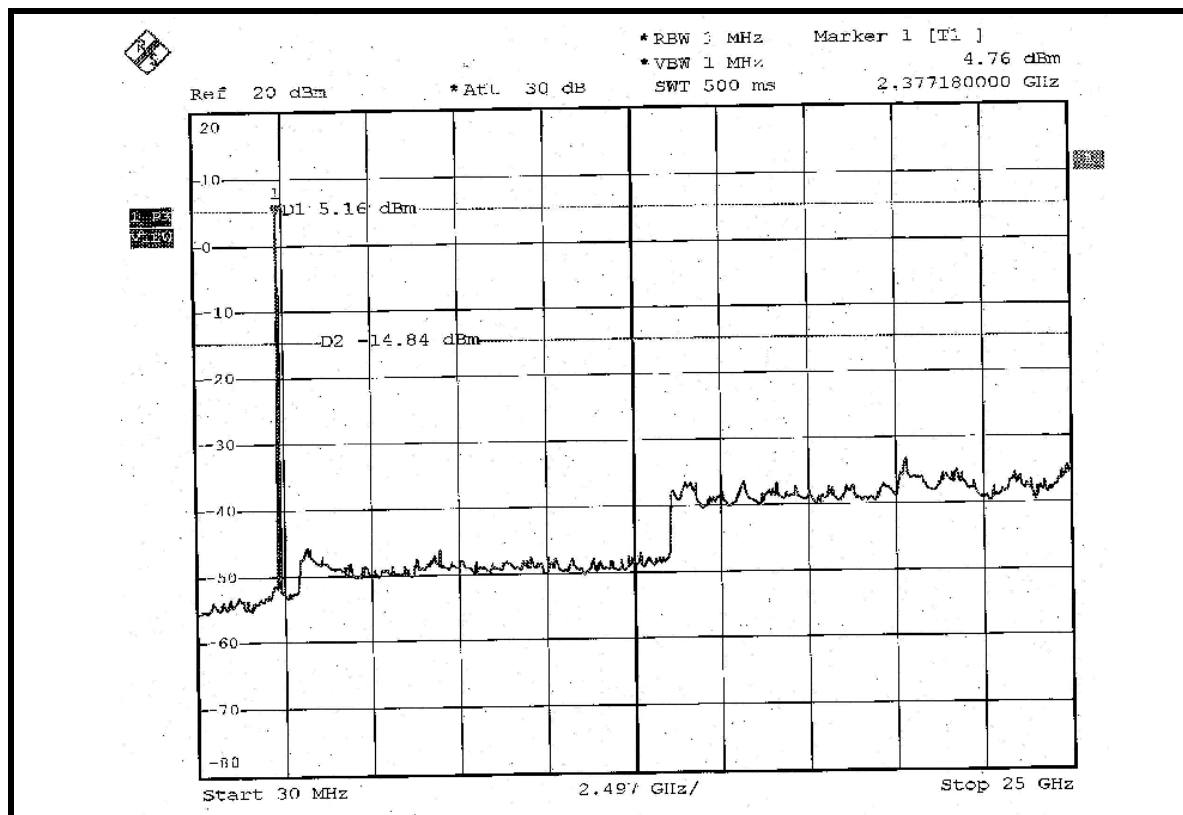

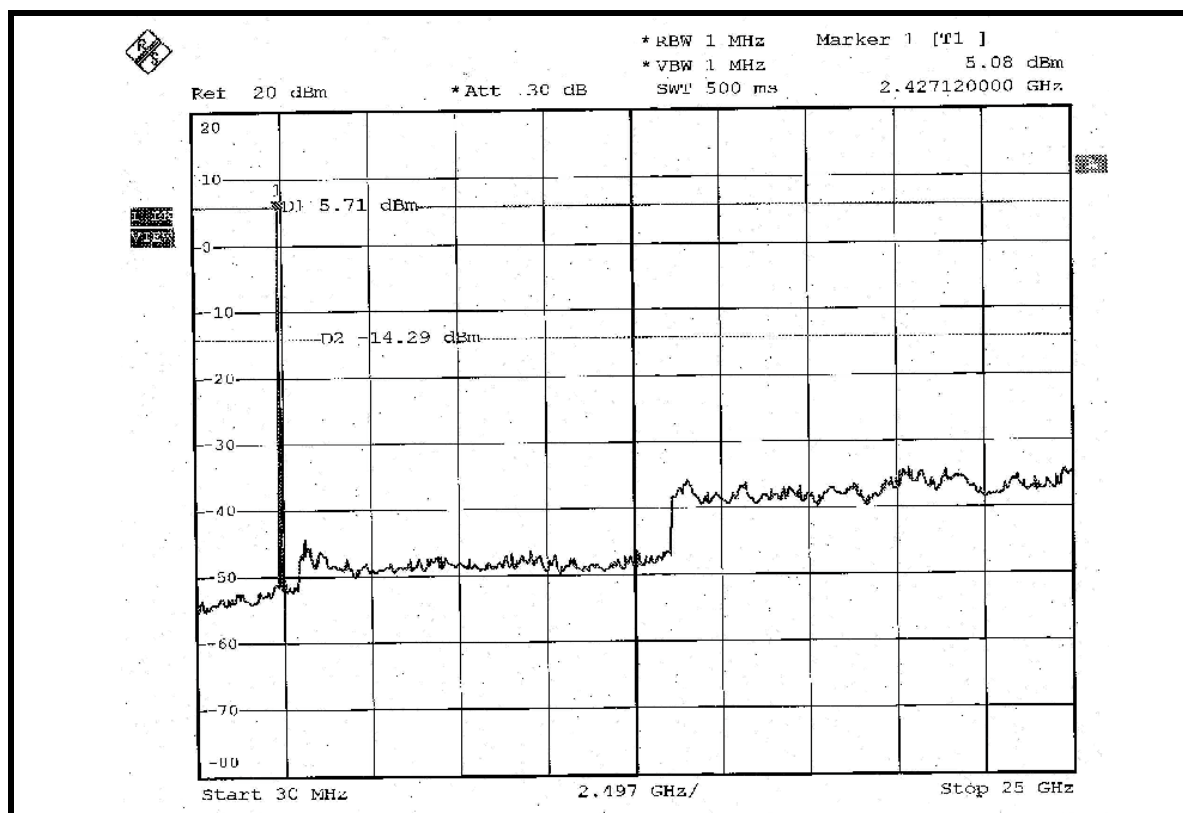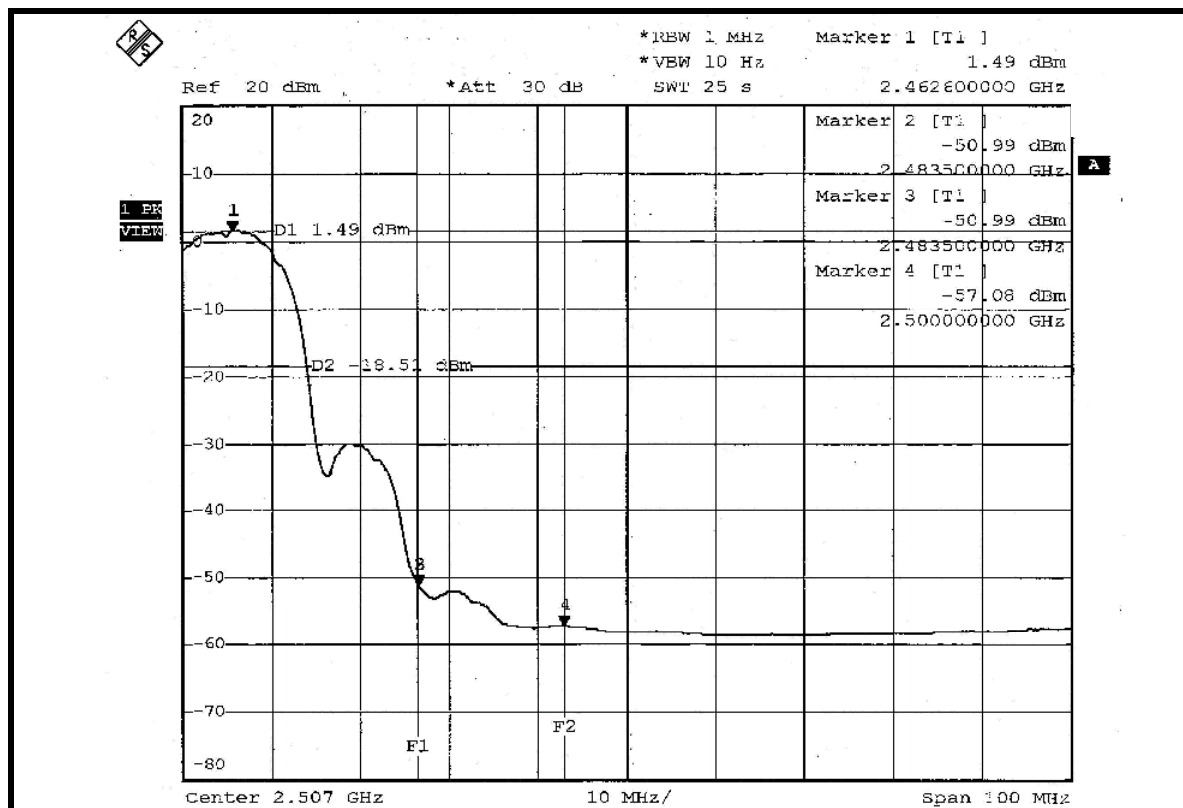

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna without connector. The maximum Gain of the antenna is 1dBi.