




Simultaneous Tx Radiated Spurious Emissions Measurements (Below 1GHz) §15.209; RSS-Gen [8.9]

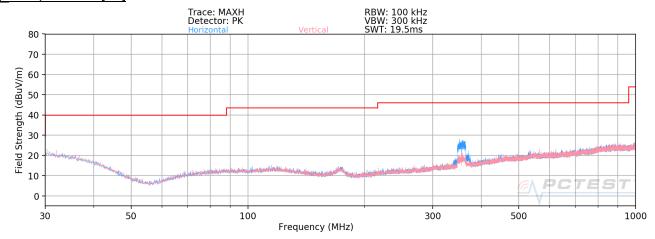

Plot 7-348. Radiated Spurious Plot below 1GHz (2.4GHz - 5GHz)

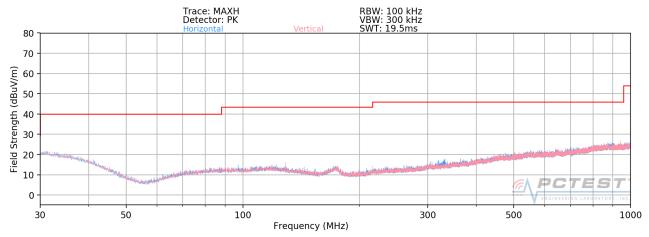

Plot 7-349. Radiated Spurious Plot below 1GHz (5GHz - 2.4 GHz)

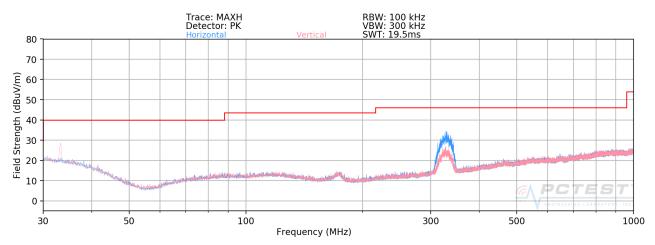

Plot 7-350. Radiated Spurious Plot below 1GHz (Dual Band Simult. Tx)

FCC ID: ZNFV600AM	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dags 227 of 224
1M1912300229-07.ZNF	12/30/2019 - 2/03/2020	Portable Handset	Page 227 of 234



7.8 Line-Conducted Test Data

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)		
(1411 12)	Quasi-peak	Average	
0.15 – 0.5	66 to 56*	56 to 46*	
0.5 – 5	56	46	
5 – 30	60	50	

Table 7-70. Conducted Limits

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the spurious emission of interest
- 2. RBW = 9kHz (for emissions from 150kHz 30MHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

Average Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the spurious emission of interest
- RBW = 9kHz (for emissions from 150kHz 30MHz)
- 3. Detector = RMS
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize

FCC ID: ZNFV600AM	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 228 of 234
1M1912300229-07.ZNF	12/30/2019 - 2/03/2020	Portable Handset	Fage 220 01 234

^{*}Decreases with the logarithm of the frequency.



Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

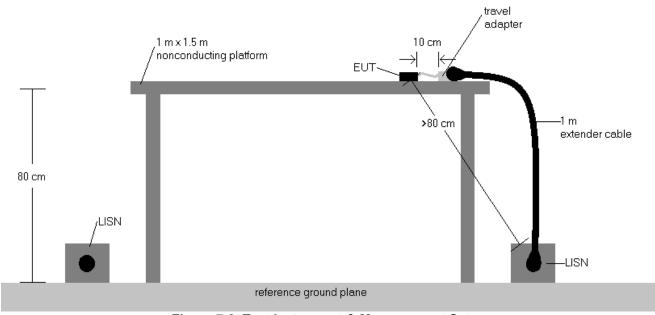


Figure 7-8. Test Instrument & Measurement Setup


Test Notes

- 1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
- 2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
- 3. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- 4. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Corr. (dB)
- 5. Margin (dB) = QP/AV Limit (dB μ V) - QP/AV Level (dB μ V)
- 6. Traces shown in plot are made using a peak detector.
- 7. Deviations to the Specifications: None.


FCC ID: ZNFV600AM	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dags 220 of 224
1M1912300229-07.ZNF	12/30/2019 - 2/03/2020	Portable Handset	Page 229 of 234
© 2020 PCTEST			V 9.0 02/01/2019

V 9.0 02/01/2019



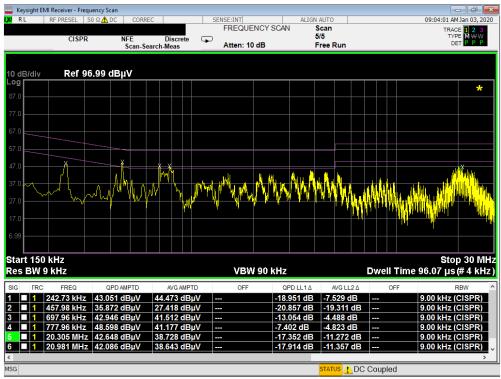

Plot 7-351. Line Conducted Plot with 802.11a UNII Band 1 (L1)

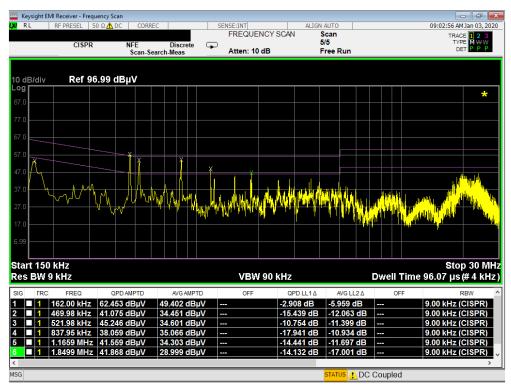


Plot 7-352. Line Conducted Plot with 802.11a UNII Band 1 (N)

FCC ID: ZNFV600AM	PCTEST	MEASUREMENT REPORT (CERTIFICATION) LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 230 of 234
1M1912300229-07.ZNF	12/30/2019 - 2/03/2020	Portable Handset	Fage 230 01 234


© 2020 PCTEST

All rights reserved. Unless atherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical including photocopying and



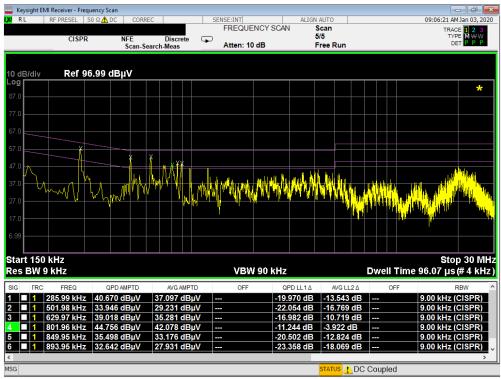

Plot 7-353. Line Conducted Plot with 802.11a UNII Band 2A (L1)

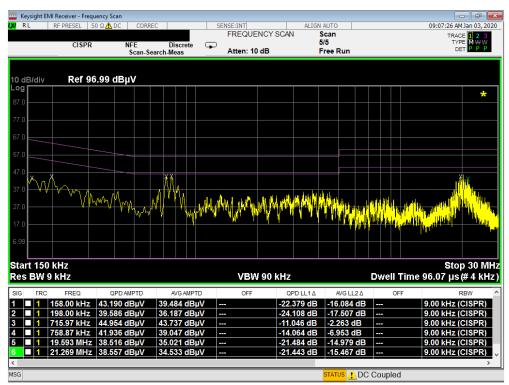


Plot 7-354. Line Conducted Plot with 802.11a UNII Band 2A (N)


FCC ID: ZNFV600AM	PCTEST*	MEASUREMENT REPORT (CERTIFICATION) LG	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 231 of 234
1M1912300229-07.ZNF	12/30/2019 - 2/03/2020	Portable Handset	Fage 23 0 234

© 2020 PCTEST V 9.0 02/01/2019



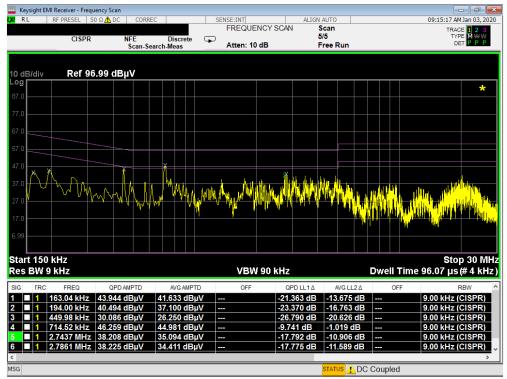

Plot 7-355. Line Conducted Plot with 802.11a UNII Band 2C (L1)

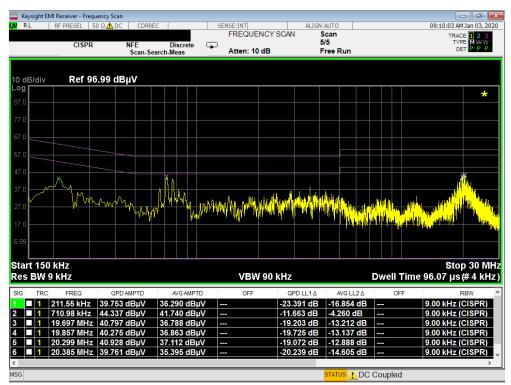


Plot 7-356. Line Conducted Plot with 802.11a UNII Band 2C (N)


FCC ID: ZNFV600AM	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dama 222 of 224
1M1912300229-07.ZNF	12/30/2019 - 2/03/2020	Portable Handset	Page 232 of 234

© 2020 PCTEST



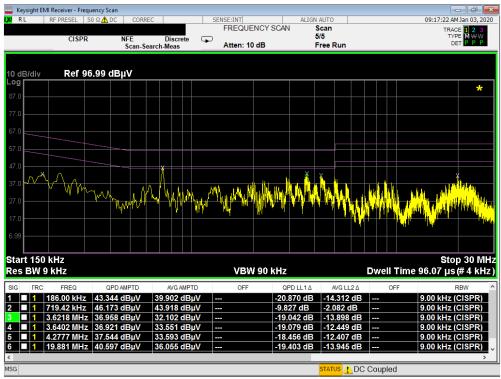

Plot 7-357. Line Conducted Plot with 802.11a UNII Band 3 (L1)

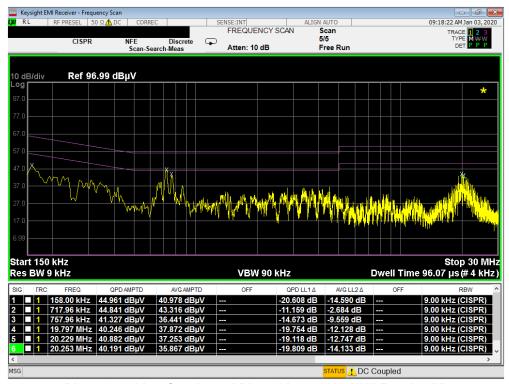

Plot 7-358. Line Conducted Plot with 802.11a UNII Band 3 (N)

FCC ID: ZNFV600AM	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:	Dog 022 of 024
1M1912300229-07.ZNF	12/30/2019 - 2/03/2020	Portable Handset	Page 233 of 234

© 2020 PCTEST



8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFV600AM** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules.

FCC ID: ZNFV600AM	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	_G	Approved by: Quality Manager
Test Report S/N:	Test Dates:	EUT Type:		Dags 224 of 224
1M1912300229-07.ZNF	12/30/2019 - 2/03/2020	Portable Handset		Page 234 of 234