

EMC TEST REPORT

FCC 47 CFR Part 15B
Industry Canada RSS-Gen

Electromagnetic compatibility - Unintentional radiators

Report Reference No. : G0M-1403-3710-EF0115B-V01

Testing Laboratory : Eurofins Product Service GmbH

Address : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation :



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A

Applicant's name : GN Netcom A/S

Address : Lautrupbjerg 7
2750 Ballerup
DENMARK

Test specification:

Standard..... : 47 CFR Part 15 Subpart B
RSS-Gen, Issue 3, 2010-12
ANSI C63.4:2009

Equipment under test (EUT):

Product description	Bluetooth headset	
Model No.	BTE7	
Additional Models	None	
Hardware version	28-04125	
Firmware / Software version	020	
Contains	FCC-ID: BCE-BTE7	IC: 2386C-BTE7
Test result	Passed	

Test Report No.: G0M-1403-3710-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Possible test case verdicts:

- not applicable to test object : N/A
- test object does meet the requirement..... : P (Pass)
- test object does not meet the requirement..... : F (Fail)

Testing:

Date of receipt of test item : 2014-04-04

Date (s) of performance of tests : 2014-04-11


Compiled by : Marcus Klein

Tested by (+ signature)..... : Steffen Zunke

Approved by (+ signature) : Marcus Klein

Date of issue : 2014-04-24

Total number of pages..... : 22


General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	4
1.1	Photos – Equipment external	5
1.2	Photos – Equipment internal	6
1.3	Photos – Test setup	7
1.4	Supporting Equipment Used During Testing	8
1.5	Operating Modes	9
1.6	Test Equipment Used During Testing	10
1.7	Sample emission level calculation	11
2	RESULT SUMMARY	12
3	TEST CONDITIONS AND RESULTS	13
3.1	Test Conditions and Results – Radiated emissions	13
3.2	Test Conditions and Results – AC power line conducted emissions	20

1 Equipment (Test item) Description

Description	Bluetooth headset	
Model	BTE7	
Additional Models	None	
Serial number	None	
Hardware version	28-04125	
Software / Firmware version	020	
Contains FCC-ID	BCE-BTE7	
Contains IC	2386C-BTE7	
Power supply	3.7 VDC	
Radio module	Type	Bluetooth Modul
	Model	CSR8620
	Manufacturer	CSR
Manufacturer	GN Netcom A/S Lautrupbjerg 7 2750 Ballerup DENMARK	
Highest emission frequency	> 1000 MHz (up to 5th Harm)	
Device classification	Class B	
Equipment type	Tabletop	
Number of tested samples	1	

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Charger	Samsung	XT2D826BS/7-E	-
AE	Mobile Phone	Samsung	S3	-

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Operating Modes

Mode #	Description
1	EUT connected via Bluetooth to mobile phone
2	Charging

1.6 Test Equipment Used During Testing

Radiated emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
LPD-Antenna	R&S	HL 025	EF00327	2013-02	2016-02
EMI Test Receiver	R&S	ESU8	EF00379	2014-03	2015-03
EMI Test Receiver	R&S	ESCS30	EF00295	2013-10	2014-10

Conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2012-10	2014-10
AMN	R&S	ESH3-Z5	EF00036	2012-11	2014-11
EMI Test Receiver	R&S	ESCS 30	EF00295	2013-10	2014-10

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBμV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBμV/m). The FCC limits are given in units of μV/m. The following formula is used to convert the units of μV/m to dBμV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 RSS-Gen 4.9 & 4.10	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions


Radiated emissions acc. FCC 47 CFR 15.109 / IC RSS-Gen					Verdict: PASS	
Laboratory Parameters:		Required prior to the test		During the test		
Ambient Temperature		15 to 35 °C		22°C		
Relative Humidity		30 to 60 %		31%		
Test according referenced standards		Reference Method				
		ANSI C63.4				
Sample is tested with respect to the requirements of the equipment class		Equipment class				
		Class B				
Test frequency range determined from highest emission frequency		Highest emission frequency				
		> 1000 MHz (up to 5th Harm)				
Fully configured sample scanned over the following frequency range		Frequency range				
		30 MHz to 5 GHz				
Operating mode		1				
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1403-3710

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Headset
 Model: BTE7
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 22°C, Unom: 3,7VDC Battery
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3m, converted to 10m
 Mode: Bluetooth connection
 Test Date: 2014-11-04
 Note:

Index 3

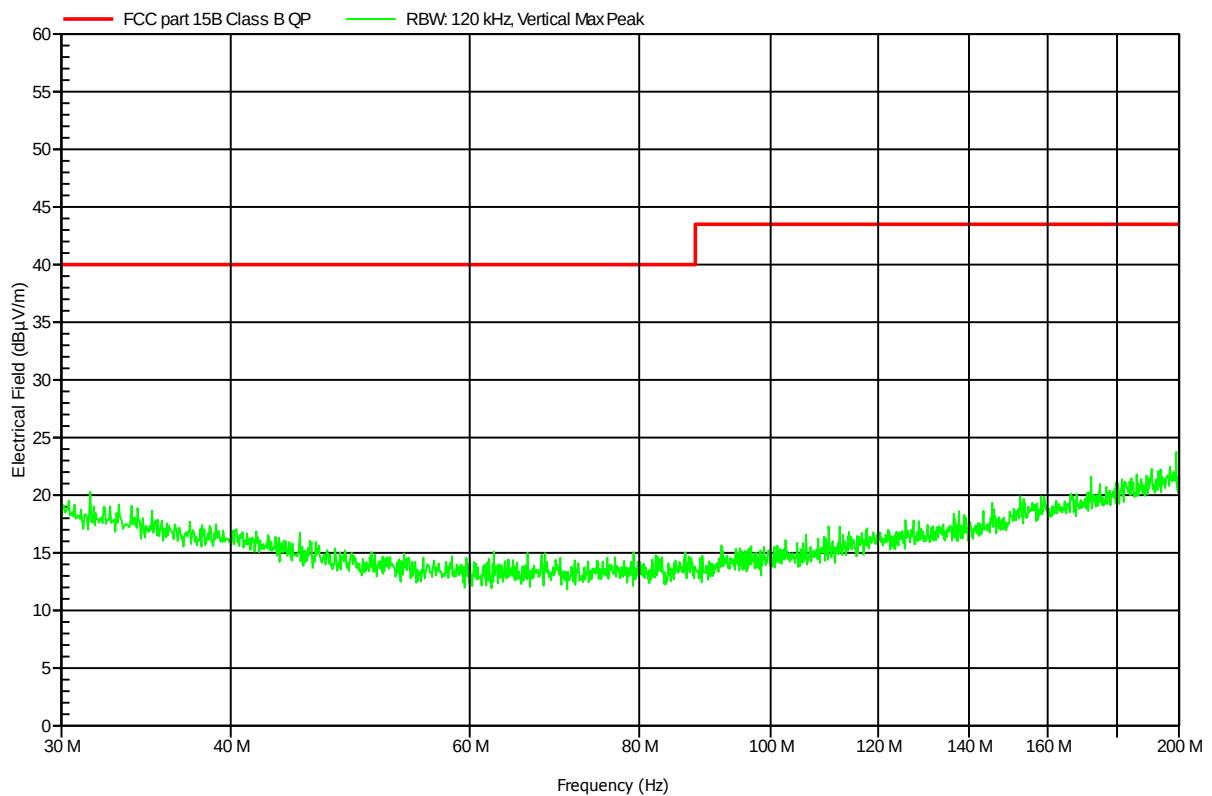


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1403-3710

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Headset
 Model: BTE7
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 22°C, Unom: 3,7VDC Battery
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3m, converted to 10m
 Mode: Bluetooth connection
 Test Date: 2014-11-04
 Note:

Index 4

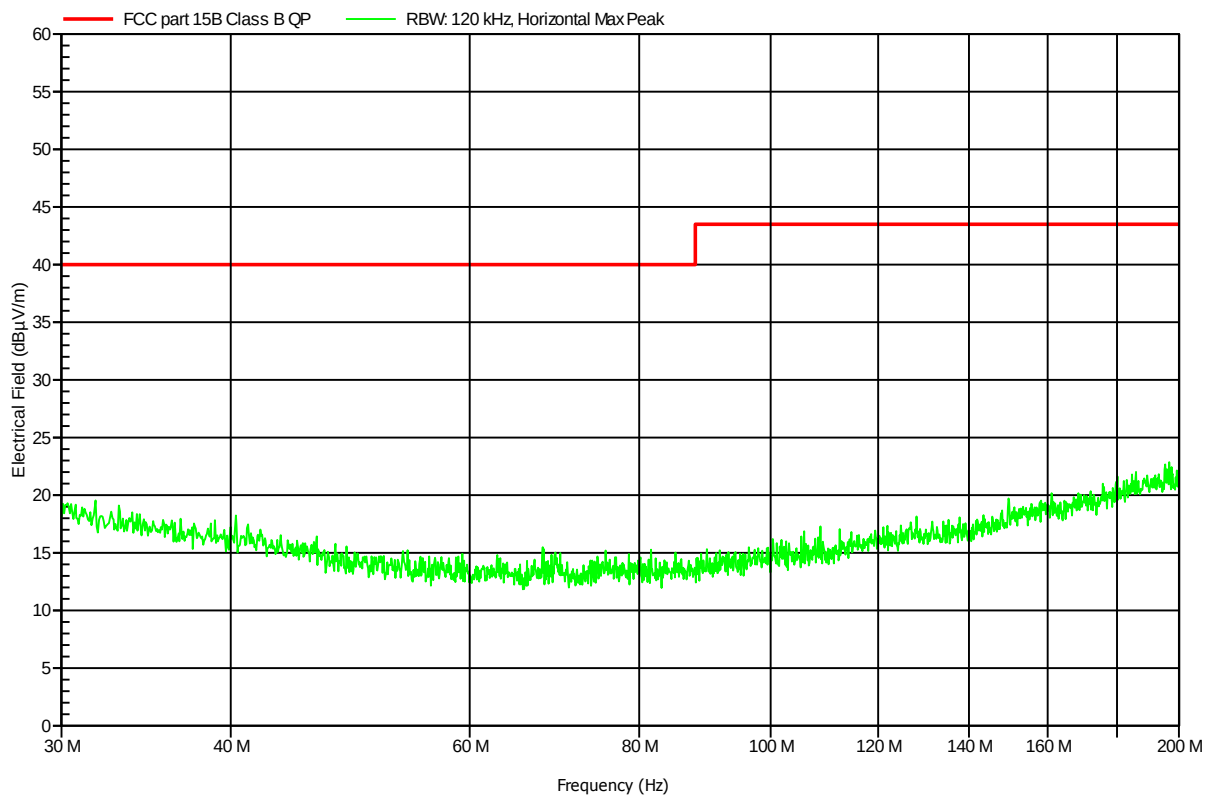


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1403-3710

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Headset
 Model: BTE7
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 22°C, Unom: 3,7VDC Battery
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m, converted to 10m
 Mode: Bluetooth connection
 Test Date: 2014-11-04
 Note:

Index 7

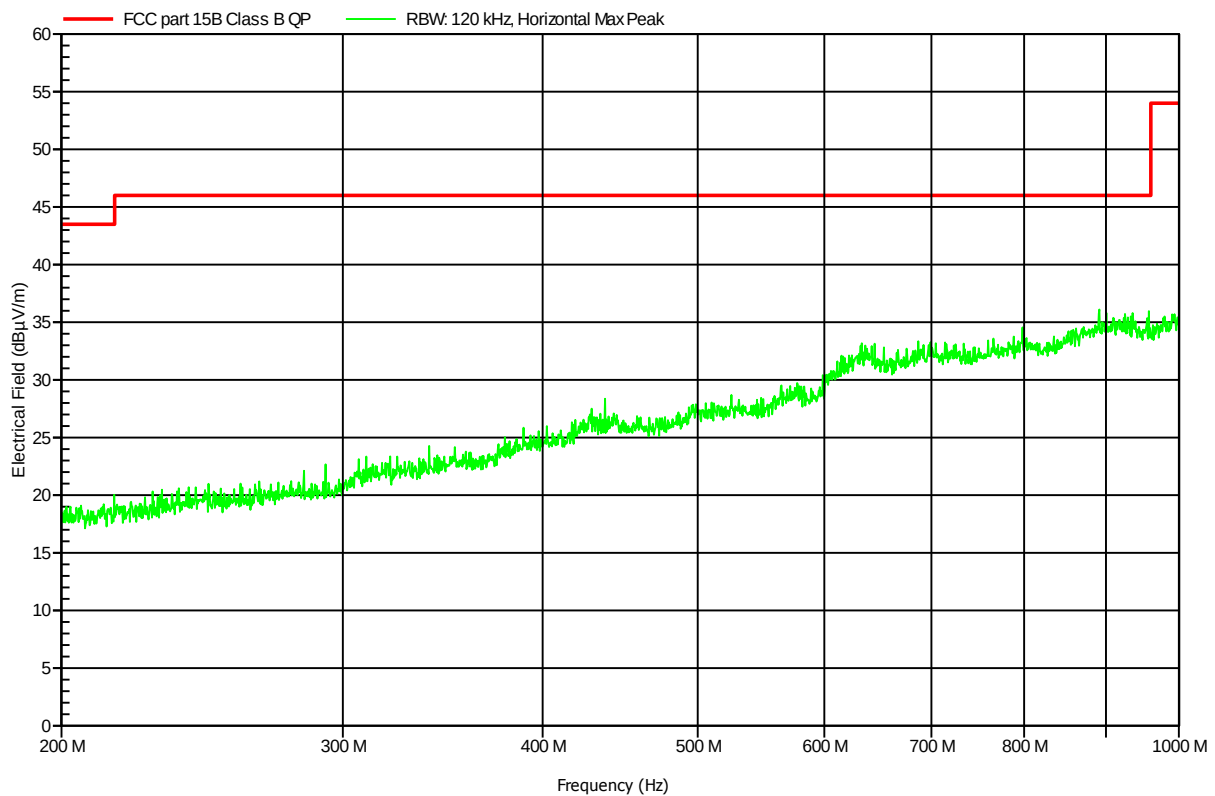


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1403-3710

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Headset
 Model: BTE7
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 22°C, Unom: 3,7VDC Battery
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m, converted to 10m
 Mode: Bluetooth connection
 Test Date: 2014-11-04
 Note:

Index 8

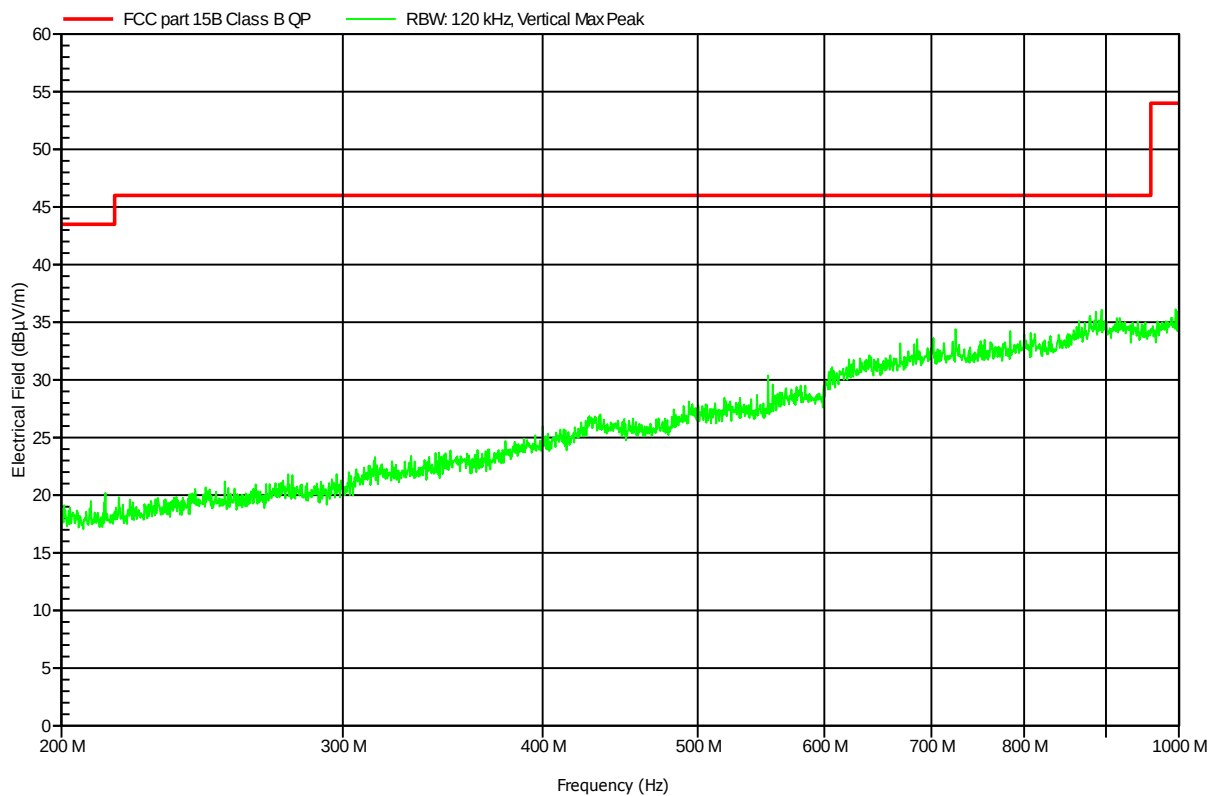


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1403-3710

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Headset
 Model: BTE7
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 22°C, Unom: 3,7VDC Battery
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3m, converted to 10m
 Mode: Bluetooth connection
 Test Date: 2014-11-04
 Note:

Index 11

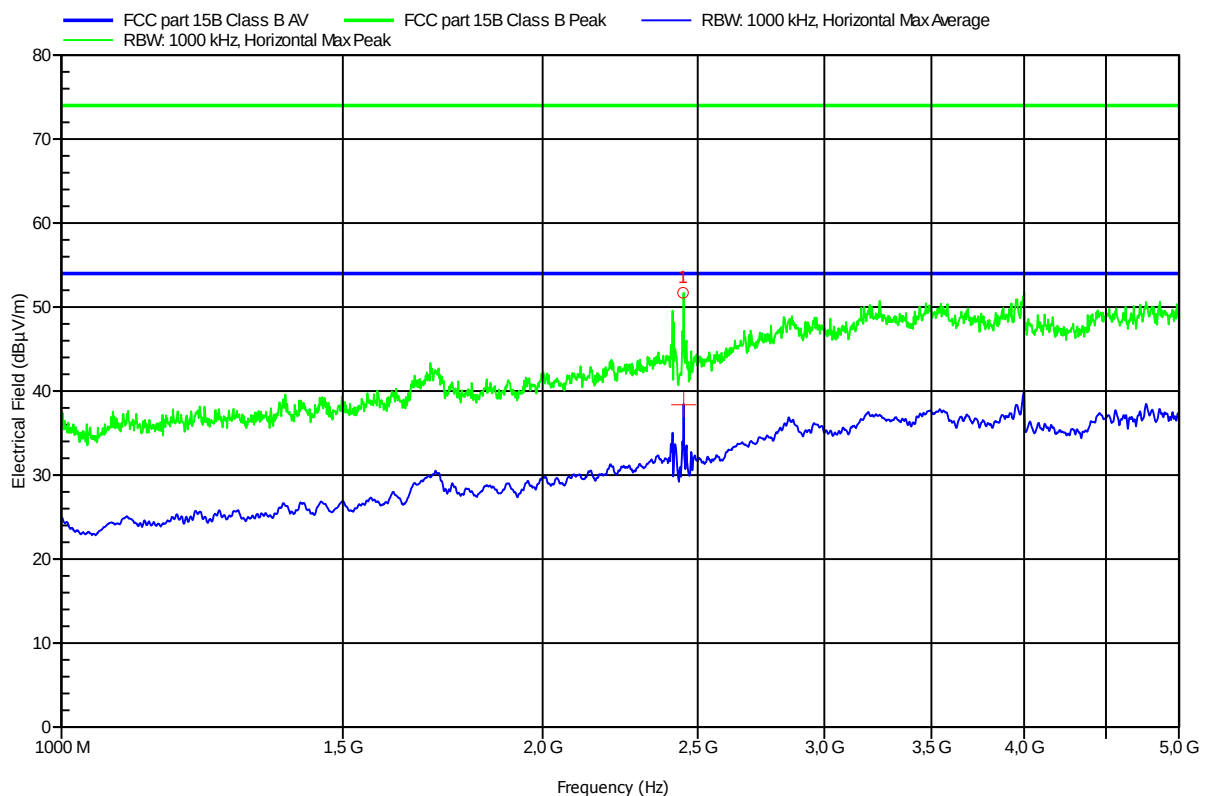

Nr	Frequency	Average	Average Limit	Average Difference	Average Status
1	2,448 GHz	38,45 dBµV/m	54 dBµV/m	-15,55 dB	Pass

Test Report No.: G0M-1403-3710-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1403-3710

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Headset
 Model: BTE7
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 22°C, Unom: 3,7VDC Battery
 Antenna: Rohde & Schwarz HL 025, Vertical
 Measurement distance: 3m, converted to 10m
 Mode: Bluetooth connection
 Test Date: 2014-11-04
 Note:

Index 12

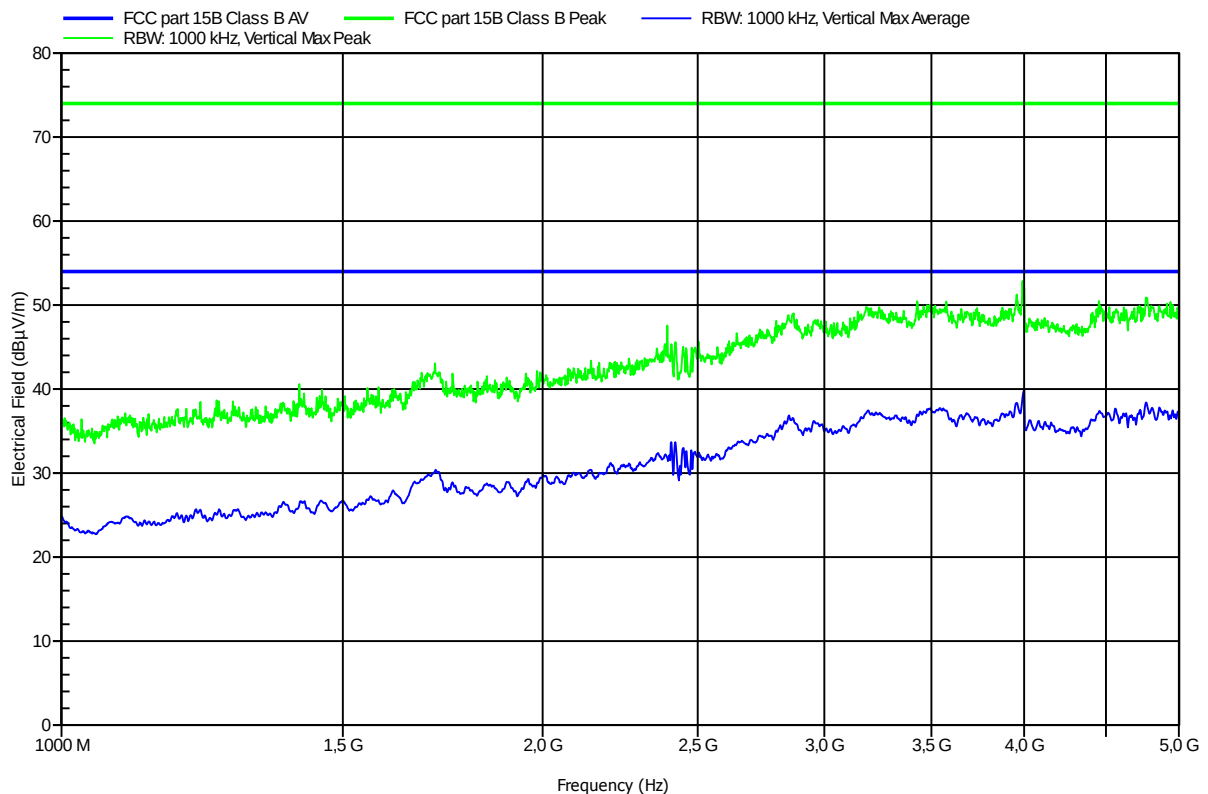

3.2 Test Conditions and Results – AC power line conducted emissions


Conducted emissions acc. FCC 47 CFR 15.107 / IC RSS-Gen			Verdict: PASS	
Laboratory Parameters:		Required prior to the test		During the test
Ambient Temperature		15 to 35 °C		22°C
Relative Humidity		30 to 60 %		35%
Test according referenced standards		Reference Method		
		ANSI C63.4		
Fully configured sample scanned over the following frequency range		Frequency range		
		0.15 MHz to 30 MHz		
Sample is tested with respect to the requirements of the equipment class		Equipment class		
		Class B		
Points of Application		Application Interface		
AC Mains		LISN		
Operating mode		2		
Limits and results Class B				
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Average [dBµV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments:				
* Limit decreases linearly with the logarithm of the frequency.				

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1403-3710

Manufacturer:	GN Netcom A/S
EUT Name:	Bluetooth Headset
Model:	BTE7
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 22°C, Unom: 120 VAC (via AC/DC Adapter)
LISN:	ESH2-Z5 N
Mode:	charging
Test Date:	2014-11-04
Note:	

Index 14

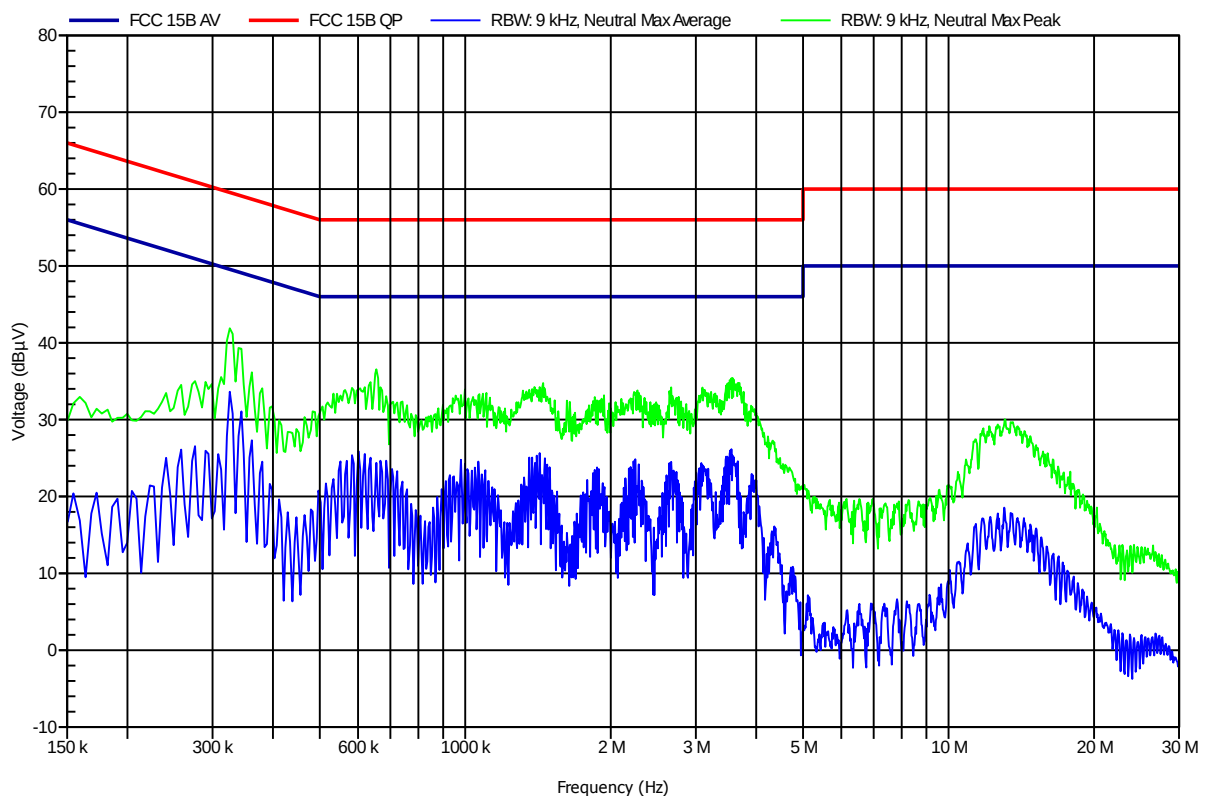

Test Report No.: G0M-1403-3710-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1403-3710

Manufacturer: GN Netcom A/S
 EUT Name: Bluetooth Headset
 Model: BTE7
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Zunke
 Test Conditions: Tnom: 22°C, Unom: 120 VAC (via AC/DC Adapter)
 LISN: ESH2-Z5 L
 Mode: charging
 Test Date: 2014-11-04
 Note:

Index 15

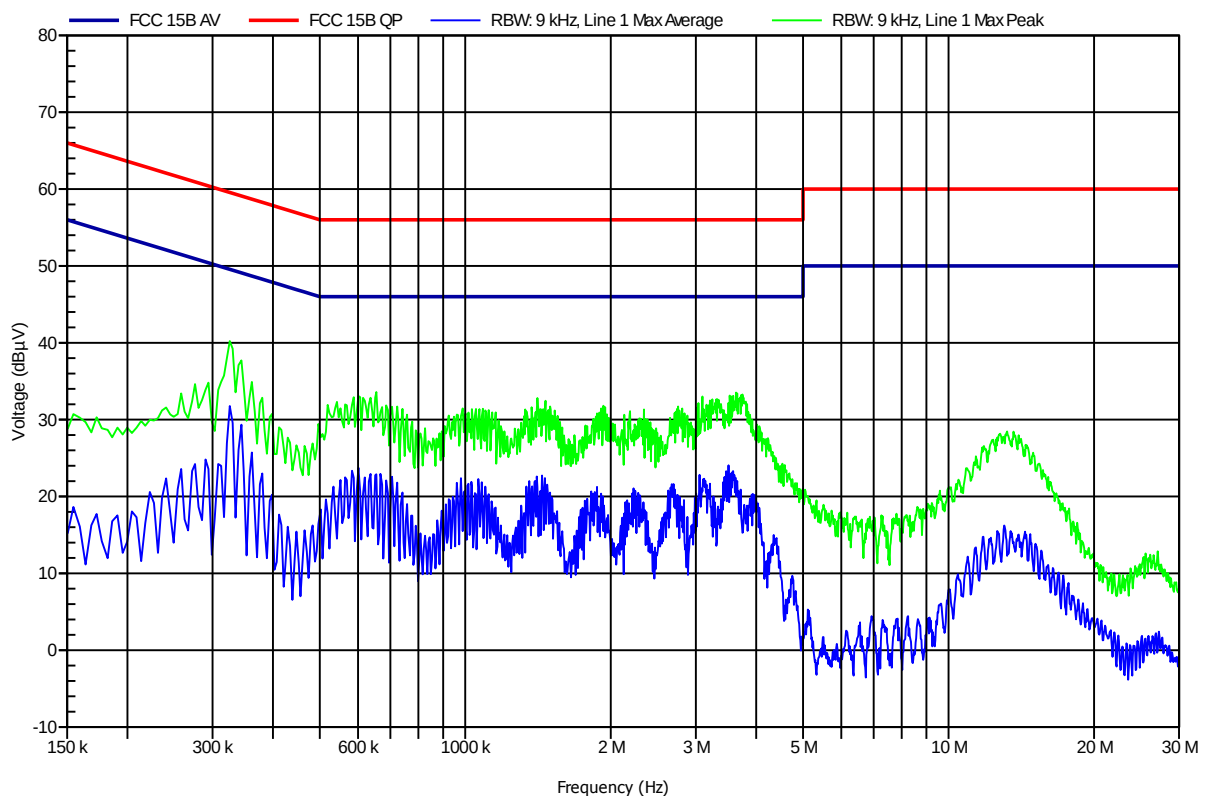

Test Report No.: G0M-1403-3710-EF0115B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany