

## EMC TEST REPORT

**Applicant** Phillips Connect Technologies, LLC  
**FCC ID** 2ASKH-CCP02  
**Product** Cargo Camera  
**Brand** PCT  
**Model** 77-S267; 77-S263  
**Report No.** R2312A1387-E1  
**Issue Date** January 25, 2024

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2023)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Liu Wei**Fan Guangchang*

---

*Prepared by: Liu Wei**Approved by: Fan Guangchang*

### TA Technology (Shanghai) Co., Ltd.

*Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China**TEL: +86-021-50791141/2/3**FAX: +86-021-50791141/2/3-8000*

## Table of Contents

1	Test Laboratory .....	4
1.1	Notes of the Test Report.....	4
1.2	Test Facility.....	4
1.3	Testing Location.....	4
2	General Description of Equipment Under Test .....	5
2.1	Applicant and Manufacturer Information .....	5
2.2	General Information .....	5
2.3	Applied Standards .....	6
2.4	Test Mode .....	7
3	Test Case Results .....	8
3.1	Radiated Emission.....	8
3.2	Conducted Emission.....	15
4	Uncertainty Measurement.....	20
5	Main Test Instruments .....	21
	ANNEX A: The EUT Appearance .....	22
	ANNEX B: Test Setup Photos .....	23

### Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Date of Testing: December 22, 2023 ~ January 5, 2024			
Date of Sample Received: December 14, 2023			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

# 1 Test Laboratory

## 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

## 1.2 Test Facility

### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

## 1.3 Testing Location

Company:	TA Technology (Shanghai) Co., Ltd.
Address:	Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City:	Shanghai
Post code:	201201
Country:	P. R. China
Contact:	Fan Guangchang
Telephone:	+86-021-50791141/2/3
Fax:	+86-021-50791141/2/3-8000
Website:	<a href="https://www.eurofins.com/electrical-and-electronics">https://www.eurofins.com/electrical-and-electronics</a>
E-mail:	Jack.Fan@cpt.eurofinscn.com

## 2 General Description of Equipment Under Test

### 2.1 Applicant and Manufacturer Information

<b>Applicant</b>	Phillips Connect Technologies, LLC
<b>Applicant address</b>	5231 California Avenue, Suite 110 Irvine, CA 92617, USA
<b>Manufacturer</b>	Phillips Connect Technologies, LLC
<b>Manufacturer address</b>	5231 California Avenue, Suite 110 Irvine, CA 92617, USA

### 2.2 General Information

EUT Description			
Device Type	Fixed Device		
Model	77-S267; 77-S263		
Lab internal SN	77-S267: R2312A1387/S01 77-S263: R2312A1387/S02		
HW Version	P6.1.5		
SW Version	Cargo Vision 23D		
Power Rating	DC 12V		
Connecting I/O Port(s)	Please refer to the User's Manual.		
Antenna Type	Internal Antenna		
Frequency	Band	Tx (MHz)	Rx (MHz)
	Bluetooth LE	2400 ~ 2483.5	2400 ~ 2483.5
EUT Accessory			
Battery	Manufacturer: Julang Electronics Model: 1S2P DC 3.65V, 3000mAh		
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			

## 2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

### Test standards

**FCC Code CFR47 Part15B (2023)**

**ANSI C63.4-2014**

## 2.4 Test Mode

Test Mode	
Mode 1	External Power Supply + EUT + Bluetooth Receiver
Mode 2	External Power Supply + EUT + Bluetooth Standby

Test Type	Test Mode	Worst Mode
Radiated Emission	Mode 1, 2	Mode 2
Conducted Emission	Mode 1, 2	Mode 2
During the test, the preliminary test was performed in all modes, the test data of the worst-case condition was recorded in this report.		

### 3 Test Case Results

#### 3.1 Radiated Emission

##### Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

##### Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO


(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.




## Test Setup

### Below 1GHz

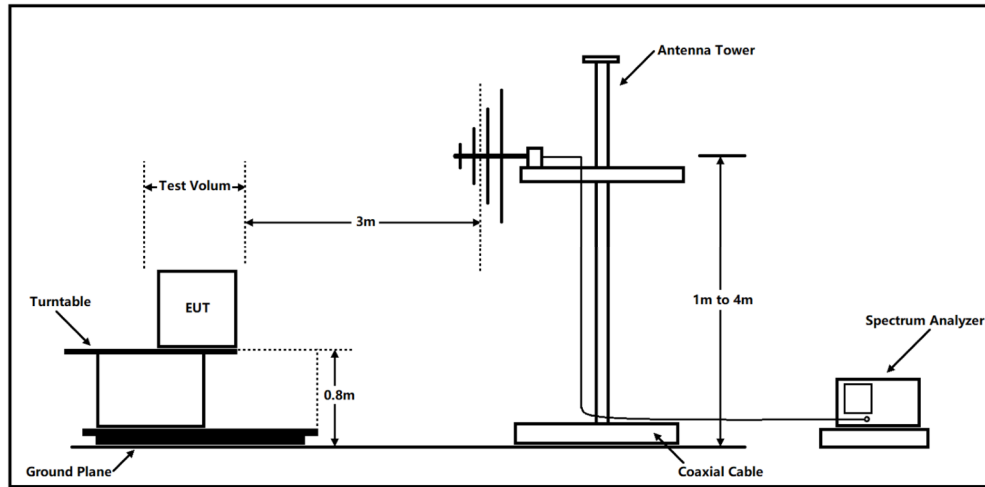

### Above 1GHz

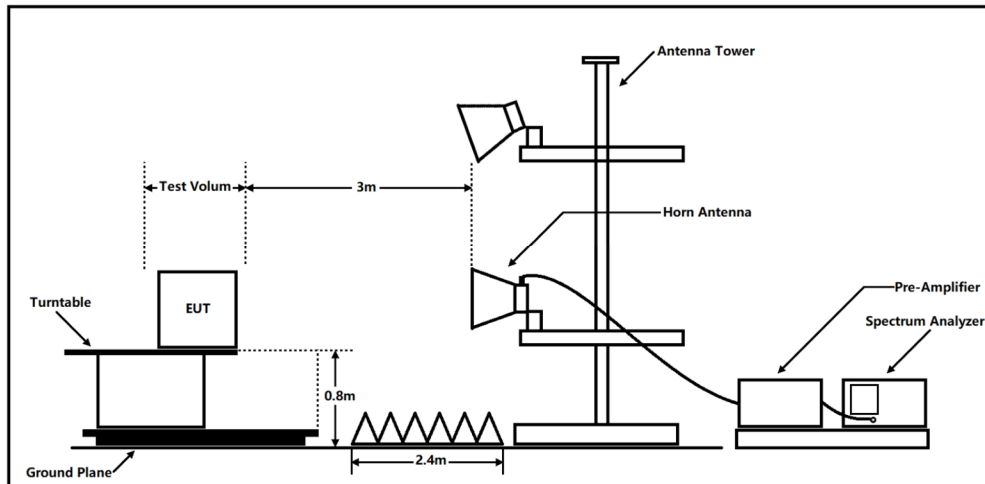

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

**Limits**

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 <sup>th</sup> harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

**Frequency range of radiated measurements**

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

## Test Results


Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

A symbol (dB $\mu$ V/m) in the test plot below means (dB $\mu$ V/m)

### 77-S267

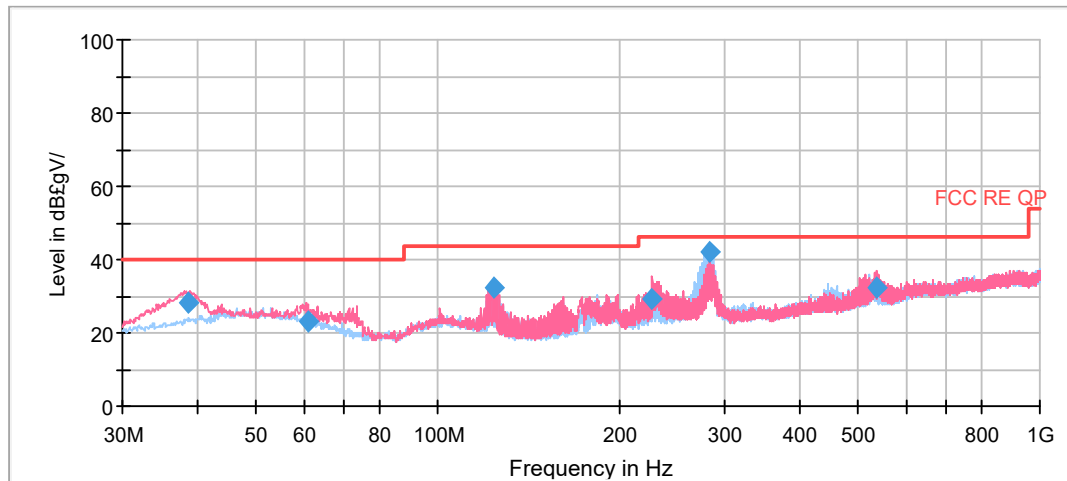


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
38.612500	28.14	40.00	11.86	100.0	V	4.0	19.4
60.875000	23.31	40.00	16.69	110.0	V	253.0	19.3
124.008750	32.21	43.50	11.29	100.0	V	74.0	16.4
227.355000	29.25	46.00	16.75	100.0	V	31.0	19.2
282.807500	41.80	46.00	4.20	100.0	H	278.0	20.6
537.431250	32.43	46.00	13.57	125.0	V	184.0	25.9

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

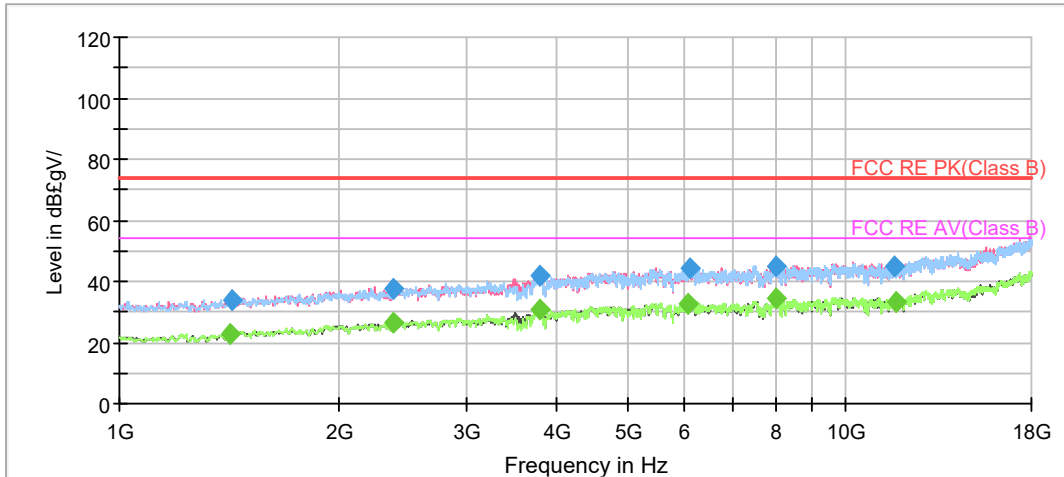


Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1423.143743	---	23.00	54.00	31.00	500.0	200.0	V	135.0	-15.4
1429.567997	33.93	---	74.00	40.07	500.0	200.0	V	135.0	-15.4
2380.619194	37.30	---	74.00	36.70	500.0	200.0	H	303.0	-10.3
2381.818512	---	26.36	54.00	27.64	500.0	200.0	V	226.0	-10.3
3794.801870	---	31.00	54.00	23.00	500.0	200.0	V	189.0	-3.7
3799.498678	42.09	---	74.00	31.91	500.0	100.0	V	42.0	-3.8
6079.144487	---	32.57	54.00	21.43	500.0	200.0	V	277.0	0.0
6108.687516	44.03	---	74.00	29.97	500.0	100.0	H	221.0	-0.3
8006.313914	45.15	---	74.00	28.85	500.0	200.0	V	335.0	2.6
8006.358063	---	34.15	54.00	19.85	500.0	100.0	H	337.0	2.5
11678.851254	45.12	---	74.00	28.88	500.0	100.0	V	270.0	4.1
11758.956526	---	33.36	54.00	20.64	500.0	200.0	V	342.0	3.7

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Peak Margin = Limit –MAX Peak/ Average

77-S263

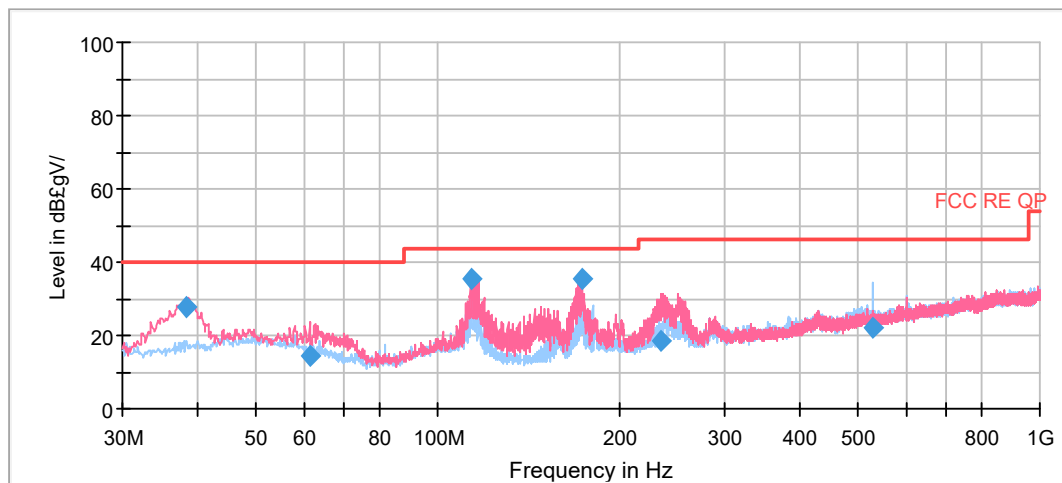


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
38.248750	27.72	40.00	12.28	100.0	V	199.0	19.2
61.443750	14.50	40.00	25.50	100.0	V	68.0	19.1
113.621250	35.19	43.50	8.31	100.0	V	329.0	18.0
173.641250	35.42	43.50	8.08	100.0	V	85.0	19.7
235.715000	18.26	46.00	27.74	100.0	V	157.0	19.6
528.537500	21.90	46.00	24.10	125.0	H	21.0	25.8

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

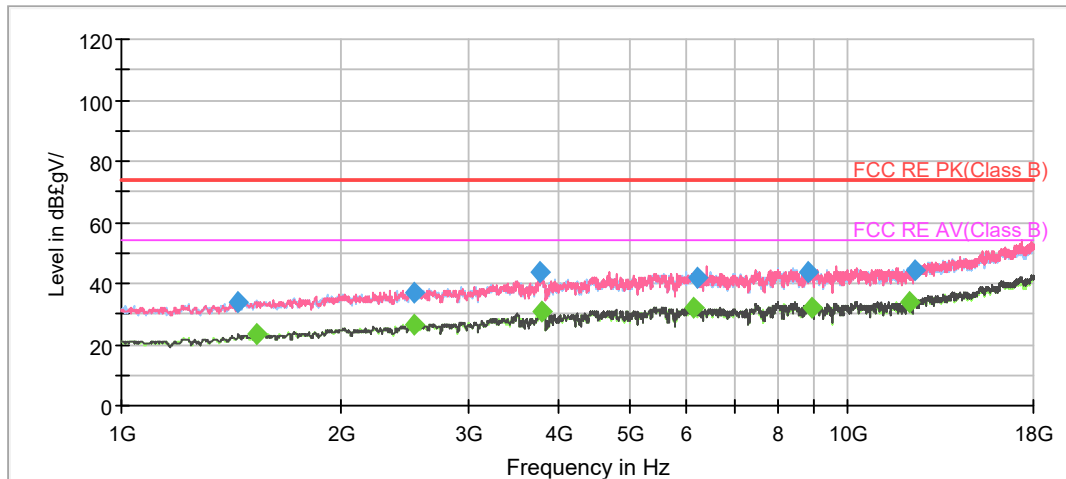

Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1448.402214	34.14	---	74.00	39.86	500.0	100.0	H	316.0	-15.3
1530.978212	---	23.29	54.00	30.71	500.0	200.0	H	251.0	-14.6
2524.475370	---	26.30	54.00	27.70	500.0	100.0	V	243.0	-10.2
2528.967238	36.94	---	74.00	37.06	500.0	100.0	V	79.0	-10.1
3774.818144	43.77	---	74.00	30.23	500.0	200.0	H	0.0	-3.9
3784.332246	---	30.89	54.00	23.11	500.0	100.0	V	346.0	-3.8
6148.977859	---	32.13	54.00	21.87	500.0	200.0	H	158.0	-0.3
6223.304453	41.86	---	74.00	32.14	500.0	200.0	V	336.0	0.3
8841.939000	43.79	---	74.00	30.21	500.0	200.0	V	309.0	1.7
8918.448749	---	32.14	54.00	21.86	500.0	200.0	H	105.0	1.6
12177.608188	---	33.62	54.00	20.38	500.0	200.0	H	198.0	4.5
12384.314111	44.45	---	74.00	29.55	500.0	100.0	V	171.0	4.7

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Peak Margin = Limit –MAX Peak/ Average

## 3.2 Conducted Emission


### Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

### Test Setup

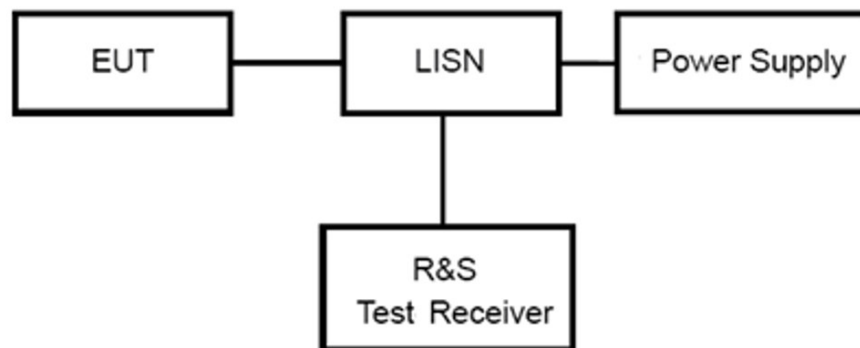

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

### Limits

Frequency (MHz)	Class A (dBμV)		Class B (dBμV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 to 56 *	56 to 46*
0.5 - 5	73	60	56	46
5 - 30	73	60	60	50


\*: Decreases with the logarithm of the frequency.

Note: The EUT should meet CLASS B limit.

## Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

### 77-S267

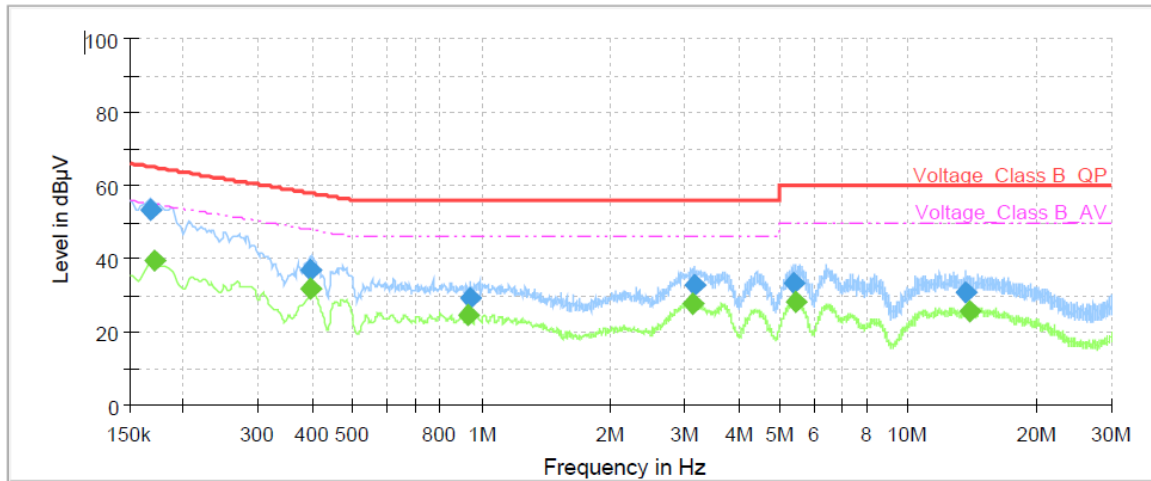


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.17	53.37	---	65.06	11.69	1000.0	9.000	L1	ON	21.0
0.17	---	39.34	54.95	15.61	1000.0	9.000	L1	ON	21.0
0.40	36.98	---	57.95	20.97	1000.0	9.000	L1	ON	21.0
0.40	---	31.73	47.91	16.18	1000.0	9.000	L1	ON	21.0
0.93	---	24.74	46.00	21.26	1000.0	9.000	L1	ON	20.3
0.94	29.18	---	56.00	26.82	1000.0	9.000	L1	ON	20.3
3.14	---	27.61	46.00	18.39	1000.0	9.000	L1	ON	19.5
3.15	32.90	---	56.00	23.10	1000.0	9.000	L1	ON	19.5
5.41	33.21	---	60.00	26.79	1000.0	9.000	L1	ON	19.5
5.47	---	27.97	50.00	22.03	1000.0	9.000	L1	ON	19.5
13.67	30.78	---	60.00	29.22	1000.0	9.000	L1	ON	19.6
13.89	---	25.86	50.00	24.14	1000.0	9.000	L1	ON	19.6

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 KHz to 30 MHz



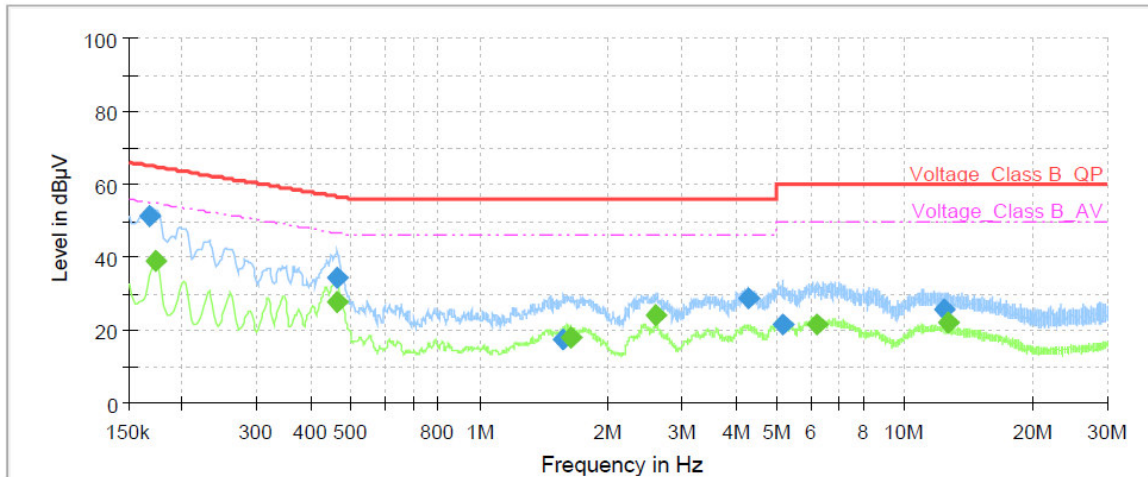


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.17	51.21	---	65.06	13.85	1000.0	9.000	N	ON	21.0
0.17	---	38.97	54.84	15.87	1000.0	9.000	N	ON	21.0
0.46	---	27.46	46.64	19.18	1000.0	9.000	N	ON	20.9
0.46	34.21	---	56.64	22.43	1000.0	9.000	N	ON	20.9
1.58	17.63	---	56.00	38.37	1000.0	9.000	N	ON	19.9
1.64	---	17.91	46.00	28.09	1000.0	9.000	N	ON	19.8
2.59	---	24.24	46.00	21.76	1000.0	9.000	N	ON	19.6
4.31	28.48	---	56.00	27.52	1000.0	9.000	N	ON	19.5
5.15	21.38	---	60.00	38.62	1000.0	9.000	N	ON	19.5
6.21	---	21.54	50.00	28.46	1000.0	9.000	N	ON	19.5
12.45	25.43	---	60.00	34.57	1000.0	9.000	N	ON	19.6
12.60	---	21.82	50.00	28.18	1000.0	9.000	N	ON	19.6

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 KHz to 30 MHz

77-S263

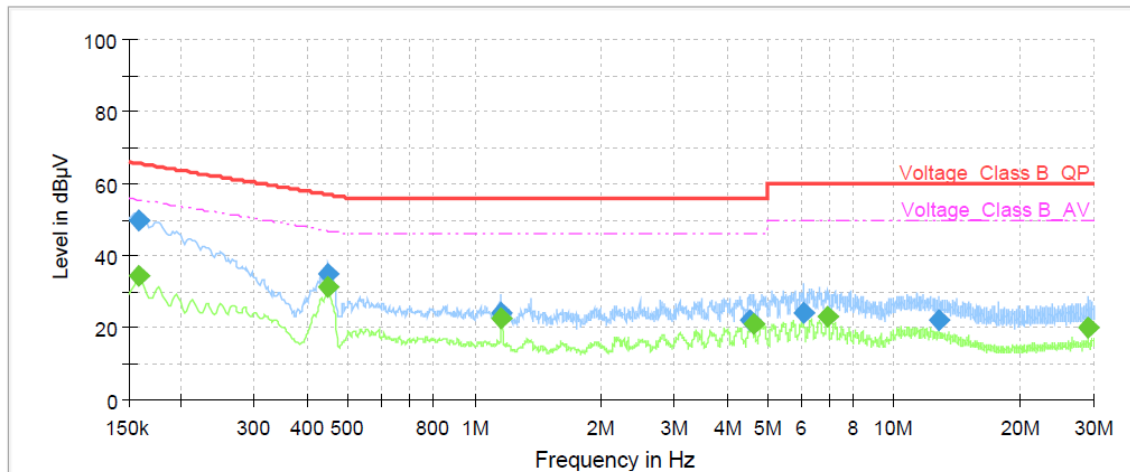


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.16	---	34.34	55.52	21.18	1000.0	9.000	L1	ON	21.0
0.16	49.62	---	65.52	15.90	1000.0	9.000	L1	ON	21.0
0.45	---	31.29	46.89	15.60	1000.0	9.000	L1	ON	20.9
0.45	34.79	---	56.89	22.10	1000.0	9.000	L1	ON	20.9
1.16	---	22.54	46.00	23.46	1000.0	9.000	L1	ON	20.1
1.16	24.17	---	56.00	31.83	1000.0	9.000	L1	ON	20.1
4.52	21.92	---	56.00	34.08	1000.0	9.000	L1	ON	19.5
4.64	---	21.24	46.00	24.76	1000.0	9.000	L1	ON	19.5
6.09	23.97	---	60.00	36.03	1000.0	9.000	L1	ON	19.5
6.96	---	23.22	50.00	26.78	1000.0	9.000	L1	ON	19.5
12.75	22.16	---	60.00	37.84	1000.0	9.000	L1	ON	19.6
28.99	---	19.96	50.00	30.04	1000.0	9.000	L1	ON	19.7

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 KHz to 30 MHz

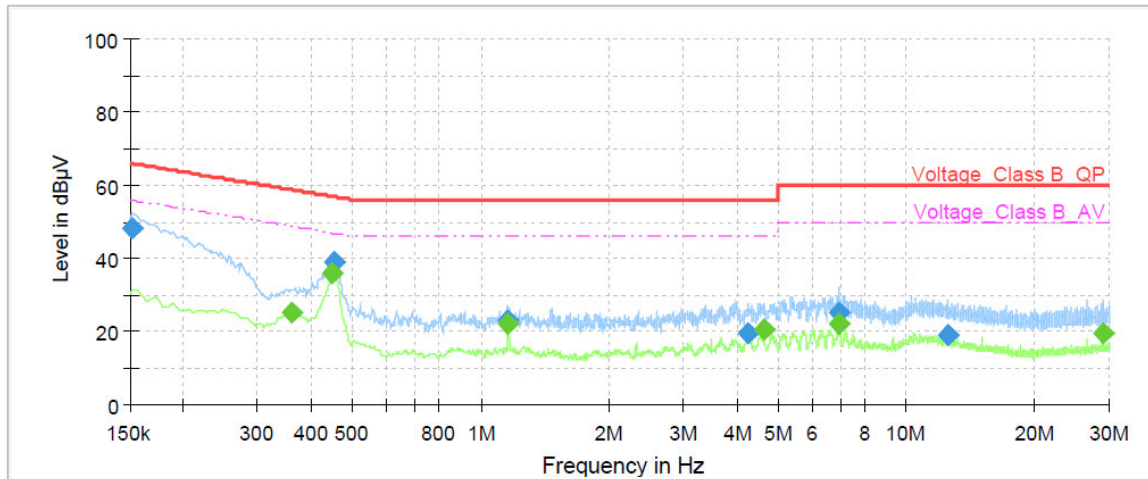

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.15	48.31	---	65.88	17.57	1000.0	9.000	N	ON	21.0
0.36	---	24.99	48.75	23.76	1000.0	9.000	N	ON	21.0
0.45	---	35.92	46.89	10.97	1000.0	9.000	N	ON	20.9
0.45	39.20	---	56.85	17.65	1000.0	9.000	N	ON	20.9
1.16	22.99	---	56.00	33.01	1000.0	9.000	N	ON	20.1
1.16	---	22.16	46.00	23.84	1000.0	9.000	N	ON	20.1
4.25	19.65	---	56.00	36.35	1000.0	9.000	N	ON	19.5
4.64	---	20.32	46.00	25.68	1000.0	9.000	N	ON	19.5
6.96	---	21.99	50.00	28.01	1000.0	9.000	N	ON	19.5
6.96	24.96	---	60.00	35.04	1000.0	9.000	N	ON	19.5
12.54	18.73	---	60.00	41.27	1000.0	9.000	N	ON	19.6
28.98	---	19.52	50.00	30.48	1000.0	9.000	N	ON	19.7

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 KHz to 30 MHz

## 4 Uncertainty Measurement

Case	Uncertainty	Factor k
Radiated Emission 30MHz – 200MHz	4.17 dB	1.96
Radiated Emission 200MHz – 1GHz	4.84 dB	1.96
Radiated Emission 1GHz – 18GHz	4.35 dB	1.96
Conducted Emission	2.57 dB	2

## 5 Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESR	102389	2023-05-12	2024-05-11
Signal Analyzer	R&S	FSV40	101186	2023-05-12	2024-05-11
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2023-07-14	2026-07-13
Horn Antenna	R&S	HF907	102723	2021-07-24	2024-07-23
Amplifier	R&S	SCU18	10034	2023-05-12	2024-05-11
Software	R&S	EMC32	9.26.01	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	102191	2022-12-10	2024-12-09
EMI Test Receiver	R&S	ESR	101667	2023-05-12	2024-05-11
Software	R&S	EMC32	10.35.10	/	/

## ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

## ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

\*\*\*\*\* END OF REPORT \*\*\*\*\*