



FCC 47 CFR PART 15 SUBPART C

RF Test Report

Applicant : Intel Corporation
Product Type : Cloud Rest
Trade Name : Intel
Model Number : Aero Platform
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Receive Date : Jul. 19, 2016
Test Period : Jul. 22 ~ Jul. 31, 2016
Issue Date : Aug. 01, 2016

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Aug. 01, 2016	Initial Issue	Snow Wang



Verification of Compliance

Issued Date: Aug. 01, 2016

Applicant : Intel Corporation
Product Type : Cloud Rest
Trade Name : Intel
Model Number : Aero Platform
FCC ID : 2AB8ZAERO
EUT Rated Voltage : DC 12V, 2A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Test Result : Complied
Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>

A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Jack Chang Reviewed By : Eric Ou Yang
(Manager) (Jack Chang) (Testing Engineer) (Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation.....	8
3.2.	EUT Exercise Software	12
3.3.	Configuration of Test System Details	13
3.4.	Test Site Environment	13
4	AC Power Line Conducted Emission Measurement	14
4.1.	Limit	14
4.2.	Test Instruments	14
4.3.	Test Setup.....	14
4.4.	Test Procedure	15
4.5.	Test Result.....	16
5	Radiated Emission Measurement.....	18
5.1.	Limit	18
5.2.	Test Instruments	18
5.3.	Setup	19
5.4.	Test Procedure	20
5.5.	Test Result.....	22
6	Maximum Conducted Output Power Measurement.....	47
6.1.	Limit	47
6.2.	Test Setup.....	47
6.3.	Test Instruments	47
6.4.	Test Procedure	47
6.5.	Test Result.....	48
7	6dB RF Bandwidth Measurement.....	53
7.1.	Limit	53
7.2.	Test Setup.....	53
7.3.	Test Instruments	53
7.4.	Test Procedure	53
7.5.	Test Result.....	54
7.6.	Test Graphs	55



8	Maximum Power Density Measurement	67
8.1.	Limit	67
8.2.	Test Setup.....	67
8.3.	Test Instruments	67
8.4.	Test Procedure	68
8.5.	Test Result.....	69
8.6.	Test Graphs	71
9	Out of Band Conducted Emissions Measurement	83
9.1.	Limit	83
9.2.	Test Setup.....	83
9.3.	Test Instruments	83
9.4.	Test Procedure	83
9.5.	Test Graphs	84
10	Antenna Measurement.....	120
10.1.	Limit	120
10.2.	Antenna Description	120
10.3.	Directional Gain Calculated.....	120

1 General Information

1.1 Summary of Test Result

Standard	Item	Result	Remark
15.247			
15.207	AC Power Conducted Emission	PASS	-----
Standard	Item	Result	Remark
15.247			
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6dB RF Bandwidth	PASS	-----
15.247(e)	Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.8
Radiated Emission	9kHz ~ 30MHz	1.457
	30MHz ~ 1000MHz	6.300
	1000MHz ~ 18000MHz	5.474
	18000MHz ~ 26500MHz	5.630
	26500MHz ~ 40000MHz	5.054
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96%	
Power Spectral Density	+0.71 dB / -0.77 dB	



2 EUT Description

Applicant	Intel Corporation 2200 Mission College Blvd, Santa Clara, California, United States 95054			
Manufacturer	Thunder Software Technology Co .,Ltd 4F,Taixiang Building,1A Longxiang Rd.,Haidian District,Beijing 100191,P.R.China			
Product Type	Cloud Rest			
Trade Name	Intel			
Model Number	Aero Platform			
FCC ID	2AB8ZAERO			
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate 400 GI (ns)
IEEE 802.11b	2412 ~ 2467	DSSS	20MHz	Up to 11Mbps
IEEE 802.11g	2412 ~ 2467	OFDM (64QAM)	20MHz	Up to 54Mbps
IEEE 802.11n 2.4GHz 20MHz	2412 ~ 2467	OFDM (64QAM)	20MHz	Up to 144.4Mbps
IEEE 802.11n 2.4GHz 40MHz	2422 ~ 2457	OFDM (64QAM)	40MHz	Up to 300Mbps
Antenna information	Type		Max. Gain (dBi)	
	FPC antenna		3.89	
Antenna Delivery	See section 3.1			

Frequency Band	Max. RF Output Power (W)
IEEE 802.11b	0.335
IEEE 802.11g	0.513
IEEE 802.11n 2.4GHz 20MHz	0.645
IEEE 802.11n 2.4GHz 40MHz	0.267

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal operation mode
Mode 2: IEEE 802.11b link mode
Mode 3: IEEE 802.11g link mode
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode
Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Test Mode	ANT-0	ANT-1	ANT-0+1
Mode 2: IEEE 802.11b link mode	V	V	---
Mode 3: IEEE 802.11g link mode	V	V	---
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	V	V	V
Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode	V	V	V

Test Mode	Antenna Delivery	Test Channel	Data Rate 400GI (ns)
Mode 2: IEEE 802.11b link mode	1TX / 1RX (Diversity)	1, 6, 11,12	1
Mode 3: IEEE 802.11g link mode	1TX / 1RX (Diversity)	1, 6, 11,12	6
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	2TX / 2RX (CDD)	1, 6, 11,12	13
Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode	2TX / 2RX (CDD)	3, 6, 9, 10	27

Duty cycle


Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2: IEEE 802.11b link mode	2412.0	12.360	12.460	0.992	0.035	0.010
Mode 3: IEEE 802.11g link mode	2412.0	2.070	2.170	0.954	0.205	0.483
Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode	2412.0	0.995	1.160	0.858	0.666	1.005
Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode	2422.0	0.501	0.588	0.852	0.695	1.996




Duty Cycle Graphs

Mode 2: IEEE 802.11b link mode

On time

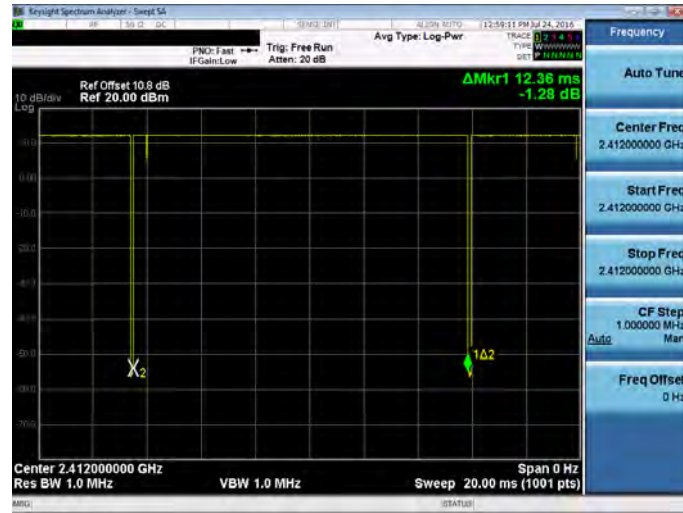


On+off time

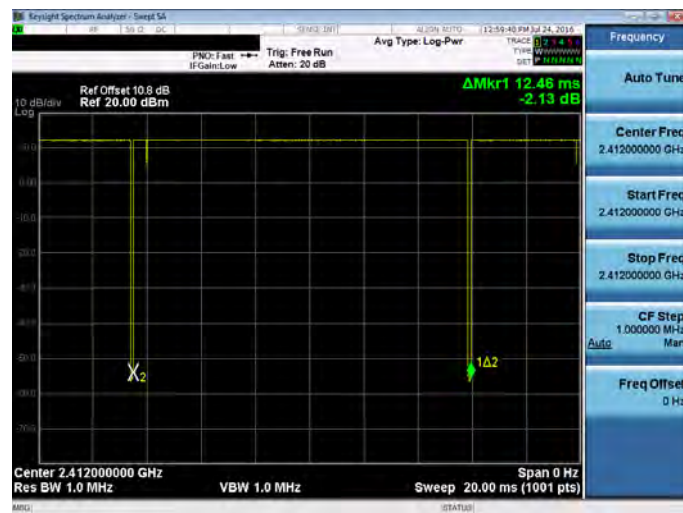




Mode 3: IEEE 802.11g Mode

On time

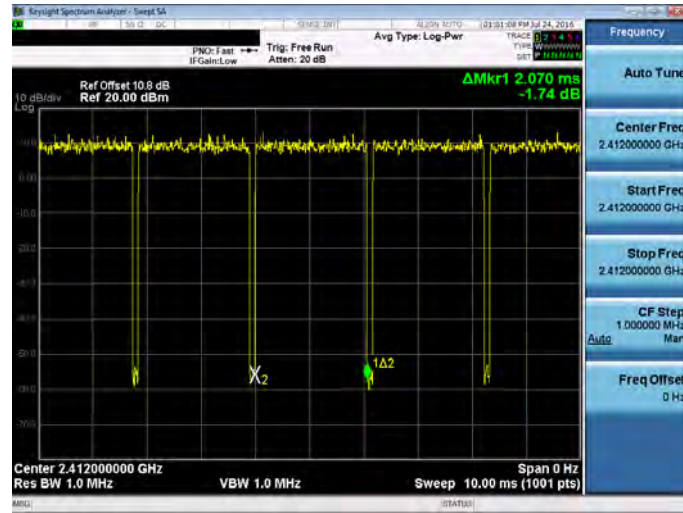


On+off time

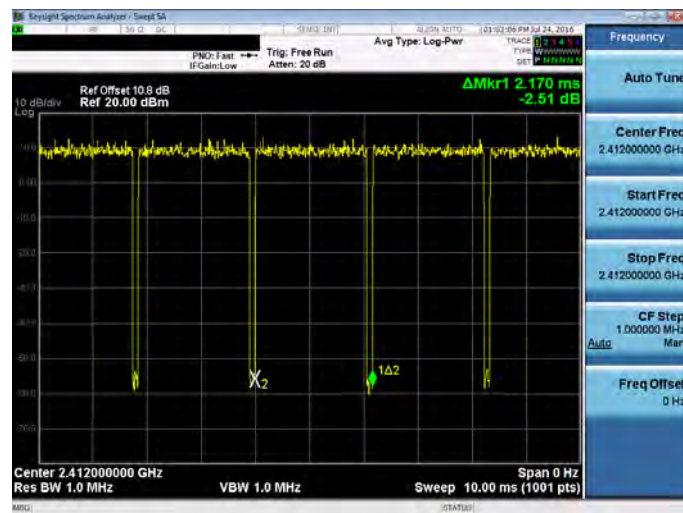






Mode 4: IEEE 802.11n 2.4GHz 20MHz Mode

On time

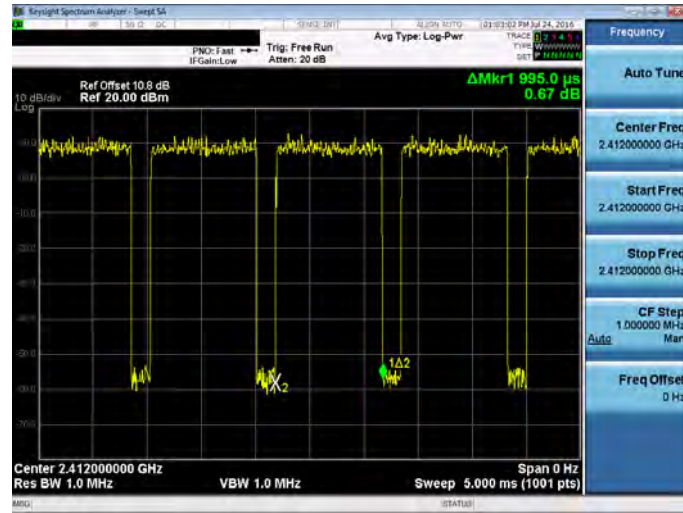

On+off time

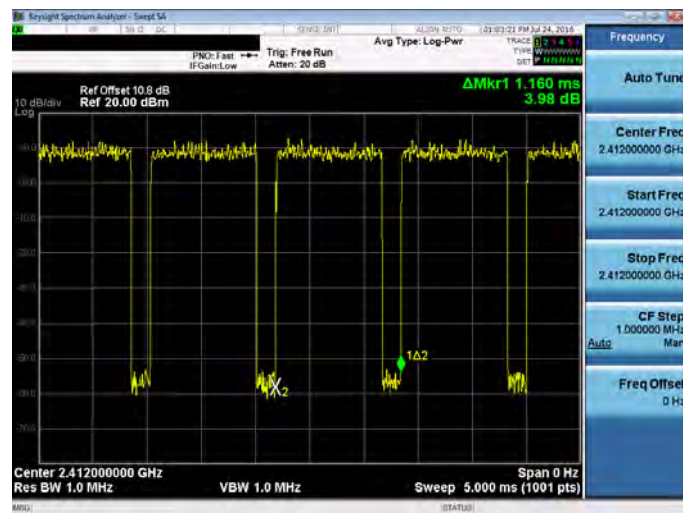

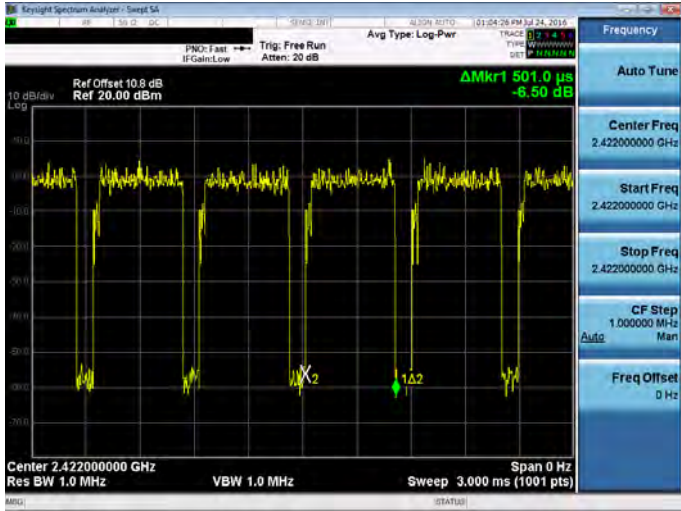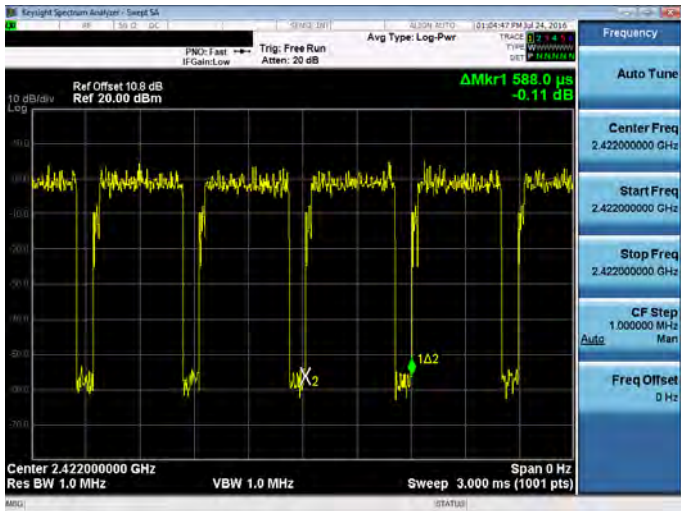Mode 5: IEEE 802.11n 2.4GHz 40MHz Mode	
On time	 Key parameters from screenshot: - Center Freq: 2.422000000 GHz - Start Freq: 2.422000000 GHz - Stop Freq: 2.422000000 GHz - CF Step: 1.000000 MHz - Freq Offset: 0 Hz - Center: 2.422000000 GHz - Res BW: 1.0 MHz - VBW: 1.0 MHz - Sweep: 3.000 ms (1001 pts) - Span: 0 Hz - Ref Offset: 10.6 dB - Ref: 20.00 dBm - ΔMkr1: 501.0 μs -6.50 dB
On+off time	 Key parameters from screenshot: - Center Freq: 2.422000000 GHz - Start Freq: 2.422000000 GHz - Stop Freq: 2.422000000 GHz - CF Step: 1.000000 MHz - Freq Offset: 0 Hz - Center: 2.422000000 GHz - Res BW: 1.0 MHz - VBW: 1.0 MHz - Sweep: 3.000 ms (1001 pts) - Span: 0 Hz - Ref Offset: 10.6 dB - Ref: 20.00 dBm - ΔMkr1: 588.0 μs -0.11 dB


3.2. EUT Exercise Software

1.	Setup the EUT shown on 3.3.
2.	Turn on the power of all equipment.
3.	Turn Wi-Fi function link to AP
4.	EUT run test program.


Measurement Software	
1	EZ-EMC Ver. ATL-03A1-1
2	EZ-EMC Ver ATL-ITC-3A1-1

3.3. Configuration of Test System Details

Conducted Emissions

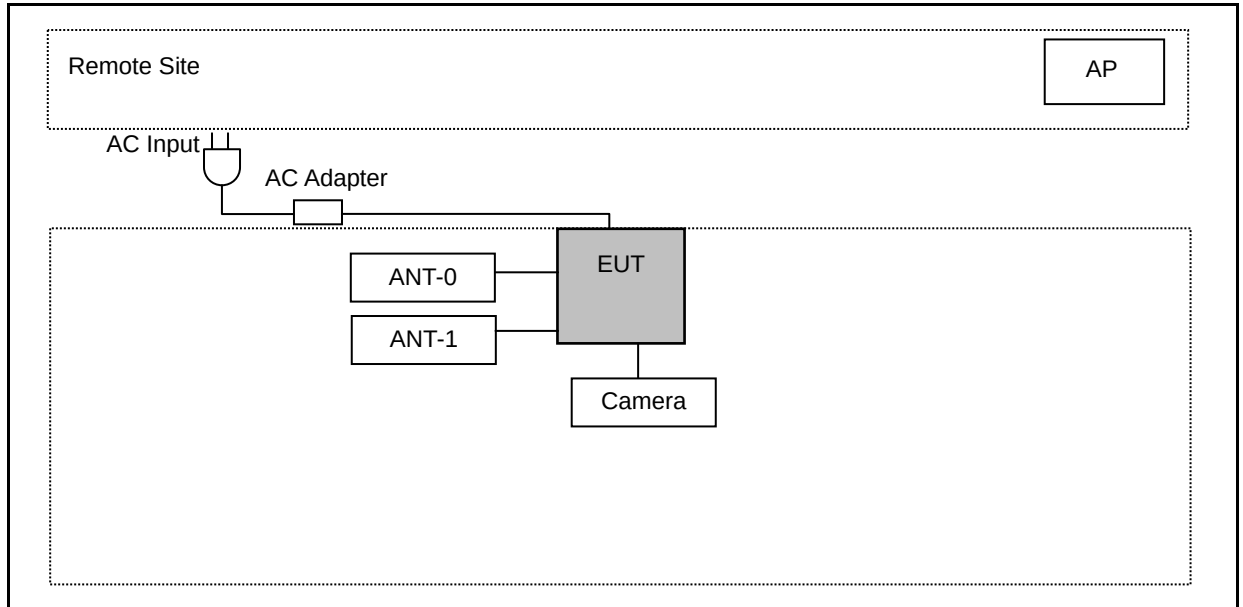

Radiated Emissions

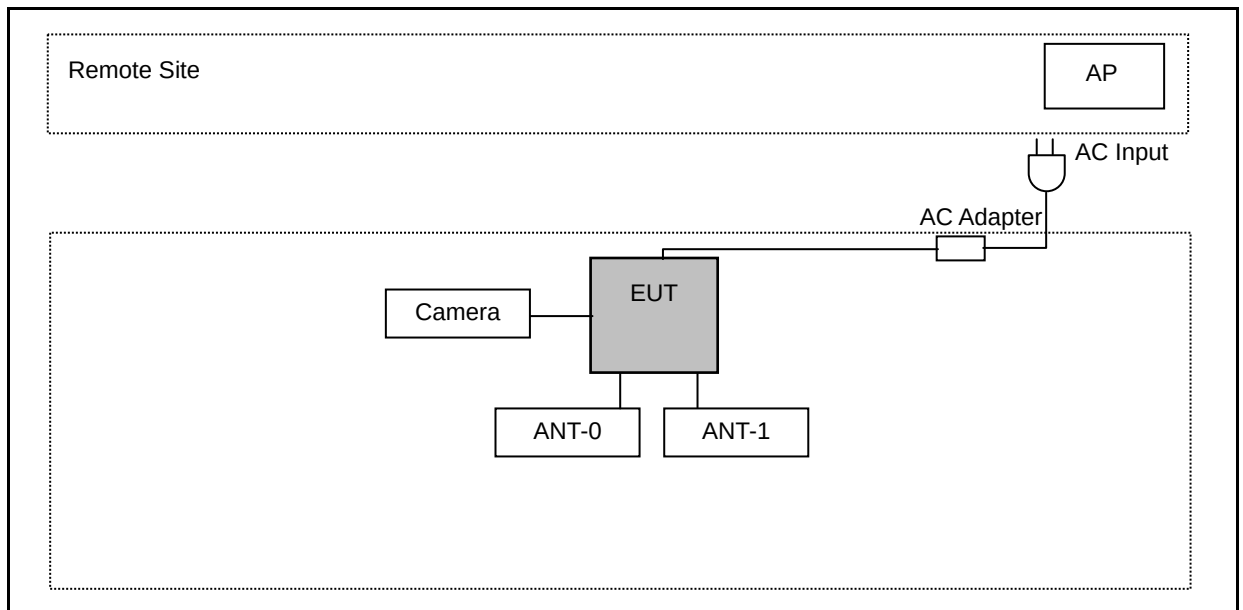

3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 AC Power Line Conducted Emission Measurement

4.1. Limit


Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/31/2016	1 year
LISN	R&S	ENV216	101040	03/15/2016	1 year
LISN	R&S	ENV216	101041	03/07/2016	1 year
RF Cable	Woken	00100D1380194M	TE-02-02	05/31/2016	1 year
Test Site	ATL	TE02	TE02	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

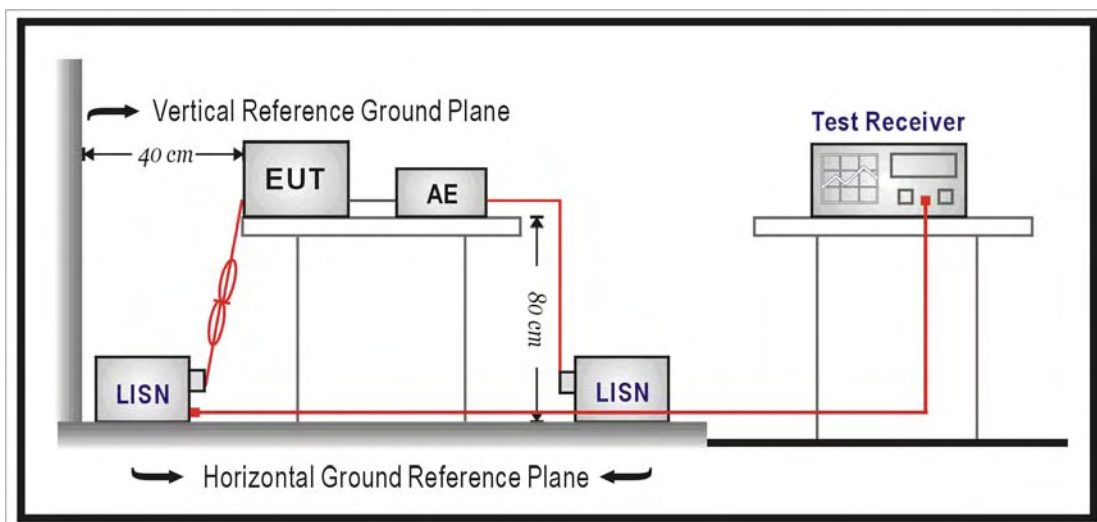

4.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\Omega // 50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega // 50\mu\text{H}$ coupling impedance with 50ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12mm insulating material.


Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150kHz to 30MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0,8 m from the AMN. If the mains power cable is longer than 1m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4m. All of interconnecting cables that hang closer than 40cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	Aero Platform	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	07/26/2016
		Test By:	Eric Ou Yang
Description:			

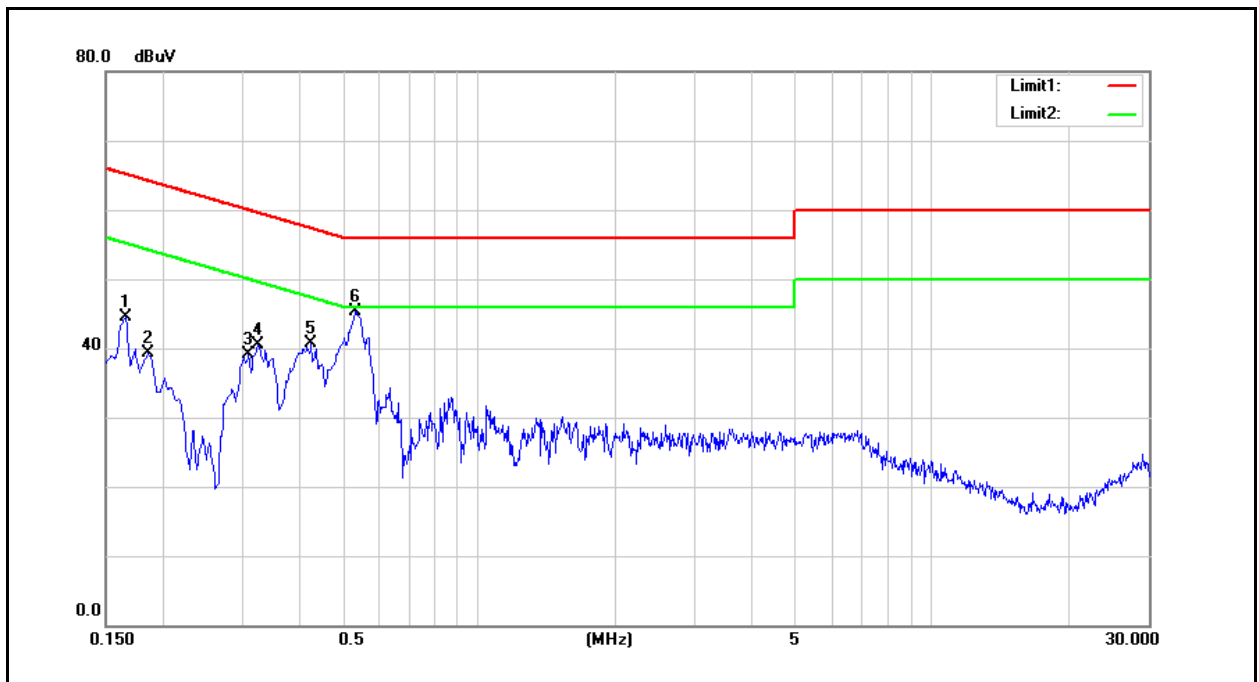


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1660	28.08	16.46	9.60	37.68	26.06	65.16	55.16	-27.48	-29.10	Pass
2	0.1860	28.41	21.08	9.59	38.00	30.67	64.21	54.21	-26.21	-23.54	Pass
3	0.3100	28.57	19.63	9.60	38.17	29.23	59.97	49.97	-21.80	-20.74	Pass
4	0.3260	29.41	22.68	9.60	39.01	32.28	59.55	49.55	-20.54	-17.27	Pass
5	0.4260	29.83	22.64	9.60	39.43	32.24	57.33	47.33	-17.90	-15.09	Pass
6	0.5340	34.68	27.91	9.61	44.29	37.52	56.00	46.00	-11.71	-8.48	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	Aero Platform	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	07/26/2016
		Test By:	Eric Ou Yang
Description:			

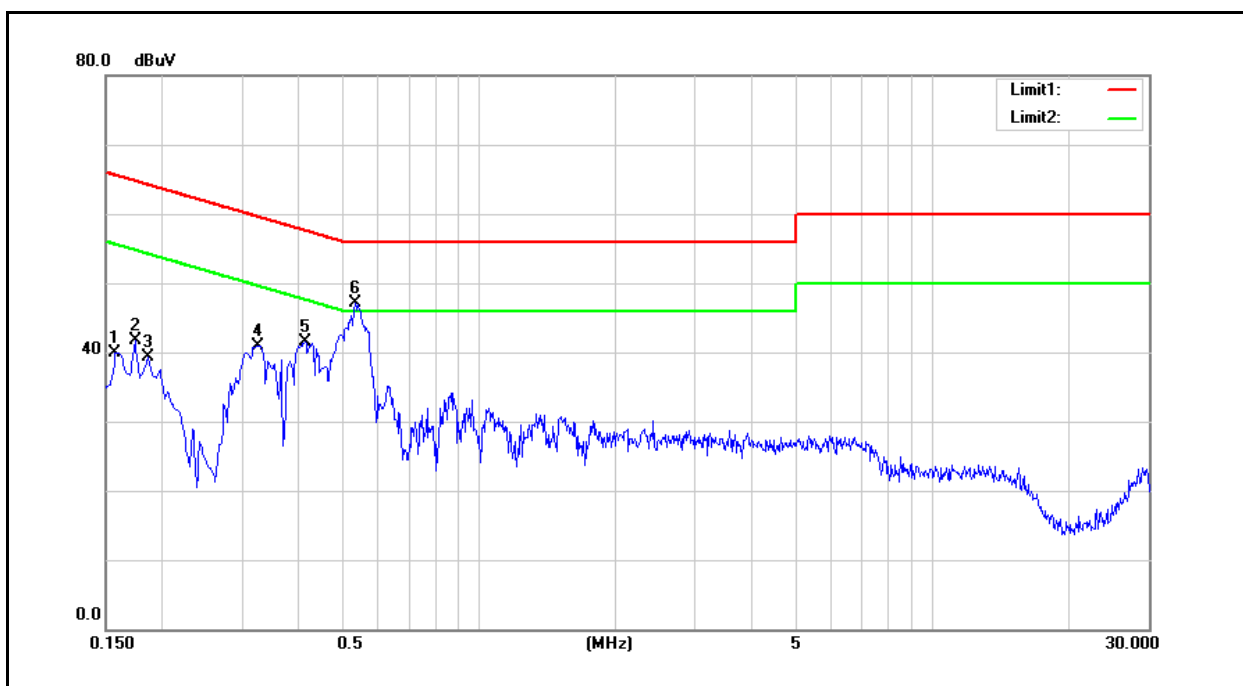

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	29.10	20.56	9.59	38.69	30.15	65.57	55.57	-26.88	-25.42	Pass
2	0.1740	26.19	16.70	9.59	35.78	26.29	64.77	54.77	-28.99	-28.48	Pass
3	0.1860	26.79	19.49	9.58	36.37	29.07	64.21	54.21	-27.84	-25.14	Pass
4	0.3260	30.09	23.88	9.59	39.68	33.47	59.55	49.55	-19.87	-16.08	Pass
5	0.4140	30.94	22.43	9.59	40.53	32.02	57.57	47.57	-17.04	-15.55	Pass
6	0.5340	36.21	29.32	9.60	45.81	38.92	56.00	46.00	-10.19	-7.08	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).



5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


5.2. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
RF Pre-selector	Agilent	N9039A	MY46520256	01/08/2016	1 year
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/08/2016	1 year
Pre Amplifier	Agilent	8449B	3008A02237	10/07/2015	1 year
Pre Amplifier	Agilent	8447D	2944A11119	01/11/2016	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	09/25/2015	1 year
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/06/2016	1 year
Horn Antenna (18~40GHz)	ETS	3116	86467	09/01/2015	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	02/01/2016	1 year
Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	10/15/2015	1 year
Microwave Cable	EMCI	EMC-104-SM-SM-14000	140202	10/15/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-600	140301	10/15/2015	1 year
Test Site	ATL	TE01	888001	08/27/2015	1 year


Note: N.C.R. = No Calibration Request.

5.3. Setup


9kHz ~ 30MHz

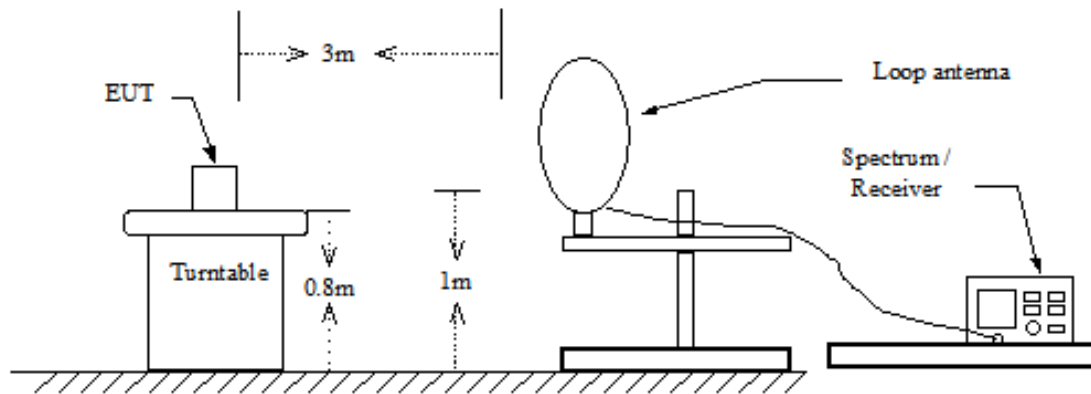

Below 1GHz

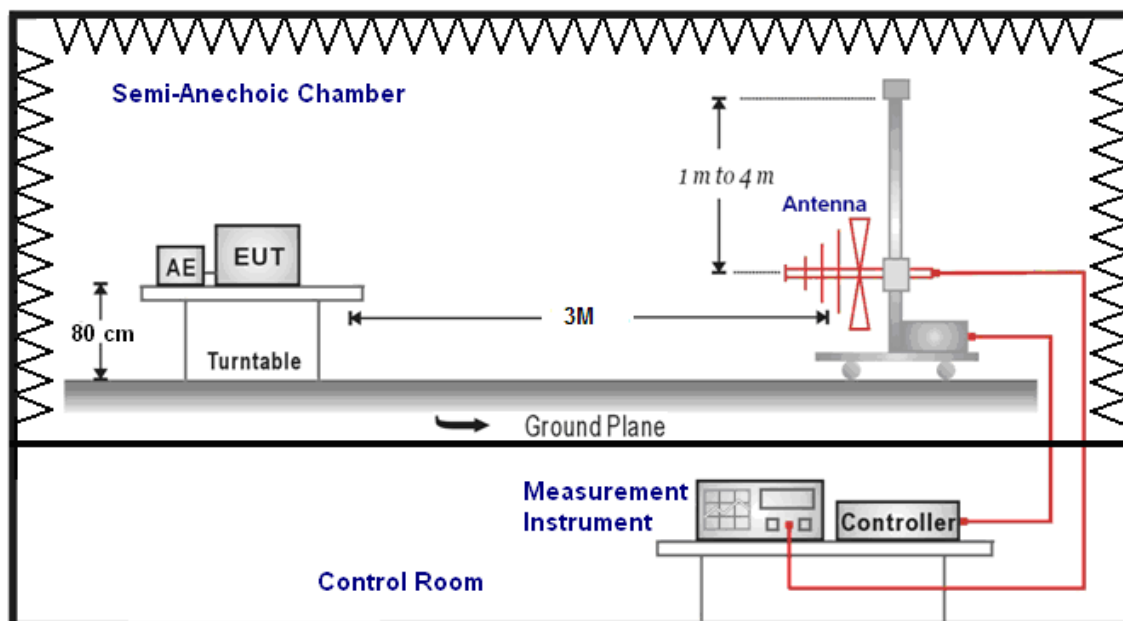

Above 1GHz

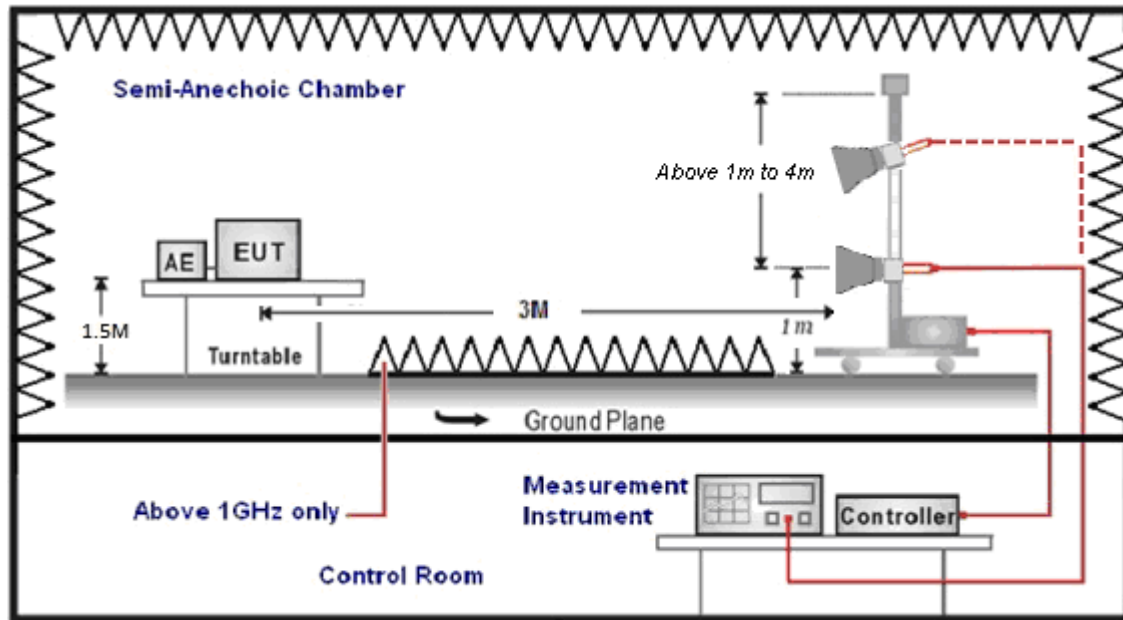

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / $1/T$ for average measurements when Duty cycle <0.98 . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



5.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		Aero Platform		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 1		Date:		07/24/2016	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
203.5000	38.04	-7.77	30.27	43.50	-13.23	QP	H
289.5000	31.46	-3.72	27.74	46.00	-18.26	QP	H
352.5000	31.95	-2.63	29.32	46.00	-16.68	QP	H
486.5000	30.50	0.50	31.00	46.00	-15.00	QP	H
665.5000	26.48	4.13	30.61	46.00	-15.39	QP	H
823.0000	25.91	7.08	32.99	46.00	-13.01	QP	H
208.5000	36.95	-7.70	29.25	43.50	-14.25	QP	V
289.0000	31.35	-3.74	27.61	46.00	-18.39	QP	V
352.0000	33.07	-2.64	30.43	46.00	-15.57	QP	V
486.5000	31.65	0.50	32.15	46.00	-13.85	QP	V
620.5000	28.39	3.33	31.72	46.00	-14.28	QP	V
755.0000	28.62	6.10	34.72	46.00	-11.28	QP	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz).

**Above 1GHz**

Standard:	FCC Part 15C		Test Distance:	3m			
Test item:	Radiated Emission		Power:	AC 120V/60Hz			
Model Number:	Aero Platform		Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 2		Date:	07/24/2016			
Frequency:	2412MHz		Test By:	Eric Ou Yang			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4824.000	57.10	-7.86	49.24	74.00	-24.76	peak	H
4824.000	58.30	-7.86	50.44	74.00	-23.56	peak	V

Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	Aero Platform	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	Mode 2	Date:	07/24/2016				
Frequency:	2437MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4874.000	60.71	-7.70	53.01	74.00	-20.99	peak	H
4874.000	58.48	-7.70	50.78	54.00	-3.22	AVG	H
4874.000	62.42	-7.70	54.72	74.00	-19.28	peak	V
4874.000	59.67	-7.70	51.97	54.00	-2.03	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		Aero Platform		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 2		Date:		07/24/2016	
Frequency:		2462MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4924.000	52.02	-7.55	44.47	74.00	-29.53	peak	H
4924.000	53.53	-7.55	45.98	74.00	-28.02	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		Aero Platform		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 2		Date:		07/31/2016	
Frequency:		2467MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4934.000	47.03	-7.61	39.42	74.00	-34.58	peak	H
4934.000	47.65	-7.61	40.04	74.00	-33.96	peak	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		Aero Platform		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 3		Date:		07/24/2016	
Frequency:		2412MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4824.000	49.63	-7.86	41.77	74.00	-32.23	peak	H
4824.000	51.57	-7.86	43.71	74.00	-30.29	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		Aero Platform		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 3		Date:		07/24/2016	
Frequency:		2437MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4874.000	55.98	-7.70	48.28	74.00	-25.72	peak	H
4874.000	58.31	-7.70	50.61	74.00	-23.39	peak	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	Aero Platform	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	Mode 3	Date:	07/24/2016				
Frequency:	2462MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4924.000	49.78	-7.55	42.23	74.00	-31.77	peak	H
4924.000	49.85	-7.55	42.30	74.00	-31.70	peak	V

Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	Aero Platform	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	Mode 3	Date:	07/31/2016				
Frequency:	2467MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4934.000	47.97	-7.61	40.36	74.00	-33.64	peak	H
4934.000	46.53	-7.61	38.92	74.00	-35.08	peak	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		Aero Platform		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 4		Date:		07/24/2016	
Frequency:		2412MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4824.000	52.39	-7.86	44.53	74.00	-29.47	peak	H
4824.000	53.70	-7.86	45.84	74.00	-28.16	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		Aero Platform		Temp.(℃)/Hum.(%RH):		26(℃)/60%RH	
Mode:		Mode 4		Date:		07/24/2016	
Frequency:		2437MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4874.000	54.53	-7.70	46.83	74.00	-27.17	peak	H
4874.000	54.90	-7.70	47.20	74.00	-26.80	peak	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	Aero Platform	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	Mode 4	Date:	07/24/2016				
Frequency:	2462MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4924.000	48.61	-7.55	41.06	74.00	-32.94	peak	H
4924.000	50.51	-7.55	42.96	74.00	-31.04	peak	V

Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	Aero Platform	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	Mode 4	Date:	07/31/2016				
Frequency:	2467MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4934.000	47.22	-7.61	39.61	74.00	-34.39	peak	H
4934.000	47.87	-7.61	40.26	74.00	-33.74	peak	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		Aero Platform		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 5		Date:		07/24/2016	
Frequency:		2422MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4844.000	47.33	-7.78	39.55	74.00	-34.45	peak	H
4844.000	48.42	-7.78	40.64	74.00	-33.36	peak	V

Standard:	FCC Part 15C	Test Distance:	3m				
Test item:	Radiated Emission	Power:	AC 120V/60Hz				
Model Number:	Aero Platform	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH				
Mode:	Mode 5	Date:	07/24/2016				
Frequency:	2437MHz	Test By:	Eric Ou Yang				
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4874.000	48.16	-7.70	40.46	74.00	-33.54	peak	H
4874.000	50.18	-7.70	42.48	74.00	-31.52	peak	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		Aero Platform		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 5		Date:		07/24/2016	
Frequency:		2452MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4904.000	47.51	-7.60	39.91	74.00	-34.09	peak	H
4904.000	47.66	-7.60	40.06	74.00	-33.94	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		Aero Platform		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 5		Date:		07/31/2016	
Frequency:		2457MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4914.000	47.76	-7.67	40.09	74.00	-33.91	peak	H
4914.000	48.19	-7.67	40.52	74.00	-33.48	peak	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

**Band Edge**

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	Aero Platform			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	07/22/2016		
Frequency:	2412 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2387.660	55.02	-0.22	54.80	74.00	-19.20	peak	H
2387.660	49.82	-0.22	49.60	54.00	-4.40	AVG	H
2390.000	51.59	-0.22	51.37	74.00	-22.63	peak	H
2390.000	45.94	-0.22	45.72	54.00	-8.28	AVG	H
2389.530	62.65	-0.22	62.43	74.00	-11.57	peak	V
2389.530	51.79	-0.22	51.57	54.00	-2.43	AVG	V
2390.000	64.91	-0.22	64.69	74.00	-9.31	peak	V
2390.000	48.21	-0.22	47.99	54.00	-6.01	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	Aero Platform			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	07/22/2016		
Frequency:	2437 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2375.930	54.44	-0.27	54.17	74.00	-19.83	peak	H
2375.930	42.93	-0.27	42.66	54.00	-11.34	AVG	H
2390.000	49.38	-0.22	49.16	74.00	-24.84	peak	H
2483.500	51.82	0.14	51.96	74.00	-22.04	peak	H
2486.320	54.12	0.14	54.26	74.00	-19.74	peak	H
2486.320	47.92	0.14	48.06	54.00	-5.94	AVG	H
2376.120	53.68	-0.27	53.41	74.00	-20.59	peak	V
2376.120	41.79	-0.27	41.52	54.00	-12.48	AVG	V
2390.000	52.29	-0.22	52.07	74.00	-21.93	peak	V
2390.000	45.12	-0.22	44.90	54.00	-9.10	AVG	V
2483.500	55.40	0.14	55.54	74.00	-18.46	peak	V
2483.500	48.61	0.14	48.75	54.00	-5.25	AVG	V
2485.750	57.28	0.14	57.42	74.00	-16.58	peak	V
2485.750	51.66	0.14	51.80	54.00	-2.20	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	Aero Platform			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	07/22/2016		
Frequency:	2462 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	50.94	0.14	51.08	74.00	-22.92	peak	H
2487.760	55.16	0.15	55.31	74.00	-18.69	peak	H
2487.760	48.57	0.15	48.72	54.00	-5.28	AVG	H
2483.500	52.79	0.14	52.93	74.00	-21.07	peak	V
2483.500	46.80	0.14	46.94	54.00	-7.06	AVG	V
2486.440	58.60	0.14	58.74	74.00	-15.26	peak	V
2486.440	52.09	0.14	52.23	54.00	-1.77	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		Aero Platform		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 2		Date:		07/29/2016	
Frequency:		2467 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	57.39	0.03	57.42	74.00	-16.58	peak	H
2483.500	48.21	0.03	48.24	54.00	-5.76	AVG	H
2488.975	54.44	0.06	54.50	74.00	-19.50	peak	H
2488.975	46.49	0.06	46.55	54.00	-7.45	AVG	H
2483.500	61.39	0.03	61.42	74.00	-12.58	peak	V
2483.500	52.11	0.03	52.14	54.00	-1.86	AVG	V
2489.430	58.93	0.06	58.99	74.00	-15.01	peak	V
2489.430	50.91	0.06	50.97	54.00	-3.03	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	Aero Platform			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	07/23/2016		
Frequency:	2412 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2389.640	58.43	-0.22	58.21	74.00	-15.79	peak	H
2389.640	47.77	-0.22	47.55	54.00	-6.45	AVG	H
2390.000	57.88	-0.22	57.66	74.00	-16.34	peak	H
2390.000	48.48	-0.22	48.26	54.00	-5.74	AVG	H
2389.420	69.28	-0.22	69.06	74.00	-4.94	peak	V
2389.420	49.93	-0.22	49.71	54.00	-4.29	AVG	V
2390.000	68.84	-0.22	68.62	74.00	-5.38	peak	V
2390.000	51.74	-0.22	51.52	54.00	-2.48	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Corrected factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		Aero Platform		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 3		Date:		07/23/2016	
Frequency:		2437 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2389.230	54.10	-0.22	53.88	74.00	-20.12	peak	H
2389.230	43.52	-0.22	43.30	54.00	-10.70	AVG	H
2390.000	54.88	-0.22	54.66	74.00	-19.34	peak	H
2390.000	44.84	-0.22	44.62	54.00	-9.38	AVG	H
2483.500	58.74	0.14	58.88	74.00	-15.12	peak	H
2483.500	47.22	0.14	47.36	54.00	-6.64	AVG	H
2486.130	61.35	0.14	61.49	74.00	-12.51	peak	H
2486.130	46.97	0.14	47.11	54.00	-6.89	AVG	H
2389.230	58.90	-0.22	58.68	74.00	-15.32	peak	V
2389.230	50.54	-0.22	50.32	54.00	-3.68	AVG	V
2390.000	60.63	-0.22	60.41	74.00	-13.59	peak	V
2390.000	50.67	-0.22	50.45	54.00	-3.55	AVG	V
2483.500	63.44	0.14	63.58	74.00	-10.42	peak	V
2483.500	51.16	0.14	51.30	54.00	-2.70	AVG	V
2485.750	65.78	0.14	65.92	74.00	-8.08	peak	V
2485.750	51.03	0.14	51.17	54.00	-2.83	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Aero Platform	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	07/23/2016
Frequency:	2462 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	61.67	0.14	61.81	74.00	-12.19	peak	H
2483.500	47.96	0.14	48.10	54.00	-5.90	AVG	H
2484.080	64.09	0.14	64.23	74.00	-9.77	peak	H
2484.080	47.15	0.14	47.29	54.00	-6.71	AVG	H
2483.500	67.80	0.14	67.94	74.00	-6.06	peak	V
2483.500	51.82	0.14	51.96	54.00	-2.04	AVG	V
2483.640	72.59	0.14	72.73	74.00	-1.27	peak	V
2483.640	51.68	0.14	51.82	54.00	-2.18	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Corrected factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	Aero Platform			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	07/29/2016		
Frequency:	2467 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	63.47	0.03	63.50	74.00	-10.50	peak	H
2483.500	50.08	0.03	50.11	54.00	-3.89	AVG	H
2484.110	65.03	0.04	65.07	74.00	-8.93	peak	H
2484.110	47.89	0.04	47.93	54.00	-6.07	AVG	H
2483.500	68.08	0.03	68.11	74.00	-5.89	peak	V
2483.500	52.04	0.03	52.07	54.00	-1.93	AVG	V
2484.845	71.11	0.04	71.15	74.00	-2.85	peak	V
2484.845	50.18	0.04	50.22	54.00	-3.78	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	Aero Platform			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	07/23/2016		
Frequency:	2412 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2389.420	61.68	-0.22	61.46	74.00	-12.54	peak	H
2389.420	48.15	-0.22	47.93	54.00	-6.07	AVG	H
2390.000	63.02	-0.22	62.80	74.00	-11.20	peak	H
2390.000	49.37	-0.22	49.15	54.00	-4.85	AVG	H
2389.750	65.41	-0.22	65.19	74.00	-8.81	peak	V
2389.750	51.12	-0.22	50.90	54.00	-3.10	AVG	V
2390.000	65.75	-0.22	65.53	74.00	-8.47	peak	V
2390.000	51.57	-0.22	51.35	54.00	-2.65	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		Aero Platform		Temp.(℃)/Hum.(%RH):		26(℃)/60%RH	
Mode:		Mode 4		Date:		07/23/2016	
Frequency:		2437 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2375.930	54.33	-0.27	54.06	74.00	-19.94	peak	H
2375.930	43.38	-0.27	43.11	54.00	-10.89	AVG	H
2390.000	54.29	-0.22	54.07	74.00	-19.93	peak	H
2390.000	42.04	-0.22	41.82	54.00	-12.18	AVG	H
2483.500	56.26	0.14	56.40	74.00	-17.60	peak	H
2483.500	45.17	0.14	45.31	54.00	-8.69	AVG	H
2484.610	59.24	0.14	59.38	74.00	-14.62	peak	H
2484.610	44.65	0.14	44.79	54.00	-9.21	AVG	H
2389.230	57.14	-0.22	56.92	74.00	-17.08	peak	V
2389.230	48.42	-0.22	48.20	54.00	-5.80	AVG	V
2390.000	57.68	-0.22	57.46	74.00	-16.54	peak	V
2390.000	48.70	-0.22	48.48	54.00	-5.52	AVG	V
2483.500	61.95	0.14	62.09	74.00	-11.91	peak	V
2483.500	48.50	0.14	48.64	54.00	-5.36	AVG	V
2485.750	63.71	0.14	63.85	74.00	-10.15	peak	V
2485.750	48.00	0.14	48.14	54.00	-5.86	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	Aero Platform			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	07/23/2016		
Frequency:	2462 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	61.03	0.14	61.17	74.00	-12.83	peak	H
2483.500	48.94	0.14	49.08	54.00	-4.92	AVG	H
2484.800	68.53	0.14	68.67	74.00	-5.33	peak	H
2484.800	48.14	0.14	48.28	54.00	-5.72	AVG	H
2483.500	66.84	0.14	66.98	74.00	-7.02	peak	V
2483.500	51.78	0.14	51.92	54.00	-2.08	AVG	V
2485.040	70.43	0.14	70.57	74.00	-3.43	peak	V
2485.040	50.10	0.14	50.24	54.00	-3.76	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	Aero Platform			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	07/29/2016		
Frequency:	2467 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	63.51	0.03	63.54	74.00	-10.46	peak	H
2483.500	51.94	0.03	51.97	54.00	-2.03	AVG	H
2486.420	65.32	0.04	65.36	74.00	-8.64	peak	H
2486.420	47.29	0.04	47.33	54.00	-6.67	AVG	H
2483.500	68.73	0.03	68.76	74.00	-5.24	peak	V
2483.500	52.09	0.03	52.12	54.00	-1.88	AVG	V
2484.670	70.18	0.04	70.22	74.00	-3.78	peak	V
2484.670	50.24	0.04	50.28	54.00	-3.72	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	Aero Platform	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	07/23/2016
Frequency:	2422 MHz	Test By:	Eric Ou Yang

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2389.440	61.56	-0.22	61.34	74.00	-12.66	peak	H
2389.440	48.49	-0.22	48.27	54.00	-5.73	AVG	H
2390.000	60.51	-0.22	60.29	74.00	-13.71	peak	H
2390.000	49.28	-0.22	49.06	54.00	-4.94	AVG	H
2388.840	65.92	-0.22	65.70	74.00	-8.30	peak	V
2388.840	50.61	-0.22	50.39	54.00	-3.61	AVG	V
2390.000	66.08	-0.22	65.86	74.00	-8.14	peak	V
2390.000	52.31	-0.22	52.09	54.00	-1.91	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Corrected factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	Aero Platform			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	07/23/2016		
Frequency:	2437 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2375.930	54.04	-0.27	53.77	74.00	-20.23	peak	H
2375.930	48.26	-0.27	47.99	54.00	-6.01	AVG	H
2390.000	55.17	-0.22	54.95	74.00	-19.05	peak	H
2390.000	42.38	-0.22	42.16	54.00	-11.84	AVG	H
2483.500	58.86	0.14	59.00	74.00	-15.00	peak	H
2483.500	49.04	0.14	49.18	54.00	-4.82	AVG	H
2484.990	58.34	0.14	58.48	74.00	-15.52	peak	H
2484.990	47.10	0.14	47.24	54.00	-6.76	AVG	H
2388.280	58.09	-0.22	57.87	74.00	-16.13	peak	V
2388.280	42.36	-0.22	42.14	54.00	-11.86	AVG	V
2390.000	62.51	-0.22	62.29	74.00	-11.71	peak	V
2390.000	45.01	-0.22	44.79	54.00	-9.21	AVG	V
2483.500	68.67	0.14	68.81	74.00	-5.19	peak	V
2483.500	51.33	0.14	51.47	54.00	-2.53	AVG	V
2484.040	71.34	0.14	71.48	74.00	-2.52	peak	V
2484.040	51.03	0.14	51.17	54.00	-2.83	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	Aero Platform			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	07/23/2016		
Frequency:	2452 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	58.72	0.14	58.86	74.00	-15.14	peak	H
2483.500	49.26	0.14	49.40	54.00	-4.60	AVG	H
2483.650	60.35	0.14	60.49	74.00	-13.51	peak	H
2483.650	48.90	0.14	49.04	54.00	-4.96	AVG	H
2483.500	65.65	0.14	65.79	74.00	-8.21	peak	V
2483.500	51.85	0.14	51.99	54.00	-2.01	AVG	V
2483.900	68.90	0.14	69.04	74.00	-4.96	peak	V
2483.900	51.68	0.14	51.82	54.00	-2.18	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).



Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	Aero Platform			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	07/29/2016		
Frequency:	2457 MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	60.60	0.03	60.63	74.00	-13.37	peak	H
2483.500	48.39	0.03	48.42	54.00	-5.58	AVG	H
2484.250	64.02	0.04	64.06	74.00	-9.94	peak	H
2484.250	46.07	0.04	46.11	54.00	-7.89	AVG	H
2483.500	67.37	0.03	67.40	74.00	-6.60	peak	V
2483.500	52.16	0.03	52.19	54.00	-1.81	AVG	V
2485.195	69.82	0.04	69.86	74.00	-4.14	peak	V
2485.195	49.73	0.04	49.77	54.00	-4.23	AVG	V

Note:1.Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for maximum output power is 30dBm.


And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Directional Gain = $10 \cdot \log\{[10^{(G1/10)} + 10^{(G2/10)} + \dots + 10^{(Gn/10)}] / NANT\}$

* CDD mode : $10 \cdot \log\{[10^{(G1/10)} + 10^{(G2/10)} + \dots + 10^{(Gn/10)}] / NANT\} = 3.89 \text{ dBi} < 6\text{dBi}$

* CDD mode power limit shall be reduced = 30 dBm

6.2. Test Setup

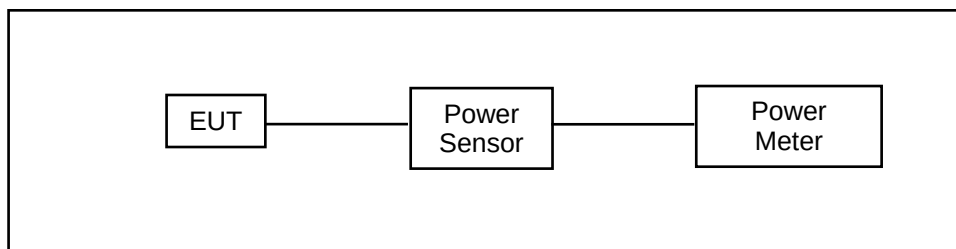

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Anritsu	MA2411B	1126022	08/24/2015	1 year
Power Meter	Anritsu	ML2495A	1135009	08/24/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor.



6.5. Test Result

Model Number	Aero Platform						
Test Item	Maximum Conducted Output Power						
Date of Test	07/22/2016						
ANT-0							
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			dBm	W	dBm	W	dBm
Mode 2	2412	1M	18.95	0.079	22.67	0.185	< 30
	2437		20.96	0.125	24.72	0.296	< 30
	2462		17.88	0.061	21.60	0.145	< 30
	2467		16.10	0.041	20.05	0.101	< 30
	2437	2M	20.83	0.121	24.72	0.296	< 30
	2437	5.5M	20.91	0.123	24.58	0.287	< 30
	2437	11M	20.79	0.120	24.59	0.288	< 30
Mode 3	2412	6M	16.36	0.043	21.70	0.148	< 30
	2437		20.86	0.122	26.60	0.457	< 30
	2462		15.91	0.039	21.23	0.133	< 30
	2467		14.22	0.026	19.72	0.094	< 30
	2437	9M	20.68	0.117	26.52	0.449	< 30
	2437	12M	20.66	0.116	26.39	0.436	< 30
	2437	18M	20.55	0.114	26.40	0.437	< 30
	2437	24M	20.64	0.116	26.48	0.445	< 30
	2437	36M	20.55	0.114	26.41	0.438	< 30
	2437	48M	20.63	0.116	26.49	0.446	< 30
	2437	54M	20.74	0.119	26.63	0.460	< 30

Note: The relevant measured result has the offset with cable loss already.



Model Number	Aero Platform						
Test Item	Maximum Conducted Output Power						
Date of Test	07/22/2016						
ANT-0							
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			dBm	W	dBm	W	dBm
Mode 4	2412	13M	16.61	0.046	22.08	0.161	< 30
	2437		19.13	0.082	24.81	0.303	< 30
	2462		15.31	0.034	20.84	0.121	< 30
	2467		13.78	0.024	19.13	0.082	< 30
	2437	26M	19.10	0.081	24.79	0.301	< 30
	2437	39M	19.04	0.080	24.74	0.298	< 30
	2437	52M	19.02	0.080	24.73	0.297	< 30
	2437	78M	18.95	0.079	24.65	0.292	< 30
	2437	104M	18.91	0.078	24.60	0.288	< 30
	2437	117M	18.99	0.079	24.68	0.294	< 30
	2437	130M	18.85	0.077	24.52	0.283	< 30
Mode 5	2422	27M	14.66	0.029	20.21	0.105	< 30
	2437		15.45	0.035	21.00	0.126	< 30
	2452		12.93	0.020	17.91	0.062	< 30
	2457		11.36	0.014	16.83	0.048	< 30
	2437	54M	15.43	0.035	20.97	0.125	< 30
	2437	81M	15.39	0.035	20.91	0.123	< 30
	2437	108M	15.31	0.034	20.85	0.122	< 30
	2437	162M	15.28	0.034	20.80	0.120	< 30
	2437	216M	15.40	0.035	20.93	0.124	< 30
	2437	243M	15.35	0.034	20.88	0.122	< 30
	2437	135M	15.33	0.034	20.86	0.122	< 30

Note: The relevant measured result has the offset with cable loss already.



Model Number	Aero Platform						
Test Item	Maximum Conducted Output Power						
Date of Test	07/22/2016						
ANT-1							
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			dBm	W	dBm	W	dBm
Mode 2	2412	1M	19.47	0.089	23.13	0.206	< 30
	2437		21.45	0.140	25.25	0.335	< 30
	2462		18.34	0.068	22.06	0.161	< 30
	2467		16.24	0.042	20.17	0.104	< 30
	2437	2M	21.43	0.139	25.21	0.332	< 30
	2437	5.5M	21.35	0.136	25.15	0.327	< 30
	2437	11M	21.39	0.138	25.17	0.329	< 30
Mode 3	2412	6M	16.82	0.048	22.30	0.170	< 30
	2437		21.30	0.135	27.10	0.513	< 30
	2462		16.38	0.043	21.82	0.152	< 30
	2467		14.48	0.028	19.93	0.098	< 30
	2437	9M	21.25	0.133	27.07	0.509	< 30
	2437	12M	21.19	0.132	26.99	0.500	< 30
	2437	18M	21.06	0.128	26.87	0.486	< 30
	2437	24M	21.09	0.129	26.91	0.491	< 30
	2437	36M	21.13	0.130	26.95	0.495	< 30
	2437	48M	21.20	0.132	27.01	0.502	< 30
	2437	54M	21.22	0.132	27.05	0.507	< 30

Note: The relevant measured result has the offset with cable loss already.



Model Number	Aero Platform						
Test Item	Maximum Conducted Output Power						
Date of Test	07/22/2016						
ANT-1							
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			dBm	W	dBm	W	dBm
Mode 4	2412	13M	17.05	0.051	22.57	0.181	< 30
	2437		19.70	0.093	25.35	0.343	< 30
	2462		15.55	0.036	21.08	0.128	< 30
	2467		13.91	0.025	19.37	0.086	< 30
	2437	26M	19.68	0.093	25.32	0.340	< 30
	2437	39M	19.63	0.092	25.28	0.337	< 30
	2437	52M	19.47	0.089	25.12	0.325	< 30
	2437	78M	19.51	0.089	25.18	0.330	< 30
	2437	104M	19.46	0.088	25.10	0.324	< 30
	2437	117M	19.60	0.091	25.26	0.336	< 30
	2437	130M	19.55	0.090	25.20	0.331	< 30
Mode 5	2422	27M	15.21	0.033	20.70	0.117	< 30
	2437		15.99	0.040	21.49	0.141	< 30
	2452		13.24	0.021	18.40	0.069	< 30
	2457		11.53	0.014	16.97	0.050	< 30
	2437	54M	15.95	0.039	21.43	0.139	< 30
	2437	81M	15.91	0.039	21.40	0.138	< 30
	2437	108M	15.88	0.039	21.38	0.137	< 30
	2437	162M	15.80	0.038	21.30	0.135	< 30
	2437	216M	15.82	0.038	21.33	0.136	< 30
	2437	243M	15.68	0.037	21.19	0.132	< 30
	2437	135M	15.72	0.037	21.21	0.132	< 30

Note: The relevant measured result has the offset with cable loss already.



Model Number	Aero Platform						
Test Item	Maximum Conducted Output Power						
Date of Test	07/22/2016						
ANT-0+1							
Test Mode	Frequency (MHz)	Data Rate	Average Output Power		Peak Output Power		
			Measurement Results		Measurement Results		Limit
			dBm	W	dBm	W	dBm
Mode 4	2412	13M	19.85	0.097	25.34	0.342	< 30
	2437		22.43	0.175	28.10	0.645	< 30
	2462		18.44	0.070	23.97	0.250	< 30
	2467		16.86	0.048	22.26	0.168	< 30
	2437	26M	22.41	0.174	28.07	0.642	< 30
	2437	39M	22.36	0.172	28.03	0.635	< 30
	2437	52M	22.26	0.168	27.94	0.622	< 30
	2437	78M	22.25	0.168	27.93	0.621	< 30
	2437	104M	22.20	0.166	27.87	0.612	< 30
	2437	117M	22.32	0.170	27.99	0.630	< 30
	2437	130M	22.22	0.167	27.88	0.614	< 30
Mode 5	2422	27M	17.95	0.062	23.47	0.222	< 30
	2437		18.74	0.075	24.26	0.267	< 30
	2452		16.10	0.041	21.17	0.131	< 30
	2457		14.46	0.028	19.91	0.098	< 30
	2437	54M	18.71	0.074	24.22	0.264	< 30
	2437	81M	18.67	0.074	24.17	0.261	< 30
	2437	108M	18.61	0.073	24.13	0.259	< 30
	2437	162M	18.56	0.072	24.07	0.255	< 30
	2437	216M	18.63	0.073	24.14	0.260	< 30
	2437	243M	18.53	0.071	24.05	0.254	< 30
	2437	135M	18.54	0.071	24.05	0.254	< 30


Note: The relevant measured result has the offset with cable loss already.

7 6dB RF Bandwidth Measurement

7.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

7.2. Test Setup

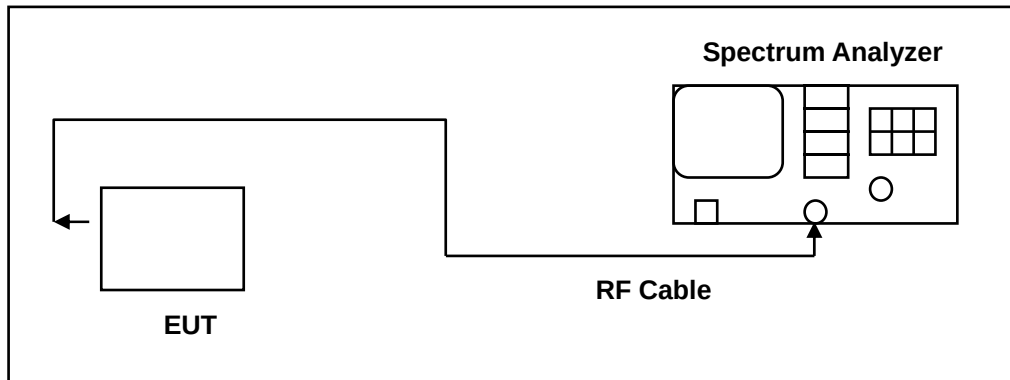

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)



7.5. Test Result


Model Number	Aero Platform			
Test Item	6dB RF Bandwidth			
Date of Test	07/24/2016, 07/30/2016			
Test Mode	Frequency (MHz)	Measurement (kHz)		Limit (kHz)
		ANT-0	ANT-1	
Mode 2	2412	---	10130	> 500
	2437	---	10120	> 500
	2462	---	10110	> 500
	2467	---	10140	> 500
Mode 3	2412	---	15150	> 500
	2437	---	15550	> 500
	2462	---	15130	> 500
	2467	---	15340	> 500
Mode 4	2412	15150	15720	> 500
	2437	15150	15730	> 500
	2462	15140	15680	> 500
	2467	15150	15720	> 500
Mode 5	2422	35130	35110	> 500
	2437	35070	33870	> 500
	2452	35130	35110	> 500
	2457	35120	35080	> 500



7.6. Test Graphs

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0

2412 MHz

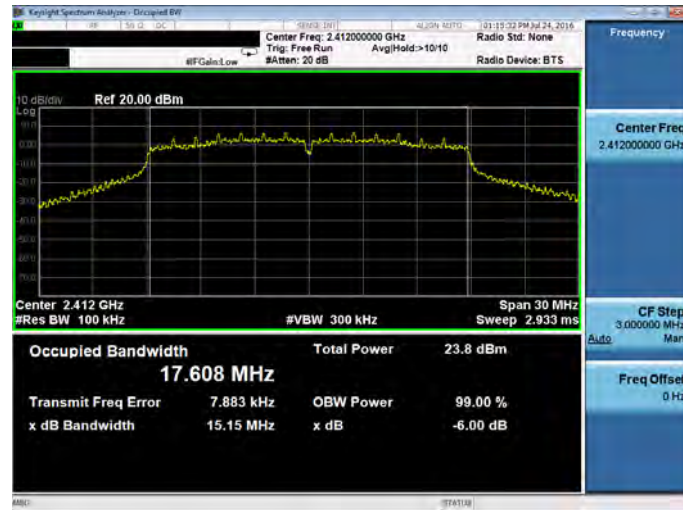


2437 MHz



2462 MHz



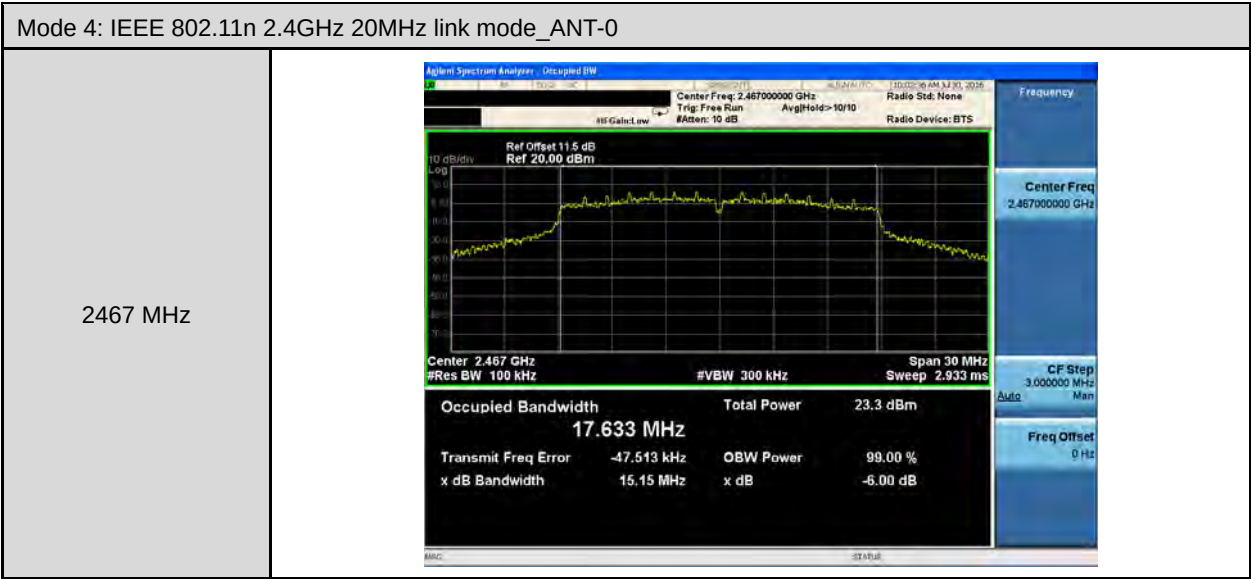



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0

2422 MHz




2437 MHz



2452 MHz



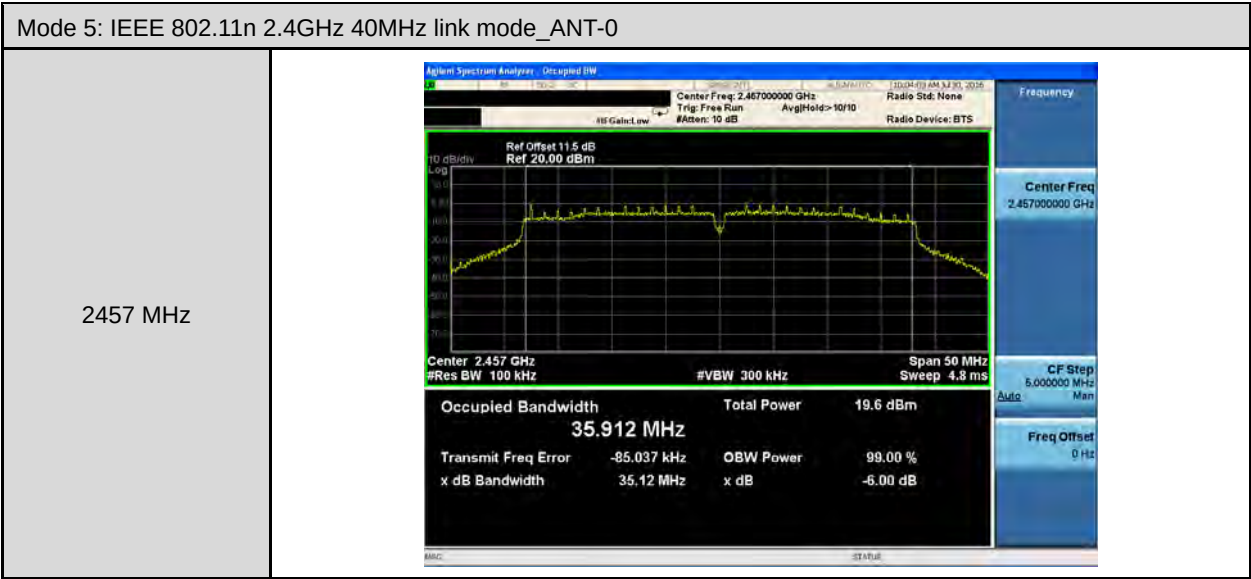

Mode 2: IEEE 802.11b link mode_ANT-1

2412 MHz




2437 MHz



2462 MHz



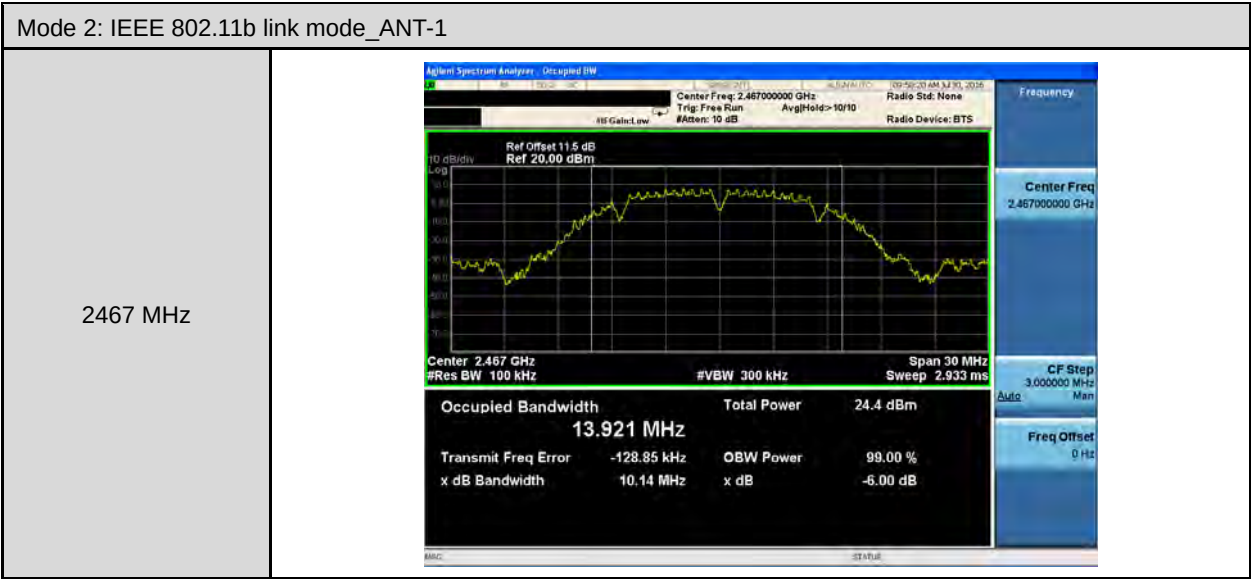



Mode 3: IEEE 802.11g link mode_ANT-1


2412 MHz




2437 MHz



2462 MHz

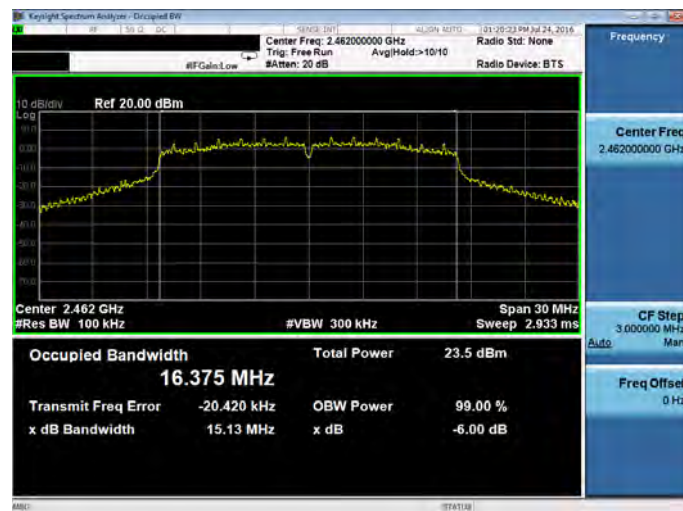

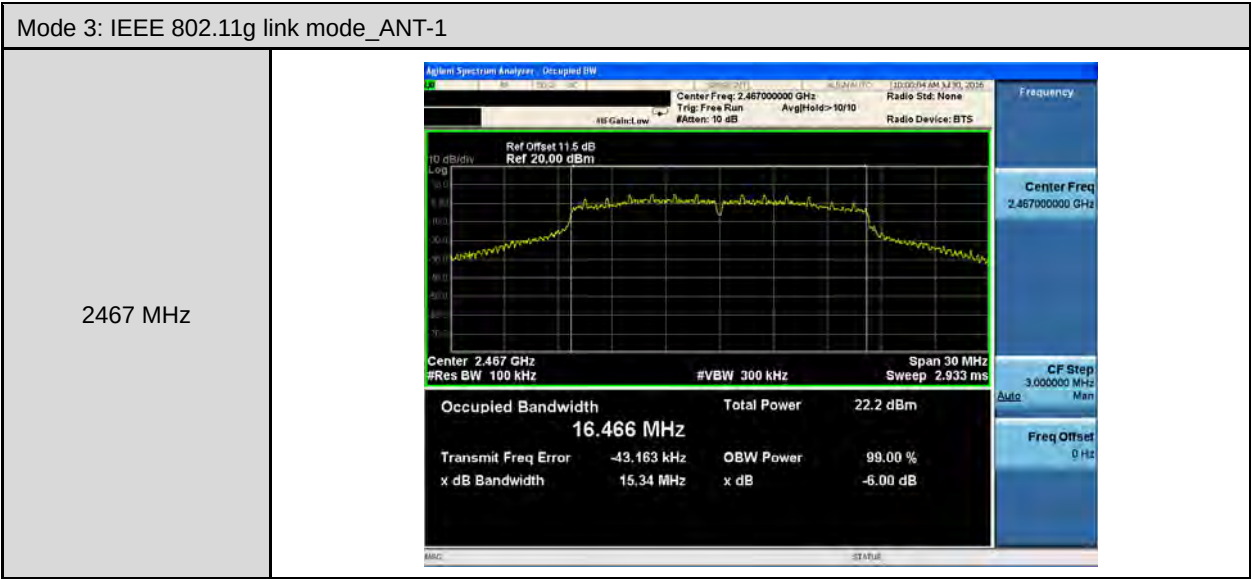


Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1


2412 MHz




2437 MHz

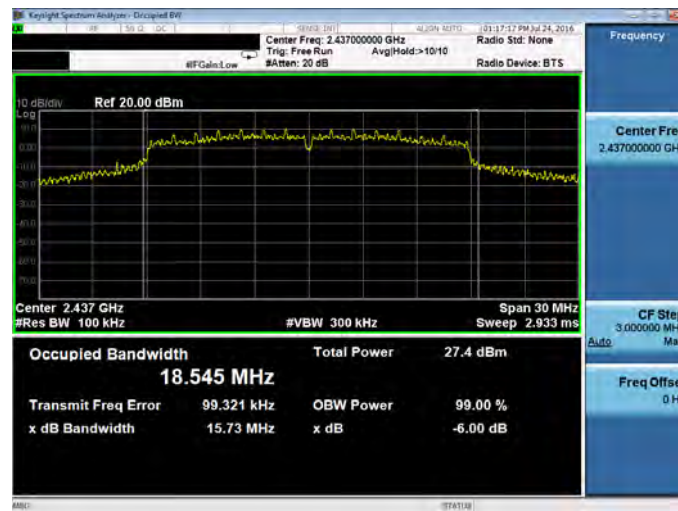

2462 MHz

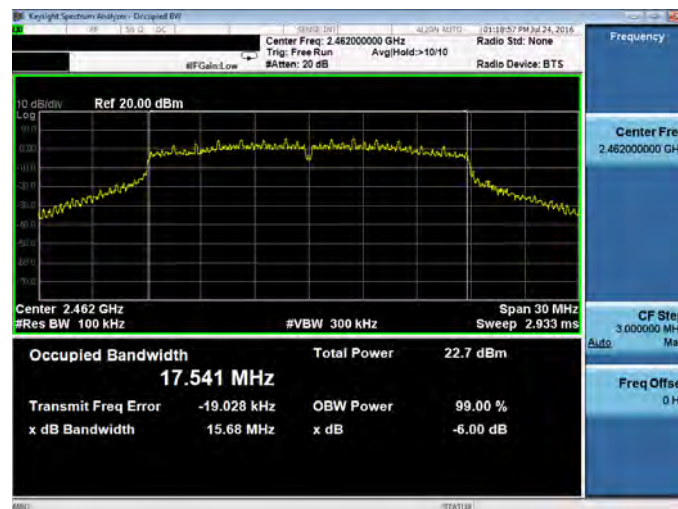

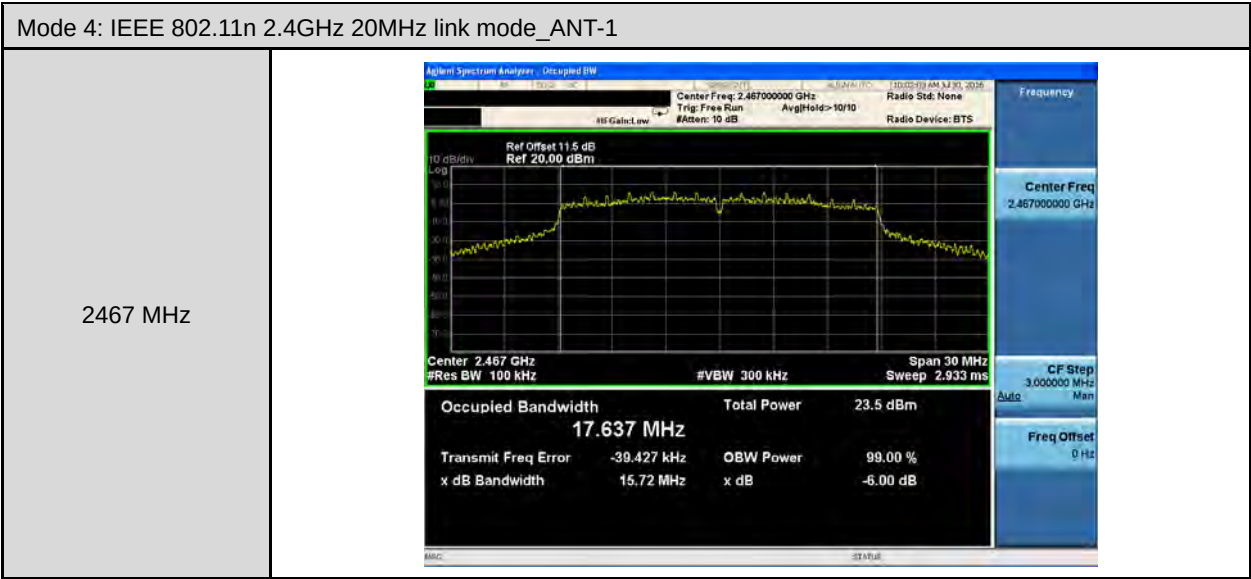



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

2422 MHz




2437 MHz



2452 MHz



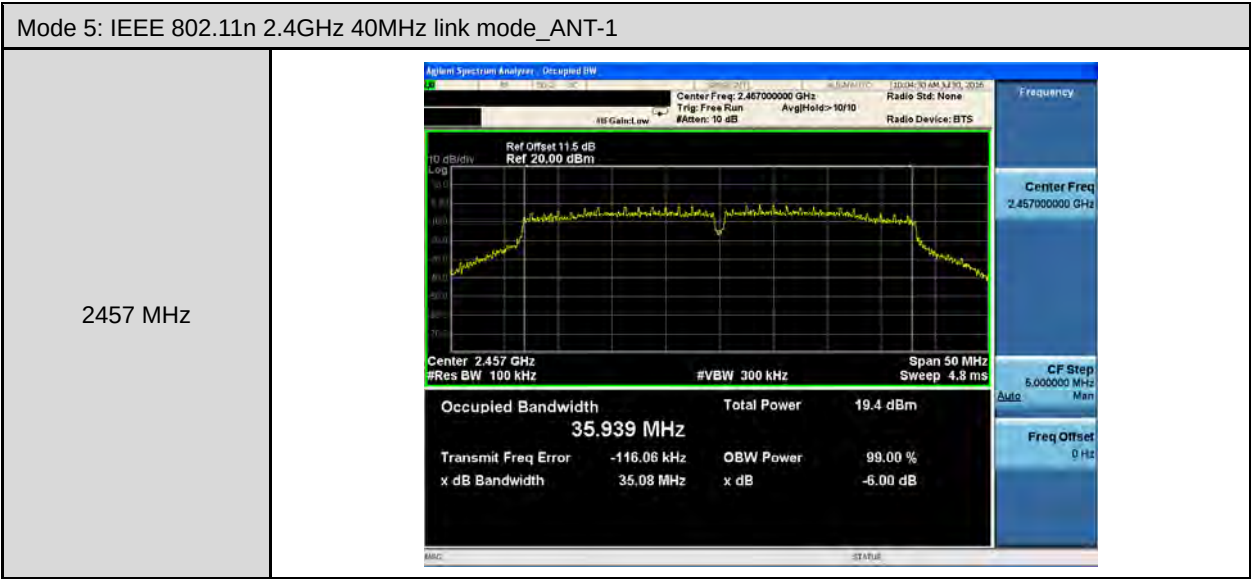

8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Directional Gain = $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\}$

* CDD mode : Directional Gain = $10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\} = 6.9 \text{ dBi} > 6\text{dBi}$

* CDD mode power limit shall be reduced = $8 - 0.9 = 7.1 \text{ dBm/3kHz}$

8.2. Test Setup

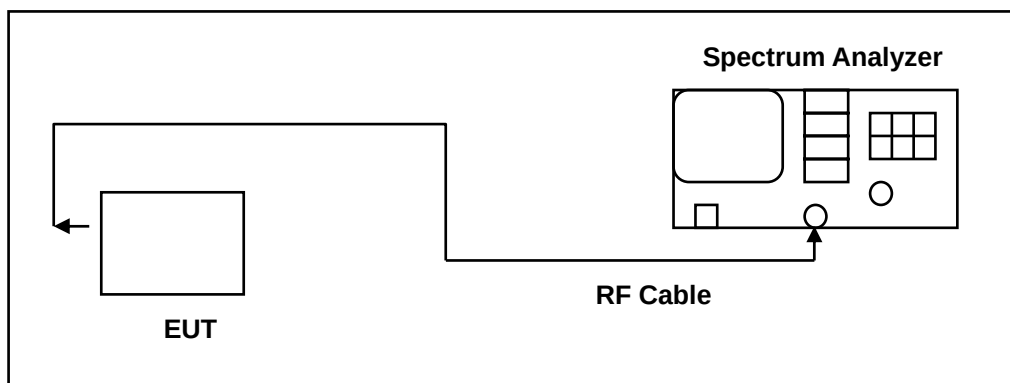

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.



8.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



8.5. Test Result

Model Number	Aero Platform			
Test Item	Maximum Power Density			
Date of Test	07/24/2016, 07/30/2016			
Test Mode	Frequency (MHz)	Measurement (dBm/3KHz)		Limit (dBm/3KHz)
		ANT-0	ANT-1	
Mode 2	2412	---	-2.965	< 8
	2437	---	-1.212	< 8
	2462	---	-4.119	< 8
	2467	---	-5.832	< 8
Mode 3	2412	---	-7.570	< 8
	2437	---	-3.009	< 8
	2462	---	-7.610	< 8
	2467	---	-8.764	< 8
Mode 4	2412	-7.864	-6.546	< 8
	2437	-4.312	-3.989	< 8
	2462	-8.371	-8.354	< 8
	2467	-10.652	-10.356	< 8
Mode 5	2422	-11.855	-10.591	< 8
	2437	-11.374	-11.322	< 8
	2452	-15.007	-13.849	< 8
	2457	-16.025	-16.031	< 8




Model Number	Aero Platform		
Test Item	Maximum Power Density		
Date of Test	07/24/2016, 07/30/2016		
Test Mode	Frequency (MHz)	Measurement (dBm/3KHz)	Limit (dBm/3KHz)
		ANT-0+1	
Mode 2	2412	-2.965	< 7.1
	2437	-1.212	< 7.1
	2462	-4.119	< 7.1
	2467	-5.832	< 7.1
Mode 3	2412	-7.570	< 7.1
	2437	-3.009	< 7.1
	2462	-7.610	< 7.1
	2467	-8.764	< 7.1
Mode 4	2412	-4.145	< 7.1
	2437	-1.137	< 7.1
	2462	-5.352	< 7.1
	2467	-7.491	< 7.1
Mode 5	2422	-8.167	< 7.1
	2437	-8.338	< 7.1
	2452	-11.379	< 7.1
	2457	-13.018	< 7.1




8.6. Test Graphs

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode _ANT-0


2412 MHz

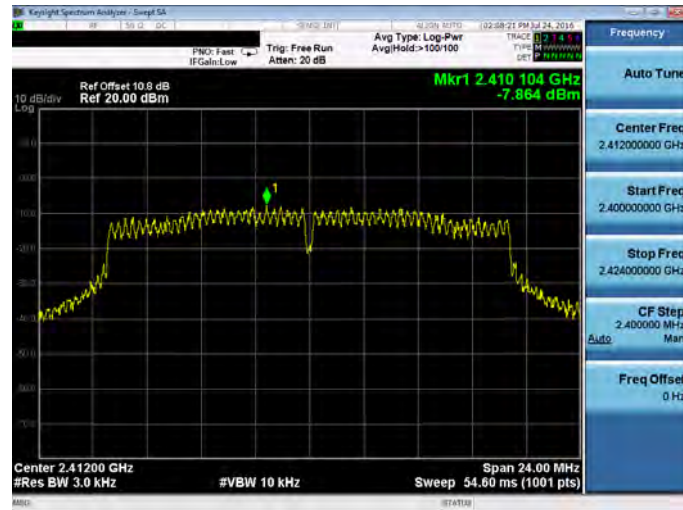

2437 MHz

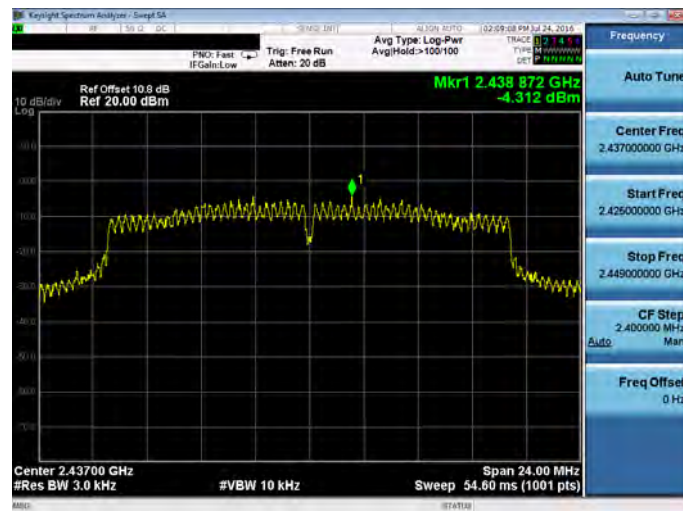


2462 MHz

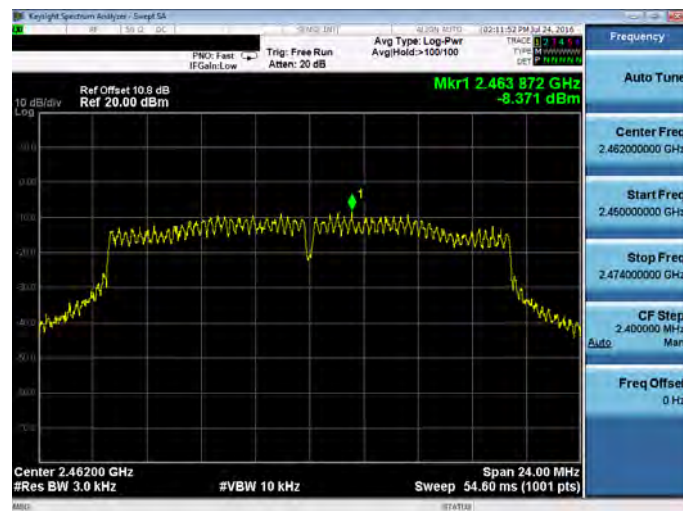



Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0


2467 MHz

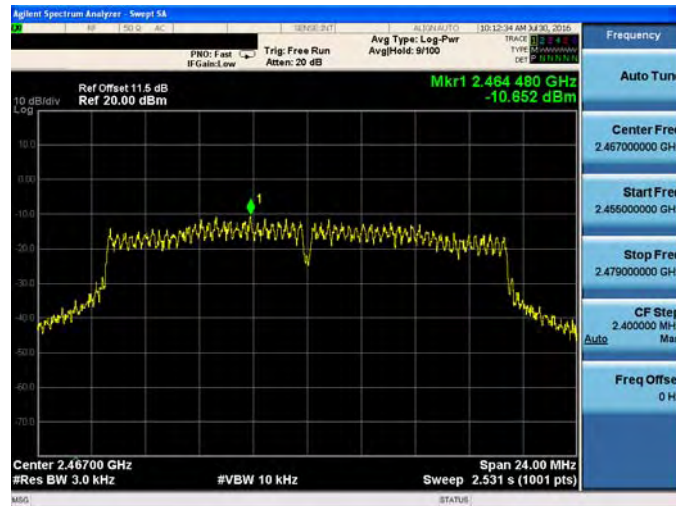




Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0


2422 MHz

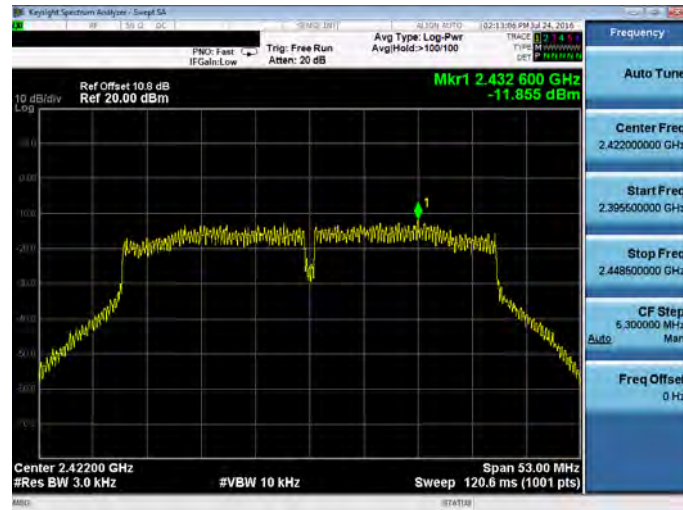

2437 MHz

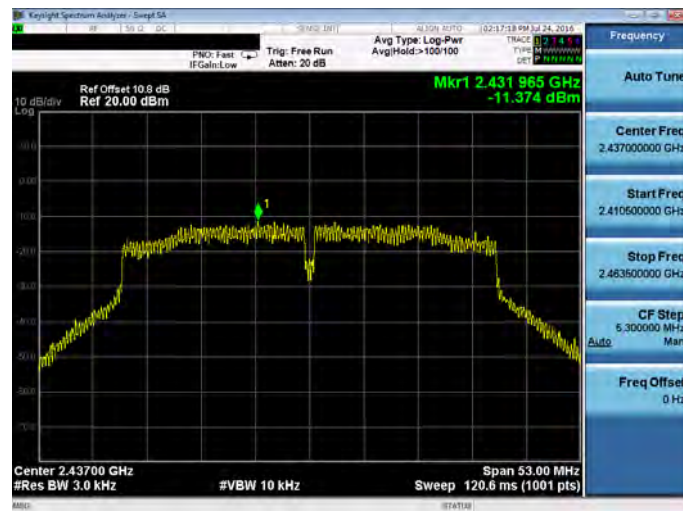


2452 MHz

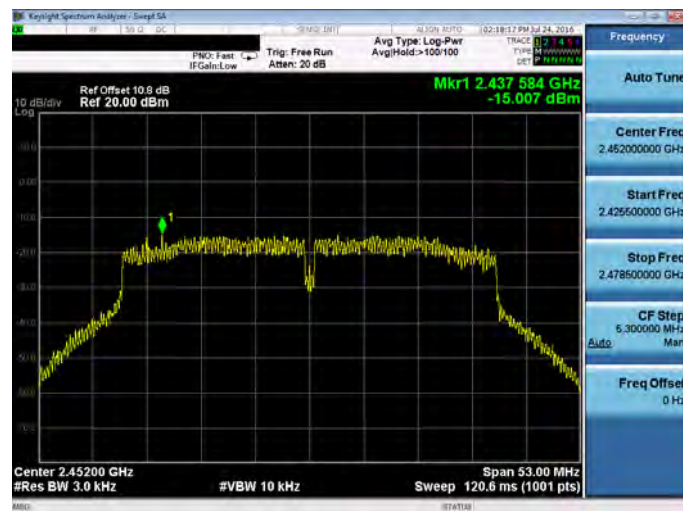



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0

2457 MHz

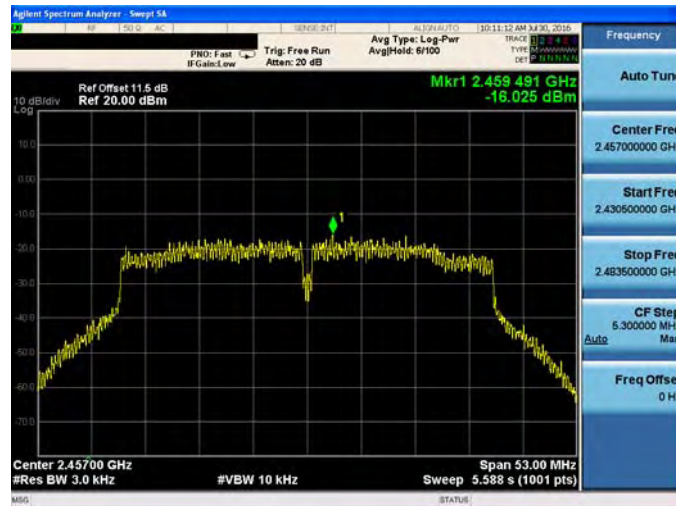



Mode 2: IEEE 802.11b link mode_ANT-1

2412 MHz



2437 MHz



2462 MHz





Mode 2: IEEE 802.11b link mode_ANT-1


2467 MHz






Mode 3: IEEE 802.11g link mode_ANT-1


2412 MHz

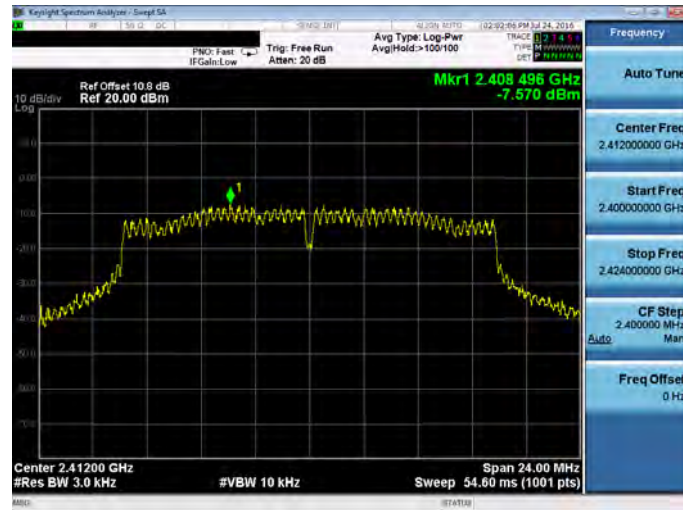

2437 MHz

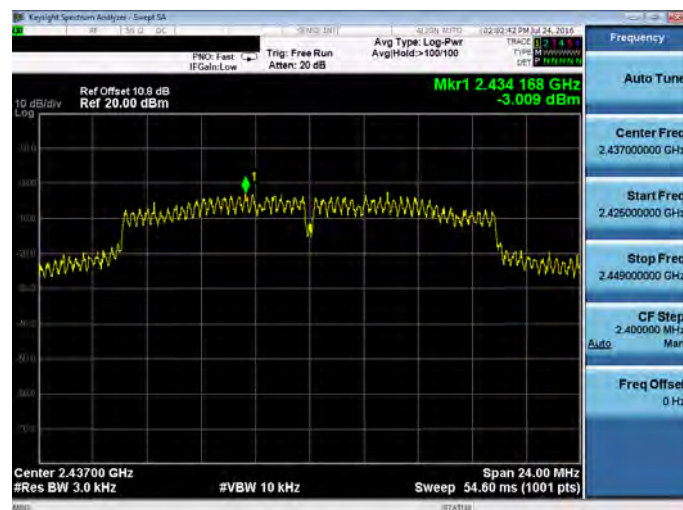


2462 MHz

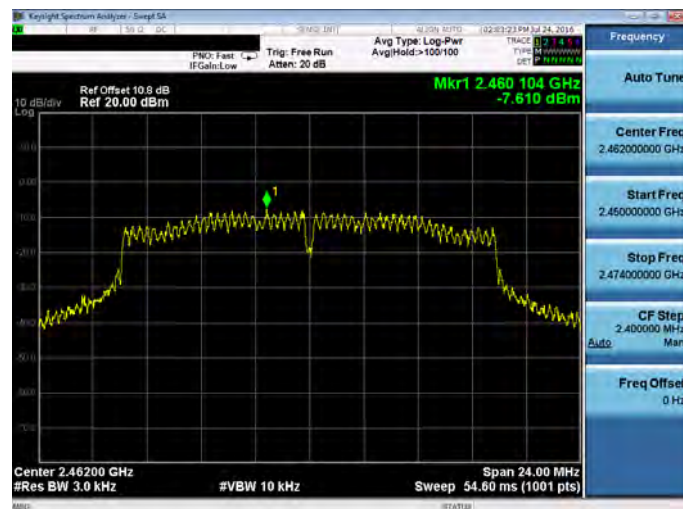



Mode 3: IEEE 802.11g link mode_ANT-1


2467 MHz

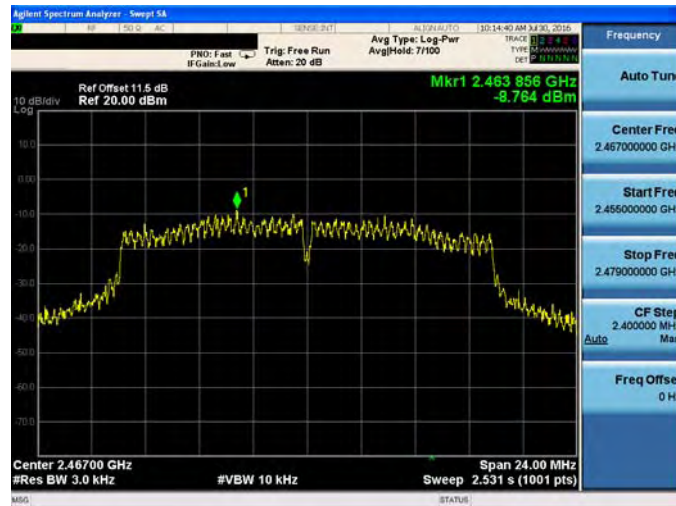




Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1


2412 MHz

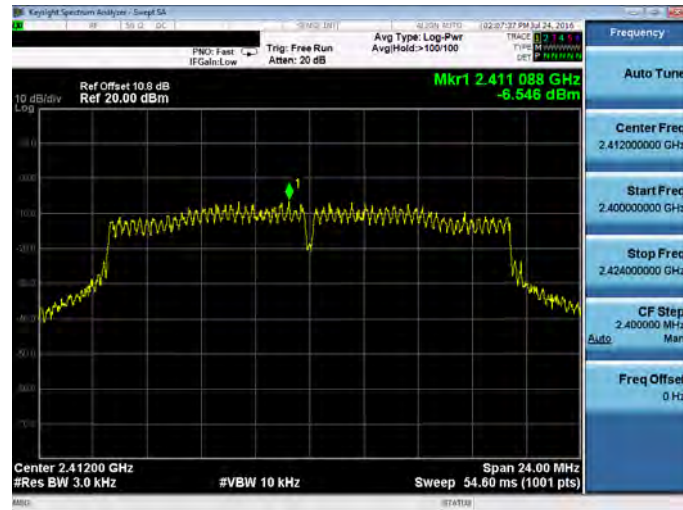

2437 MHz

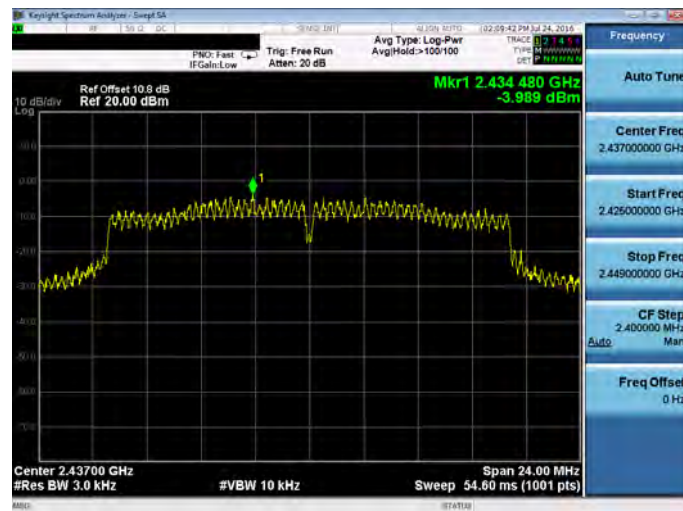


2462 MHz

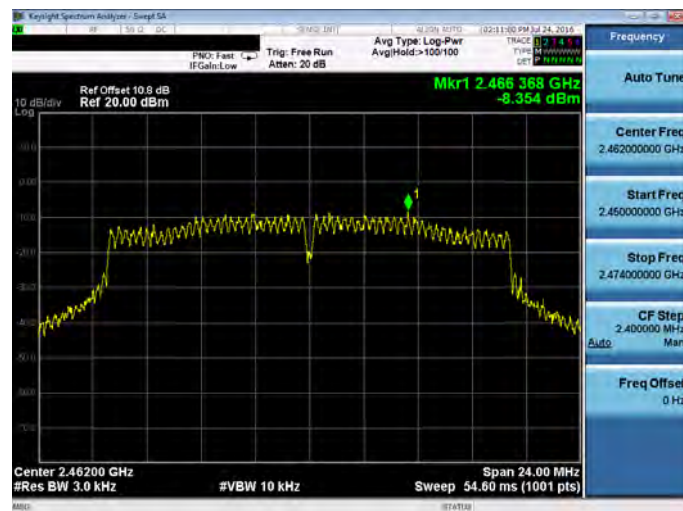




Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1

2467 MHz

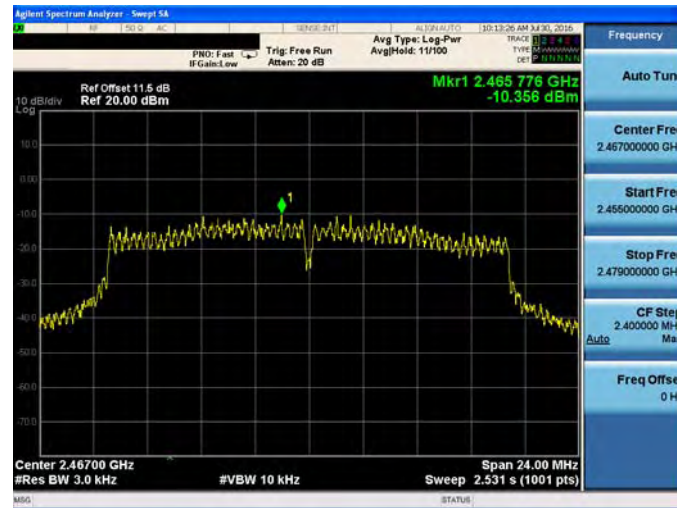


Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1


2422 MHz

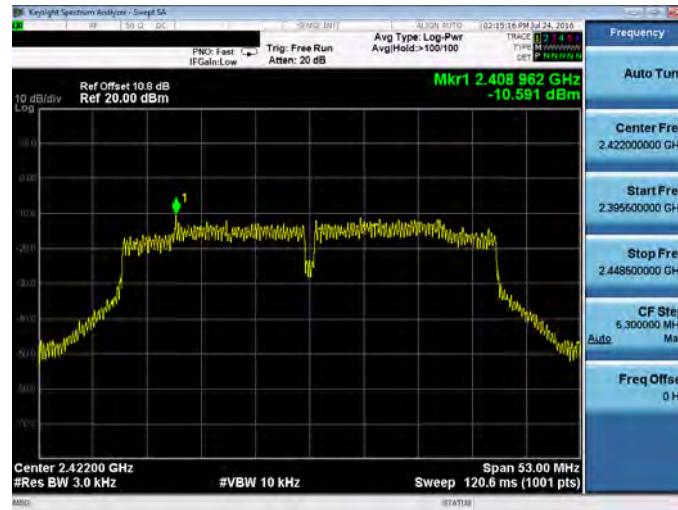

2437 MHz

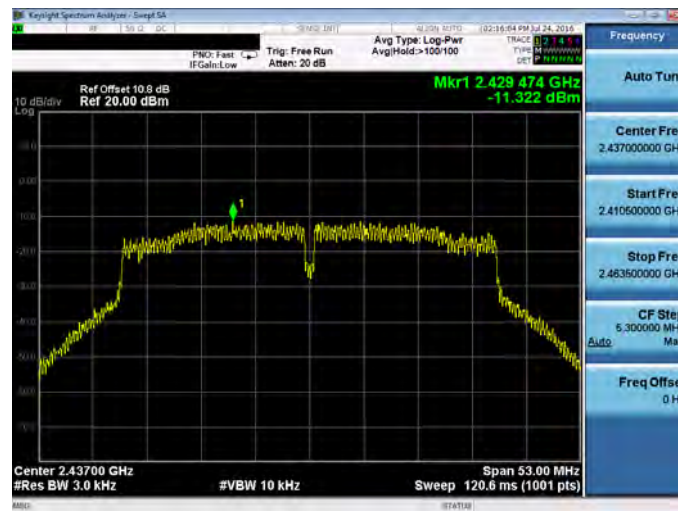


2452 MHz

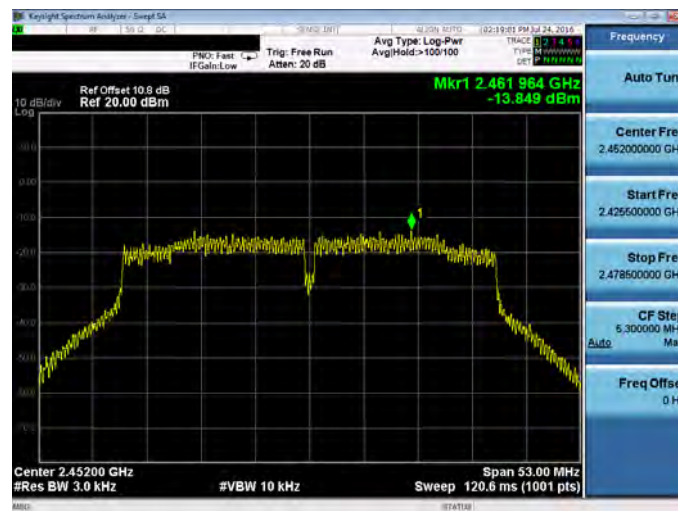



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

2457 MHz

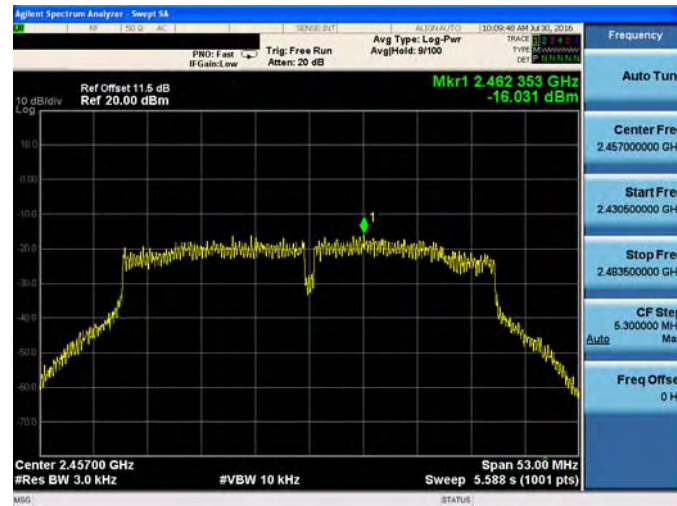


9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

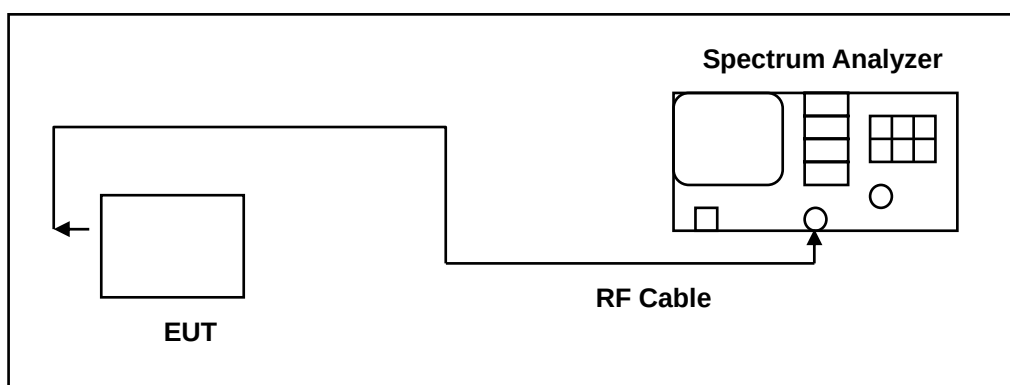

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/15/2015	1 year
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/27/2015	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/23/2016	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.

9.5. Test Graphs


Reference level

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0

2412 MHz



2437 MHz

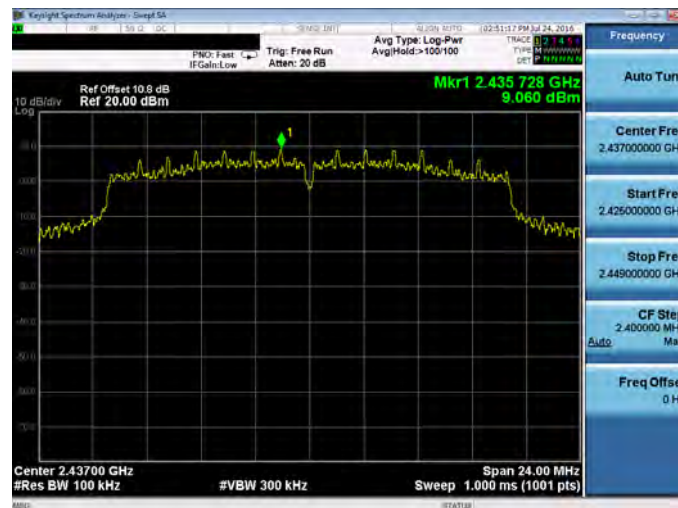

2462 MHz






Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0

2467 MHz




Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0


2422 MHz

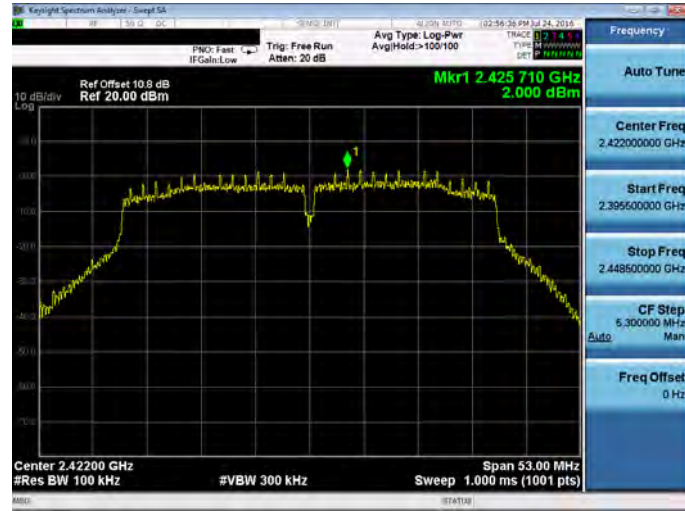

2437 MHz

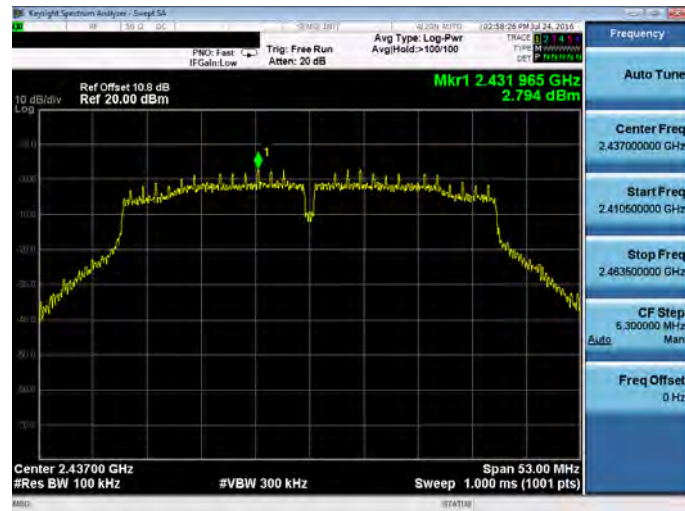

2452 MHz

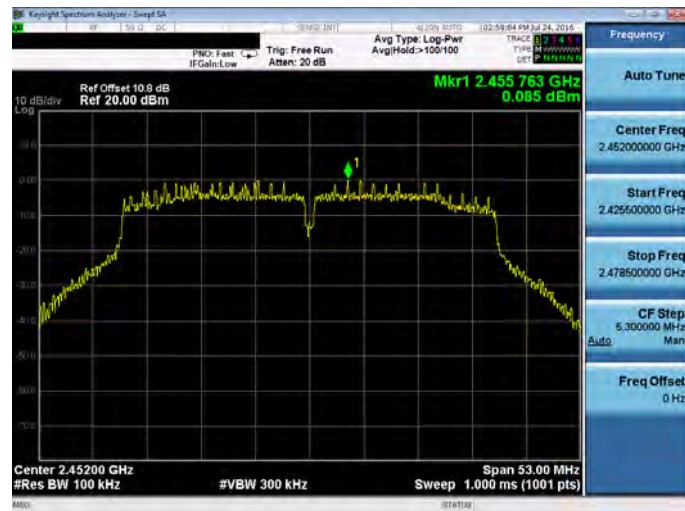



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0

2457 MHz





Mode 2: IEEE 802.11b link mode_ANT-1

2412 MHz



2437 MHz



2462 MHz





Mode 2: IEEE 802.11b link mode_ANT-1


2467 MHz






Mode 3: IEEE 802.11g link mode_ANT-1


2412 MHz

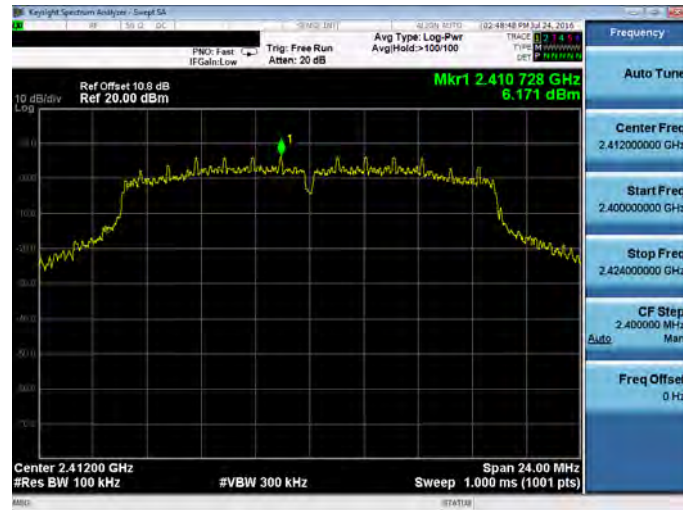

2437 MHz

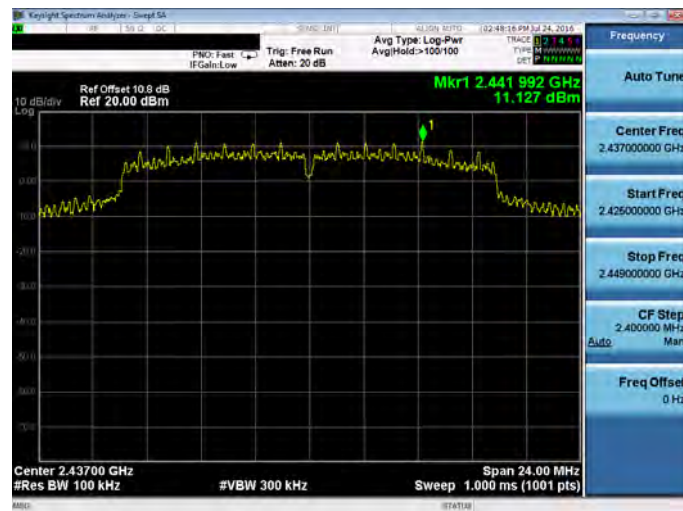

2462 MHz

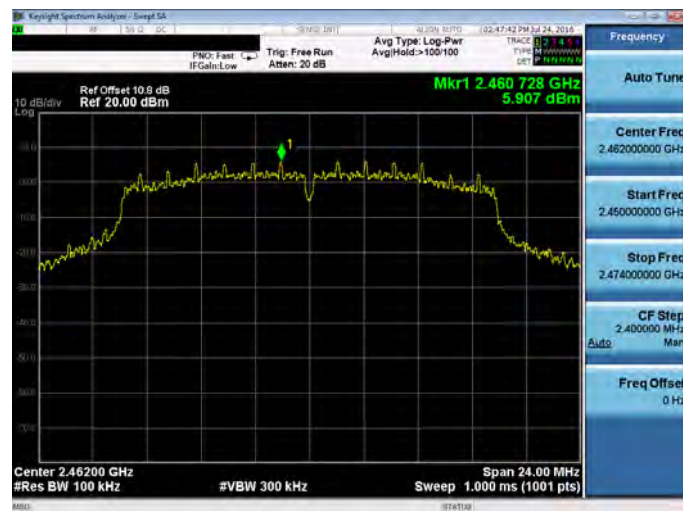




Mode 3: IEEE 802.11g link mode_ANT-1

2467 MHz




Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1


2412 MHz

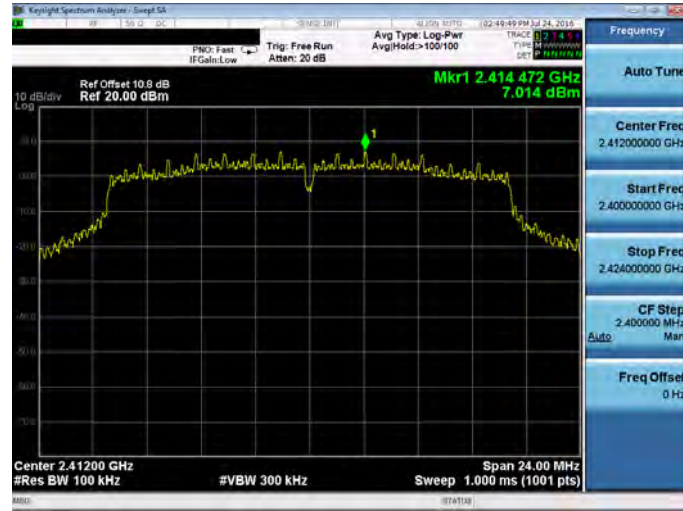


2437 MHz

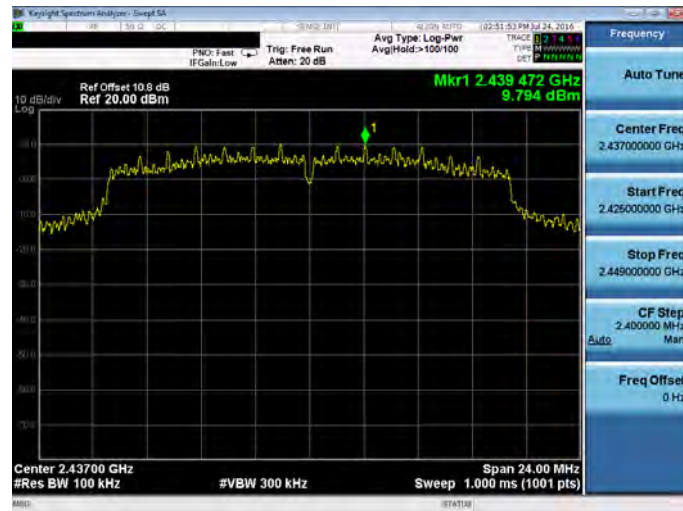

2462 MHz

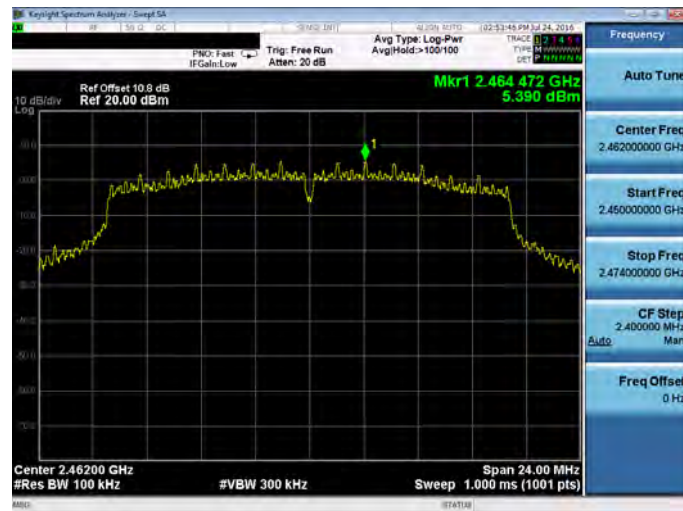




2467 MHz






Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode _ANT-1


2422 MHz

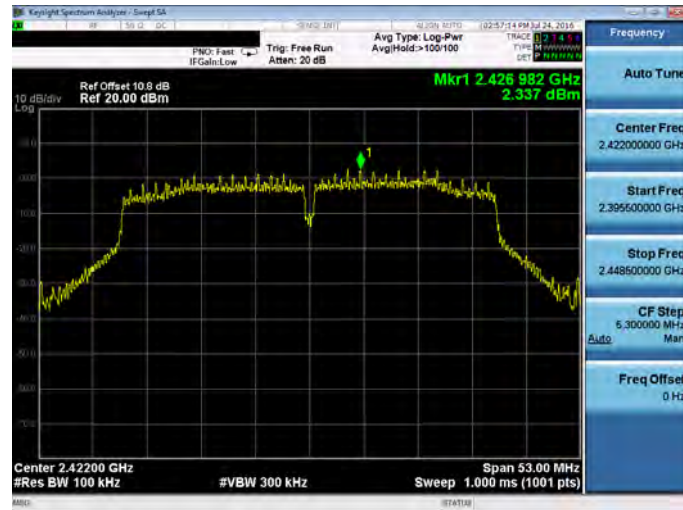

2437 MHz

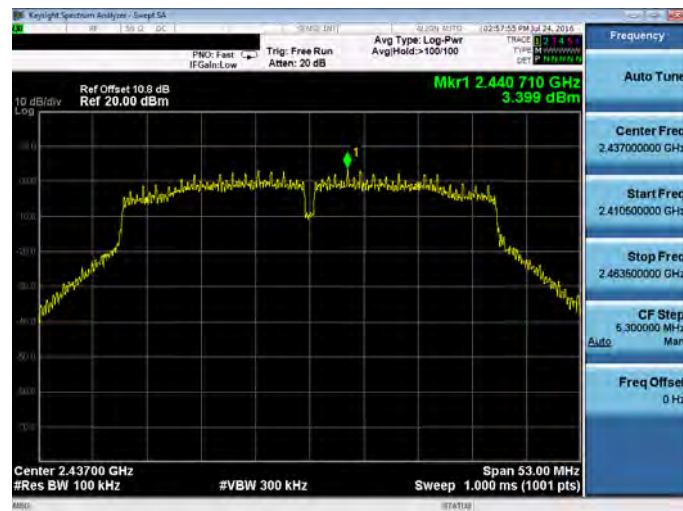

2452 MHz

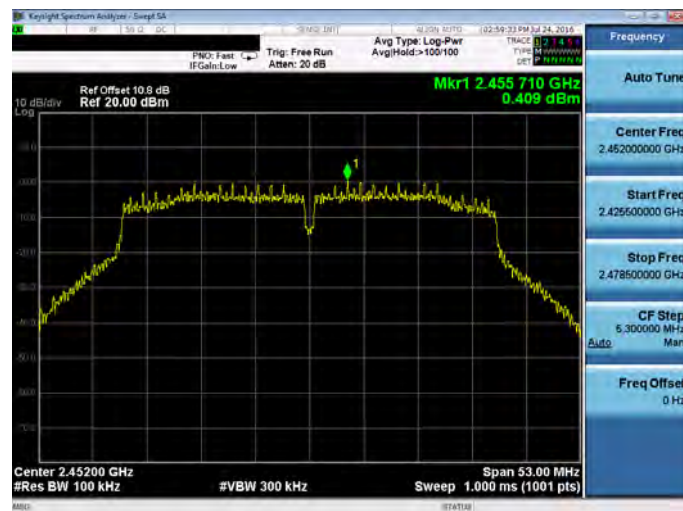



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

2457 MHz







Out of Band Conducted Emissions

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0

2412 MHz

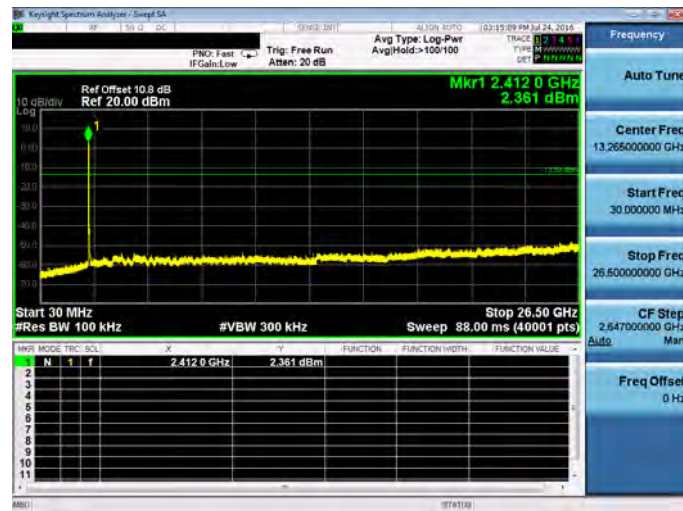

2437 MHz

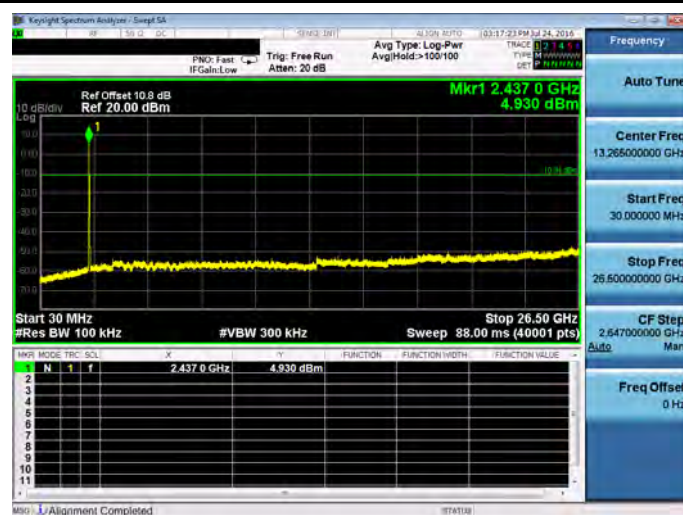


2462 MHz





Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0


2467 MHz

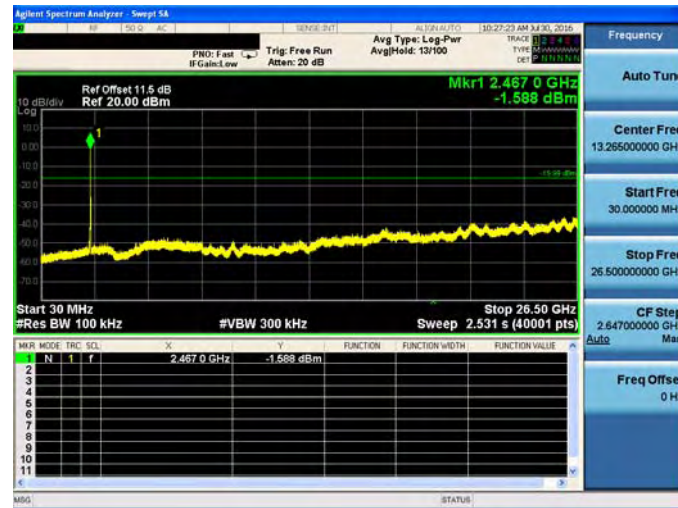



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0


2422 MHz

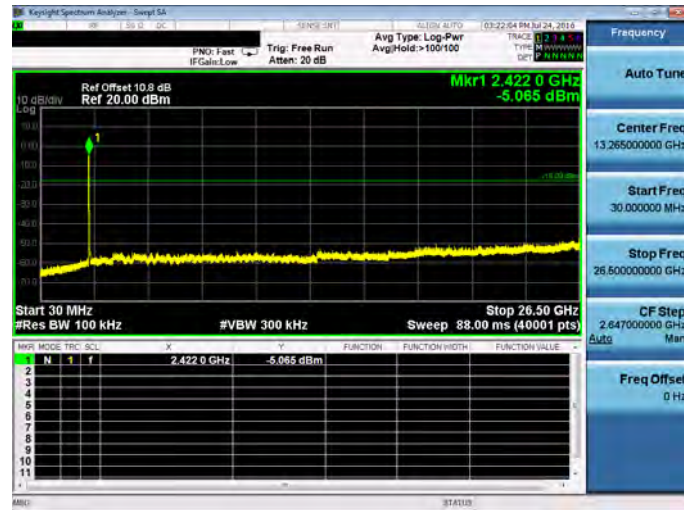

2437 MHz




2452 MHz

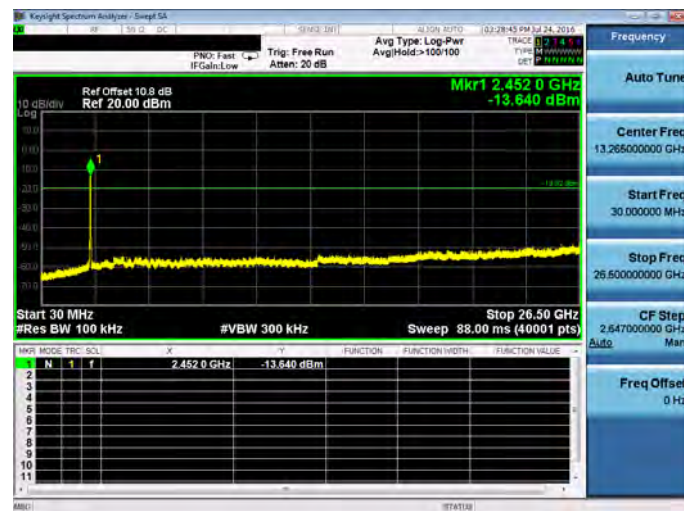



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0


2457 MHz

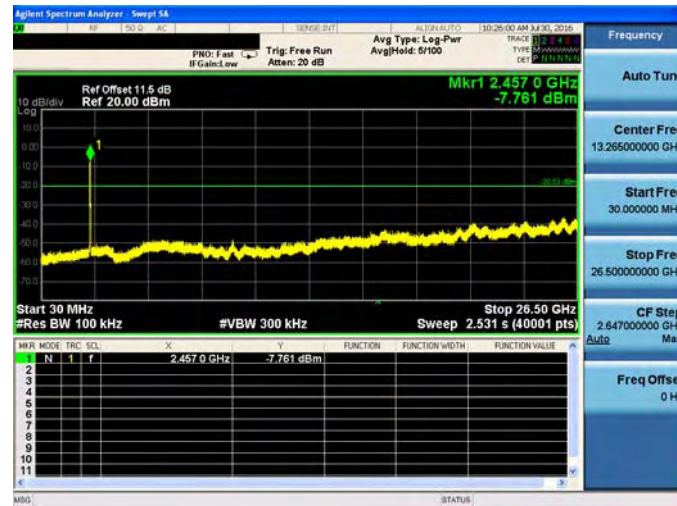




Mode 2: IEEE 802.11b link mode_ANT-1


2412 MHz

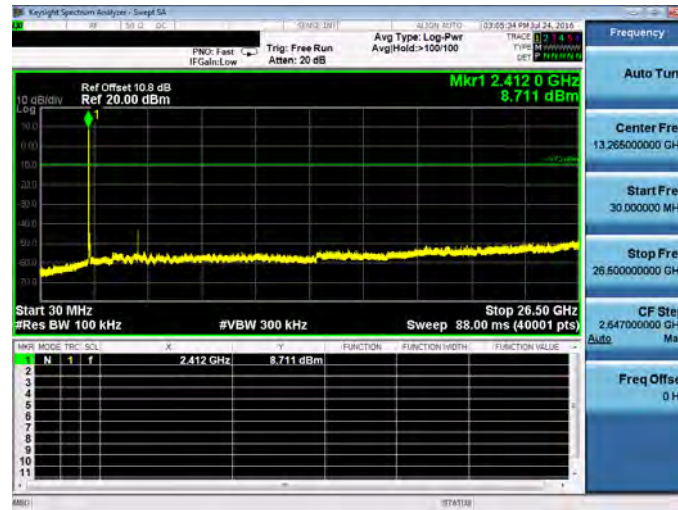

2437 MHz

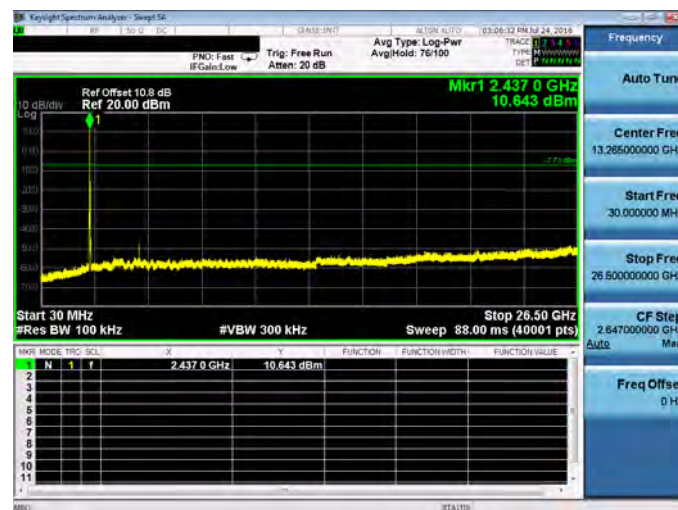


2462 MHz

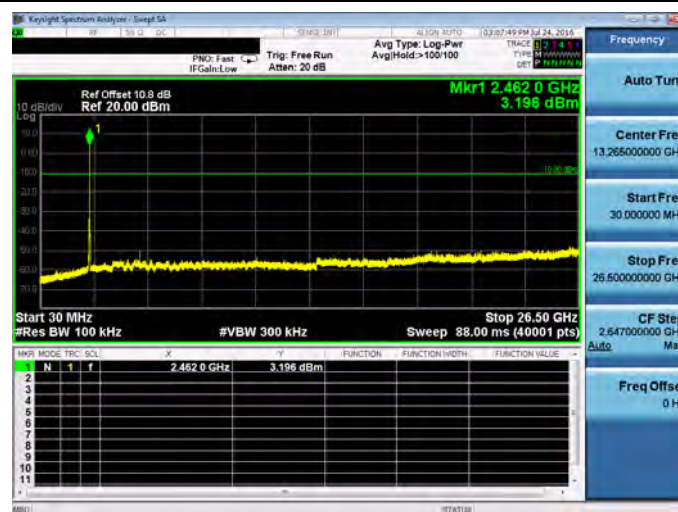



Mode 2: IEEE 802.11b link mode_ANT-1

2467 MHz

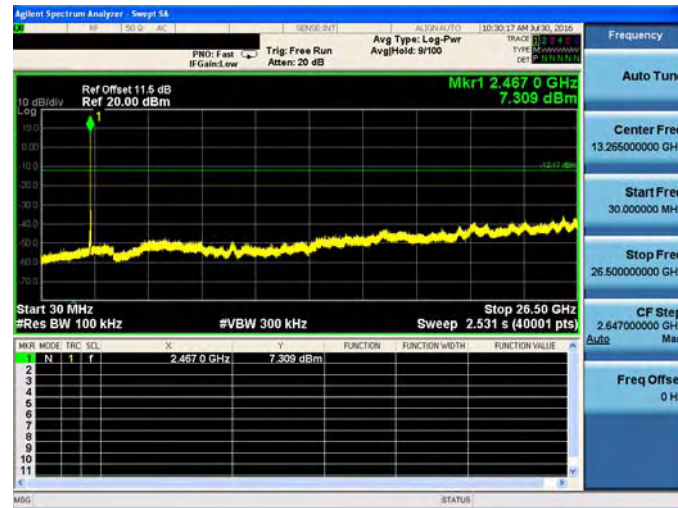



Mode 3: IEEE 802.11g link mode_ANT-1

2412 MHz




2437 MHz



2462 MHz




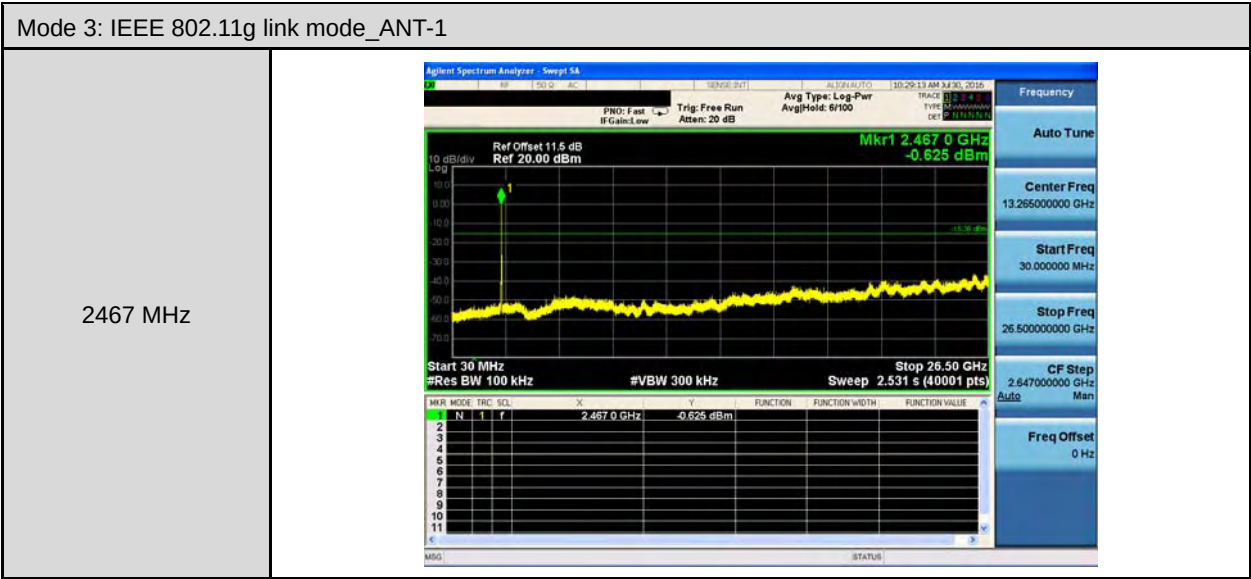



Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1

2412 MHz

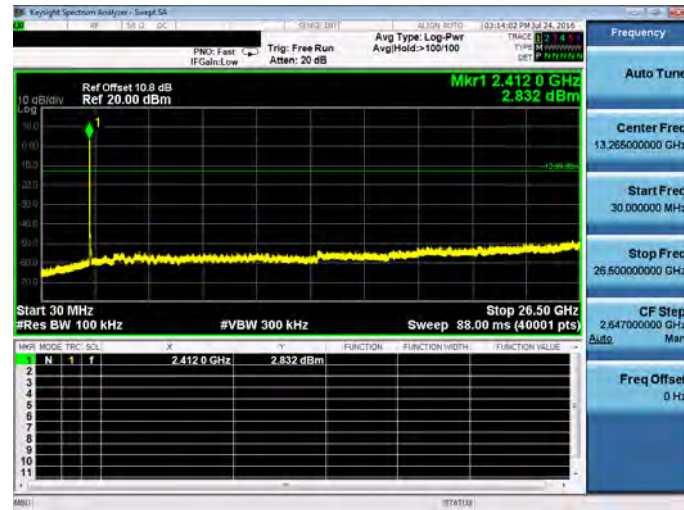


2437 MHz



2462 MHz



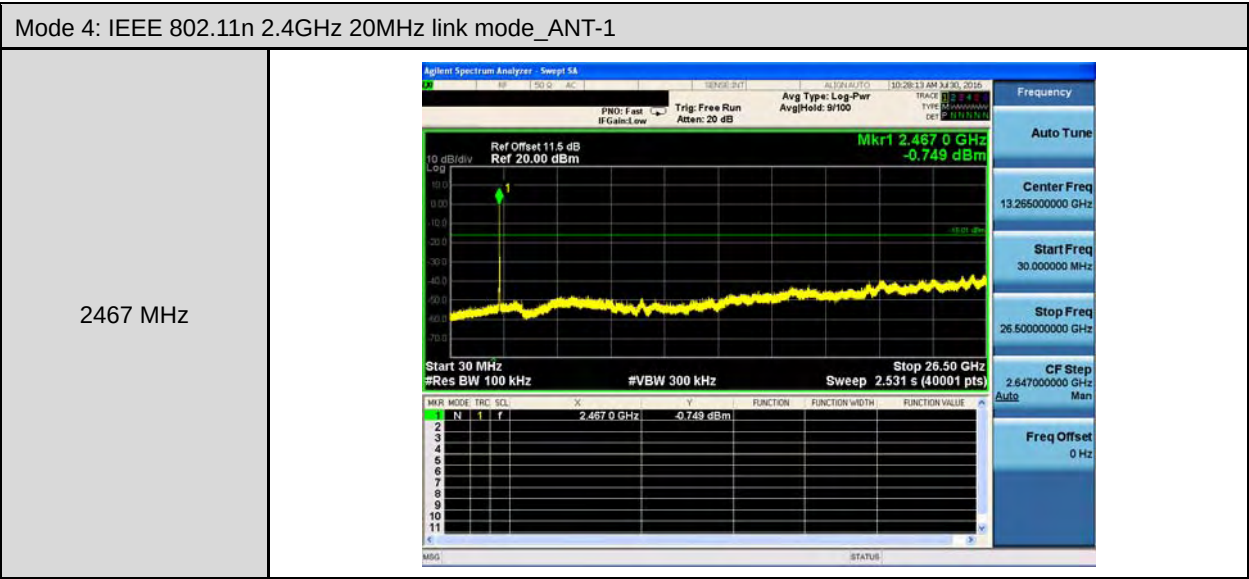


Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

2422 MHz



2437 MHz

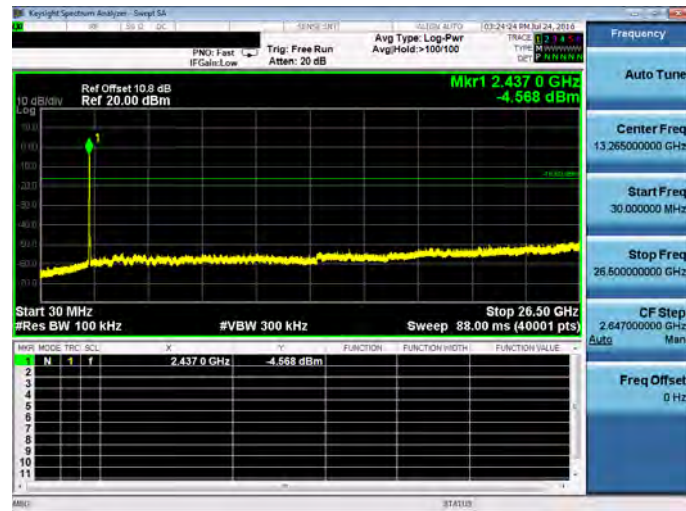


2452 MHz





Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

2457 MHz

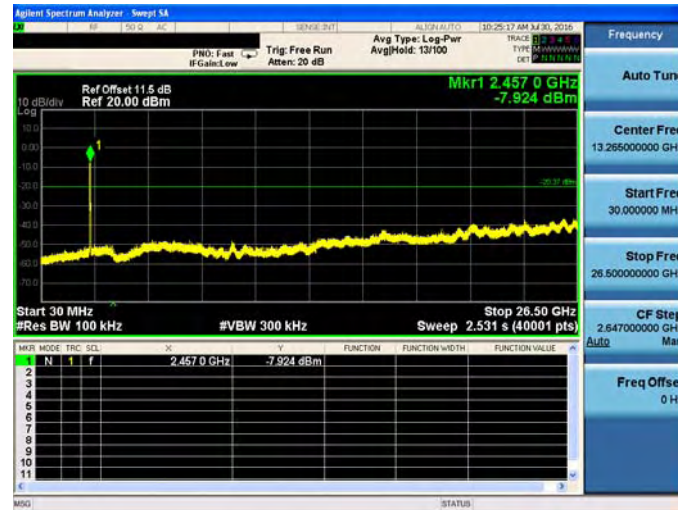





Conducted Band Edge

Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0

2412 MHz

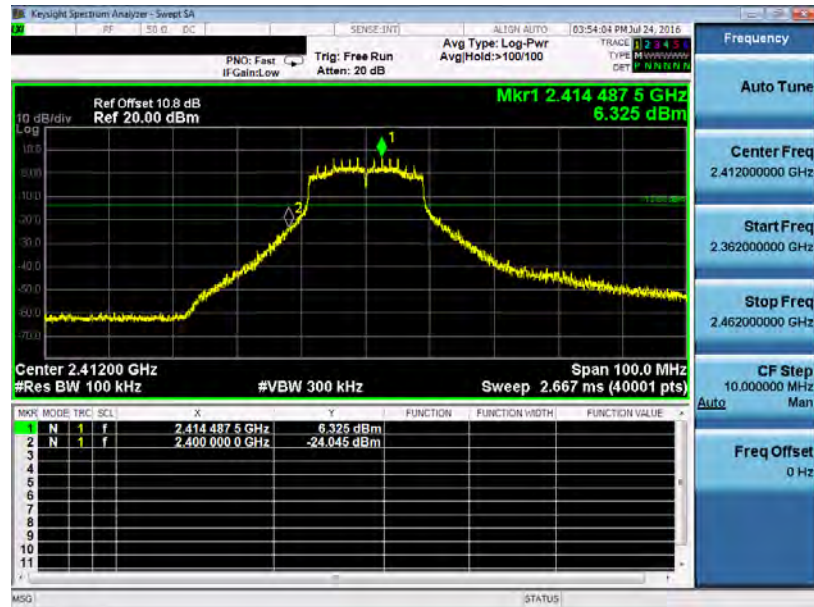


2462 MHz

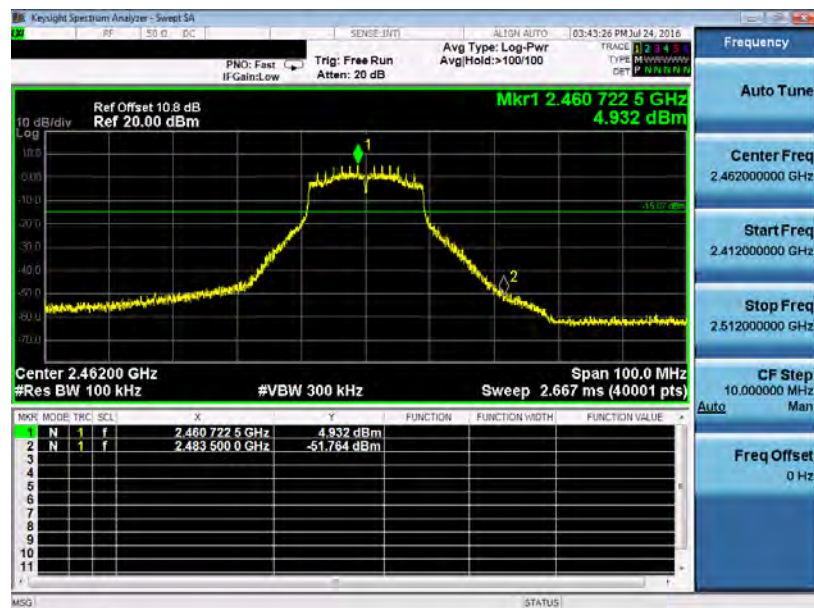



Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-0

2467 MHz

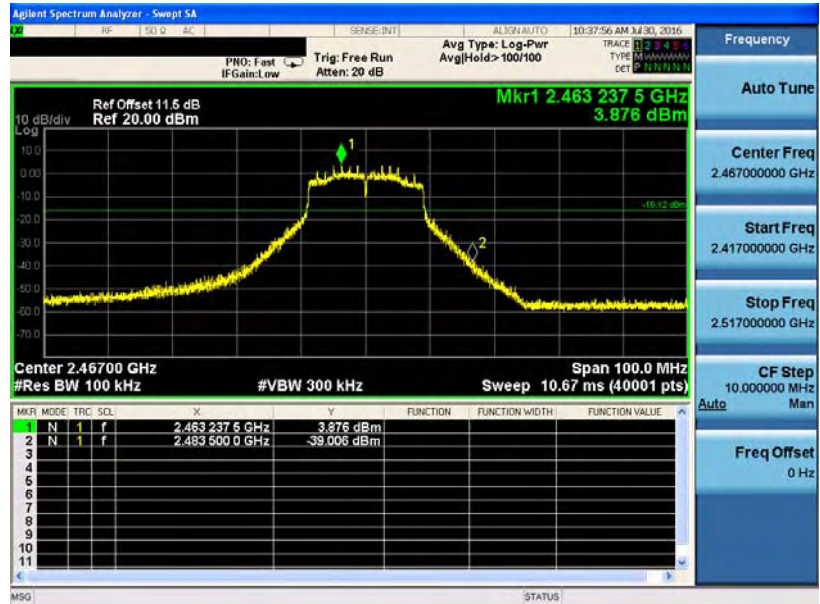




Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0

2422 MHz




2452 MHz

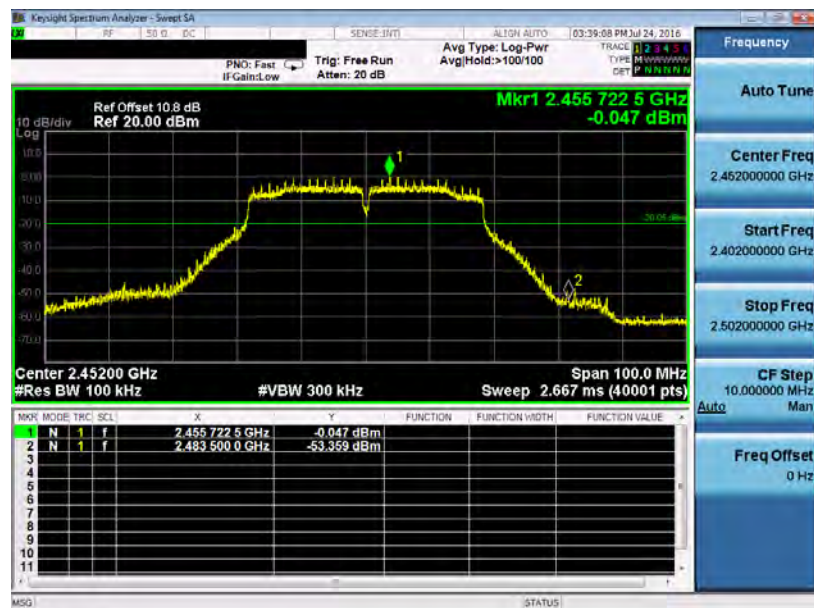



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-0


2457 MHz

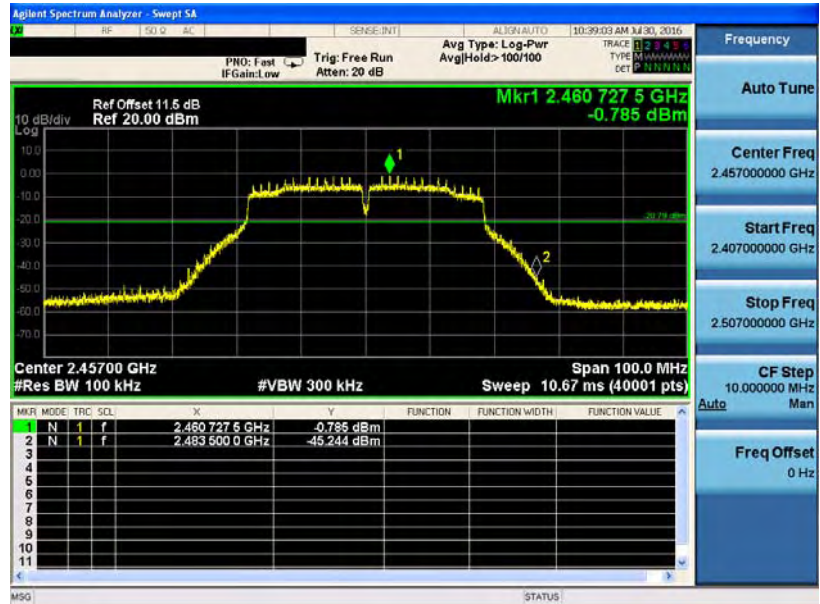





Mode 2: IEEE 802.11b link mode_ANT-1

2412 MHz

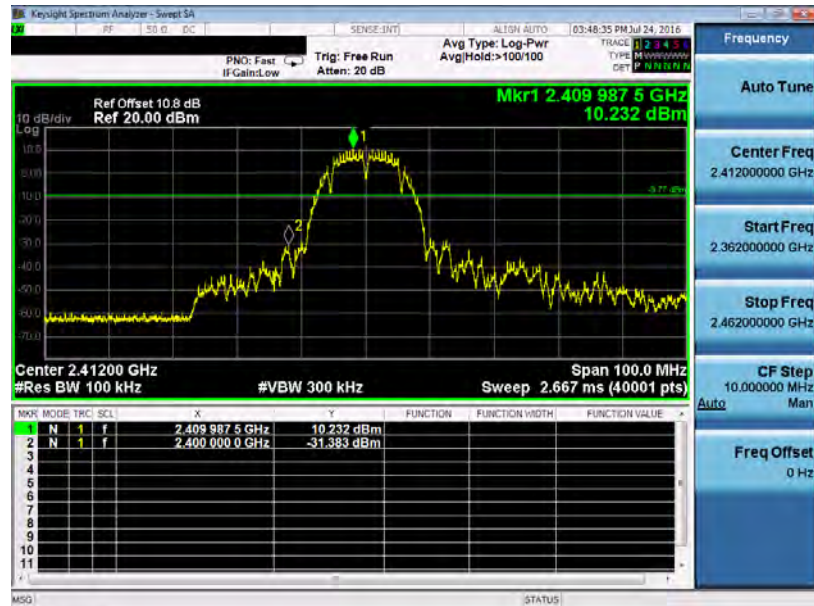

2462 MHz

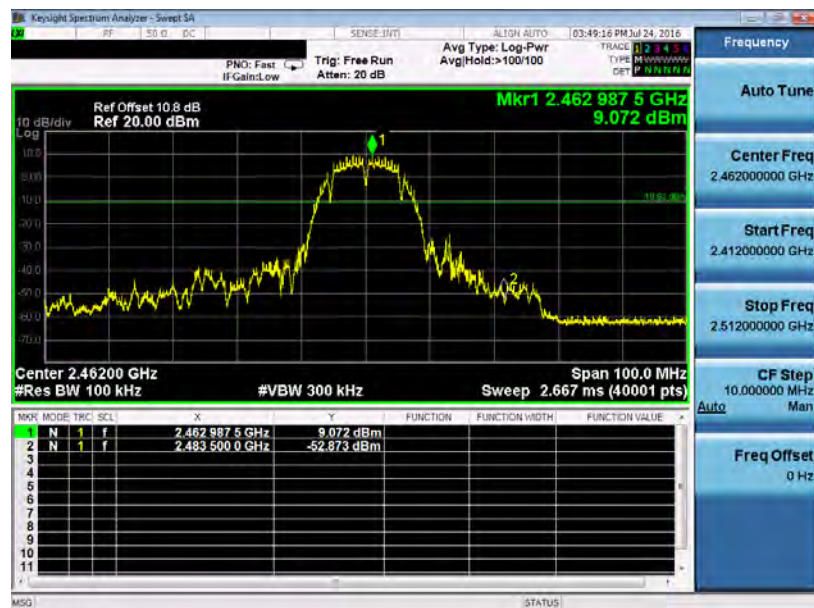


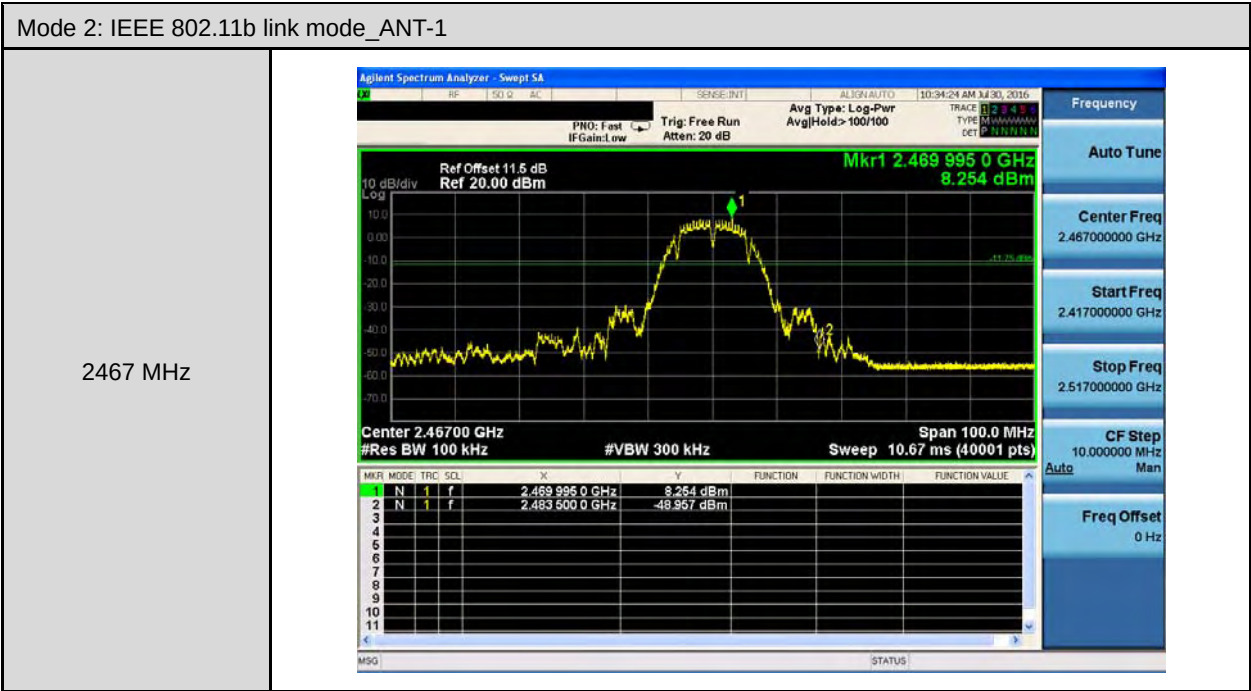




Mode 3: IEEE 802.11g link mode_ANT-1

2412 MHz

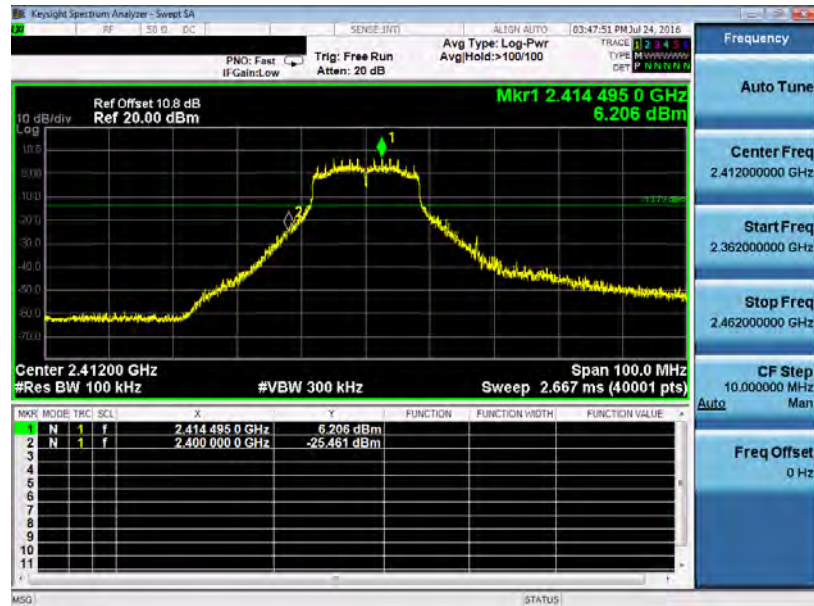


2462 MHz

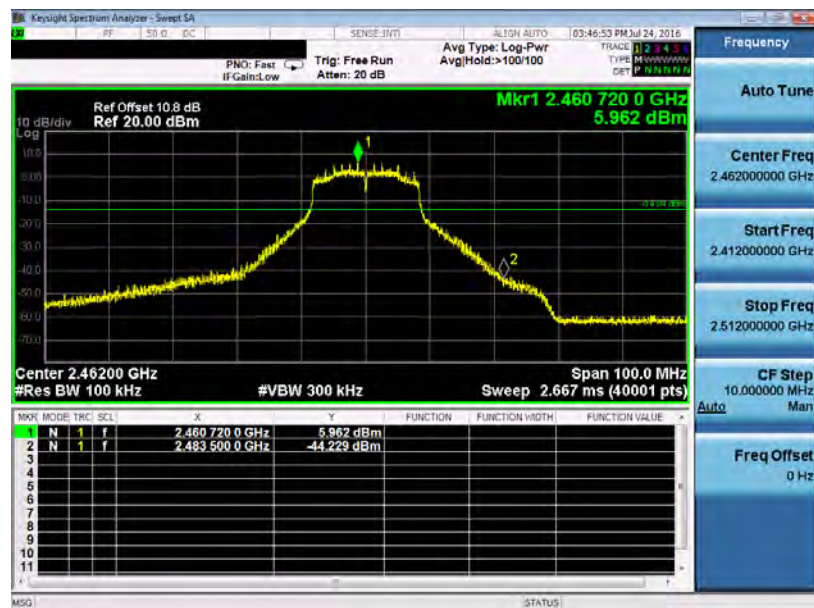




Mode 3: IEEE 802.11g link mode_ANT-1

2467 MHz

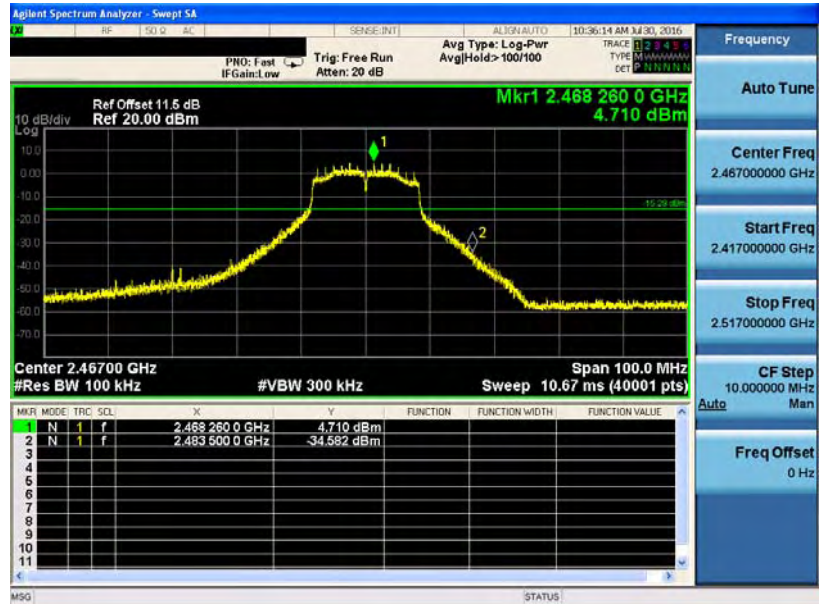


Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1

2412 MHz

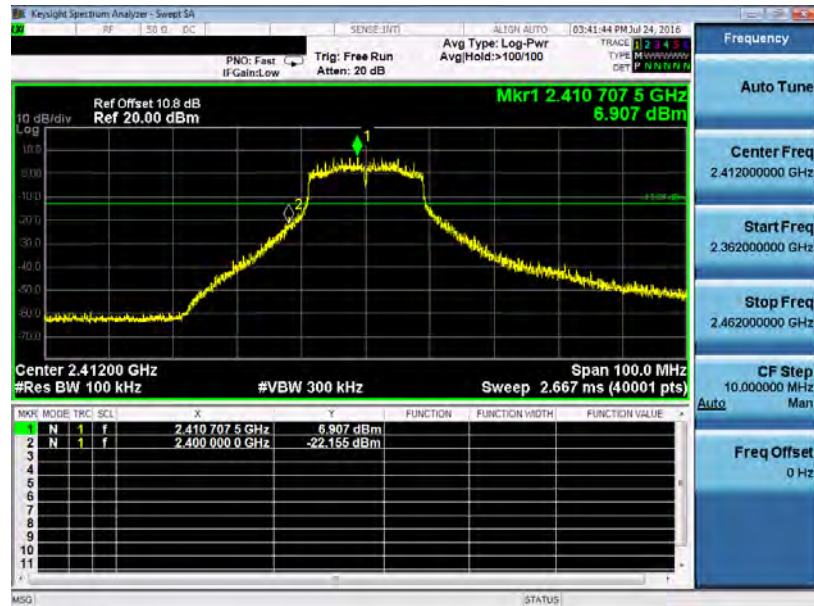


2462 MHz

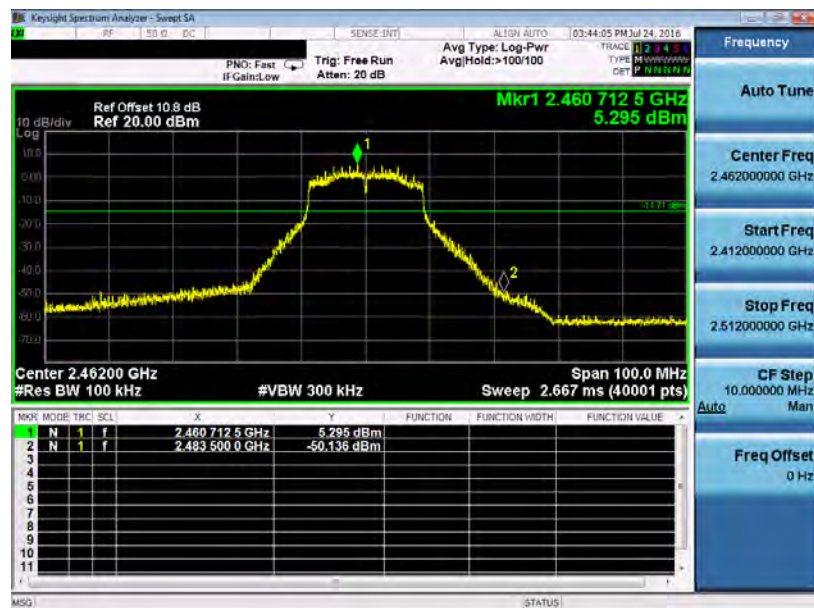



Mode 4: IEEE 802.11n 2.4GHz 20MHz link mode_ANT-1

2467 MHz

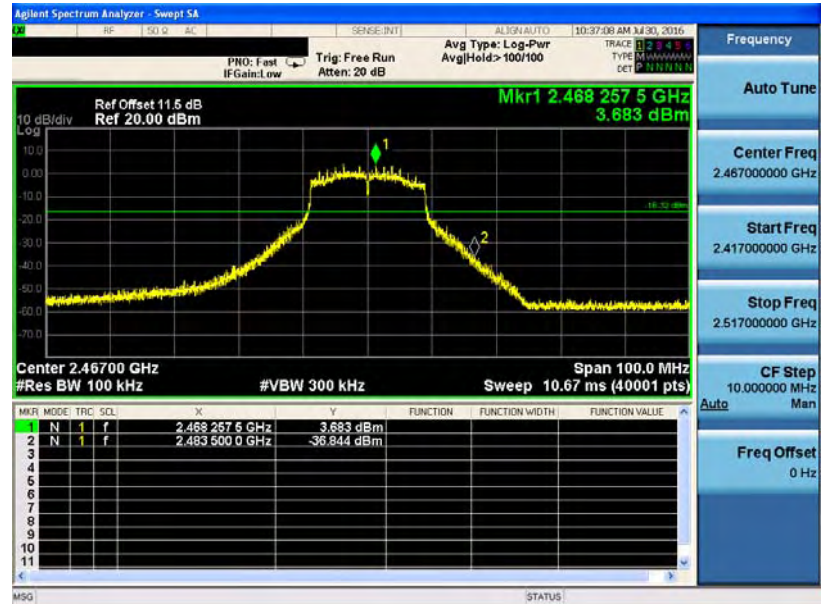




Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

2422 MHz




2452 MHz

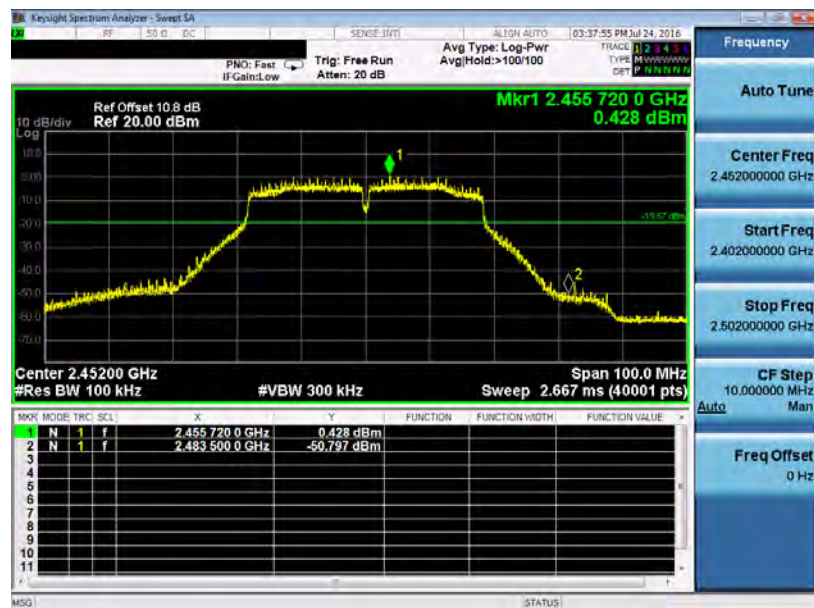



Mode 5: IEEE 802.11n 2.4GHz 40MHz link mode_ANT-1

2457 MHz

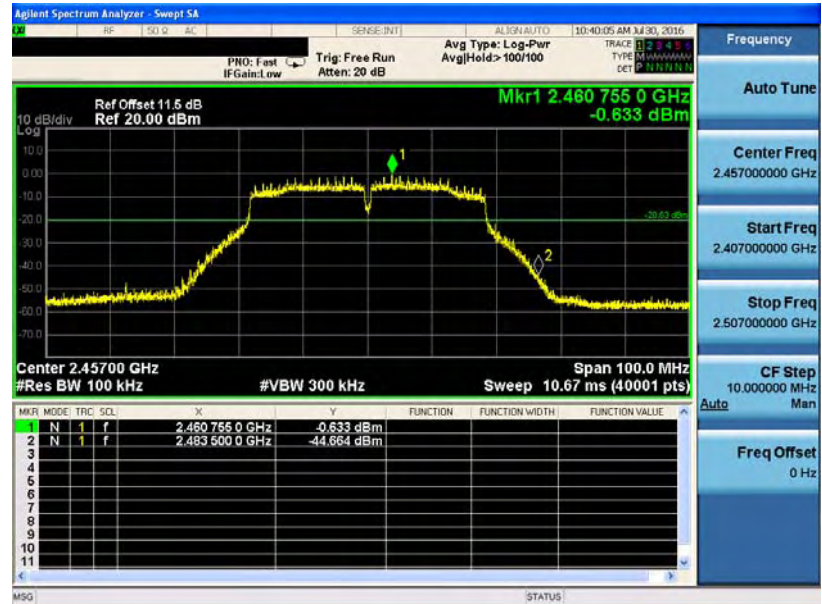



10 Antenna Measurement

10.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2.Antenna Description

See section 2 – antenna information.

10.3.Directiona Gain Calculated

For Maximum Conducted Output Power

$$\text{Directional Gain} = 10 \cdot \log\{[10^{(G1/10)} + 10^{(G2/10)} + \dots + 10^{(Gn/10)}] / NANT\}$$

Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11b link mode	3.89
IEEE 802.11g link mode	3.89
IEEE 802.11n 2.4GHz 20MHz	3.89
IEEE 802.11n 2.4GHz 40MHz	3.89

For Maximum Power Density

$$\text{Directional Gain} = 10 \cdot \log\{[10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(Gn/20)}]^2 / NANT\}$$

Operate Freq. Band	Directional Gain (dBi)
IEEE 802.11b link mode	6.9
IEEE 802.11g link mode	6.9
IEEE 802.11n 2.4GHz 20MHz	6.9
IEEE 802.11n 2.4GHz 40MHz	6.9