



LTE Band 7

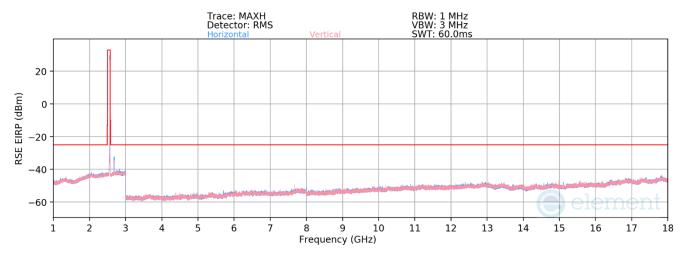

Plot 7-622. Antenna 3a Radiated Spurious Plot 1GHz - 18GHz (LTE Band 7)

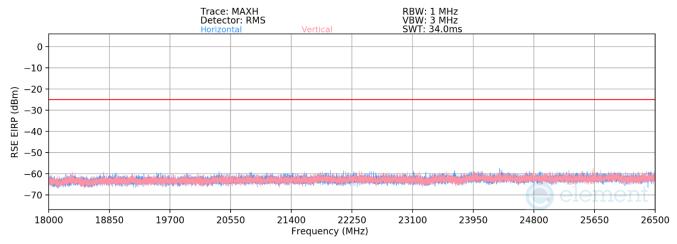

Plot 7-623. Antenna 3a Radiated Spurious Emission above 18GHz (LTE Band 7)

FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 399 of 427	
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	raye 333 01 421	



Bandwidth (MHz):	20
Frequency (MHz):	2510.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5020.0	V	-	-	-78.76	4.85	33.09	-62.17	-25.00	-37.17
7530.0	V	260	141	-74.16	9.04	41.88	-53.38	-25.00	-28.38
10040.0	Н	•	-	-81.45	11.76	37.31	-57.95	-25.00	-32.95
12550.0	V	•	•	-82.84	15.77	39.93	-55.33	-25.00	-30.33
15060.0	Н	-	-	-84.00	16.07	39.08	-56.18	-25.00	-31.18

Table 7-98. Radiated Spurious Data (LTE Band 7 - Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	2535.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5070.0	V	-	-	-79.38	5.43	33.06	-62.20	-25.00	-37.20
7605.0	V	254	117	-77.66	9.46	38.80	-56.46	-25.00	-31.46
10140.0	Н	-	-	-81.53	11.79	37.27	-57.99	-25.00	-32.99
12675.0	Н	1	-	-83.79	15.96	39.17	-56.09	-25.00	-31.09
15210.0	V	-	-	-83.42	16.08	39.66	-55.60	-25.00	-30.60

Table 7-99. Radiated Spurious Data (LTE Band 7 - Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	2560.0
RB / Offset:	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5120.00	V	-	-	-79.38	5.43	33.05	-62.21	-25.00	-37.21
7680.00	V	277	112	-73.01	9.61	43.60	-51.65	-25.00	-26.65
10240.00	V	-	-	-81.23	11.88	37.65	-57.60	-25.00	-32.60
12800.00	Н	-	-	-83.26	15.92	39.67	-55.59	-25.00	-30.59
15360.00	Н	-	-	-83.74	16.35	39.61	-55.64	-25.00	-30.64

Table 7-100. Radiated Spurious Data (LTE Band 7 – High Channel)


FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 400 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Page 400 01 427



LTE Band 41

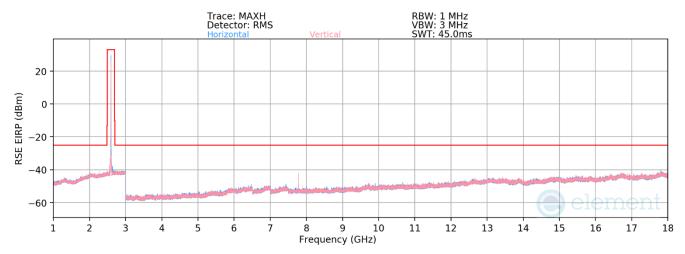

Plot 7-624. Antenna 3a Radiated Spurious Plot 1GHz - 18GHz (LTE Band 41)

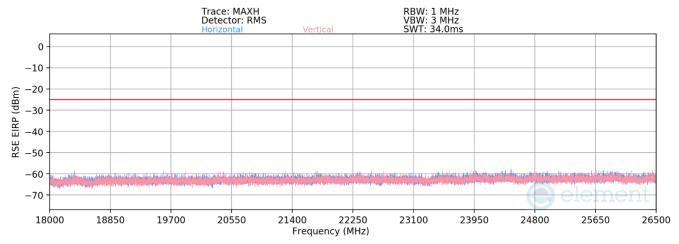

Plot 7-625. Antenna 3a Radiated Spurious Emission above 18GHz (LTE Band 41)

FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 401 of 427	
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Page 401 of 427	



Bandwidth (MHz):	20
Frequency (MHz):	2506.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5012.0	V	-	-	-78.33	4.82	33.49	-61.77	-25.00	-36.77
7518.0	V	295	181	-71.47	9.04	44.57	-50.69	-25.00	-25.69
10024.0	V	•	-	-79.91	11.76	38.86	-56.40	-25.00	-31.40
12530.0	Н	-	-	-81.44	15.81	41.36	-53.90	-25.00	-28.90
15036.0	V	-	-	-80.66	16.23	42.57	-52.69	-25.00	-27.69

Table 7-101. Radiated Spurious Data (LTE Band 41 - Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	2593.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.0	V	-	-	-78.26	5.09	33.84	-61.42	-25.00	-36.42
7779.0	V	280	109	-68.68	9.54	47.86	-47.40	-25.00	-22.40
10372.0	V	-	-	-79.55	11.53	38.97	-56.28	-25.00	-31.28
12965.0	V	1	-	-81.71	16.77	42.07	-53.19	-25.00	-28.19
15558.0	Н	-	-	-81.20	16.69	42.49	-52.77	-25.00	-27.77

Table 7-102. Radiated Spurious Data (LTE Band 41 - Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	2680.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5360.0	V	-	-	-77.92	5.16	34.24	-61.02	-25.00	-36.02
8040.0	Н	-	-	-80.29	9.65	36.36	-58.89	-25.00	-33.89
10720.0	V	-	-	-79.74	12.02	39.28	-55.98	-25.00	-30.98

Table 7-103. Radiated Spurious Data (LTE Band 41 – High Channel)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 402 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	rage 402 01 427



Bandwidth (MHz):	5
Frequency (MHz):	2307.5
RB / Offset:	1/12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4615.0	V	-	-	-79.94	7.81	34.87	-60.39	-40.00	-20.39
6922.5	Н	-	•	-81.32	11.27	36.95	-58.30	-40.00	-18.30
9230.0	V	-	-	-81.97	12.55	37.58	-57.68	-40.00	-17.68

Table 7-104. Radiated Spurious Data (NR Band n30 - Low Channel)

Bandwidth (MHz):	10
Frequency (MHz):	2310.0
RB / Offset:	1/25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4620.0	V	-	-	-79.90	7.83	34.93	-60.32	-40.00	-20.32
6930.0	V	-	-	-81.28	11.30	37.02	-58.23	-40.00	-18.23
9240.0	Н	-	-	-81.89	12.49	37.60	-57.66	-40.00	-17.66

Table 7-105. Radiated Spurious Data (NR Band n30 – Mid Channel)

Bandwidth (MHz):	5
Frequency (MHz):	2312.5
RB / Offset:	1/12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4625.0	V	-	-	-80.00	7.83	34.84	-60.42	-40.00	-20.42
6937.5	V	-	-	-81.35	11.27	36.93	-58.33	-40.00	-18.33
9250.0	V	-	-	-81.91	12.59	37.68	-57.58	-40.00	-17.58

Table 7-106. Radiated Spurious Data (NR Band n30 – High Channel)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 403 of 427	
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Faye 403 01 421	



Bandwidth (MHz):	40
Frequency (MHz):	2520.0
RB / Offset:	1 / 108

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5040.0	V	-	-	-80.51	7.64	34.13	-61.12	-25.00	-36.12
7560.0	Н	-	-	-81.31	11.73	37.42	-57.84	-25.00	-32.84
10080.0	V	-	-	-82.44	14.92	39.48	-55.78	-25.00	-30.78

Table 7-107. Radiated Spurious Data (NR Band n7 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	2535.0
RB / Offset:	1 / 108

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5070.0	Н	-	-	-80.45	7.64	34.19	-61.07	-25.00	-36.07
7605.0	V	-	-	-81.31	11.73	37.42	-57.84	-25.00	-32.84
10140.0	Н	-	-	-83.23	15.95	39.72	-55.54	-25.00	-30.54

Table 7-108. Radiated Spurious Data (NR Band n7 - Mid Channel)


Bandwidth (MHz):	40
Frequency (MHz):	2550.0
RB / Offset:	1 / 108

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5100.0	V	-	-	-80.51	7.82	34.31	-60.95	-25.00	-35.95
7650.0	V	-	-	-81.27	11.21	36.94	-58.32	-25.00	-33.32
10200.0	Н	-	-	-83.01	16.58	40.57	-54.68	-25.00	-29.68


Table 7-109. Radiated Spurious Data (NR Band n7 - High Channel)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 404 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Fage 404 01 427



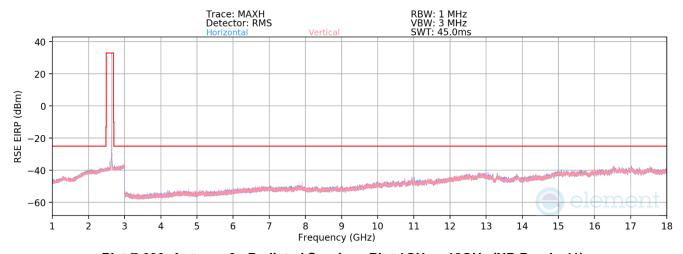

Plot 7-626. Antenna 3a Radiated Spurious Plot 1GHz - 18GHz (NR Band n41)

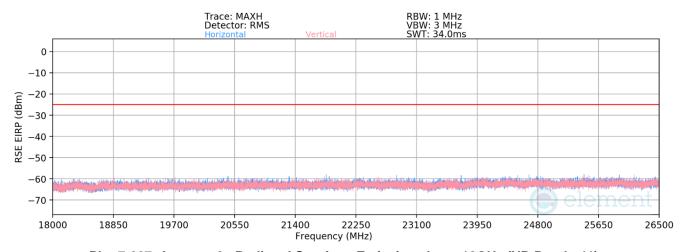

Plot 7-627. Antenna 3a Radiated Spurious Emission above 18GHz (NR Band n41)

FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 405 of 427	
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Page 405 01 427	



Bandwidth (MHz):	100
Frequency (MHz):	2546.0
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5092.0	V	-	-	-79.59	7.64	35.05	-60.21	-25.00	-35.21
7638.0	V	-	-	-80.79	11.23	37.44	-57.82	-25.00	-32.82
10184.0	Н	-	-	-82.53	16.58	41.05	-54.21	-25.00	-29.21

Table 7-110. Radiated Spurious Data (NR Band n41 - Low Channel)

Bandwidth (MHz):	100
Frequency (MHz):	2593.0
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.0	V	-	-	-80.03	8.10	35.08	-60.18	-25.00	-35.18
7779.0	V	-	-	-80.60	12.07	38.47	-56.79	-25.00	-31.79
10372.0	V	-	-	-81.94	15.58	40.64	-54.62	-25.00	-29.62

Table 7-111. Radiated Spurious Data (NR Band n41 – Mid Channel)

Bandwidth (MHz):	100
Frequency (MHz):	2640.0
RB / Offset:	1 / 136

	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Ī	5280.0	V	-	-	-80.03	8.30	35.28	-59.98	-25.00	-34.98
	7920.0	V	104	326	-74.77	11.48	43.71	-51.55	-25.00	-26.55
	10560.0	Н	-	-	-82.62	16.66	41.03	-54.22	-25.00	-29.22
	13200.0	V	-	-	-83.38	19.82	43.44	-51.82	-25.00	-26.82
ſ	15840.0	V	-	-	-84.01	23.81	46.80	-48.46	-25.00	-23.46

Table 7-112. Radiated Spurious Data (NR Band n41 – High Channel)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 406 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Page 406 01 427



ULCA - LTE Band 7

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2510.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2529.8
SCC RB / Offset:	1/0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5020.0	Н	-	-	-79.47	6.58	34.11	-61.15	-25.00	-36.15
7530.0	Н	-	-	-79.99	9.59	36.61	-58.65	-25.00	-33.65
10040.0	Н	-	-	-80.79	11.70	37.91	-57.34	-25.00	-32.34

Table 7-113. Radiated Spurious Data (ULCA LTE Band 7 – Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2535.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2554.8
SCC RB / Offset:	1/0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5070.0	Н	-	-	-79.68	6.61	33.93	-61.33	-25.00	-36.33
7605.0	Н	-	-	-80.72	10.29	36.58	-58.68	-25.00	-33.68
10140.0	Н	-	-	-80.99	12.27	38.28	-56.97	-25.00	-31.97

Table 7-114. Radiated Spurious Data (ULCA LTE Band 7 - Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2560.0
PCC RB / Offset:	1/0
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2540.2
SCC RB / Offset:	1 / 99


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5120.0	Н	-	-	-79.47	6.49	34.02	-61.24	-25.00	-36.24
7680.0	Н	-	-	-80.09	9.66	36.57	-58.69	-25.00	-33.69
10240.0	Н	-	-	-80.91	12.16	38.25	-57.01	-25.00	-32.01

Table 7-115. Radiated Spurious Data (ULCA LTE Band 7 – High Channel)


FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 407 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	rage 407 01 427



ULCA - LTE Band 41

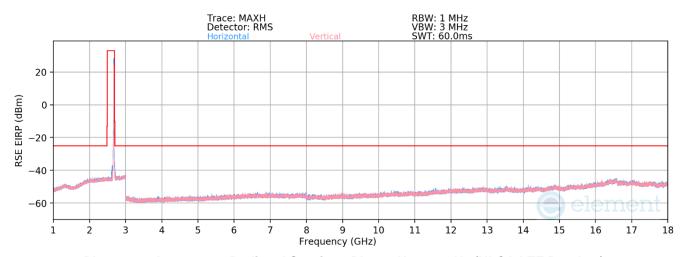

Plot 7-628. Antenna 3a Radiated Spurious Plot 1GHz – 18GHz (ULCA LTE Band 41)

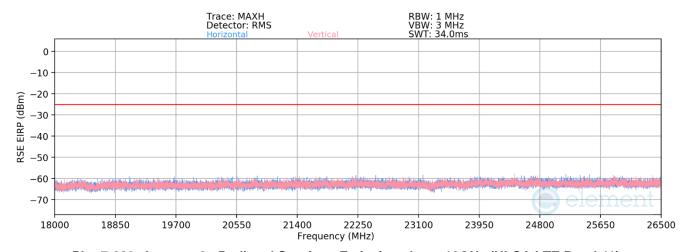

Plot 7-629. Antenna 3a Radiated Spurious Emission above 18GHz (ULCA LTE Band 41)

FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 408 of 427	
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Page 408 01 427	



PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2506.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2525.8
SCC RB / Offset:	1/0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5012.0	V	-	-	-77.11	3.38	33.26	-61.99	-25.00	-36.99
7518.0	V	-	-	-78.65	6.17	34.52	-60.74	-25.00	-35.74
10024.0	V	-	-	-79.09	7.71	35.62	-59.64	-25.00	-34.64

Table 7-116. Radiated Spurious Data (ULCA LTE Band 41 - Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2593.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2612.8
SCC RB / Offset:	1/0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.0	V	-	-	-77.25	3.74	33.50	-61.76	-25.00	-36.76
7779.0	V	204	141	-75.03	5.76	37.74	-57.52	-25.00	-32.52
10372.0	V	-	-	-79.19	8.06	35.86	-59.39	-25.00	-34.39
12965.0	V	-	-	-81.80	12.96	38.15	-57.10	-25.00	-32.10
15558.0	Н	-	-	-82.64	16.21	40.57	-54.68	-25.00	-29.68

Table 7-117. Radiated Spurious Data (ULCA LTE Band 41 – Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2680.0
PCC RB / Offset:	1/0
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2660.2
SCC RB / Offset:	1 / 99

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5360.0	V	-	-	-77.08	3.58	33.49	-61.76	-25.00	-36.76
8040.0	V	252	138	-73.07	5.52	39.44	-55.82	-25.00	-30.82
10720.0	V	-	-	-79.38	8.44	36.06	-59.20	-25.00	-34.20
13400.0	Н	-	-	-81.37	13.02	38.65	-56.61	-25.00	-31.61
16080.0	Н	-	-	-83.00	17.99	41.99	-53.27	-25.00	-28.27

Table 7-118. Radiated Spurious Data (ULCA LTE Band 41 – High Channel)

FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 409 of 427	
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Page 409 01 427	



7.7.4 Antenna 1b Radiated Spurious Emission Measurements

LTE Band 30

Bandwidth (MHz):	5
Frequency (MHz):	2307.5
RB / Offset:	1 / 12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4615.0	Н	-	-	-78.57	4.81	33.24	-62.02	-40.00	-22.02
6922.5	Н	-	-	-81.45	9.65	35.20	-60.05	-40.00	-20.05
9230.0	Н	-	-	-81.48	10.52	36.04	-59.22	-40.00	-19.22

Table 7-119. Radiated Spurious Data (LTE Band 30 - Low Channel)

Bandwidth (MHz):	10
Frequency (MHz):	2310.0
RB / Offset:	1 / 25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4620.0	Н	-	-	-78.52	4.87	33.35	-61.91	-40.00	-21.91
6930.0	Н	-	-	-81.40	9.54	35.13	-60.12	-40.00	-20.12
9240.0	Н	-	-	-81.71	10.63	35.92	-59.34	-40.00	-19.34

Table 7-120. Radiated Spurious Data (LTE Band 30 - Mid Channel)

Bandwidth (MHz):	5
Frequency (MHz):	2312.5
RB / Offset:	1 / 12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4625.00	Н	-	-	-78.71	4.81	33.11	-62.15	-40.00	-22.15
6937.50	Н	-	-	-81.32	9.41	35.09	-60.16	-40.00	-20.16
9250.00	Н	-	-	-81.70	10.70	36.00	-59.26	-40.00	-19.26

Table 7-121. Radiated Spurious Data (LTE Band 30 - High Channel)

FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 410 of 427	
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Page 410 01 427	



LTE Band 7

Bandwidth (MHz):	20
Frequency (MHz):	2510.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5020.0	Н	-	-	-78.92	4.85	32.93	-62.32	-25.00	-37.32
7530.0	V	-	-	-81.10	9.04	34.93	-60.32	-25.00	-35.32
10040.0	V	-	-	-81.78	11.87	37.09	-58.17	-25.00	-33.17

Table 7-122. Radiated Spurious Data (LTE Band 7 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	2535.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5070.0	V	-	-	-79.38	5.43	33.05	-62.21	-25.00	-37.21
7605.0	Н	-	-	-80.97	9.21	35.24	-60.02	-25.00	-35.02
10140.0	Н	-	-	-81.76	11.83	37.06	-58.20	-25.00	-33.20

Table 7-123. Radiated Spurious Data (LTE Band 7 - Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	2560.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5120.00	Н	-	-	-79.45	5.24	32.79	-62.47	-25.00	-37.47
7680.00	V	-	-	-81.06	9.77	35.70	-59.55	-25.00	-34.55
10240.00	V	-	-	-80.91	11.88	37.97	-57.29	-25.00	-32.29

Table 7-124. Radiated Spurious Data (LTE Band 7 – High Channel)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 411 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Faye 411 01 421



LTE Band 41

Bandwidth (MHz):	20
Frequency (MHz):	2506.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5012.0	V	-	-	-78.41	4.99	33.58	-61.68	-25.00	-36.68
7518.0	V	-	-	-79.47	9.04	36.57	-58.69	-25.00	-33.69
10024.0	Н	-	-	-79.86	11.76	38.91	-56.35	-25.00	-31.35

Table 7-125. Radiated Spurious Data (LTE Band 41 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	2593.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.0	V	-	-	-78.25	5.16	33.91	-61.34	-25.00	-36.34
7779.0	Н	-	-	-79.61	9.61	37.00	-58.26	-25.00	-33.26
10372.0	Н	-	-	-79.75	11.61	38.86	-56.40	-25.00	-31.40

Table 7-126. Radiated Spurious Data (LTE Band 41 - Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	2680.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5360.0	Н	-	-	-78.96	6.64	34.68	-60.58	-25.00	-35.58
8040.0	Н	-	-	-80.01	9.23	36.22	-59.03	-25.00	-34.03
10720.0	Н	-	-	-79.98	12.13	39.15	-56.10	-25.00	-31.10

Table 7-127. Radiated Spurious Data (LTE Band 41 - High Channel)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 412 of 427	
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Page 412 of 427	



Bandwidth (MHz):	5
Frequency (MHz):	2307.5
RB / Offset:	1/12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4615.0	Н	-	-	-79.87	7.81	34.94	-60.32	-40.00	-20.32
6922.5	Н	-	-	-81.10	11.27	37.17	-58.08	-40.00	-18.08
9230.0	Н	-	-	-82.05	12.52	37.47	-57.78	-40.00	-17.78

Table 7-128. Radiated Spurious Data (NR Band n30 - Low Channel)

Bandwidth (MHz):	10
Frequency (MHz):	2310.0
RB / Offset:	1/25

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4620.0	Н	-	-	-80.12	7.83	34.71	-60.54	-40.00	-20.54
6930.0	Н	-	-	-81.29	11.27	36.99	-58.27	-40.00	-18.27
9240.0	Н	-	-	-81.65	12.55	37.90	-57.36	-40.00	-17.36

Table 7-129. Radiated Spurious Data (NR Band n30 – Mid Channel)

Bandwidth (MHz):	5
Frequency (MHz):	2312.5
RB / Offset:	1/12

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
4625.0	V	-	-	-79.96	7.81	34.85	-60.40	-40.00	-20.40
6937.5	Н	-		-81.07	11.27	37.20	-58.05	-40.00	-18.05
9250.0	Н	-	-	-81.65	12.55	37.90	-57.36	-40.00	-17.36

Table 7-130. Radiated Spurious Data (NR Band n30 – High Channel)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 413 of 427	
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Page 413 of 427	



Bandwidth (MHz):	40
Frequency (MHz):	2520.0
RB / Offset:	1 / 108

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5040.0	Н	-	-	-80.09	7.38	34.29	-60.96	-25.00	-35.96
7560.0	Н	-	-	-81.07	11.43	37.36	-57.90	-25.00	-32.90
10080.0	Н	-	-	-82.86	15.17	39.31	-55.95	-25.00	-30.95

Table 7-131. Radiated Spurious Data (NR Band n7 – Low Channel)

Bandwidth (MHz):	40
Frequency (MHz):	2535.0
RB / Offset:	1 / 108

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5070.0	V	-	-	-80.25	7.64	34.38	-60.87	-25.00	-35.87
7605.0	V	-	-	-81.37	11.73	37.36	-57.90	-25.00	-32.90
10140.0	Н	-	-	-83.08	15.95	39.87	-55.39	-25.00	-30.39

Table 7-132. Radiated Spurious Data (NR Band n7 - Mid Channel)

Bandwidth (MHz):	40
Frequency (MHz):	2550.0
RB / Offset:	1 / 108

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5100.0	Н	-	-	-80.59	7.92	34.33	-60.93	-25.00	-35.93
7650.0	V	-	-	-81.11	11.23	37.12	-58.14	-25.00	-33.14
10200.0	V	-	-	-83.02	16.58	40.56	-54.70	-25.00	-29.70

Table 7-133. Radiated Spurious Data (NR Band n7 - High Channel)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 414 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Fage 414 01 427



Bandwidth (MHz):	100
Frequency (MHz):	2546.0
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5092.0	V	-	-	-79.98	7.82	34.84	-60.42	-25.00	-35.42
7638.0	V	-	-	-80.97	11.33	37.36	-57.90	-25.00	-32.90
10184.0	V	-	-	-82.48	16.58	41.10	-54.15	-25.00	-29.15

Table 7-134. Radiated Spurious Data (NR Band n41 - Low Channel)

Bandwidth (MHz):	100
Frequency (MHz):	2593.0
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.0	Н	-	-	-80.19	8.10	34.91	-60.35	-25.00	-35.35
7779.0	Н	-	-	-80.56	12.07	38.51	-56.75	-25.00	-31.75
10372.0	Н	-	-	-82.06	15.58	40.52	-54.74	-25.00	-29.74

Table 7-135. Radiated Spurious Data (NR Band n41 – Mid Channel)

Bandwidth (MHz):	100
Frequency (MHz):	2640.0
RB / Offset:	1 / 136

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5280.0	V	-	-	-80.40	8.40	35.00	-60.25	-25.00	-35.25
7920.0	V	-	-	-80.59	11.87	38.28	-56.98	-25.00	-31.98
10560.0	Н	-	-	-82.20	16.28	41.08	-54.18	-25.00	-29.18

Table 7-136. Radiated Spurious Data (NR Band n41 - High Channel)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 415 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	rage 413 01 427



ULCA - LTE Band 7

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2510.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2529.8
SCC RB / Offset:	1/0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5020.0	V	-	-	-79.55	6.58	34.03	-61.22	-25.00	-36.22
7530.0	V	-	-	-79.97	9.59	36.62	-58.64	-25.00	-33.64
10040.0	V	-	-	-81.13	12.20	38.07	-57.19	-25.00	-32.19

Table 7-137. Radiated Spurious Data (ULCA LTE Band 7 – Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2535.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2554.8
SCC RB / Offset:	1/0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5070.0	V	-	-	-79.37	6.38	34.01	-61.25	-25.00	-36.25
7605.0	V	-	-	-80.80	10.29	36.49	-58.77	-25.00	-33.77
10140.0	V	-	-	-80.99	12.27	38.28	-56.98	-25.00	-31.98

Table 7-138. Radiated Spurious Data (ULCA LTE Band 7 - Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2560.0
PCC RB / Offset:	1/0
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2540.2
SCC RB / Offset:	1 / 99

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5120.0	V	•	-	-79.66	6.61	33.95	-61.31	-25.00	-36.31
7680.0	V	-	-	-80.13	9.66	36.53	-58.73	-25.00	-33.73
10240.0	V	•	-	-80.93	12.27	38.34	-56.92	-25.00	-31.92

Table 7-139. Radiated Spurious Data (ULCA LTE Band 7 – High Channel)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 446 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Page 416 of 427



ULCA - LTE Band 41

20
2506.0
1 / 99
20
2525.8
1/0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5012.0	V	-	-	-77.22	3.17	32.96	-62.30	-25.00	-37.30
7518.0	Н	-	-	-78.49	6.17	34.68	-60.58	-25.00	-35.58
10024.0	Н	-	-	-79.18	7.62	35.44	-59.82	-25.00	-34.82

Table 7-140. Radiated Spurious Data (ULCA LTE Band 41 – Low Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2593.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2612.8
SCC RB / Offset:	1/0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.0	Н	-	-	-77.34	3.74	33.40	-61.86	-25.00	-36.86
7779.0	Н	-	-	-77.71	5.76	35.05	-60.20	-25.00	-35.20
10372.0	Н	-	-	-79.27	8.10	35.82	-59.43	-25.00	-34.43

Table 7-141. Radiated Spurious Data (ULCA LTE Band 41 - Mid Channel)

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2680.0
PCC RB / Offset:	1/0
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2660.2
SCC RB / Offset:	1 / 99

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5360.0	Н	-	-	-77.14	3.59	33.44	-61.81	-25.00	-36.81
8040.0	V	-	-	-78.25	5.58	34.33	-60.93	-25.00	-35.93
10720.0	V	-	-	-79.25	8.44	36.19	-59.07	-25.00	-34.07

Table 7-142. Radiated Spurious Data (ULCA LTE Band 41 – High Channel)


FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 417 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	rage 417 01 427




7.7.5 Simultaneous Tx Radiated Spurious Emissions Measurements

Description	LTE B41	Bluetooth	UNII
Antenna	Antenna 3a	Antenna 3a	Antenna 3a
Channel	40640	78	36
Operating Frequency (MHz)	2595	2480	5180
Mode/Modulation	QPSK/1RB/20MHz	GFSK ePa	11n


Table 7-143. Worst Case Simultaneous Transmission Configuration

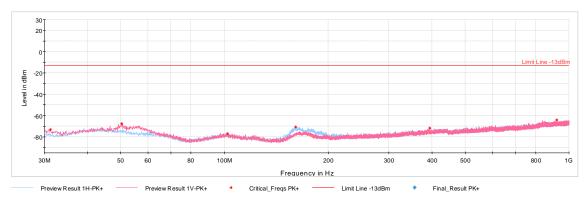

Plot 7-630. Radiated Spurious Emissions - Simultaneous Transmission 30MHz - 1GHz

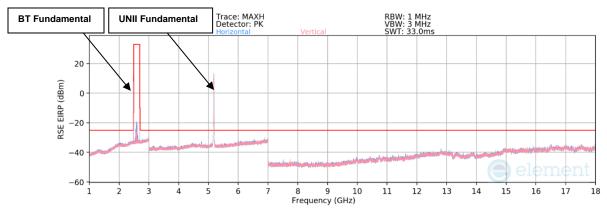

Plot 7-631. Radiated Spurious Emissions - Simultaneous Transmission 1GHz - 18GHz

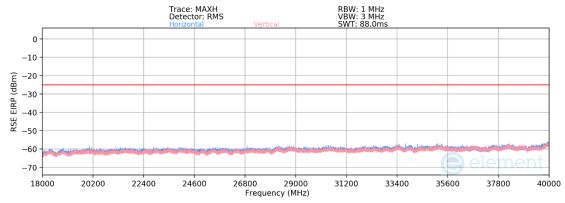

Plot 7-632. Radiated Spurious Emissions - Simultaneous Transmission Above 18GHz

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 418 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Faye 410 01 421



Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Peak	-	-	-	-69.04	17.06	55.02	73.98	-18.95
7440.00	Peak	-	-	-	-70.48	12.25	48.77	73.98	-25.21
9920.00	Peak	-	-	-	-71.75	15.13	50.38	73.98	-23.60
12400.00	Peak	-	-	-	-72.44	19.38	53.94	73.98	-20.04

Table 7-144. BT Harmonics Emissions Measurements in Simultaneous Transmission Mode

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	Peak	-	-	ı	-72.06	16.28	51.22	68.23	-17.01
15540.00	Avg	-	-	-	-83.43	23.00	46.57	53.98	-7.41
15540.00	Peak	-	-	-	-72.41	23.00	57.59	73.98	-16.39

Table 7-145. UNII Harmonics Emissions Measurements in Simultaneous Transmission Mode

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5172.00	-	-	-	-80.05	17.98	44.9	-50.29	-25.00	-25.29
7758.00	V	259	141	-72.73	11.82	46.1	-49.14	-25.00	-24.14
12930.00	-	-	-	-82.84	20.12	44.3	-50.95	-25.00	-25.95
2374.00*	-	-	-	-77.74	12.22	41.5	-53.75	-25.00	-28.75
2692.00*	Н	140	210	-62.51	19.05	63.5	-31.69	-25.00	-6.69

Table 7-146. LTE-b41PC2 Harmonics and Intermodulation(*) Emissions Measurements in Simultaneous Transmission Mode

FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 419 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	rage 419 01 427



7.8 Frequency Stability / Temperature Variation §2.1055, §27.54

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015

TIA-603-E-2016

Test Settings

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

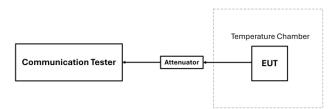


Figure 7-12. LTE Test Instrument & Measurement Setup




Figure 7-13. FR1 Test Instrument & Measurement Setup

Test Notes

1. All ports were tested and only the worst case data were reported.

FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 420 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	rage 420 01 427



LTE Band 30								
	Operating Band Lov	ver Boundary (GHz)	2.3	305				
	Ref. Volta	ge (VDC):	3.	80				
'								
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)				
		- 30	2.3055646	-0.0005646				
		- 20	2.3055870	-0.0005870				
		- 10	2.3050235	-0.0000235				
		0	2.3051217	-0.0001217				
100 %	3.80	+ 10	2.3051198	-0.0001198				
		+ 20 (Ref)	2.3055802	-0.0005802				
		+ 30	2.3057151	-0.0007151				
		+ 40	2.3053260	-0.0003260				
		+ 50	2.3054429	-0.0004429				
Battery Endpoint	3.40	+ 20	2.3057604	-0.0007604				

Table 7-147. Lower Boundary LTE Band 30 Frequency Stability Data

LTE Band 30								
	Operating Band Upp	oer Boundary (GHz)	2.3	315				
	Ref. Volta	ge (VDC):	3.	80				
·								
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)				
		- 30	2.3143191	-0.0006809				
		- 20	2.3144514	-0.0005486				
		- 10	2.3149464	-0.0000536				
		0	2.3140026	-0.0009974				
100 %	3.80	+ 10	2.3146851	-0.0003149				
		+ 20 (Ref)	2.3144728	-0.0005272				
		+ 30	2.3142416	-0.0007584				
		+ 40	2.3146572	-0.0003428				
		+ 50	2.3144862	-0.0005138				
Battery Endpoint	3.40	+ 20	2.3147764	-0.0002236				

Table 7-148. Upper Boundary LTE Band 30 Frequency Stability Data

FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 421 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	rage 421 01 421



LTE Band 7							
	Operating Band Lov	ver Boundary (GHz)	2.5	500			
	Ref. Volta	ge (VDC):	3.	80			
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)			
		- 30	2.5000293	-0.0000293			
		- 20	2.5004104	-0.0004104			
		- 10	2.5004509	-0.0004509			
		0	2.5003355	-0.0003355			
100 %	3.80	+ 10	2.5003831	-0.0003831			
		+ 20 (Ref)	2.5003894	-0.0003894			
		+ 30	2.5008683	-0.0008683			
		+ 40	2.5003491	-0.0003491			
		+ 50	2.5000796	-0.0000796			
Battery Endpoint	3.40	+ 20	2.5006031	-0.0006031			

Table 7-149. Lower Boundary LTE Band 7 Frequency Stability Data

LTE Band 7					
LIE Ballu					
	Operating Band Upp	oer Boundary (GHz)	2.5	570	
	Ref. Volta	ge (VDC):	3.	80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)	
		- 30	2.5697346	-0.0002654	
		- 20	2.5692650	-0.0007350	
	3.80	- 10	2.5691760	-0.0008240	
		0	2.5693174	-0.0006826	
100 %		+ 10	2.5690139	-0.0009861	
		+ 20 (Ref)	2.5695607	-0.0004393	
		+ 30	2.5694984	-0.0005016	
		+ 40	2.5698805	-0.0001195	
		+ 50	2.5693111	-0.0006889	
Battery Endpoint	3.40	+ 20	2.5695633	-0.0004367	

Table 7-150. Upper Boundary LTE Band 7 Frequency Stability Data

FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 422 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	raye 422 01 421



LTE Band 41					
	Operating Band Lov	ver Boundary (GHz)	2.4	496	
	Ref. Volta	ge (VDC):	3.	80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)	
		- 30	2.4960734	-0.0000734	
		- 20	2.4963725	-0.0003725	
		- 10	2.4967712	-0.0007712	
		0	2.4966439	-0.0006439	
100 %	3.80	+ 10	2.4969664	-0.0009664	
		+ 20 (Ref)	2.4963683	-0.0003683	
		+ 30	2.4962502	-0.0002502	
		+ 40	2.4969000	-0.0009000	
		+ 50	2.4963263	-0.0003263	
Battery Endpoint	3.40	+ 20	2.4968861	-0.0008861	

Table 7-151. Lower Boundary LTE Band 41 Frequency Stability Data

LTE Band 41					
	Operating Band Upp	oer Boundary (GHz)	2.6	690	
	Ref. Volta	ge (VDC):	3.	80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)	
	3.80	- 30	2.6891634	-0.0008366	
		- 20	2.6899152	-0.0000848	
		- 10	2.6898794	-0.0001206	
		0	2.6897466	-0.0002534	
100 %		+ 10	2.6899285	-0.0000715	
		+ 20 (Ref)	2.6896381	-0.0003619	
		+ 30	2.6896605	-0.0003395	
		+ 40	2.6895230	-0.0004770	
		+ 50	2.6892497	-0.0007503	
Battery Endpoint	3.40	+ 20	2.6890941	-0.0009059	

Table 7-152. Upper Boundary LTE Band 41 Frequency Stability Data

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 423 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Faye 423 01 421



NR Band n30					
	Operating Band Lov	ver Boundary (GHz)	2.3	050	
	Ref. Volta	ge (VDC):	3.	80	
				_	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)	
		- 30	2.3050234	-0.0000234	
		- 20	2.3051046	-0.0001046	
		- 10	2.3051814	-0.0001814	
		0	2.3051500	-0.0001500	
100 %	3.80	+ 10	2.3057392	-0.0007392	
		+ 20 (Ref)	2.3051787	-0.0001787	
		+ 30	2.3059909	-0.0009909	
		+ 40	2.3052931	-0.0002931	
		+ 50	2.3051204	-0.0001204	
Battery Endpoint	3.40	+ 20	2.3050653	-0.0000653	

Table 7-153. Lower Boundary NR Band n30 Frequency Stability Data

NR Band	NR Band n30					
	Operating Band Upp	oer Boundary (GHz)	2.3	150		
	Ref. Volta	ge (VDC):	3.	80		
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)		
		- 30	2.3142914	-0.0007086		
		- 20	2.3149993	-0.0000007		
		- 10	2.3140920	-0.0009080		
	3.80	0	2.3148419	-0.0001581		
100 %		+ 10	2.3147494	-0.0002506		
		+ 20 (Ref)	2.3148900	-0.0001100		
		+ 30	2.3149862	-0.0000138		
		+ 40	2.3141095	-0.0008905		
		+ 50	2.3143516	-0.0006484		
Battery Endpoint	3.40	+ 20	2.3147267	-0.0002733		

Table 7-154. Upper Boundary NR Band n30 Frequency Stability Data

FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 424 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	rage 424 01 421



NR Band n7					
	Operating Band Lov	ver Boundary (GHz)	2.5	500	
	Ref. Volta	ge (VDC):	3.	80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)	
		- 30	2.5000541	-0.0000541	
		- 20	2.5005954	-0.0005954	
		- 10	2.5007225	-0.0007225	
		0	2.5008521	-0.0008521	
100 %	3.80	+ 10	2.5001509	-0.0001509	
		+ 20 (Ref)	2.5000238	-0.0000238	
		+ 30	2.5005710	-0.0005710	
		+ 40	2.5007851	-0.0007851	
		+ 50	2.5007068	-0.0007068	
Battery Endpoint	3.40	+ 20	2.5002742	-0.0002742	

Table 7-155. Lower Boundary NR Band n7 Frequency Stability Data

NR Band n7					
	Operating Band Upp	oer Boundary (GHz)	2.5	570	
	Ref. Volta	ge (VDC):	3.	80	
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)	
	3.80	- 30	2.5696490	-0.0003510	
		- 20	2.5695712	-0.0004288	
		- 10	2.5691437	-0.0008563	
		0	2.5690118	-0.0009882	
100 %		+ 10	2.5699429	-0.0000571	
		+ 20 (Ref)	2.5695308	-0.0004692	
		+ 30	2.5696768	-0.0003232	
		+ 40	2.5699797	-0.0000203	
		+ 50	2.5693843	-0.0006157	
Battery Endpoint	3.40	+ 20	2.5692840	-0.0007160	

Table 7-156. Upper Boundary NR Band n7 Frequency Stability Data

FCC ID: BCGA3267	element element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 425 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	raye 423 01 421



NR Band n41					
	Operating Band Lov	ver Boundary (GHz)	2.4	196	
	Ref. Volta	ge (VDC):	3.	80	
'					
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)	
	3.80	- 30	2.4962663	-0.0002663	
		- 20	2.4963310	-0.0003310	
		- 10	2.4963315	-0.0003315	
		0	2.4965130	-0.0005130	
100 %		+ 10	2.4964832	-0.0004832	
		+ 20 (Ref)	2.4969961	-0.0009961	
		+ 30	2.4965475	-0.0005475	
		+ 40	2.4961767	-0.0001767	
		+ 50	2.4963564	-0.0003564	
Battery Endpoint	3.40	+ 20	2.4965121	-0.0005121	

Table 7-157. Lower Boundary NR Band n41 Frequency Stability Data

NR Band n41								
	Operating Band Upp	oer Boundary (GHz)	2.690					
	Ref. Voltage (VDC):		3.80					
Voltage (%)	Power (VDC)	Temp (°C)	Measured Freq. (GHz)	Freq. Delta from Operating Range (GHz)				
100 %	3.80	- 30	2.6890163	-0.0009837				
		- 20	2.6894775	-0.0005225				
		- 10	2.6894698	-0.0005302				
		0	2.6891885	-0.0008115				
		+ 10	2.6891599	-0.0008401				
		+ 20 (Ref)	2.6896699	-0.0003301				
		+ 30	2.6899580	-0.0000420				
		+ 40	2.6893999	-0.0006001				
		+ 50	2.6899567	-0.0000433				
Battery Endpoint	3.40	+ 20	2.6890522	-0.0009478				

Table 7-158. Upper Boundary NR Band n41 Frequency Stability Data

FCC ID: BCGA3267	element PART 27 MEASUREMENT REPORT		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 426 of 427	
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	Faye 420 01 427	



8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Apple **Tablet Device FCC ID: BCGA3267** complies with all the requirements of Part 27 of the FCC rules.

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 427 of 427
1C2410210073-10-R1.BCG	7/1/2024 - 12/9/2024	Tablet Device	rage 427 01 427