





Radiated Emission below 1GHz



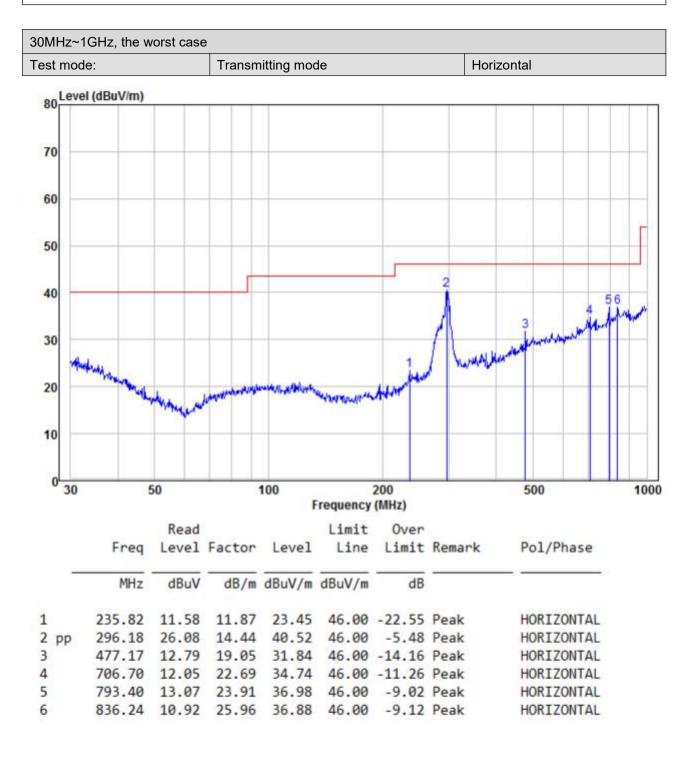

30MHz~1GHz, the worst case				
Test mode:	Transmitting mode	Vertical		

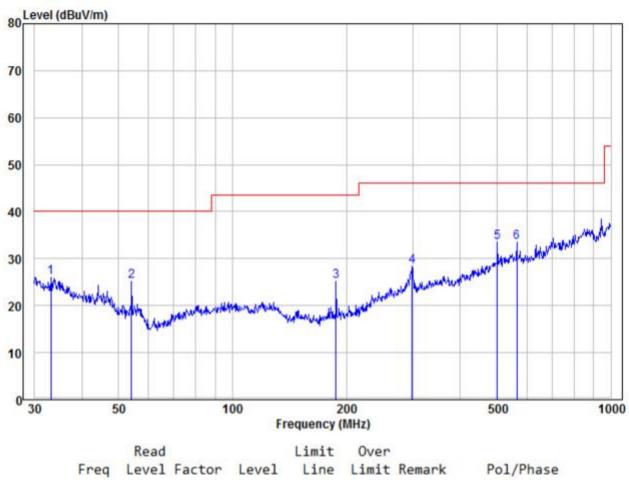

	Freq	Level	Factor	Level	Line		Remark	Pol/Phase
-	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	33.09	11.15	14.98	26.13	40.00	-13.87	Peak	VERTICAL
2	54.07	17.83	7.35	25.18	40.00	-14.82	Peak	VERTICAL
3	187.75	16.39	8.76	25.15	43.50	-18.35	Peak	VERTICAL
4	298.27	13.76	14.51	28.27	46.00	-17.73	Peak	VERTICAL
5 pp	501.18	13.43	20.03	33.46	46.00	-12.54	Peak	VERTICAL
6	564.64	13.10	20.35	33.45	46.00	-12.55	Peak	VERTICAL



Shenzhen Huaxia Testing Technology Co., Ltd.

Report No.: CQASZ20250100161E-02

Transmitter Emission above 1GHz

Worse case mode:		GFSK(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		H/V
2390	55.20	-9.2	46.00	74	-28.00	Peak	Н
2400	54.70	-9.39	45.31	74	-28.69	Peak	Н
4804	52.32	-4.33	47.99	74	-26.01	Peak	Н
7206	49.56	1.01	50.57	74	-23.43	Peak	Н
2390	53.69	-9.2	44.49	74	-29.51	Peak	V
2400	51.70	-9.39	42.31	74	-31.69	Peak	V
4804	53.12	-4.33	48.79	74	-25.21	Peak	V
7206	48.71	1.01	49.72	74	-24.28	Peak	V

Worse case m	iode:	GFSK(1Mbp	s)	Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		H/V
4880	50.54	-4.11	46.43	74	-27.57	peak	Н
7320	49.92	1.51	51.43	74	-22.57	peak	Н
4880	52.51	-4.11	48.40	74	-25.60	peak	V
7320	51.22	1.51	52.73	74	-21.27	peak	V


Worse case mode:		GFSK(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		H/V
2483.5	54.70	-9.29	45.41	74	-28.59	Peak	Н
4960	50.53	-4.04	46.49	74	-27.51	Peak	Н
7440	48.88	1.57	50.45	74	-23.55	Peak	Н
2483.5	55.67	-9.29	46.38	74	-27.62	Peak	V
4960	49.89	-4.04	45.85	74	-28.15	Peak	V
7440	50.93	1.57	52.50	74	-21.50	Peak	V


Remark:


- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.


6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

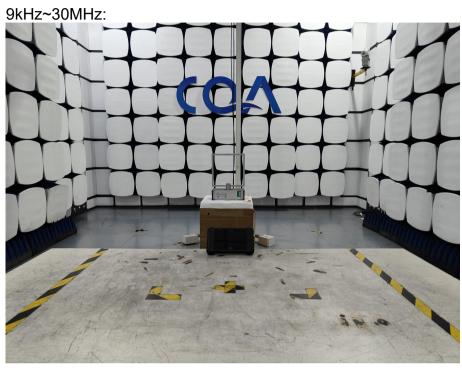




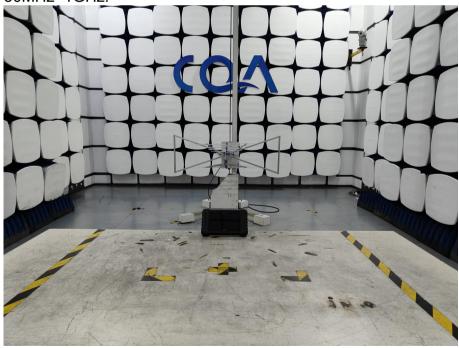

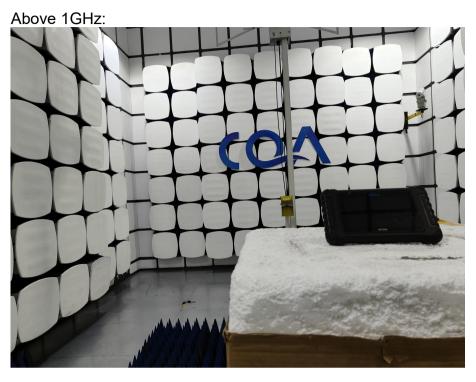

6.2 Conducted Emissions Test Setup

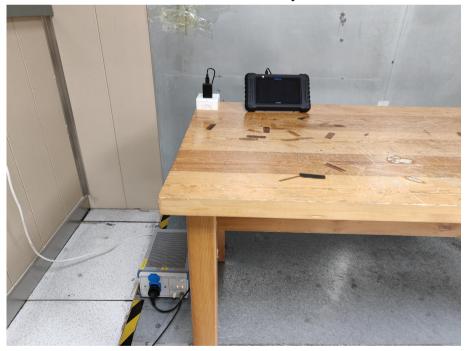





7 Photographs - EUT Constructional Details

Refer to Photographs - EUT Constructional Details OF EUT for CQASZ20250100161E-01.

*** END OF REPORT ***