



RF TEST REPORT

Applicant	Xiaomi Communications Co., Ltd.
FCC ID	2AFZZ3QPG
Product	Mobile Phone
Brand	POCO
Model	220333QPG
Report No.	R2202A0131-R2V2
Issue Date	April 1, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2021)/ FCC CFR 47 Part 24E (2021)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	5
1.1. Notes of the test report	5
1.2. Test facility	5
1.3. Testing Location	5
2. General Description of Equipment under Test	6
2.1. Applicant and Manufacturer Information	6
2.2. General information	6
3. Applied Standards	8
4. Test Configuration	9
5. Test Case	11
5.1. RF Power Output and Effective Isotropic Radiated Power	11
5.2. Occupied Bandwidth	12
5.3. Band Edge Compliance	13
5.4. Peak-to-Average Power Ratio (PAPR)	14
5.5. Frequency Stability	15
5.6. Spurious Emissions at Antenna Terminals	17
5.7. Radiates Spurious Emission	18
6. Test Results	21
6.1. RF Power Output and Effective Isotropic Radiated Power	21
6.2. Occupied Bandwidth	26
6.3. Band Edge Compliance	39
6.4. Peak-to-Average Power Ratio (PAPR)	53
6.5. Frequency Stability	55
6.6. Spurious Emissions at Antenna Terminals	59
6.7. Radiates Spurious Emission	64
7. Main Test Instruments	70
ANNEX A: The EUT Appearance	71
ANNEX B: Test Setup Photos	72



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	March 24, 2022
Rev.1	Update data. Update description.	March 31, 2022
Rev.2	Update Main Test Instruments.	April 1, 2022
Note: This revised report (Report No. R2202A0131-R2V2) supersedes and replaces the previously issued report (Report No. R2202A0131-R2V1). Please discard or destroy the previously issued report and dispose of it accordingly.		

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Isotropic Radiated Power	2.1046 24.232(c)	PASS
2	Occupied Bandwidth	2.1049	PASS
3	Band Edge Compliance	2.1051 /24.238(a)	PASS
4	Peak-to-Average Power Ratio	24.232/KDB 971168 D01(5.7)	PASS
5	Frequency Stability	2.1055 / 24.235	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 24.238(a)	PASS
7	Radiates Spurious Emission	2.1053 / 24.238(a)	PASS
Date of Testing: February 28, 2022 ~March 10, 2022			
Date of Sample Received: February 28, 2022			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	Xiaomi Communications Co., Ltd.
Applicant address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085
Manufacturer	Xiaomi Communications Co., Ltd.
Manufacturer address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

2.2. General information

EUT Description			
Model	220333QPG		
IMEI	IMEI 1: 862598050086446 IMEI 2: 862598050086453		
Hardware Version	P2.0		
Software Version	MIUI 13		
Antenna Type	PIFA Antenna		
Antenna Gain	Band	Low Antenna	Upper Antenna
	GSM1900	-0.35dBi	0.60dBi
	WCDMA Band II	-0.35dBi	0.60dBi
	LTE Band 2	-0.40dBi	0.60dBi
Test Mode(s)	GSM1900; WCDMA Band II; LTE Band 2;		
Test Modulation	(GSM/GPRS)GMSK, (EGPRS) GMSK/ 8PSK; (WCDMA) BPSK, QPSK; (LTE) QPSK, 16QAM, 64QAM;		
GPRS Multislot Class	33		
EGPRS Multislot Class	33		
HSDPA UE Category	24		
HSUPA UE Category	6		
LTE Category	4		
Maximum E.I.R.P	GSM 1900:	30.61dBm	
	WCDMA Band II:	25.21dBm	
	LTE Band 2:	24.70dBm	
Rated Power Supply Voltage	3.87V		
Operating Voltage	Minimum: 3.6V Maximum: 4.2V		
Operating Temperature	Lowest: -0°C Highest: +40°C		
Testing Temperature	Lowest: -30°C Highest: +50°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)



	GSM1900	1850 ~ 1910	1930 ~ 1990
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant. 2. Low antenna and Upper antenna can't transmit simultaneously.			

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 24E (2021)

FCC CFR47 Part 2 (2021)

Reference standard:

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization for Low Antenna GSM/WCDMA and Z axis, horizontal polarization for Low Antenna LTE Band and Upper Antenna GSM/WCDMA/ LTE Band) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation	
	GSM 1900	WCDMA Band II
RF Power Output and Effective Isotropic Radiated Power	GSM GPRS EGPRS	RMC/AMR HSDPA/HSUPA DC-HSDPA
Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GSM	RMC
Radiates Spurious Emission	GSM	RMC

Test modes are chosen to be reported as the worst case configuration below for LTE Band 2:

Test items	Bandwidth (MHz)						Modulation		RB			Test Channel		
	1.4	3	5	10	15	20	QPSK	16QAM/ 64QAM	1	50%	100%	L	M	H
RF Power Output and Effective Isotropic Radiated Power	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	O	O	-	-	-	O	-
Spurious Emissions at Antenna Terminals	O	O	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	-	O	-	-	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													

5. Test Case

5.1.RF Power Output and Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where:dBd refers to gain relative to an ideal dipole.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB.)}$$

Test Setup

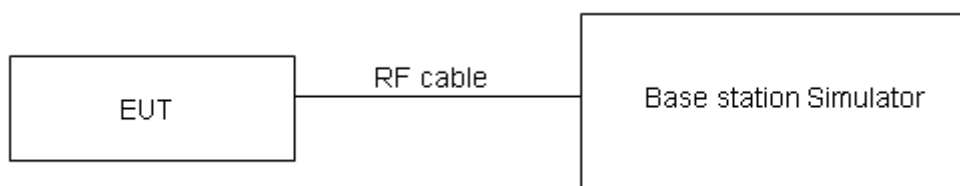

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Limit	$\leq 2 \text{ W}$ (33 dBm)
-------	-----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4 \text{ dB}$ for RF power output, $k = 2$, $U = 1.19 \text{ dB}$ for EIRP.

Test Results

Refer to the section 6.1 of this report for test data.

5.2.Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to $\geq 1\%EBW$, VBW is set to 3x RBW.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

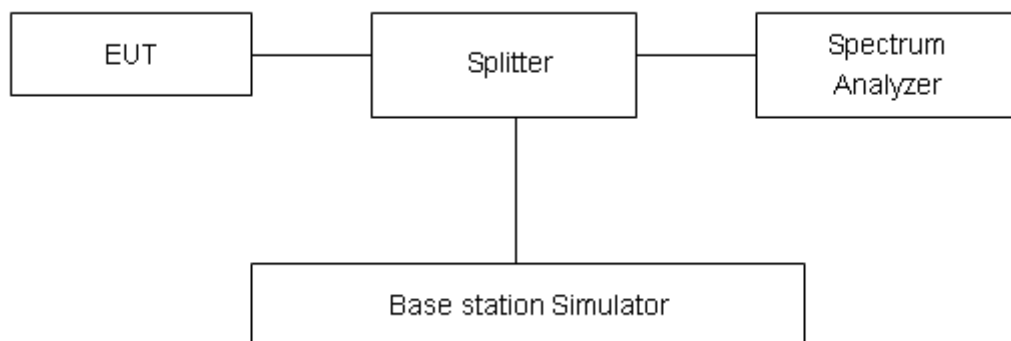

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

Test Results

Refer to the section 6.2 of this report for test data.

5.3. Band Edge Compliance

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to $\geq 1\%EBW$, VBW is set to 3x RBW.

Spectrum analyzer plots are included on the following pages.

Test Setup

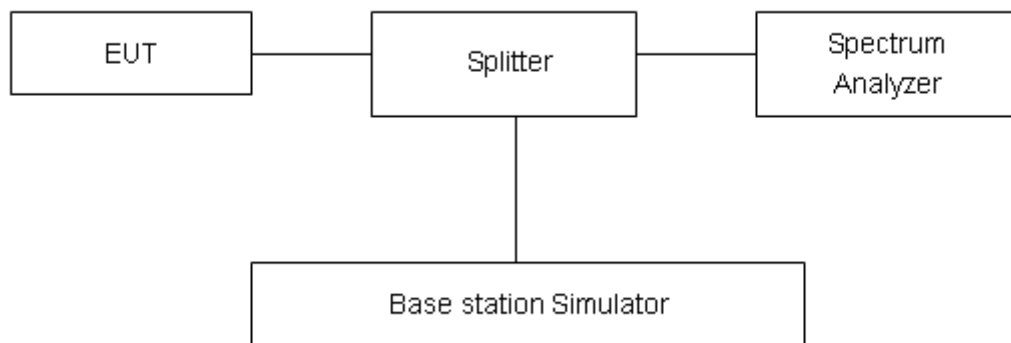

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684\text{dB}$.

Test Results

Refer to the section 6.3 of this report for test data.

5.4. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPK. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

Test Setup

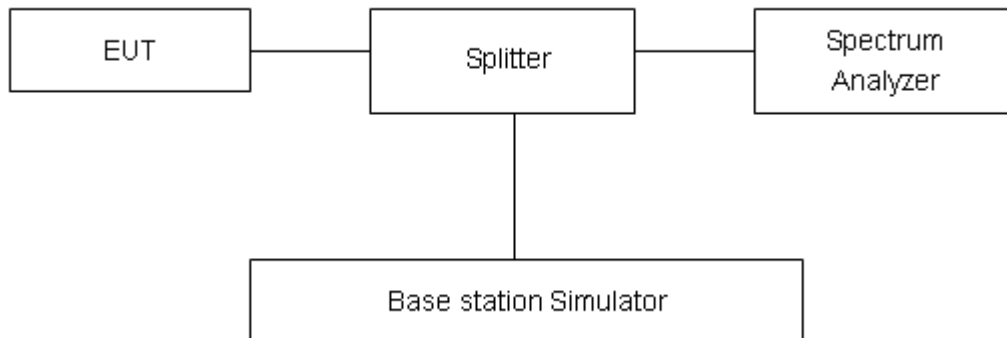

Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

Refer to the section 6.4 of this report for test data.

5.5. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.


Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.2 V, with a nominal voltage of 3.87V.

Test setup

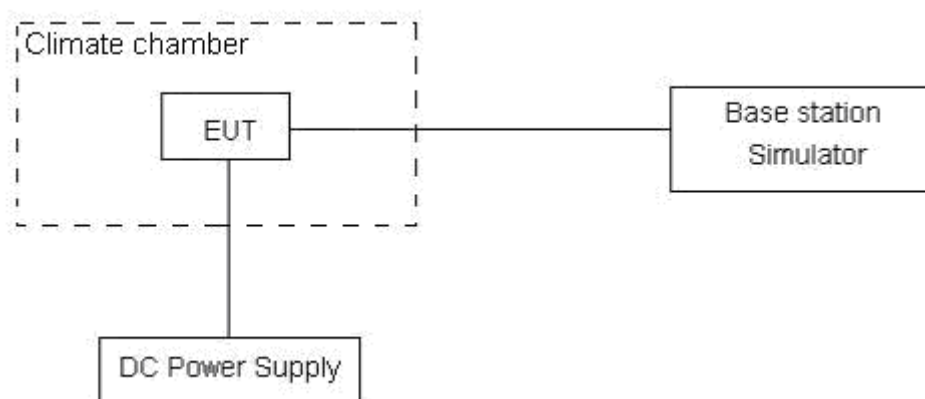

Limits

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Results

Refer to the section 6.5 of this report for test data.

5.6. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),


RBW is set to 10 kHz (0.15 MHz~ 30 MHz)

RBW is set to 100 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

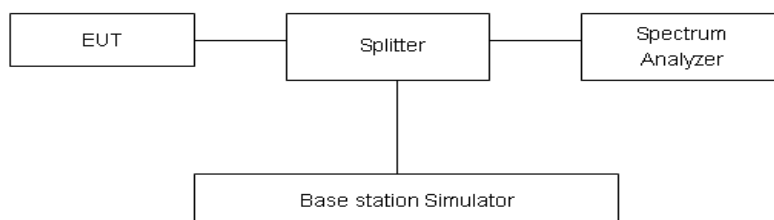

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB

Test Results

Refer to the section 6.6 of this report for test data.

5.7. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dB.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

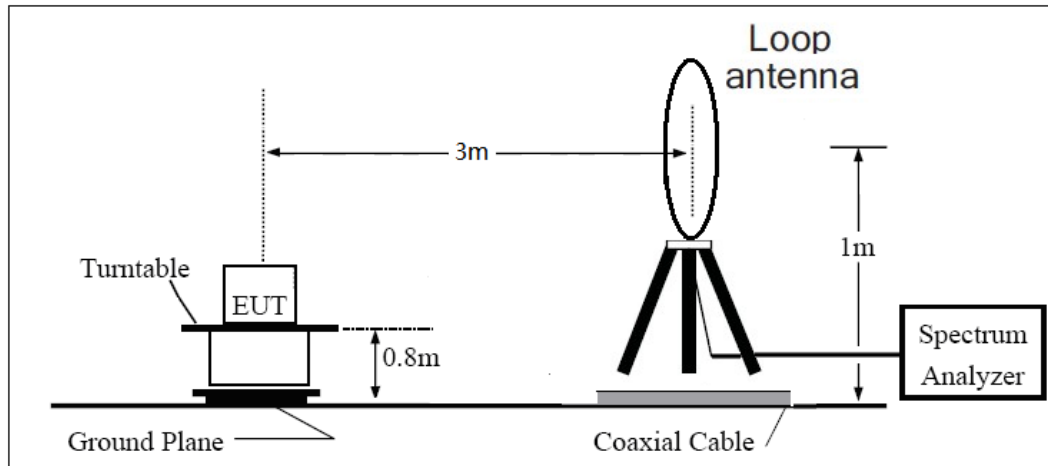

30MHz ~ 1GHz

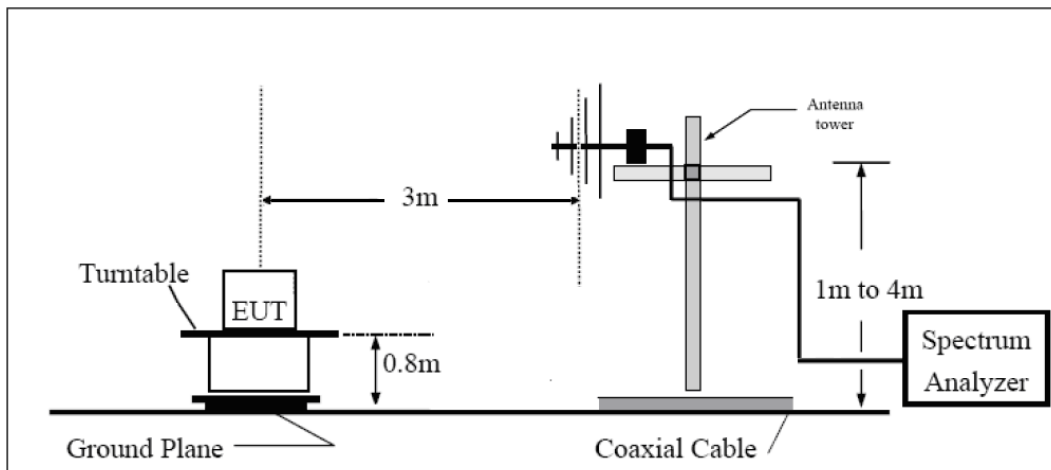

Above 1GHz

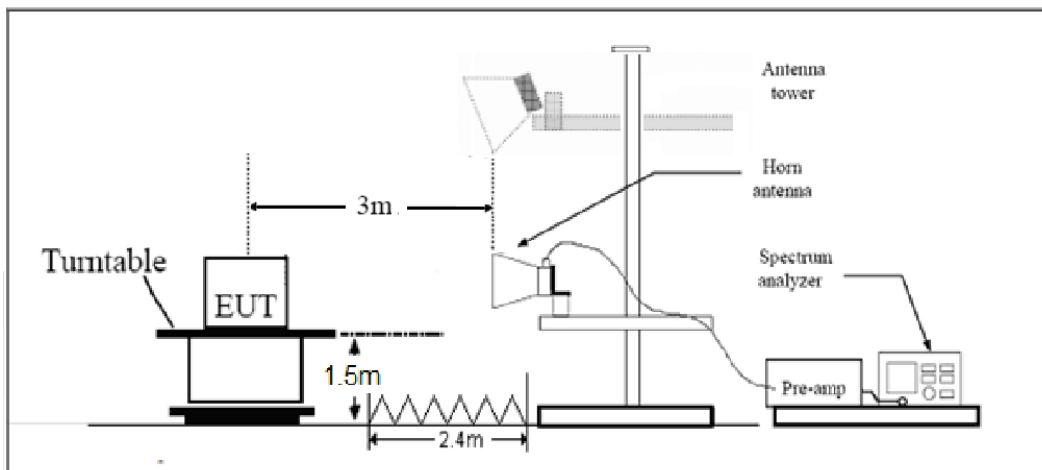

Note: Area side: 2.4mX3.6m

**Limits**

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Results

Refer to the section 6.7 of this report for test data.

6. Test Results

6.1.RF Power Output and Effective Isotropic Radiated Power

GSM 1900		Maximum Output Power (dBm)			Low Antenna EIRP (dBm)			Upper Antenna EIRP (dBm)		
		Channel 512	Channel 661	Channel 810	Channel 512	Channel 661	Channel 810	Channel 512	Channel 661	Channel 810
		1850.2 (MHz)	1880 (MHz)	1909.8 (MHz)	1850.2 (MHz)	1880 (MHz)	1909.8 (MHz)	1850.2 (MHz)	1880 (MHz)	1909.8 (MHz)
GSM(GMSK)	Results	30.01	29.93	29.76	29.65	29.58	28.92	30.61	29.03	29.16
GPRS (GMSK)	1TXslot	29.87	29.94	29.71	29.51	29.59	28.87	30.47	29.04	29.11
	2TXslots	28.41	28.48	28.38	28.05	28.13	27.54	29.01	27.58	27.78
	3TXslots	26.66	26.82	26.61	26.30	26.47	25.77	27.26	25.92	26.01
	4TXslots	25.52	25.56	25.51	25.16	25.21	24.67	26.12	24.66	24.91
EGPRS (8PSK)	1TXslot	25.97	26.16	26.07	25.61	25.81	25.23	26.57	25.26	25.47
	2TXslots	25.01	25.04	25.06	24.65	24.69	24.22	25.61	24.14	24.46
	3TXslots	23.18	23.13	23.07	22.82	22.78	22.23	23.78	22.23	22.47
	4TXslots	22.19	22.13	22.27	21.83	21.78	21.43	22.79	21.23	21.67

WCDMA Band II		Maximum Output Power (dBm)			Low Antenna EIRP (dBm)			Upper Antenna EIRP (dBm)		
		Channel 9262	Channel 9400	Channel 9538	Channel 9262	Channel 9400	Channel 9538	Channel 9262	Channel 9400	Channel 9538
		1852.4 (MHz)	1880 (MHz)	1907.6 (MHz)	1852.4 (MHz)	1880 (MHz)	1907.6 (MHz)	1852.4 (MHz)	1880 (MHz)	1907.6 (MHz)
RMC		24.61	24.55	24.70	24.25	24.20	23.86	25.21	23.65	24.10
AMR		24.51	24.46	24.57	24.15	24.11	23.73	25.11	23.56	23.97
HSDPA	Sub - Test 1	24.03	23.97	24.12	23.67	23.62	23.28	24.63	23.07	23.52
	Sub - Test 2	24.02	23.96	24.11	23.66	23.61	23.27	24.62	23.06	23.51
	Sub - Test 3	23.51	23.45	23.60	23.15	23.10	22.76	24.11	22.55	23.00
	Sub - Test 4	23.50	23.44	23.59	23.14	23.09	22.75	24.10	22.54	22.99
HSUPA	Sub - Test 1	22.59	22.53	22.68	22.23	22.18	21.84	23.19	21.63	22.08
	Sub - Test 2	22.18	22.12	22.27	21.82	21.77	21.43	22.78	21.22	21.67
	Sub - Test 3	23.16	23.11	23.26	22.80	22.76	22.42	23.76	22.21	22.66
	Sub - Test 4	21.55	21.50	21.65	21.19	21.15	20.81	22.15	20.60	21.05
	Sub - Test 5	23.14	23.09	23.24	22.78	22.74	22.40	23.74	22.19	22.64
DC-HSDPA	Sub - Test 1	23.95	23.91	23.94	23.59	23.56	23.10	24.55	23.01	23.34
	Sub - Test 2	23.94	23.90	23.92	23.58	23.55	23.08	24.54	23.00	23.32



	Sub - Test 3	23.52	23.39	23.54	23.16	23.04	22.70	24.12	22.49	22.94
	Sub - Test 4	23.51	23.38	23.53	23.15	23.03	22.69	24.11	22.48	22.93

LTE Band 2				Maximum Output Power(dBm)			Low Antenna EIRP (dBm)			Upper Antenna EIRP (dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)								
				18607/1850.7	18900/1880	19193/1909.3	18607/1850.7	18900/1880	19193/1909.3	18607/1850.7	18900/1880	19193/1909.3
1.4MHz	QPSK	1	0	23.91	24.01	23.87	23.55	23.66	23.03	24.51	23.11	23.27
		1	2	24.10	24.00	24.13	23.74	23.65	23.29	24.70	23.10	23.53
		1	5	23.88	23.80	23.48	23.52	23.45	22.64	24.48	22.90	22.88
		3	0	23.81	24.00	23.93	23.45	23.65	23.09	24.41	23.10	23.33
		3	2	23.91	23.89	24.01	23.55	23.54	23.17	24.51	22.99	23.41
		3	3	23.96	23.84	24.09	23.60	23.49	23.25	24.56	22.94	23.49
		6	0	22.93	22.96	23.08	22.57	22.61	22.24	23.53	22.06	22.48
	16QAM	1	0	22.76	23.04	22.84	22.40	22.69	22.00	23.36	22.14	22.24
		1	2	22.89	22.78	22.58	22.53	22.43	21.74	23.49	21.88	21.98
		1	5	22.43	22.36	22.67	22.07	22.01	21.83	23.03	21.46	22.07
		3	0	22.99	22.94	23.12	22.63	22.59	22.28	23.59	22.04	22.52
		3	2	22.98	22.90	23.06	22.62	22.55	22.22	23.58	22.00	22.46
		3	3	22.95	22.90	22.90	22.59	22.55	22.06	23.55	22.00	22.30
		6	0	21.96	21.90	22.09	21.60	21.55	21.25	22.56	21.00	21.49
	64QAM	1	0	22.88	22.65	22.49	22.52	22.30	21.65	23.48	21.75	21.89
		1	2	22.88	22.94	22.94	22.52	22.59	22.10	23.48	22.04	22.34
		1	5	22.31	22.61	21.50	21.95	22.26	20.66	22.91	21.71	20.90
		3	0	22.76	22.80	22.72	22.40	22.45	21.88	23.36	21.90	22.12
		3	2	22.80	22.82	22.84	22.44	22.47	22.00	23.40	21.92	22.24
		3	3	22.75	22.86	22.82	22.39	22.51	21.98	23.35	21.96	22.22
		6	0	21.86	21.93	21.94	21.50	21.58	21.10	22.46	21.03	21.34
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)								
				18615/1851.5	18900/1880	19185/1908.5	18615/1851.5	18900/1880	19185/1908.5	18615/1851.5	18900/1880	19185/1908.5
3MHz	QPSK	1	0	23.93	24.05	23.90	23.57	23.70	23.06	24.53	23.15	23.30
		1	7	24.08	24.03	24.17	23.72	23.68	23.33	24.68	23.13	23.57
		1	14	23.91	23.85	23.52	23.55	23.50	22.68	24.51	22.95	22.92
		8	0	22.91	23.12	23.06	22.55	22.77	22.22	23.51	22.22	22.46
		8	4	23.03	22.99	23.13	22.67	22.64	22.29	23.63	22.09	22.53
		8	7	23.06	22.95	23.19	22.70	22.60	22.35	23.66	22.05	22.59



	16QAM	15	0	22.93	23.00	23.11	22.57	22.65	22.27	23.53	22.10	22.51
		1	0	22.76	23.06	22.87	22.40	22.71	22.03	23.36	22.16	22.27
		1	7	22.89	22.78	22.62	22.53	22.43	21.78	23.49	21.88	22.02
		1	14	22.45	22.40	22.70	22.09	22.05	21.86	23.05	21.50	22.10
		8	0	22.10	22.07	22.24	21.74	21.72	21.40	22.70	21.17	21.64
		8	4	22.09	22.03	22.18	21.73	21.68	21.34	22.69	21.13	21.58
		8	7	22.05	22.02	22.03	21.69	21.67	21.19	22.65	21.12	21.43
		15	0	21.99	21.94	22.12	21.63	21.59	21.28	22.59	21.04	21.52
	64QAM	1	0	22.91	22.67	22.52	22.55	22.32	21.68	23.51	21.77	21.92
		1	7	22.91	22.94	22.96	22.55	22.59	22.12	23.51	22.04	22.36
		1	14	22.33	22.60	21.53	21.97	22.25	20.69	22.93	21.70	20.93
		8	0	21.87	21.93	21.84	21.51	21.58	21.00	22.47	21.03	21.24
		8	4	21.91	21.95	21.96	21.55	21.60	21.12	22.51	21.05	21.36
		8	7	21.85	21.98	21.95	21.49	21.63	21.11	22.45	21.08	21.35
		15	0	21.89	21.97	21.97	21.53	21.62	21.13	22.49	21.07	21.37
		Channel/Frequency(MHz)										
BW	Modulation	RB size	RB offset	18625/1852.5	18900/1880	19175/1907.5	18625/1852.5	18900/1880	19175/1907.5	18625/1852.5	18900/1880	19175/1907.5
5MHz	QPSK	1	0	23.90	24.03	23.86	23.54	23.68	23.02	24.50	23.13	23.26
		1	13	24.06	23.99	24.14	23.70	23.64	23.30	24.66	23.09	23.54
		1	24	23.88	23.80	23.48	23.52	23.45	22.64	24.48	22.90	22.88
		12	0	22.88	23.07	23.02	22.52	22.72	22.18	23.48	22.17	22.42
		12	6	23.01	22.95	23.08	22.65	22.60	22.24	23.61	22.05	22.48
		12	13	23.04	22.93	23.15	22.68	22.58	22.31	23.64	22.03	22.55
		25	0	22.93	22.99	23.09	22.57	22.64	22.25	23.53	22.09	22.49
	16QAM	1	0	22.76	23.02	22.84	22.40	22.67	22.00	23.36	22.12	22.24
		1	13	22.89	22.76	22.59	22.53	22.41	21.75	23.49	21.86	21.99
		1	24	22.42	22.38	22.66	22.06	22.03	21.82	23.02	21.48	22.06
		12	0	22.08	22.03	22.21	21.72	21.68	21.37	22.68	21.13	21.61
		12	6	22.06	21.98	22.14	21.70	21.63	21.30	22.66	21.08	21.54
		12	13	22.02	21.97	21.99	21.66	21.62	21.15	22.62	21.07	21.39
		25	0	21.97	21.90	22.07	21.61	21.55	21.23	22.57	21.00	21.47
	64QAM	1	0	22.88	22.67	22.49	22.52	22.32	21.65	23.48	21.77	21.89
		1	13	22.88	22.96	22.93	22.52	22.61	22.09	23.48	22.06	22.33
		1	24	22.34	22.58	21.49	21.98	22.23	20.65	22.94	21.68	20.89
		12	0	21.85	21.89	21.85	21.49	21.54	21.01	22.45	20.99	21.25
		12	6	21.88	21.90	21.92	21.52	21.55	21.08	22.48	21.00	21.32



		12	13	21.82	21.93	21.91	21.46	21.58	21.07	22.42	21.03	21.31
		25	0	21.87	21.93	21.92	21.51	21.58	21.08	22.47	21.03	21.32
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)								
				18650/ 1855	18900/ 1880	19150/ 1905	18650/ 1855	18900/ 1880	19150/ 1905	18650/ 1855	18900/ 1880	19150/ 1905
10MHz	QPSK	1	0	23.92	24.04	23.89	23.56	23.69	23.05	24.52	23.14	23.29
		1	25	24.09	24.04	24.18	23.73	23.69	23.34	24.69	23.14	23.58
		1	49	23.90	23.84	23.51	23.54	23.49	22.67	24.50	22.94	22.91
		25	0	22.91	23.12	23.06	22.55	22.77	22.22	23.51	22.22	22.46
		25	13	23.04	23.00	23.12	22.68	22.65	22.28	23.64	22.10	22.52
		25	25	23.06	22.97	23.20	22.70	22.62	22.36	23.66	22.07	22.60
		50	0	22.97	23.01	23.13	22.61	22.66	22.29	23.57	22.11	22.53
	16QAM	1	0	22.80	23.05	22.86	22.44	22.70	22.02	23.40	22.15	22.26
		1	25	22.93	22.80	22.62	22.57	22.45	21.78	23.53	21.90	22.02
		1	49	22.45	22.40	22.69	22.09	22.05	21.85	23.05	21.50	22.09
		25	0	22.11	22.08	22.25	21.75	21.73	21.41	22.71	21.18	21.65
		25	13	22.08	22.02	22.17	21.72	21.67	21.33	22.68	21.12	21.57
		25	25	22.05	22.02	22.03	21.69	21.67	21.19	22.65	21.12	21.43
		50	0	22.00	21.95	22.11	21.64	21.60	21.27	22.60	21.05	21.51
	64QAM	1	0	22.90	22.66	22.51	22.54	22.31	21.67	23.50	21.76	21.91
		1	25	22.91	22.96	22.96	22.55	22.61	22.12	23.51	22.06	22.36
		1	49	22.33	22.60	21.52	21.97	22.25	20.68	22.93	21.70	20.92
		25	0	21.88	21.94	21.85	21.52	21.59	21.01	22.48	21.04	21.25
		25	13	21.90	21.94	21.95	21.54	21.59	21.11	22.50	21.04	21.35
		25	25	21.85	21.98	21.95	21.49	21.63	21.11	22.45	21.08	21.35
		50	0	21.90	21.98	21.96	21.54	21.63	21.12	22.50	21.08	21.36
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)								
				18675/ 1857.5	18900/ 1880	19125/ 1902.5	18675/ 1857.5	18900/ 1880	19125/ 1902.5	18675/ 1857.5	18900/ 1880	19125/ 1902.5
15MHz	QPSK	1	0	23.91	24.00	23.87	23.55	23.65	23.03	24.51	23.10	23.27
		1	38	24.07	24.03	24.15	23.71	23.68	23.31	24.67	23.13	23.55
		1	74	23.87	23.79	23.47	23.51	23.44	22.63	24.47	22.89	22.87
		36	0	22.89	23.08	23.03	22.53	22.73	22.19	23.49	22.18	22.43
		36	18	23.01	22.95	23.08	22.65	22.60	22.24	23.61	22.05	22.48
		36	39	23.03	22.94	23.16	22.67	22.59	22.32	23.63	22.04	22.56
		75	0	22.95	22.97	23.08	22.59	22.62	22.24	23.55	22.07	22.48
	16QAM	1	0	22.78	23.03	22.84	22.42	22.68	22.00	23.38	22.13	22.24



		1	38	22.91	22.77	22.60	22.55	22.42	21.76	23.51	21.87	22.00
		1	74	22.43	22.36	22.66	22.07	22.01	21.82	23.03	21.46	22.06
		36	0	22.08	22.06	22.22	21.72	21.71	21.38	22.68	21.16	21.62
		36	18	22.05	21.97	22.13	21.69	21.62	21.29	22.65	21.07	21.53
		36	39	22.03	21.98	22.00	21.67	21.63	21.16	22.63	21.08	21.40
		75	0	21.97	21.90	22.07	21.61	21.55	21.23	22.57	21.00	21.47
		75	0	21.97	21.90	22.07	21.61	21.55	21.23	22.57	21.00	21.47
	64QAM	1	0	22.85	22.64	22.49	22.49	22.29	21.65	23.45	21.74	21.89
		1	38	22.89	22.93	22.94	22.53	22.58	22.10	23.49	22.03	22.34
		1	74	22.34	22.59	21.53	21.98	22.24	20.69	22.94	21.69	20.93
		36	0	21.87	21.96	21.86	21.51	21.61	21.02	22.47	21.06	21.26
		36	18	21.88	21.91	21.94	21.52	21.56	21.10	22.48	21.01	21.34
		36	39	21.83	21.94	21.92	21.47	21.59	21.08	22.43	21.04	21.32
		75	0	21.87	21.93	21.92	21.51	21.58	21.08	22.47	21.03	21.32
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)								
				18700/ 1860	18900/ 1880	19100/ 1900	18700/ 1860	18900/ 1880	19100/ 1900	18700/ 1860	18900/ 1880	19100/ 1900
20MHz	QPSK	1	0	23.88	23.96	23.84	23.52	23.61	23.00	24.48	23.06	23.24
		1	50	24.06	23.99	24.13	23.70	23.64	23.29	24.66	23.09	23.53
		1	99	23.85	23.78	23.44	23.49	23.43	22.60	24.45	22.88	22.84
		50	0	22.86	23.03	22.99	22.50	22.68	22.15	23.46	22.13	22.39
		50	25	22.99	22.91	23.05	22.63	22.56	22.21	23.59	22.01	22.45
		50	50	23.00	22.89	23.12	22.64	22.54	22.28	23.60	21.99	22.52
		100	0	22.92	22.92	23.04	22.56	22.57	22.20	23.52	22.02	22.44
	16QAM	1	0	22.75	22.99	22.79	22.39	22.64	21.95	23.35	22.09	22.19
		1	50	22.88	22.75	22.56	22.52	22.40	21.72	23.48	21.85	21.96
		1	99	22.40	22.33	22.64	22.04	21.98	21.80	23.00	21.43	22.04
		50	0	22.05	22.02	22.19	21.69	21.67	21.35	22.65	21.12	21.59
		50	25	22.02	21.95	22.10	21.66	21.60	21.26	22.62	21.05	21.50
		50	50	22.00	21.93	21.96	21.64	21.58	21.12	22.60	21.03	21.36
		100	0	21.95	21.86	22.04	21.59	21.51	21.20	22.55	20.96	21.44
	64QAM	1	0	22.83	22.60	22.44	22.47	22.25	21.60	23.43	21.70	21.84
		1	50	22.85	22.91	22.90	22.49	22.56	22.06	23.45	22.01	22.30
		1	99	22.28	22.53	21.47	21.92	22.18	20.63	22.88	21.63	20.87
		50	0	21.82	21.88	21.79	21.46	21.53	20.95	22.42	20.98	21.19
		50	25	21.84	21.87	21.88	21.48	21.52	21.04	22.44	20.97	21.28
		50	50	21.80	21.89	21.88	21.44	21.54	21.04	22.40	20.99	21.28
		100	0	21.85	21.89	21.89	21.49	21.54	21.05	22.45	20.99	21.29

6.2.Occupied Bandwidth

Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GSM 1900 (GMSK)	512	1850.2	0.241	0.307
	661	1880.0	0.242	0.299
	810	1909.8	0.243	0.303
GPRS 1900 (GMSK)	512	1850.2	0.245	0.312
	661	1880.0	0.244	0.312
	810	1909.8	0.246	0.315
EGPRS 1900 (8PSK)	512	1850.2	0.243	0.311
	661	1880.0	0.241	0.304
	810	1909.8	0.249	0.307
WCDMA Band II (RMC)	9262	1852.4	4.116	4.683
	9400	1880	4.123	4.702
	9538	1907.6	4.123	4.687

LTE Band 2						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	18607	1850.7	1.108	1.289
			18900	1880.0	1.091	1.304
			19193	1909.3	1.096	1.327
		3	18615	1851.5	2.701	2.983
			18900	1880	2.706	2.977
			19185	1908.5	2.699	2.977
		5	18625	1852.5	4.507	5.034
			18900	1880	4.498	4.990
			19175	1907.5	4.509	4.932
		10	18650	1855	8.958	9.772
			18900	1880	8.954	9.740
			19150	1905	8.962	9.887
		15	18675	1857.5	13.439	14.498
			18900	1880	13.389	14.675
			19125	1902.5	13.385	14.577
		20	18700	1860	17.910	19.119
			18900	1880	17.941	19.336



			19100	1900	17.929	19.241
			18607	1850.7	1.097	1.290
	1.4		18900	1880.0	1.101	1.319
			19193	1909.3	1.093	1.296
			18615	1851.5	2.711	2.957
	3		18900	1880	2.700	2.995
			19185	1908.5	2.689	2.993
			18625	1852.5	4.496	4.931
	5		18900	1880	4.505	4.993
			19175	1907.5	4.502	5.024
			18650	1855	8.980	9.703
	10		18900	1880	8.967	9.699
			19150	1905	8.979	9.742
			18675	1857.5	13.407	14.474
	15		18900	1880	13.421	14.552
			19125	1902.5	13.437	14.583
			18700	1860	17.851	19.250
	20		18900	1880	17.897	19.192
			19100	1900	17.907	19.267
			18607	1850.7	1.096	1.294
			18900	1880.0	1.099	1.324
	1.4		19193	1909.3	1.104	1.276
			18615	1851.5	2.700	2.996
			18900	1880	2.697	2.983
	3		19185	1908.5	2.698	3.000
			18625	1852.5	4.496	4.962
			18900	1880	4.519	4.964
	5		19175	1907.5	4.519	4.991
			18650	1855	8.981	9.761
	10		18900	1880	8.955	9.754
			19150	1905	8.973	9.787
			18675	1857.5	13.407	14.571
	15		18900	1880	13.421	14.567
			19125	1902.5	13.430	14.548
			18700	1860	17.901	19.255
	20		18900	1880	17.863	19.352
			19100	1900	17.891	19.375



GSM1900 GSM CH-Low



GSM1900 GPRS CH-Low



GSM 1900 GSM CH-Middle



GSM 1900 GPRS CH-Middle



GSM 1900 GSM CH-High



GSM 1900 GPRS CH-High





GSM1900 EGPRS CH-Low



WCDMA Band II RMC CH-LOW



GSM 1900 EGPRS CH-Middle



WCDMA Band II RMC CH-Middle



GSM 1900 EGPRS CH-High




WCDMA Band II RMC CH-High







LTE Band 2 1.4MHz QPSK CH-Low

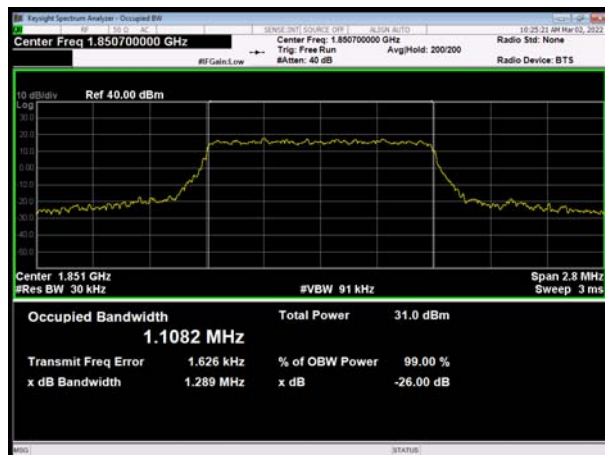


LTE Band 2 3MHz QPSK CH-Low

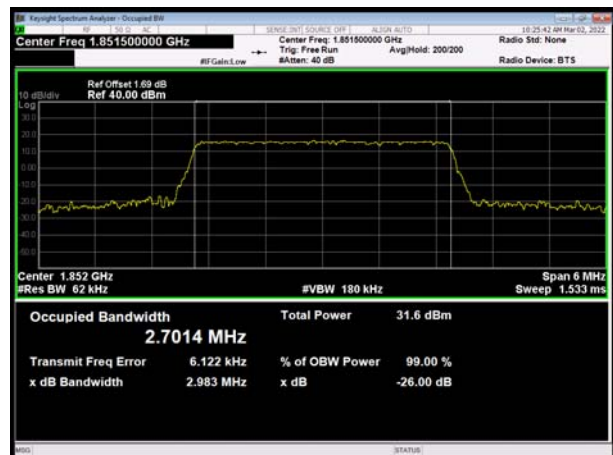


LTE Band 2 1.4MHz QPSK CH-Middle

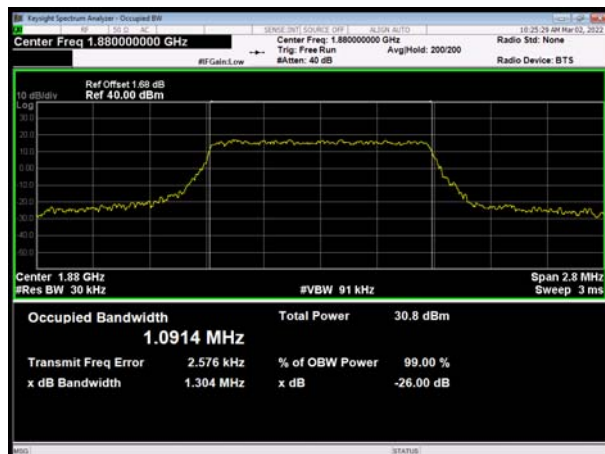


LTE Band 2 3MHz QPSK CH-Middle

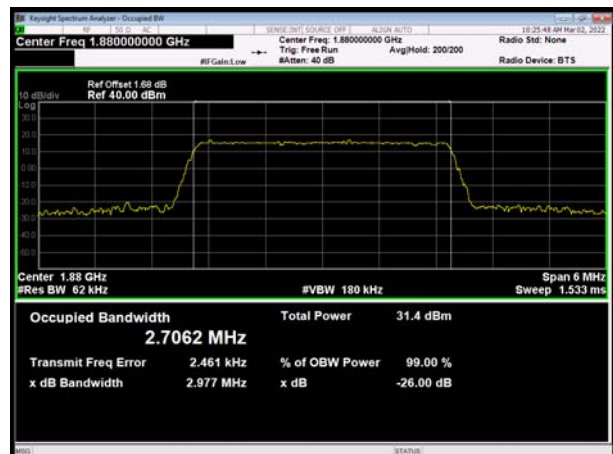

LTE Band 2 1.4MHz QPSK CH-High

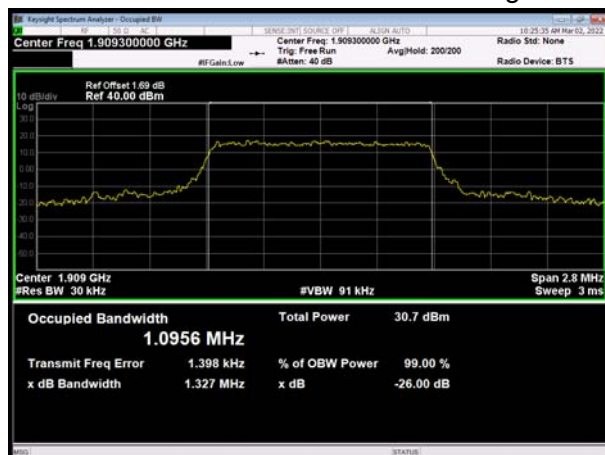


LTE Band 2 3MHz QPSK CH-High

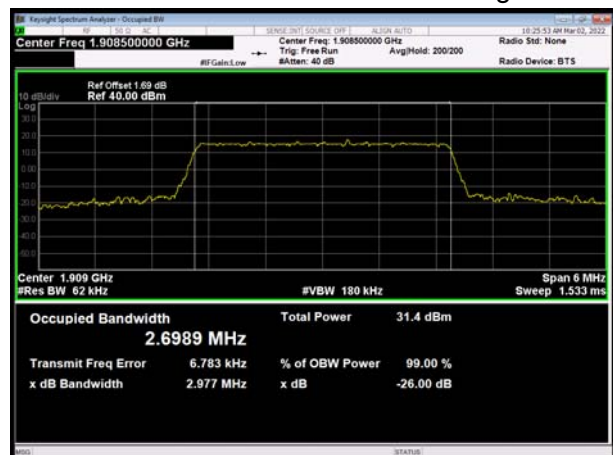





LTE Band 2 5MHz QPSK CH-Low

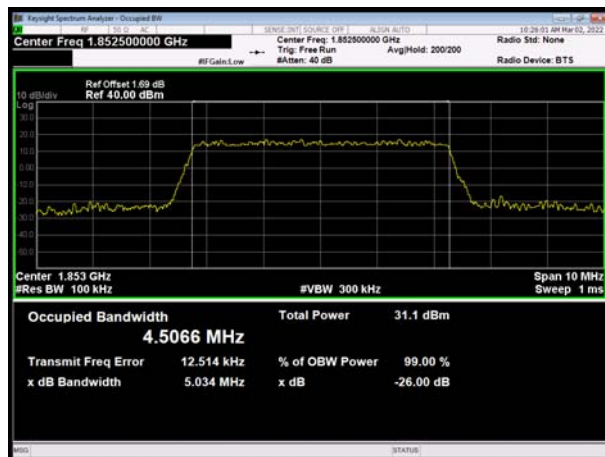


LTE Band 2 10MHz QPSK CH-Low

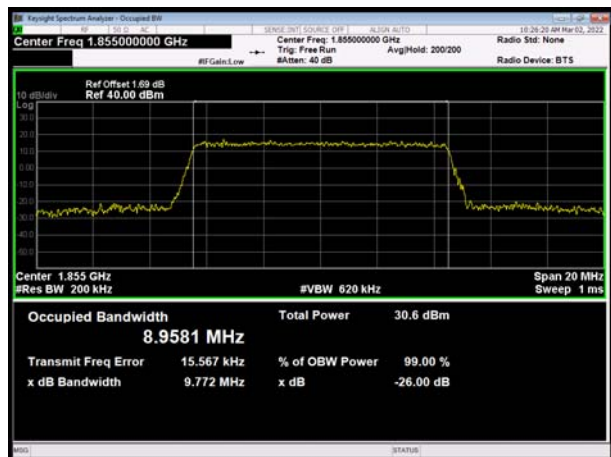


LTE Band 2 5MHz QPSK CH-Middle

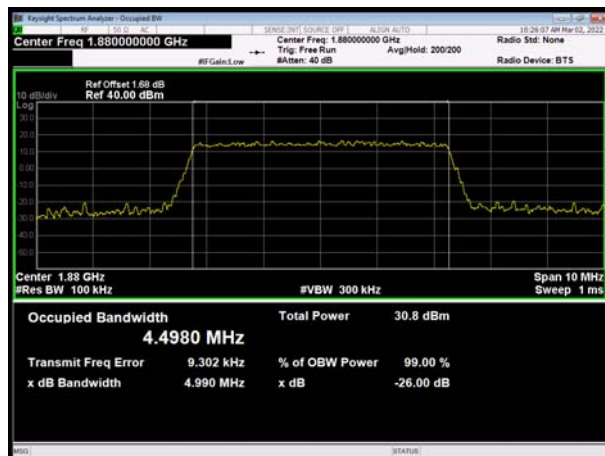

LTE Band 2 10MHz QPSK CH-Middle

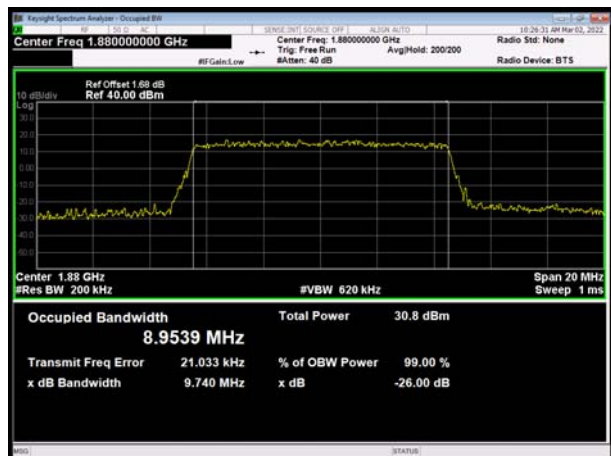

LTE Band 2 5MHz QPSK CH-High

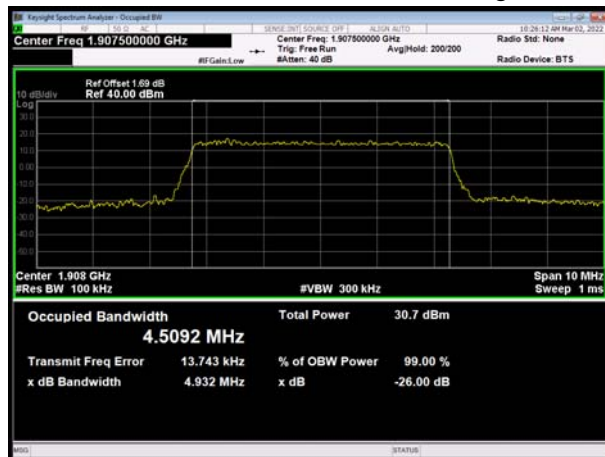


LTE Band 2 10MHz QPSK CH-High







LTE Band 2 15MHz QPSK CH-Low

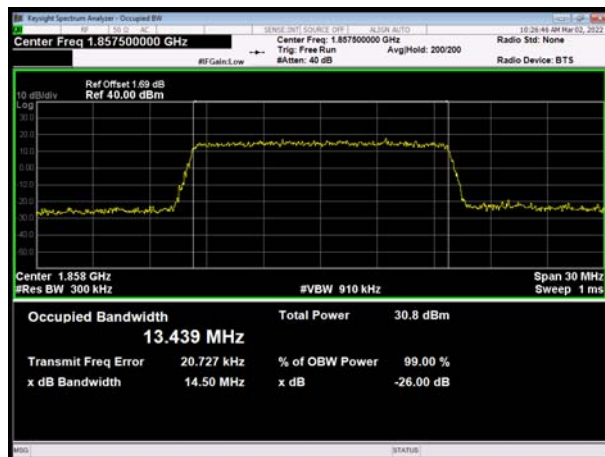


LTE Band 2 20MHz QPSK CH-Low

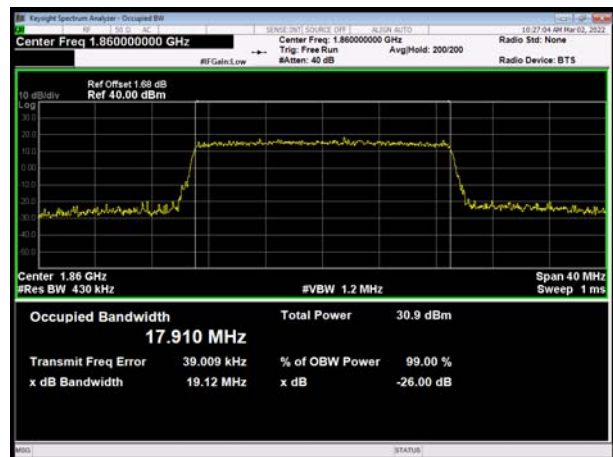


LTE Band 2 15MHz QPSK CH-Middle

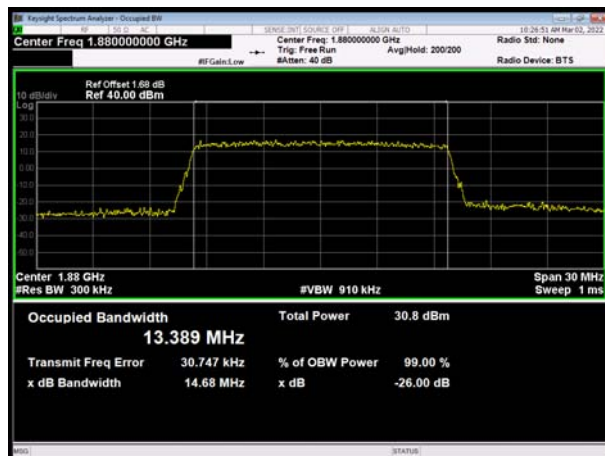


LTE Band 2 20MHz QPSK CH-Middle

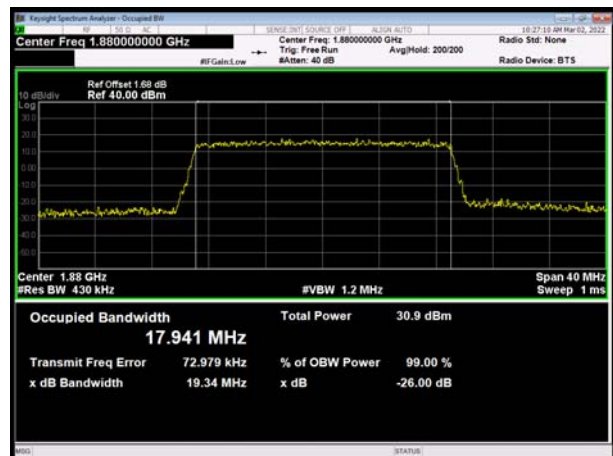

LTE Band 2 15MHz QPSK CH-High

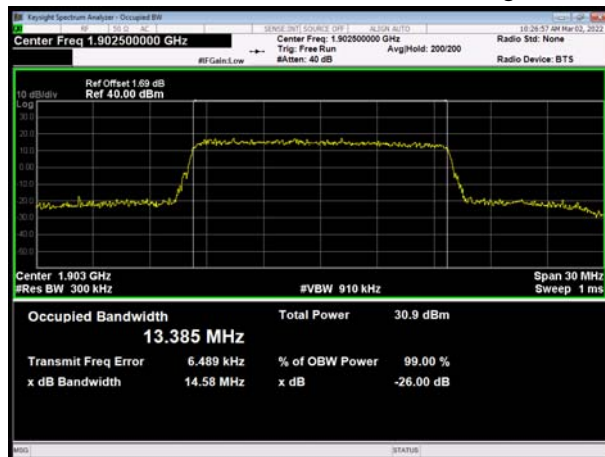


LTE Band 2 20MHz QPSK CH-High

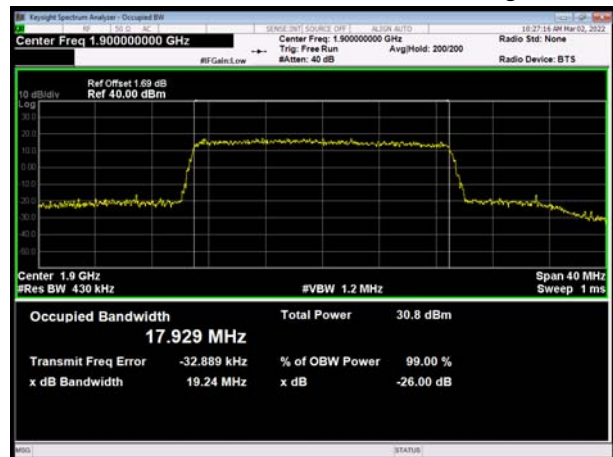





LTE Band 2 1.4MHz 16QAM CH-Low

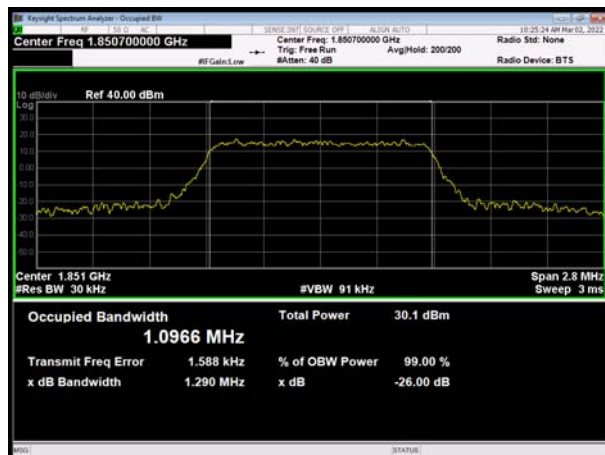


LTE Band 2 3MHz 16QAM CH-Low

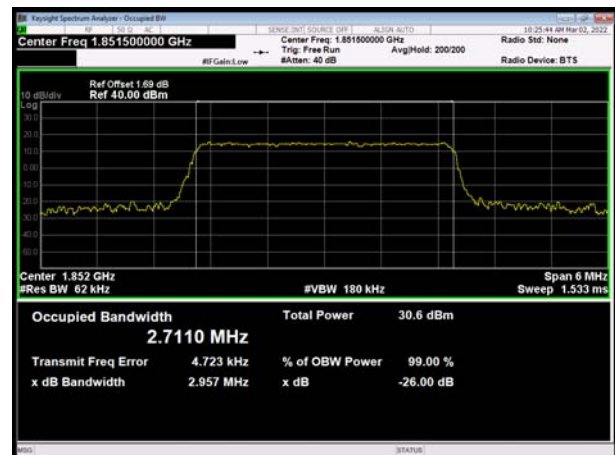


LTE Band 2 1.4MHz 16QAM CH-Middle

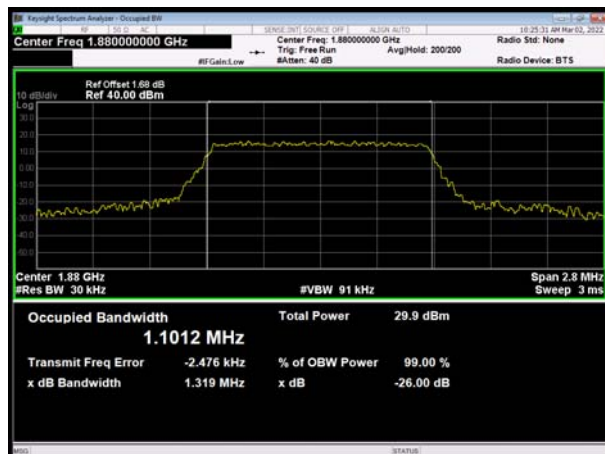


LTE Band 2 3MHz 16QAM CH-Middle

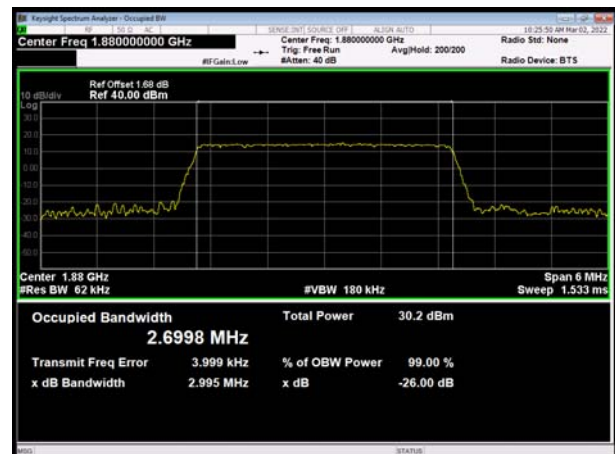


LTE Band 2 1.4MHz 16QAM CH-High

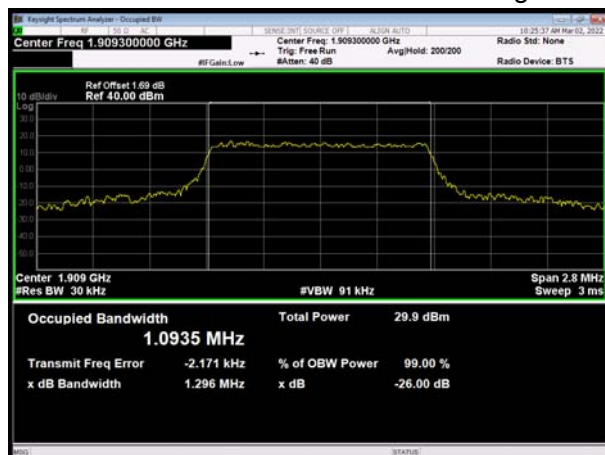


LTE Band 2 3MHz 16QAM CH-High

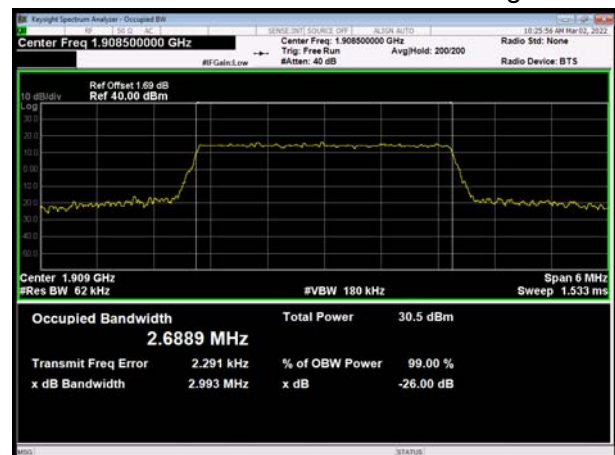


LTE Band 2 5MHz 16QAM CH-Low

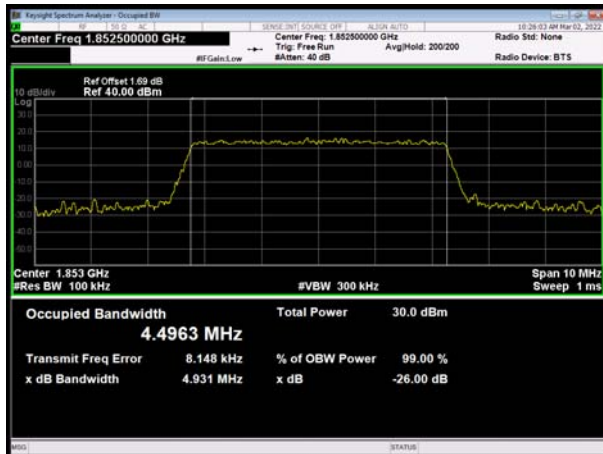


LTE Band 2 10MHz 16QAM CH-Low

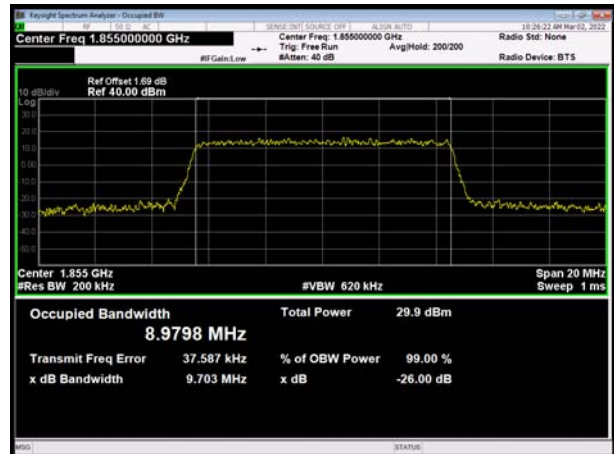


LTE Band 2 5MHz 16QAM CH-Middle

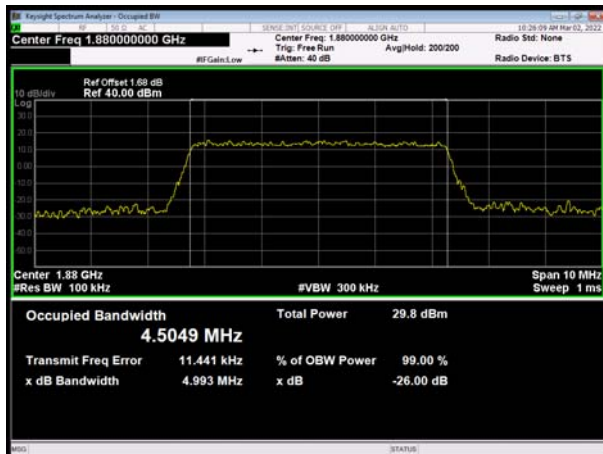


LTE Band 2 10MHz 16QAM CH-Middle

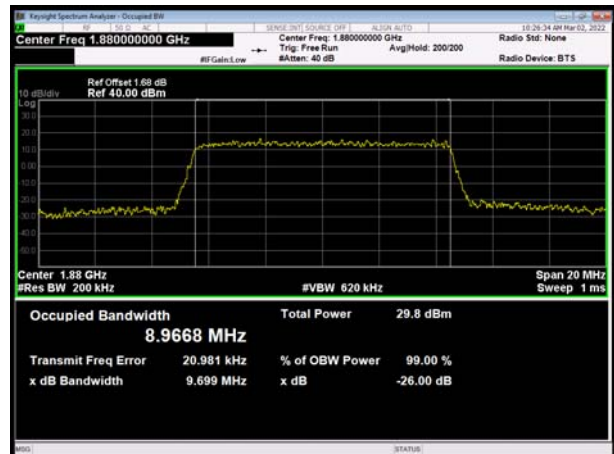


LTE Band 2 5MHz 16QAM CH-High

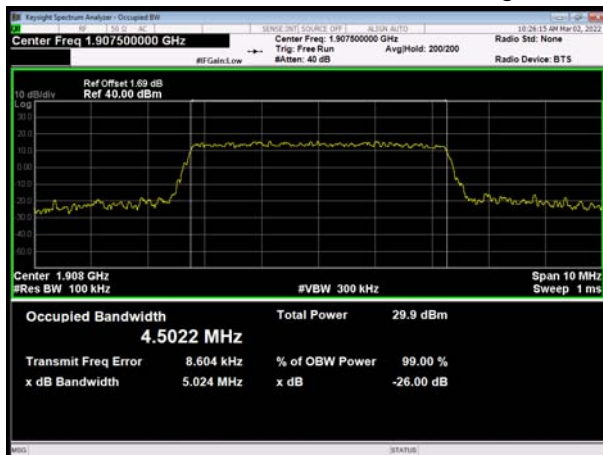


LTE Band 2 10MHz 16QAM CH-High

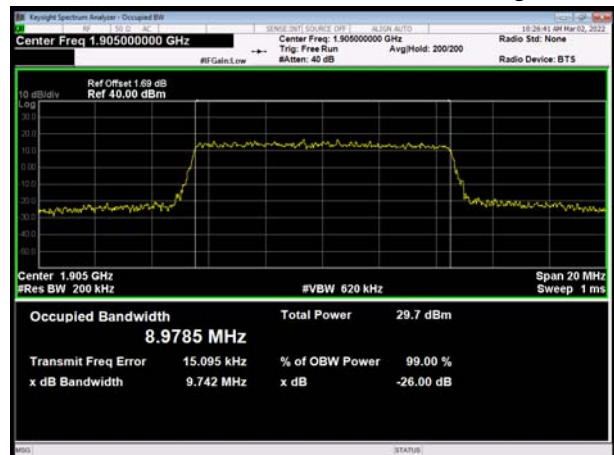


LTE Band 2 15MHz 16QAM CH-Low

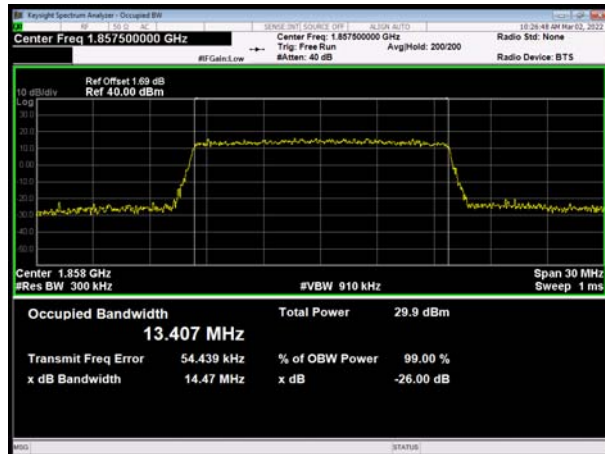


LTE Band 2 20MHz 16QAM CH-Low

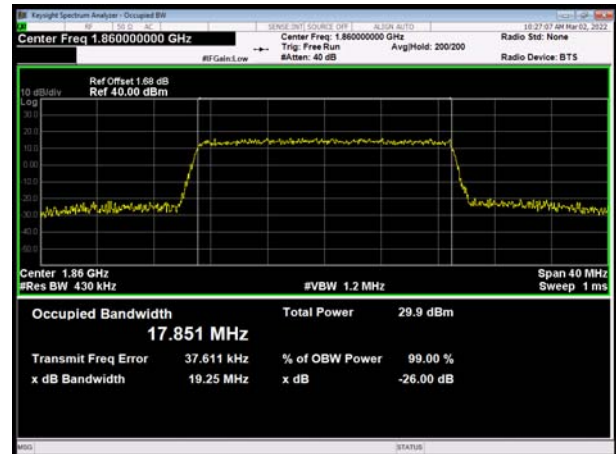


LTE Band 2 15MHz 16QAM CH-Middle

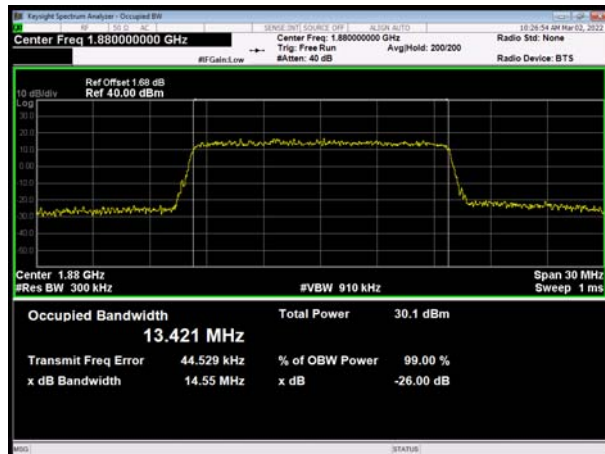


LTE Band 2 20MHz 16QAM CH-Middle

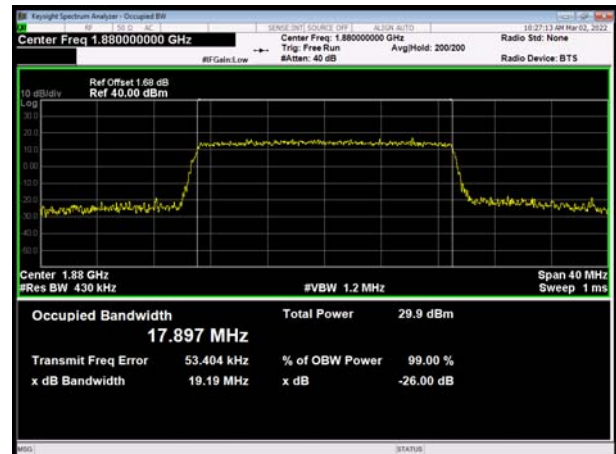

LTE Band 2 15MHz 16QAM CH-High

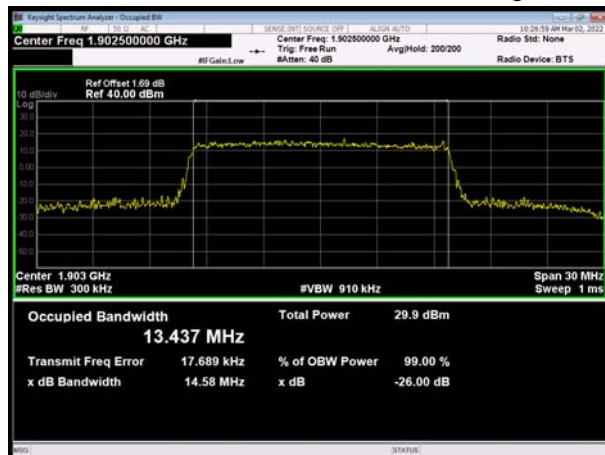


LTE Band 2 20MHz 16QAM CH-High

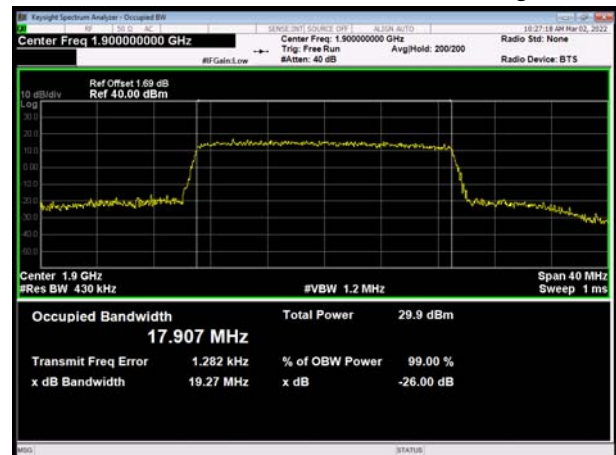





LTE Band 2 1.4MHz 64QAM CH-Low

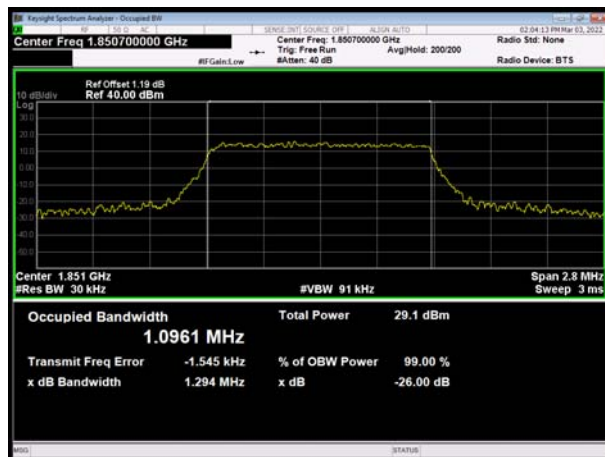


LTE Band 2 3MHz 64QAM CH-Low

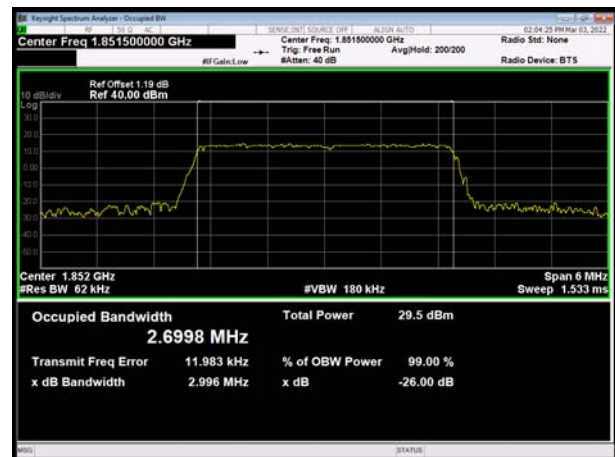


LTE Band 2 1.4MHz 64QAM CH-Middle

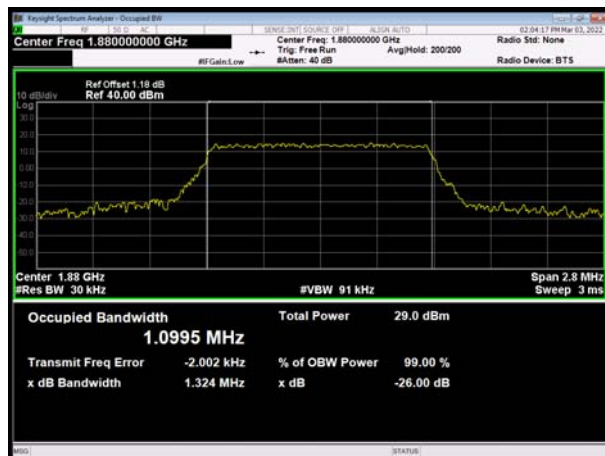


LTE Band 2 3MHz 64QAM CH-Middle

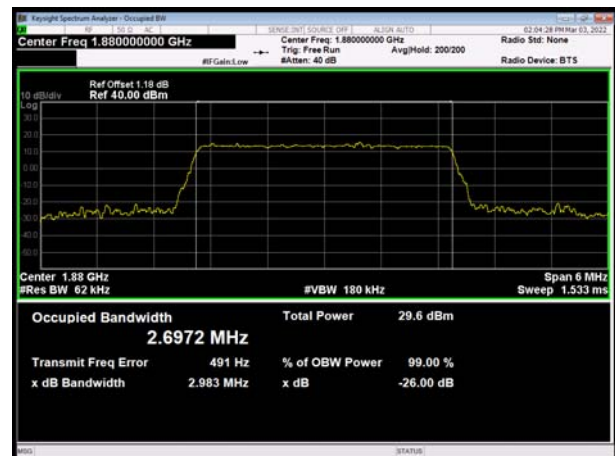

LTE Band 2 1.4MHz 64QAM CH-High

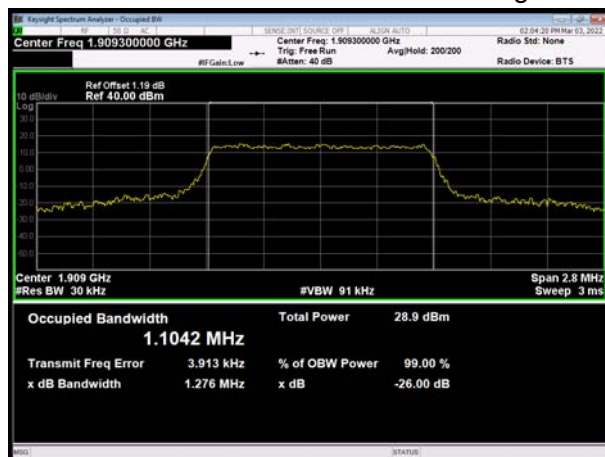


LTE Band 2 3MHz 64QAM CH-High

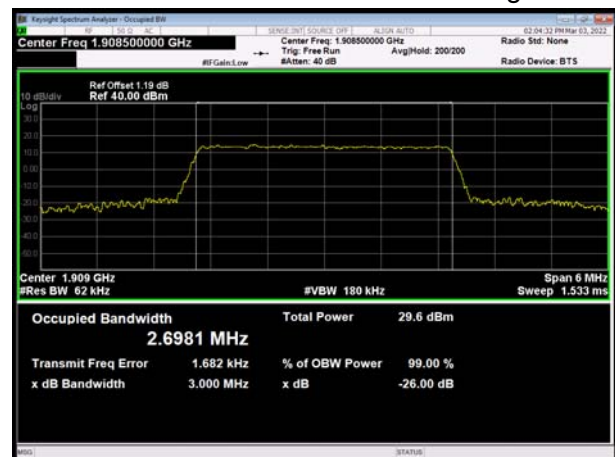





LTE Band 2 5MHz 64QAM CH-Low

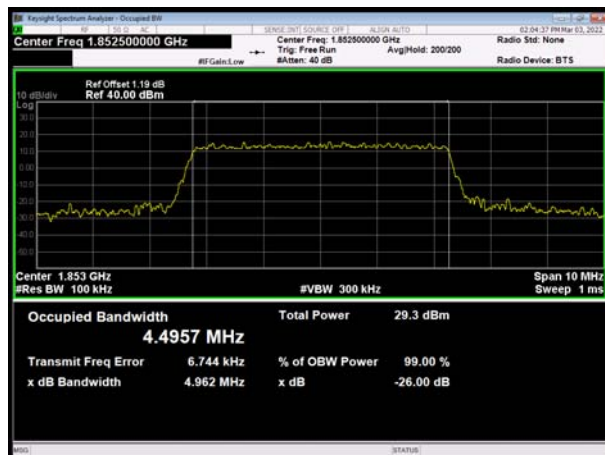

LTE Band 2 10MHz 64QAM CH-Low

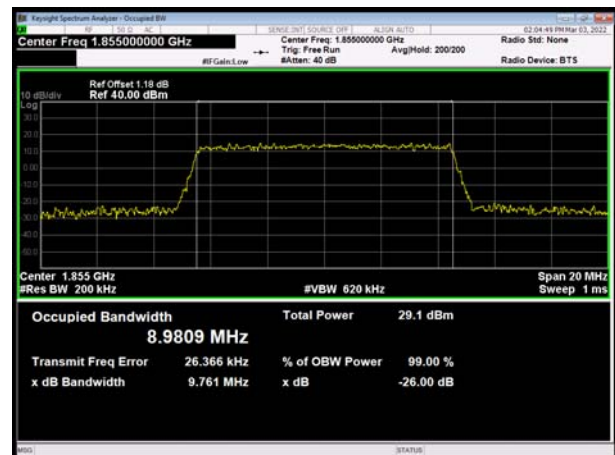


LTE Band 2 5MHz 64QAM CH-Middle

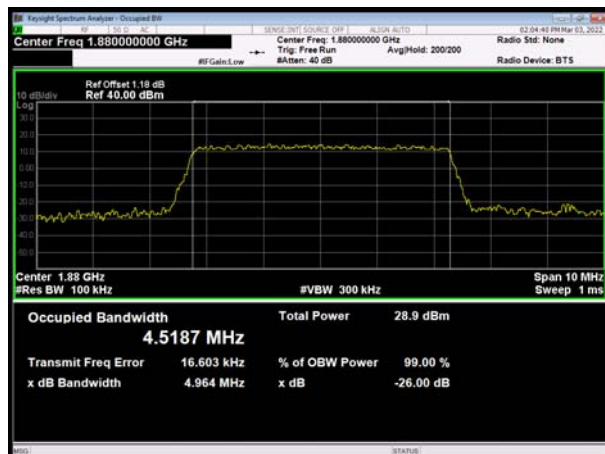


LTE Band 2 10MHz 64QAM CH-Middle




LTE Band 2 5MHz 64QAM CH-High

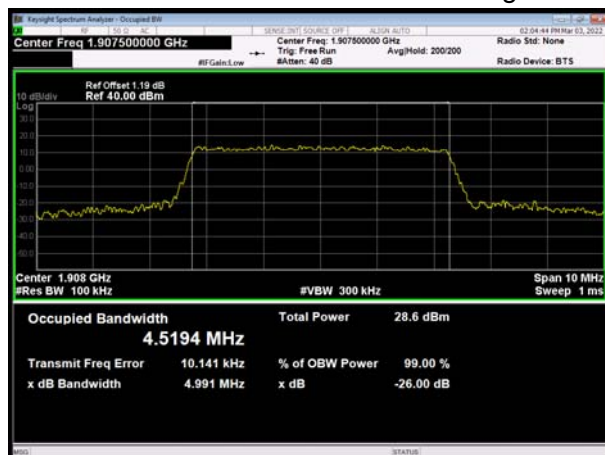


LTE Band 2 10MHz 64QAM CH-High

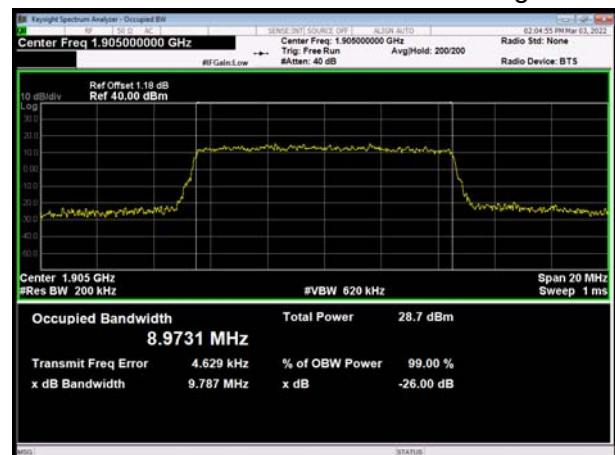


LTE Band 2 15MHz 64QAM CH-Low

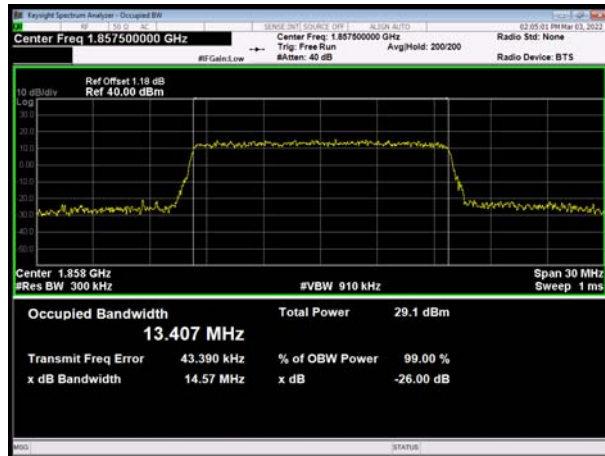


LTE Band 2 20MHz 64QAM CH-Low

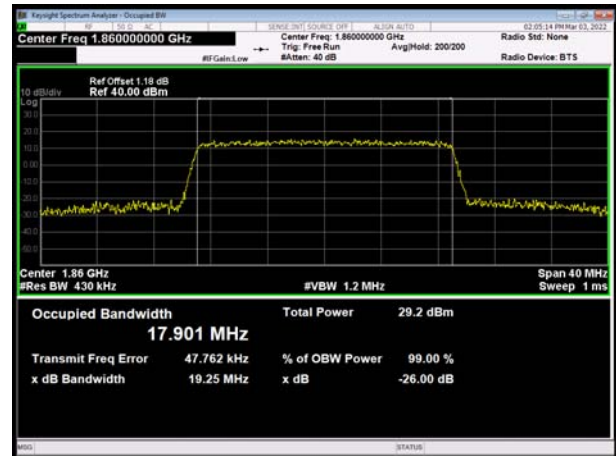


LTE Band 2 15MHz 64QAM CH-Middle

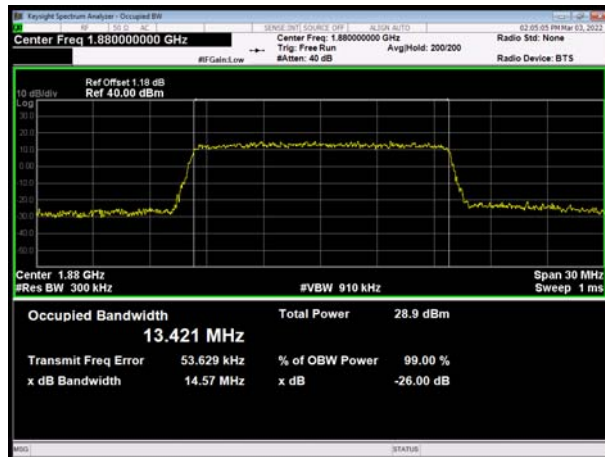


LTE Band 2 20MHz 64QAM CH-Middle

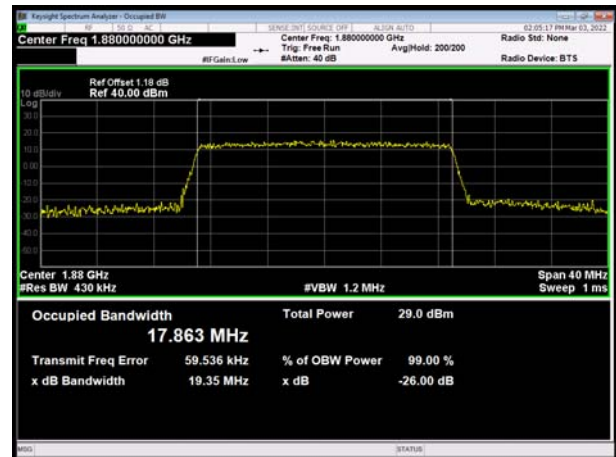

LTE Band 2 15MHz 64QAM CH-High

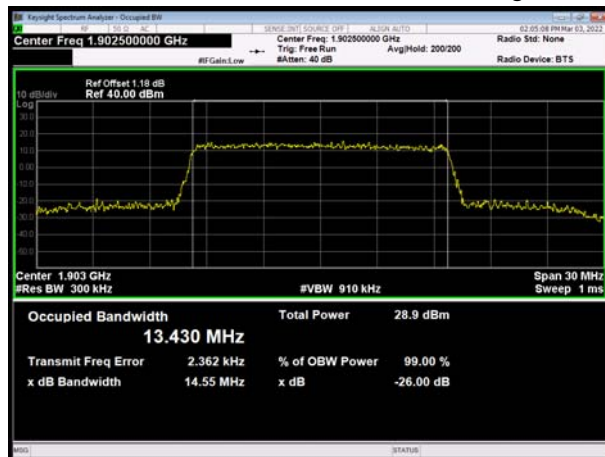

LTE Band 2 20MHz 64QAM CH-High

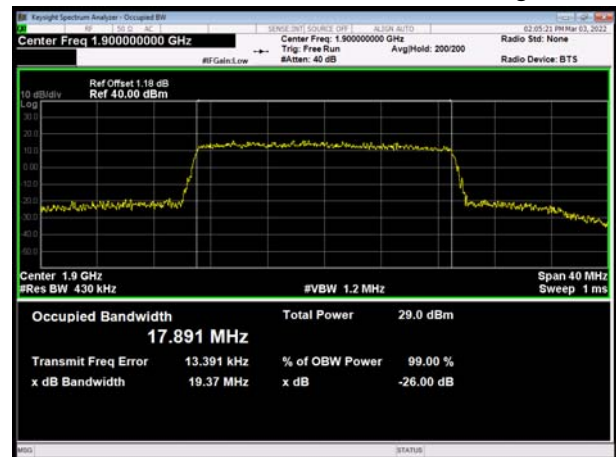

6.3. Band Edge Compliance

GSM1900 GSM CH-Low



GSM 1900 GSM CH-High




GSM1900 GPRS CH-Low




GSM 1900 GPRS CH-High



GSM1900 EGPRS CH-Low

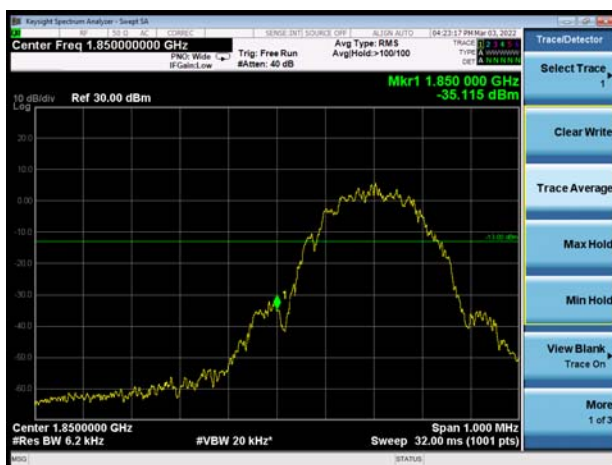

GSM 1900 EGPRS CH-High

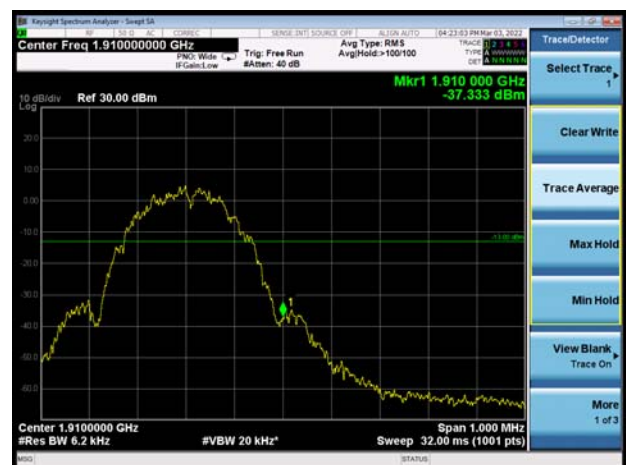



WCDMA Band II RMC CH-Low




WCDMA Band II RMC CH-High






LTE Band 2 1.4MHz QPSK 1RB CH-Low

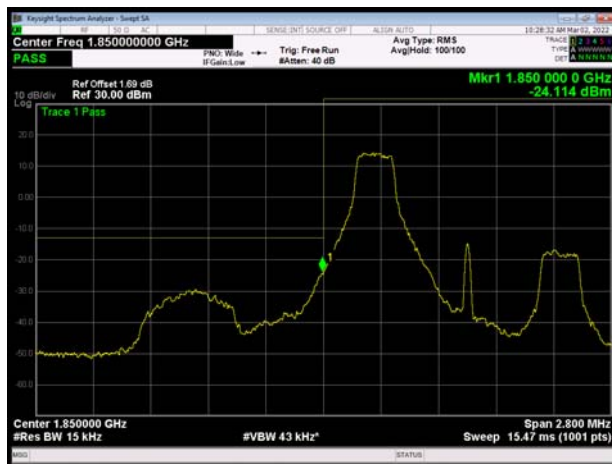

LTE Band 2 1.4MHz QPSK 1RB CH-High




LTE Band 2 1.4MHz QPSK 100%RB CH-Low

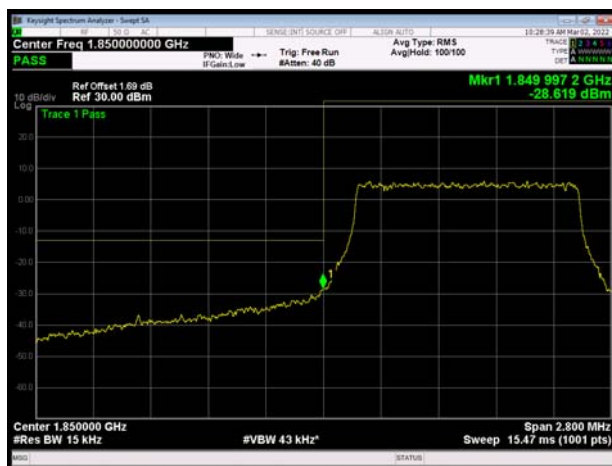


LTE Band 2 1.4MHz QPSK 100%RB CH-High



LTE Band 2 3MHz QPSK 1RB CH-Low

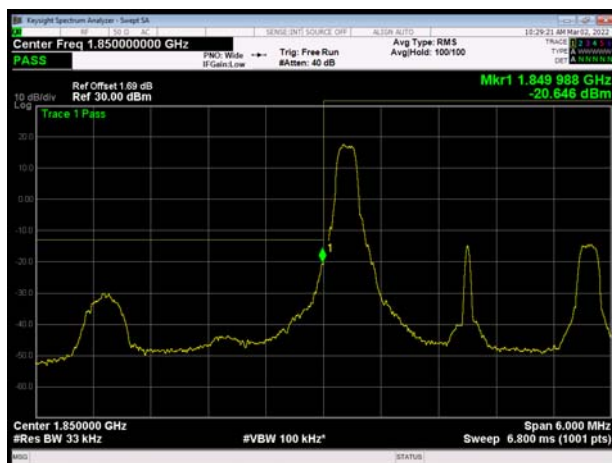

LTE Band 2 3MHz QPSK 1RB CH-High

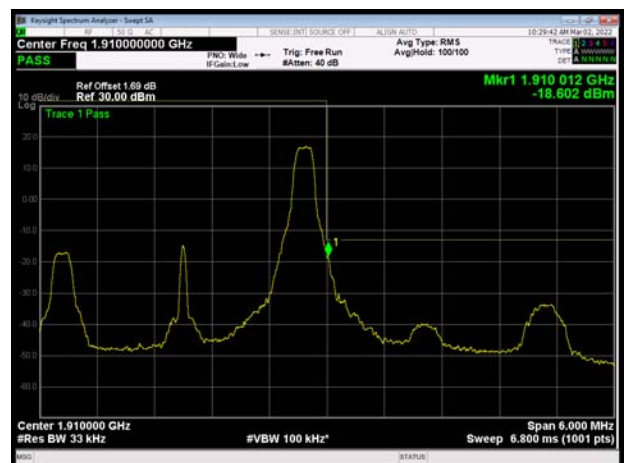




LTE Band 2 3MHz QPSK 100%RB CH-Low




LTE Band 2 3MHz QPSK 100%RB CH-High




LTE Band 2 5MHz QPSK 1RB CH-Low

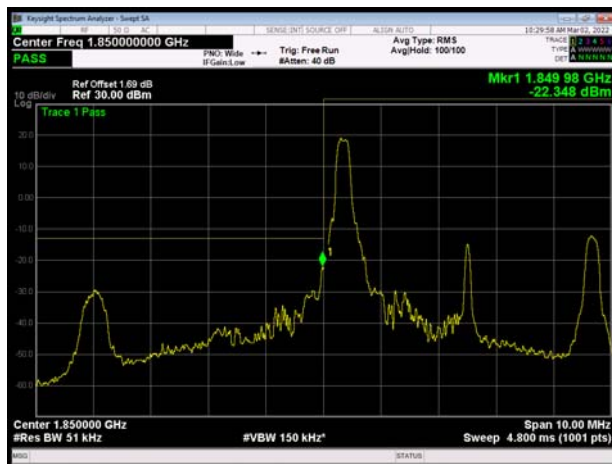


LTE Band 2 5MHz QPSK 1RB CH-High

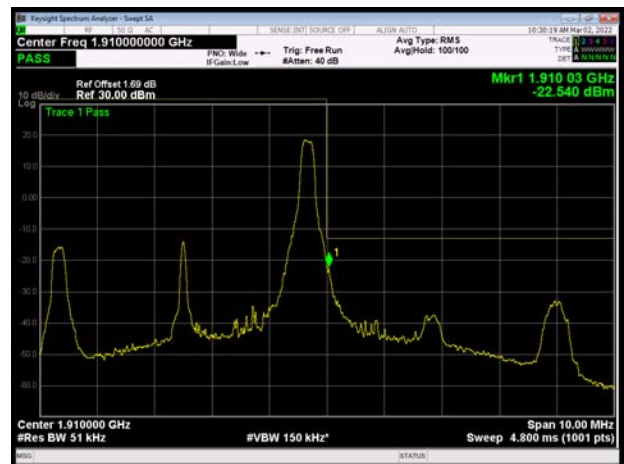

LTE Band 2 5MHz QPSK 100%RB CH-Low

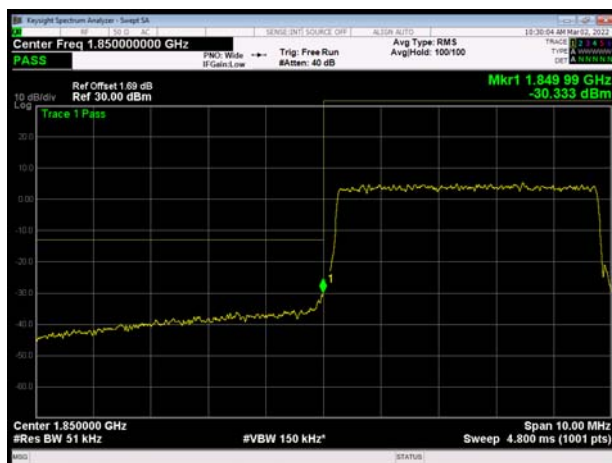


LTE Band 2 5MHz QPSK 100%RB CH-High

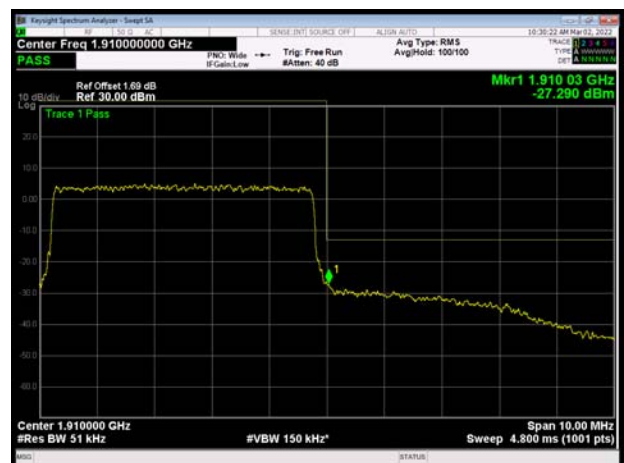





LTE Band 2 10MHz QPSK 1RB CH-Low

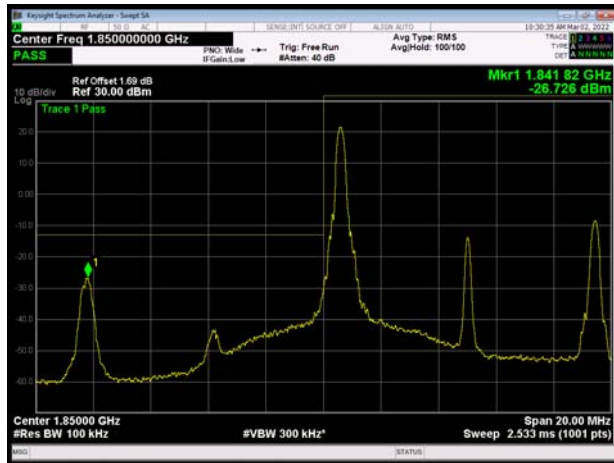

LTE Band 2 10MHz QPSK 1RB CH-High

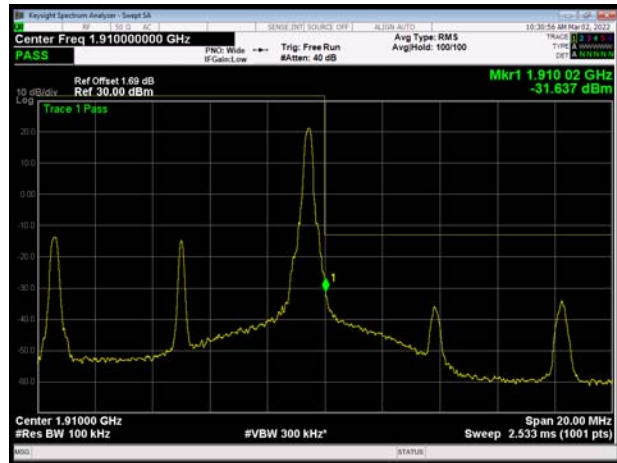


LTE Band 2 10MHz QPSK 100%RB CH-Low

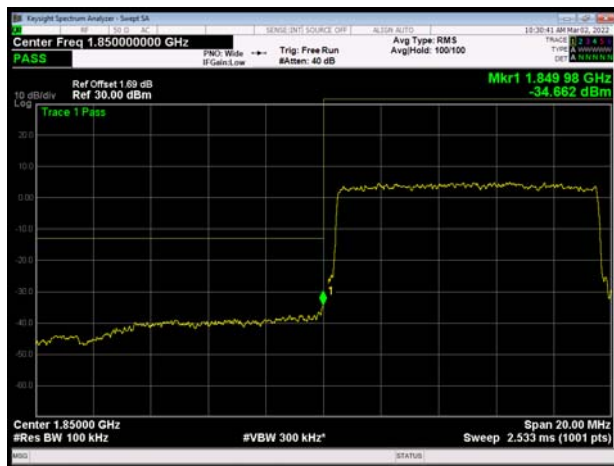


LTE Band 2 10MHz QPSK 100%RB CH-High



LTE Band 2 15MHz QPSK 1RB CH-Low

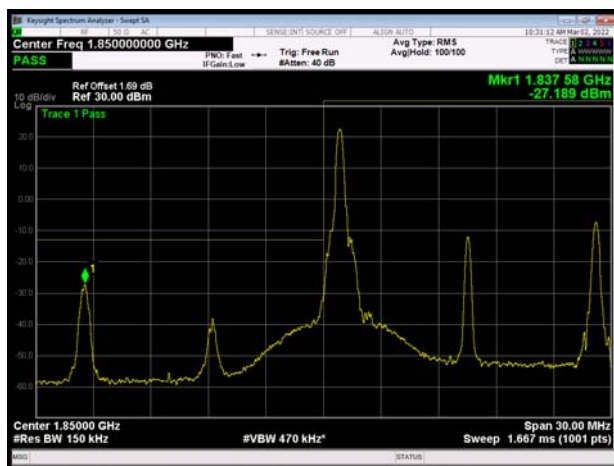


LTE Band 2 15MHz QPSK 1RB CH-High

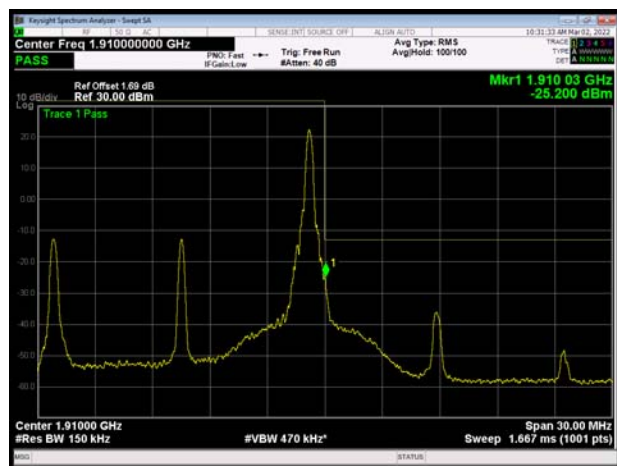




LTE Band 2 15MHz QPSK 100%RB CH-Low

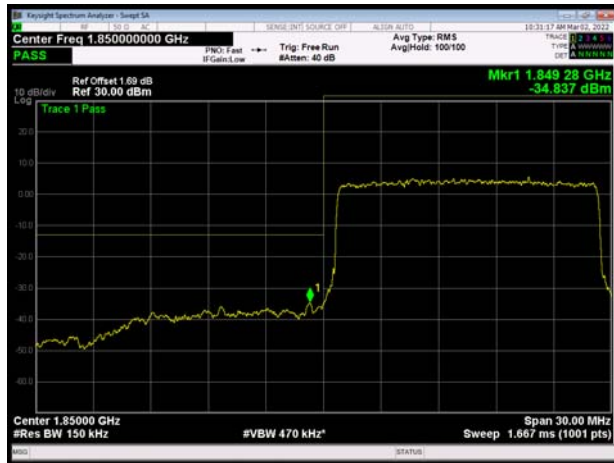


LTE Band 2 15MHz QPSK 100%RB CH-High




LTE Band 2 20MHz QPSK 1RB CH-Low

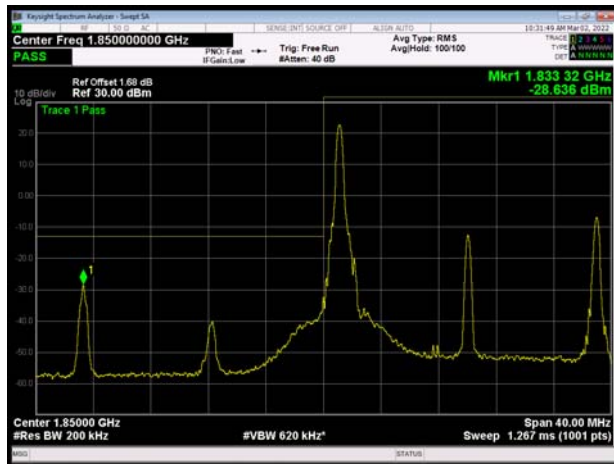

LTE Band 2 20MHz QPSK 1RB CH-High

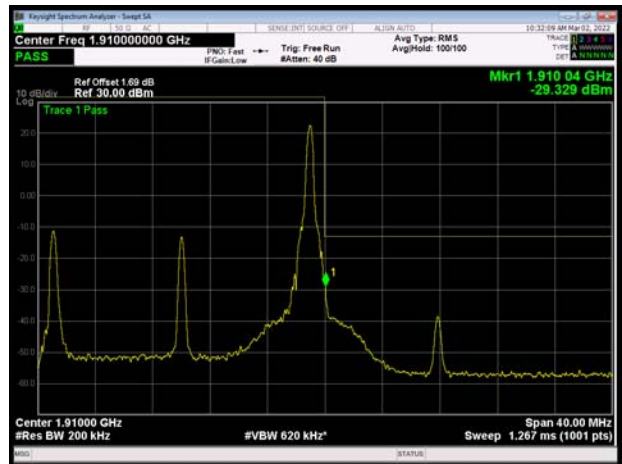

LTE Band 2 20MHz QPSK 100%RB CH-Low

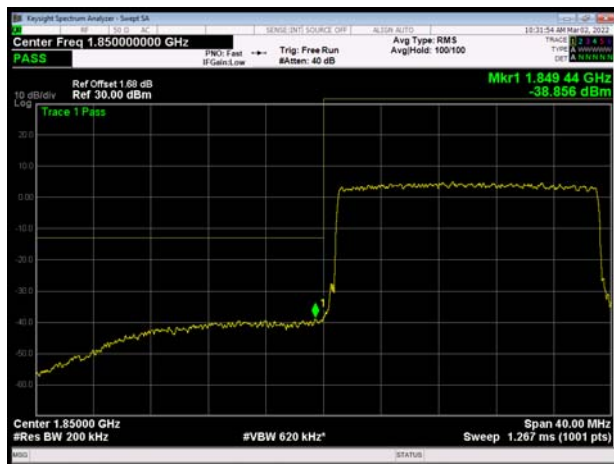


LTE Band 2 20MHz QPSK 100%RB CH-High





LTE Band 2 1.4MHz 16QAM 1RB CH-Low

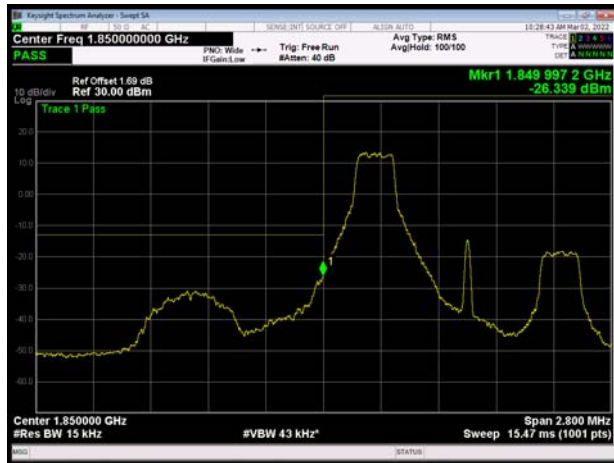

LTE Band 2 1.4MHz 16QAM 1RB CH-High




LTE Band 2 1.4MHz 16QAM 100%RB CH-Low




LTE Band 2 1.4MHz 16QAM 100%RB CH-High



LTE Band 2 3MHz 16QAM 1RB CH-Low

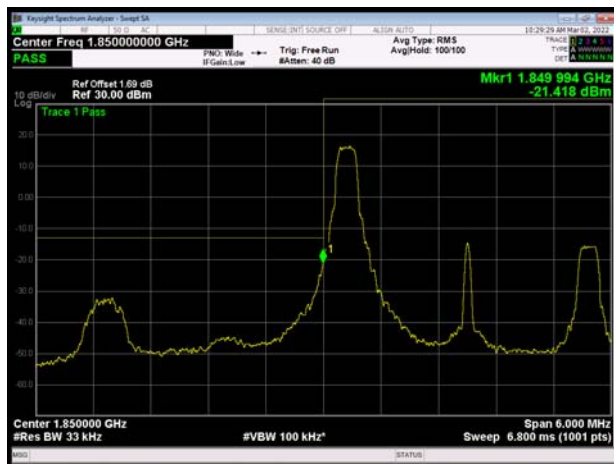


LTE Band 2 3MHz 16QAM 1RB CH-High

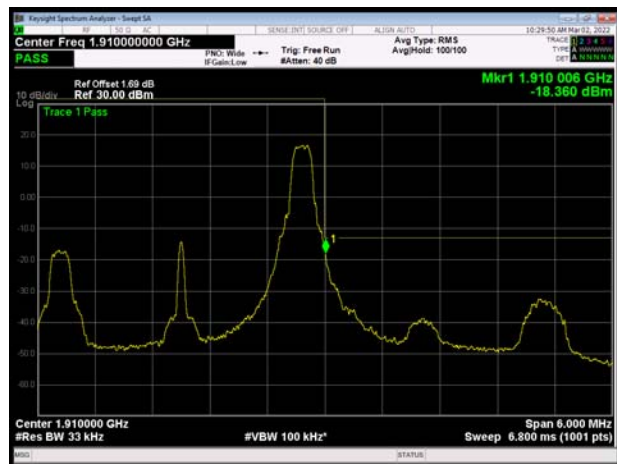




LTE Band 2 3MHz 16QAM 100%RB CH-Low

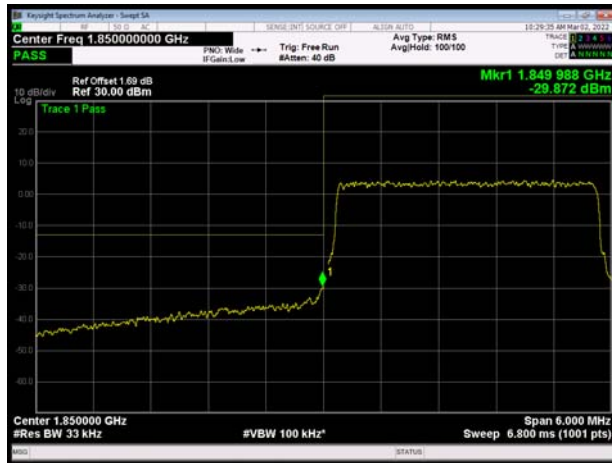


LTE Band 2 3MHz 16QAM 100%RB CH-High




LTE Band 2 5MHz 16QAM 1RB CH-Low

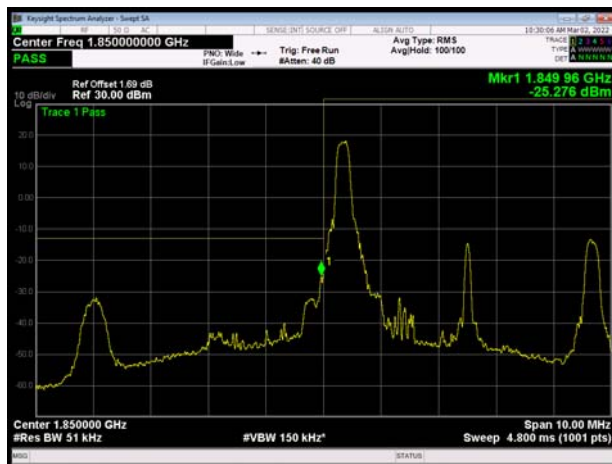


LTE Band 2 5MHz 16QAM 1RB CH-High

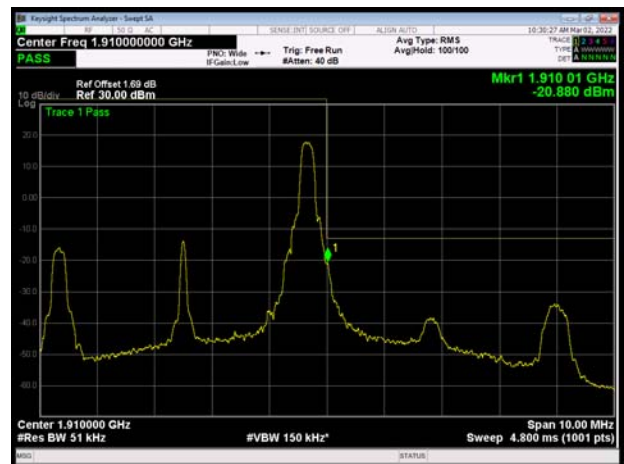

LTE Band 2 5MHz 16QAM 100%RB CH-Low

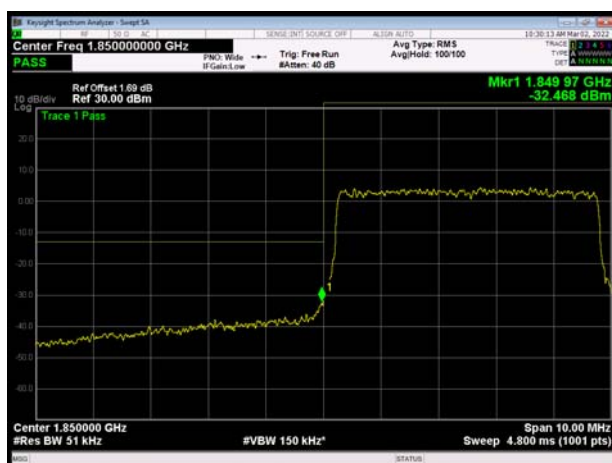


LTE Band 2 5MHz 16QAM 100%RB CH-High

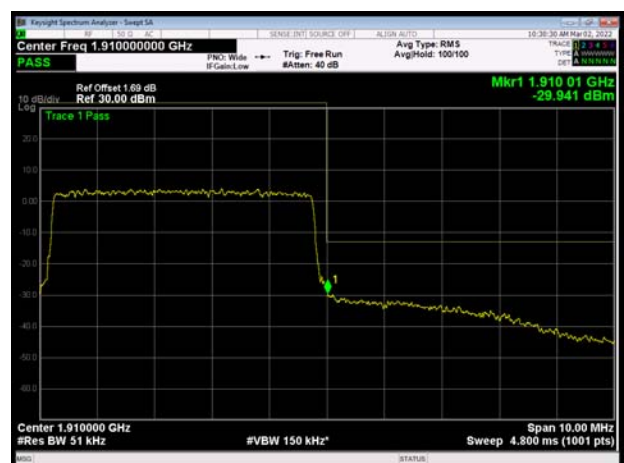





LTE Band 2 10MHz 16QAM 1RB CH-Low

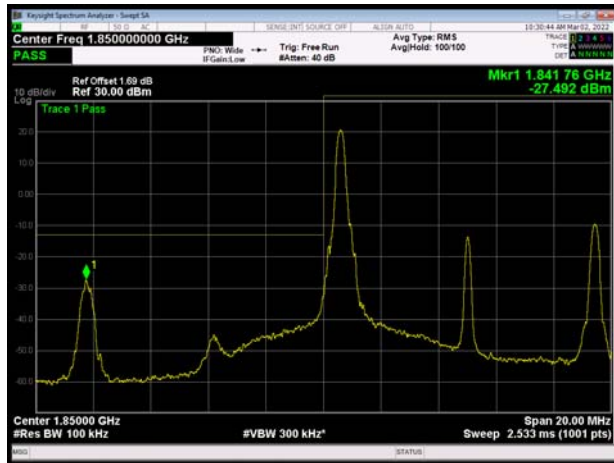

LTE Band 2 10MHz 16QAM 1RB CH-High

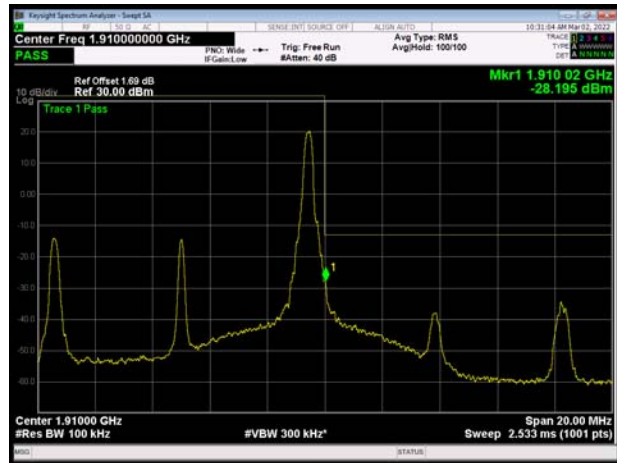


LTE Band 2 10MHz 16QAM 100%RB CH-Low

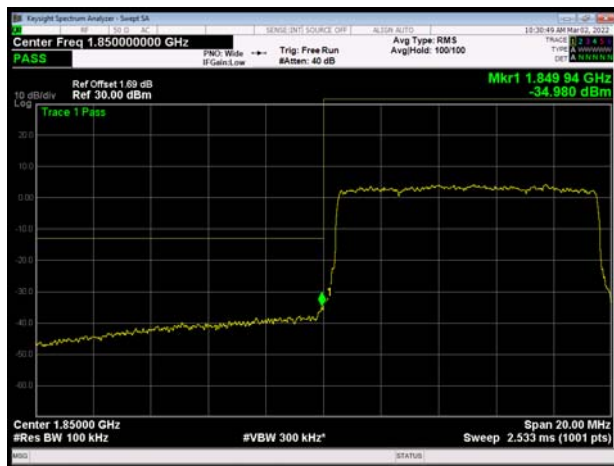


LTE Band 2 10MHz 16QAM 100%RB CH-High



LTE Band 2 15MHz 16QAM 1RB CH-Low

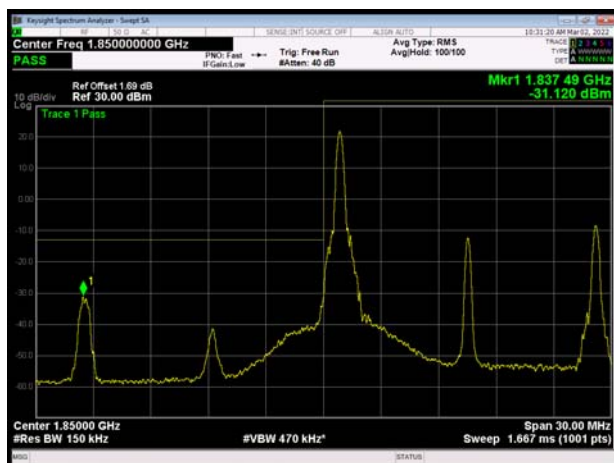


LTE Band 2 15MHz 16QAM 1RB CH-High

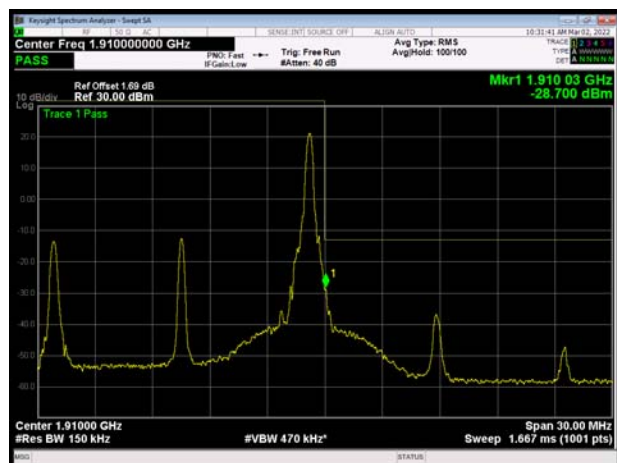




LTE Band 2 15MHz 16QAM 100%RB CH-Low

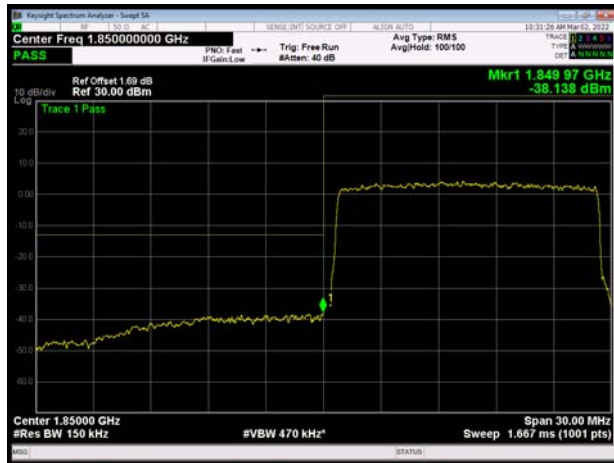


LTE Band 2 15MHz 16QAM 100%RB CH-High




LTE Band 2 20MHz 16QAM 1RB CH-Low

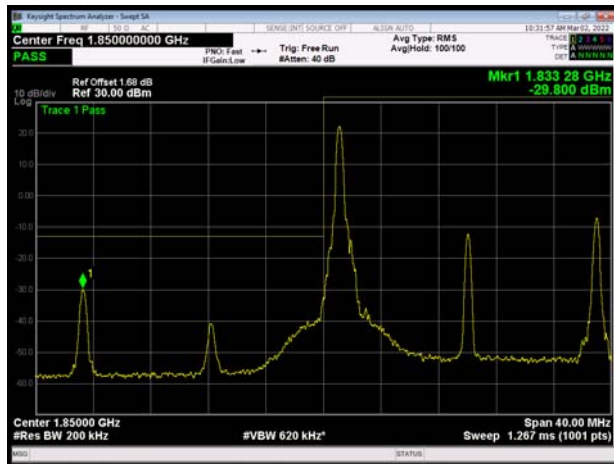

LTE Band 2 20MHz 16QAM 1RB CH-High

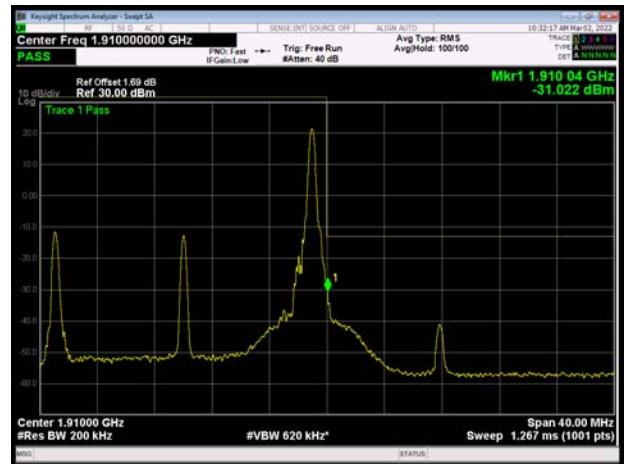

LTE Band 2 20MHz 16QAM 100%RB CH-Low

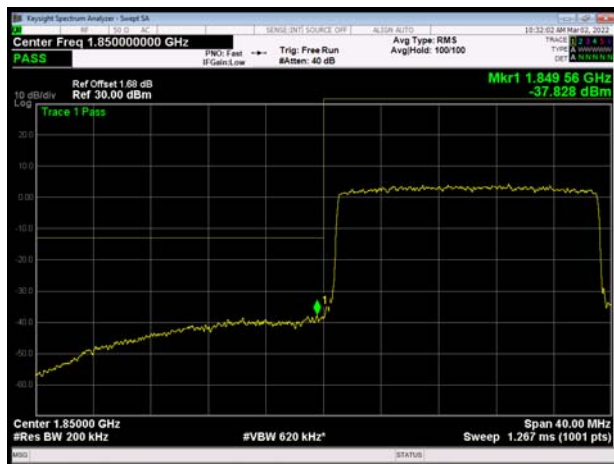


LTE Band 2 20MHz 16QAM 100%RB CH-High





LTE Band 2 1.4MHz 64QAM 1RB CH-Low

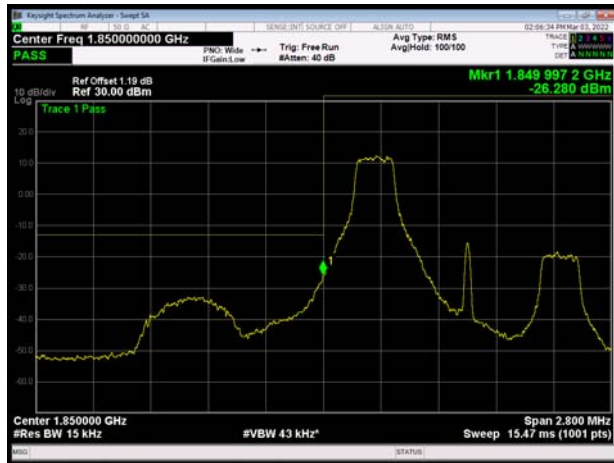

LTE Band 2 1.4MHz 64QAM 1RB CH-High




LTE Band 2 1.4MHz 64QAM 100%RB CH-Low




LTE Band 2 1.4MHz 64QAM 100%RB CH-High



LTE Band 2 3MHz 64QAM 1RB CH-Low

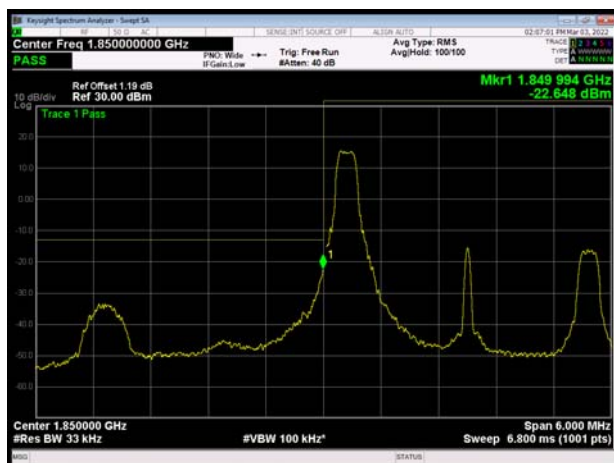


LTE Band 2 3MHz 64QAM 1RB CH-High

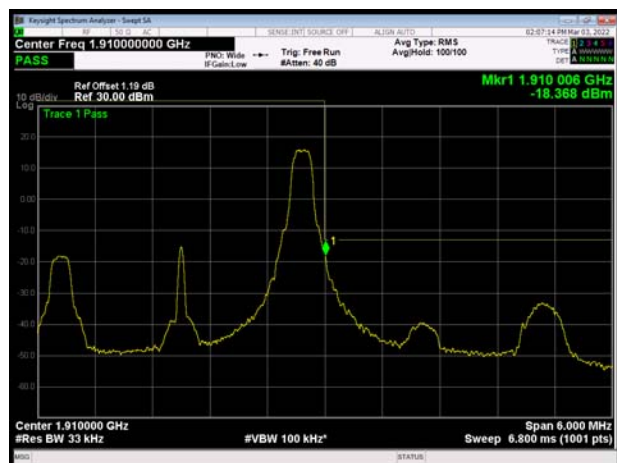




LTE Band 2 3MHz 64QAM 100%RB CH-Low

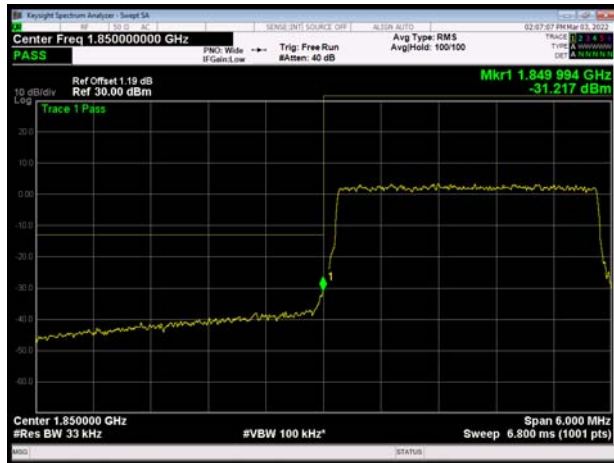


LTE Band 2 3MHz 64QAM 100%RB CH-High




LTE Band 2 5MHz 64QAM 1RB CH-Low

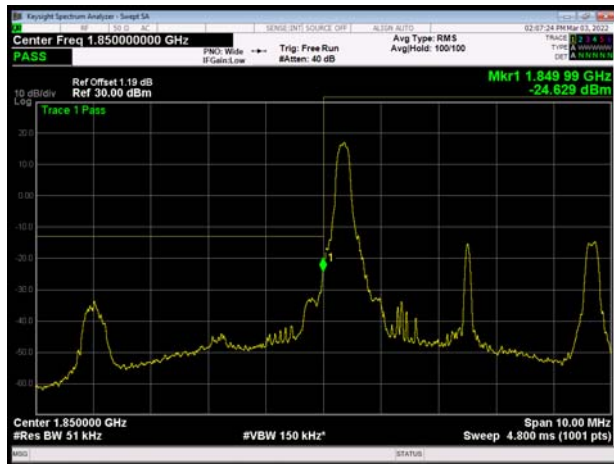

LTE Band 2 5MHz 64QAM 1RB CH-High

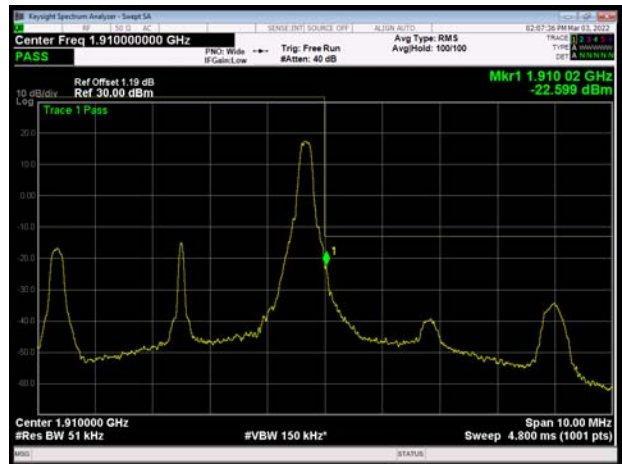

LTE Band 2 5MHz 64QAM 100%RB CH-Low

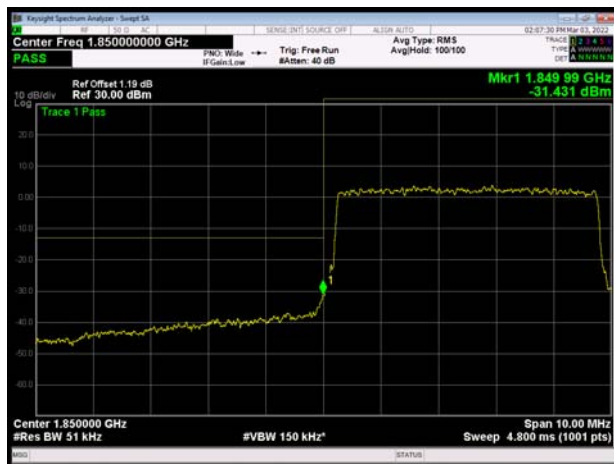


LTE Band 2 5MHz 64QAM 100%RB CH-High







LTE Band 2 10MHz 64QAM 1RB CH-Low

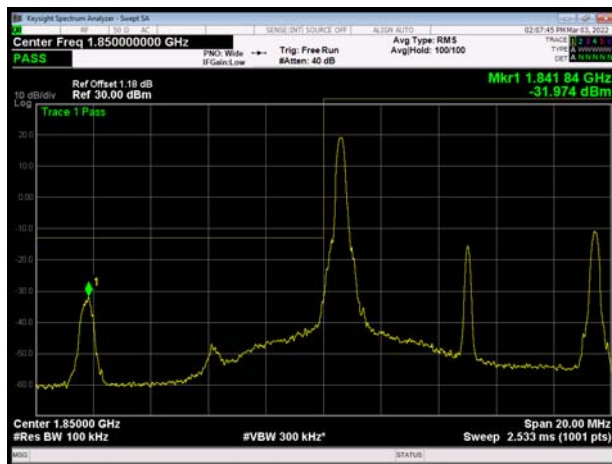

LTE Band 2 10MHz 64QAM 1RB CH-High

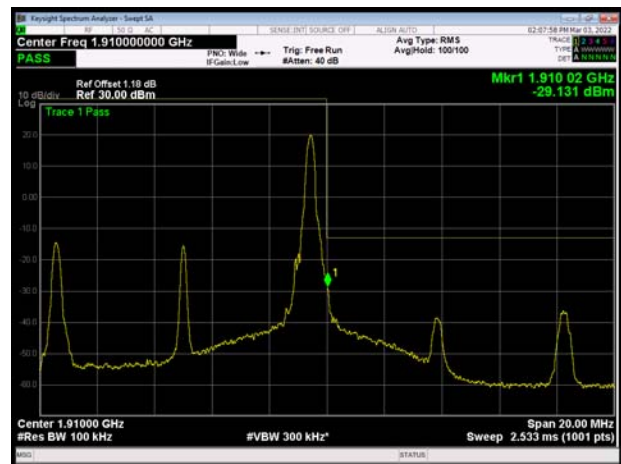


LTE Band 2 10MHz 64QAM 100%RB CH-Low

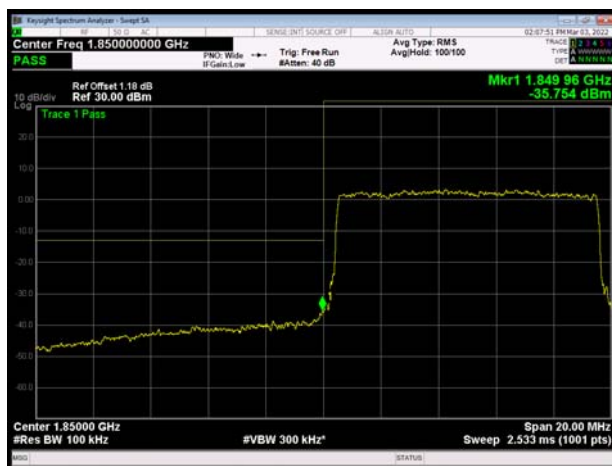


LTE Band 2 10MHz 64QAM 100%RB CH-High



LTE Band 2 15MHz 64QAM 1RB CH-Low

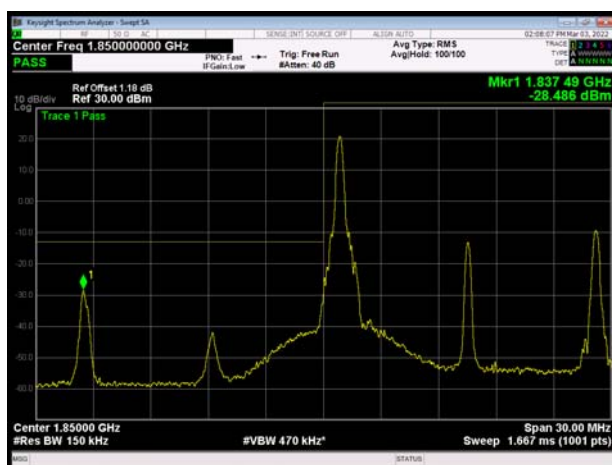


LTE Band 2 15MHz 64QAM 1RB CH-High

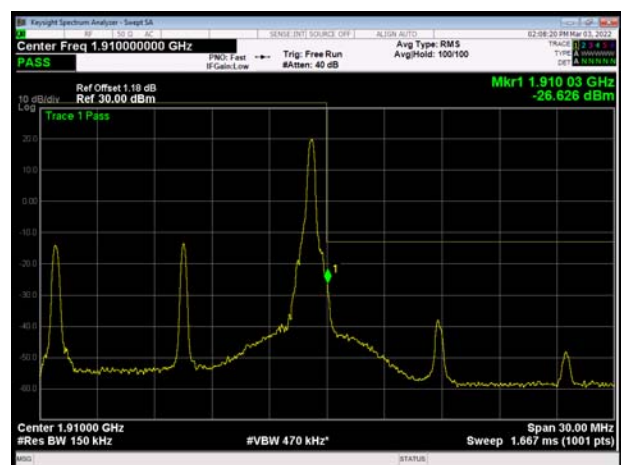




LTE Band 2 15MHz 64QAM 100%RB CH-Low

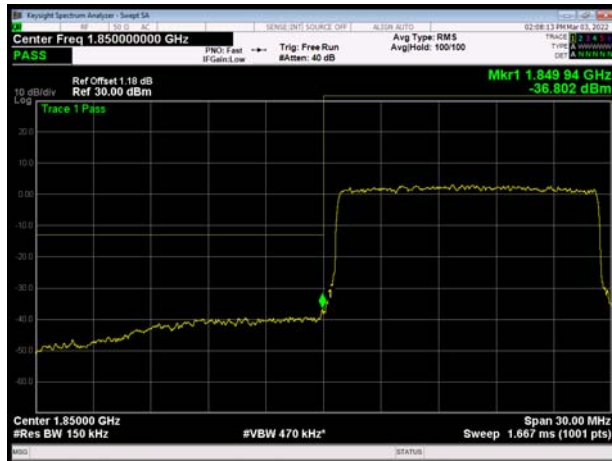


LTE Band 2 15MHz 64QAM 100%RB CH-High




LTE Band 2 20MHz 64QAM 1RB CH-Low

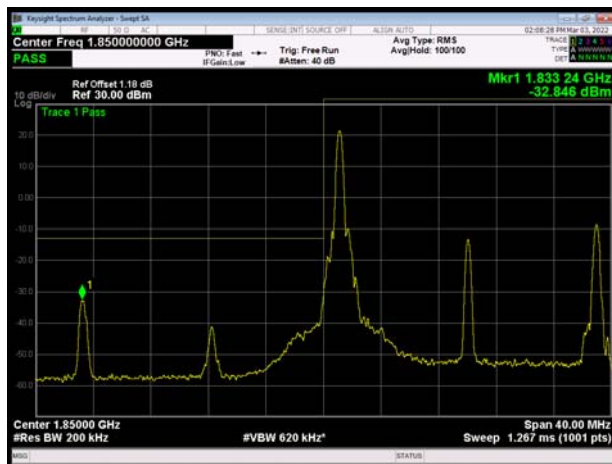


LTE Band 2 20MHz 64QAM 1RB CH-High

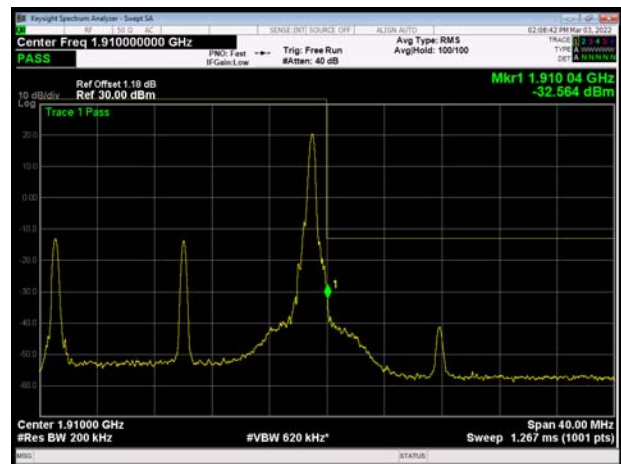

LTE Band 2 20MHz 64QAM 100%RB CH-Low

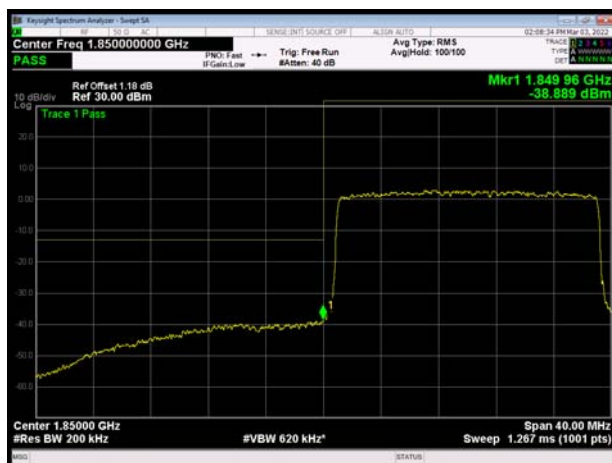

LTE Band 2 20MHz 64QAM 100%RB CH-High

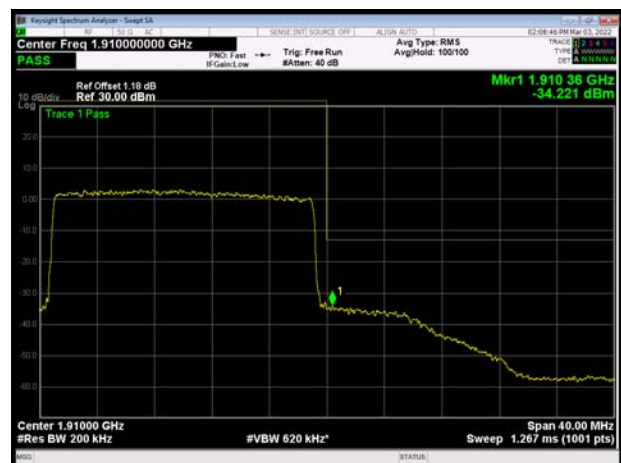

6.4. Peak-to-Average Power Ratio (PAPR)

Mode	Channel	Frequency (MHz)	Peak(dBm)	Avg(dBm)	PAPR(dB)	Limit(dB)	Conclusion
GSM 1900 (GMSK)	512	1850.2	29.33	26.65	2.68	≤13	PASS
	661	1880	29.07	26.39	2.68	≤13	PASS
	810	1909.8	28.97	26.29	2.68	≤13	PASS
GPRS 1900 (GMSK)	512	1850.2	29.33	26.65	2.68	≤13	PASS
	661	1880	29.10	26.42	2.68	≤13	PASS
	810	1909.8	29.00	26.32	2.68	≤13	PASS
EGPRS 1900 (8PSK)	512	1850.2	28.75	23.01	5.74	≤13	PASS
	661	1880	28.52	22.79	5.73	≤13	PASS
	810	1909.8	28.48	22.72	5.76	≤13	PASS
WCDMA Band II (RMC)	9262	1852.4	25.66	22.98	2.68	≤13	PASS
	9400	1880	25.55	22.75	2.80	≤13	PASS
	9538	1907.6	25.36	22.84	2.52	≤13	PASS

LTE Band 2								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	18607	1850.7	27.84	23.01	4.83	≤13	PASS
		18900	1880.0	27.91	22.80	5.11	≤13	PASS
		19193	1909.3	26.90	22.71	4.19	≤13	PASS
	3	18615	1851.5	27.93	23.11	4.82	≤13	PASS
		18900	1880	27.97	22.82	5.15	≤13	PASS
		19185	1908.5	27.21	22.77	4.44	≤13	PASS
	5	18625	1852.5	27.94	23.04	4.90	≤13	PASS
		18900	1880	28.03	22.88	5.15	≤13	PASS
		19175	1907.5	27.44	22.78	4.66	≤13	PASS
	10	18650	1855	27.93	22.95	4.98	≤13	PASS
		18900	1880	28.02	22.88	5.14	≤13	PASS
		19150	1905	27.67	22.89	4.78	≤13	PASS
	15	18675	1857.5	28.35	23.02	5.33	≤13	PASS
		18900	1880	28.33	22.87	5.46	≤13	PASS
		19125	1902.5	27.98	22.85	5.13	≤13	PASS
	20	18700	1860	28.14	22.96	5.18	≤13	PASS
		18900	1880	28.15	22.91	5.24	≤13	PASS
		19100	1900	27.94	22.87	5.07	≤13	PASS



16QAM	1.4	18607	1850.7	27.57	21.78	5.79	≤13	PASS
		18900	1880.0	27.71	21.83	5.88	≤13	PASS
		19193	1909.3	26.99	21.84	5.15	≤13	PASS
	3	18615	1851.5	27.71	21.82	5.89	≤13	PASS
		18900	1880	27.81	21.82	5.99	≤13	PASS
		19185	1908.5	27.24	21.88	5.36	≤13	PASS
	5	18625	1852.5	27.71	22.00	5.71	≤13	PASS
		18900	1880	27.79	21.79	6.00	≤13	PASS
		19175	1907.5	27.32	21.69	5.63	≤13	PASS
	10	18650	1855	27.68	21.80	5.88	≤13	PASS
		18900	1880	27.89	21.88	6.01	≤13	PASS
		19150	1905	27.55	21.83	5.72	≤13	PASS
	15	18675	1857.5	27.92	21.90	6.02	≤13	PASS
		18900	1880	28.00	21.95	6.05	≤13	PASS
		19125	1902.5	27.71	21.94	5.77	≤13	PASS
	20	18700	1860	27.98	21.92	6.06	≤13	PASS
		18900	1880	27.96	21.88	6.08	≤13	PASS
		19100	1900	27.73	21.87	5.86	≤13	PASS
64QAM	1.4	18607	1850.7	26.78	21.01	5.77	≤13	PASS
		18900	1880.0	26.89	20.98	5.91	≤13	PASS
		19193	1909.3	26.05	20.91	5.14	≤13	PASS
	3	18615	1851.5	27.03	21.43	5.60	≤13	PASS
		18900	1880	26.95	20.91	6.04	≤13	PASS
		19185	1908.5	26.30	20.95	5.35	≤13	PASS
	5	18625	1852.5	26.87	21.14	5.73	≤13	PASS
		18900	1880	26.95	20.90	6.05	≤13	PASS
		19175	1907.5	26.40	20.74	5.66	≤13	PASS
	10	18650	1855	26.90	21.06	5.84	≤13	PASS
		18900	1880	27.01	21.02	5.99	≤13	PASS
		19150	1905	26.57	20.85	5.72	≤13	PASS
	15	18675	1857.5	27.03	21.06	5.97	≤13	PASS
		18900	1880	27.15	21.11	6.04	≤13	PASS
		19125	1902.5	26.70	20.95	5.75	≤13	PASS
	20	18700	1860	27.16	21.19	5.97	≤13	PASS
		18900	1880	27.11	21.04	6.07	≤13	PASS
		19100	1900	26.76	20.95	5.81	≤13	PASS

6.5. Frequency Stability

GSM1900						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	GMSK	8PSK	GMSK	8PSK	
Normal (25℃)	Normal	1.15	16.65	0.00061	0.00885	PASS
Extreme (50℃)		12.11	1.51	0.00644	0.00080	PASS
Extreme (40℃)		12.36	2.86	0.00657	0.00152	PASS
Extreme (30℃)		2.18	8.00	0.00116	0.00426	PASS
Extreme (20℃)		2.73	12.10	0.00145	0.00643	PASS
Extreme (10℃)		15.19	7.40	0.00808	0.00394	PASS
Extreme (0℃)		2.74	11.26	0.00146	0.00599	PASS
Extreme (-10℃)		11.89	17.90	0.00633	0.00952	PASS
Extreme (-20℃)		15.07	5.57	0.00802	0.00296	PASS
Extreme (-30℃)		10.88	7.65	0.00579	0.00407	PASS
25℃	LV	13.29	8.03	0.00707	0.00427	PASS
	HV	13.42	15.86	0.00714	0.00844	PASS

WCDMA Band II						
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
Temperature	Voltage	QPSK	BPSK	QPSK	BPSK	
Normal (25℃)	Normal	14.41	6.74	0.00766	0.00358	PASS
Extreme (50℃)		16.52	13.14	0.00879	0.00699	PASS
Extreme (40℃)		9.77	16.11	0.00520	0.00857	PASS
Extreme (30℃)		10.14	3.78	0.00540	0.00201	PASS
Extreme (20℃)		7.25	16.60	0.00385	0.00883	PASS
Extreme (10℃)		3.88	12.66	0.00207	0.00673	PASS
Extreme (0℃)		6.01	14.67	0.00320	0.00780	PASS
Extreme (-10℃)		3.98	3.18	0.00212	0.00169	PASS
Extreme (-20℃)		10.65	8.65	0.00566	0.00460	PASS
Extreme (-30℃)		1.10	16.70	0.00059	0.00888	PASS
25℃	LV	15.75	15.99	0.00838	0.00851	PASS
	HV	2.83	7.33	0.00150	0.00390	PASS



LTE Band 2								
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	1.4MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	PASS
Normal (25℃)	Normal	11.19	17.61	12.75	0.00595	0.00937	0.00678	
Extreme (50℃)		12.69	13.01	6.50	0.00675	0.00692	0.00345	
Extreme (40℃)		9.39	5.43	9.67	0.00499	0.00289	0.00514	
Extreme (30℃)		11.00	4.53	12.87	0.00585	0.00241	0.00685	
Extreme (20℃)		6.75	12.01	8.82	0.00359	0.00639	0.00469	
Extreme (10℃)		16.78	15.77	11.20	0.00892	0.00839	0.00596	
Extreme (0℃)		5.09	14.46	5.87	0.00271	0.00769	0.00312	
Extreme (-10℃)		11.84	11.01	10.48	0.00630	0.00586	0.00557	
Extreme (-20℃)		3.57	15.84	16.60	0.00190	0.00843	0.00883	
Extreme (-30℃)		9.03	13.21	5.89	0.00480	0.00703	0.00313	
25℃	LV	1.81	11.31	10.46	0.00096	0.00602	0.00557	PASS
	HV	4.90	3.37	4.14	0.00261	0.00179	0.00220	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	3MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	PASS
Normal (25℃)	Normal	13.79	14.21	2.61	0.00733	0.00756	0.00139	
Extreme (50℃)		10.94	7.87	15.04	0.00582	0.00418	0.00800	
Extreme (40℃)		14.14	2.48	17.51	0.00752	0.00132	0.00931	
Extreme (30℃)		15.50	10.04	4.61	0.00824	0.00534	0.00245	
Extreme (20℃)		15.19	2.16	10.21	0.00808	0.00115	0.00543	
Extreme (10℃)		1.95	17.18	15.89	0.00104	0.00914	0.00845	
Extreme (0℃)		10.80	14.02	11.13	0.00574	0.00746	0.00592	
Extreme (-10℃)		7.90	14.00	6.64	0.00420	0.00745	0.00353	
Extreme (-20℃)		14.81	8.48	14.06	0.00788	0.00451	0.00748	
Extreme (-30℃)		13.35	14.97	9.37	0.00710	0.00797	0.00499	
25℃	LV	16.13	10.61	2.78	0.00858	0.00565	0.00148	PASS
	HV	6.12	4.19	2.38	0.00326	0.00223	0.00127	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	5MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	PASS
Normal (25℃)	Normal	7.08	8.78	9.98	0.00376	0.00467	0.00531	
Extreme (50℃)		8.66	10.12	2.69	0.00460	0.00538	0.00143	



Extreme (40℃)		13.79	1.77	17.31	0.00734	0.00094	0.00921	PASS
Extreme (30℃)		7.05	2.45	14.82	0.00375	0.00130	0.00788	PASS
Extreme (20℃)		13.76	16.50	9.87	0.00732	0.00878	0.00525	PASS
Extreme (10℃)		7.40	4.89	8.44	0.00393	0.00260	0.00449	PASS
Extreme (0℃)		5.11	17.25	8.89	0.00272	0.00918	0.00473	PASS
Extreme (-10℃)		3.26	17.40	4.63	0.00174	0.00926	0.00246	PASS
Extreme (-20℃)		5.82	8.04	10.50	0.00310	0.00428	0.00559	PASS
Extreme (-30℃)		10.48	2.90	11.07	0.00557	0.00154	0.00589	PASS
25℃	LV	14.78	2.32	6.86	0.00786	0.00123	0.00365	PASS
	HV	12.55	2.68	8.72	0.00667	0.00143	0.00464	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	10MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25℃)	Normal	2.22	10.89	6.09	0.00118	0.00579	0.00324	PASS
Extreme (50℃)		8.03	9.06	6.00	0.00427	0.00482	0.00319	PASS
Extreme (40℃)		5.19	10.31	7.60	0.00276	0.00548	0.00404	PASS
Extreme (30℃)		12.76	17.21	4.16	0.00679	0.00915	0.00221	PASS
Extreme (20℃)		4.74	15.72	11.38	0.00252	0.00836	0.00606	PASS
Extreme (10℃)		8.09	8.32	9.64	0.00430	0.00443	0.00513	PASS
Extreme (0℃)		16.60	6.37	5.12	0.00883	0.00339	0.00272	PASS
Extreme (-10℃)		2.48	9.65	17.17	0.00132	0.00514	0.00913	PASS
Extreme (-20℃)		11.24	4.92	12.05	0.00598	0.00262	0.00641	PASS
Extreme (-30℃)		6.92	16.97	13.30	0.00368	0.00902	0.00708	PASS
25℃	LV	4.75	6.64	6.11	0.00253	0.00353	0.00325	PASS
	HV	10.83	14.10	14.72	0.00576	0.00750	0.00783	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	15MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25℃)	Normal	7.25	11.28	14.57	0.00386	0.00600	0.00775	PASS
Extreme (50℃)		4.62	7.66	9.01	0.00246	0.00407	0.00479	PASS
Extreme (40℃)		15.78	16.52	4.62	0.00839	0.00879	0.00246	PASS
Extreme (30℃)		3.29	7.13	10.72	0.00175	0.00379	0.00570	PASS
Extreme (20℃)		11.58	14.56	13.02	0.00616	0.00775	0.00693	PASS
Extreme (10℃)		8.52	3.07	13.15	0.00453	0.00163	0.00699	PASS
Extreme (0℃)		14.60	3.01	15.29	0.00777	0.00160	0.00813	PASS
Extreme (-10℃)		9.61	5.73	2.89	0.00511	0.00305	0.00154	PASS
Extreme (-20℃)		15.39	16.11	8.06	0.00818	0.00857	0.00429	PASS
Extreme (-30℃)		1.67	16.25	1.07	0.00089	0.00865	0.00057	PASS
25℃	LV	1.75	14.77	3.37	0.00093	0.00786	0.00179	PASS




	HV	11.59	2.70	17.51	0.00616	0.00143	0.00931	PASS
Condition		Freq.Error (Hz)	Freq.Error (Hz)	Freq.Error (Hz)	Frequency Stability (ppm)	Frequency Stability (ppm)	Frequency Stability (ppm)	Verdict
BANDWIDTH	20MHz							
Temperature	Voltage	64QAM	16QAM	QPSK	64QAM	16QAM	QPSK	
Normal (25℃)	Normal	8.98	17.06	3.81	0.00478	0.00908	0.00203	PASS
Extreme (50℃)		10.23	1.53	6.71	0.00544	0.00081	0.00357	PASS
Extreme (40℃)		12.26	2.47	10.63	0.00652	0.00131	0.00565	PASS
Extreme (30℃)		15.94	6.99	4.43	0.00848	0.00372	0.00236	PASS
Extreme (20℃)		7.84	10.37	13.28	0.00417	0.00552	0.00706	PASS
Extreme (10℃)		5.97	16.98	17.17	0.00317	0.00903	0.00913	PASS
Extreme (0℃)		16.82	6.50	6.33	0.00895	0.00346	0.00337	PASS
Extreme (-10℃)		4.35	6.36	8.54	0.00231	0.00338	0.00454	PASS
Extreme (-20℃)		7.10	12.77	16.30	0.00378	0.00679	0.00867	PASS
Extreme (-30℃)		7.22	3.30	13.37	0.00384	0.00175	0.00711	PASS
25℃	LV	2.91	1.59	5.67	0.00155	0.00084	0.00302	PASS
	HV	9.15	7.53	17.51	0.00487	0.00401	0.00932	PASS

6.6. Spurious Emissions at Antenna Terminals


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.


GSM 1900 CH-Low 9kHz ~ 20GHz

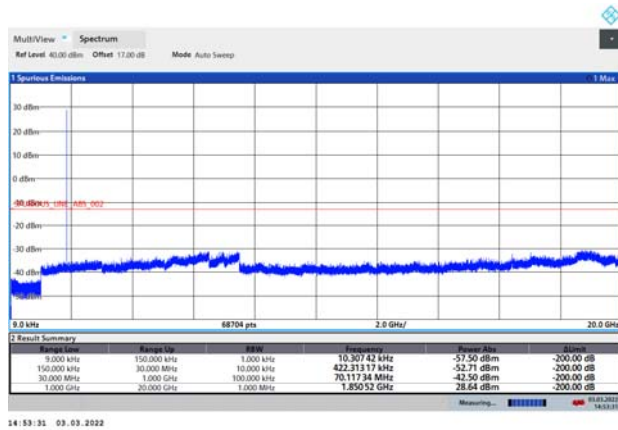


GPRS 1900 CH-Low 9kHz ~ 20GHz

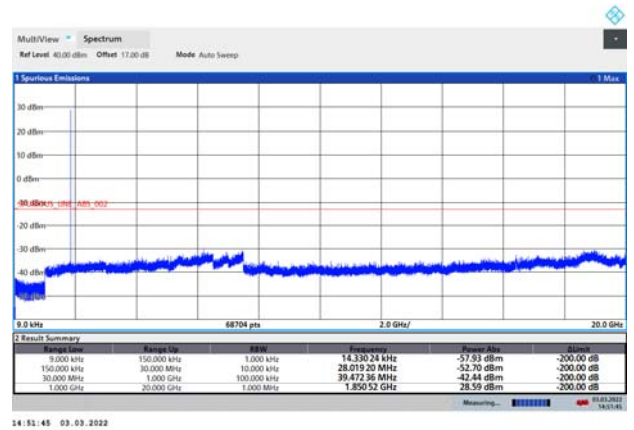


GSM 1900 CH- Middle 9kHz ~ 20GHz

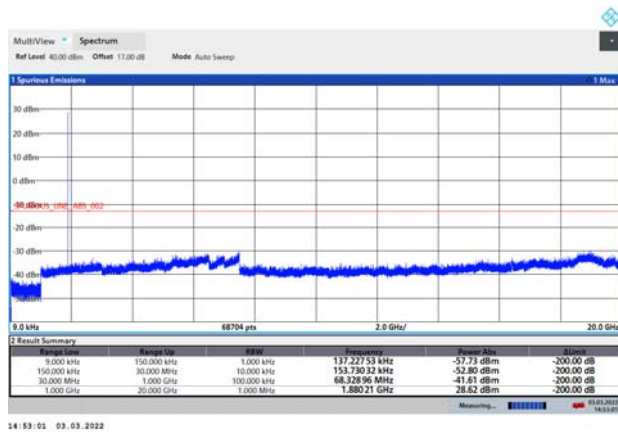


GPRS 1900 CH- Middle 9kHz ~ 20GHz

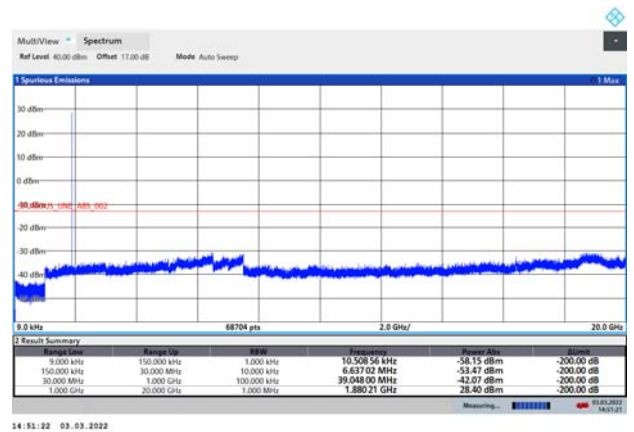


GSM 1900 CH-High 9kHz ~ 20GHz

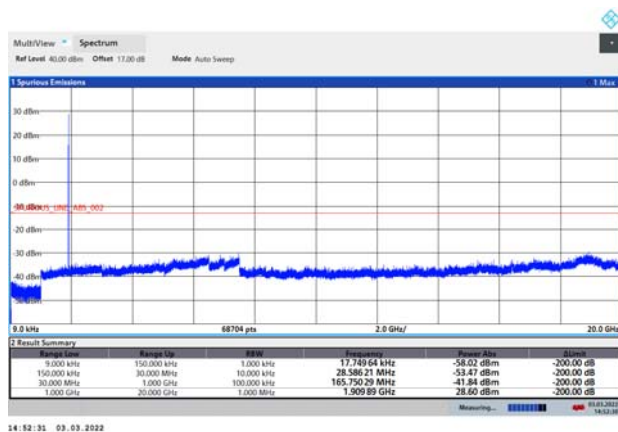

GPRS 1900 CH-High 9kHz ~ 20GHz

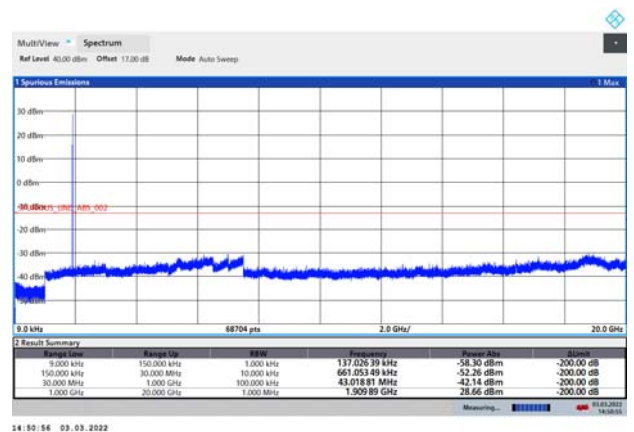


EGPRS 1900 CH-Low 9kHz ~ 20GHz

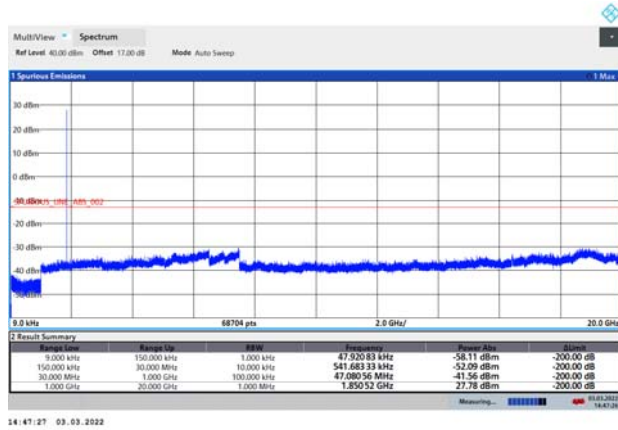


14:47:27 03.03.2022

WCDMA BAND II CH-Low 9kHz ~ 20GHz

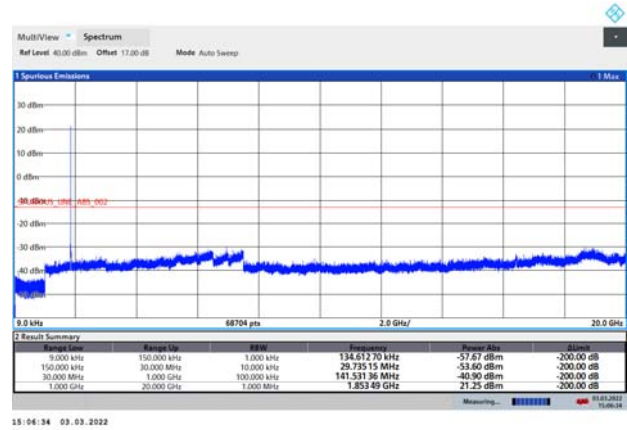


15:06:34 03.03.2022

EGPRS 1900 CH- Middle 9kHz ~ 20GHz

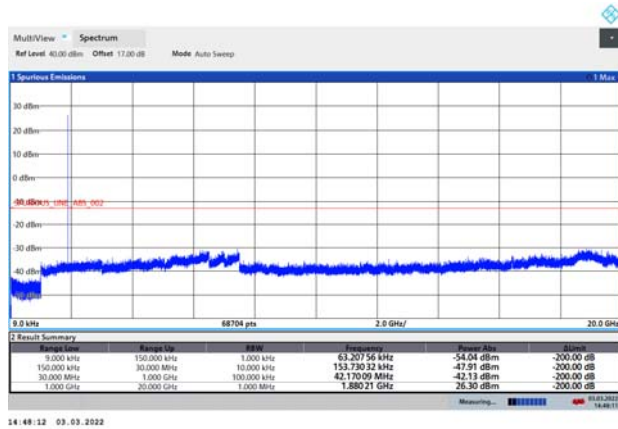


14:48:12 03.03.2022

WCDMA BAND II CH- Middle 9kHz ~ 20GHz

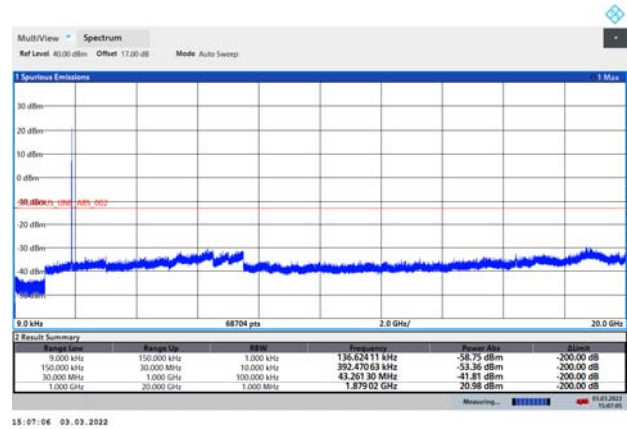


15:07:06 03.03.2022

EGPRS 1900 CH-High 9kHz ~ 20GHz

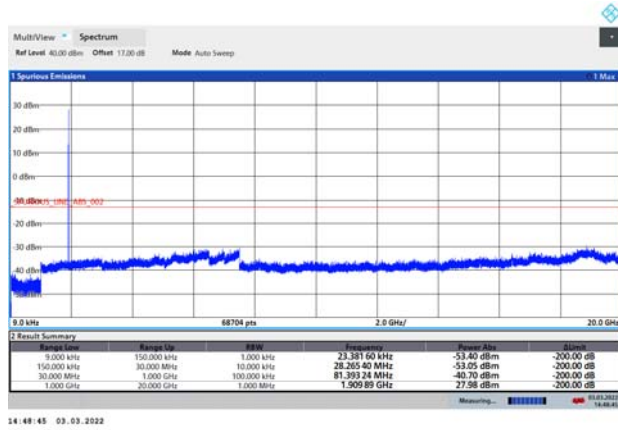


14:48:45 03.03.2022

WCDMA BAND II CH-High 9kHz ~ 20GHz

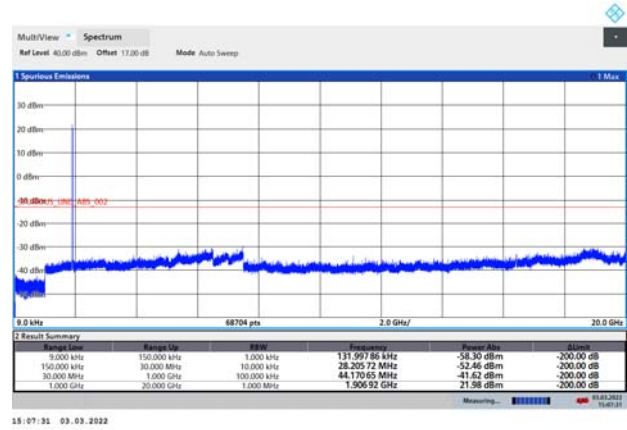


15:07:31 03.03.2022


LTE Band 2 1.4MHz CH-Low 9kHz~20GHz

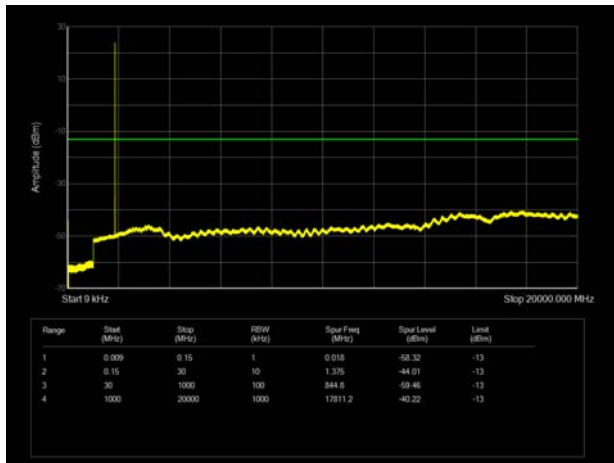


LTE Band 2 3MHz CH-Low 9kHz~20GHz

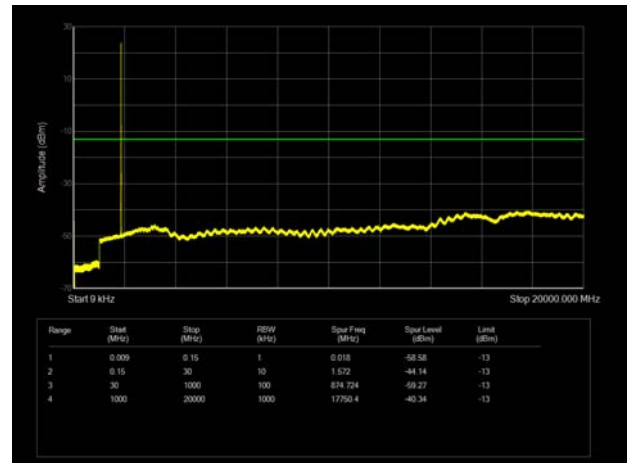


LTE Band 2 1.4MHz CH-Middle 9kHz~20GHz

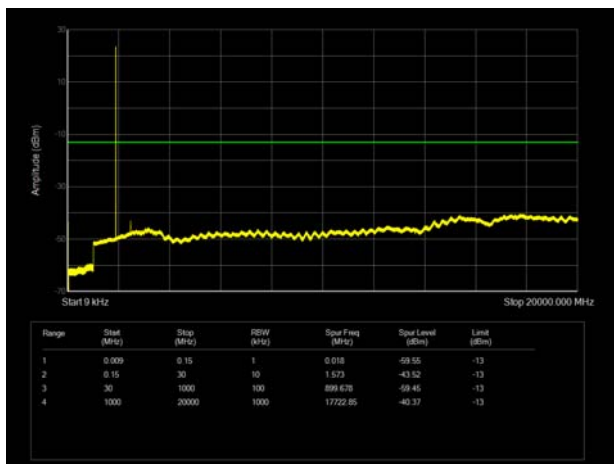


LTE Band 2 3MHz CH-Middle 9kHz~20GHz

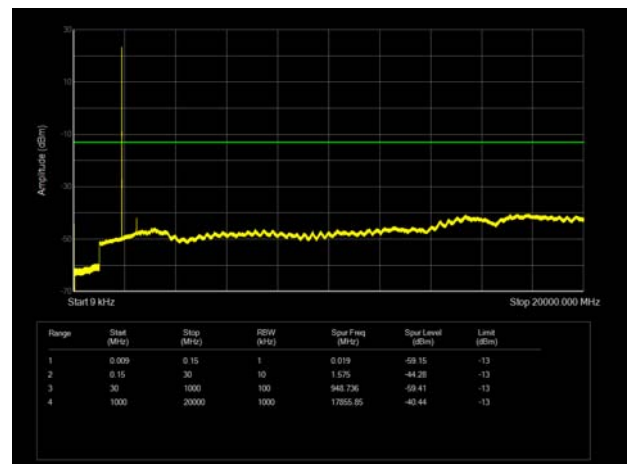


LTE Band 2 1.4MHz CH-High 9kHz~20GHz

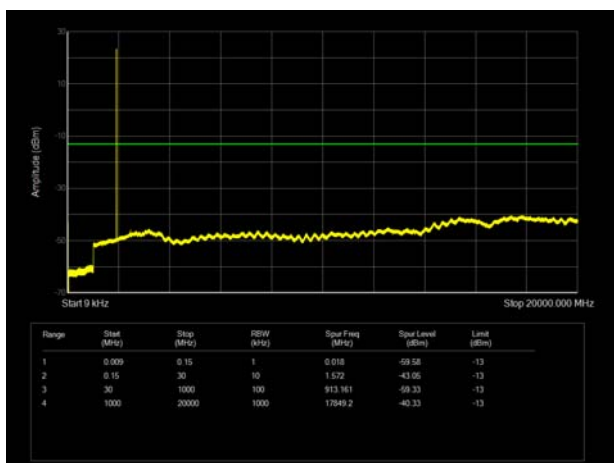


LTE Band 2 3MHz CH-High 9kHz~20GHz

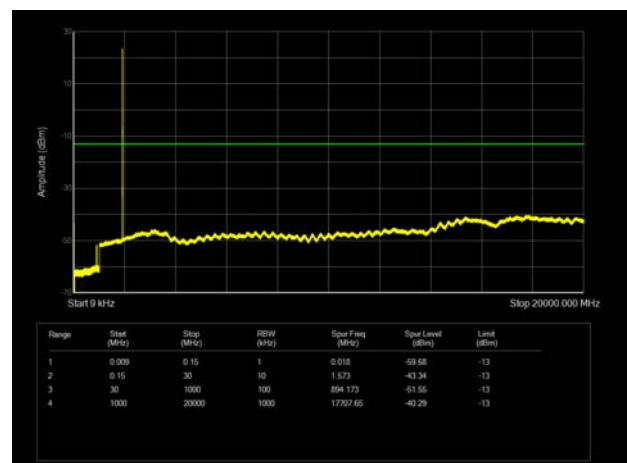


LTE Band 2 5MHz CH-Low 9kHz~20GHz

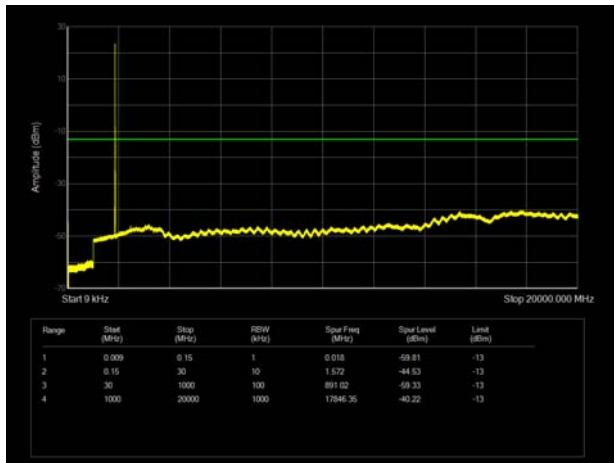


LTE Band 2 10MHz CH-Low 9kHz~20GHz

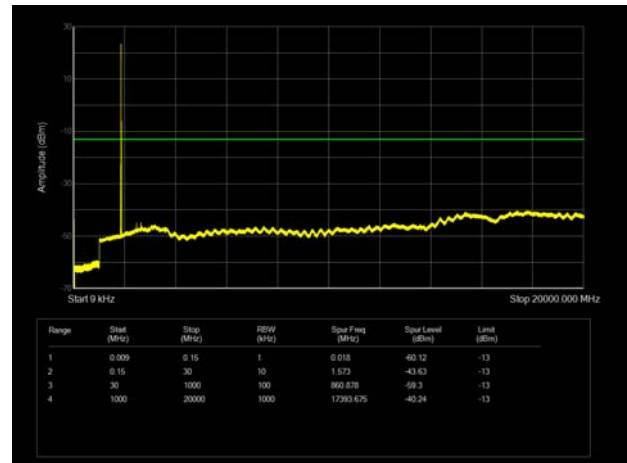


LTE Band 2 5MHz CH-Middle 9kHz~20GHz

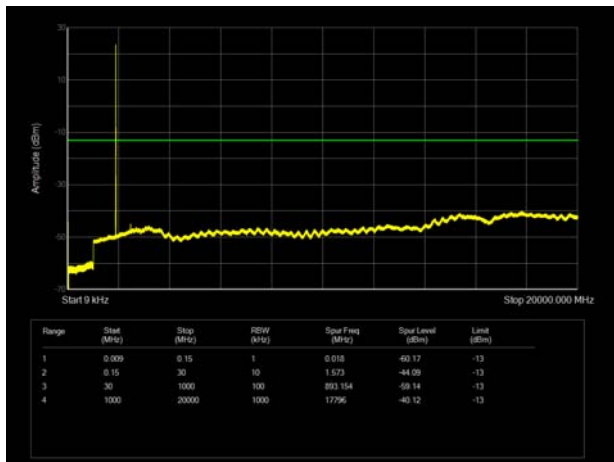


LTE Band 2 10MHz CH-Middle 9kHz~20GHz

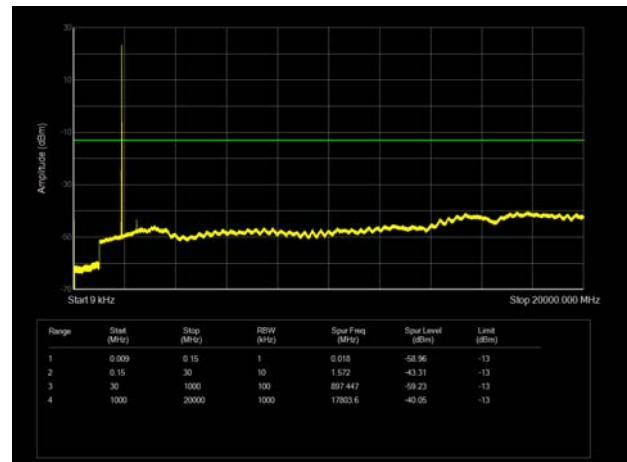


LTE Band 2 5MHz CH-High 9kHz~20GHz

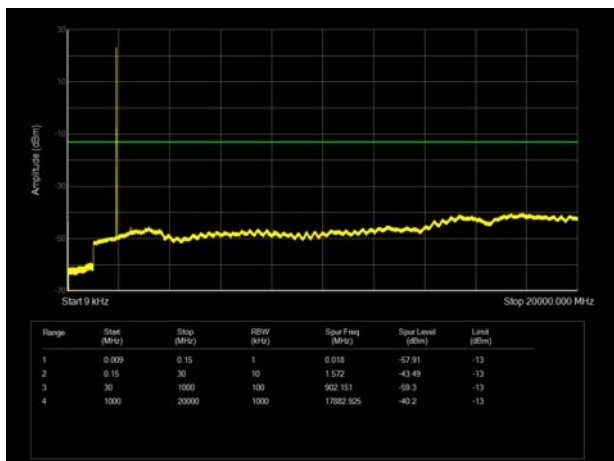


LTE Band 2 10MHz CH-High 9kHz~20GHz

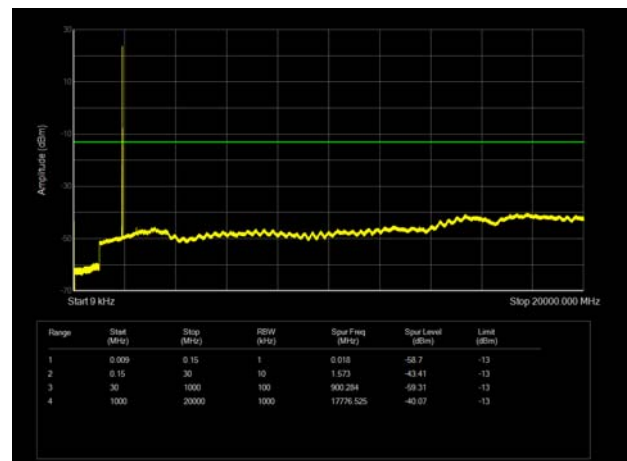


LTE Band 2 15MHz CH-Low 9kHz~20GHz

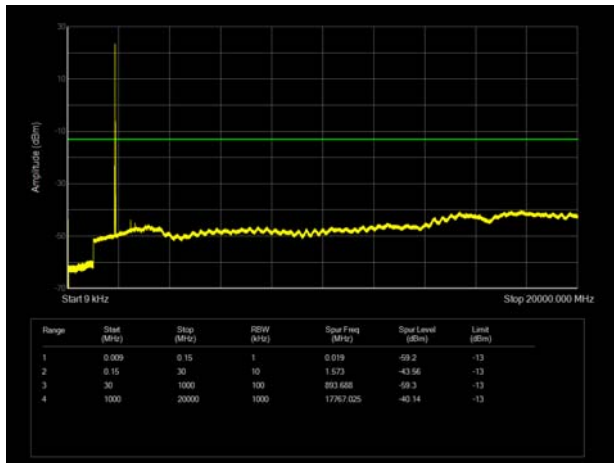


LTE Band 2 20MHz CH-Low 9kHz~20GHz

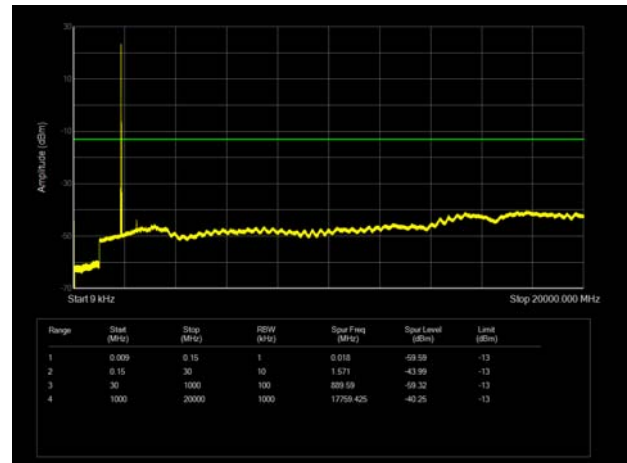


LTE Band 2 15MHz CH-Middle 9kHz~20GHz

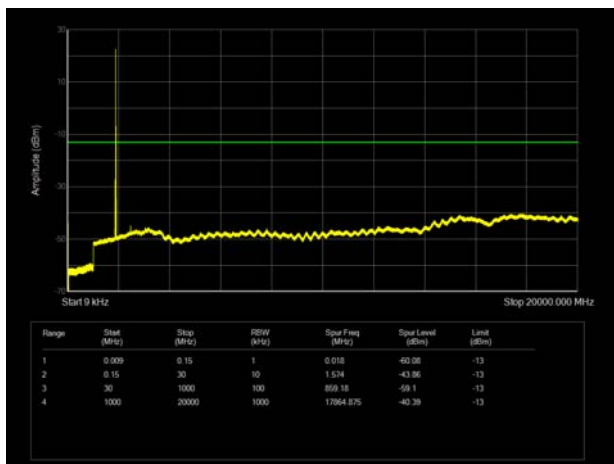


LTE Band 2 20MHz CH-Middle 9kHz~20GHz

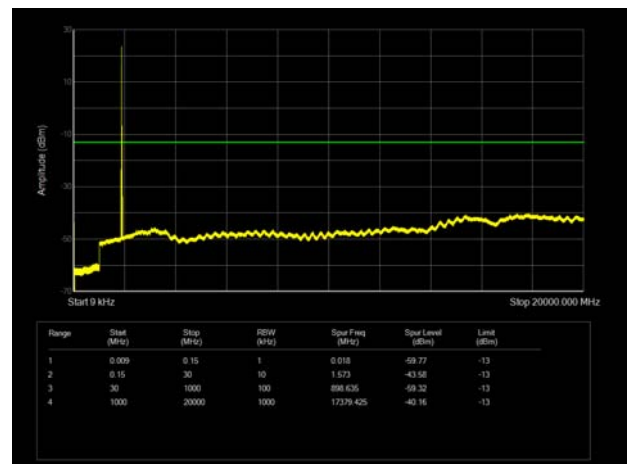

LTE Band 2 15MHz CH-High 9kHz~20GHz

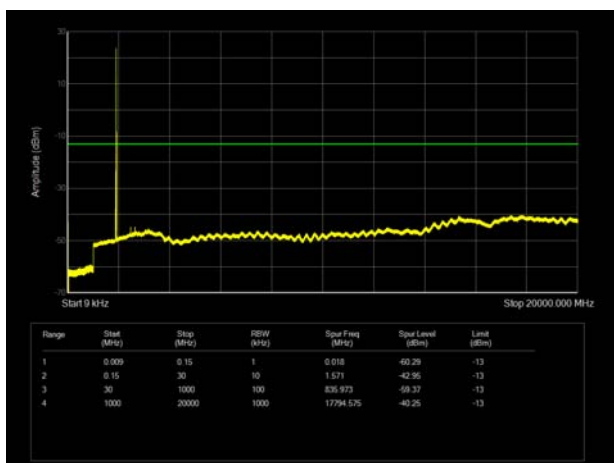

LTE Band 2 20MHz CH-High 9kHz~20GHz

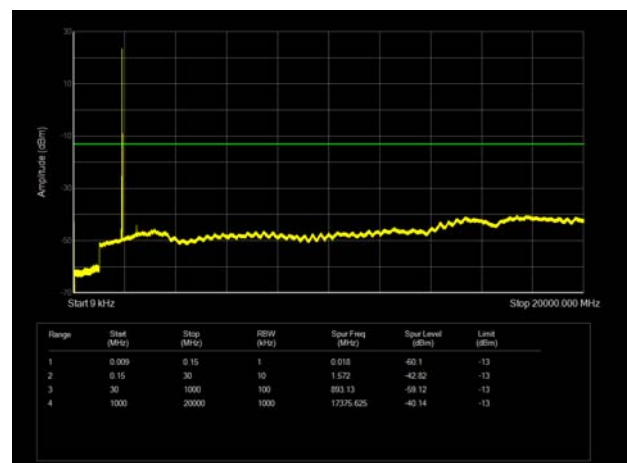

6.7. Radiates Spurious Emission

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

Low Antenna

GSM 1900 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.00	-63.14	2.60	12.50	Horizontal	-53.24	-13.00	40.24	0
3	5640.00	-59.35	3.30	12.50	Horizontal	-50.15	-13.00	37.15	225
4	7520.00	-58.20	4.20	12.20	Horizontal	-50.20	-13.00	37.20	45
5	9400.00	-53.94	4.30	11.10	Horizontal	-47.14	-13.00	34.14	90
6	11280.00	-50.25	5.90	11.90	Horizontal	-44.25	-13.00	31.25	225
7	13160.00	-52.28	5.70	14.00	Horizontal	-43.98	-13.00	30.98	45
8	15040.00	-47.62	5.80	13.10	Horizontal	-40.32	-13.00	27.32	45
9	16920.00	-49.74	6.10	14.60	Horizontal	-41.24	-13.00	28.24	135
10	-	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

WCDMA Band II CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.00	-65.14	2.60	12.50	Horizontal	-55.24	-13.00	42.24	90
3	5640.00	-61.67	3.30	12.50	Horizontal	-52.47	-13.00	39.47	180
4	7520.00	-57.40	4.20	12.20	Horizontal	-49.40	-13.00	36.40	45
5	9400.00	-56.02	4.30	11.10	Horizontal	-49.22	-13.00	36.22	270
6	11280.00	-52.13	5.90	11.90	Horizontal	-46.13	-13.00	33.13	45
7	13160.00	-52.03	5.70	14.00	Horizontal	-43.73	-13.00	30.73	135
8	15040.00	-47.22	5.80	13.10	Horizontal	-39.92	-13.00	26.92	90
9	16920.00	-50.76	6.10	14.60	Horizontal	-42.26	-13.00	29.26	0
10	-	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.00	-63.03	2.60	12.50	Horizontal	-53.13	-13.00	40.13	225
3	5638.88	-53.35	3.30	12.50	Horizontal	-44.15	-13.00	31.15	180
4	7520.00	-57.64	4.20	12.20	Horizontal	-49.64	-13.00	36.64	45
5	9400.00	-52.65	4.30	11.10	Horizontal	-45.85	-13.00	32.85	135
6	11280.00	-51.04	5.90	11.90	Horizontal	-45.04	-13.00	32.04	315
7	13160.00	-52.65	5.70	14.00	Horizontal	-44.35	-13.00	31.35	90
8	15040.00	-47.05	5.80	13.10	Horizontal	-39.75	-13.00	26.75	180
9	16920.00	-50.25	6.10	14.60	Horizontal	-41.75	-13.00	28.75	315
10	-	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3755.00	-63.06	2.60	12.50	Horizontal	-53.16	-13.00	40.16	45
3	5632.50	-61.98	3.30	12.50	Horizontal	-52.78	-13.00	39.78	135
4	7510.00	-57.87	4.20	12.20	Horizontal	-49.87	-13.00	36.87	225
5	9387.50	-52.55	4.30	11.10	Horizontal	-45.75	-13.00	32.75	90
6	11265.00	-50.59	5.90	11.90	Horizontal	-44.59	-13.00	31.59	180
7	13142.50	-53.60	5.70	14.00	Horizontal	-45.30	-13.00	32.30	315
8	15020.00	-46.79	5.80	13.10	Horizontal	-39.49	-13.00	26.49	0
9	16897.50	-49.43	6.10	14.60	Horizontal	-40.93	-13.00	27.93	225
10	-	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3740.00	-65.34	2.60	12.50	Horizontal	-55.44	-13.00	42.44	315
3	5610.00	-62.25	3.30	12.50	Horizontal	-53.05	-13.00	40.05	135
4	7480.00	-57.27	4.20	12.20	Horizontal	-49.27	-13.00	36.27	0
5	9350.00	-50.99	4.30	11.10	Horizontal	-44.19	-13.00	31.19	45
6	11220.00	-50.32	5.90	11.90	Horizontal	-44.32	-13.00	31.32	135
7	13090.00	-52.26	5.70	14.00	Horizontal	-43.96	-13.00	30.96	225
8	14960.00	-45.11	5.80	13.10	Horizontal	-37.81	-13.00	24.81	90
9	16830.00	-49.63	6.10	14.60	Horizontal	-41.13	-13.00	28.13	270
10	-	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

**Upper Antenna**

GSM 1900 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.00	-65.73	2.60	12.50	Horizontal	-55.83	-13.00	42.83	270
3	5640.00	-60.82	3.30	12.50	Horizontal	-51.62	-13.00	38.62	90
4	7520.00	-56.79	4.20	12.20	Horizontal	-48.79	-13.00	35.79	0
5	9400.00	-52.42	4.30	11.10	Horizontal	-45.62	-13.00	32.62	0
6	11280.00	-48.98	5.90	11.90	Horizontal	-42.98	-13.00	29.98	315
7	13160.00	-52.55	5.70	14.00	Horizontal	-44.25	-13.00	31.25	45
8	15040.00	-47.57	5.80	13.10	Horizontal	-40.27	-13.00	27.27	45
9	16920.00	-49.19	6.10	14.60	Horizontal	-40.69	-13.00	27.69	270
10	-	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

WCDMA Band II CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.00	-64.33	2.60	12.50	Horizontal	-54.43	-13.00	41.43	135
3	5640.00	-61.59	3.30	12.50	Horizontal	-52.39	-13.00	39.39	180
4	7520.00	-57.88	4.20	12.20	Horizontal	-49.88	-13.00	36.88	90
5	9400.00	-52.73	4.30	11.10	Horizontal	-45.93	-13.00	32.93	270
6	11280.00	-50.56	5.90	11.90	Horizontal	-44.56	-13.00	31.56	90
7	13160.00	-52.50	5.70	14.00	Horizontal	-44.20	-13.00	31.20	135
8	15040.00	-47.82	5.80	13.10	Horizontal	-40.52	-13.00	27.52	0
9	16920.00	-50.10	6.10	14.60	Horizontal	-41.60	-13.00	28.60	0
10	-	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.00	-65.68	2.60	12.50	Horizontal	-55.78	-13.00	42.78	270
3	5638.00	-61.92	3.30	12.50	Horizontal	-52.72	-13.00	39.72	0
4	7520.00	-57.78	4.20	12.20	Horizontal	-49.78	-13.00	36.78	270
5	9400.00	-52.42	4.30	11.10	Horizontal	-45.62	-13.00	32.62	135
6	11280.00	-50.41	5.90	11.90	Horizontal	-44.41	-13.00	31.41	0
7	13160.00	-52.40	5.70	14.00	Horizontal	-44.10	-13.00	31.10	90
8	15040.00	-47.40	5.80	13.10	Horizontal	-40.10	-13.00	27.10	45
9	16920.00	-50.53	6.10	14.60	Horizontal	-42.03	-13.00	29.03	315
10	-	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3755.00	-66.59	2.60	12.50	Horizontal	-56.69	-13.00	43.69	45
3	5632.50	-62.80	3.30	12.50	Horizontal	-53.60	-13.00	40.60	135
4	7510.00	-57.56	4.20	12.20	Horizontal	-49.56	-13.00	36.56	180
5	9387.50	-53.13	4.30	11.10	Horizontal	-46.33	-13.00	33.33	315
6	11265.00	-52.17	5.90	11.90	Horizontal	-46.17	-13.00	33.17	0
7	13142.50	-51.70	5.70	14.00	Horizontal	-43.40	-13.00	30.40	270
8	15020.00	-47.56	5.80	13.10	Horizontal	-40.26	-13.00	27.26	0
9	16897.50	-49.96	6.10	14.60	Horizontal	-41.46	-13.00	28.46	90
10	-	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3740.00	-66.86	2.60	12.50	Horizontal	-56.96	-13.00	43.96	315
3	5610.00	-62.52	3.30	12.50	Horizontal	-53.32	-13.00	40.32	90
4	7480.00	-57.94	4.20	12.20	Horizontal	-49.94	-13.00	36.94	0
5	9350.00	-52.89	4.30	11.10	Horizontal	-46.09	-13.00	33.09	135
6	11220.00	-51.46	5.90	11.90	Horizontal	-45.46	-13.00	32.46	135
7	13090.00	-51.71	5.70	14.00	Horizontal	-43.41	-13.00	30.41	180
8	14960.00	-46.21	5.80	13.10	Horizontal	-38.91	-13.00	25.91	90
9	16830.00	-49.31	6.10	14.60	Horizontal	-40.81	-13.00	27.81	0
10	-	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

7. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Climate Chamber	Weiss	VT4002	58226119450010	2021-05-15	2022-05-14
Base Station Simulator	R&S	CMW500	150415	2021-05-15	2022-05-14
Spectrum Analyzer	Keysight	N9020A	MY52330084	2021-05-15	2022-05-14
Universal Radio Communication Tester	Agilent	E5515C	GB44400275	2021-05-15	2022-05-14
Signal Analyzer	R&S	FSV3030	101411	2021-12-12	2022-12-11
Signal Analyzer	R&S	FSV30	100815	2021-12-12	2022-12-11
Loop Antenna	Schwarzbeck	FMZB1519	1519-047	2020-04-02	2023-04-01
Horn Antenna	Schwarzbeck	BBHA 9120D	01799	2019-09-21	2022-09-21
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	01439	2021-06-30	2024-06-29
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2023-06-19
Software	R&S	EMC32	10.35.10	\	\

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance is submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos is submitted separately.